



FCC Test Report

Test report no.: EMC_439FCC22-24-2003_IX550CDMA
FCC Part 22,24 / RSS 133
(IX-550)

FCC ID: KBCIX550AC555



Accredited according to **ISO/IEC 17025**



FCC listed # 101450

IC recognized # 3925

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

Table of Contents

1	General information
1.1	Notes
1.2	Testing laboratory
1.3	Details of applicant
1.4	Application details
1.5	Test item
1.6	Test standards
2	Technical test
2.1	Summary of test results
2.2	Test report
1	General information
1.1	Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc.

TEST REPORT PREPARED BY:**EMC Engineer: Philip Kim****1.2 Testing laboratory**

CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200

Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetecomusa.comInternet: www.cetecom.com

1.3 Details of applicant

Name : Itronix Coporation
Street : 804 South Stevens St.
City / Zip Code : Spokane, WA 99204
Country : USA
Contact : Mr. Richard Sargent
Telephone : 509-742-1253
Tele-fax : 509-742-1672
e-mail : Sargent@itronix.com

1.4 Application details

Date of receipt of application : 2002-03-12
Date of receipt test item : 2002-03-12
Date of test : 2003-03-12~13 & 2003-03-19

1.5 Test item

Manufacturer : Itronix Coporation
Street Address : 1709 N. Madson St.
City / Zip Code : Liberty Lake, WA 99019
Country : USA
Marketing Name :
Model No. : **IX-550**
Serial No. (IMEI) :
Description : [Ruggedized Laptop Computer with CDMA \(AC555\)](#)
FCC-ID : KBCIX550AC555

Additional information

Frequency : CDMA 800/1900 MHz
i.e. 824-894MHz/ 1850-1910MHz
Type of modulation : OQPSK
Number of channels : 833(Cellular)/1199 (PCS)
Antenna : Whip, Monopole
Power supply : 5.0Vdc
Output power : 27.89dBm Peak EIRP (PCS-1900)
25.03dBm Peak EIRP (CELLULAR-850)
Extreme vol. Limits : Lower:4.5Vdc Nominal:5.5Vdc Upper:5.5Vdc
Extreme temp. Tolerance : Lower:-30°C Upper: 60°C

1.6 Test standards

FCC Part 22,24 / RSS133 r1

2 Technical test**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (only “passed” if all single measurements are “passed”)	Passed

Note: The tested unit **IX550** has embedded CDMA PCMCIA card and antenna. **The embedded PCMCIA card has not been modified since it was tested as in report AirCard555-N7NACRD555.** Therefore, all of the conducted results are included in report AirCard555-N7NACRD555 and only the radiated results are included in this report.

Technical responsibility for area of testing:

2003-05-14 EMC & Radio Lothar Schmidt (Manager)



Date

Section

Name

Signature

Responsible for test report and project leader:

2003-04-10 EMC & Radio Philip Kim (EMC Engineer)



Date

Section

Name

Signature

2.2 Test report

TEST REPORT

**Test report no.: EMC_439FCC22-24-2003_IX550CDMA
(IX-550)**

TEST REPORT REFERENCE

PARAMETER TO BE MEASURED	PARAGRAPH	PAGE
TEST REPORT REFERENCE		6
POWER OUTPUT	§ 22.913(A) / § 24.232 (B)	7
EIRP / ERP Measurements.....		8
ERP (CELLULAR-850)	§22.913(a).....	9
EIRP (PCS-1900)	§24.232(b)	13
EMISSION LIMITS TRANSMITTER	§24.238.....	17
RESULTS OF RADIATED TESTS CELLULAR-850:		18
RESULTS OF RADIATED TESTS (PCS-1900)		28
RECEIVER RADIATED EMISSIONS	§ 2.1053 / RSS-133.....	43
CONDUCTED EMISSIONS	§ 15.107/207.....	48
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		51
BLOCK DIAGRAMS.....		52

POWER OUTPUT**§ 22.913(a) / § 24.232 (b)****Summary:**

During the process of testing, the EUT was controlled via Rhode & Schwarz Universal Radio Communication tester (CMU 200) to ensure max. power transmission and proper modulation.

This paragraph contains both average, peak output powers and EIRP measurements for the EUT.(ERP for CELLULAR-850)

In all cases, the peak output power is within the specified limits.

Method of Measurements:

The EUT was set up for the max. Output-power.

The power was measured with R&S Spectrum Analyzer ESIB 40 (peak)

These measurements were done at 3 frequencies,

825.25MHz, **836.5MHz** and **847.75MHz** (bottom, middle and top of operational frequency range) for CELLULAR-850

1850.2MHz, **1880MHz** and **1908.8MHz** (bottom, middle and top of operational frequency range) for PCS-1900

EIRP / ERP Measurements

Description: This is the test for the maximum radiated power from the EUT.

Rule Part 22.913(a) specifies, "The ERP of mobile transmitters must not exceed 7 Watts".

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $P_{in} + 2.1 - P_r$.
3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0 for PCS 1900 & 5 for GSM 850).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (P_{in}).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1\text{dBi}$.

ERP (CELLULAR-850)**§22.913(a)**

Note: Antenna Gain is calculated; please refer to the antenna gain table in this section. **Conducted peak values used in antenna gain calculation can be obtained from report AirCard555-N7NACRD555.**

Limits:

Power Step	ERP (Peak Power)
5	≤38.45dBm (7W)

Power Measurements:**Radiated:**

Frequency (MHz)	Power Step	PEAK (dBm)	
		EIRP	ERP
825.25	5	21.33	19.23
836.5	5	25.03	22.93
847.75	5	22.47	20.37
Measurement uncertainty		±0.5 dB	

ANALYZER SETTINGS: RBW = VBW = 3MHz

Antenna Gain


Frequency (MHz)	Conducted Peak Power (dBm)		
		EIRP	Antenna Gain (dBi)
825.25	27.06	21.33	-5.73
836.5	27.70	25.03	-2.67
847.75	26.93	22.47	-4.46
Measurement uncertainty		±0.5 dB	-4.29

Calculated Antenna Gain is -4.29dBi

Note: The plots show EIRP measurements only.


EIRP Plots**Low Channel (825.25MHz)**

Marker: 825.941383 MHz 21.33 dBm

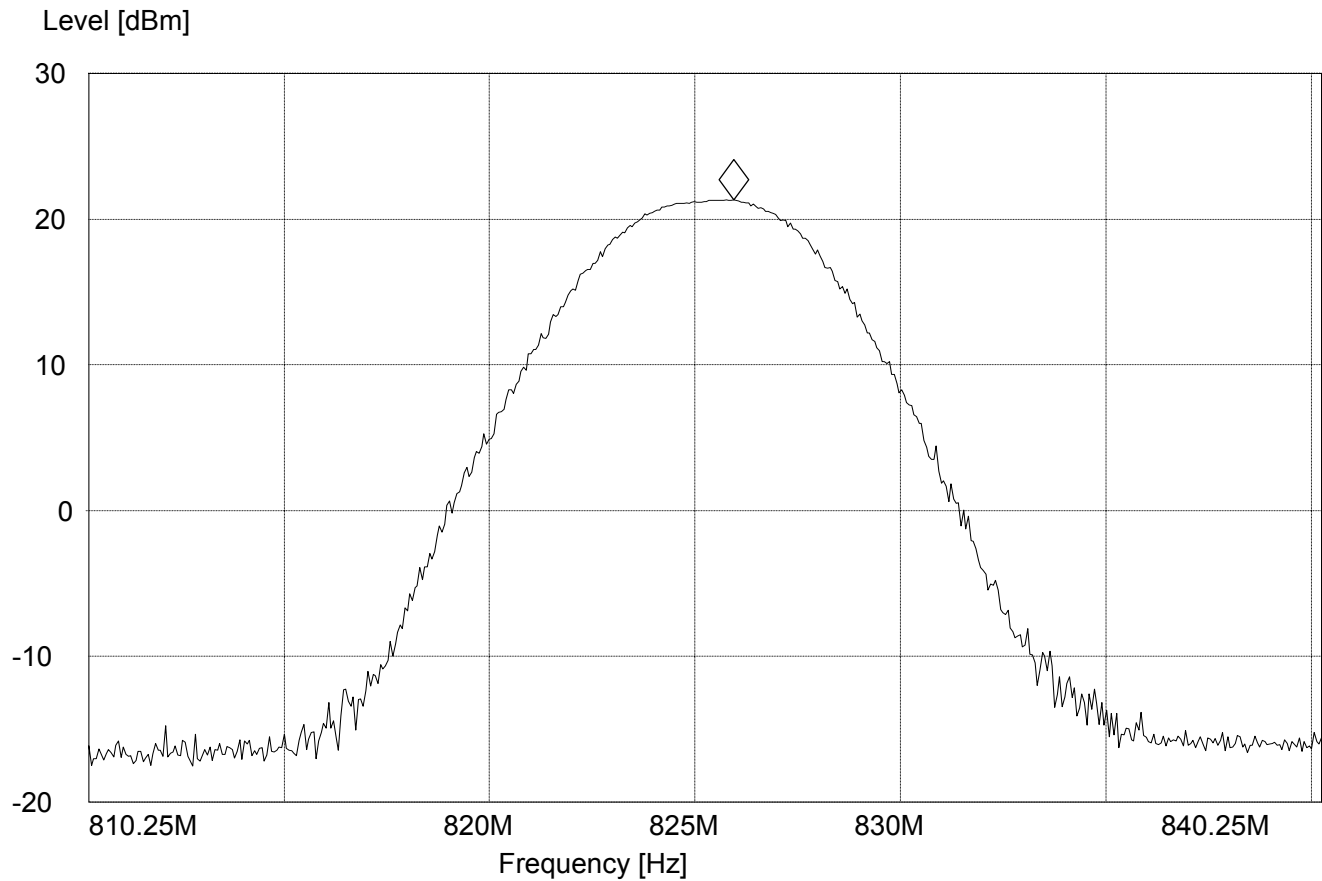


EIRP Plots**Mid Channel (836.5MHz)**

Marker: 836.169339 MHz 25.03 dBm

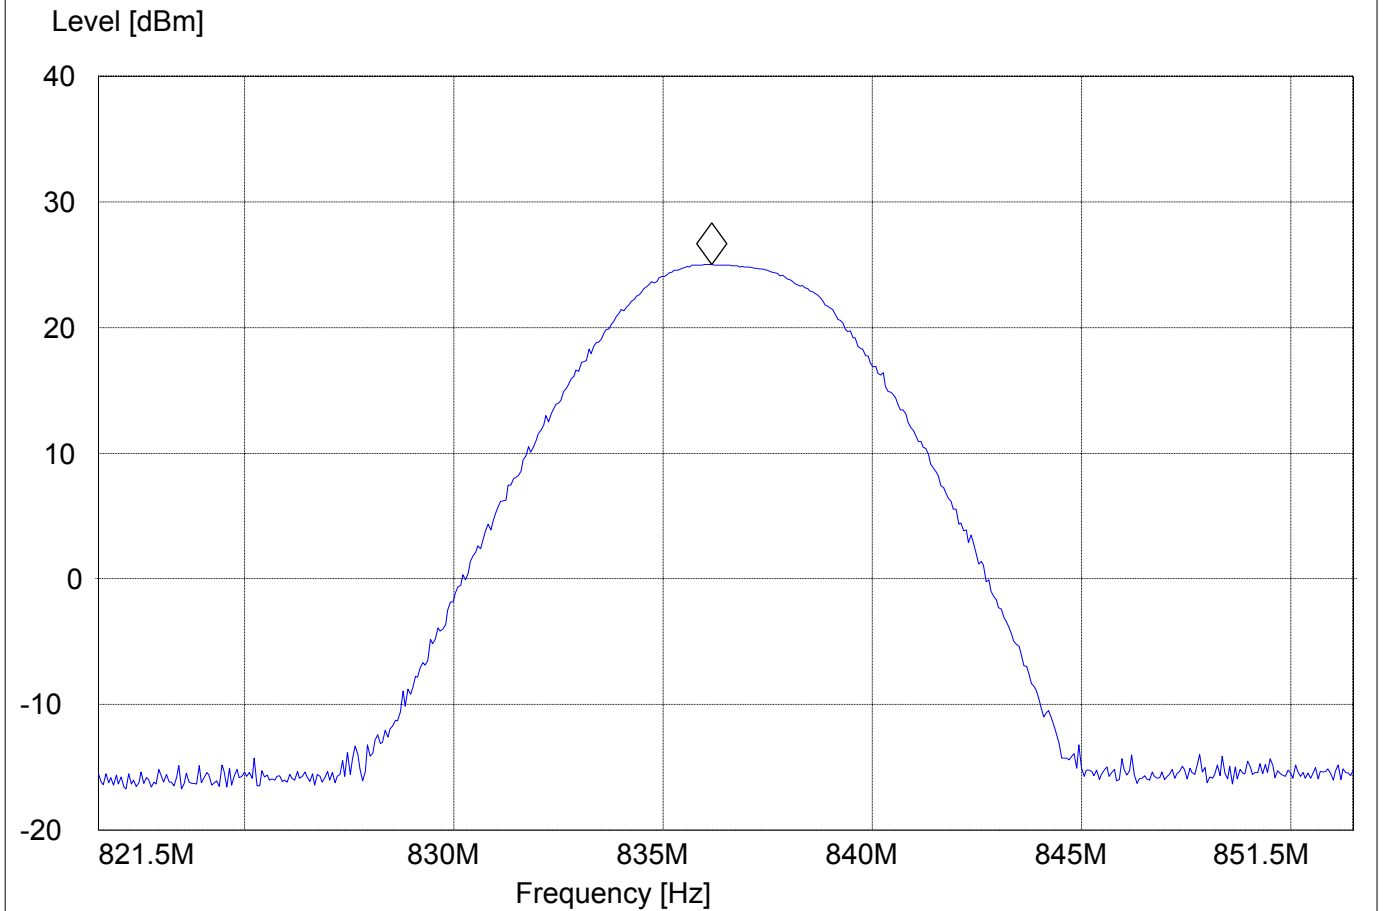

EIRP Plots**High Channel (847.75MHz)**

Marker: 848.321142 MHz 22.47 dBm

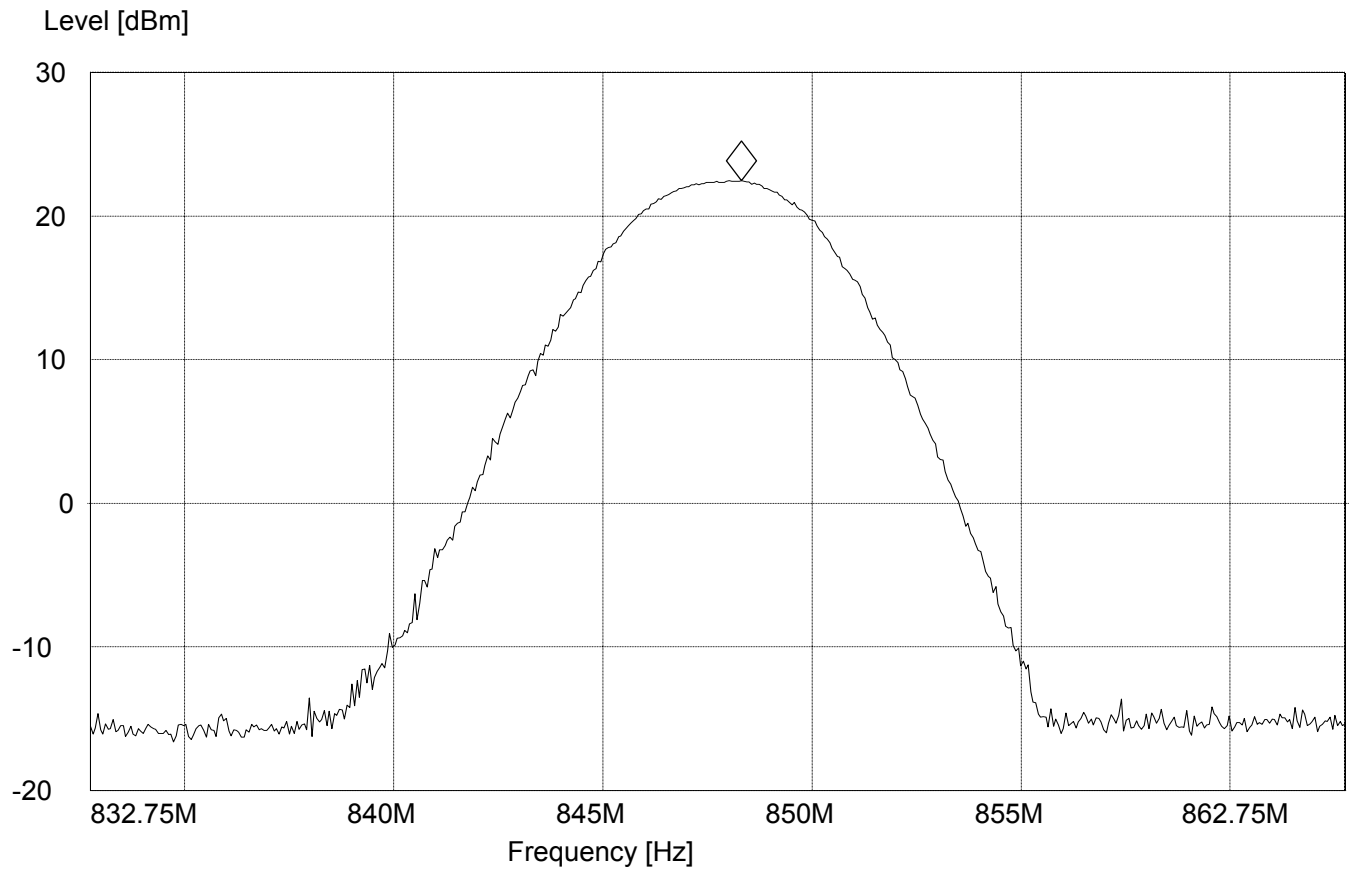

EIRP (PCS-1900)**§24.232(b)**

Note: Antenna Gain is calculated; please refer to the antenna gain table in this section. **Conducted peak values used in antenna gain calculation can be obtained from report AirCard555-N7NACRD555.**

Limits:

Power Step	EIRP (Peak Power)
0	≤33dBm (1W)

Power Measurements:**Radiated:**

Frequency (MHz)	Power Step	PEAK (dBm)	
		EIRP	ERP
1850.2	0	25.96	23.86
1880	0	27.89	25.79
1908.	0	24.87	22.77
Measurement uncertainty	±0.5 dB		

ANALYZER SETTINGS: RBW = VBW = 3MHz

Antenna Gain

Frequency (MHz)	Conducted Peak Power (dBm)		
		EIRP	Antenna Gain (dBi)
1850.2	26.21	25.96	-0.25
1880	26.81	27.89	1.08
1908.	26.61	24.87	-1.74
Measurement uncertainty	±0.5 dB		-0.3


Calculated Antenna Gain is -0.3dBi

Note: The plots show EIRP measurements only.

EIRP Plots**Low Channel (1850.2MHz)**


Marker: 1.851039579 GHz

25.95 dBm

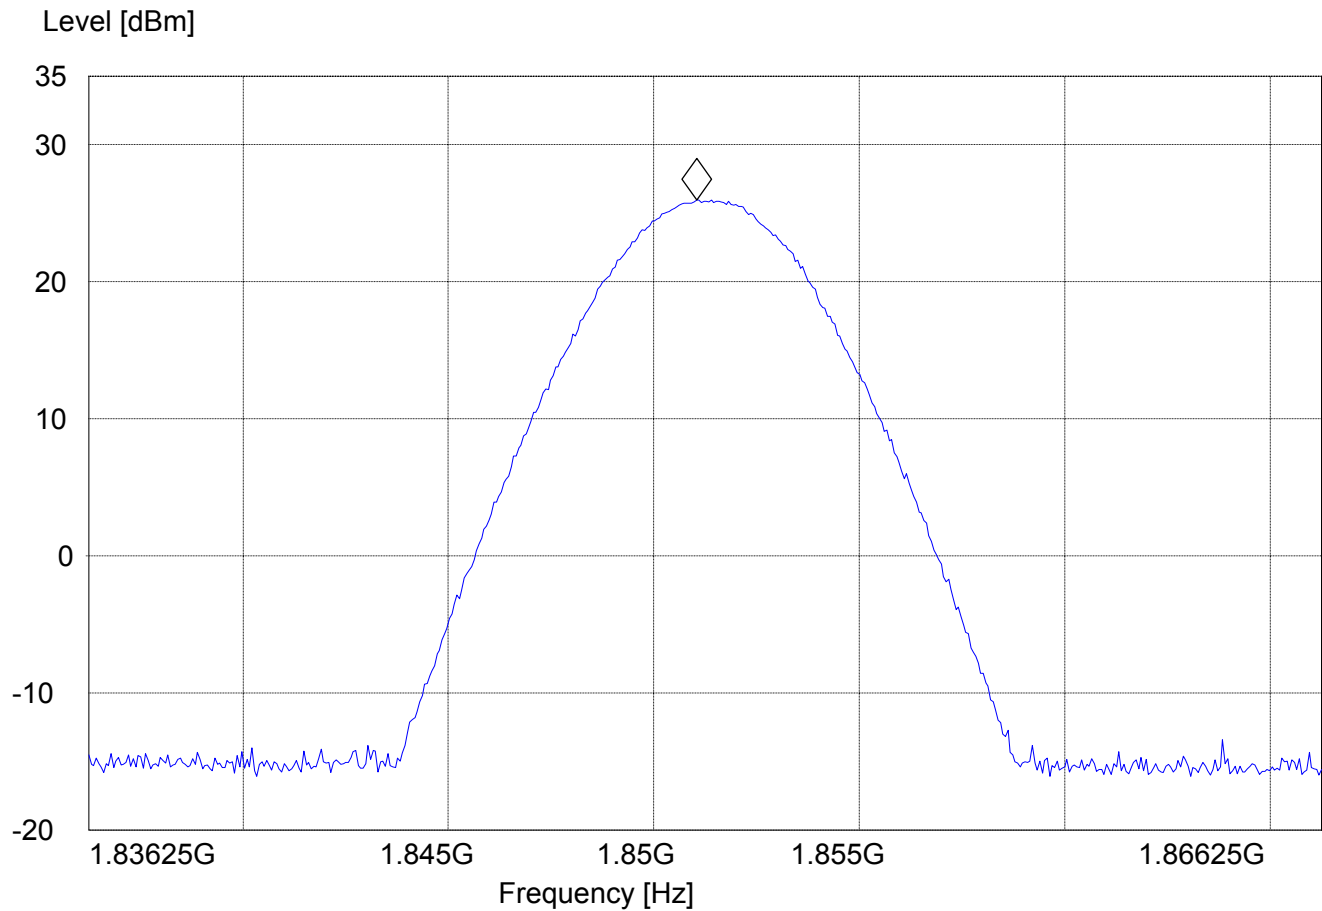


EIRP Plots**Low Channel (1880MHz)**

Marker: 1.880270541 GHz 27.89 dBm

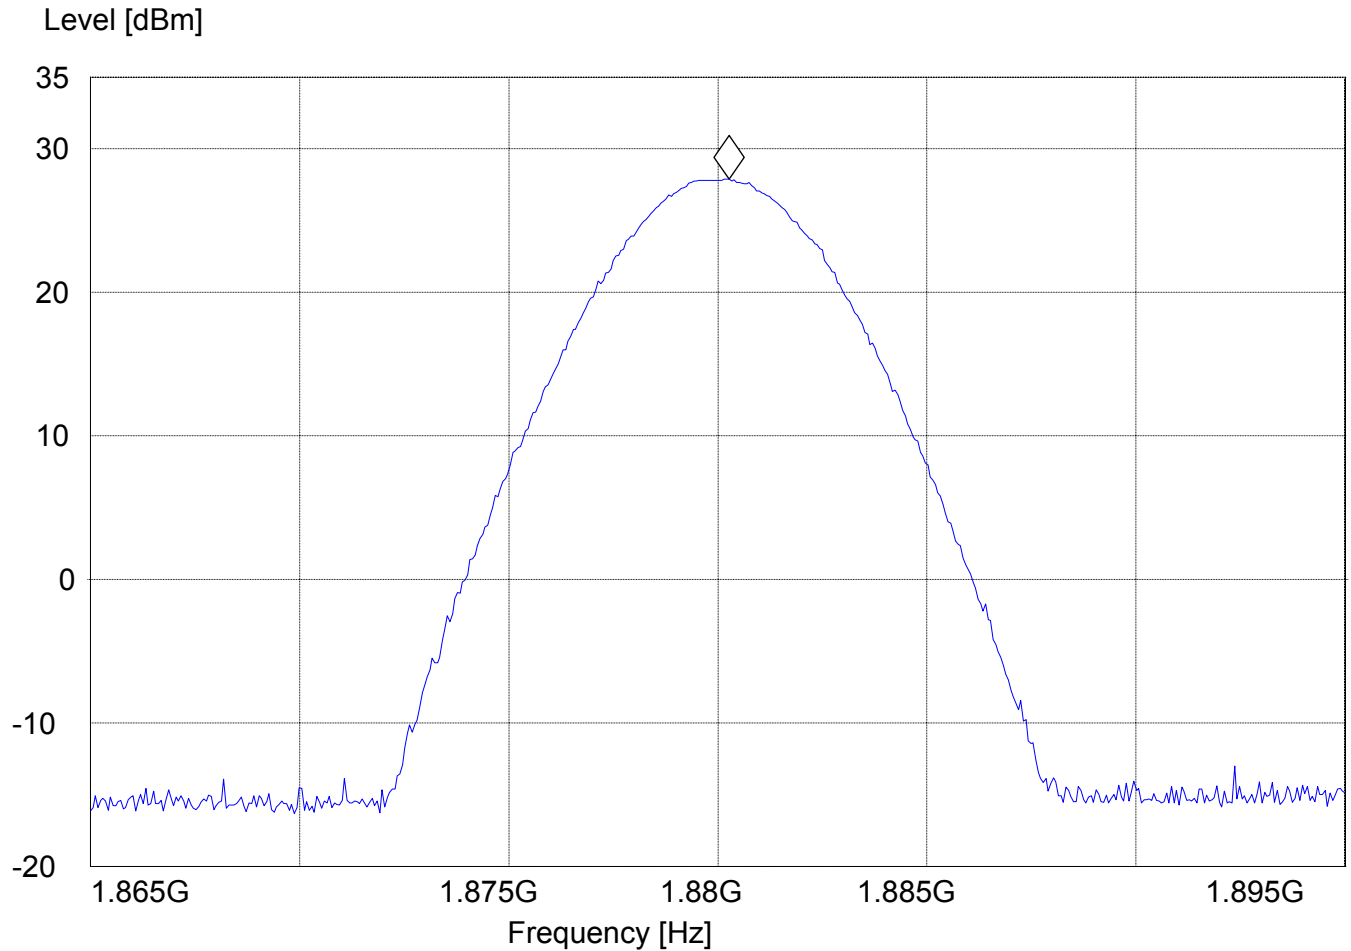

EIRP Plots**Low Channel (1908.MHz)**

Marker: 1.90871994 GHz 24.87 dBm

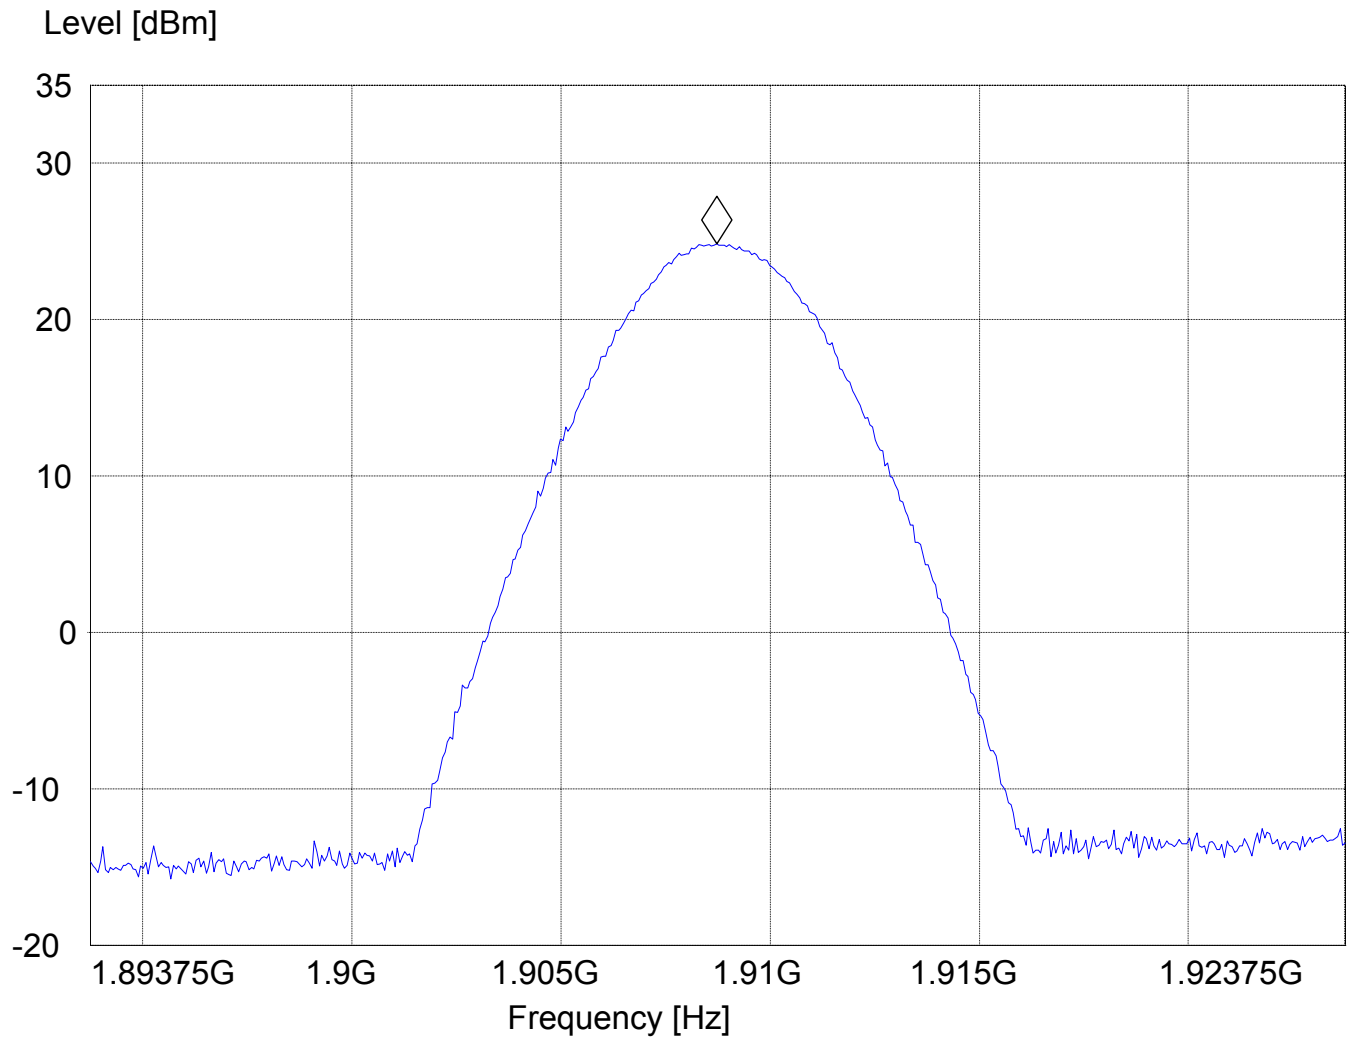

EMISSION LIMITS TRANSMITTER**§24.238****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the EUT. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8MHz for CELLULAR-850 & 1910 MHz for PCS-1900. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the CELLULAR-850 & PCS-1900 bands.

The final Radiated emission test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50-ohm load.
- c) A double-ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was determined by the substitution method described for ERP measurements.

Measurement Limit:

Sec. 24.238 Emission Limits.

- (a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Measurement Results:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the CELLULAR-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF RADIATED TESTS CELLULAR-850:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	1650.5	-28.25	1673	-30.47	1695.5	-27.98
3	2475.75	-40.27	2509.5	-43.18	2543.25	-42.84
4	3301	-42.57	3346	-42.61	3391	-42.41
5	4126.25	-40.84	4182.5	-39.73	4238.75	-42.28
6	4951.5	-38.16	5019	-34.61	5086.5	-35.54
7	5776.75	-33.88	5855.5	-31.58	5934.25	-30.44
8	6602	-29.66	6692	-28.80	6782	-25.99
9	7427.25	-32.41	7528.5	-31.48	7629.75	-30.54
10	8252.5	-31.61	8365	-31.76	8477.5	-31.60


RADIATED SPURIOUS EMISSIONS (CELLULAR-850)**Tx @ 825.25MHz: 30MHz - 1GHz**

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 30M-1G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
30MHz	1GHz	Max Peak	Coupled	1 MHz

Note: The peak above the limit line is the carrier freq. at ch-128.

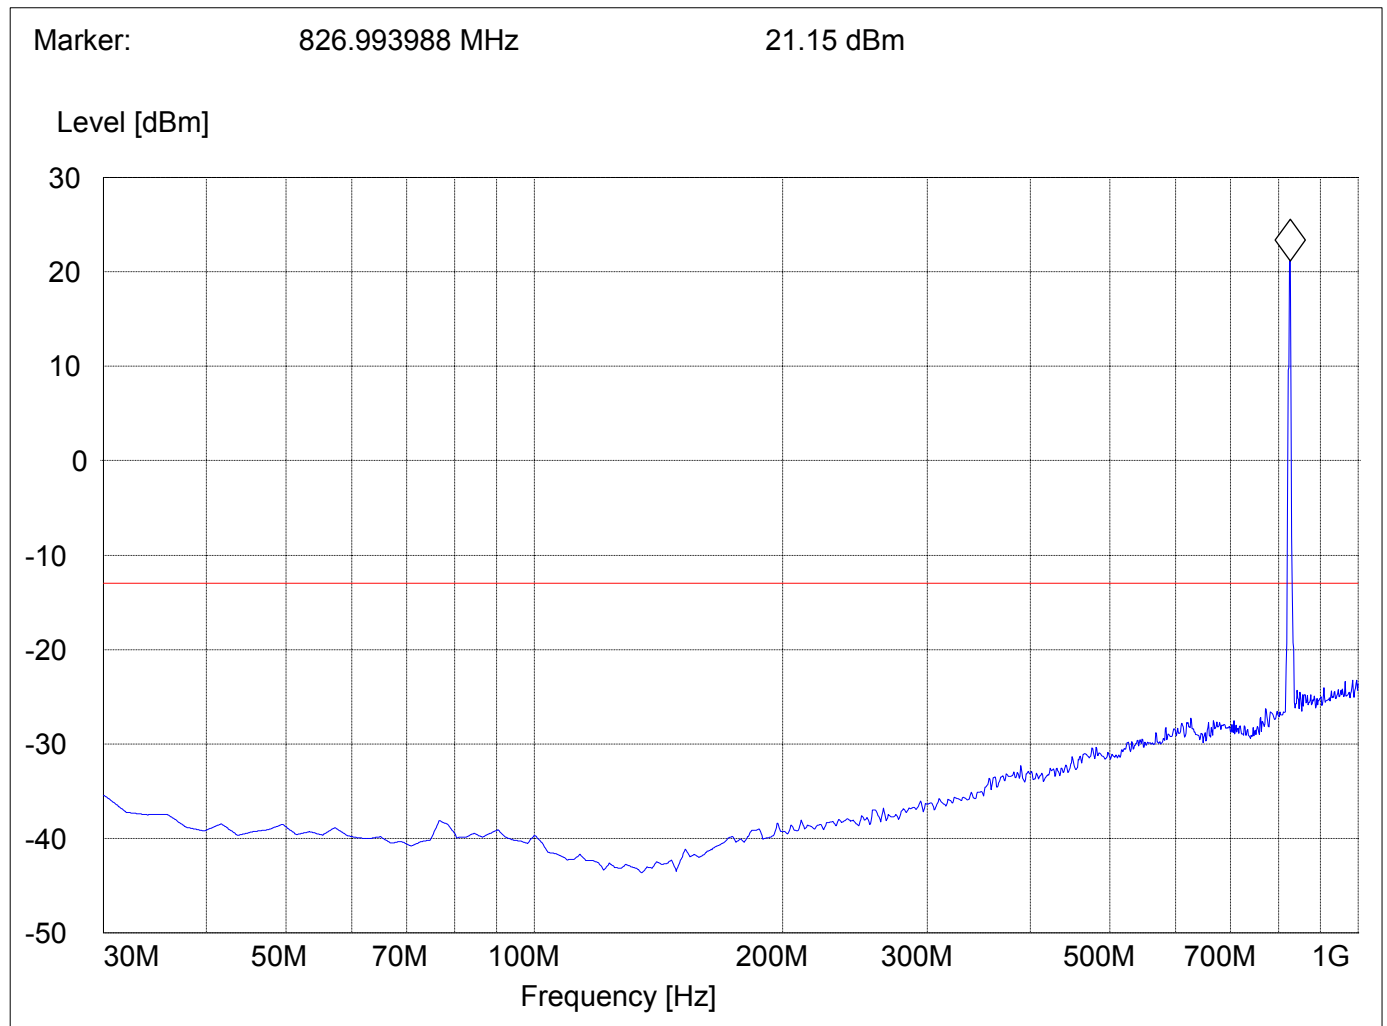

RADIATED SPURIOUS EMISSIONS (CELLULAR-850)

Tx @ 825.25MHz: 1GHz – 1.58GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1GHz	1.58GHz	Max Peak	Coupled	1 MHz

Marker: 1.260360721 GHz -50.52 dBm

Level [dBm]

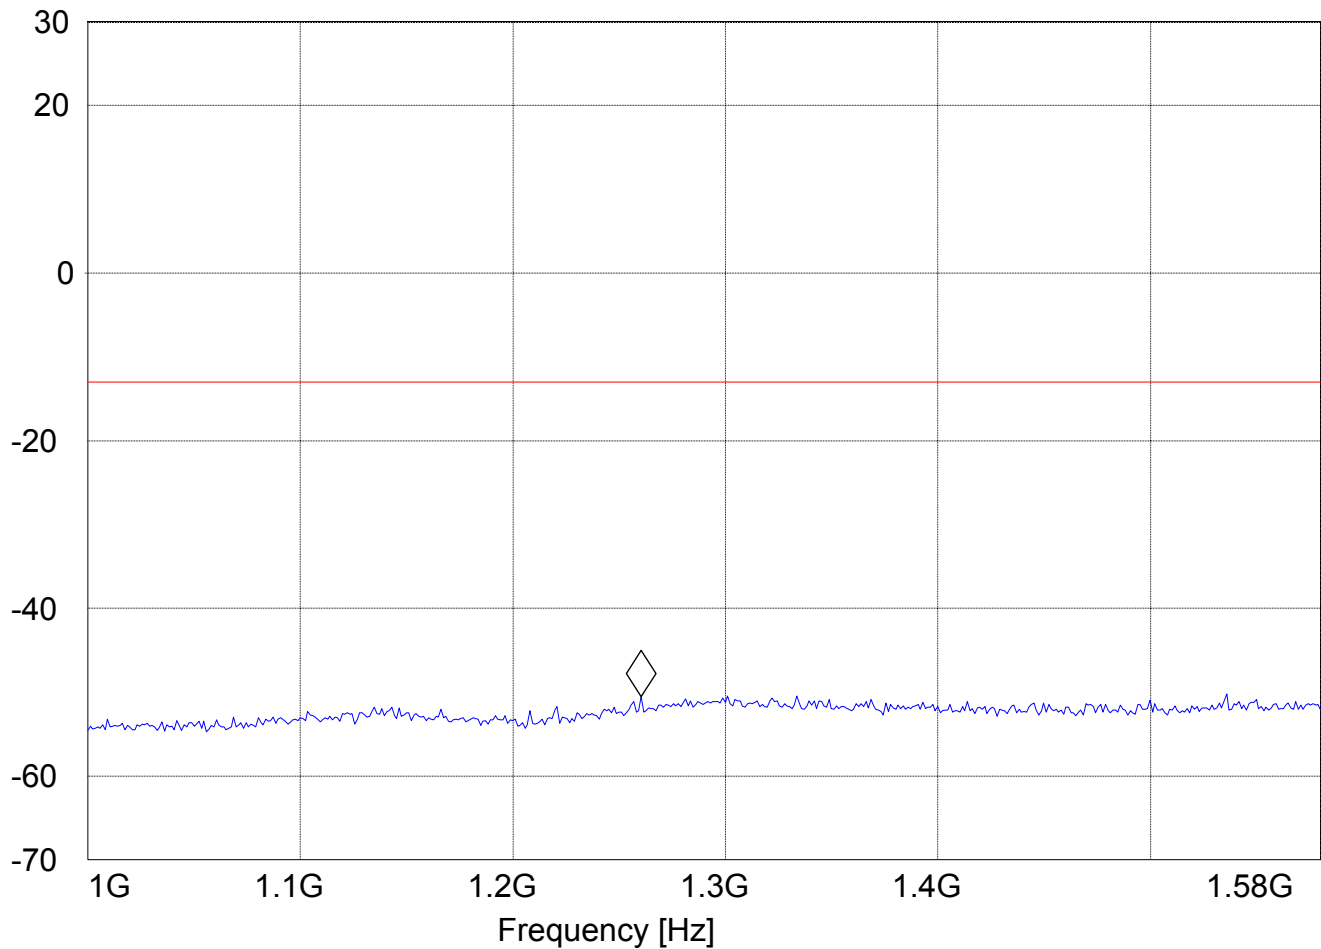


RADIATED SPURIOUS EMISSIONS (CELLULAR-850)

Tx @ 825.25MHz: 1.58GHz – 9GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-9G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1.58GHz	9GHz	Max Peak	Coupled	1 MHz

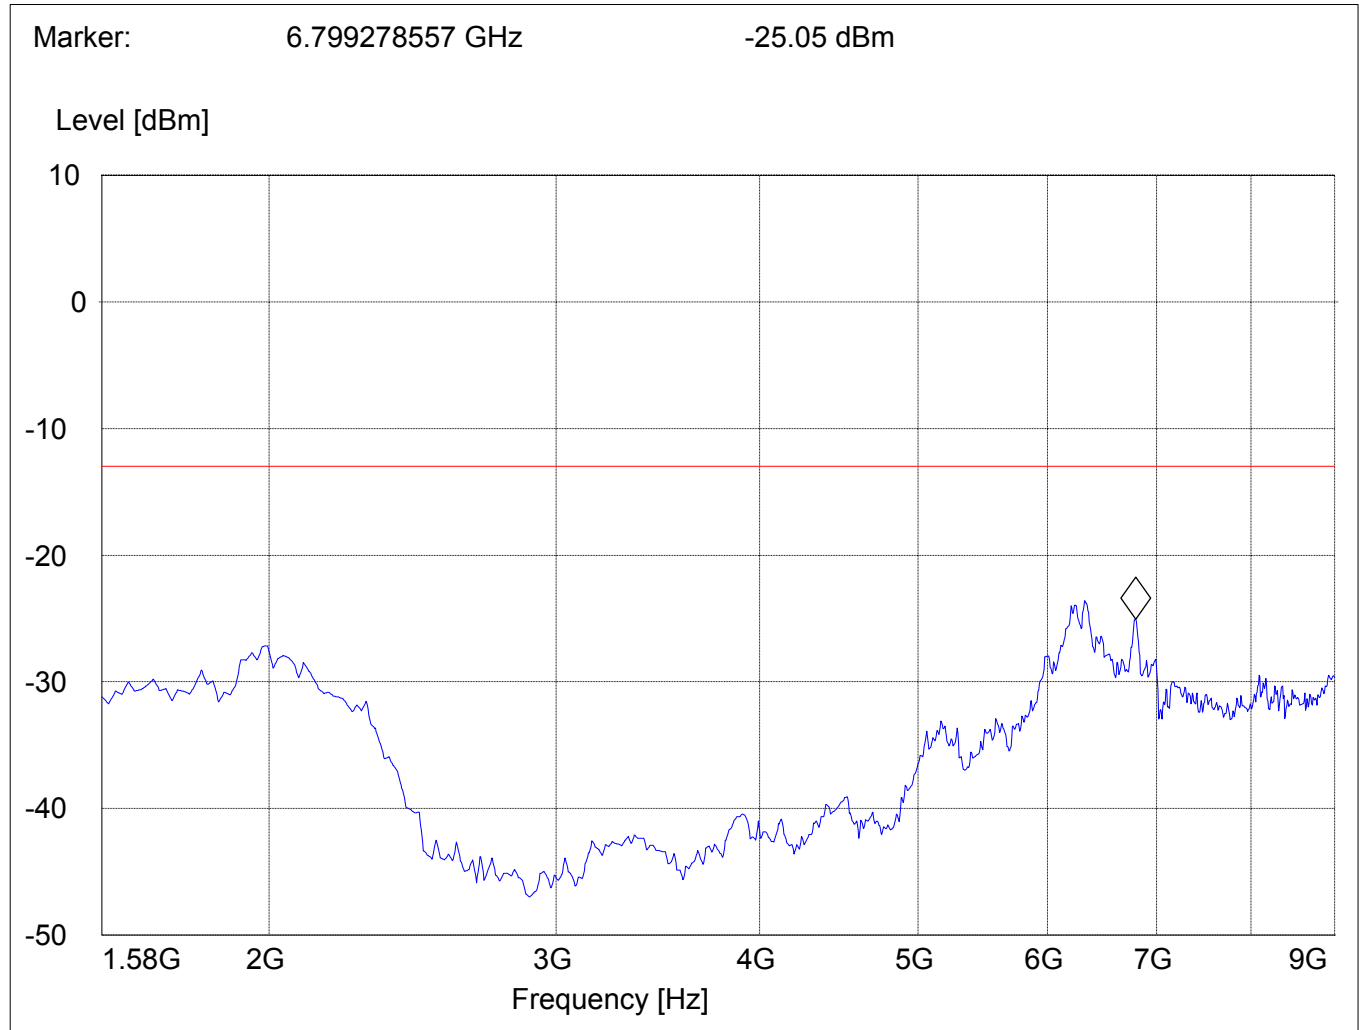


RADIATED SPURIOUS EMISSIONS (CELLULAR-850)**Tx @ 836.5MHz: 30MHz - 1GHz**

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 30M-1G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
30MHz	1GHz	Max Peak	Coupled	1 MHz

Note: The peak above the limit line is the carrier freq. at ch-190.

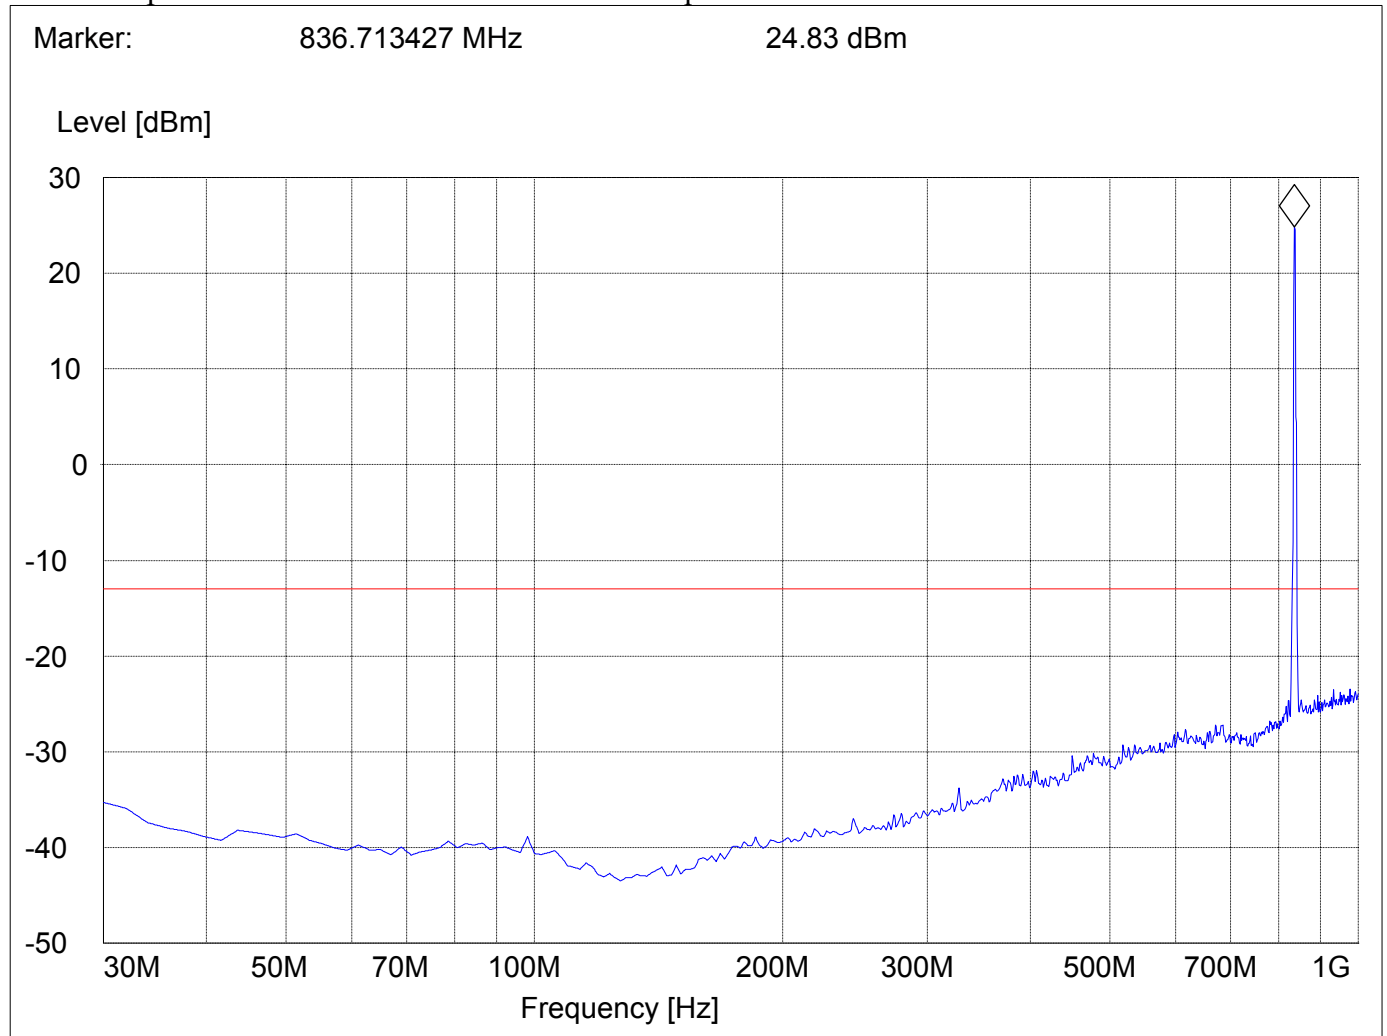


RADIATED SPURIOUS EMISSIONS (CELLULAR-850)**Tx @ 836.5MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
1GHz	1.58GHz	Max Peak	Coupled	1 MHz

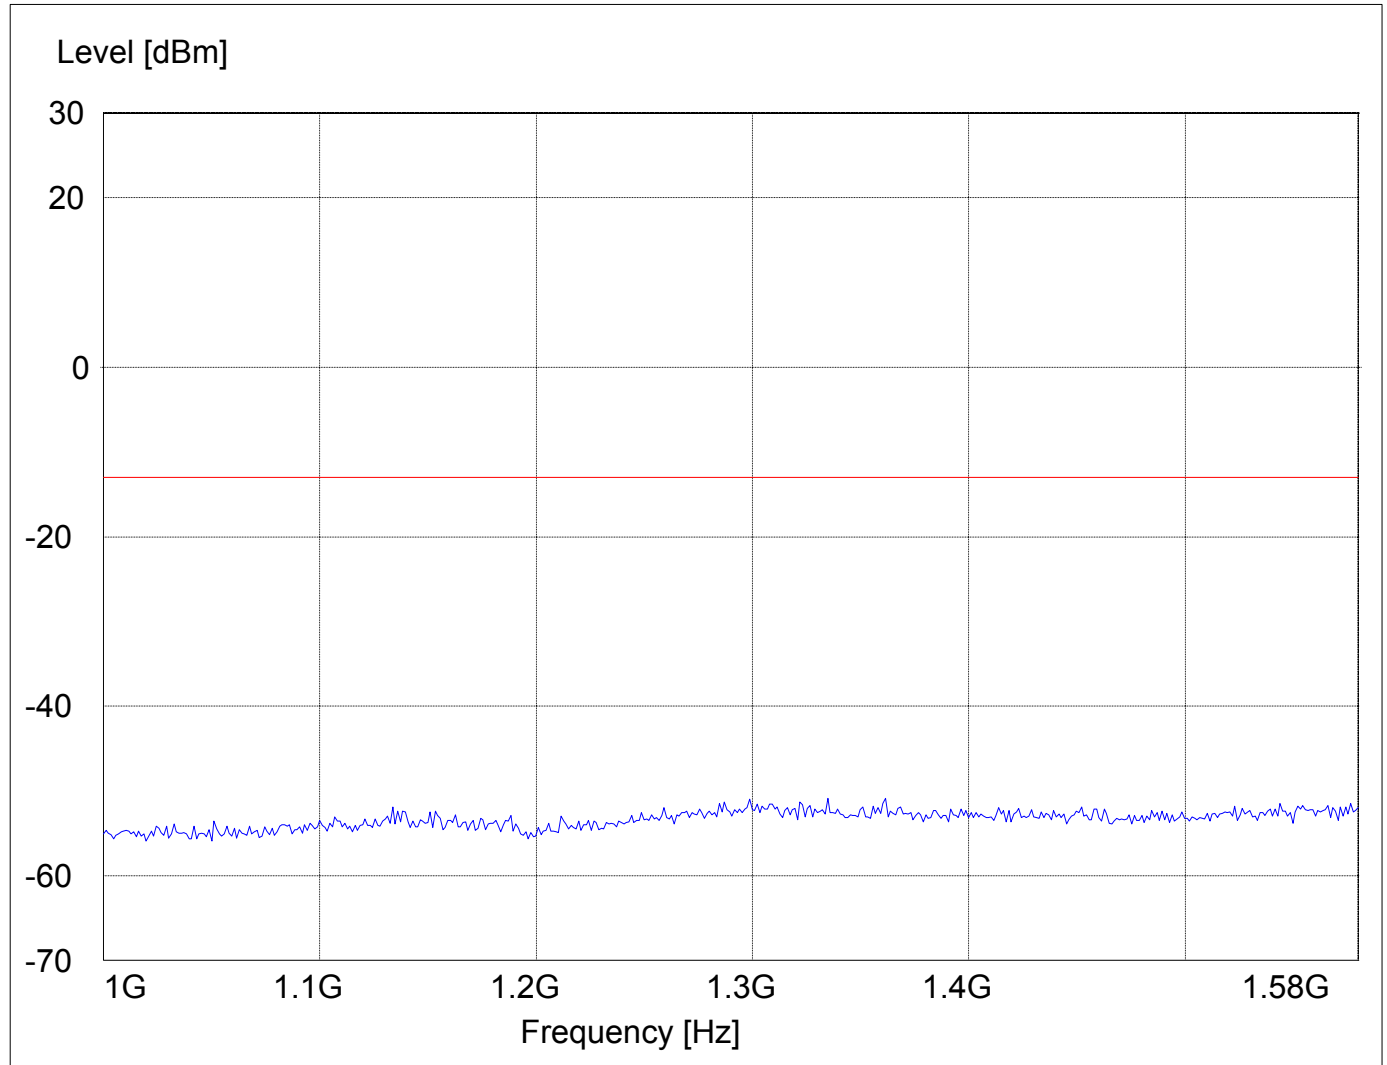


RADIATED SPURIOUS EMISSIONS (CELLULAR-850)

Tx @ 836.5MHz: 1.58GHz – 9GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-9G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1.58GHz	9GHz	Max Peak	Coupled	1 MHz

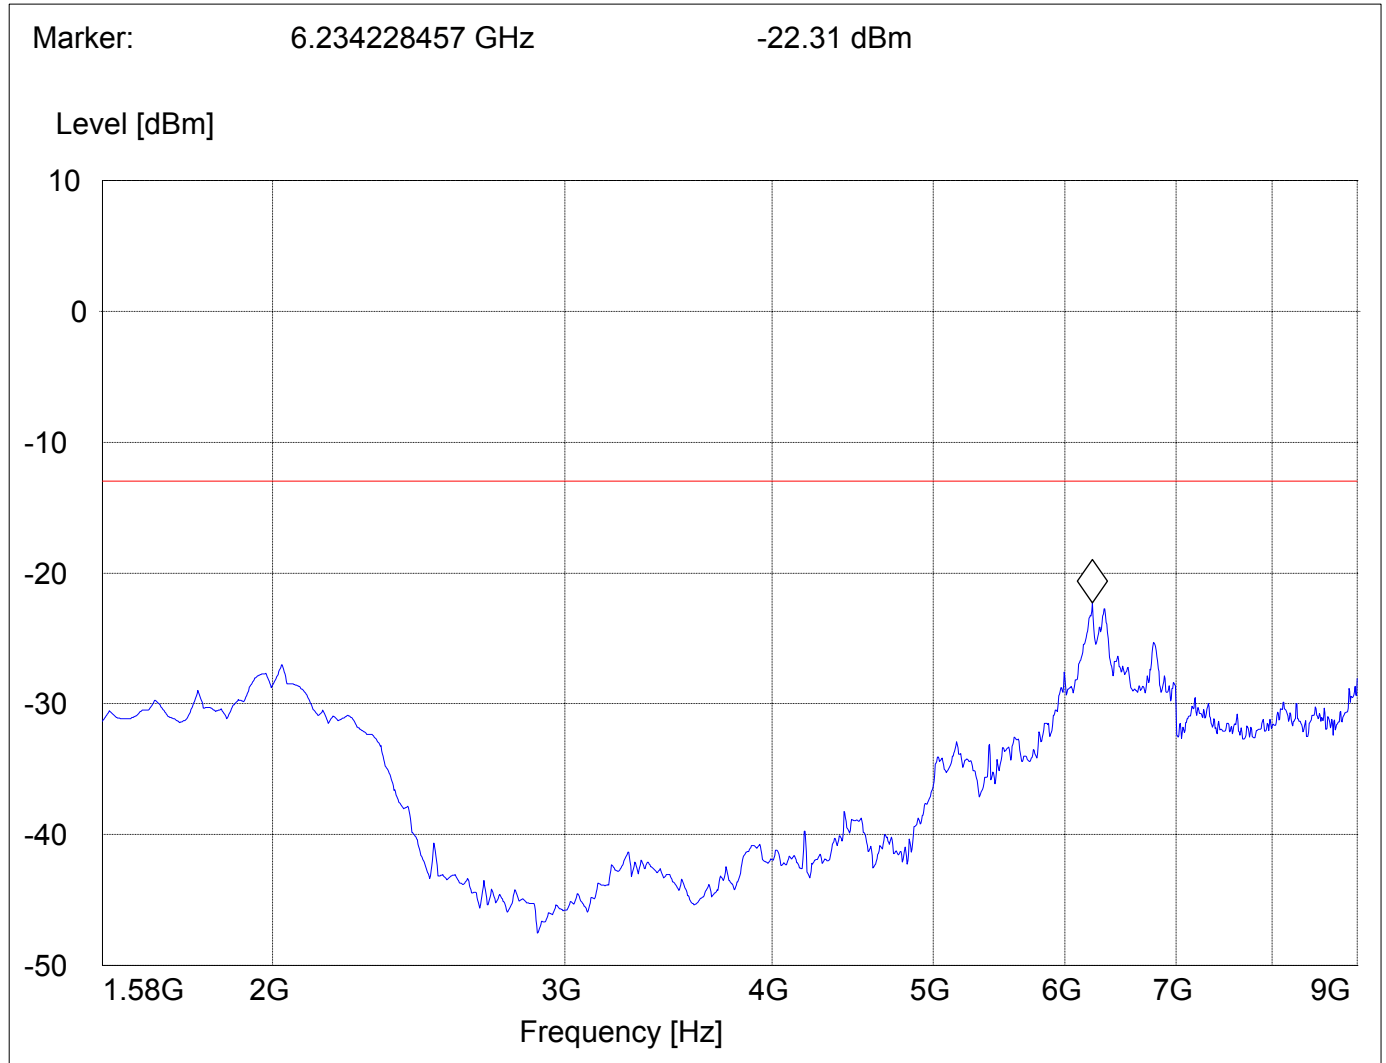

RADIATED SPURIOUS EMISSIONS (CELLULAR-850)


Tx @ 847.75MHz: 30MHz - 1GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 30M-1G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency	Time		
30MHz	1GHz	Max Peak	Coupled	1 MHz

Note: The peak above the limit line is the carrier freq. at ch-251.

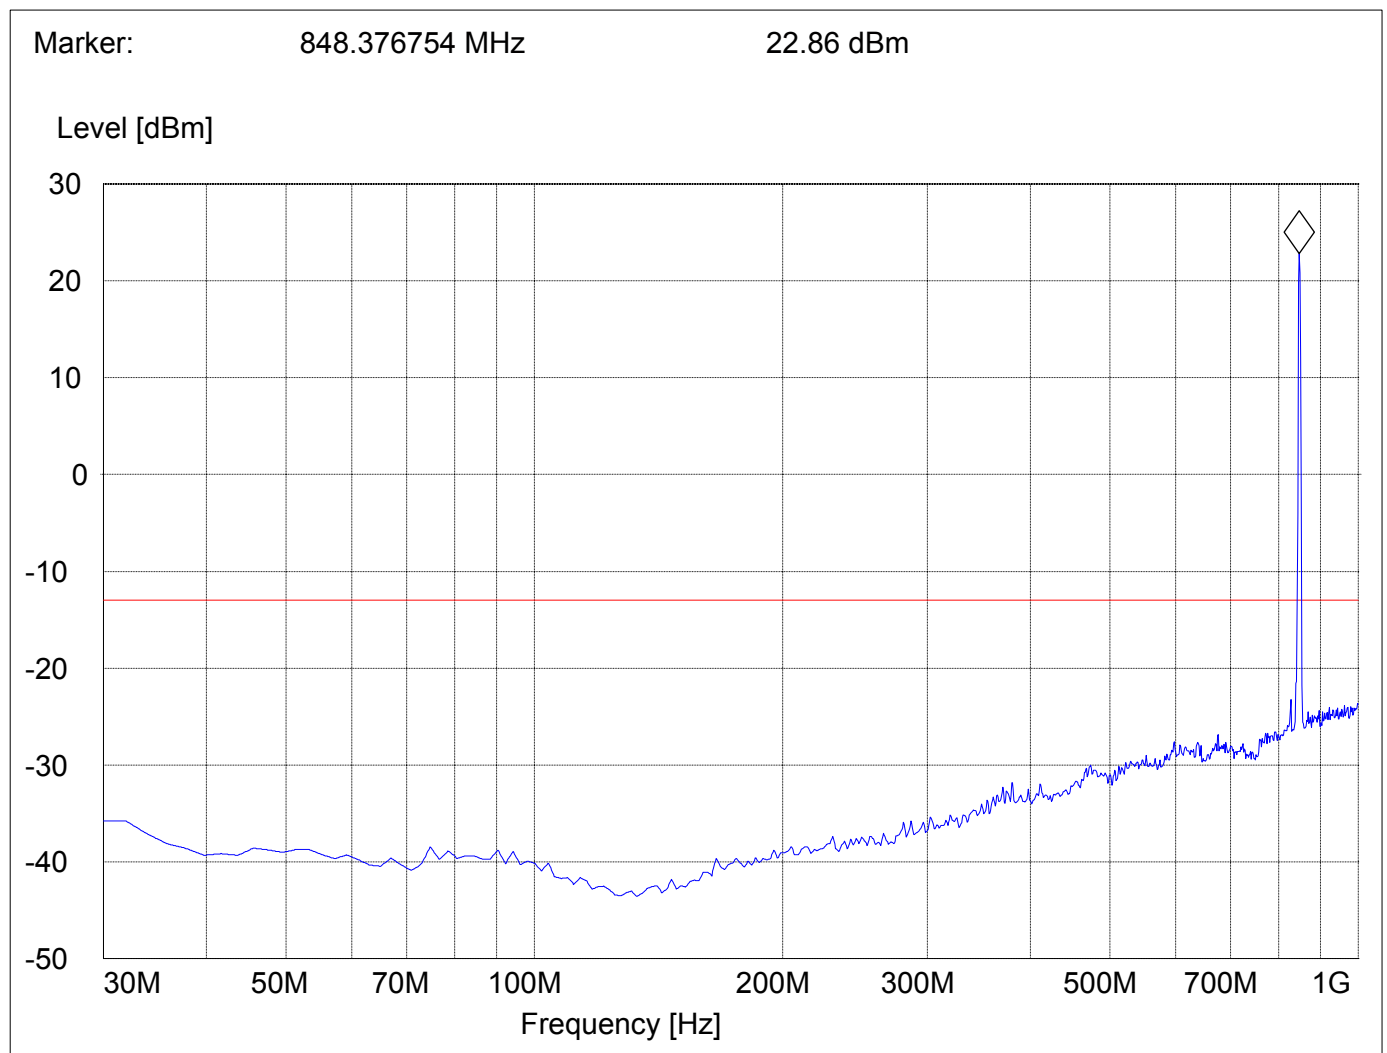


RADIATED SPURIOUS EMISSIONS (CELLULAR-850)**Tx @ 847.75MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
1GHz	1.58GHz	Max Peak	Coupled	1 MHz

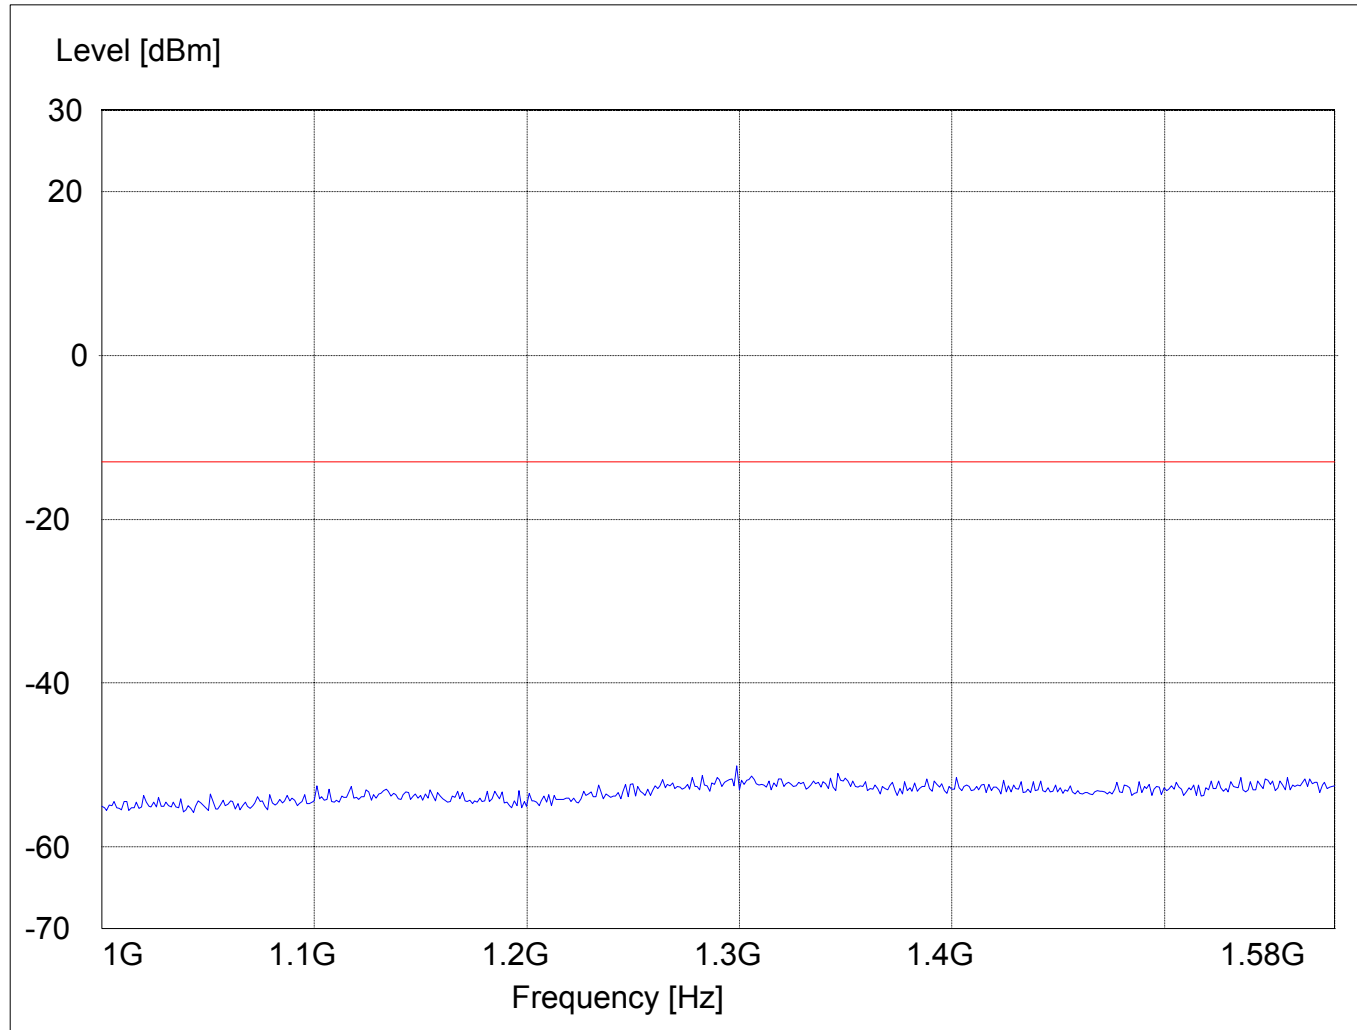

RADIATED SPURIOUS EMISSIONS (CELLULAR-850)**Tx @ 847.75MHz: 1.58GHz – 9GHz**


Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-9G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
1.58GHz	9GHz	Max Peak	Coupled	1 MHz

Marker: 2.829058116 GHz -39.51 dBm

Level [dBm]

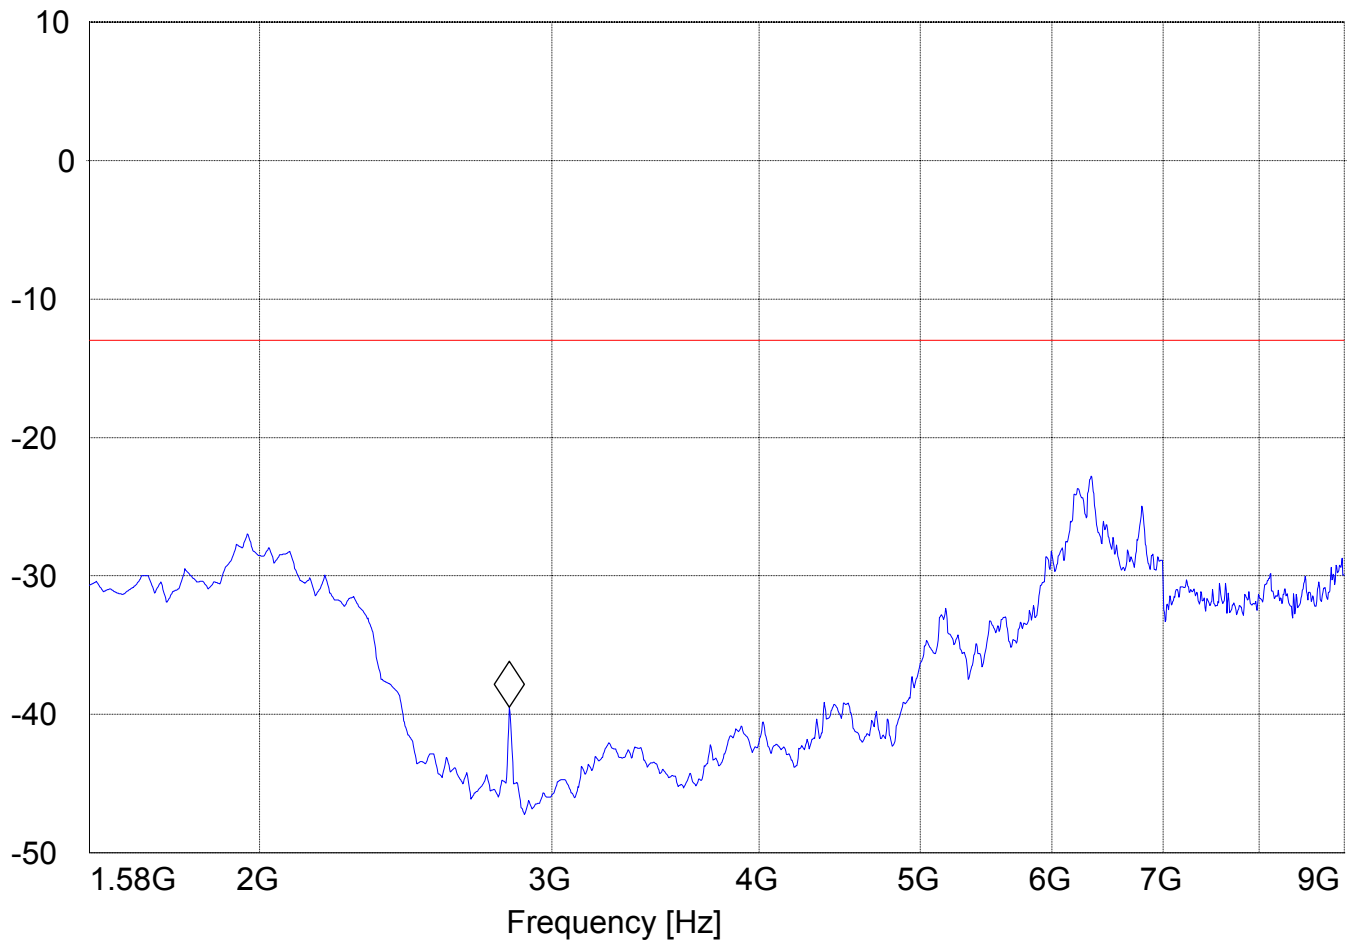

RESULTS OF RADIATED TESTS (PCS-1900)

Harmonic	Tx ch-512 Freq.(MHz)	Level (dBm)	Tx ch-661 Freq. (MHz)	Level (dBm)	Tx ch-810 Freq. (MHz)	Level (dBm)
2	3702.5	-35.12	3760	-41.12	3817.5	-36.90
3	5553.75	-34.71	5640	-35.81	5726.25	-34.60
4	7405	-31.64	7520	-31.64	7635	-31.64
5	9256.25	-27.41	9400	-25.58	9543.75	-27.55
6	11107.5	-26.76	11280	-25.40	11452.5	-28.40
7	12958.75	-28.00	13160	-27.24	13361.25	-26.81
8	14810	-28.52	15040	-26.03	15270	-29.10
9	16661.25	-23.21	16920	-22.56	17178.75	-20.00
10	18512.5	-24.53	18800	-24.47	19087.5	-24.45


RADIATED SPURIOUS EMISSIONS (PCS-1900)

Tx @ 1850.2MHz: 30MHz - 1GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
30MHz	1GHz	Max Peak	Coupled	1 MHz

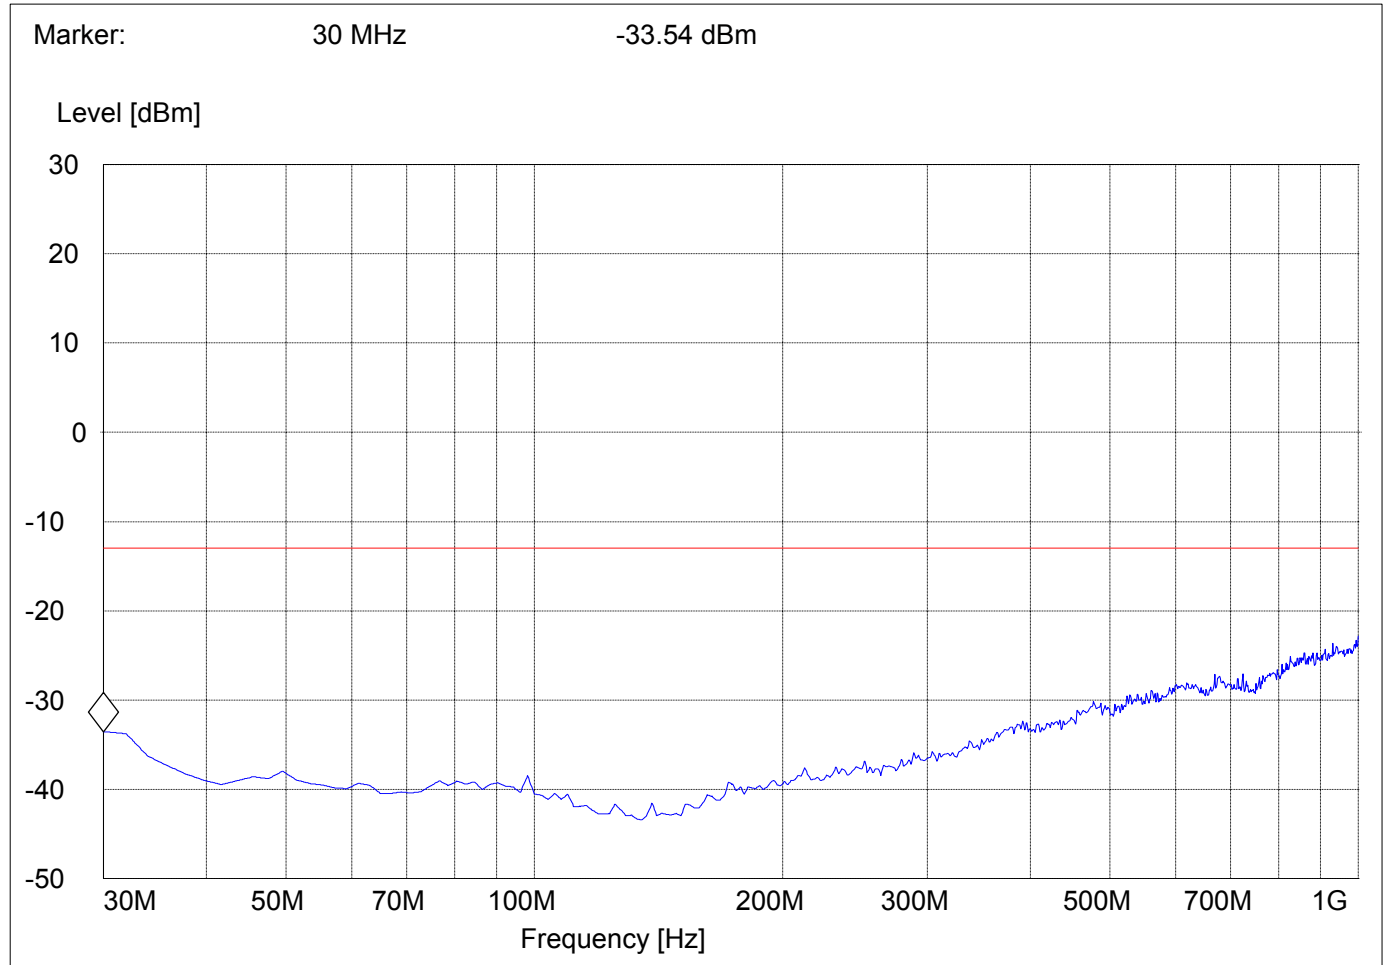

RADIATED SPURIOUS EMISSIONS (PCS-1900)


Tx @ 1850.2MHz: 1GHz – 3GHz

Spurious emission limit -13dBm

NOTE: peak above the limit line is the Carrier frequency. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

SWEEP TABLE: "FCC Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

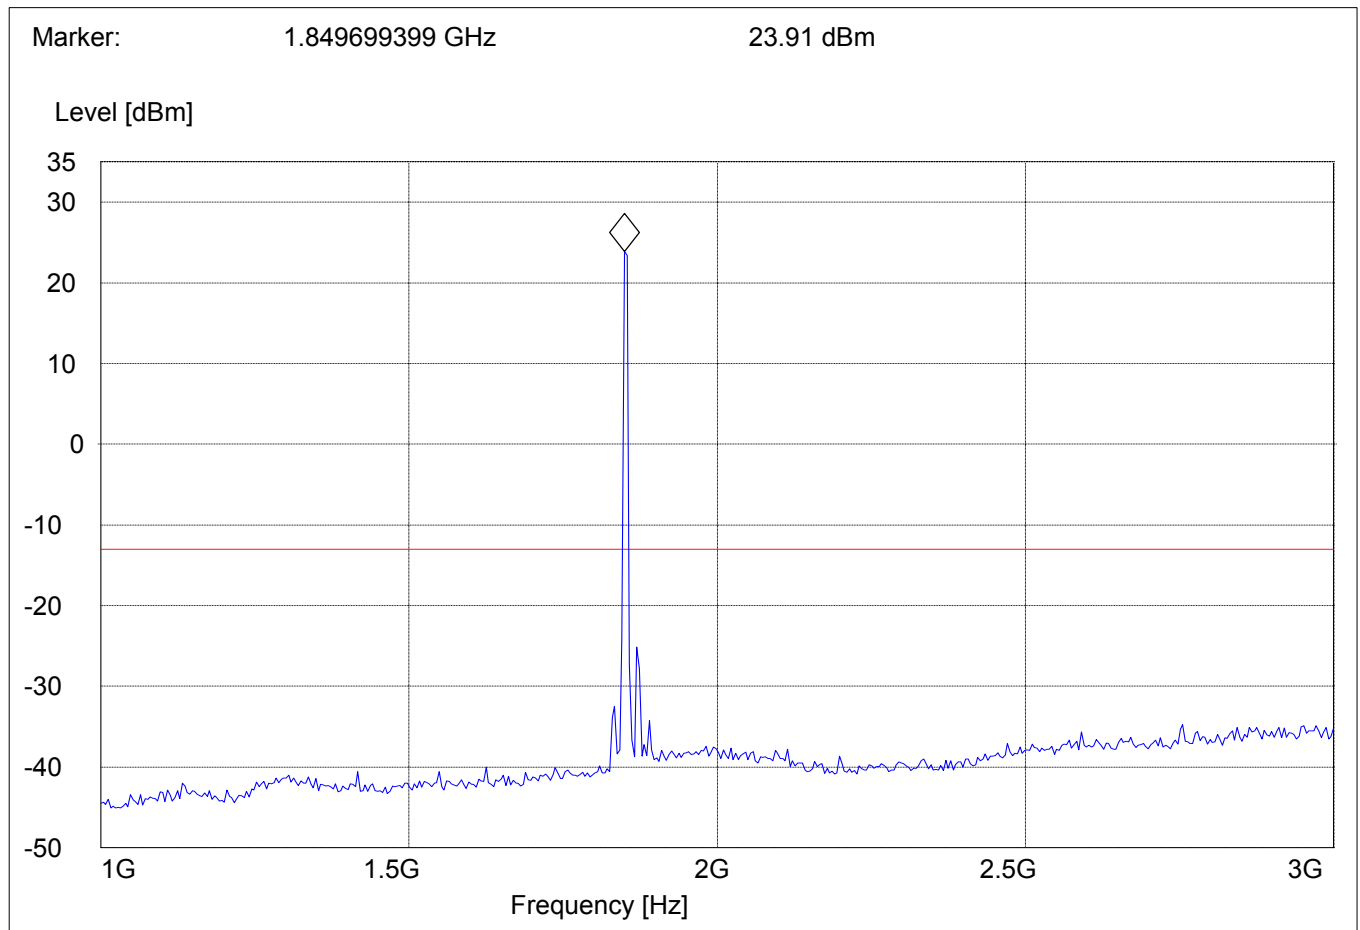


RADIATED SPURIOUS EMISSIONS (PCS-1900)

Tx @ 1850.2MHz: 3GHz – 18GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-8G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
3GHz	8GHz	Max Peak	Coupled	1 MHz

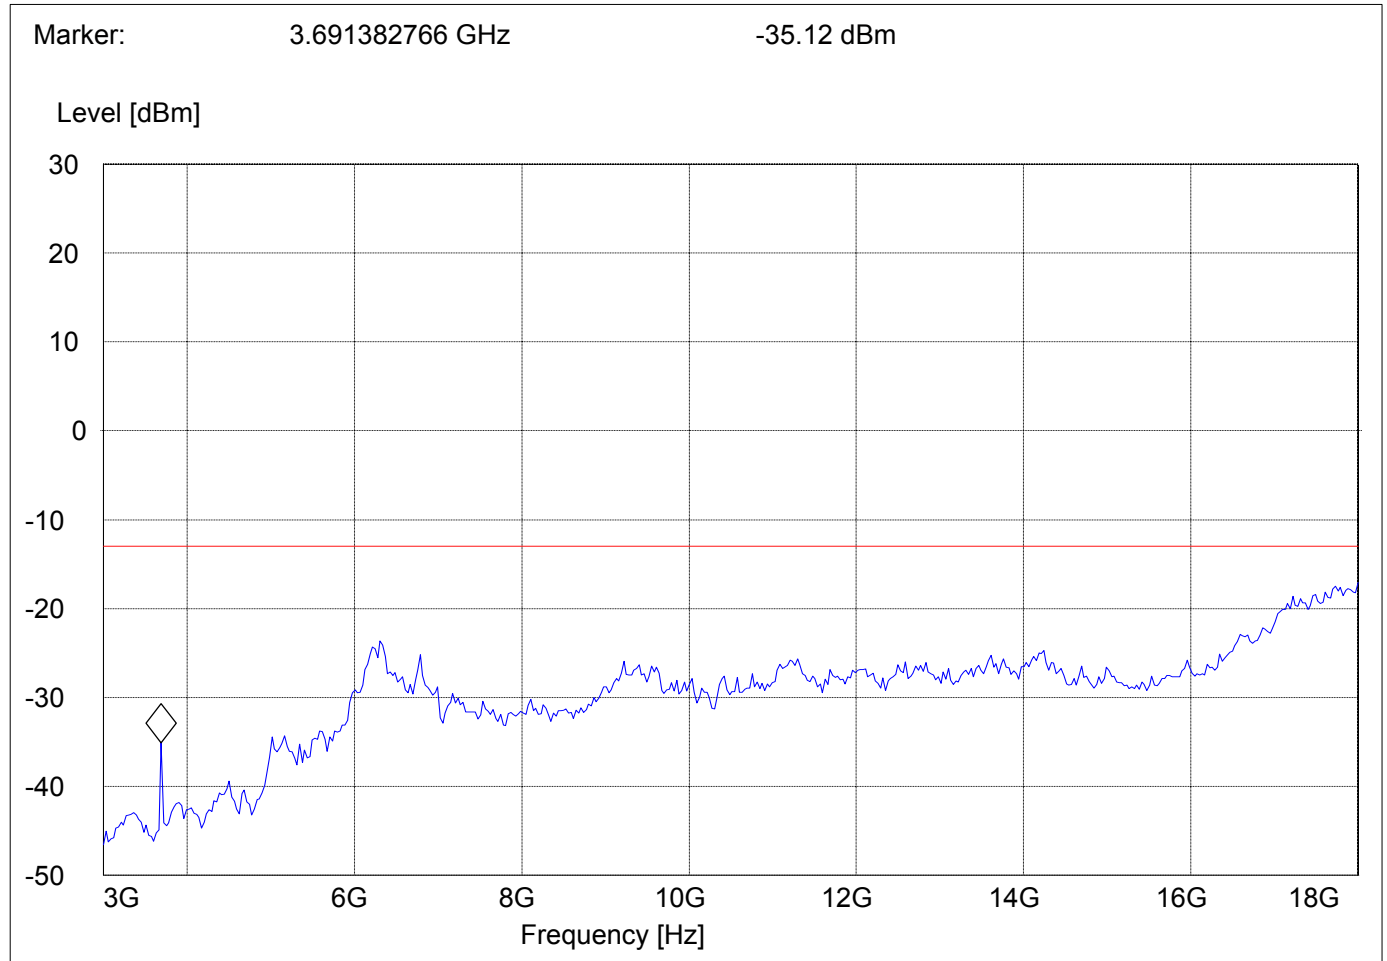


RADIATED SPURIOUS EMISSIONS (PCS-1900)

Tx @ 1880MHz: 30MHz –1GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
30MHz	1GHz	Max Peak	Coupled	1 MHz

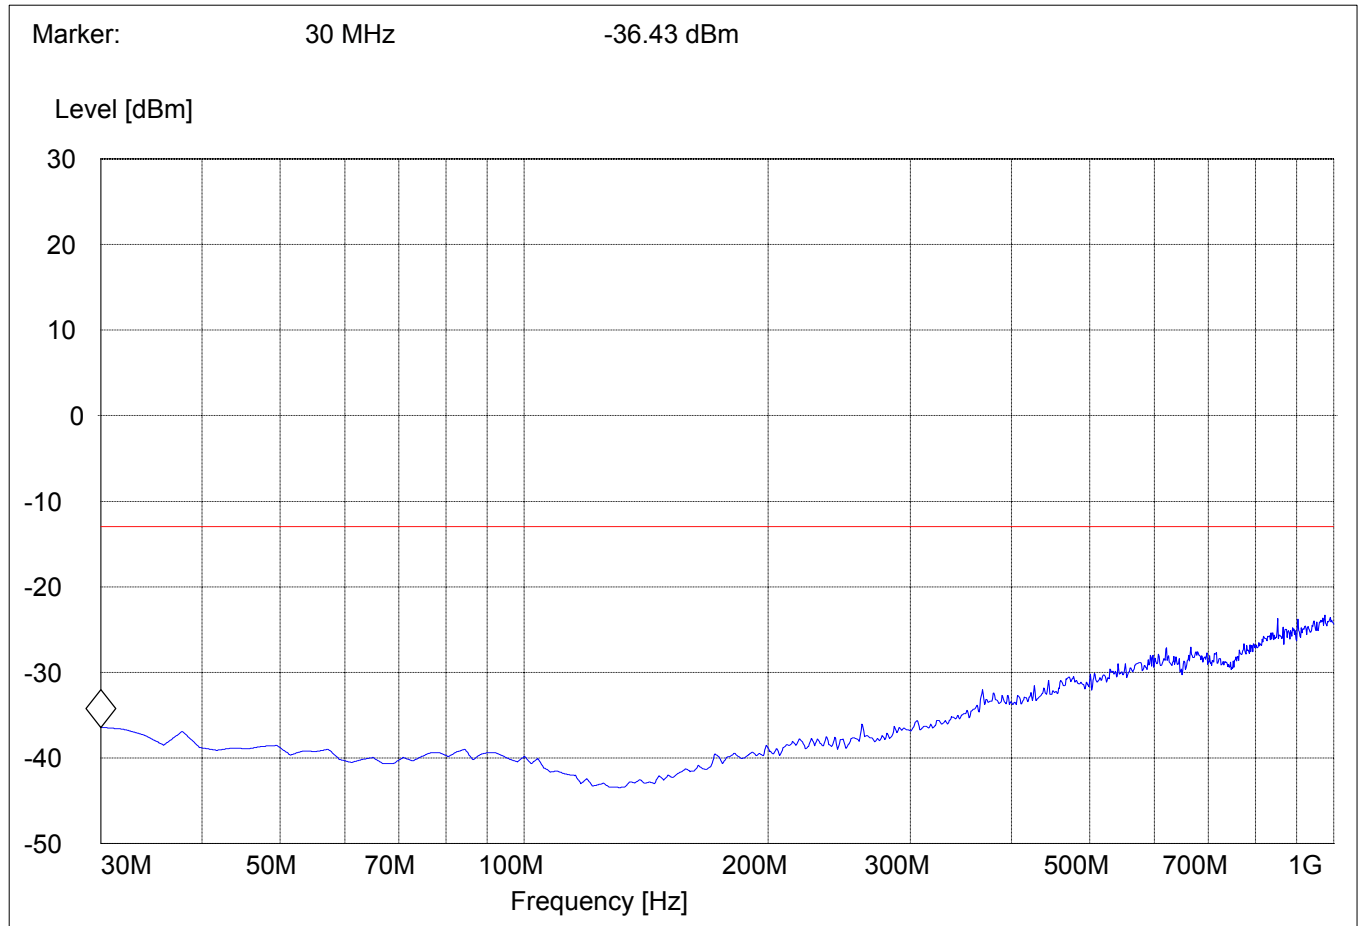

RADIATED SPURIOUS EMISSIONS (PCS-1900)


Tx @ 1880MHz: 1GHz – 3GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the Carrier frequency. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

SWEEP TABLE: "FCC Spuri 1-3G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1GHz	3GHz	Max Peak	Coupled	1 MHz

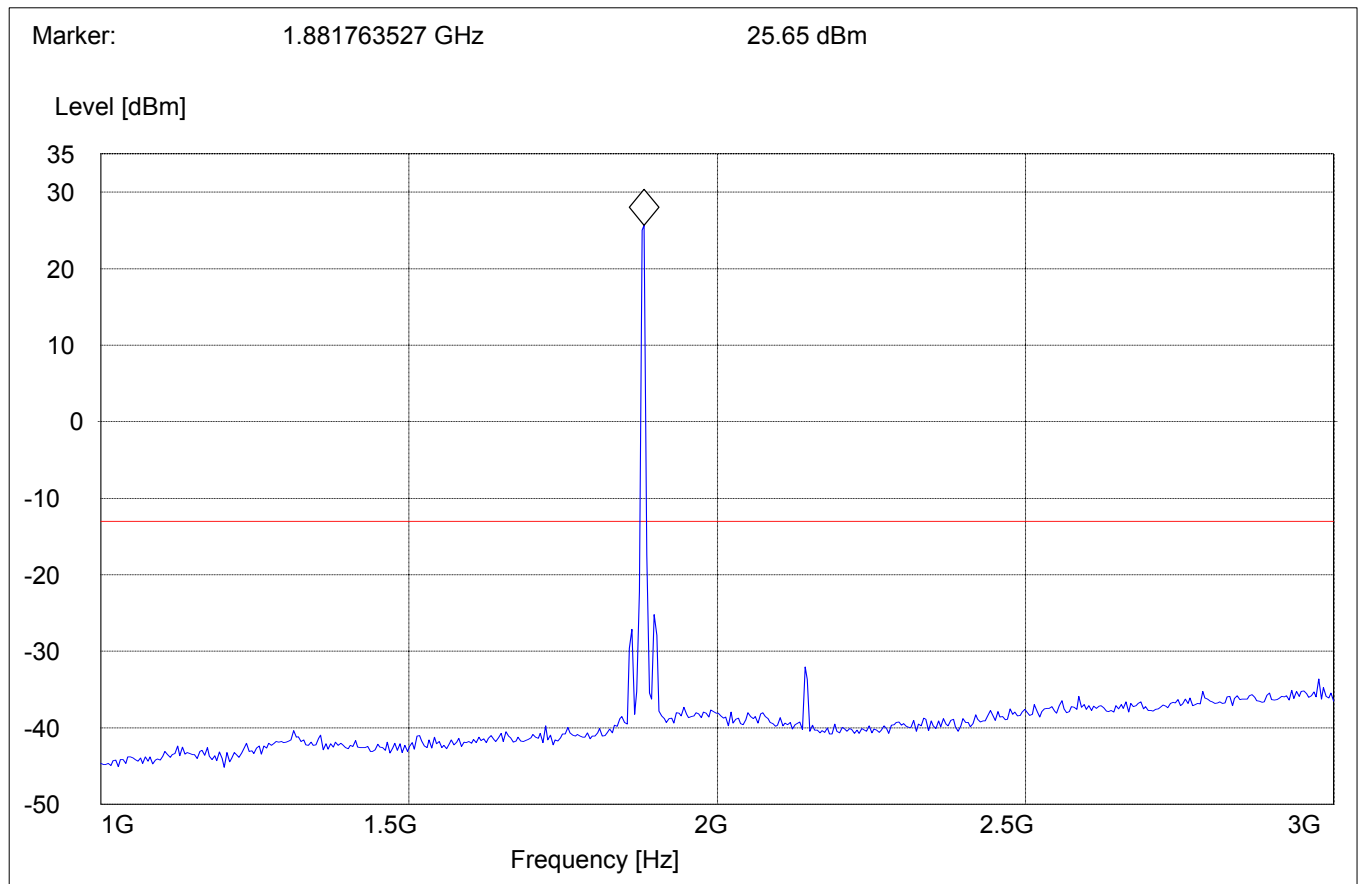

RADIATED SPURIOUS EMISSIONS (PCS-1900)**Tx @ 1880MHz: 3GHz – 18GHz**


Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 3-8G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
3GHz	8GHz	Max Peak	Coupled	1 MHz

Marker: 9.402805611 GHz -25.58 dBm

Level [dBm]

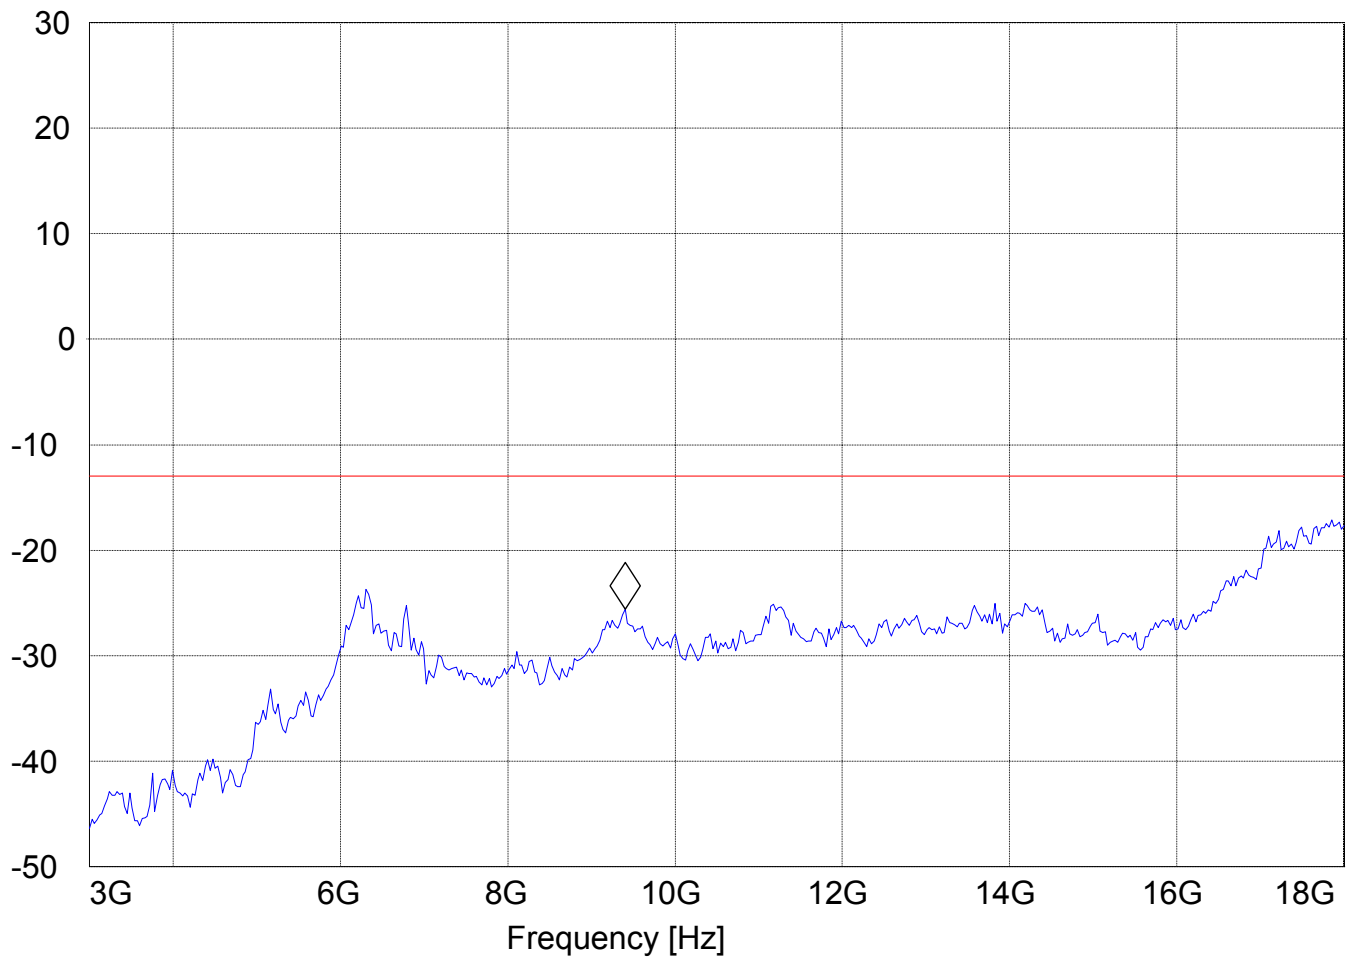


RADIATED SPURIOUS EMISSIONS (PCS-1900)

Tx @ 1908.MHz: 30MHz – 1GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
30MHz	1GHz	Max Peak	Coupled	1 MHz

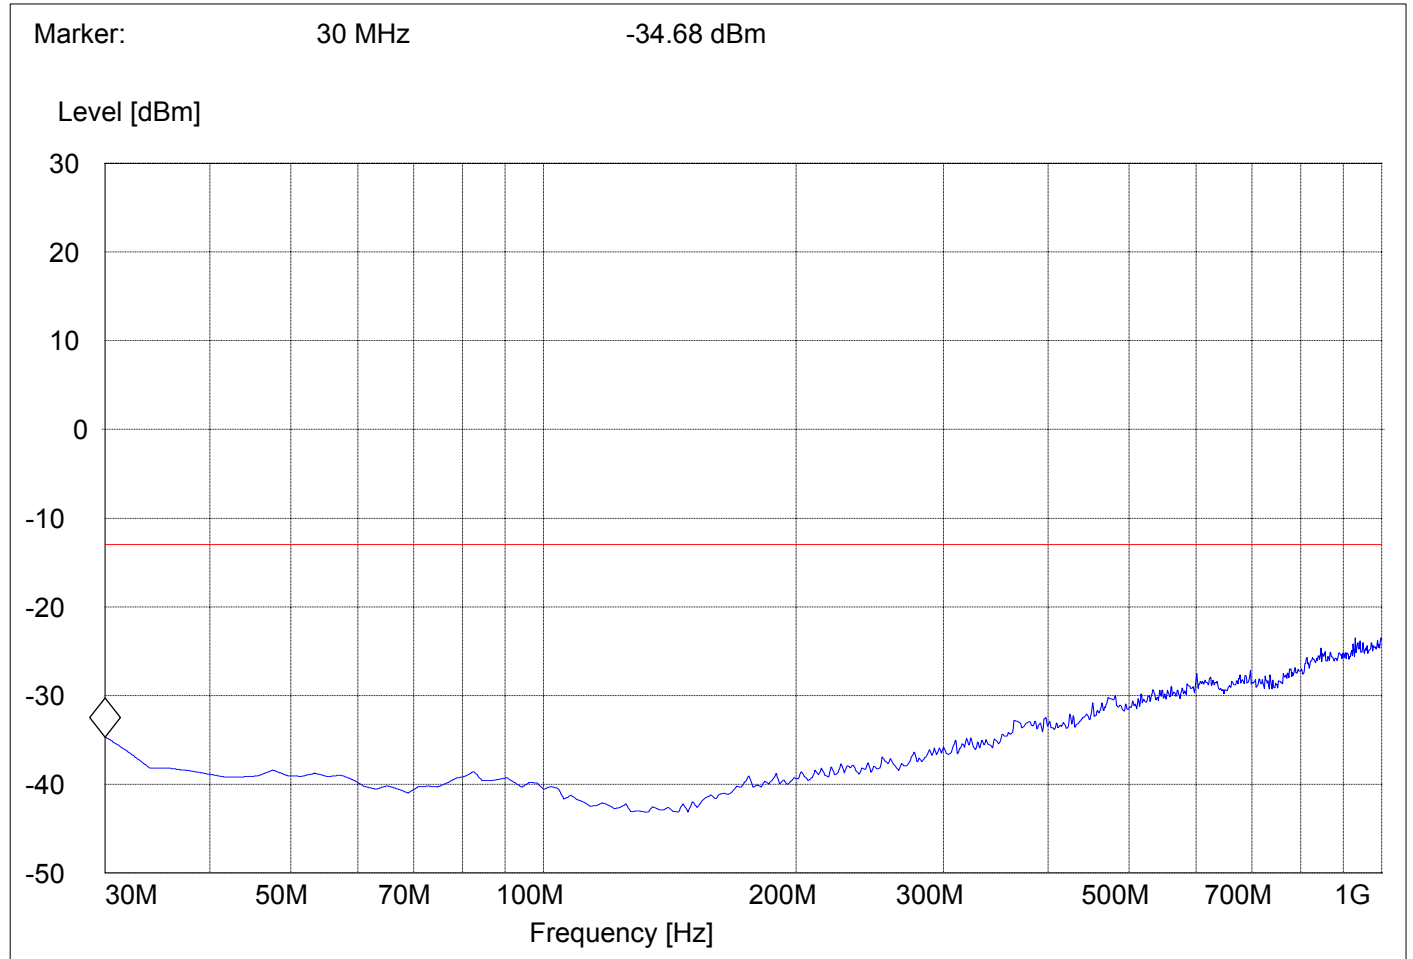

RADIATED SPURIOUS EMISSIONS (PCS-1900)


Tx @ 1908.MHz: 1GHz – 3GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the Carrier frequency. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

SWEEP TABLE: "FCC Spuri 1-3G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1GHz	3GHz	Max Peak	Coupled	1 MHz

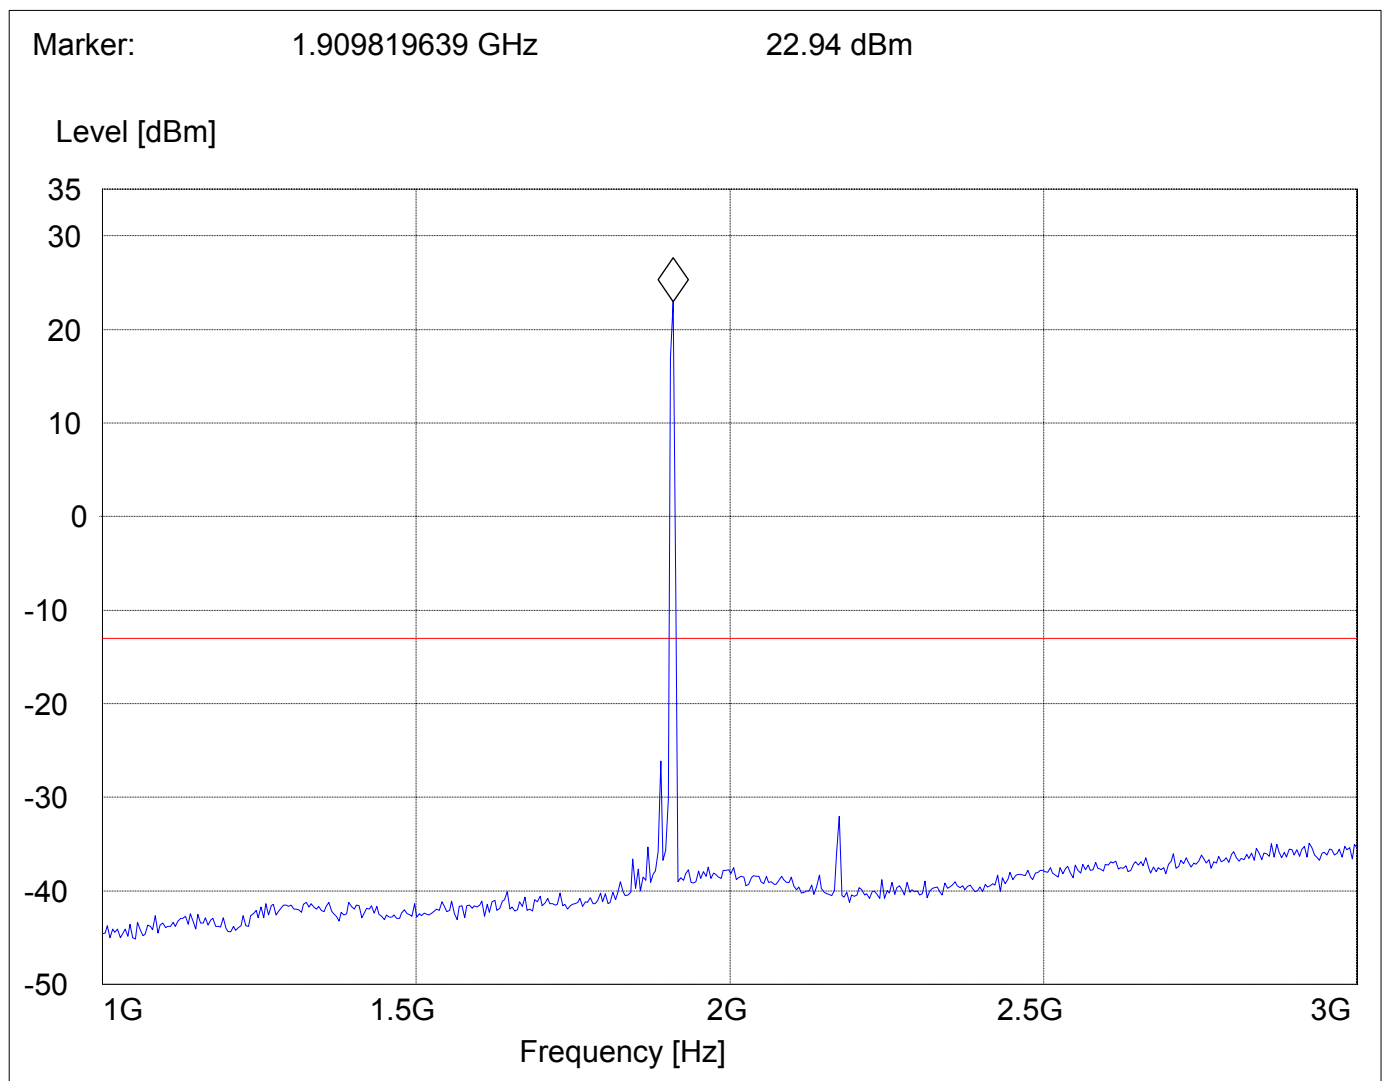


RADIATED SPURIOUS EMISSIONS (PCS-1900)

Tx @ 1908.MHz: 3GHz – 18GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 3-8G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
3GHz	8GHz	Max Peak	Coupled	1 MHz

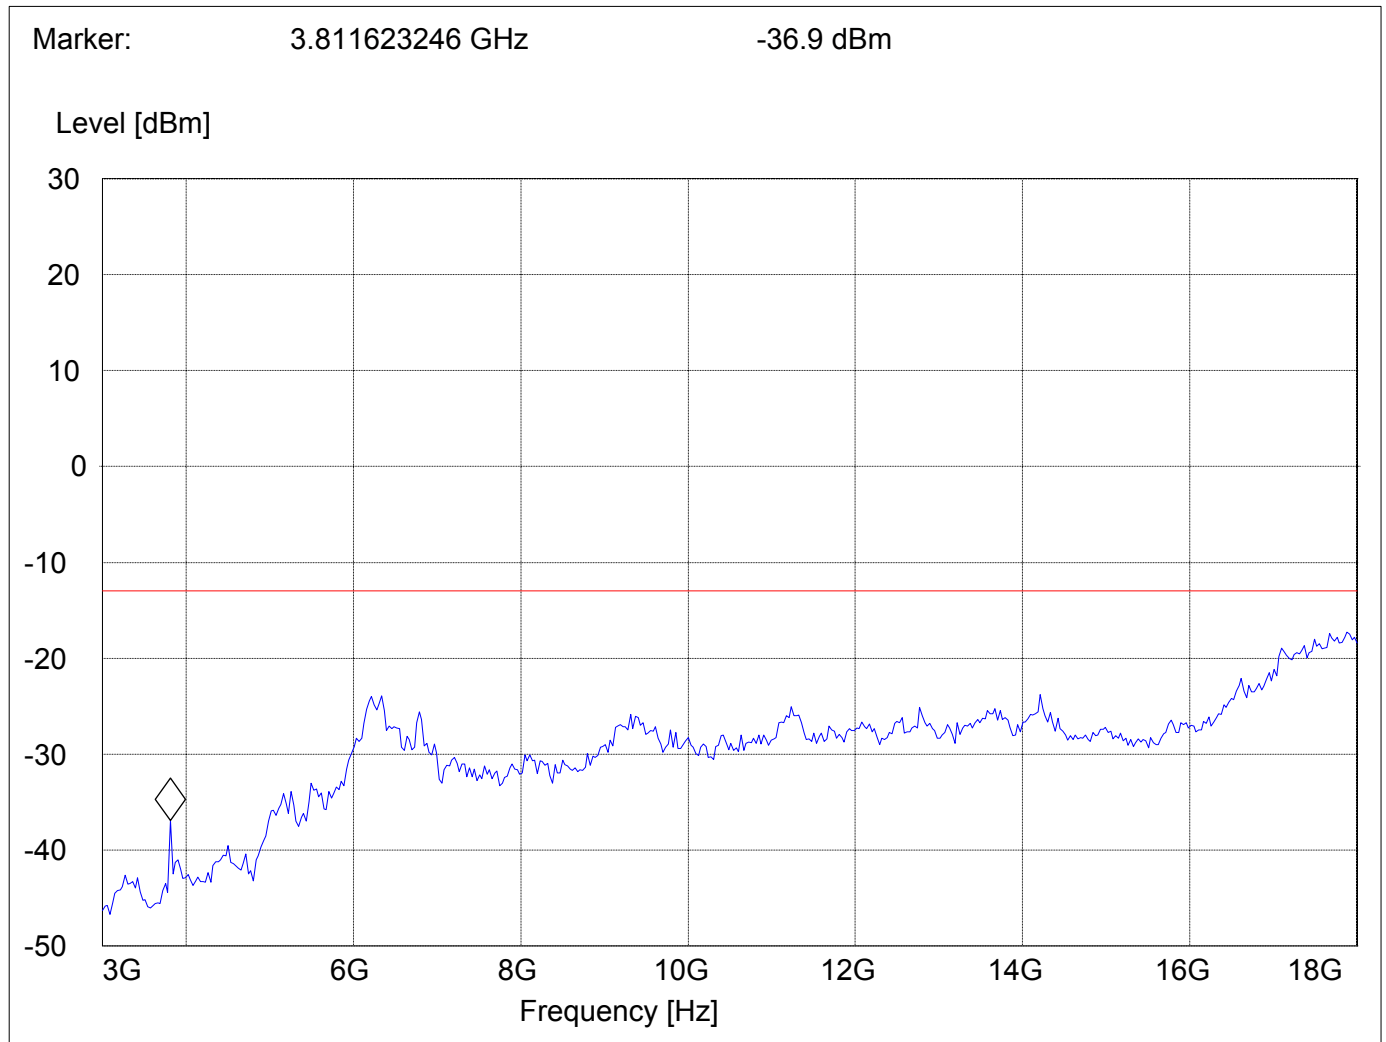

RADIATED SPURIOUS EMISSIONS (PCS-1900)


18GHz – 19.1GHz

Spurious emission limit –13dBm

(NOTE: This plot is valid for all three channels)

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

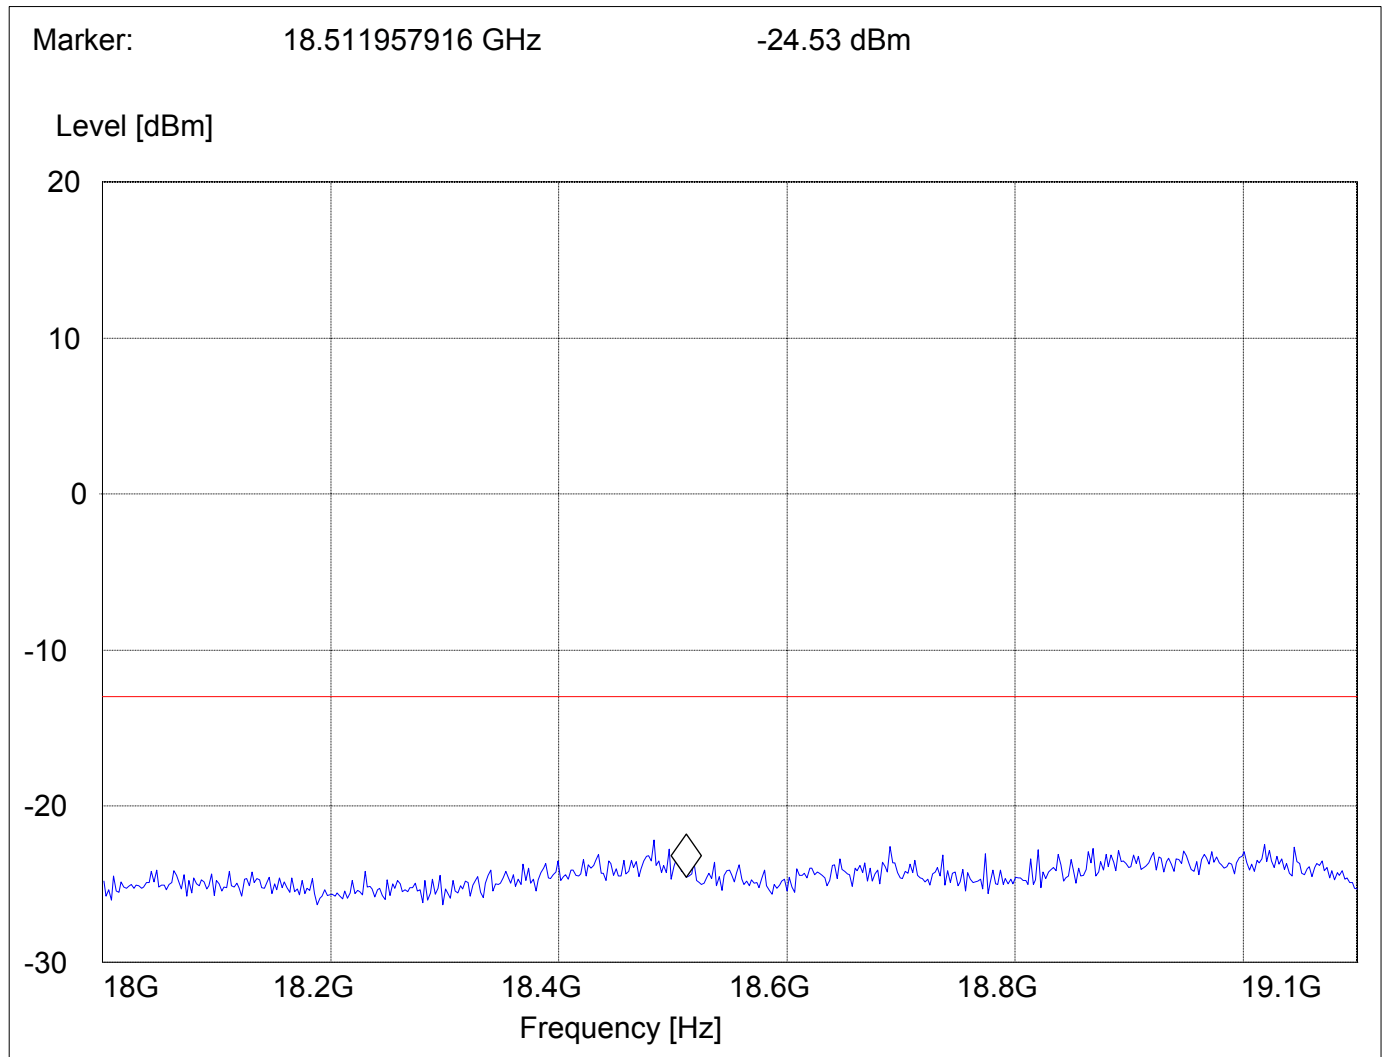


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 30MHz – 1GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency	Time		
30MHz	1GHz	Max Peak	Coupled	1 MHz

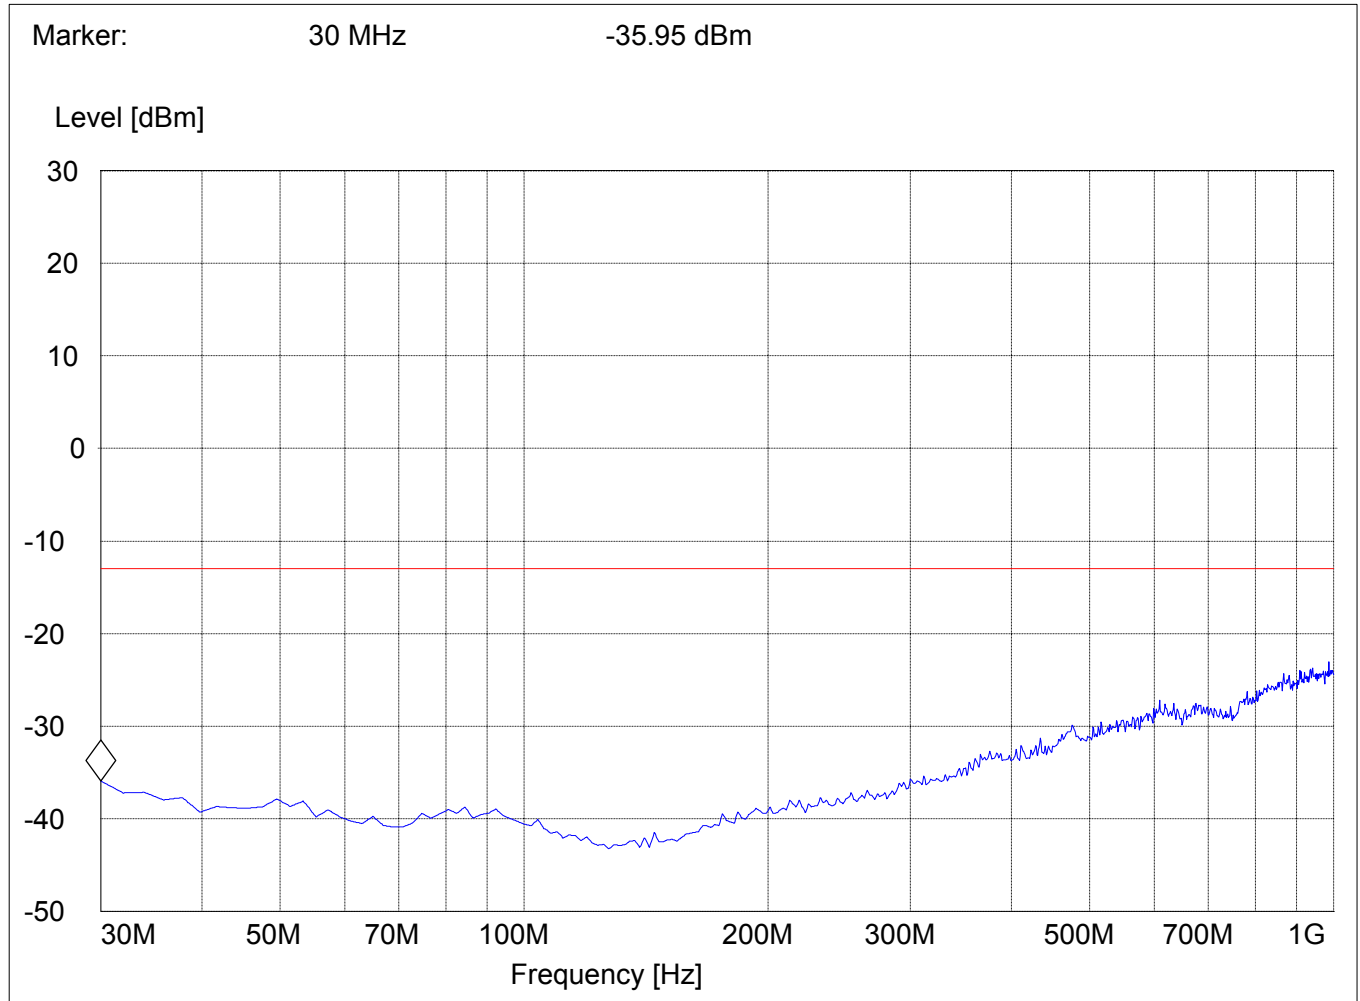


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 1GHz – 3GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-8G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency	Time		
1GHz	8GHz	Max Peak	Coupled	1 MHz

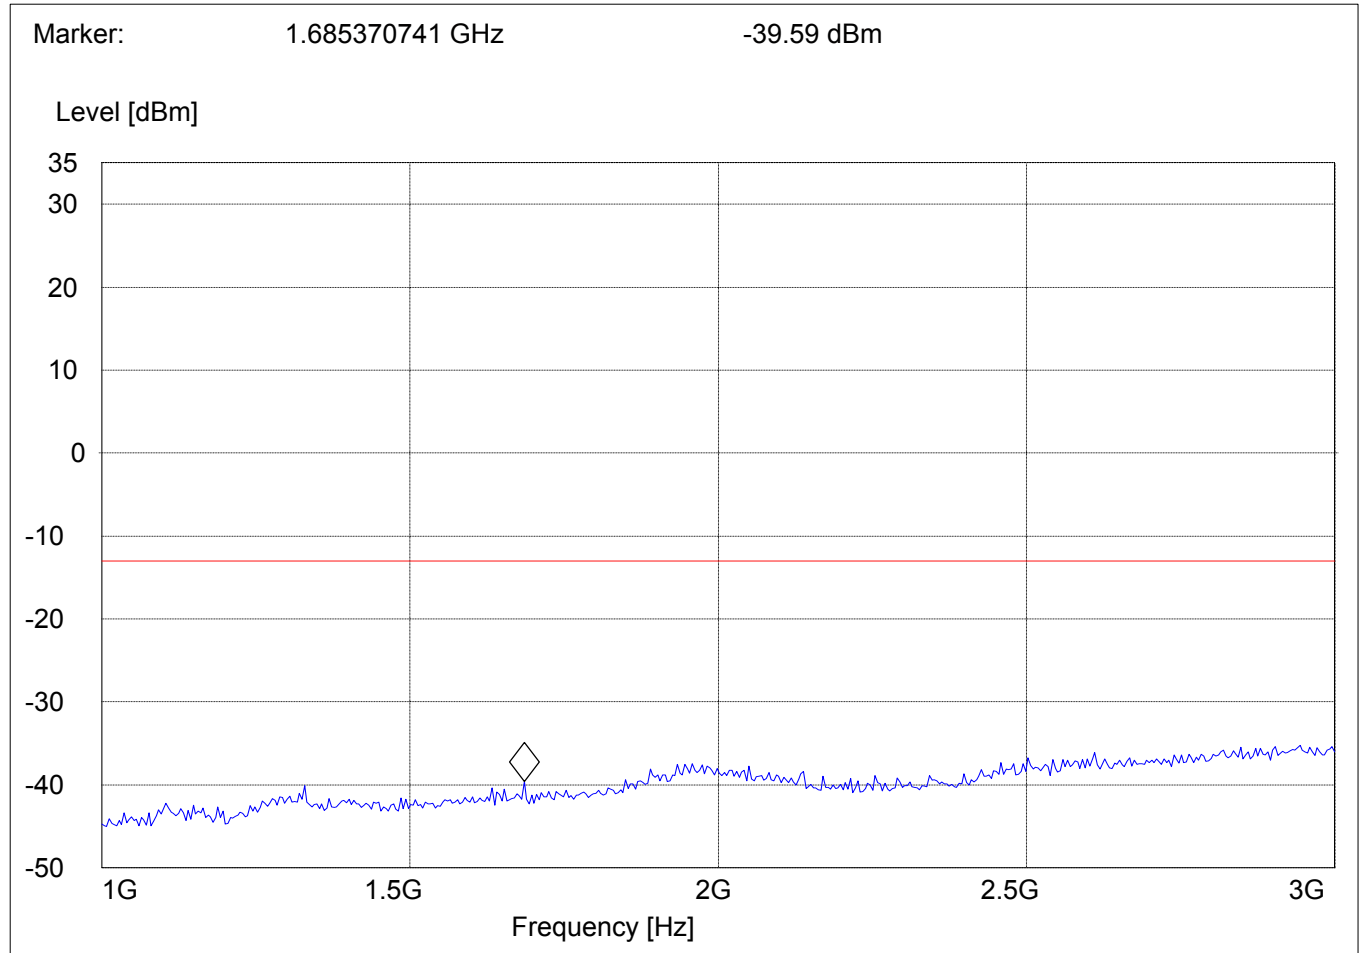


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 3GHz – 18GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 8-18G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
8GHz	18GHz	Max Peak	Coupled	1 MHz

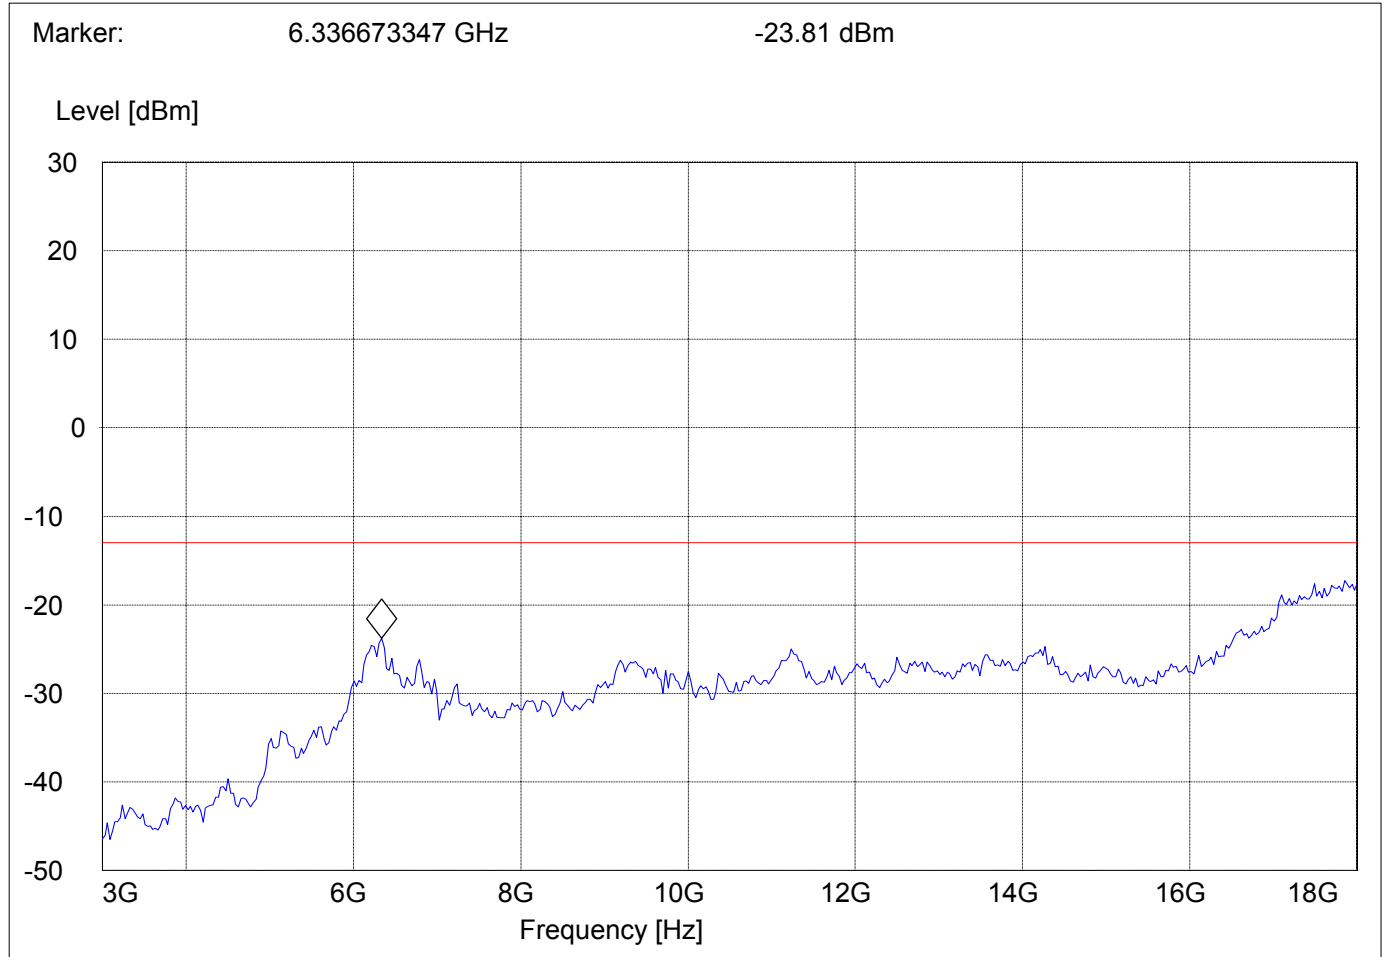


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 18GHz – 19.1GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency	Time		
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

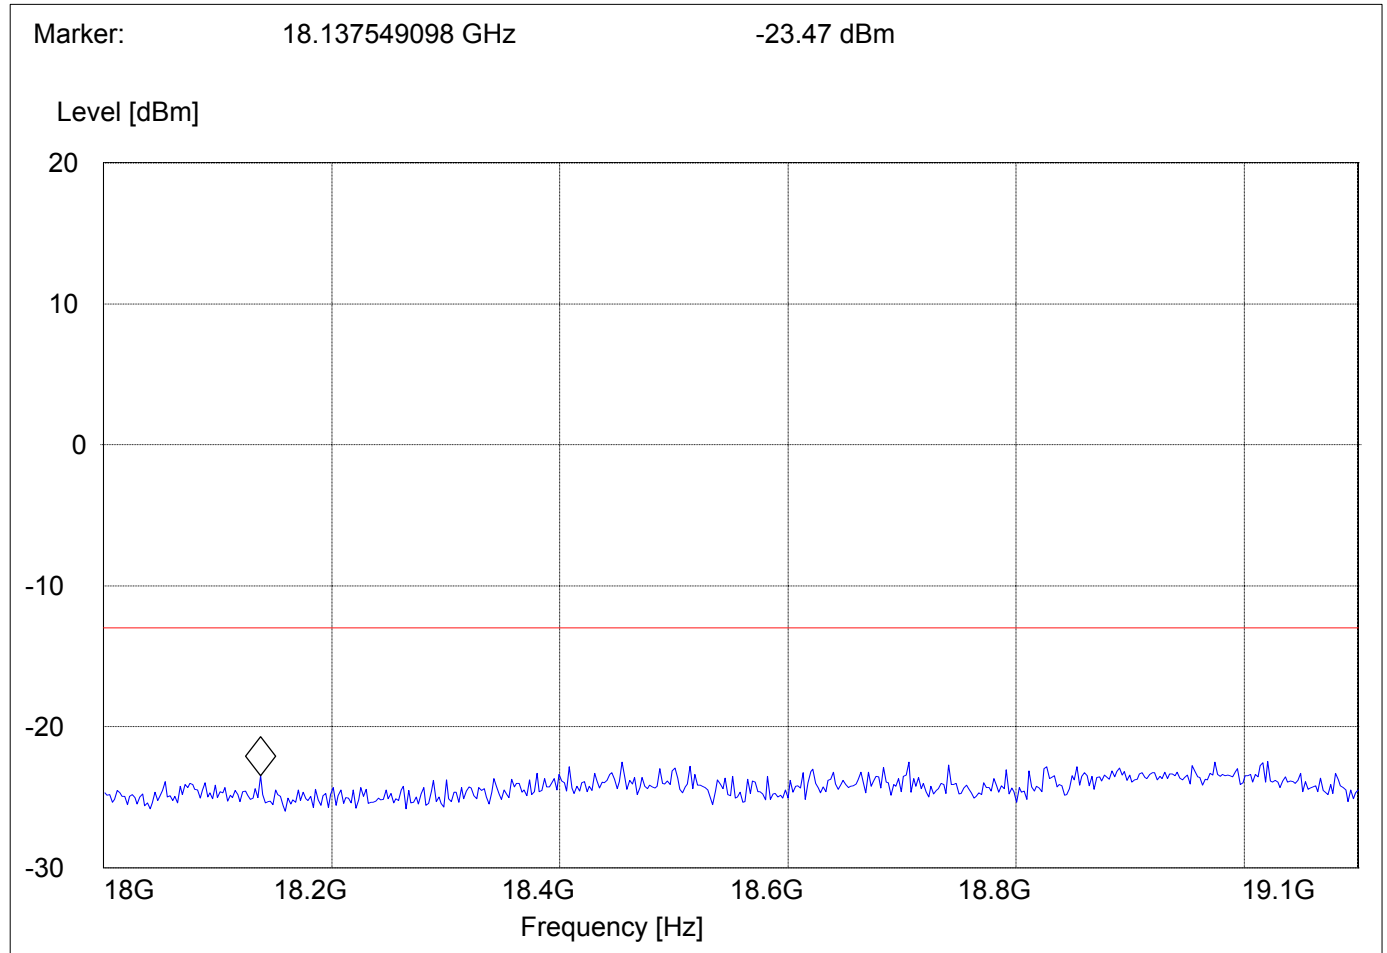

RECEIVER RADIATED EMISSIONS**§ 2.1053 / RSS-133**

NOTE: The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. For this reason the graphs show different noise levels. In the range between 18GHz and 19.1GHz very short cable connections to the antenna was used to minimize the noise level.

Limits**SUBCLAUSE § 15.209**

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

RECEIVER RADIATED EMISSIONS


EUT in Idle Mode: 30MHz – 1GHz

SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
30MHz	1GHz	Max Peak	Coupled	100KHz

Marker: 30 MHz 35.67 dBμV/m

Level [dBμV/m]

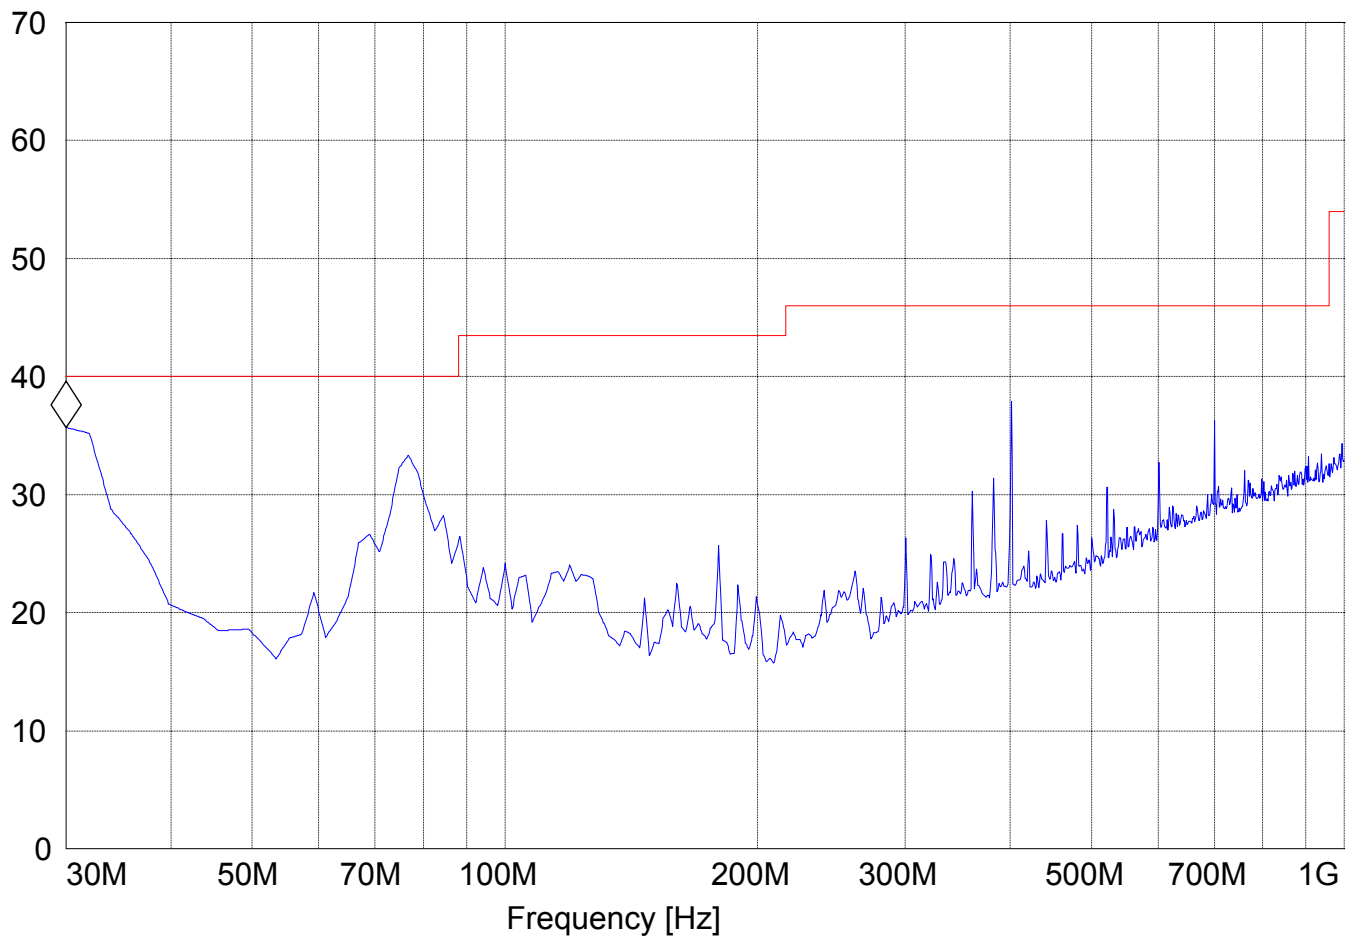


RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 1GHz – 3GHz

SWEEP TABLE: "FCC Spuri 1-8G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1GHz	8GHz	Max Peak	Coupled	1 MHz

Marker: 1 GHz 33.52 dB μ V/m

Level [dB μ V/m]

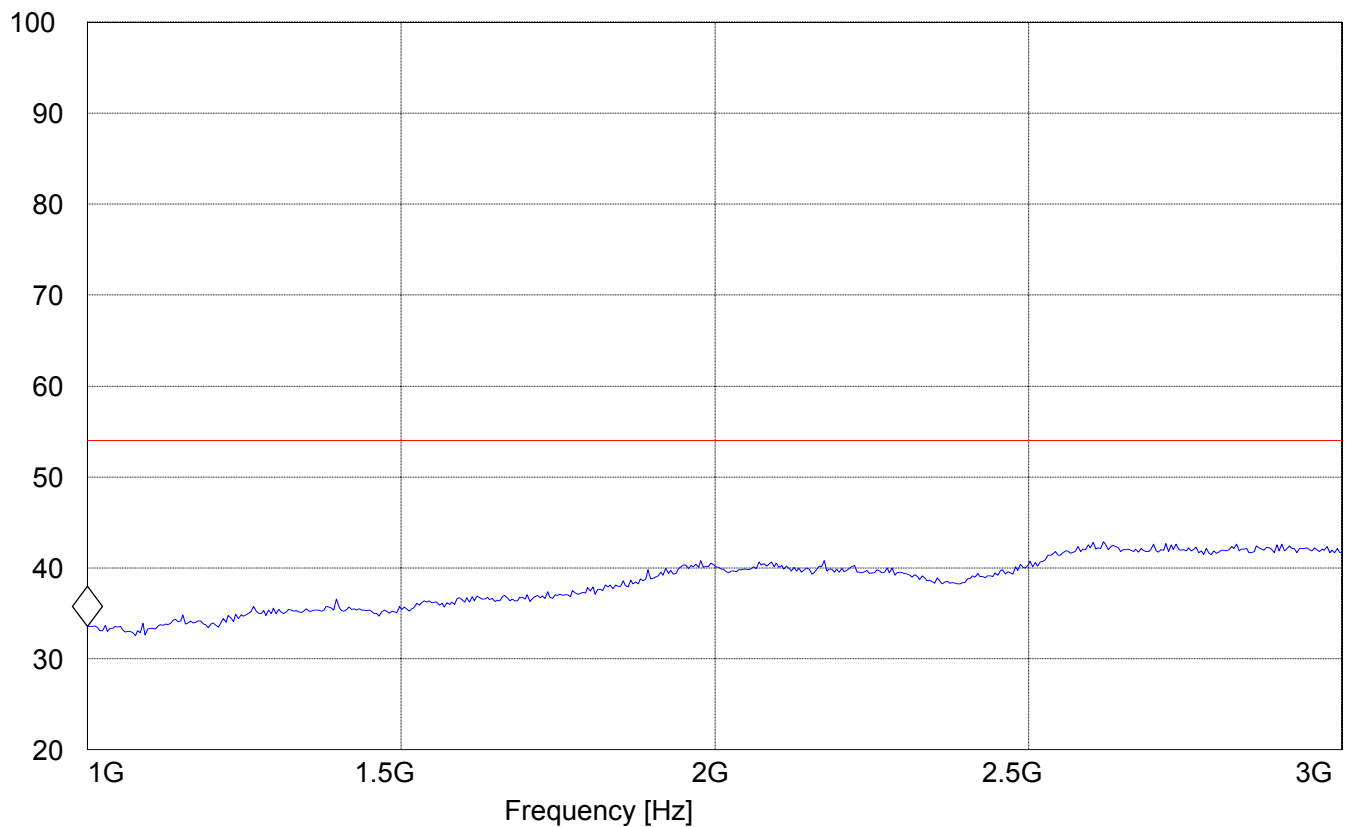


RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 3GHz – 18GHz

SWEEP TABLE: "FCC 24 spuri 8-18G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
8GHz	18GHz	Max Peak	Coupled	1 MHz

Marker: 11.206412826 GHz 35.82 dB μ V/m

Level [dB μ V/m]

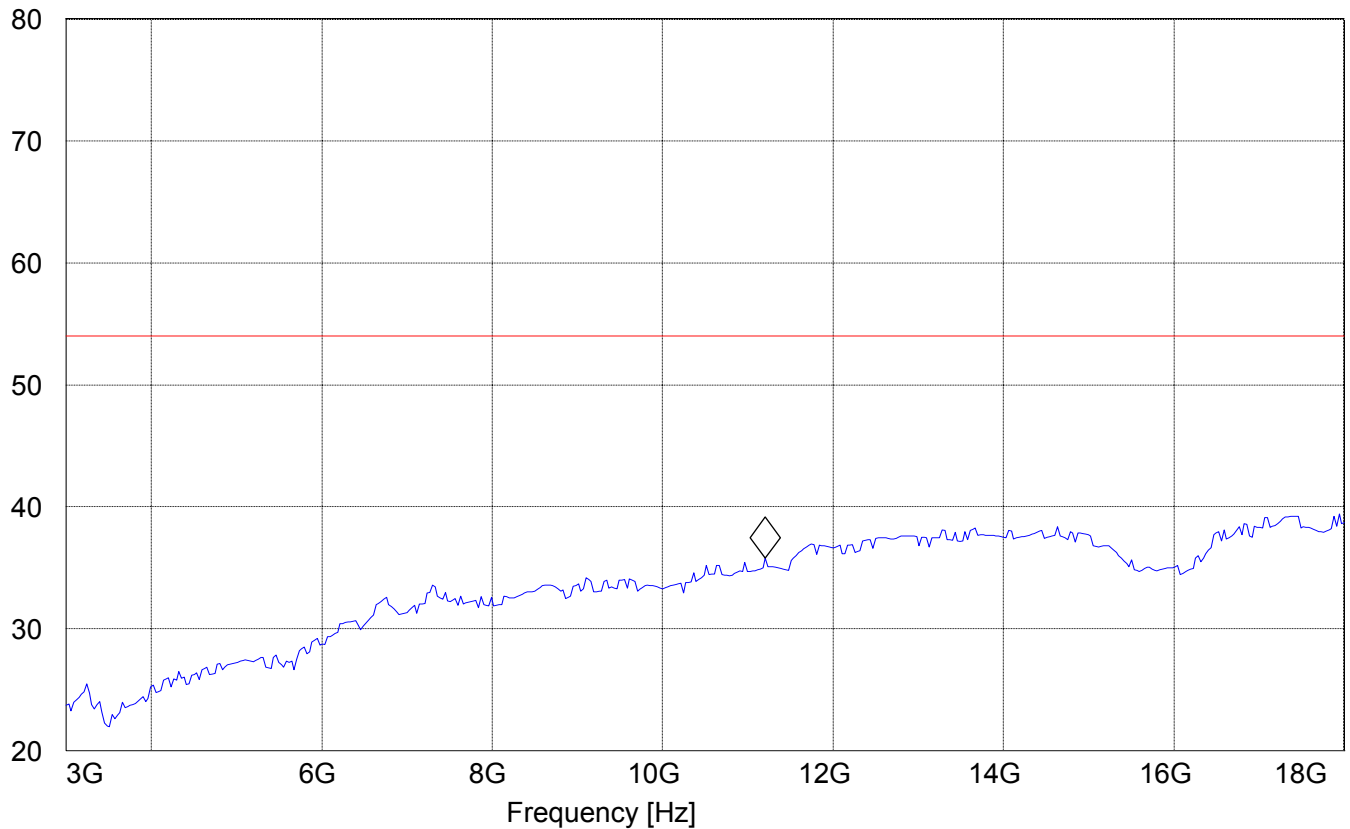


RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 18GHz – 19.1GHz

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

Marker: 22.684368737 GHz 41 dBμV/m

Level [dBμV/m]

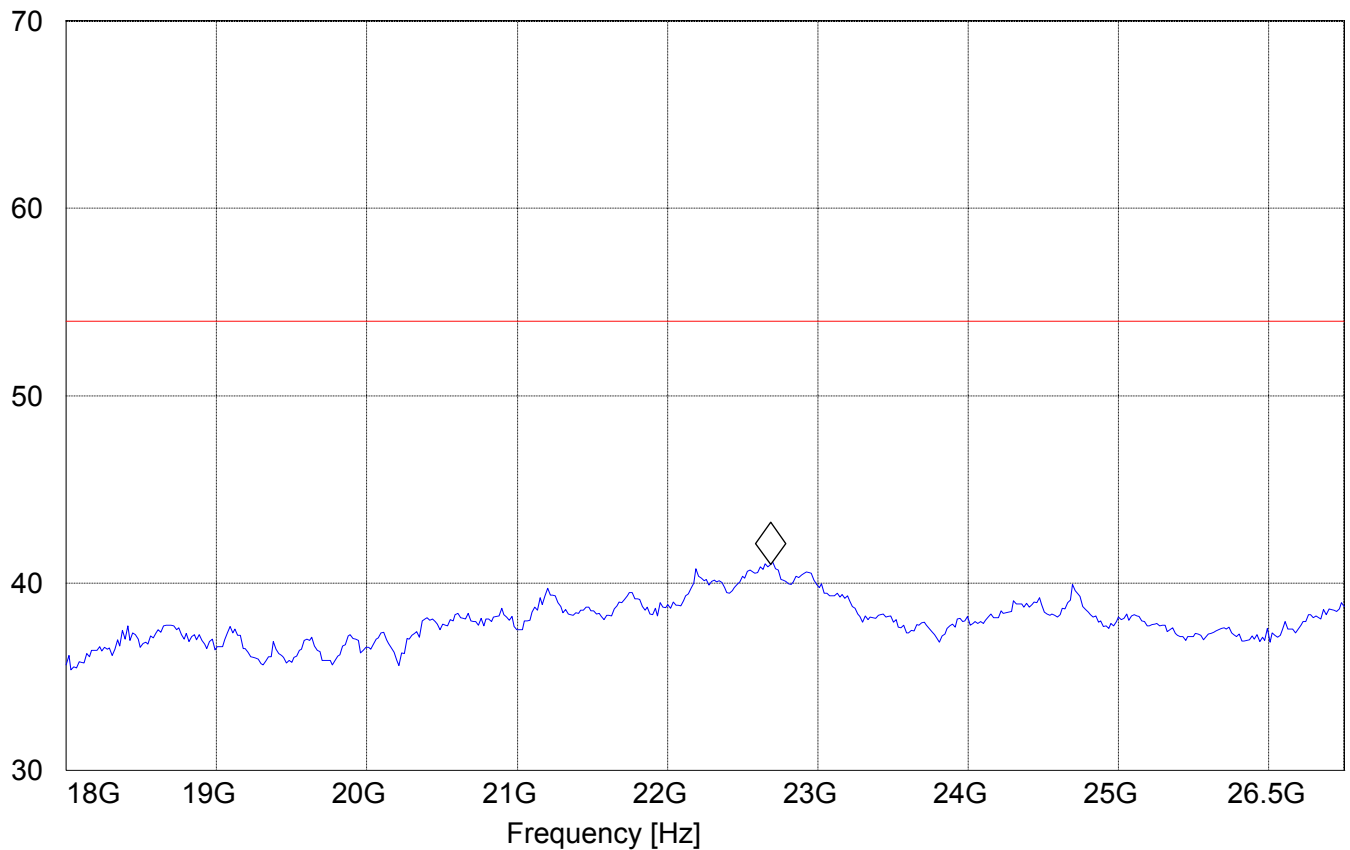

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)


Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

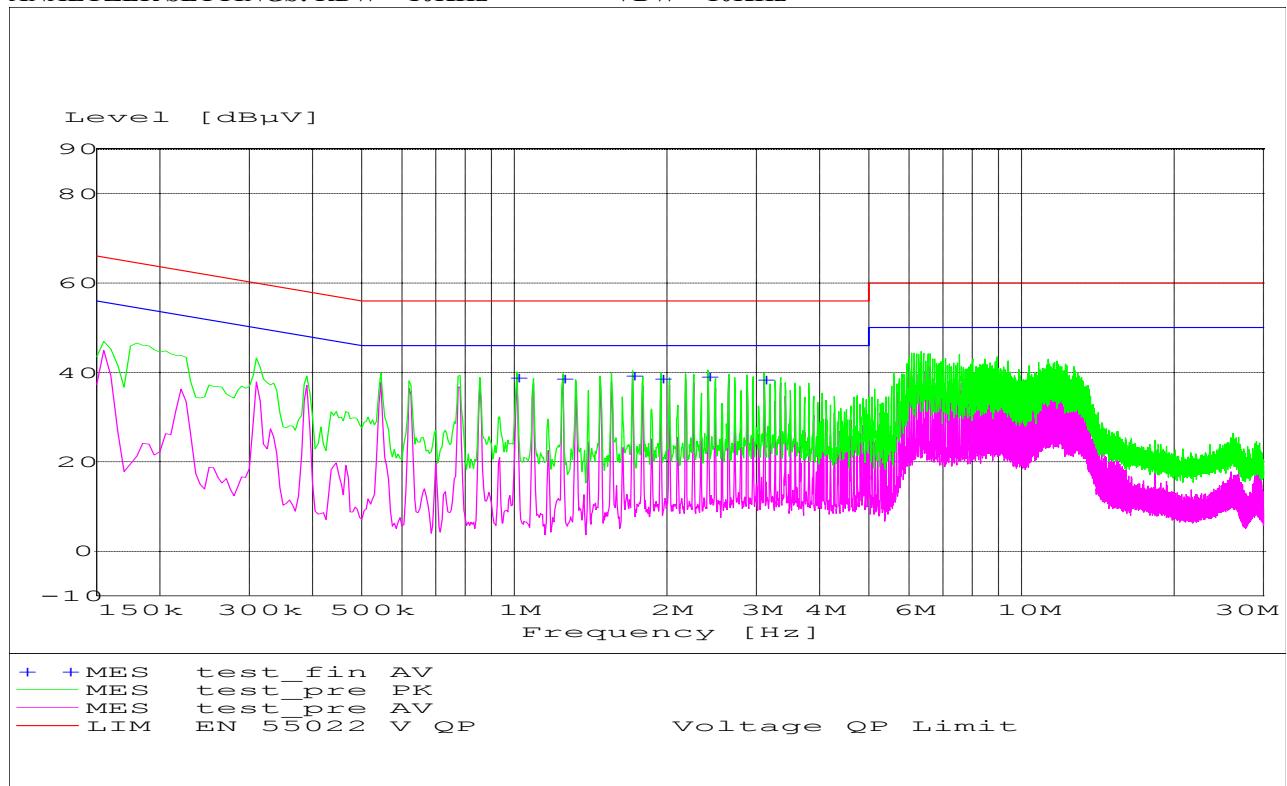

MEASUREMENT RESULT: "vol_0001_fin QP"

3/18/03 3:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.010000	38.80	0.0	46	7.2 N	GND	
1.245000	38.50	0.0	46	7.5 L1	GND	
1.710000	39.20	0.0	46	6.8 L1	GND	
1.945000	38.60	0.0	46	7.4 N	GND	
2.410000	39.00	0.0	46	7.0 N	GND	
3.110000	38.40	0.0	46	7.6 L1	GND	

Technical specification: 15.107 / 15.207 (Revised as of October 1, 1991)**Limit**

0.45 to 30 MHz	250 μ V / 47.96 dB μ V
----------------	--------------------------------


ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

Note: This measurement is carried out according to guidelines of FCC 02-157
(Limit: CISPR 22 class-B)

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
05	Power Amplifier	250W1000	Amplifier Research	300031
06	Biconilog Antenna	3141	EMCO	0005-1186
07	Horn Antenna	SAS-200/571	AH Systems	325
08	Power Splitter	11667B	Hewlett Packard	645348
09	Climatic Chamber	VT4004	Votch	G1115
10	Pre-Amplifier	JS4-00102600	Miteq	00616
11	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807
12	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06

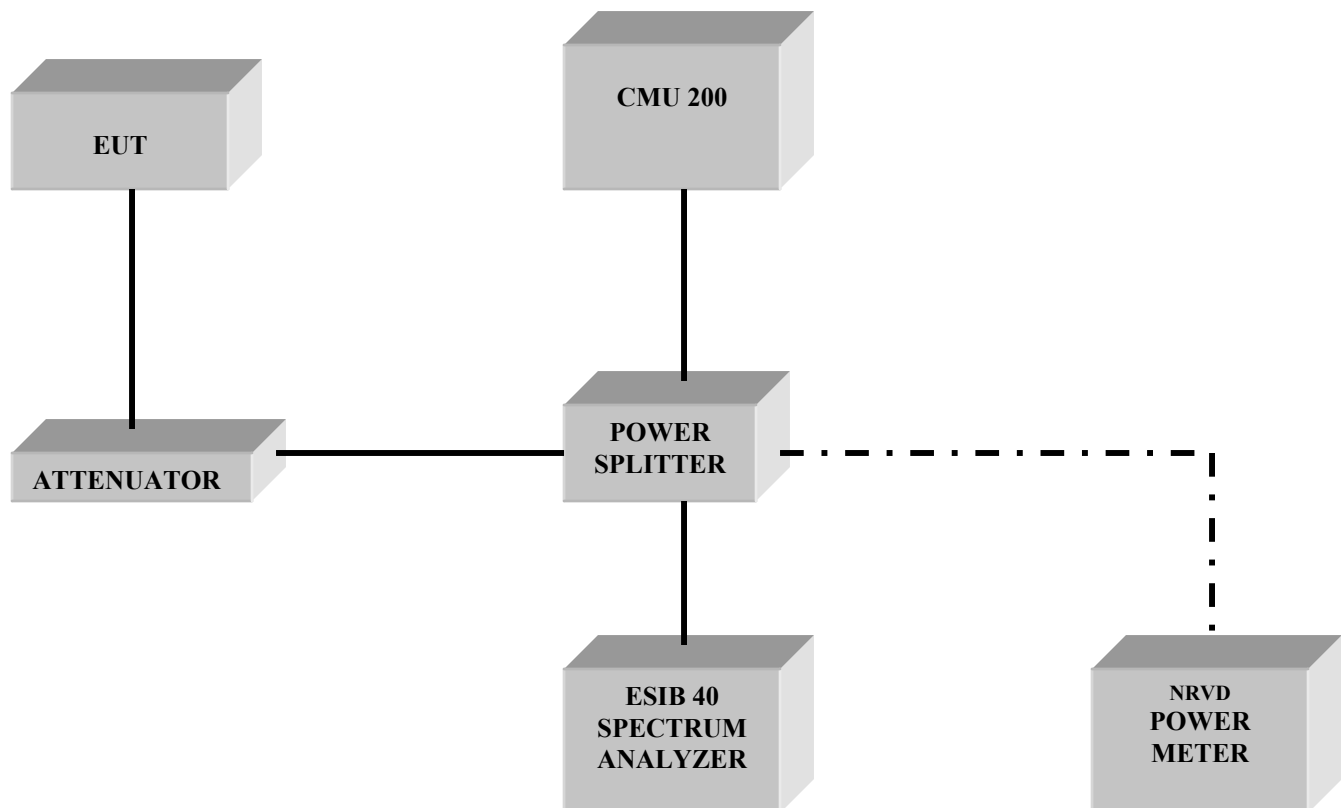BLOCK DIAGRAMS**Conducted Testing**

Radiated Testing**ANECHOIC CHAMBER**