

Global EMC Inc. Labs

EMC & RF Test Report

As per

RSS 210 Issue 8:2010

&

**FCC Part 15 Subpart C:2015
Unlicensed Intentional Radiators**

on the

CashCode One oneTrack



Raymond Lee Au, B.Eng
Project Engineer
Global EMC Inc.
11 Gordon Collins Dr.
Gormley, ON
Canada, L0H 1G0
Ph: (905) 883-8189

Testing produced for



See Appendix A for full customer & EUT details.



Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Table of Contents

Table of Contents	2
Report Scope	3
Summary	4
Test Results Summary	5
Justifications, Descriptions, Deviations & Notes	6
Applicable Standards, Specifications and Methods	7
Sample calculation(s)	8
Document Revision Status	8
Definitions and Acronyms	9
Testing Facility	10
Calibrations and Accreditations	10
Testing Environmental Conditions and Dates	11
Detailed Test Results Section	12
Radiated Emissions - Spurious	13
Radiated Emissions – Fundamental	22
20 dB Bandwidth	26
Power Line Conducted Emissions	28
Appendix A – EUT Summary	34
Appendix B – EUT and Test Setup Photographs	36

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Report Scope

This report addresses the EMC testing and test results of the Crane Payment Innovations, CashCode One oneTrack bill validator. This unit is herein referred to as EUT (Equipment Under Test). Testing is performed at Global EMC Labs.

The EUT was tested for compliance against the following standards:

RSS 210 Issue 8:2010
FCC Part 15 Subpart C:2015

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

The results contained in this report relate only to the item(s) tested.

This report does not imply product endorsement by A2LA or any other accreditation agency, any government, or Global EMC Inc.

Opinions/interpretations expressed in this report, if any, are outside the scope of Global EMC Inc accreditation. Any opinions expressed do not necessarily reflect the opinions of Global EMC Inc, unless otherwise stated.

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Summary

The results contained in this report relate only to the item(s) tested.

EUT FCC Certification #, FCC ID:	QP8ONETRACK
EUT Industry Canada Certification #, IC:	1297A-ONETRACK
EUT Passed all tests performed.	Yes (see test results summary)
Tests conducted by	Raymond Lee Au

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.203	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS-GEN (Table 6)	Restricted Bands for intentional operation	QuasiPeak Average	Pass
FCC 15.209 RSS-GEN (Tables 4,5)	Spurious Radiated emissions	QuasiPeak Average	Pass
FCC 15.207 RSS-GEN (Table 3)	Power Line Conducted Emissions	QuasiPeak Average	Pass
Overall Result			PASS

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

All tests were performed by Raymond Lee Au.

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '*'.

Justifications, Descriptions, Deviations & Notes

The following justifications for tests not performed or deviations from the above listed specifications apply:

For the antenna requirement specified in FCC 15.203, the antenna is a PCB trace antenna located inside the unit's enclosure, and is not replicable by the user.

As per the client, the Interface Connector Port is to be connected to a host which runs with secure software to protect the inventory data. It is not to be connected to a Class B personal computer. Furthermore, the device is considered as a Class A peripheral. It will only be installed in a commercial environment, such as in a casino slot machine or similar secure environments, and is exempt from the DoC requirements

For the Restricted Bands of operation, the 15.209 transmitter is designed to operate at 13.56 MHz.

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Applicable Standards, Specifications and Methods

- ANSI C63.4:2009 - Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
- ANSI C63.10:2009 - American national standard for testing unlicensed wireless devices
- CFR 47 FCC 15:2015 - Code of Federal Regulations – Radio Frequency Devices
- CISPR 22:2008 - Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement
- ICES-003:2010 - Digital Apparatus - Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard
- ISO 17025:2005 - General Requirements for the competence of testing and calibration laboratories
- RSS-GEN:2014 - Issue 4: General Requirements for Compliance of Radio Apparatus
- RSS 210:2010 - Issue 8: Spectrum Management and Telecommunications Policy. Radio Standards Specification Low Power Licence-Exempt Radiocommunication Devices

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Sample calculation(s)

Margin = limit – (received signal + antenna factor + cable loss – pre-amp gain)

Margin = 50.5dBuV/m – (50dBuV + 10dB + 2.5dB – 20dB)

Margin = 8 dB

Document Revision Status

Release 1 - May 8, 2015
 - Initial release.

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Definitions and Acronyms

The following definitions and acronyms are applicable in this report.
See also ANSI C63.14.

AE – Auxillary Equipment.

BW – Bandwidth. Unless otherwise stated, this refers to the 6 dB bandwidth.

EMC – Electro-Magnetic Compatibility

EMI – Electro-Magnetic Immunity

EUT – Equipment Under Test

ITE – Information Technology Equipment with a primary function(s) of entry, storage, display, retrieval, transmission, processing, switching, or control, of data.

LISN – Line impedance stabilization network

NCR – No Calibration Required

RF – Radio Frequency

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Testing Facility

Testing for EMC on the EUT was carried out at Global EMC labs in Toronto, Ontario, Canada. The testing lab consists of a 3m semi-anechoic chamber calibrated to be able to allow measurements on an EUT with a maximum width or length of up to 2m and height up to 3m. The chamber is equipped with a turn table that is capable of testing devices up to 3300lb in weight. This facility is capable of testing products that are rated for 120 Vac and 240Vac single phase, or 208 Vac 3 phase input. DC capability is also available. The chamber is equipped with an antenna mast that controls polarization and height from the control room adjoining the shielded chamber. Radiated emissions measurements are performed using a Bilog, and Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN.

Calibrations and Accreditations

The measurement site used is registered with Federal Communications Commission (FCC) and Industry Canada (IC). This site is calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 “Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”. The semi-anechoic chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. All measuring equipment is calibrated on an annual or bi-annual basis as listed for each respective test.

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Testing Environmental Conditions and Dates

Following were the environmental conditions in the facility during time of testing –

Date	Test	Init.	Temperature (°C)	Humidity (%)	Pressure (kPa)
Mar. 4 – 6, 2015	All	RA	20-25°C	30-45%	100 -103kPa

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Detailed Test Results Section

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Radiated Emissions - Spurious

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

Limit(s) and Method

The method is as defined in ANSI C63.4:2009.

The limits are as defined in FCC Part 15, Section 15.209:

0.009 MHz – 0.490 MHz:	2400/F uV/m (67.6-20logF dBuV/m) at 300 m ⁽¹⁾ (147.6-20log(F) at 3 m) ⁽¹⁾
0.490 MHz – 1.705 MHz:	24000/F uV/m (87.6-20log(F) dBuV/m) at 30 m ⁽¹⁾ (127.6-20log(F) at 3 m) ⁽¹⁾
1.705 MHz – 30.0 MHz:	30 uV/m (29.5 dBuV/m) at 30 m ⁽¹⁾ , (69.5 dBuV/m at 3m) ⁽¹⁾
30 MHz – 88 MHz:	100 uV/m (40.0 dBuV/m ¹) at 3 m ⁽¹⁾
88 MHz – 216 MHz:	150 uV/m (43.5 dBuV/m ¹) at 3 m ⁽¹⁾
216 MHz – 960 MHz:	200 uV/m (46.0 dBuV/m ¹) at 3 m ⁽¹⁾
Above 960 MHz:	500 uV/m (54.0 dBuV/m ¹) at 3 m ⁽¹⁾
Above 1000 MHz:	500 uV/m (54 dBuV/m ²) at 3m ⁽²⁾
Above 1000 MHz:	500 uV/m (74 dBuV/m ³) at 3m ⁽³⁾


⁽¹⁾ Limit is with Quasi Peak detector with bandwidths as defined in CISPR-16-1-1.

⁽²⁾ Limit is with 1 MHz measurement bandwidth and using an Average detector.

⁽³⁾ Limit is with 1 MHz measurement bandwidth and using a Peak detector

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Typical Radiated Emissions Setup

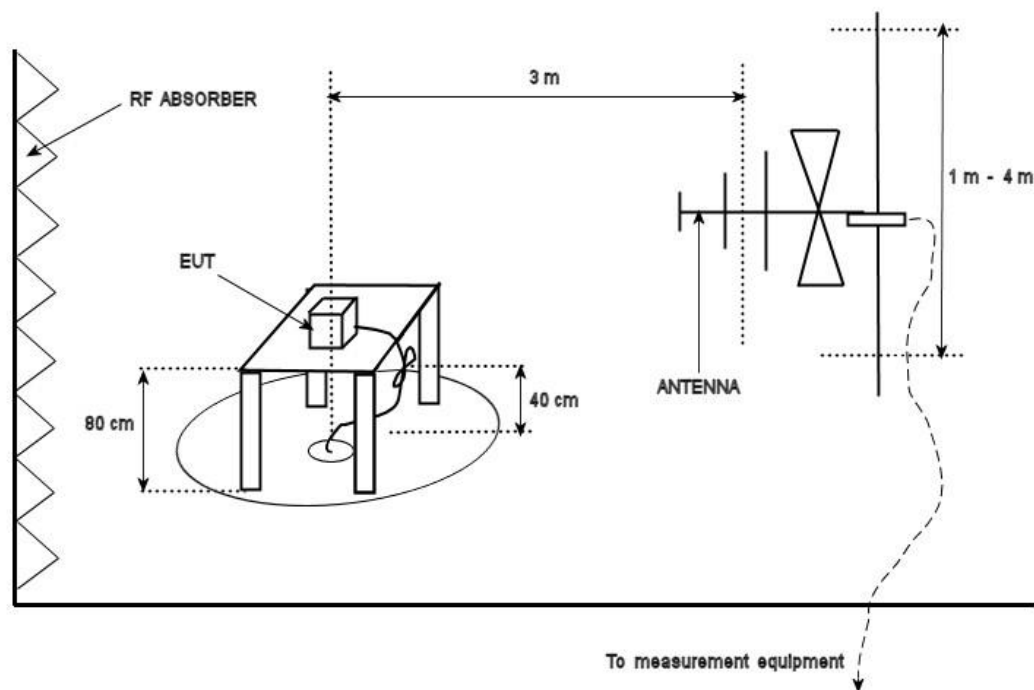

Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is ± 4.4 dB with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs

Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector, please refer to the final measurement table where applicable. The graphs shown below are maximized peak measurement graphs, measured with a resolution bandwidth greater than or equal to, the final required detector and over a full 0-360° rotation. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to the 10th harmonic.

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Devices may be scanned at alternate test distances, and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used above 30 MHz and 40 dB/decade below 30 MHz. For example for 1 meter measurements, an extrapolation factor 9.5 dB from 20 Log (1m/3m) is applied.

See final measurement section for all measurements.


The EUT was scanned with the transmitter on and transmitting continuous modulated data at maximum power

Plots and measurements are made at a 3 meter distance.

The EUT was scanned in the 3 orthogonal positions, and results from the worst case position are presented in this report.


Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Peak Emissions Graph
9 kHz to 150 kHz
3 meter test distance

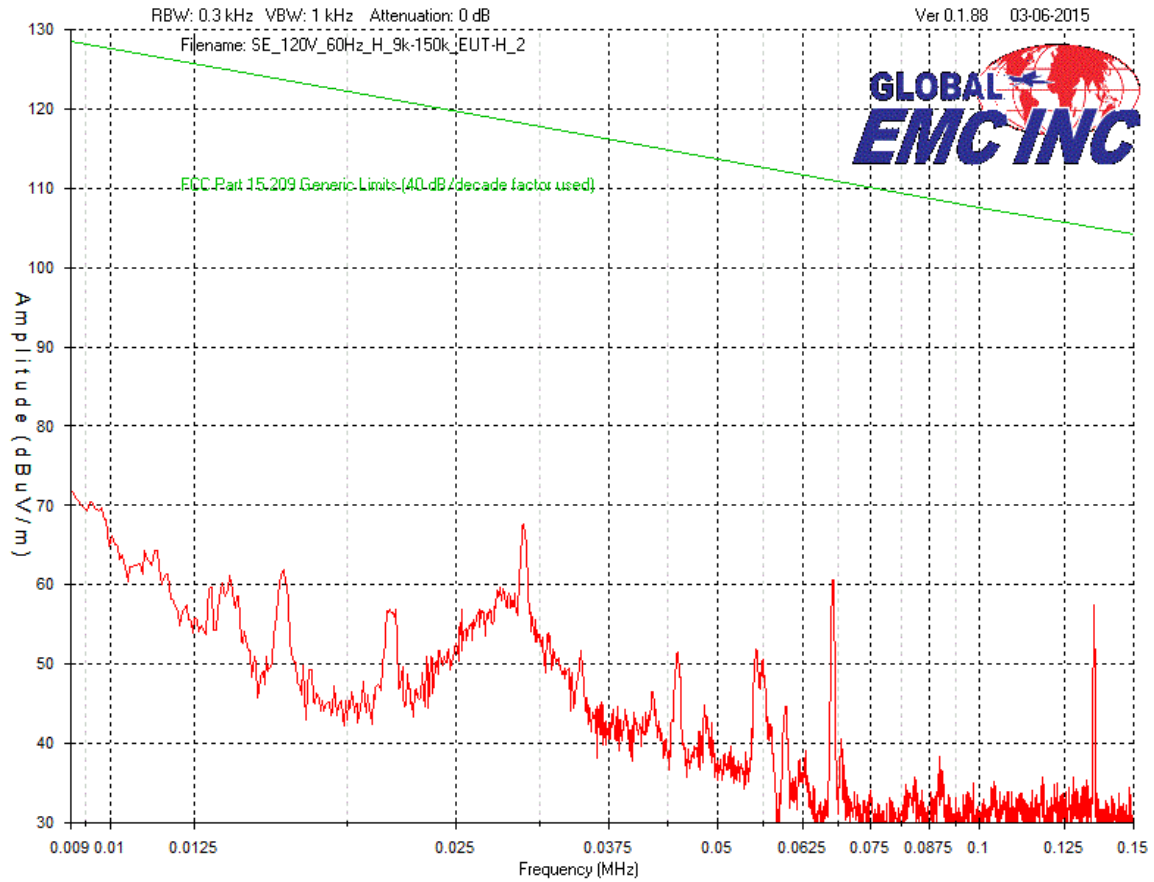


Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Peak Emissions Graph
150 kHz to 30 MHz
3 meter test distance

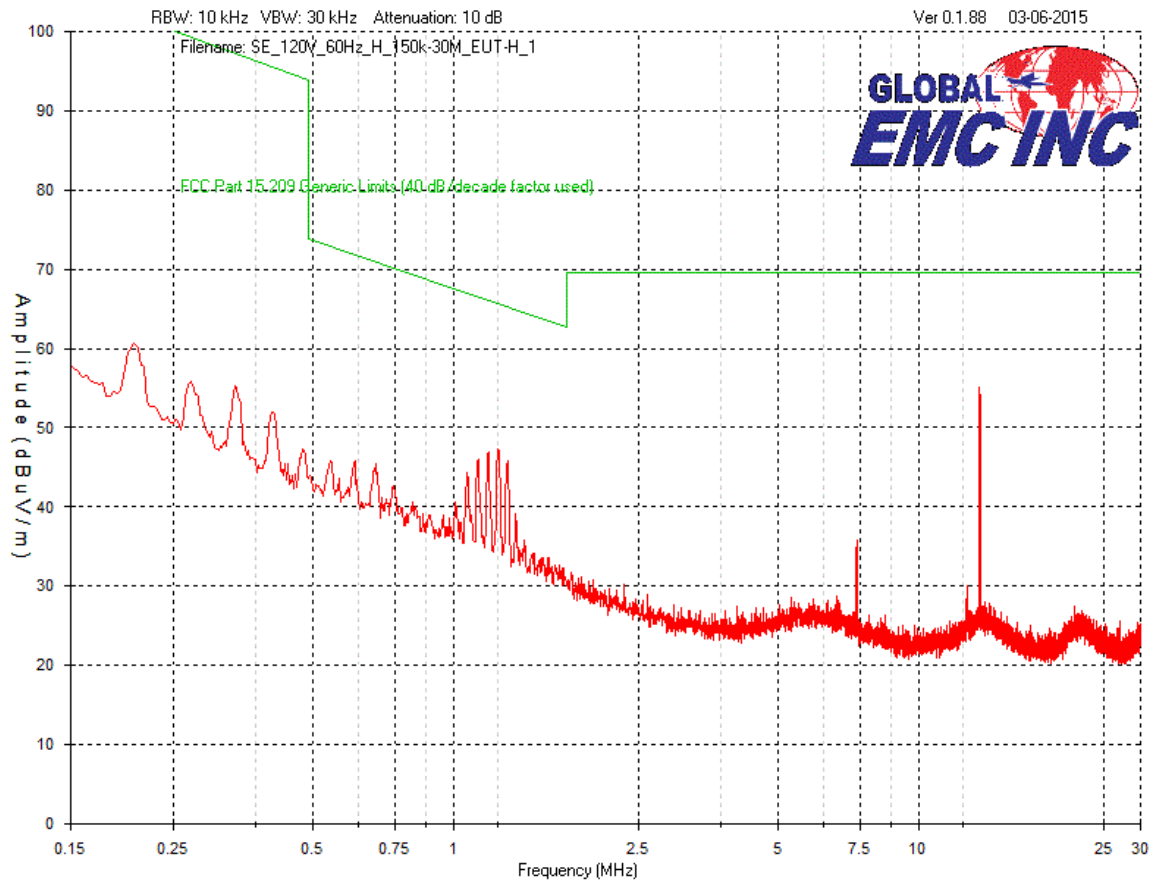


Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Peak Emissions Graph
Vertical Antenna Polarity
30 MHz to 1 GHz
3 meter test distance

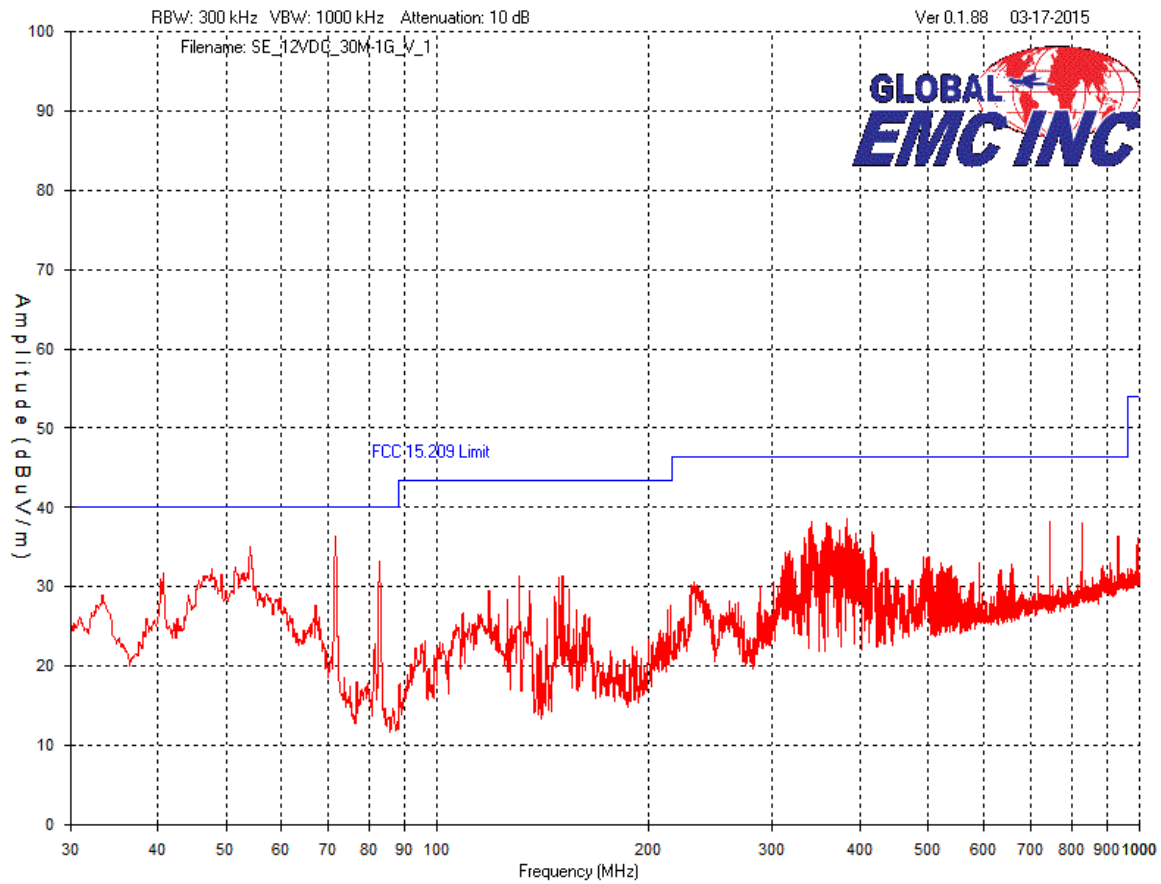

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Peak Emissions Graph
Horizontal Antenna Polarity
30 MHz to 1 GHz
3 meter test distance

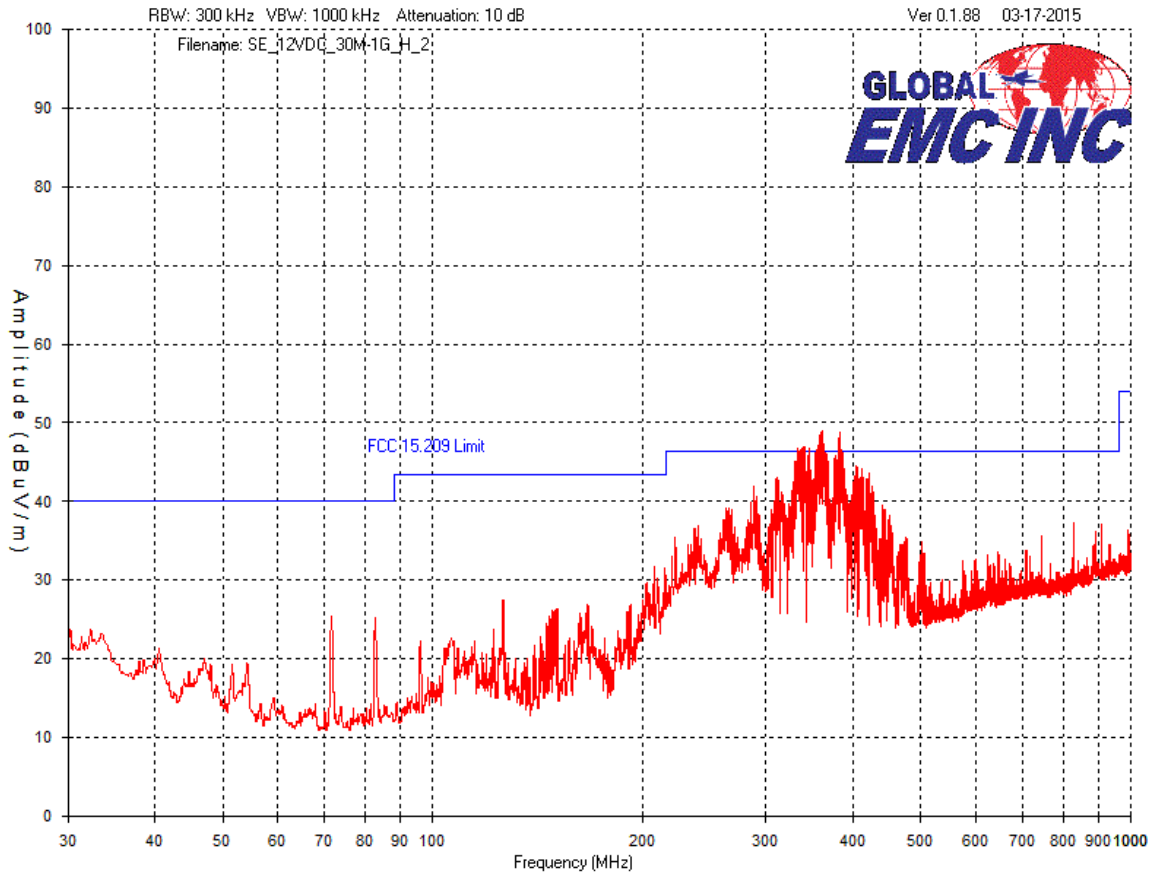

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Final Measurements

Radiated Emissions
Spurious measurements
3m test distance

Test Frequency (MHz)	Detection mode	Raw signal dB(μV)	Antenna factor (dB)	Cable loss dB + Pre-selector	Pre-Amp Gain dB	Received signal dB(μV/m)	Emission limit dB(μV/m)	Margin dB(μV)	Result
Vertical Antenna Polarity									
71.5	Peak	62.9	6	0.7	-33.2	36.4	40	3.6	Pass
54.3	Peak	59.8	7.7	0.6	-33.1	35	40	5	Pass
82.8	Peak	59.4	6.3	0.7	-33.2	33.2	40	6.8	Pass
383.6	Peak	55.5	15.5	1.5	-33.9	38.6	46.4	7.8	Pass
743.9	Peak	48.5	20.6	2.1	-33	38.2	46.4	8.2	Pass
340.5	Peak	55.4	15.1	1.4	-33.8	38.1	46.4	8.3	Pass
Horizontal Antenna Polarity									
360.7	QP	42.8	15.7	1.4	-33.9	26	46.4	20.4	Pass
383.4	QP	51.4	16.2	1.5	-33.9	35.2	46.4	11.2	Pass
358.2	QP	42	15.7	1.4	-33.8	25.3	46.4	21.1	Pass
380.8	QP	36	16.2	1.5	-33.9	19.8	46.4	26.6	Pass
355.8	QP	49	15.6	1.4	-33.8	32.2	46.4	14.2	Pass
340.5	QP	43.9	15.1	1.4	-33.8	26.6	46.4	19.8	Pass
353.2	QP	48.2	15.6	1.4	-33.8	31.4	46.4	15	Pass

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	8566B	HP	May 21, 2014	May 21, 2016	GEMC 193
Quasi-Peak Adapter	85650A	HP	May 22, 2014	May 22, 2016	GEMC 194
Loop Antenna 30Hz – 1MHz	EM 6871	Electro-Metrics	Feb. 3, 2015	Feb. 3, 2017	GEMC 70
Loop Antenna 100kHz – 30MHz	EM 6872	Electro-Metrics	Feb. 3, 2015	Feb. 3, 2017	GEMC 71
BiLog Antenna	3142-C	ETS	Feb. 10, 2015	Feb. 10, 2017	GEMC 137
Preamplifier	CPA9231A	Chase	Sept. 9, 2014	Sept. 9, 2016	GEMC 6403
RF Cable 7m	LMR-400-7M- 50OHM-MN- MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M- 50OHM-MN- MN	LexTec	NCR	NCR	GEMC 29

This report module is based on GEMC template "FCC - 15.209 - Radiated Emissions_Rev1.doc"

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Radiated Emissions – Fundamental

Purpose

The purpose of these tests is to ensure that the RF energy emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference. RF energy unintentionally emitted from the EUT, and the intentionally emitted fundamental and its harmonics, have limits as shown below.

Limit(s) and Method

The method is as defined in ANSI C63.4:2009 and as per applicable standards.

For the fundamental and harmonics, the limits are as defined in FCC Part 15, Section 15.209 (at 3m):

Fundamental frequency	Field strength limits	Field strength limit of fundamental
1.705-30.0 MHz ⁴	30 μ V/m at 30m	At 13.56 MHz: 69.54 dB μ V/m at 3m

For other spurious emissions, the limits are as defined in FCC Part 15, Section 15.209:

0.009 MHz – 0.490 MHz, 2400/F(kHz) μ V/m ^{(3),(4)} at 300m

0.490 MHz – 1.705 MHz, 24000/F(kHz) μ V/m ⁽⁴⁾ at 30 m

30 MHz – 88 MHz, 100 μ V/m (40.0 dB μ V/m ⁽¹⁾) at 3 m

88 MHz – 216 MHz, 150 μ V/m (43.5 dB μ V/m ⁽¹⁾) at 3 m

216 MHz – 960 MHz, 200 μ V/m (46.4 dB μ V/m ⁽¹⁾) at 3 m

Above 960 MHz, 500 μ V/m (54.0 dB μ V/m ⁽¹⁾) at 3 m

Above 1000 MHz, 500 μ V/m (54 dB μ V/m ⁽²⁾) at 3m

⁽¹⁾ Limit is with 120 kHz measurement bandwidth and a using a Quasi Peak detector.

⁽²⁾ Limit is with 1 MHz measurement bandwidth and using an Average detector. A peak limit of 20 dB higher additionally applies.

⁽³⁾ In the frequency bands 9 – 90 kHz, and 110 – 490 kHz, limit is defined using an Average detector. A peak limit of 20 dB higher additionally applies. Otherwise it is a using a Quasi Peak detector.


Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

⁽⁴⁾ In the frequency bands 9 – 150 kHz, and 150 kHz – 30 MHz, limit is defined with a 200 Hz and 9 kHz measurement bandwidths respectively.

Peak field strengths are limited to be at most 20 dB above the average limits where defined at the corresponding frequencies.

To obtain the maximum emission, the loop antenna is positioned with its plane vertical and rotated about its vertical axis at the maximum azimuth position. This is then repeated with its plane horizontal, and rotated about the horizontal axis. The maximum obtained emission is presented.

Typical Radiated Emissions Setup

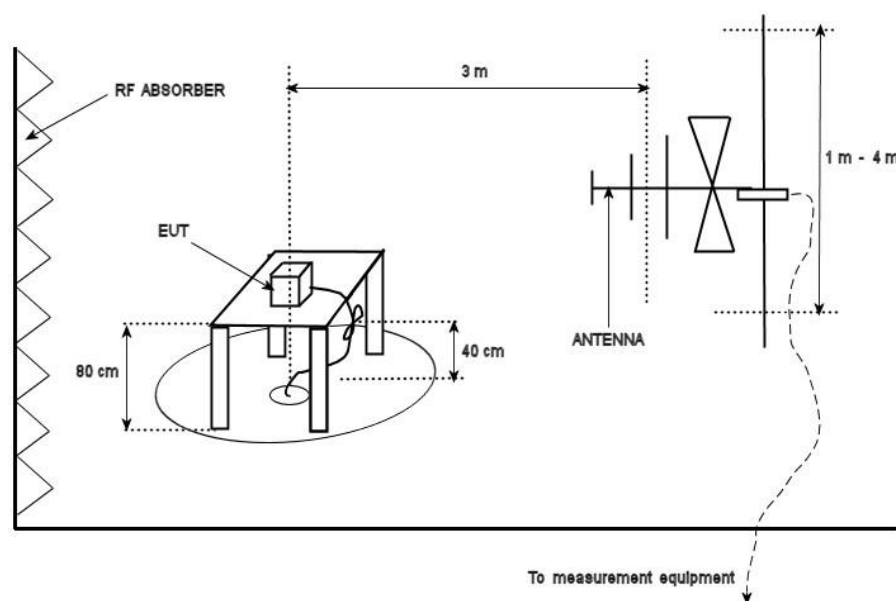

Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-4.4 dB with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs


The graphs shown below are peak scans for graphical illustration only. For final measurements with the appropriate detector, please refer to the final measurement table where applicable. The graph shown below is a maximized peak measurement graph, measured with a resolution bandwidth greater than or equal to, the final required detector

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

and over a full 0-360° rotation. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to at least the 10th harmonic.

Peak Emissions Plot 13.56 MHz

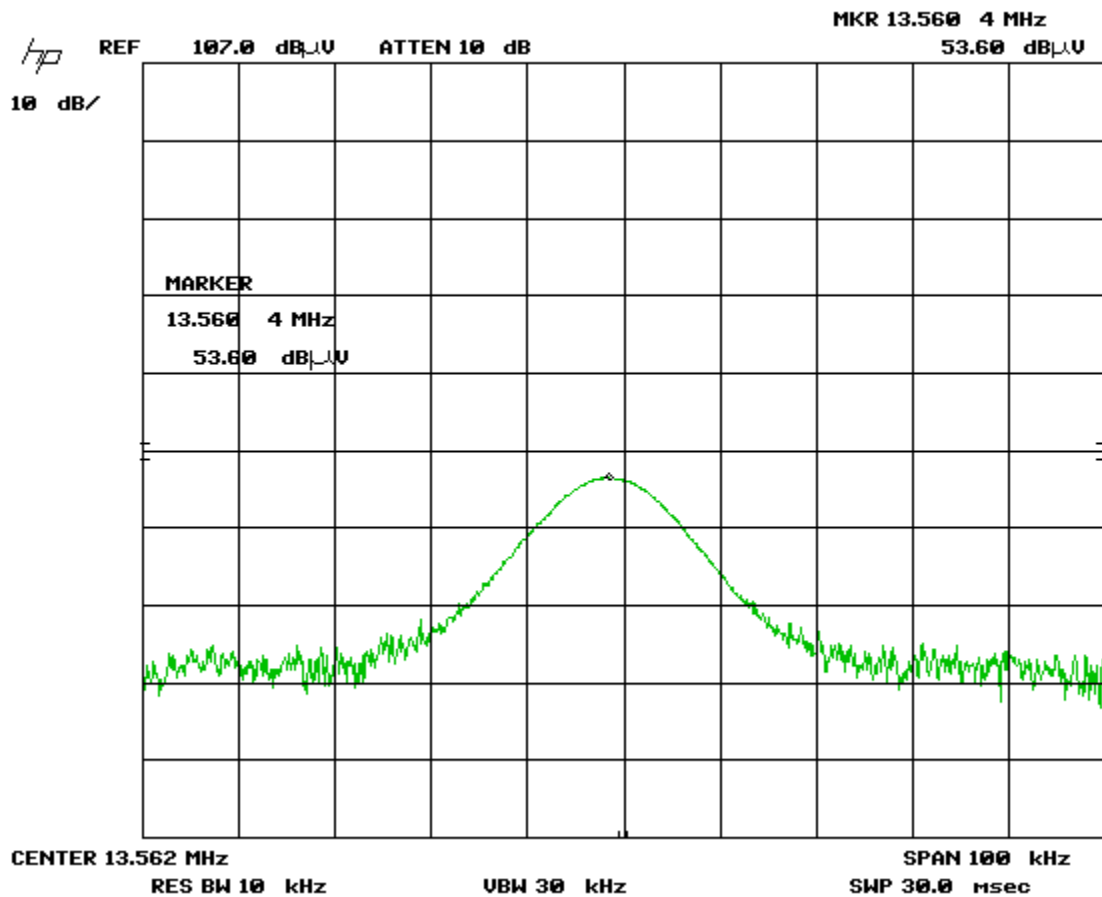

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Final Measurements

Radiated Emissions - 15.209 - Table 4

Test Frequency (MHz)	Detection mode	Raw signal dB(μA)	dBuA to dBuV conversion factor	Antenna factor dB	Cable loss dB + Preselector	Pre-Amp Gain dB	Received signal dB(μV/m)	Emission limit dB(μV/m)	Margin dB(μV)	Result
13.56	Peak	53.6	51.5	-16.2	0.3	33.0	56.2	69.5	13.3	Pass

See *Radiated Emissions – Spurious* section in this report for spurious emissions test results.

Peak emissions meet the general emission limit requirements.

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	8566B	HP	May 21, 2014	May 21, 2016	GEMC 193
Quasi-Peak Adapter	85650A	HP	May 22, 2014	May 22, 2016	GEMC 194
Loop Antenna 100kHz – 30MHz	EM 6872	Electro-Metrics	Feb. 3, 2015	Feb. 3, 2017	GEMC 71
Preamplifier	CPA9231A	Chase	Sept. 9, 2014	Sept. 9, 2016	GEMC 6403
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

20 dB Bandwidth

Purpose

The purpose of this test is to find the 20 dB bandwidth of the emission. This is the bandwidth which is attenuated 20 dB from the peak of the intentional transmission.


Limit(s) and Method

The method is as defined in ANSI C63.10.

There are no applicable limits for this test. Its results are for informational purposes only.

Preliminary Graphs

20 dB Bandwidth for 13.56 MHz Transmission
(Worst case)

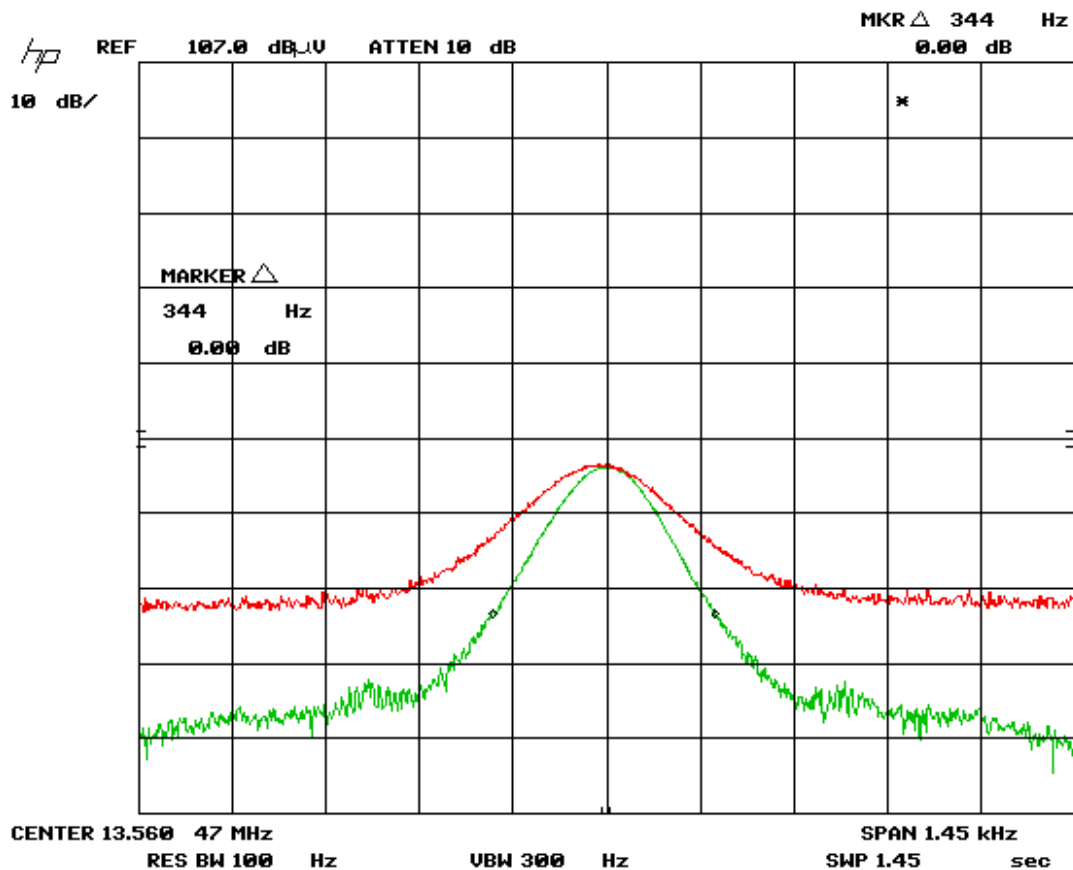

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Results

The 20 dB bandwidth for the 13.56 MHz transmission is 344 Hz.

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	8566B	HP	May 21, 2014	May 21, 2016	GEMC 193
Loop Antenna 100kHz – 30MHz	EM 6872	Electro-Metrics	Feb. 3, 2015	Feb. 3, 2017	GEMC 71
Preamp	CPA9231A	Chase	Sept. 9, 2014	Sept. 9, 2016	GEMC 6403

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Power Line Conducted Emissions

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT's power line does not exceed the limits listed below as defined in the applicable test standard, as measured from a LISN. This helps protect lower frequency radio services such as AM radio, shortwave radio, amateur radio operators, maritime radio, CB radio, and so on, from unwanted interference.

Limits & Method

The limits and method are as defined in 47 CFR FCC Part 15 Section 15.207, RSS-GEN 8.8, and ANSI C64:2003.

Average Limits		QuasiPeak Limits	
150 kHz – 500 kHz	56 to 46 dBuV	150 kHz – 500 kHz	66 to 56 dBuV
500 kHz – 5 MHz	46 dBuV	500 kHz – 5 MHz	56 dBuV
5 MHz – 30 MHz	50 dBuV	500 kHz – 30 MHz	60 dBuV


The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

Note: If the Peak or Quasi Peak detector measurements do not exceed the Average limits, then the EUT is deemed to have passed the requirements.

Both limits are applicable, and each is specified as being measured with a 9 kHz measurement bandwidth.

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Typical Setup Diagram

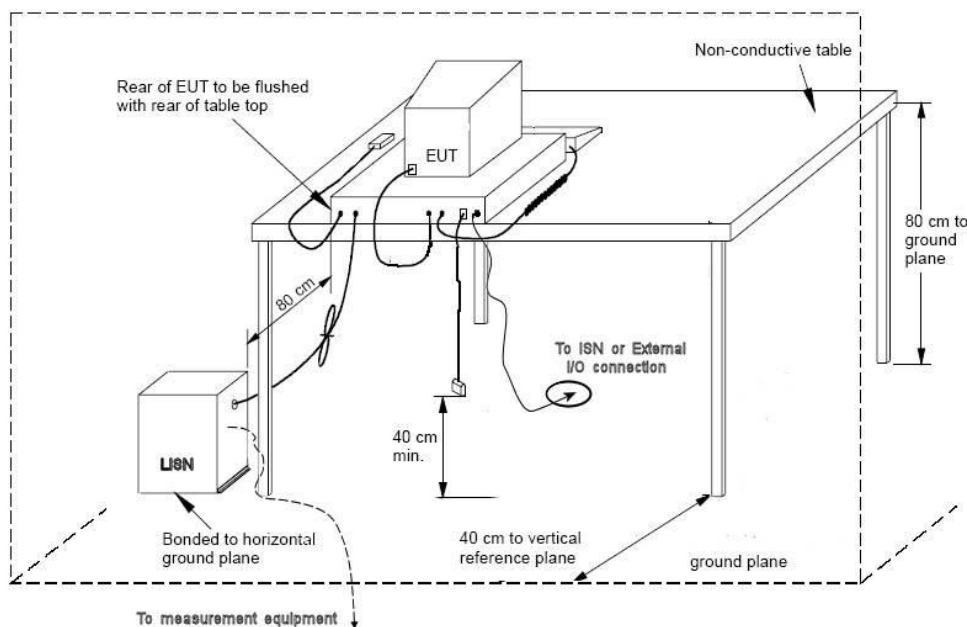

Measurement Uncertainty


The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is ± 3.6 dB with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs

Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector where applicable, please refer to the table. The graphs shown below are peak measurement graphs, measured with a resolution bandwidth greater than or equal to the final required detector. These graphs are performed as a worst case measurement to enable the detection of frequencies of concern and for considerable time savings. Power line conducted emissions is performed with the transmitter transmitting with constant modulated data at maximum output power.


Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Peak Emissions Graph - Line 1
12 V_{DC}

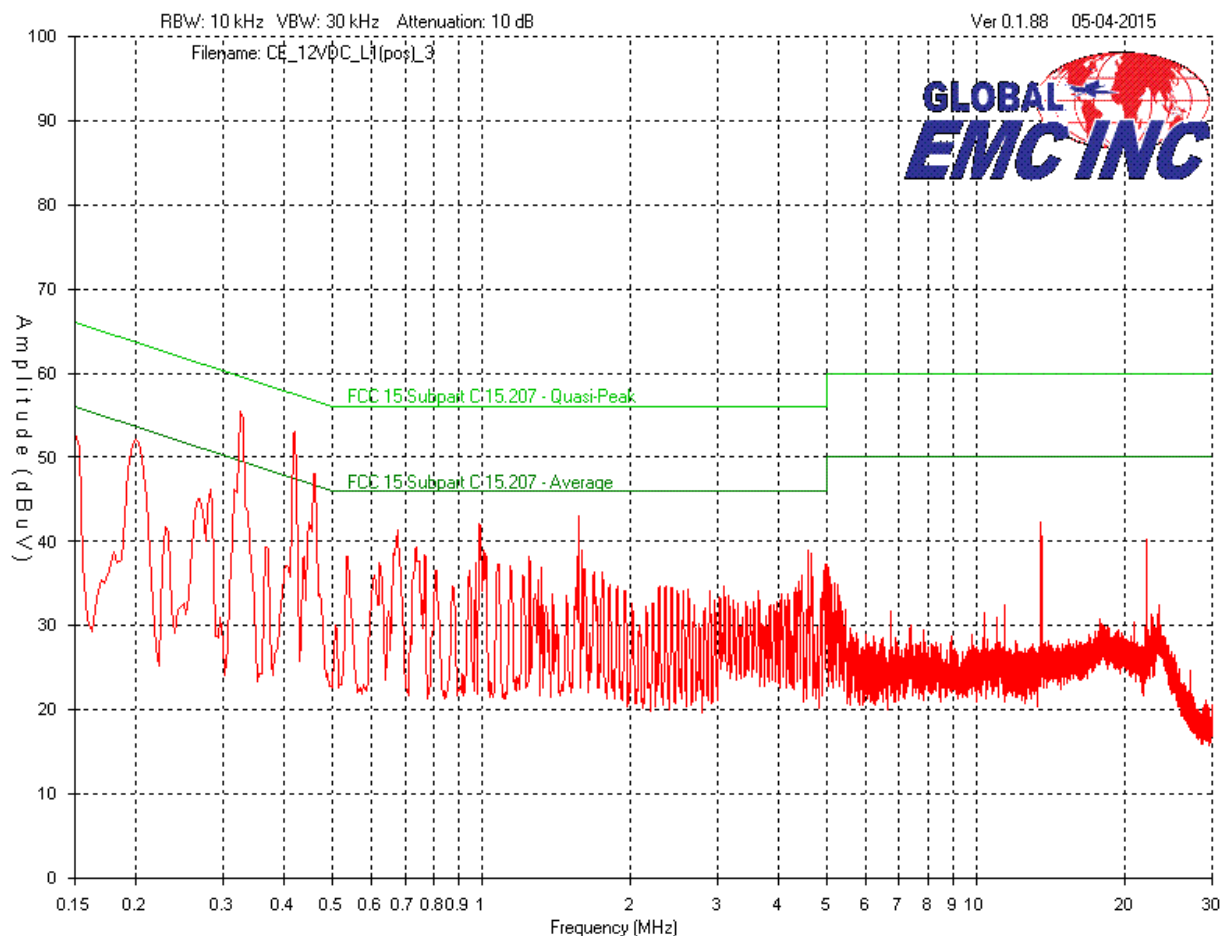

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Peak Emissions Graph - Line 2
12 V_{DC}

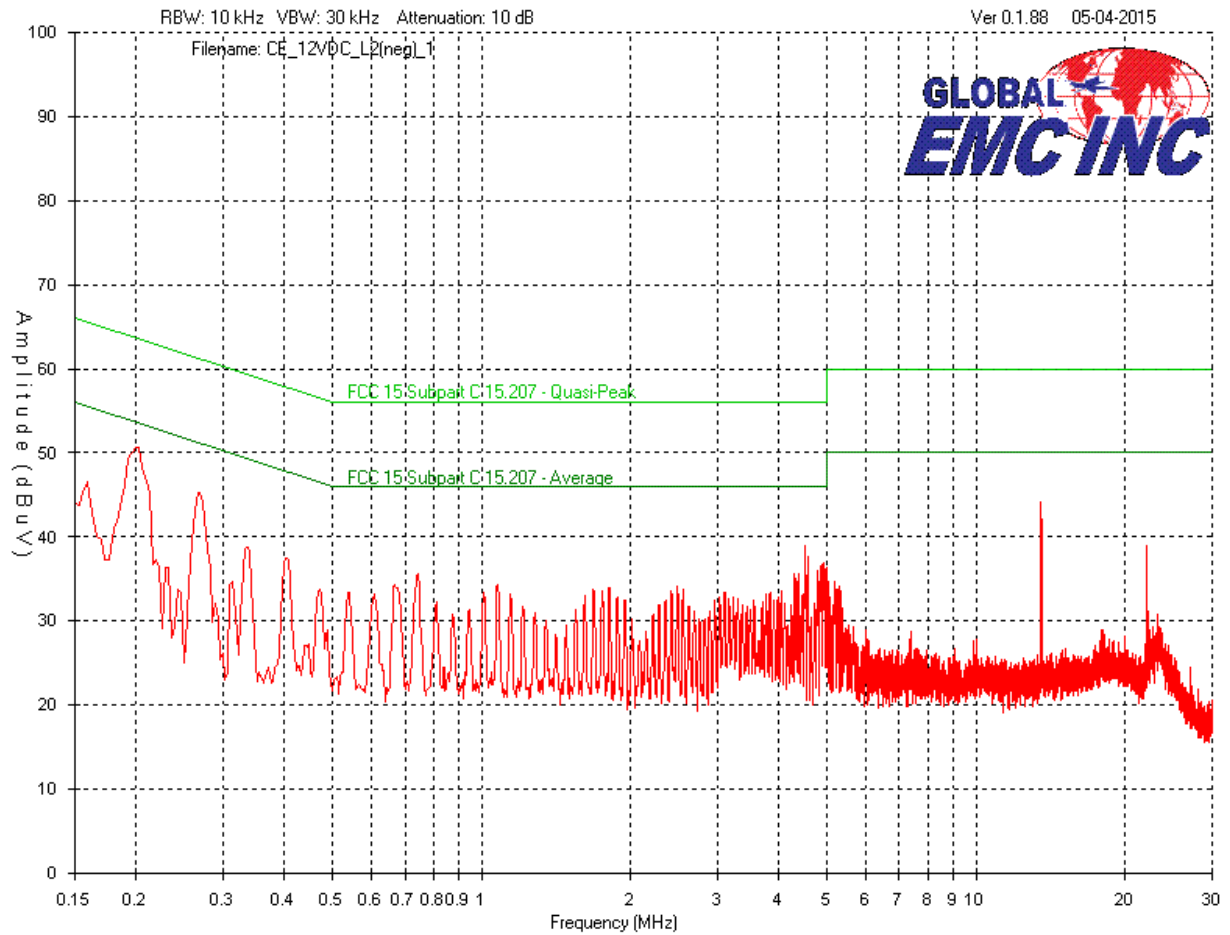

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Final Measurements

Emissions Table 12 V_{DC}

Test Frequency (MHz)	Detector	Received signal (dBμV)	Attenuator (dB)	Cable loss (dB)	LISN factor (dB)	Emission Level (dBμV)	Quasi-Peak Emission limit (dBμV)	Average Emission limit (dBμV)	Quasi-Peak Margin (dB)	Average Margin (dB)	Result
Phase Line											
0.326	Peak	45.4	10	0.1	0	55.5	59.5	---	4	---	Pass
0.326	Avg.	32.88	10	0.1	0	42.98	---	49.5	---	6.52	Pass
0.419	Peak	43	10	0.1	0	53.1	57.5	---	4.4	----	Pass
0.419	Avg.	26.82	10	0.1	0	36.92	---	47.5	---	10.58	Pass
0.459	Peak	37.9	10	0.1	0	48	56.7	---	8.7	---	Pass
0.459	Avg.	26.41	10	0.1	0	36.51	---	46.7	---	10.19	Pass
0.200	Peak	41.9	10	0.1	0	52	63.6	53.6	11.6	1.6	Pass
1.58	Peak	32.9	10	0.1	0	43	56	46	13	3	Pass
0.991	Peak	32	10	0.1	0	42.1	56	46	13.9	3.9	Pass
Neutral Line											
0.200	Peak	40.6	10	0.1	0	50.7	63.6	53.6	12.9	2.9	Pass
13.56	Peak	34	10	0.2	0.1	44.3	60	50	15.7	5.7	Pass
0.270	Peak	35.2	10	0.1	0	45.3	61.1	51.1	15.8	5.8	Pass
4.51	Peak	28.9	10	0.1	0	39	56	46	17	7	Pass
4.57	Peak	27.5	10	0.1	0	37.6	56	46	18.4	8.4	Pass
0.160	Peak	36.5	10	0.1	0	46.6	65.5	55.5	18.9	8.9	Pass

See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	ESL 6	Rohde & Schwarz	Nov. 15, 2013	Nov. 15, 2015	GEMC 160
LISN	FCC-LISN-50/250-16-2-01	FCC	Jan. 15, 2015	Jan. 15, 2017	GEMC 65
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
Attenuator 10 dB	FP-50-10	Trilithic	NCR	NCR	GEMC 42

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Appendix A – EUT Summary

For further details for filing purposes, refer to filing package.

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

General EUT Description

Client Details	
Organization / Address	Crane Payment Innovations 2720 Steeles Ave W., Concord, Ontario L4K 4S3, Canada
Contact	Nigel Scotland
Phone	905 303 8874 x2511
Email	nigel.scotland@cranepi.com
EUT (Equipment Under Test) Details	
EUT Name	CashCode One
EUT Model	FLST0310
Software version	FLS-RF20-012636
Input voltage range(s) (V)	12VDC
Rated input current (A)	Max 2A at 12VDC
Nominal power consumption (W)	Max 24W
Transmitted frequency range(s).	13.56 MHz
Basic EUT functionality description	Bill validator
Modes of operation	The device will run continuously with a specific test program installed to have the device continuously transmitting. The EUT will have the modulation running continuously with the RFID on continuously.
Setup instructions	The device will run standalone with a 12VDC power source
Frequency of all clocks present in EUT	18.432 MHz, 7.3728 MHz, 19.6608 MHz
Peripherals required to exercise EUT	None, the EUT will run continuously in a standalone test mode.
Dimensions of product	Depth 235mm, Width 115mm, Height 300mm

Note:


The EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. See 'Appendix B – EUT & Test Setup Photographs' for pictures.

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

Appendix B – EUT and Test Setup Photographs

Note: These photos are for information purposes only.
Also refer to .PDF files separate from this test report.

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	

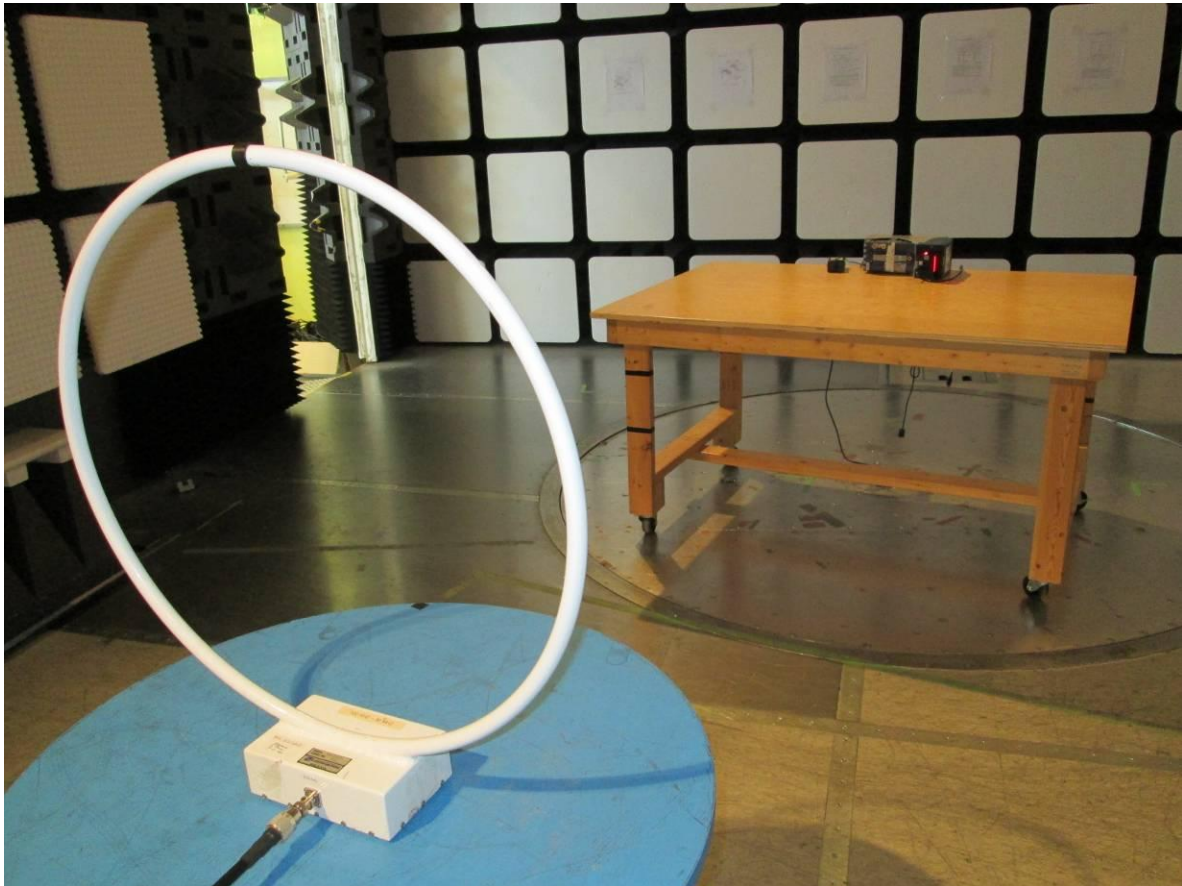

Radiated emissions, 9 kHz – 30 MHz

Client	Crane Payment Innovations	
Product	CashCode One	
Standard(s)	RSS 210 Issue 8:2010 / FCC Part 15 Subpart C 15:2015	



Radiated emissions, 30 MHz – 1 GHz