


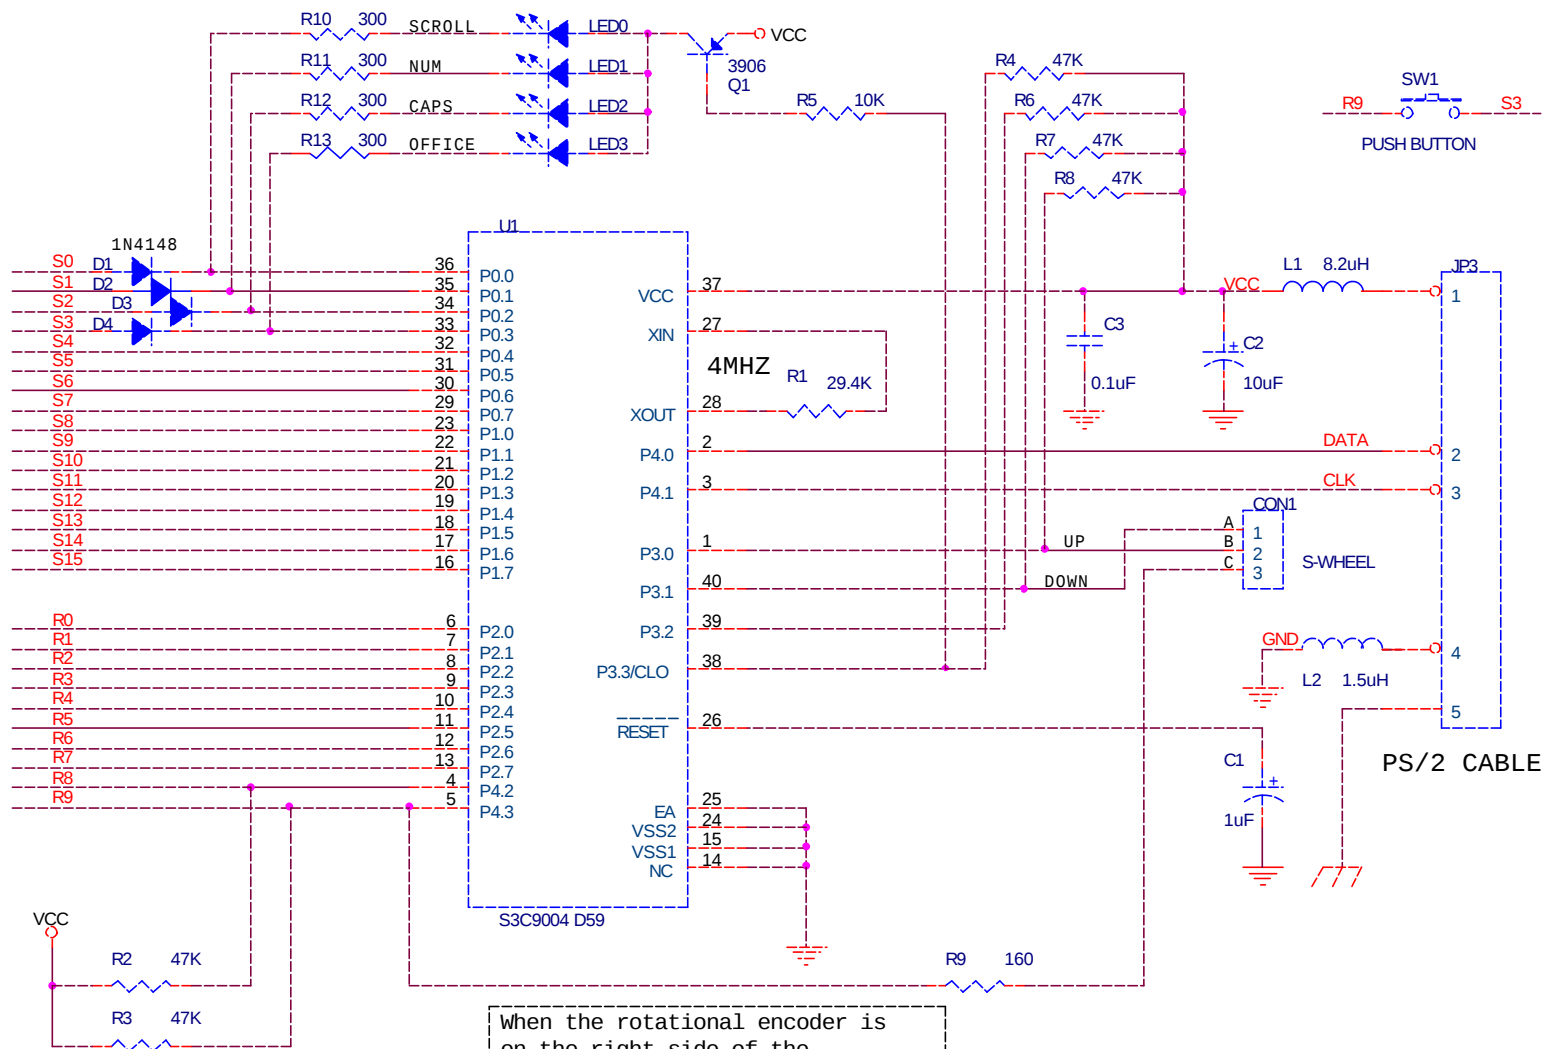

NOTE:

1.R1 IS METAL RESISTOR(1%)


2.ALL I/O PIN Same as Samsung KS86C0004

OTP chip :

PINS USED TO READ/WRITE THE EPROM

37-->VDD 36-->SCLK 35-->SDAT
26-->RESET 24-->VPP 15-->VSS

When the rotational encoder is on the right side of the scroll wheel PCB, the figure is as below.

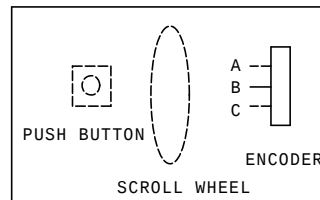

Title		
8190A PS/2 K/B		
Size	Document Number	Rev
A	<Doc>	
Date:	Saturday, June 01, 2002	Sheet 1 of 1