



## TEST REPORT

**Application No.:** GZCR2208001095AT  
**Applicant:** SZ DJI TECHNOLOGY CO., LTD.  
**Address of Applicant:** 14th floor, West Wing, Skyworth Semiconductor Design Building NO.18  
Gaoxin South 4th Ave, Nanshan District, Shenzhen, Guangdong, China  
**Manufacturer:** SZ DJI TECHNOLOGY CO., LTD.  
**Address of Manufacturer:** 14th floor, West Wing, Skyworth Semiconductor Design Building NO.18  
Gaoxin South 4th Ave, Nanshan District, Shenzhen, Guangdong, China  
**Equipment Under Test (EUT):**  
**EUT Name:** DJI Mavic 3 Classic  
**Model No.:** L2C  
**Trade Mark:** DJI  
**Standard(s) :** 47 CFR Part 15, Subpart E 15.407  
**Date of Receipt:** 2022-08-29  
**Date of Test:** 2022-08-30 to 2022-09-05  
**Date of Issue:** 2022-09-07

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian  
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
**Attention:** To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No. 198 Kexu Road, Solentech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn  
Guangzhou Branch Testing Services EMC Laboratory. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Revision Record			
Version	Report No.	Date	Remark
01		2022-09-07	Original

Authorized for issue by			
			
		Curry Wu/Project Engineer	
			
		Ricky Liu/Reviewer	

## 2 Test Summary

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Maximum Conducted output power		KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Radiated Emissions (below 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass

**Note:**

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

**Remark:**

This test report (Ref. No.: GZCR220800109503) is only valid with the original test report (Ref. No.: GZCR210802082903).

According to the declaration from the applicant, L2C have the same technical construction including electrical construction and mechanical construction with L2A. The difference lies only the model number and some minor circuit and component, as follows:

1. The two cameras have been reduced to one, and the corresponding lens versions have also been changed.
2. The filter of 2.4G SDR is changed from qorvo885136 to RSFP2421E, which is a pin to pin replacement, but the RF parameters remain unchanged, and other RF circuits and RF chips remain unchanged.
3. In order to optimize the PCB size, the circuit diagram and the PCB layout have been adjusted to deleted some unused H-bridge drive ICs, peripheral circuits and unused interfaces.
4. L2C enables SRD (5170-5250) MHz through software, but this frequency band is not enabled on L2A.
5. Enabled Galileo receiver function through software

Therefore in this report test items of section 2 were fully retested on model and shown the data in this report, other tests please refer to original test report GZCR210802082903.

### 3 Contents

	Page
<b>1 Cover Page .....</b>	<b>1</b>
<b>2 Test Summary.....</b>	<b>3</b>
<b>3 Contents .....</b>	<b>4</b>
<b>4 General Information.....</b>	<b>5</b>
4.1 Details of E.U.T. ....	5
4.2 Description of Support Units.....	5
4.3 Measurement Uncertainty .....	5
4.4 Test Location .....	6
4.5 Test Facility.....	6
4.6 Deviation from Standards.....	7
4.7 Abnormalities from Standard Conditions.....	7
<b>5 Equipment List .....</b>	<b>8</b>
<b>6 Radio Spectrum Technical Requirement.....</b>	<b>9</b>
6.1 Maximum Conducted output power .....	9
6.1.1 E.U.T. Operation .....	9
6.1.2 Test Mode Description .....	9
6.1.3 Test Setup Diagram .....	10
6.1.4 Measurement Procedure and Data.....	10
6.2 Radiated Emissions (below 1GHz) .....	11
6.2.1 E.U.T. Operation.....	12
6.2.2 Test Mode Description .....	12
6.2.3 Test Setup Diagram .....	12
6.2.4 Measurement Procedure and Data.....	13
<b>7 Test Setup Photo .....</b>	<b>17</b>
<b>8 EUT Constructional Details (EUT Photos).....</b>	<b>17</b>
<b>9 Appendix.....</b>	<b>18</b>



## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	Input: DC 15.4V DC 15.4V 5000mAh, 77Wh Lithium-ion rechargeable battery(to be charged from Type C port), Model: BWX260-5000-15.4
Antenna Type:	PCB Antenna
Antenna Gain:	Antenna 0&1: 2.0dBi

Operation Frequency:	Band	Mode	Frequency Range(MHz)	Number of channels
	UNII Band III	802.11a/n(HT20)/ac(VHT20)/ax(HEW20)	5745-5825	5
		802.11n(HT40)/ac(VHT40)/ax(HEW40)	5755-5795	2
		802.11ac(VHT80)/ax(HEW80)	5775	1
Modulation Type:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDM&OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)			
Channel Spacing:	802.11a/n(HT20)/ac(VHT20)/ax(HEW20) : 20MHz 802.11n(HT40)/ac(VHT40)/ax(HEW40) : 40MHz 802.11ac(VHT80)/ax(HEW80) : 80MHz			

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
AC/DC Adapter	DJI	PD-65US	N/A

### 4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Maximum Conducted output power	$\pm 0.75\text{dB}$
Radiated Emissions (below 1GHz)	$\pm 5.00\text{dB}$ (30MHz-1GHz; 3m); $\pm 4.38\text{dB}$ (30MHz-1GHz; 10m);
Remark: The $U_{\text{lab}}$ (lab Uncertainty) is less than $U_{\text{CISPR}}$ (CISPR Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.	

#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,  
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,  
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

## 5 Equipment List

Maximum Conducted output power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2022-03-03	2023-03-02
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2022-03-03	2023-03-02
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2022-06-21	2023-06-20
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2022-05-16	2023-05-15
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2022-05-16	2023-05-15
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2021-09-16	2022-09-15
6dB Attenuator	HP	8491A	EMC2062	2022-03-29	2023-03-28
MI CABLE	SGS-EMC	0.8M	EMC2136	2021-11-01	2023-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2021-11-01	2023-11-01
Test Software	TST	V2.0	GZE100-78	N/A	N/A

Radiated Emissions (below 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Chamber cable	HangTianXing	N/A	EMC0542	2020-09-09	2022-09-08
Trilog Broadband Antenna(25MHz-1GHz)-Lab	SCHWARZBECK MESS-ELEKTRONIK	VULB 9168	SEM003-18	2022-02-22	2025-02-21
Amplifier(9kHz-1.3GHz)	HP	8447F	EMC2065	2022-06-21	2023-06-20
Active Loop Antenna-RED	ETS-Lindgren	6502	EMC2190	2022-04-06	2024-04-05
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2019-10-20	2022-10-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
EMI Test Receiver(1Hz-8GHz)	Rohde & Schwarz	ESW8	EMC2220	2022-05-20	2023-05-19

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2022-06-24	2023-06-23
DMM	Fluke	73	EMC0007	2022-06-24	2023-06-23



## 6 Radio Spectrum Technical Requirement

### 6.1 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) for client device or 11dBm+10logB*
5470-5725	≤250mW(24dBm) for client device or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	<p>* Where B is the 26dB emission bandwidth in MHz.</p> <p>The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p>

#### 6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 21.8 °C Humidity: 52.3 % RH Atmospheric Pressure: 1003 mbar


#### 6.1.2 Test Mode Description

Pre-scan / Mode  
Final test Code Description

TX mode (U-NII-3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.

Final test 20

### 6.1.3 Test Setup Diagram

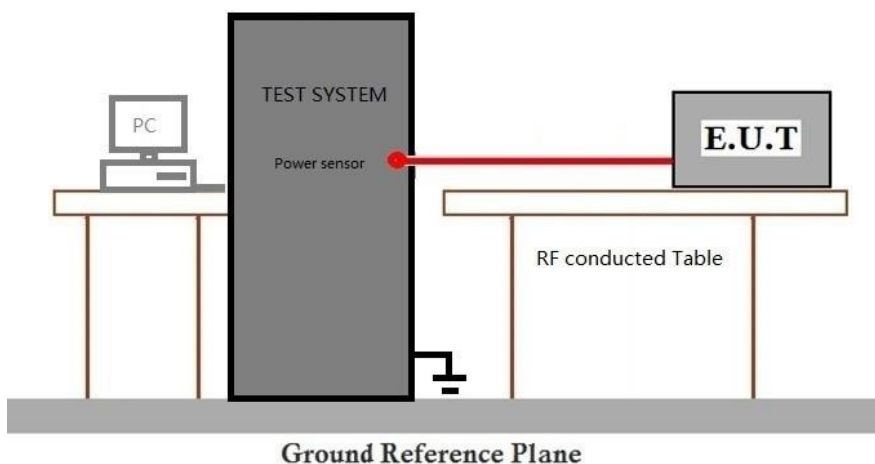

### 6.1.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 6.2 Radiated Emissions (below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 10m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

\*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.4 °C Humidity: 51.9 % RH Atmospheric Pressure: 1003 mbar


### 6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
--------------------------	--------------	-------------

Pre-scan	20	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
----------	----	---

Final test	21	Charge + TX mode (U-NII-3)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE80). Only the data of worst case is recorded in the report.
------------	----	---

### 6.2.3 Test Setup Diagram

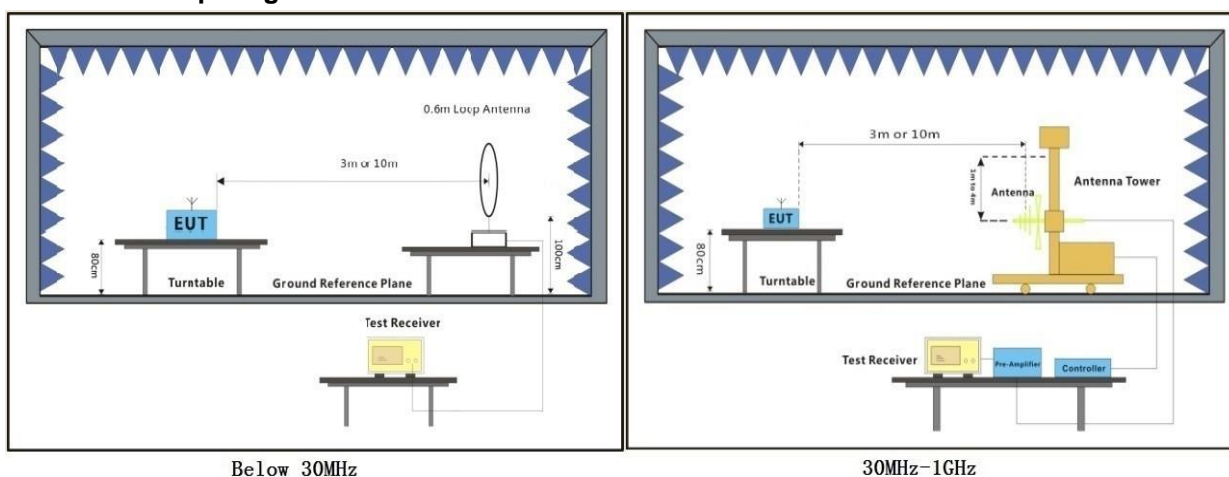

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn  
Guangzhou branch Testing Service EMC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

#### 6.2.4 Measurement Procedure and Data

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 1GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)


Test Mode: 21; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel: Low

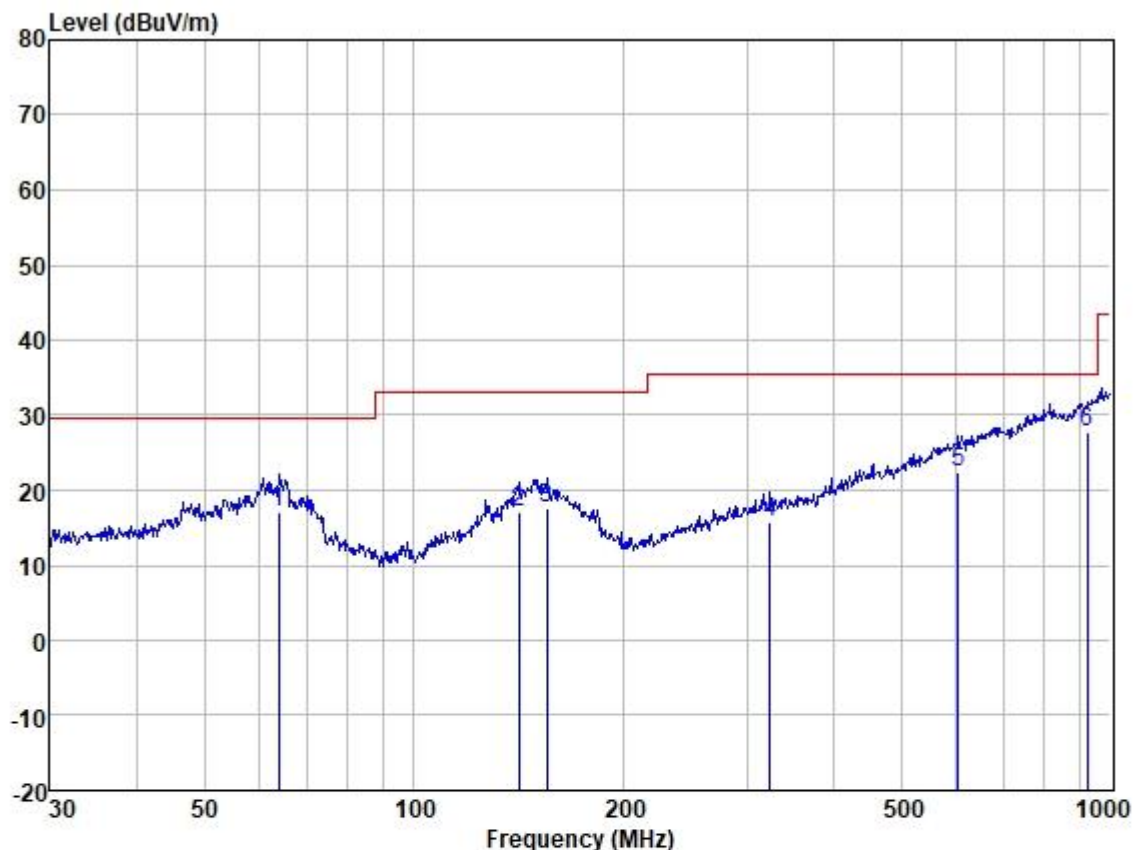

Site : SGS  
Job :  
Model :  
Power :  
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	63.983	30.63	12.76	1.32	27.60	17.11	29.50	-12.39	HORIZONTAL	QP
2	141.330	29.24	13.11	2.11	27.45	17.01	33.10	-16.09	HORIZONTAL	QP
3	154.821	29.04	13.59	2.27	27.37	17.53	33.10	-15.57	HORIZONTAL	QP
4	324.456	25.62	14.14	3.38	27.34	15.80	35.60	-19.80	HORIZONTAL	QP
5	603.539	25.90	20.18	5.02	28.80	22.30	35.60	-13.30	HORIZONTAL	QP
6	925.756	25.94	23.50	6.55	28.16	27.83	35.60	-7.77	HORIZONTAL	QP

Test Mode: 21; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel: Low

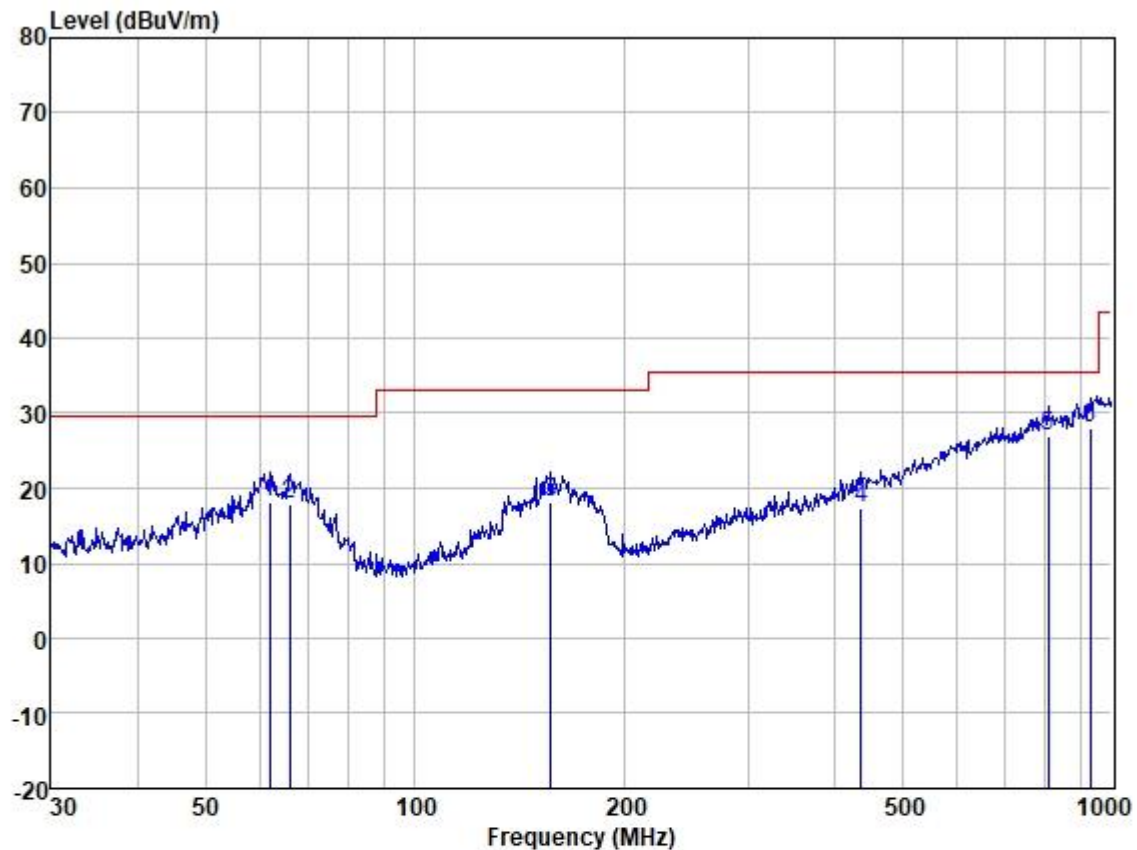

Site : SGS  
Job :  
Model :  
Power :  
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	61.778	31.42	13.06	1.28	27.60	18.16	29.50	-11.34	VERTICAL	QP
2	66.034	31.77	12.41	1.36	27.60	17.94	29.50	-11.56	VERTICAL	QP
3	156.458	29.68	13.61	2.28	27.37	18.20	33.10	-14.90	VERTICAL	QP
4	437.120	24.59	16.70	4.11	28.19	17.21	35.60	-18.39	VERTICAL	QP
5	810.265	26.09	23.21	6.07	28.57	26.80	35.60	-8.80	VERTICAL	QP
6	932.272	25.83	23.67	6.62	28.14	27.98	35.60	-7.62	VERTICAL	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

L<sub>3</sub>: Level @ 3m distance. Unit: uV/m;

L<sub>10</sub>: Level @ 10m distance. Unit: uV/m;

D<sub>3</sub>: 3m distance. Unit: m

D<sub>10</sub>: 10m distance. Unit: m

The level at 3m test distance is below:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
63.983	17.11	7.17	23.90	27.57	40	-12.43	H
141.330	17.01	7.09	23.63	27.47	43.5	-16.03	H
154.821	17.53	7.52	25.08	27.99	43.5	-15.51	H
324.456	15.80	6.17	20.55	26.26	46	-19.74	H
603.539	22.30	13.03	43.44	32.76	46	-13.24	H
925.756	27.83	24.63	82.11	38.29	46	-7.71	H
61.778	18.16	8.09	26.97	28.62	40	-11.38	V
66.034	17.94	7.89	26.30	28.40	40	-11.60	V
156.458	18.20	8.13	27.09	28.66	43.5	-14.84	V
437.120	17.21	7.25	24.18	27.67	46	-18.33	V
810.265	26.80	21.88	72.93	37.26	46	-8.74	V
932.272	27.98	25.06	83.54	38.44	46	-7.56	V

## 7 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZCR2208001095AT

## 8 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for GZCR2208001095AT

## 9 Appendix

### 1. Maximum Conducted Output Power

#### 1.1 Power

##### 1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	RU	RU Pos	Measured AV Output Power (dBm)				Verdict
					Ant0	Ant1	Sum	Limit	
802.11a	SISO	5745	/	/	16.21	15.35	/	<=30	Pass
		5785	/	/	16.00	15.38	/	<=30	Pass
		5825	/	/	16.04	16.02	/	<=30	Pass
802.11n (HT20)	MIMO	5745	/	/	16.34	14.32	18.46	<=30	Pass
		5785	/	/	16.11	14.36	18.33	<=30	Pass
		5825	/	/	16.42	14.30	18.50	<=30	Pass
802.11n (HT40)	MIMO	5755	/	/	16.26	14.44	18.45	<=30	Pass
		5795	/	/	16.31	15.03	18.73	<=30	Pass
802.11ac (VHT20)	MIMO	5745	/	/	16.01	13.66	18.00	<=30	Pass
		5785	/	/	16.22	13.95	18.24	<=30	Pass
		5825	/	/	16.12	14.10	18.24	<=30	Pass
802.11ac (VHT40)	MIMO	5755	/	/	16.10	14.70	18.47	<=30	Pass
		5795	/	/	16.23	14.76	18.57	<=30	Pass
802.11ac (VHT80)	MIMO	5775	/	/	16.14	14.73	18.50	<=30	Pass
802.11ax (HEW20)	MIMO	5745	RU242	Left	16.08	14.35	18.31	<=30	Pass
		5785	RU242	Left	16.57	14.27	18.58	<=30	Pass
		5825	RU242	Left	16.80	14.57	18.84	<=30	Pass
802.11ax (HEW40)	MIMO	5755	RU484	Left	16.61	14.70	18.77	<=30	Pass
		5795	RU484	Left	16.46	15.04	18.82	<=30	Pass
802.11ax (HEW80)	MIMO	5775	RU996	Left	16.13	14.77	18.51	<=30	Pass
Note1: Antenna Gain: Ant0: 2.00dBi; Ant1: 2.00dBi;									
Note2: Directional Gain=G <sub>Ant</sub> +10log (N <sub>Ant</sub> ) dBi = 2.00+10log (2) dBi = 5.01dBi.									

- End of the Report -