

Report No.: TW2203419-05E File reference No.: 2022-05-17

Applicant: Hangzhou Roombanker Technology Co., Ltd

Product: Outdoor LoraWAN Gateway

Model No.: DSGW-010C

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Terry Tong

Terry Tang

Manager

Dated: May 17, 2022


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Date: 2022-05-17



Page 2 of 51

# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

## FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

## Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

#### **A2LA** (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 51

Report No.: TW2203419-05E

Date: 2022-05-17



## **Test Report Conclusion**

## Content

| 1.0  | General Details                     | 4  |
|------|-------------------------------------|----|
| 1.1  | Test Lab Details.                   | 4  |
| 1.2  | Applicant Details                   | 4  |
| 1.3  | Description of EUT                  | 4  |
| 1.4  | Submitted Sample.                   | 4  |
| 1.5  | Test Duration.                      | 4  |
| 1.6  | Test Uncertainty.                   | 4  |
| 1.7  | Test By                             | 5  |
| 2.0  | List of Measurement Equipment       | 6  |
| 3.0  | Technical Details                   | 7  |
| 3.1  | Summary of Test Results.            | 7  |
| 3.2  | Test Standards.                     | 7  |
| 4.0  | EUT Modification.                   | 7  |
| 5.0  | Power Line Conducted Emission Test. | 8  |
| 5.1  | Schematics of the Test.             | 8  |
| 5.2  | Test Method and Test Procedure.     | 8  |
| 5.3  | Configuration of the EUT.           | 8  |
| 5.4  | EUT Operating Condition.            | 9  |
| 5.5  | Conducted Emission Limit.           | 9  |
| 5.6  | Test Result.                        | 9  |
| 6.0  | Radiated Emission test.             | 12 |
| 6.1  | Test Method and Test Procedure.     | 12 |
| 6.2  | Configuration of the EUT            | 13 |
| 6.3  | EUT Operation Condition.            | 13 |
| 6.4  | Radiated Emission Limit.            | 13 |
| 7.0  | 20dB Bandwidth                      | 28 |
| 8.0  | Maximum Output Power.               | 32 |
| 9.0  | Carrier Frequency Separation.       | 34 |
| 10.0 | Number of Hopping Channel.          | 36 |
| 11.0 | Time of Occupancy (Dwell Time).     | 38 |
| 12.0 | Out of Band Measurement.            | 42 |
| 13.0 | Antenna Requirement.                | 48 |
| 14.0 | FCC ID Label.                       | 49 |
| 15.0 | Photo of Test Setup and EUT View.   | 50 |

Date: 2022-05-17



Page 4 of 51

#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

## 1.2 Applicant Details

Applicant: Hangzhou Roombanker Technology Co., Ltd Address: A#801 Wantong center, Hangzhou, China

Telephone: +86-18768289112

Fax: --

#### 1.3 Description of EUT

Product: Outdoor LoraWAN Gateway

Manufacturer: Hangzhou Roombanker Technology Co., Ltd Address: A#801 Wantong center, Hangzhou, China

Trademark: N/A

Model Number: DSGW-010C Additional Model Number: N/A

Hardware Version: V0.1 Software Version: V0.1

Modulation Technique LoRa/Chirp Spread Spectrum

Frequency range 902.3-914.9MHz

Channel Spacing 0.2MHz
Frequency Selection By software
Channel Number 64 channels

Antenna: External Antenna with Reverse polarity N connector used. The gain of the antennas

is 1.1dBi (Declared by the manufacturer)

Rating: DC48V, 0.32A

Power Supply: Model: RP028-4800320Z

Input: 100-240V~, 50/60Hz, 0.6A Max; Output: 48V, 0.32A, 15.36W

#### 1.4 Submitted Sample: 1 Samples

#### 1.5 Test Duration

2022-03-28 to 2022-05-17

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2022-05-17



Page 5 of 51

#### 1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 51

Report No.: TW2203419-05E

Date: 2022-05-17



| 2.0 Test Equipment |              |                      |              |              |            |
|--------------------|--------------|----------------------|--------------|--------------|------------|
| Instrument Type    | Manufacturer | Model                | Serial No.   | Date of Cal. | Due Date   |
| ESPI Test Receiver | R&S          | ESPI 3               | 100379       | 2021-06-18   | 2022-06-17 |
| TWO Line-V-NETW    | R&S          | EZH3-Z5              | 100294       | 2021-06-18   | 2022-06-17 |
| TWO<br>Line-V-NETW | R&S          | EZH3-Z5              | 100253       | 2021-06-18   | 2022-06-17 |
| Impuls-Begrenzer   | R&S          | ESH3-Z2              | 100281       | 2021-06-18   | 2022-06-17 |
| Loop Antenna       | EMCO         | 6507                 | 00078608     | 2021-06-18   | 2022-06-17 |
| Spectrum           | R&S          | FSIQ26               | 100292       | 2021-06-18   | 2022-06-17 |
| Horn Antenna       | A-INFO       | LB-180400-KF         | J211060660   | 2021-06-18   | 2022-06-17 |
| Horn Antenna       | R&S          | BBHA 9120D           | 9120D-631    | 2021-07-02   | 2024-07-01 |
| Power meter        | Anritsu      | ML2487A              | 6K00003613   | 2021-06-18   | 2022-06-17 |
| Power sensor       | Anritsu      | MA2491A              | 32263        | 2021-06-18   | 2022-06-17 |
| Bilog Antenna      | Schwarebeck  | VULB9163             | 9163/340     | 2021-07-02   | 2024-07-01 |
| 9*6*6 Anechoic     |              |                      | N/A          | 2021-07-02   | 2024-07-01 |
| EMI Test Receiver  | RS           | ESVB                 | 826156/011   | 2021-06-18   | 2022-06-17 |
| EMI Test Receiver  | RS           | ESH3                 | 860904/006   | 2021-06-18   | 2022-06-17 |
| Spectrum           | HP/Agilent   | ESA-L1500A           | US37451154   | 2021-06-18   | 2022-06-17 |
| Spectrum           | HP/Agilent   | E4407B               | MY50441392   | 2021-06-18   | 2022-06-17 |
| Spectrum           | RS           | FSP                  | 1164.4391.38 | 2022-01-14   | 2023-01-13 |
| RF Cable           | Zhengdi      | ZT26-NJ-NJ-8M/F<br>A |              | 2021-06-18   | 2022-06-17 |
| RF Cable           | Zhengdi      | 7m                   |              | 2021-06-18   | 2022-06-17 |
| RF Switch          | EM           | EMSW18               | 060391       | 2021-06-18   | 2022-06-17 |
| Pre-Amplifier      | Schwarebeck  | BBV9743              | #218         | 2021-06-18   | 2022-06-17 |
| Pre-Amplifier      | HP/Agilent   | 8449B                | 3008A00160   | 2021-06-18   | 2022-06-17 |
| LISN               | SCHAFFNER    | NNB42                | 00012        | 2022-01-05   | 2023-01-04 |

#### 2.2 Automation Test Software

#### For Conducted Emission Test

| Tor Conducted Emission Test                     |                   |
|---|-------------------|
| Name  | Version           |
| EZ-EMC  | Ver.EMC-CON 3A1.1 |
| For Radiated Emissions                          |                   |
| Name  | Version           |
| EMI Test Software BL410-EV18.91                 | V18.905           |
| EMI Test Software BL410-EV18.806 High Frequency | V18.06            |

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 7 of 51

Report No.: TW2203419-05E

Date: 2022-05-17



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

| Requirement   | CFR 47 Section                            | Result | Notes    |
|---|---|--------|----------|
| Antenna Requirement                                   | 15.203, 15.247(b)(4)                      | Pass   | Complies |
| Maximum Peak Out Power                                | 15.247 (b)(2), (4)                        | Pass   | Complies |
| Carrier Frequency Separation                          | 15.247(a)(1)(i)                           | Pass   | Complies |
| 20dB Channel Bandwidth                                | 15.247(a)(1)(i)                           | Pass   | Complies |
| Number of Hopping Channels                            | 15.247(a)(1)(i)                           | Pass   | Complies |
| Time of Occupancy (Dwell Time)                        | 15.247(a)(1)(i)                           | Pass   | Complies |
| Spurious Emission, Band Edge, and<br>Restricted bands | 15.247(d),15.205(a),<br>15.209 (a),15.109 | Pass   | Complies |
| Conducted Emissions                                   | 15.207(a), 15.107                         | Pass   | Complies |
| RF Exposure   | 15.247(i), 1.1307(b)(1)                   | Pass   | Complies |

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

#### 4.0 **EUT Modification**


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Date: 2022-05-17



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

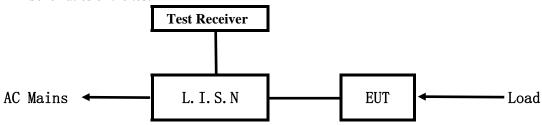


EUT: Equipment Under Test

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

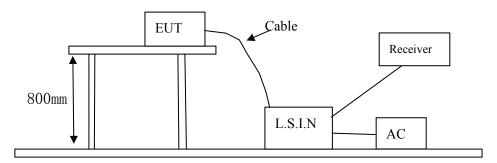

## 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

#### A. EUT

| Device                        | Manufacturer                            | Model                      | FCC ID         |
|-------------------------------|---|----------------------------|----------------|
| Outdoor<br>LoraWAN<br>Gateway | Hangzhou Roombanker Technology Co., Ltd | DSGW-010C,<br>DSGW-010C-US | 2AUXBDSGW-010C |

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2203419-05E Page 9 of 51

Date: 2022-05-17



#### B. Internal Device

| Device | Manufacturer | Model | Rating |
|--------|--------------|-------|--------|
|        |              |       |        |

## C. Peripherals

| Device | Manufacturer | Model | Rating |
|--------|--------------|-------|--------|
| N/A    |              |       |        |

# 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

#### 5.5 Power line conducted Emission Limit according to Paragraph 15.207

| Frequency        | Limits (dB $\mu$ V) |               |  |  |  |
|------------------|---------------------|---------------|--|--|--|
| (MHz)            | Quasi-peak Level    | Average Level |  |  |  |
| $0.15 \sim 0.50$ | 66.0~56.0*          | 56.0~46.0*    |  |  |  |
| $0.50 \sim 5.00$ | 56.0                | 46.0          |  |  |  |
| 5.00 ~ 30.00     | 60.0                | 50.0          |  |  |  |

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2022-05-17



## A: Conducted Emission on Live Terminal (150kHz to 30MHz)


## **EUT Operating Environment**

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keep Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

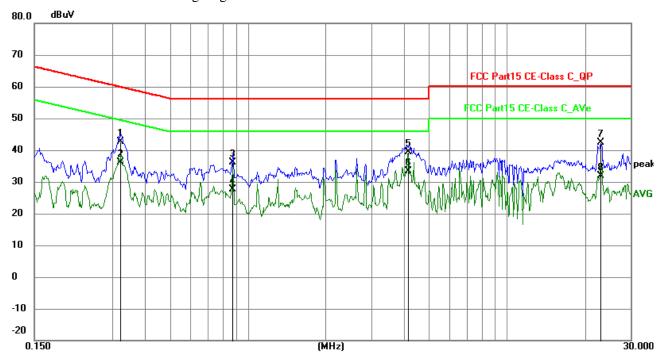

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1   | 0.3215             | 32.99             | 9.76           | 42.75           | 59.67           | -16.92         | QP       | Р   |
| 2   | 0.3215             | 26.49             | 9.76           | 36.25           | 49.67           | -13.42         | AVG      | Р   |
| 3   | 0.8754             | 26.38             | 9.79           | 36.17           | 56.00           | -19.83         | QP       | Р   |
| 4   | 0.8754             | 17.84             | 9.79           | 27.63           | 46.00           | -18.37         | AVG      | Р   |
| 5   | 4.1544             | 29.46             | 9.89           | 39.35           | 56.00           | -16.65         | QP       | Р   |
| 6   | 4.1544             | 23.47             | 9.89           | 33.36           | 46.00           | -12.64         | AVG      | Р   |
| 7   | 22.9602            | 31.64             | 10.86          | 42.50           | 60.00           | -17.50         | QP       | Р   |
| 8   | 22.9602            | 21.09             | 10.86          | 31.95           | 50.00           | -18.05         | AVG      | Р   |

Date: 2022-05-17



## B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keep Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

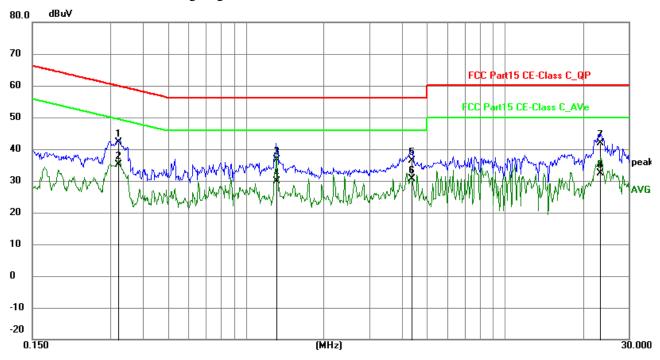

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1   | 0.3215             | 32.45             | 9.76           | 42.21           | 59.67           | -17.46         | QP       | Р   |
| 2   | 0.3215             | 25.49             | 9.76           | 35.25           | 49.67           | -14.42         | AVG      | Р   |
| 3   | 1.3122             | 26.84             | 9.79           | 36.63           | 56.00           | -19.37         | QP<br>Q  | Р   |
| 4   | 1.3122             | 20.16             | 9.79           | 29.95           | 46.00           | -16.05         | AVG      | Р   |
| 5   | 4.3767             | 26.38             | 9.90           | 36.28           | 56.00           | -19.72         | QP       | П   |
| 6   | 4.3767             | 20.85             | 9.90           | 30.75           | 46.00           | -15.25         | AVG      | П   |
| 7   | 23.3814            | 30.96             | 10.89          | 41.85           | 60.00           | -18.15         | Q<br>Q   | Р   |
| 8   | 23.3814            | 21.46             | 10.89          | 32.35           | 50.00           | -17.65         | AVG      | Р   |

Report No.: TW2203419-05E Page 12 of 51

Date: 2022-05-17




#### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 10GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**


For radiated emissions from 9kHz to 30MHz

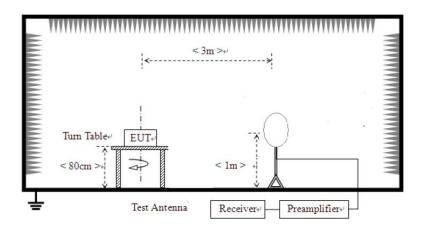


Date: 2022-05-17



#### For radiated emissions from 30MHz to1GHz

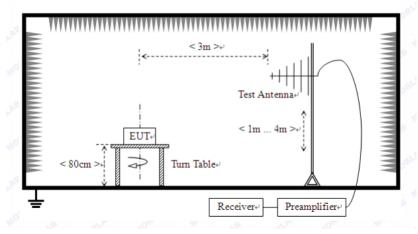

#### For radiated emissions above 1GHz

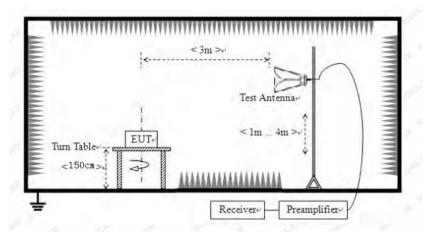

# 6.2 Configuration of The EUT Same as section 5.3 of this report

# 6.3 EUT Operating Condition Same as section 5.4 of this report.

## 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2203419-05E Page 14 of 51

Date: 2022-05-17



#### Frequencies in restricted band are complied to limit on Paragraph 15.209

|                       |              | ~ <u>.</u>                        |
|-----------------------|--------------|-----------------------------------|
| Frequency Range (MHz) | Distance (m) | Field strength (dB $\mu$ V/m)     |
| 0.009-0.490           | 3            | 20log(2400/F(kHz)) +40log (300/3) |
| 0.490-1.705           | 3            | 20log(24000/F(kHz)) +40log (30/3) |
| 1.705-30              | 3            | 69.5                              |
| 30-88                 | 3            | 40.0                              |
| 88-216                | 3            | 43.5                              |
| 216-960               | 3            | 46.0                              |
| Above 960             | 3            | 54.0                              |

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-10G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.

Date: 2022-05-17



Page 15 of 51

#### Test result

## General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

**Results: Pass** 


Page 16 of 51

Report No.: TW2203419-05E

Date: 2022-05-17



## Test Figure for Low channel (902.3MHz)

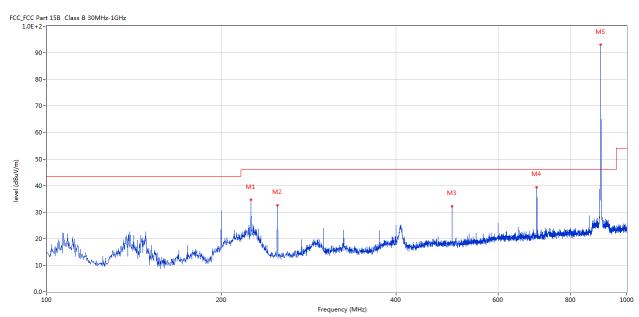


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 224.844   | 34.60    | -12.94 | 46.0     | -11.40     | Peak     | 71.00  | 100    | Horizontal | Pass    |
| 2   | 250.037   | 32.60    | -12.07 | 46.0     | -13.40     | Peak     | 98.00  | 100    | Horizontal | Pass    |
| 3   | 499.950   | 32.20    | -6.90  | 46.0     | -13.80     | Peak     | 324.00 | 100    | Horizontal | Pass    |
| 4   | 699.925   | 39.37    | -4.19  | 46.0     | -6.63      | Peak     | 280.00 | 100    | Horizontal | Pass    |
| 5   | 902.374   | 92.95    | -1.97  | 46.0     | 46.95      | Peak     | 287.00 | 100    | Horizontal | N/A     |

Page 17 of 51 Report No.: TW2203419-05E

Date: 2022-05-17



## Test Figure for Low channel (902.3MHz)

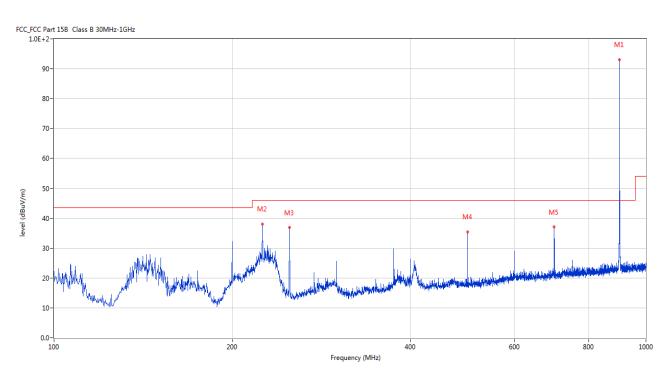

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |          |         |
| 1   | 902.374   | 92.97    | -1.97  | 46.0     | 46.97      | Peak     | 44.00     | 100    | Vertical | N/A     |
| 2   | 225.069   | 38.08    | -12.92 | 46.0     | -7.92      | Peak     | 95.00     | 100    | Vertical | Pass    |
| 3   | 250.037   | 36.89    | -12.07 | 46.0     | -9.11      | Peak     | 213.00    | 100    | Vertical | Pass    |
| 4   | 499.950   | 35.47    | -6.90  | 46.0     | -10.53     | Peak     | 321.00    | 100    | Vertical | Pass    |
| 5   | 699.925   | 37.03    | -4.19  | 46.0     | -8.97      | Peak     | 71.00     | 100    | Vertical | Pass    |


Page 18 of 51

Report No.: TW2203419-05E

Date: 2022-05-17



## Test Figure for Middle channel (908.7MHz)

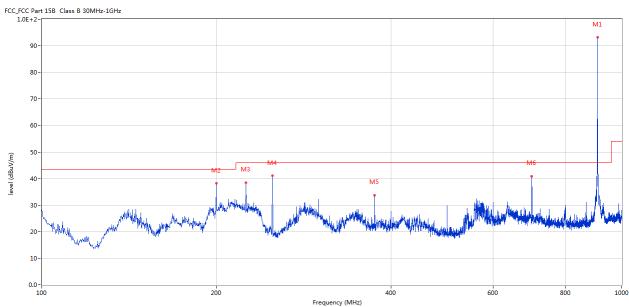

| No. | Frequency | Results  | Factor | Limit    | Over       | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | Limit (dB) |          | (o)    | (cm)   |            |         |
| 1   | 908.673   | 93.13    | -1.76  | 46.0     | 47.13      | Peak     | 63.00  | 100    | Horizontal | N/A     |
| 2   | 199.875   | 38.20    | -13.45 | 43.5     | -5.30      | Peak     | 91.00  | 100    | Horizontal | Pass    |
| 3   | 225.069   | 38.42    | -12.92 | 46.0     | -7.58      | Peak     | 323.00 | 100    | Horizontal | Pass    |
| 4   | 249.813   | 40.97    | -12.09 | 46.0     | -5.03      | Peak     | 97.00  | 100    | Horizontal | Pass    |
| 5   | 374.881   | 33.76    | -9.45  | 46.0     | -12.24     | Peak     | 125.00 | 100    | Horizontal | Pass    |
| 6   | 699.925   | 40.90    | -4.19  | 46.0     | -5.10      | Peak     | 244.00 | 100    | Horizontal | Pass    |


Page 19 of 51

Report No.: TW2203419-05E

Date: 2022-05-17



## Test Figure for Middle channel (908.7MHz)

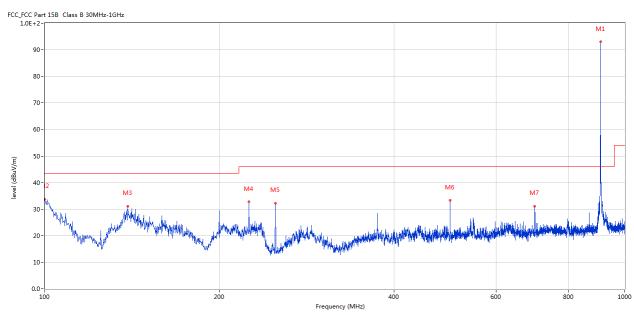


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)   | (cm)   |          |         |
| 1   | 908.673   | 92.98    | -1.76  | 46.0     | 46.98      | Peak     | 37.00 | 100    | Vertical | N/A     |
| 2   | 100.000   | 33.63    | -13.53 | 43.5     | -9.87      | Peak     | 9.00  | 100    | Vertical | Pass    |
| 3   | 139.140   | 31.15    | -17.21 | 43.5     | -12.35     | Peak     | 0.00  | 100    | Vertical | Pass    |
| 4   | 225.069   | 32.70    | -12.92 | 46.0     | -13.30     | Peak     | 60.00 | 100    | Vertical | Pass    |
| 5   | 250.037   | 32.21    | -12.07 | 46.0     | -13.79     | Peak     | 25.00 | 100    | Vertical | Pass    |
| 6   | 499.950   | 33.27    | -6.90  | 46.0     | -12.73     | Peak     | 20.00 | 100    | Vertical | Pass    |
| 7   | 699.925   | 31.09    | -4.19  | 46.0     | -14.91     | Peak     | 37.00 | 100    | Vertical | Pass    |

Page 20 of 51 Report No.: TW2203419-05E

Date: 2022-05-17



## Test Figure for High channel (914.9MHz)

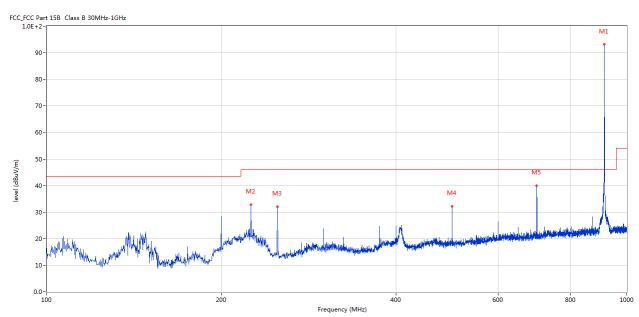

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 914.971   | 93.21    | -1.74  | 46.0     | 47.21      | Peak     | 225.00 | 100    | Horizontal | N/A     |
| 2   | 225.069   | 32.78    | -12.92 | 46.0     | -13.22     | Peak     | 42.00  | 100    | Horizontal | Pass    |
| 3   | 250.037   | 32.11    | -12.07 | 46.0     | -13.89     | Peak     | 159.00 | 100    | Horizontal | Pass    |
| 4   | 499.950   | 32.28    | -6.90  | 46.0     | -13.72     | Peak     | 319.00 | 100    | Horizontal | Pass    |
| 5   | 699.925   | 39.97    | -4.19  | 46.0     | -6.03      | Peak     | 278.00 | 100    | Horizontal | Pass    |


Page 21 of 51

Report No.: TW2203419-05E

Date: 2022-05-17



## Test Figure for High channel (914.9MHz)

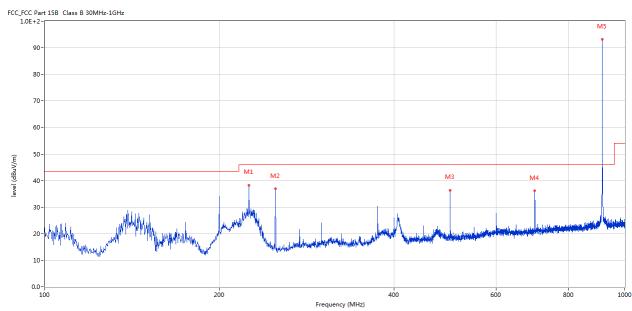

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |          |         |
| 1   | 225.069   | 38.32    | -12.92 | 46.0     | -7.68      | Peak     | 102.00 | 100    | Vertical | Pass    |
| 2   | 250.037   | 36.84    | -12.07 | 46.0     | -9.16      | Peak     | 202.00 | 100    | Vertical | Pass    |
| 3   | 499.950   | 36.41    | -6.90  | 46.0     | -9.59      | Peak     | 337.00 | 100    | Vertical | Pass    |
| 4   | 699.925   | 36.12    | -4.19  | 46.0     | -9.88      | Peak     | 64.00  | 100    | Vertical | Pass    |
| 5   | 914.971   | 93.18    | -1.74  | 46.0     | 47.18      | Peak     | 20.00  | 100    | Vertical | N/A     |

Page 22 of 51 Report No.: TW2203419-05E


Date: 2022-05-17



## Test Figures above 1GHz:

Please refer to the following test plots for details:

#### Low Channel: Horizontal

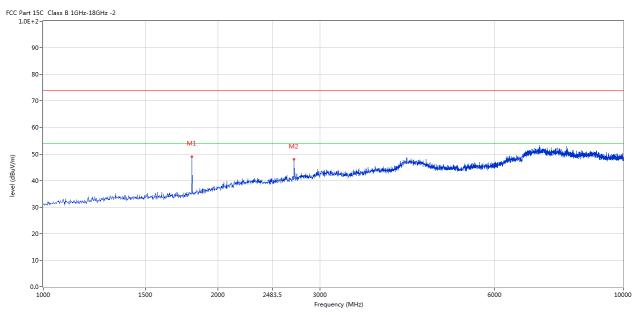


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)   | (cm)   |            |         |
| 1   | 1805.299  | 49.99    | -6.78  | 74.0     | -24.01     | Peak     | 93.00 | 100    | Horizontal | Pass    |
| 2   | 2707.323  | 48.01    | -2.94  | 74.0     | -25.99     | Peak     | 98.00 | 100    | Horizontal | Pass    |

Page 23 of 51 Report No.: TW2203419-05E

Date: 2022-05-17



## Low Channel: Vertical

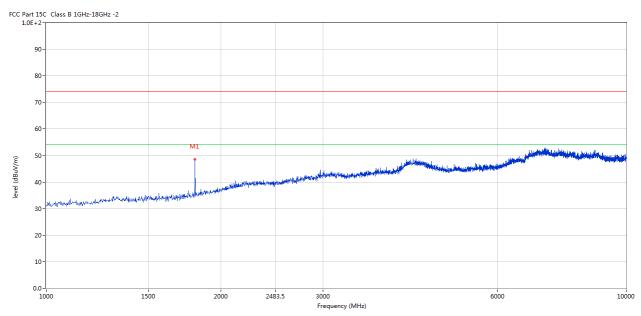


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |          |         |
| 1   | 1805.299  | 48.53    | -6.78  | 74.0     | -25.47     | Peak     | 216.00 | 100    | Vertical | Pass    |

Report No.: TW2203419-05E Page 24 of 51

Date: 2022-05-17



#### **Middle Channel: Horizontal**

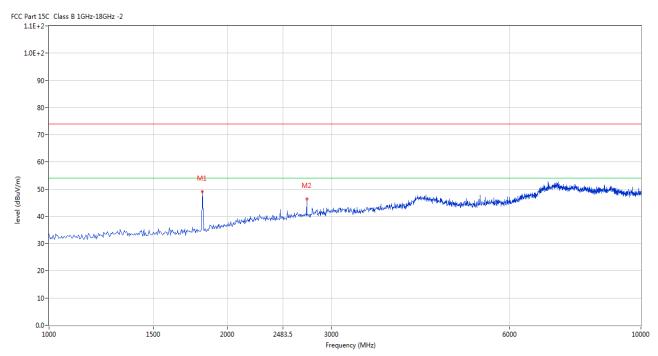


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |            |         |
| 1   | 1817.796  | 49.15    | -6.68  | 74.0     | -24.85     | Peak     | 55.00     | 100    | Horizontal | N/A     |
| 2   | 2725.069  | 46.34    | -2.89  | 74.0     | -27.66     | Peak     | 55.00     | 100    | Horizontal | Pass    |

Report No.: TW2203419-05E Page 25 of 51

Date: 2022-05-17



# **Middle Channel: Vertical**

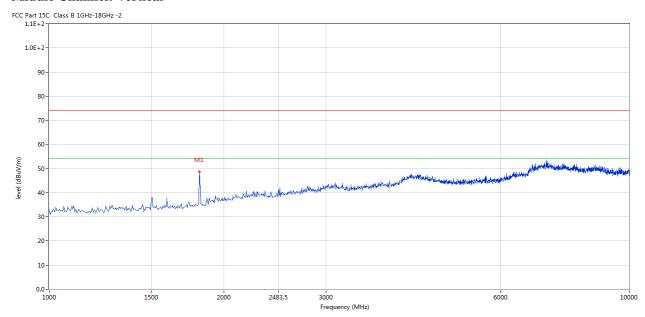


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |          |         |
| 1   | 1817.796  | 49.67    | -6.68  | 74.0     | -23.33     | Peak     | 353.00 | 100    | Vertical | Pass    |

Page 26 of 51 Report No.: TW2203419-05E

Date: 2022-05-17



## **High Channel: Horizontal**

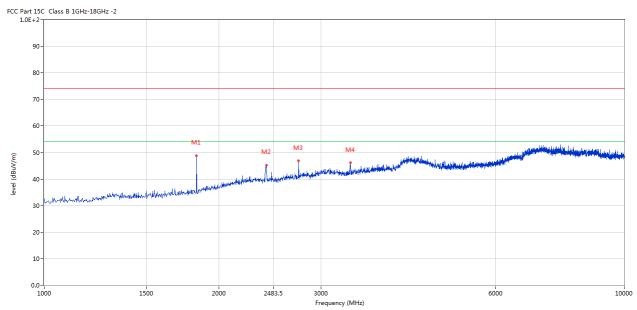

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 1830.042  | 49.80    | -6.55  | 74.0     | -24.20     | Peak     | 54.00  | 100    | Horizontal | Pass    |
| 2   | 2414.896  | 45.23    | -3.57  | 74.0     | -28.77     | Peak     | 149.00 | 100    | Horizontal | Pass    |
| 3   | 2745.564  | 46.83    | -2.84  | 74.0     | -27.17     | Peak     | 54.00  | 100    | Horizontal | Pass    |
| 4   | 3370.907  | 46.09    | -1.88  | 74.0     | -27.91     | Peak     | 49.00  | 100    | Horizontal | Pass    |


Page 27 of 51

Report No.: TW2203419-05E

Date: 2022-05-17



#### **High Channel: Vertical**

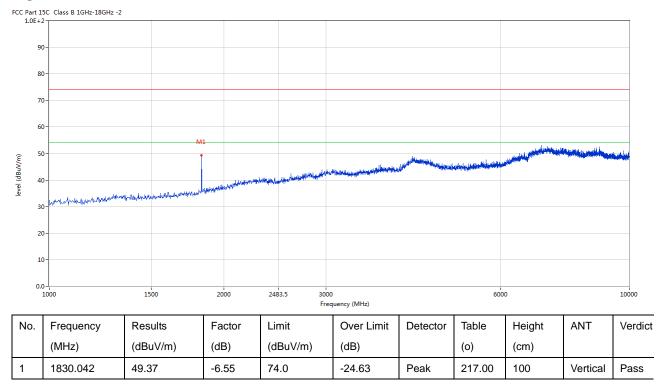

Note: The measured PK radiated emissions level less than the AV limit, so no necessary to take down the AV result

Report No.: TW2203419-05E Page 28 of 51

Date: 2022-05-17



#### 7.0 20dB Bandwidth Measurement

#### 7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

#### 7.2 Limits of 20dB Bandwidth Measurement

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

#### 7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =500kHz, RBW =10 kHz, VBW=30 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

#### 7.4 Test Result

| EUT      | Outdoor L               | oraWAN Gateway           | Model                  | DSGW-010C  |
|----------|-------------------------|--------------------------|------------------------|------------|
| Mode     | Keep                    | Transmitting             | Input Voltage          | DC48V      |
| Temperat | rature 24 deg. C,       |                          | Humidity               | 56% RH     |
| Channel  | Channel Frequency (MHz) | 20 dB Bandwidth<br>(kHz) | Maximum Limit<br>(kHz) | Pass/ Fail |
| Low      | 902.3                   | 160                      | 500                    | Pass       |
| Middle   | 908.7                   | 159                      | 500                    | Pass       |
| High     | 914.9                   | 161                      | 500                    | Pass       |

The report refers only to the sample tested and does not apply to the bulk.

Page 29 of 51


Report No.: TW2203419-05E

Date: 2022-05-17



## Test Figure:

## 1. Condition: Low Channel

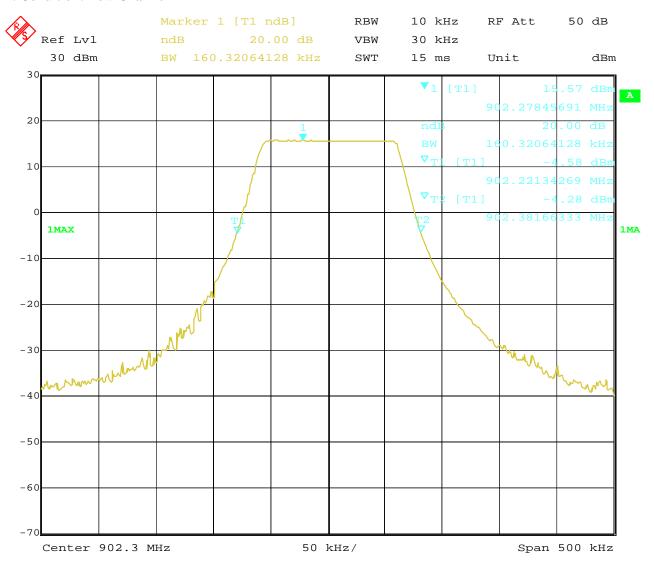


Date: 17.MAY.2022 18:24:04 Report No.: TW2203419-05E Page 30 of 51

Date: 2022-05-17



#### 2. Condition: Middle Channel

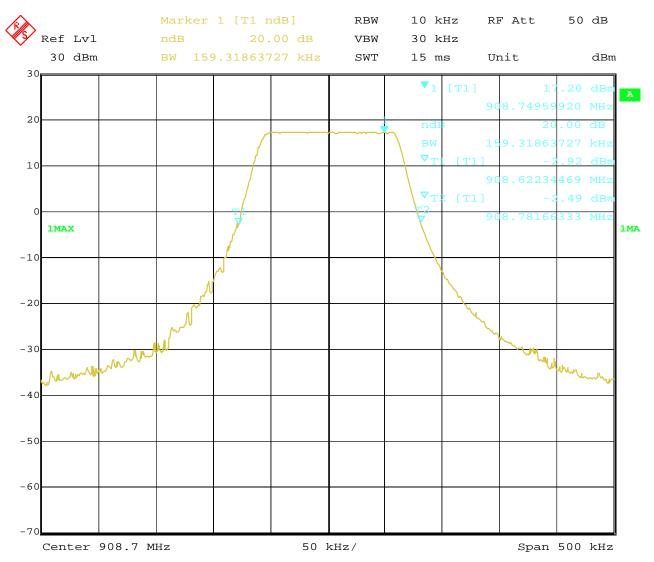


17.MAY.2022 18:29:42 Date:

Report No.: TW2203419-05E Page 31 of 51

Date: 2022-05-17



## 3. High Channel

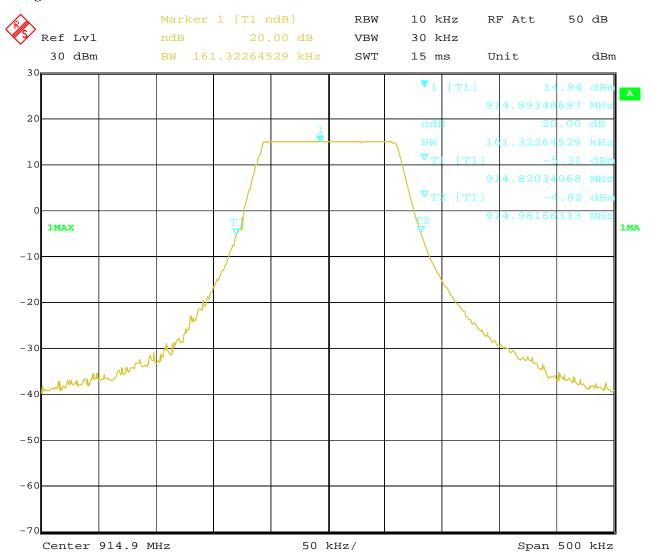

17.MAY.2022 18:35:23 Date:

Date: 2022-05-17



Page 32 of 51

## 8. Maximum Output Power

## 8.1 Regulation

According to §15.247(b)(2), For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section. According to §15.247(b)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

## 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### 8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = Auto; Detector function = PK; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Note: The PK power were measured

Date: 2022-05-17



Page 33 of 51

#### **8.4Test Results**

| EUT         | Outdoor                       | LoraWAN Gateway         | Model                     | DSGW-010C  |  |  |
|-------------|-------------------------------|-------------------------|---------------------------|------------|--|--|
| Mode        | Kee                           | p Transmitting          | Input Voltage             | DC48V      |  |  |
| Temperature |                               | 24 deg. C,              | Humidity                  | 56% RH     |  |  |
| Channel     | Channel<br>Frequency<br>(MHz) | Max. Power Output (dBm) | Peak Power Limit<br>(dBm) | Pass/ Fail |  |  |
| Low         | 902.3                         | 26.28                   | 30                        | Pass       |  |  |
| Middle      | 908.7                         | 26.23                   | 30                        | Pass       |  |  |
| High        | 914.9 26.36                   |                         | 30                        | Pass       |  |  |

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The **PK** power was measured

Date: 2022-05-17



Page 34 of 51

## 9. Carrier Frequency Separation

## 9.1 Regulation and Limit

According to §15.247(a)(1)(i), For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

#### 9.2 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span; Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 35 of 51

Report No.: TW2203419-05E


Date: 2022-05-17



#### 9.4Test Result

| EUT                          | Outdoor LoraWAN Gateway |                                    | Model         | DSGW-010C  |  |
|------------------------------|-------------------------|------------------------------------|---------------|------------|--|
| Mode                         | Hopping On              |                                    | Input Voltage | DC48V      |  |
| Temperature                  | 24 deg. C,              |                                    | Humidity      | 56% RH     |  |
| Carrier Frequency Separation |                         | Limit                              |               | Pass/ Fail |  |
| 198kHz                       |                         | ≥ 20 dB bandwidth (161kHz Maximum) |               | Pass       |  |

## **Test Plots**

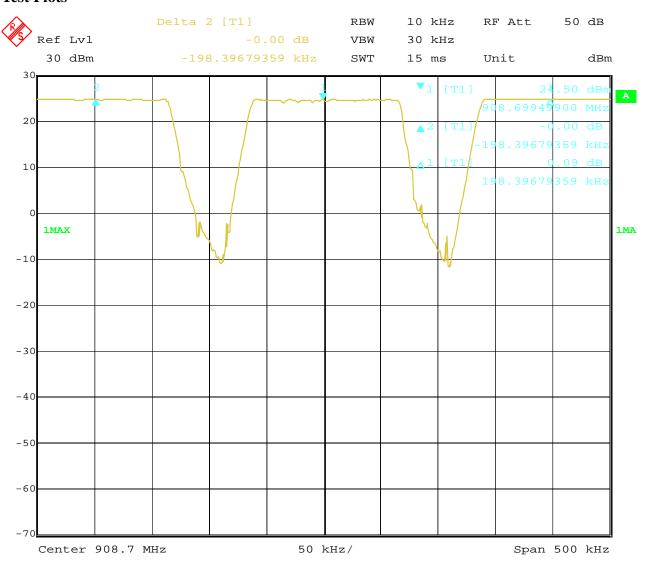

16.APR.2022 15:06:15 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2022-05-17



Page 36 of 51

## 10. Number of Hopping Channels

#### 10.1 Regulation and Limit

According to §15.247(a)(1)(i), For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

#### **10.2 Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 37 of 51

Report No.: TW2203419-05E


Date: 2022-05-17



### 10.4Test Result

| EUT                 | Outdoor LoraWAN Gateway |                            | Model               |            | DSGW-010C  |  |
|---------------------|-------------------------|----------------------------|---------------------|------------|------------|--|
| Mode                | Hopping On              |                            | Input Voltage DC48V |            | DC48V      |  |
| Temperature         | 24 deg. C,              |                            | Humidity            | ity 56% RH |            |  |
| Operating Frequency |                         | Number of hopping channels |                     | Limit      | Pass/ Fail |  |
| 902.3-914.9MHz      |                         | 64                         |                     | ≥ 50       | Pass       |  |

## **Test Plot**

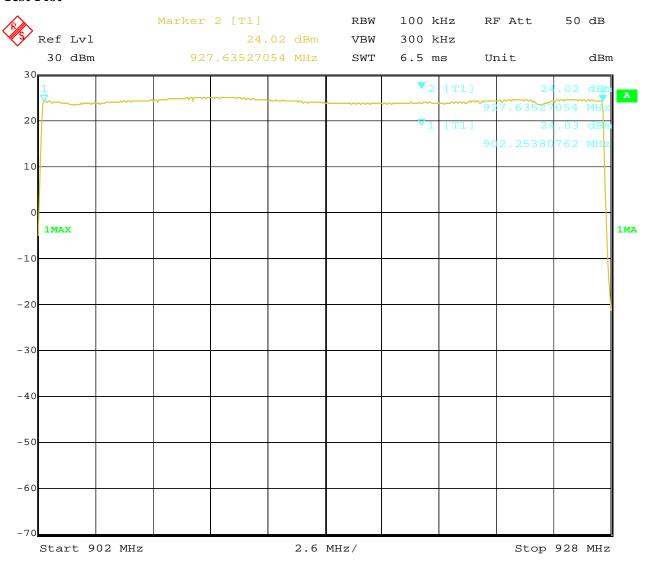

16.APR.2022 14:02:17 Date:

Date: 2022-05-17



Page 38 of 51

# 11. Time of Occupancy (Dwell Time)

### 11.1 Regulation and Limit

According to §15.247(a)(1)(i), For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

#### 11.2 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 0.5 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Date: 2022-05-17



Page 39 of 51

## 11.4 Test Result

| EUT         | Outdoor LoraWAN Gateway | Model         | DSGW-010C |  |
|-------------|-------------------------|---------------|-----------|--|
| Mode        | Keep Transmitting       | Input Voltage | DC48V     |  |
| Temperature | 24 deg. C,              | Humidity      | 56% RH    |  |
| Channel     | Dwell Time (s)          | Limit (s)     | Verduct   |  |
| Low         | 0.289s                  | ≤0.4s         | Pass      |  |


Page 40 of 51

Report No.: TW2203419-05E

Date: 2022-05-17



Test Plots:

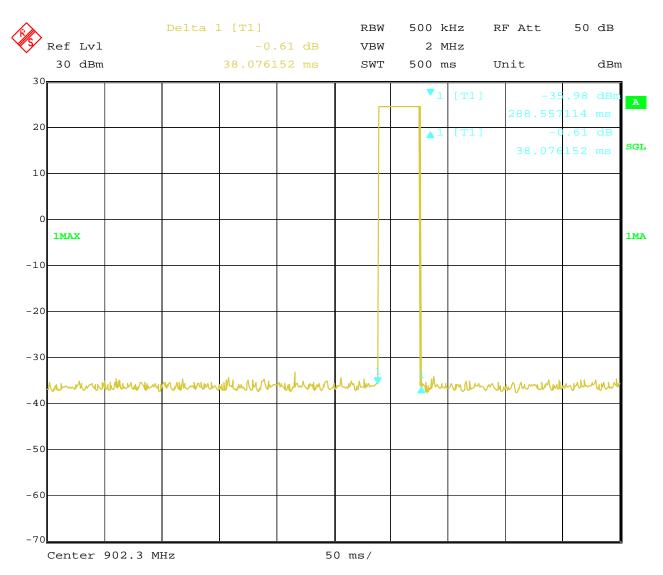


20.APR.2022 15:35:06 Date:

Page 41 of 51 Report No.: TW2203419-05E

Date: 2022-05-17



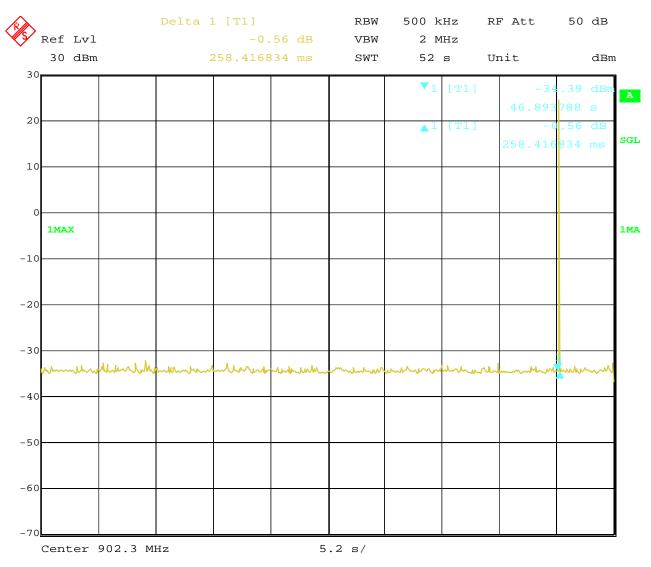


20.APR.2022 19:49:23 Report No.: TW2203419-05E Page 42 of 51

Date: 2022-05-17



### 12 Out of Band Measurement

## 12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### 12.3 Test Procedure

For signals in the restricted bands above and below the 902-928MHz allocated band a measurement was made of Radiated emission test. (QP values with RBW=100kHz, VBW=300kHz and QK detector.)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-10GHz was tested. And It met the FCC rule.

Page 43 of 51

Report No.: TW2203419-05E


Date: 2022-05-17



#### 12.4 Band Edge Test Result

| Product:     | Outdoor LoraWAN Gateway | Test Mode:    | DSGW-010C |
|--------------|-------------------------|---------------|-----------|
| Mode         | Keeping Transmitting    | Input Voltage | DC48V     |
| Temperature  | 24 deg. C               | Humidity      | 56% RH    |
| Test Result: | Pass                    | Detector      | PK        |

## **Test Figure:**

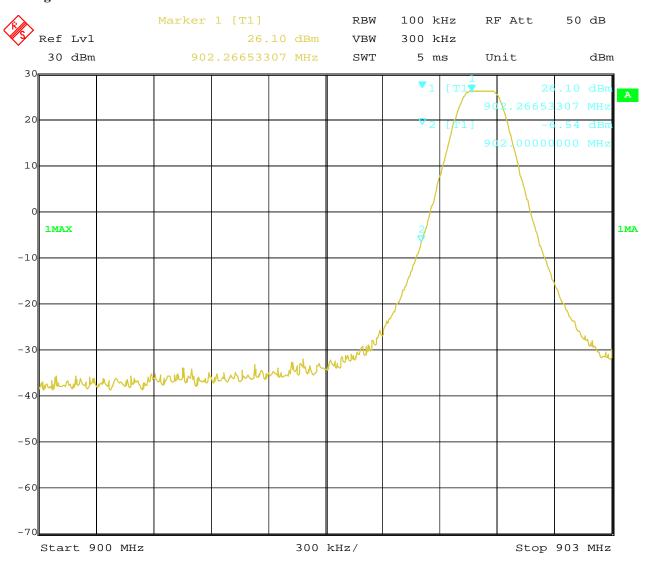

Date: 19.APR.2022 10:13:43

Page 44 of 51

Report No.: TW2203419-05E


Date: 2022-05-17



#### Band Edge Test Result 12.4

| Product:     | Outdoor LoraWAN Gateway            | Test Mode: | DSGW-010C |
|--------------|------------------------------------|------------|-----------|
| Mode         | Keeping Transmitting Input Voltage |            | DC48V     |
| Temperature  | Temperature 24 deg. C,             |            | 56% RH    |
| Test Result: | Pass                               | Detector   | PK        |

### **Test Figure:**

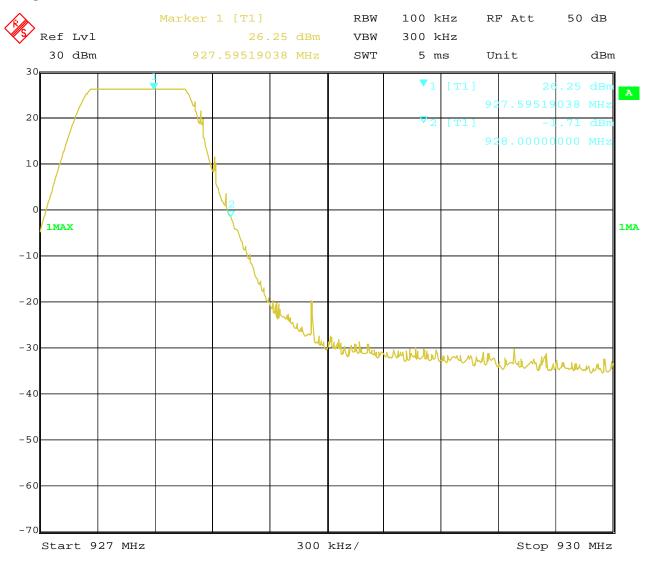

Date: 19.APR.2022 10:15:08

Page 45 of 51

Report No.: TW2203419-05E


Date: 2022-05-17



#### Band Edge Test Result 12.4

| Product:     | Outdoor LoraWAN Gateway | Test Mode:    | DSGW-010C |
|--------------|-------------------------|---------------|-----------|
| Mode         | Hopping On              | Input Voltage | DC48V     |
| Temperature  | 24 deg. C,              | Humidity      | 56% RH    |
| Test Result: | Pass                    | Detector      | PK        |

## **Test Figure:**

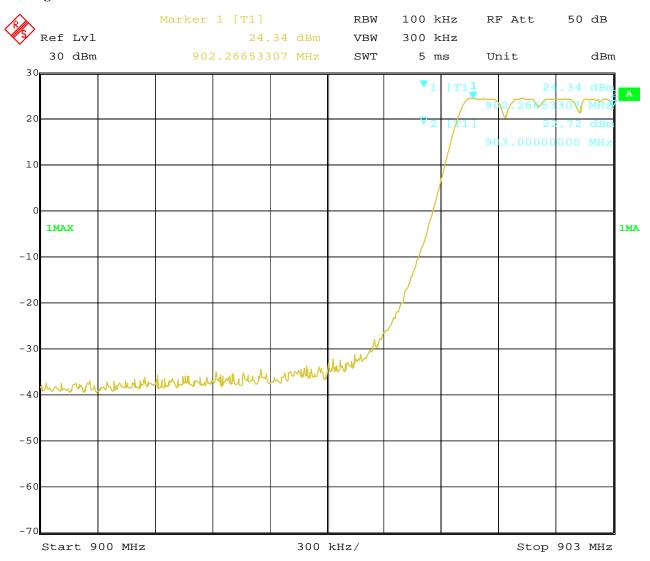

Date: 19.APR.2022 10:28:23

Page 46 of 51

Report No.: TW2203419-05E


Date: 2022-05-17



#### 12.4 Band Edge Test Result

| Product:     | Outdoor LoraWAN Gateway | Test Mode:    | DSGW-010C |
|--------------|-------------------------|---------------|-----------|
| Mode         | Hopping On              | Input Voltage | DC48V     |
| Temperature  | 24 deg. C,              | Humidity      | 56% RH    |
| Test Result: | Pass                    | Detector      | PK        |

## **Test Figure:**

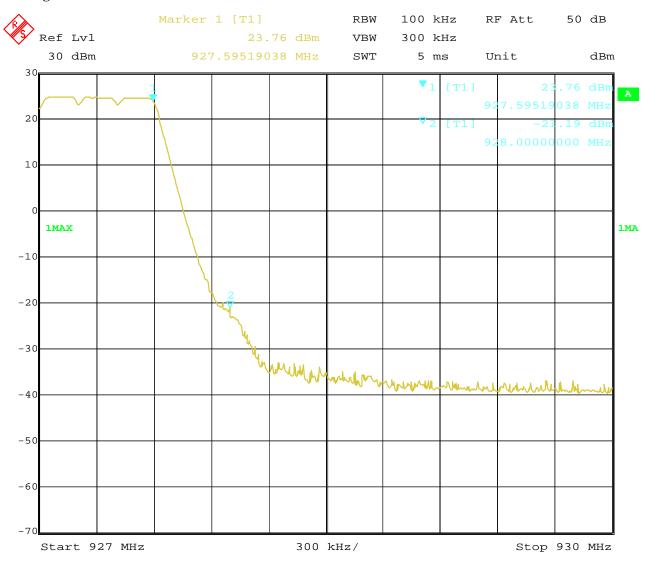

Date: 19.APR.2022 10:22:30

Page 47 of 51 Report No.: TW2203419-05E

Date: 2022-05-17



#### 12.4 Restricted band Measurement

| EUT                     | Outdoor LoraWAN Gateway |       |          | Model               |    | DSGW-010C       |
|-------------------------|-------------------------|-------|----------|---------------------|----|-----------------|
| Mode                    | Keeping Transmitting    |       |          | Test Voltage        |    | DC48V           |
| Temperature             | 24 deg. C,              |       |          | Humidity            |    | 56% RH          |
| Test Result:            | Pass                    |       | Detector |                     | QP |                 |
| Low Channel, Horizontal |                         |       |          |                     |    |                 |
| 614                     | PK (dBμV/m)             | 26.35 | Liı      | mit $46(dB\mu V/m)$ |    | $46(dB\mu V/m)$ |
| Low Channel, Vertical   |                         |       |          |                     |    |                 |
| 614                     | PK (dBμV/m)             | 26.75 | Liı      | mit 46(dBμV/m)      |    | $46(dB\mu V/m)$ |

| 12.4 Restricted band Measurement |                         |       |     |                |  |            |
|----------------------------------|-------------------------|-------|-----|----------------|--|------------|
| EUT                              | Outdoor LoraWAN Gateway |       |     | Model          |  | DSGW-010C  |
| Mode                             | Keeping Transmitting    |       |     | Test Voltage   |  | DC48V      |
| Temperature                      | 24 deg. C,              |       |     | Humidity       |  | 56% RH     |
| Test Result:                     | Pass                    |       |     | Detector       |  | QP         |
| High Channel, Horizontal         |                         |       |     |                |  |            |
| 960                              | PK (dBμV/m) 26.59 Lin   |       | mit | 46(dBμV/m)     |  |            |
| High Channel, Vertical           |                         |       |     |                |  |            |
| 960                              | PK (dBμV/m)             | 26.72 | Liı | mit 46(dBµV/m) |  | 46(dBμV/m) |

Date: 2022-05-17



Page 48 of 51

# 13.0 Antenna Requirement

## 13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

### 13.2 Antenna Connected constructions

External Antenna with Reverse polarity N connector used. The gain of the antennas is 1.1dBi (Declared by the manufacturer)

Report No.: TW2203419-05E Page 49 of 51

Date: 2022-05-17




### 14.0 FCC ID Label

## FCC ID: 2AUXBDSGW-010C

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### **Mark Location:**

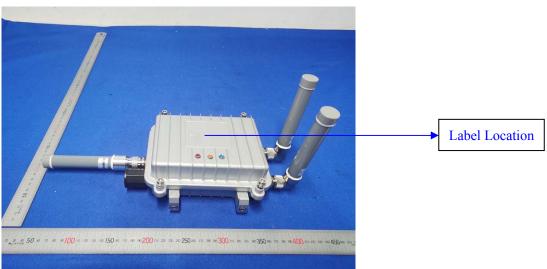

Page 50 of 51

Report No.: TW2203419-05E

Date: 2022-05-17



#### 15.0 Photo of testing


Conducted Emission Test Setup:



Date: 2022-05-17



# Radiated Emission Test Setup:

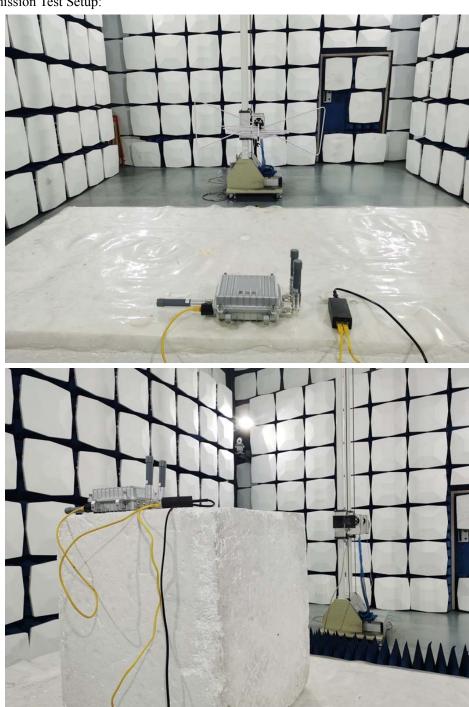

# Photographs - EUT

Please refer test report TW2203419-01E

# -End of the report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.