



REPORT No.: SZ23030483E01

TEST REPORT

APPLICANT : Qingdao Magene Intelligence Technology Co.,Ltd.

PRODUCT NAME : PCB Antenna

MODEL NAME : E100100214

TRADE NAME : N/A

BRAND NAME : N/A

STANDARD(S) : IEEE Std 149-2021

RECEIPT DATE : 2023-03-31

TEST DATE : 2023-04-04

ISSUE DATE : 2023-04-07



Edited by:

ke zhi qing

Ke Zhiqing(Rapporteur)

Approved by:

Chi Shide

Chi Shide(Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd., FL1-3, Building A,
FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District,
ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
2. Test Results	4
2.1. Applied Reference Documents	4
2.2. Test Conditions	4
2.3. Measurement Uncertainty	4
2.4. Test Results lists	5
Annex A Test Setup Photos	6
Annex B Figures	7
1. 2D Radiation Pattern	7
2. 3D Radiation Pattern	8
Annex C Photographs	10
Annex D General Information	13
1.1 Identification of the Responsible Testing Laboratory	13
1.2 Identification of the Responsible Testing Location	13
1.3 Test Equipments Utilized	13

Change History		
Version	Date	Reason for change
1.0	2023-04-07	First edition

2. Test Results

2.1. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	IEEE Std 149-2021	IEEE Recommended Practice for Antenna Measurements

2.2. Test Conditions

Test Environment Conditions:

Relative Humidity:	25 ... 75 %
Temperature:	+10 °C to +30 °C

2.3. Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO. When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% Confidence intervals.

Item	Measurement Uncertainty(dB)
Gain	±0.5
VSWR	±0.2
Measurement Uncertainty(95% Confidence Interval) K=2	




2.4. Test Results lists

2.4.1. Gain

Frequency	Gain(dBi)
2400MHz	-1.23
2410MHz	-0.98
2420MHz	-0.81
2430MHz	-0.68
2440MHz	-0.65
2450MHz	-0.53
2460MHz	-0.66
2470MHz	-0.63
2480MHz	-0.45
2490MHz	-0.57
2500MHz	-0.45


Annex A Test Setup Photos

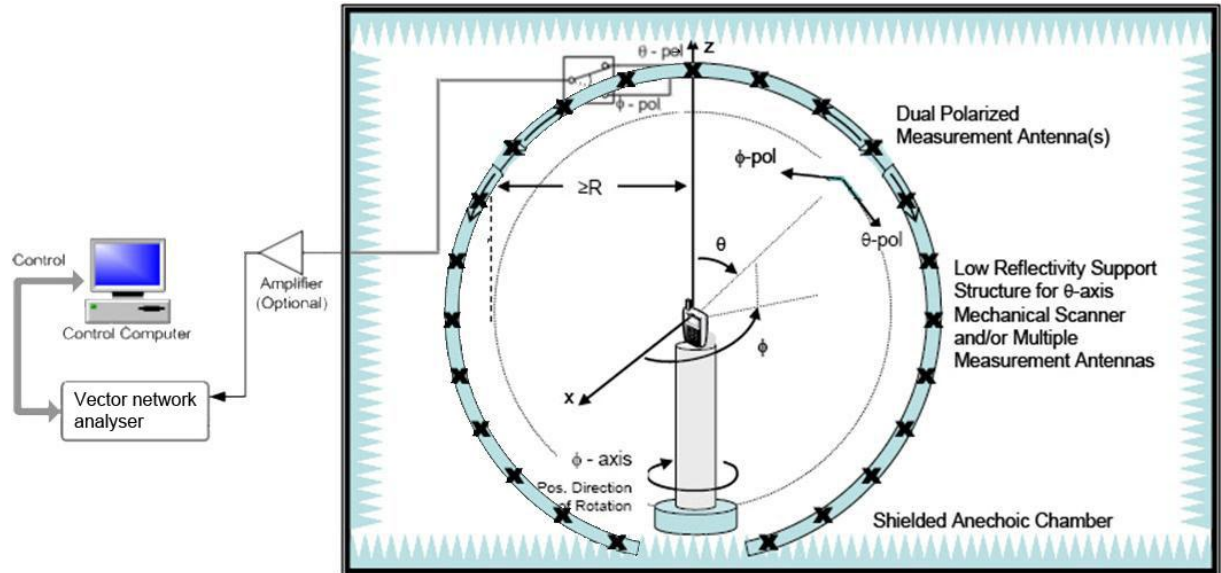


Annex B Figures

1. 2D Radiation Pattern

Phi=0°

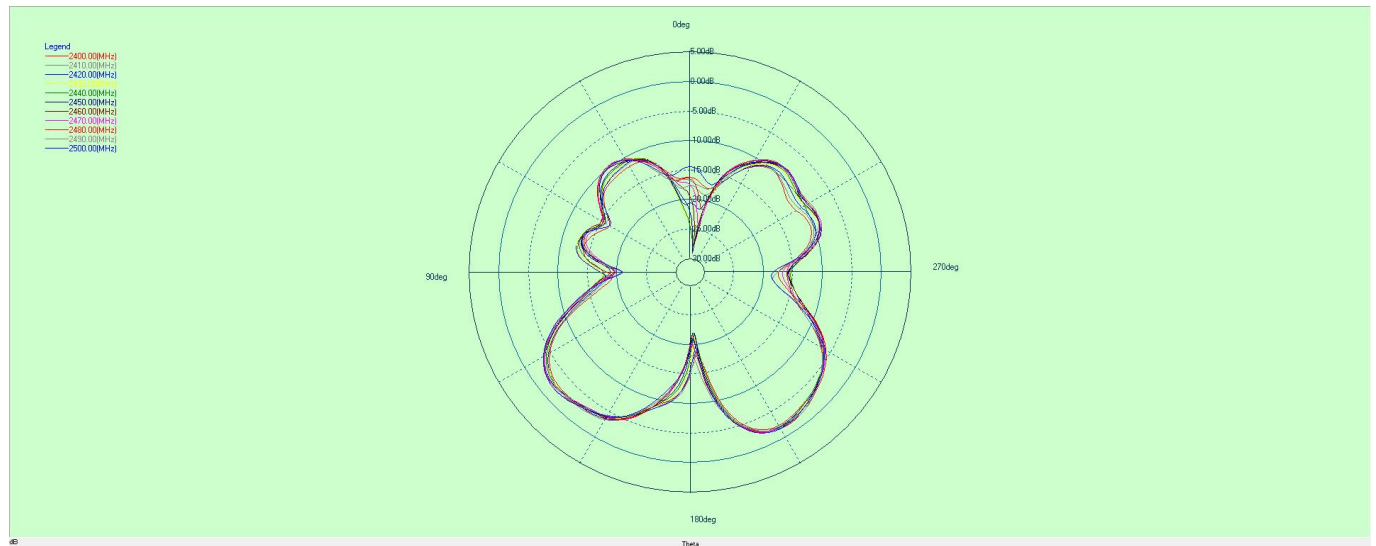


Phi=90°

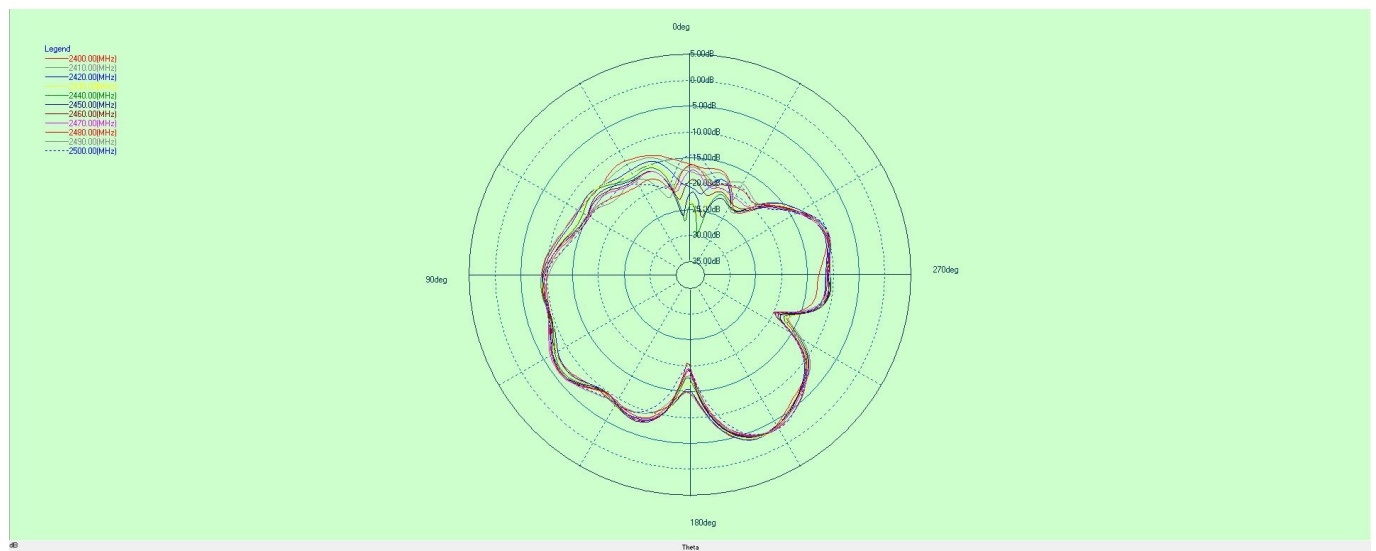





Theta=90°

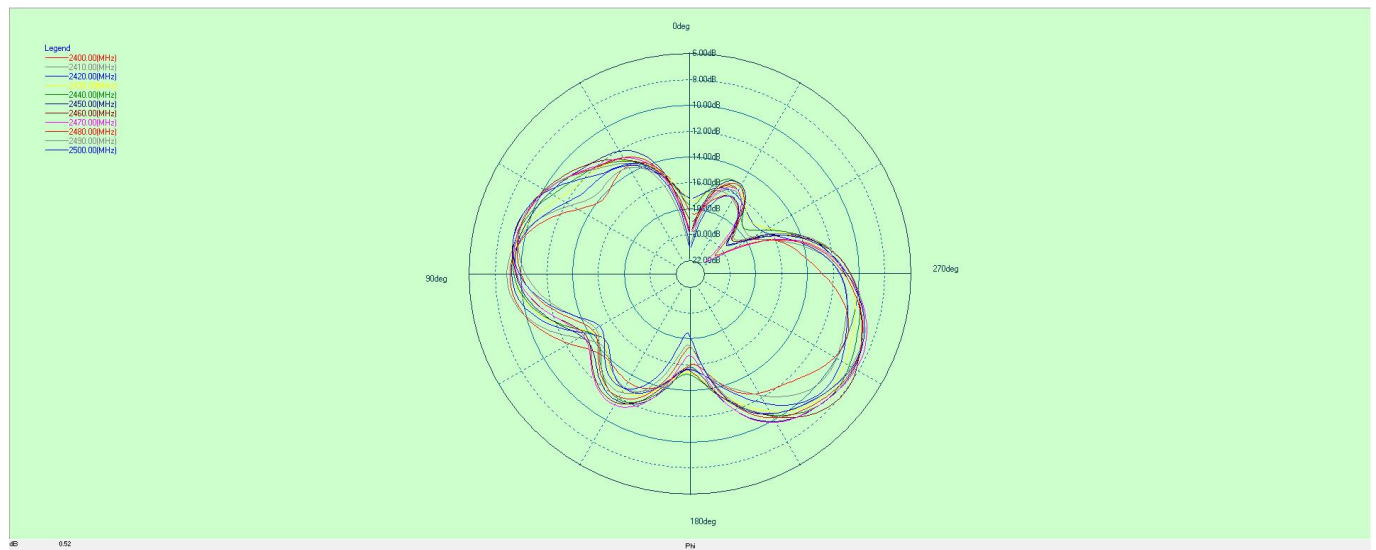


2. 3D Radiation Pattern

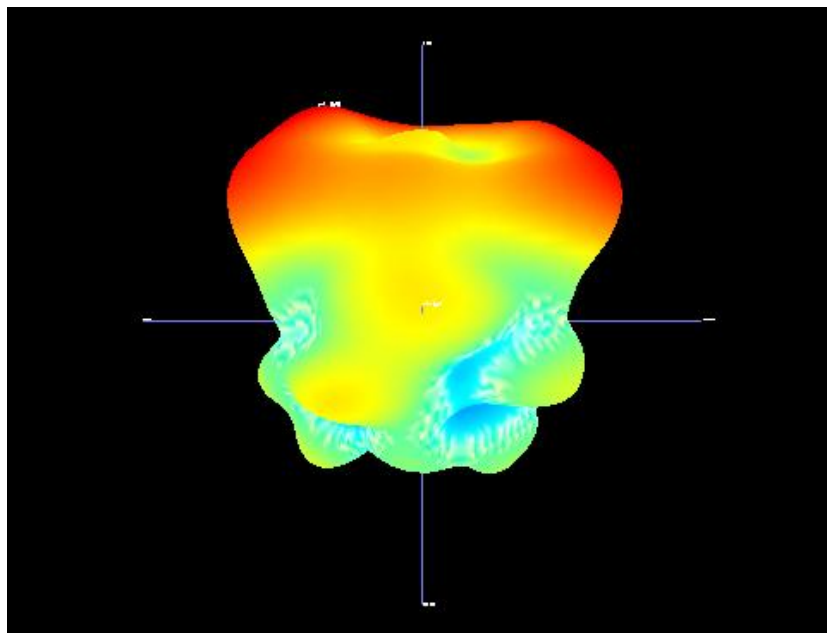

2400MHz

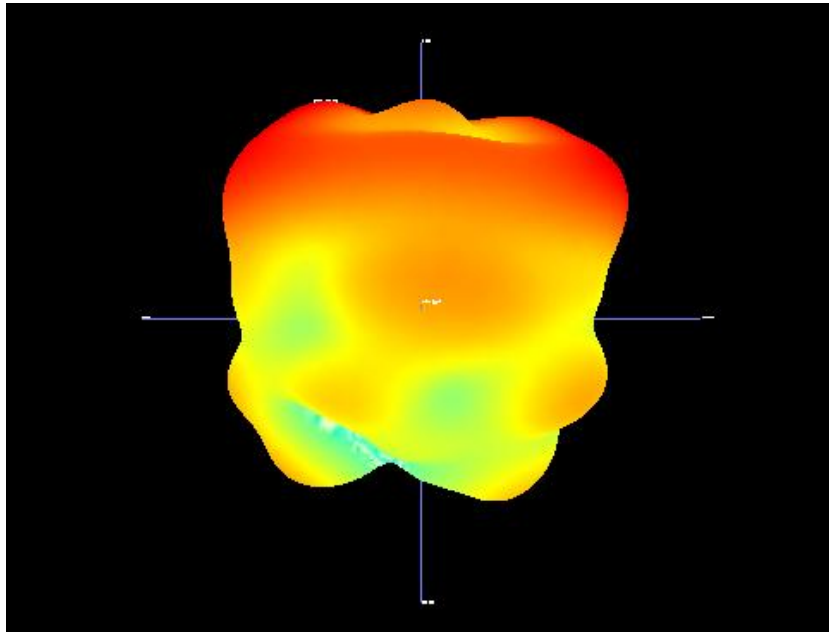

2440MHz

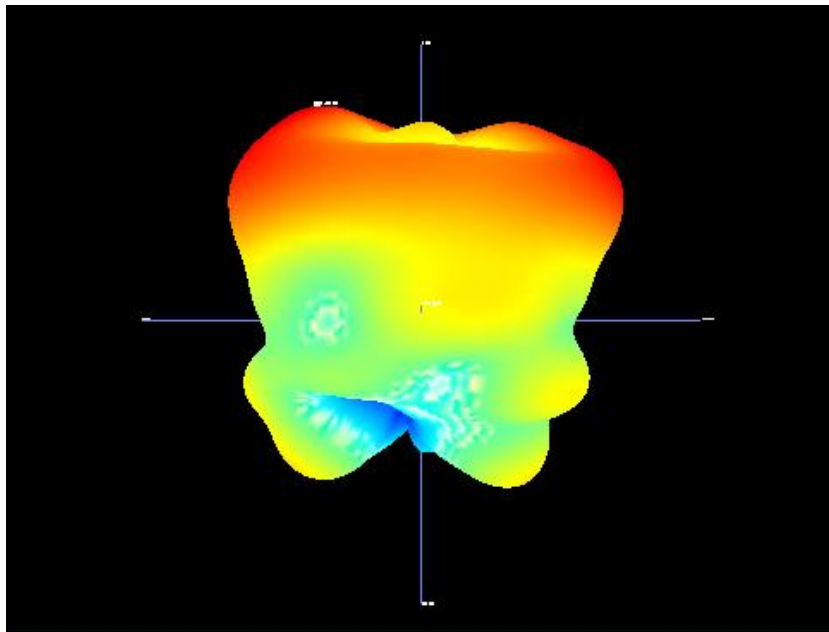

2480MHz



Annex D General Information

1.1 Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

1.3 Test Equipments Utilized

NO.	Equipment Name	Serial NO.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vector Network Analyzer	MY46214666	E5071C	Agilent	2023.02.09	2024.02.08
2	OTA Chamber	N/A	SG24	Satimo	2021.01.12	2024.01.11
3	SatEnv	N/A	2.0.1.5 build 12	Satimo	N/A	N/A
4	SPM	N/A	1.11	Satimo	N/A	N/A

————— END OF REPORT —————