



LCIE



Accreditation
N°1-1633
Scope available on
www.cofrac.fr

Template : May 28th, 2024

TEST REPORT

N°: 22597699-801747-A(FILE#5652354)

Version: 01

Subject

Radio spectrum tests according to the standards:
FCC CFR 47 Part 15.247 & ANSI C63.10
RSS-247 & RSS-Gen

Issued to

ENLAPS

26 avenue Jean Kuntzmann
38330 – MONTBONNOT
FRANCE

Apparatus under test

- Product
- Trade mark
- Manufacturer
- Model under test
- Serial number
- FCCID
- IC

Timelapse digital cameras

enlaps™

ENLAPS

Tikee mini

M-MIN-0A-001105 / M-MIN-0A-001090

2ASLI-TIKEEM01

24785-TIKEEM01

Conclusion

See Test Program chapter

Test date

July 02, 2024 to July 18, 2024

Test location

LCIE Grenoble

FCC Test site

FR0008 - 918017 (MOI)

ISED Test site

6500A (MOI)

Sample receipt date

July 02, 2024

Composition of document

65 pages

Document issued on

July 18, 2024

Written by :

Akram HAKKARI

Tests operator

Approved by :

Majid MOURZAGH

Technical manager



Reproduction of this document is only authorized in its complete form. Any partial reproduction or any insertion of results in an accompanying text with a view to their distribution must receive prior and formal agreement from LCIE. This document results from tests carried out on a specimen, sample or test piece. It does not prejudice the conformity of all the products manufactured to the object tested. Unless otherwise indicated or rule specified by the test method, the decision of conformity does not take into account measurement uncertainty. It in no way prejudices a certification decision. The accreditation of the COFRAC Testing Section attests to the technical competence of the laboratories for the tests covered by the accreditation only. If certain tests mentioned in this report were carried out outside the framework of COFRAC accreditation, they are identified by the symbol

LCIE

Laboratoire Central des Industries Electriques
Une société Bureau Veritas

Z.I Centr'alp
170, Rue de Chatagnon
38430 Moirans
FRANCE

Tél. + 33 4 76 07 36 36
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	July 18, 2024	Akram HAKKARI	Creation of the document

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	OCCUPIED BANDWIDTH.....	12
4.	6DB BANDWIDTH	22
5.	MAXIMUM CONDUCTED OUTPUT POWER	28
6.	POWER SPECTRAL DENSITY	35
7.	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	41
8.	UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS	48
9.	UNCERTAINTIES CHART	65



1. TEST PROGRAM

References

- 47 CFR Part 15.247 (2023)
- RSS 247 Issue 3
- RSS Gen Issue 5
- KDB 558074 D01 DTS Meas Guidance v05r02 [Pb](#)
- KDB 662911 D01 Multiple Transmitter Output v02r01 [Pb](#)
- ANSI C63.10 (2013)

Radio requirement:

Clause - Test Description		Test result - Comments
Occupied Bandwidth	<i>ISED</i>	PASS
6dB Bandwidth	<i>FCC & ISED</i>	PASS
Maximum Conducted Output Power	<i>FCC & ISED</i>	PASS
Power Spectral Density	<i>FCC & ISED</i>	PASS
Unwanted Emissions in Non-Restricted Frequency Bands	<i>FCC & ISED</i>	PASS
Unwanted Emissions in Restricted Frequency Bands	<i>FCC & ISED</i>	PASS
Receiver Radiated Emissions	<i>ISED</i>	PASS(2)
This table is a summary of test report, see conclusion of each clause of this test report for detail.		

(1) Limited program

(2) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement


NA: Not Applicable

NP: Test Not Performed

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):

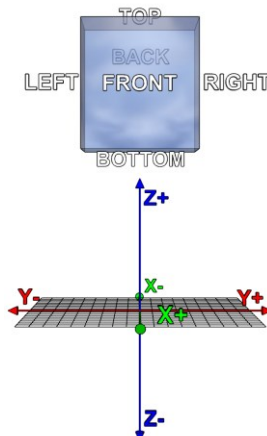Equipment under test: Tikee mini	
Model under test:	Tikee mini
Serial Number:	M-MIN-0A-001105 / M-MIN-0A-001090
	
	
Dimensions:	12.5cm x 13cm x 7cm (Length x Width x Height)
Type:	Table-Top

Power supply:

Name	Type	Rating	Reference / Sn	Comments
Supply1	Battery	3.6Vdc [2.5Vdc-4.2Vdc]	/	Internal battery charged by USB-C or proprietary connector
Supply2	AC	100-240V/50-60Hz	SAMSUNG EP-TA200	USB-C, No provided by manufacturer
Supply3	AC	100-240V/50-60Hz	Intertek MX15Z-0502500VX E467127	Proprietary, No provided by manufacturer

NC: Not communicated by provider



Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Supply1	Internal Battery	/	/	/	/	/
Supply2	USB-C: Samsung SMPS, only supply access for user other than debug	2	Yes	Yes	Yes	No provided by manufacturer
Supply3	Proprietary connector: Intertek SMPS (solar panel possible)	2	Yes	No	Yes	No provided by manufacturer
Access1	μSD connector	/	NA	NA	NA	/
Access2	SIM connector	/	NA	NA	NA	/

NC: Not communicated by provider

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
ASUS Router	-	-	-
Laptop	LENOVO	-	-

NC: Not communicated by provider

Equipment information (declaration of provider):

WiFi				
Chipset / RF Module	Ampak AP6256			
Frequency band:	[2400 – 2483.5] MHz			
Standard:	☒ 802.11b	☒ 802.11g	☒ 802.11n HT20	☐ 802.11n HT40
Spectrum Modulation:	DSSS	OFDM		
Number of Channel:	11 max (see channel plan)			
Spacing channel:	5MHz			
Channel bandwidth:	20MHz			
Antenna Type:	Internal			
Antenna connector:	Temporary for tests			
Antenna requirements §15.203	The transmitter uses an integral antenna and it permanently connected			
Transmit chains:	1			
Beamforming gain:	No			
Receiver chains	1			
Ad-Hoc mode:	No			

CHANNEL PLAN			
802.11b / 802.11g / 802.11n HT20		802.11n HT40	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
Cmin: 1	2412	Cmin: 3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	Cmid: 6	2437
5	2432	7	2442
Cmid: 6	2437	8	2447
7	2442	Cmax: 9	2452
8	2447		
9	2452		
10	2457		
Cmax: 11	2462		

DATA RATE			
802.11b			
Available for EUT	Data Rate (Mbps)	Modulation Type	Modulation Worst Case
☒	1	DBPSK	☒
	2	DQPSK	☐
	5.5	DQPSK	☐
	11	CCK	☐
802.11g			
Available for EUT	Data Rate (Mbps)	Modulation Type	Modulation Worst Case
☒	6	BPSK	☒
	9	BPSK	☐
	12	QPSK	☐
	18	QPSK	☐
	24	16-QAM	☐
	36	16-QAM	☐
	48	64-QAM	☐
	54	64-QAM	☐



L C I E

DATA RATE									
802.11n HT20									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				6.5	7.2	☑
	1	1	QPSK				13	14.4	☐
	2	1	QPSK				19.5	21.7	☐
	3	1	16-QAM				26	28.9	☐
	4	1	16-QAM				39	43.3	☐
	5	1	64-QAM				52	57.8	☐
	6	1	64-QAM				58.5	65	☐
	7	1	64-QAM				65	72.2	☐
☐	32	1	BPSK	-	-	-	-	-	☐
	8	2	BPSK				13	14.4	☐
	9	2	QPSK				26	28.9	☐
	10	2	QPSK				39	43.3	☐
	11	2	16-QAM				52	57.8	☐
	12	2	16-QAM				78	86.7	☐
	13	2	64-QAM				104	115.6	☐
	14	2	64-QAM				117	130.3	☐
	15	2	64-QAM				130	144.4	☐
	33	2	16-QAM	QPSK	-	-	39	43.3	☐
	34	2	64-QAM	QPSK	-	-	52	57.8	☐
	35	2	64-QAM	16-QAM	-	-	65	72.2	☐
	36	2	16-QAM	QPSK	-	-	58.5	65	☐
	37	2	64-QAM	QPSK	-	-	78	86.7	☐
	38	2	64-QAM	16-QAM	-	-	97.5	108.3	☐
☐	16	3	BPSK				19.5	21.7	☐
	17	3	QPSK				39	43.3	☐
	18	3	QPSK				58.5	65	☐
	19	3	16-QAM				78	86.7	☐
	20	3	16-QAM				117	130	☐
	21	3	64-QAM				156	173.3	☐
	22	3	64-QAM				175.5	195	☐
	23	3	64-QAM				195	216.7	☐
	39	3	16-QAM	QPSK	QPSK	-	52	57.8	☐
	40	3	16-QAM	16-QAM	QPSK	-	65	72.2	☐
	41	3	64-QAM	QPSK	QPSK	-	65	72.2	☐
	42	3	64-QAM	16-QAM	QPSK	-	78	86.7	☐
	43	3	64-QAM	16-QAM	16-QAM	-	91	101.1	☐
	44	3	64-QAM	64-QAM	QPSK	-	91	101.1	☐
	45	3	64-QAM	64-QAM	16-QAM	-	104	115.6	☐
	46	3	16-QAM	QPSK	QPSK	-	78	86.7	☐
	47	3	16-QAM	16-QAM	QPSK	-	97.5	108.3	☐
	48	3	64-QAM	QPSK	QPSK	-	97.5	108.3	☐
	49	3	64-QAM	16-QAM	QPSK	-	117	130	☐
	50	3	64-QAM	16-QAM	16-QAM	-	136.5	151.7	☐
	51	3	64-QAM	64-QAM	QPSK	-	136.5	151.7	☐
52	3	64-QAM	64-QAM	16-QAM	-	156	173.3	☐	
☐	24	4	BPSK				26	28.9	☐
	25	4	QPSK				52	57.8	☐
	26	4	QPSK				78	86.7	☐
	27	4	16-QAM				104	115.6	☐
	28	4	16-QAM				156	173.3	☐
	29	4	64-QAM				208	231.1	☐
	30	4	64-QAM				234	260	☐
	31	4	64-QAM				260	288.9	☐
	53	4	16-QAM	QPSK	QPSK	QPSK	65	72.2	☐
	54	4	16-QAM	16-QAM	QPSK	QPSK	78	86.7	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	91	101.1	☐
	56	4	64-QAM	QPSK	QPSK	QPSK	78	86.7	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	91	101.1	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	104	115.6	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	117	130	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	104	115.6	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	117	130	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	130	144.4	☐
	63	4	64-QAM	64-QAM	64-QAM	QPSK	130	144.4	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	143	158.9	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	97.5	108.3	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	117	130	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	136.5	151.7	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	117	130	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	136.5	151.7	☐
	70	4	64-QAM	16-QAM	16-QAM	QPSK	156	173.3	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	175.5	195	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	156	173.3	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	175.5	195	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	195	216.7	☐



	75	4	64-QAM	64-QAM	64-QAM	QPSK	195	216.7	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	214.5	238.3	☐

Antenna Characteristic			
Antenna reference	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
Taoglas WLA.01	1	2400 – 2483.5	50

Hardware information				
Highest internal frequency (PLL, Quartz, Clock, Microprocessor...):		F _{Highest} :	NC	MHz
Firmware (if applicable):		V:	6.0.2 / MP0.3.10	
Software (if applicable):		V:	NA	
Equipment intended:	Fixed			
Type of equipment:	Stand-alone			
Equipment sample:	Production model			
Duty cycle:	Continuous operation			
Operating temperature range:	T _{min} :	-10 °C		
	T _{nom} :	20°C		
	T _{max} :	55 °C		
Operating voltage:	V _{min} (85% V _{nom}):	3.06		
	V _{nom} :	3.6		
	V _{max} (115% V _{nom}):	4.14		

NC: Not communicated by provider

2.2. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Permanent emission with modulation on a fixed channel in the data rate that produced the highest power.
Test mode 2	Permanent reception

Test	Running mode
Occupied Bandwidth	Test mode 1
6dB Bandwidth	Test mode 1
Maximum Conducted Output Power	Test mode 1
Power Spectral Density	Test mode 1
Conducted Spurious Emission at the Band Edge	Test mode 1
Unwanted Emissions in Non-Restricted Frequency Bands	Test mode 1
Unwanted Emissions in Restricted Frequency Bands	Test mode 1
Receiver Radiated Emissions	Test mode 2 (1)

(1) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

2.3. EQUIPMENT LABELLING

Label
 

2.4. EQUIPMENT MODIFICATIONS DURING THE TESTS

None



2.5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where:

FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AG = Amplifier Gain

Example:

Assume a receiver reading of 52.5dBμV is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dBμV/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dBμV/m value can be mathematically converted to its corresponding level in μV/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$

2.6. TEST DISTANCE EXTRAPOLATION – FCC/ISED

The field strength is extrapolated to the new measurement distance using formula from FCC Part15.31 (f) and §6.5-6.6 RSS-GEN:

Below 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Above 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Where:

FS_{limit} is the calculation of field strength at the limit distance, expressed in dBμV/m

FS_{max} is the measured field strength, expressed in dBμV/m

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference limit distance

2.7. CALIBRATION DATE

The calibration intervals are extended at 12+2 months. This extended interval is based on the fact that there is sufficient calibration data to statistically establish a trend or based on experience of use of the test equipment to assure good measurement results for a longer period. The symbol -/- replaces the date for equipment checking before test or that have none impact on the test or that have no calibration required by the standard.

2.8. METHOD TO DETERMINATE THE SPURIOUS RADIATED EMISSION

The Normalized Site Attenuation (NSA) is added to the maximum values observed during the azimuth search in order to obtain the spurious radiated emission. For spurious above -6dB from the limit found with the NSA, the Substitution Method is applied.

The substitution antenna replaces the equipment under test (EUT) for Effective Radiated Power (ERP) or Effective Isotropically Radiated Power (EIRP) measurement following the standard. Power is measured for a high level and calculated for the same level of radiated field strength obtained on the measuring antenna and EUT.

3. DUTY CYCLE

3.1. TEST CONDITIONS

Date of test : July 17, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 22

3.2. TEST SETUP


The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency.
The captured power is measured and recorded.

Test Procedure:

ANSI C63.10 § 11.6

- Zero-span mode
- $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value
- $VBW \geq RBW$
- Detector = Peak
- Trace mode = Max Hold.
- Sweep time $> 3 \times$ Period time anticipated
- Sweep = Single
- Trigger Video

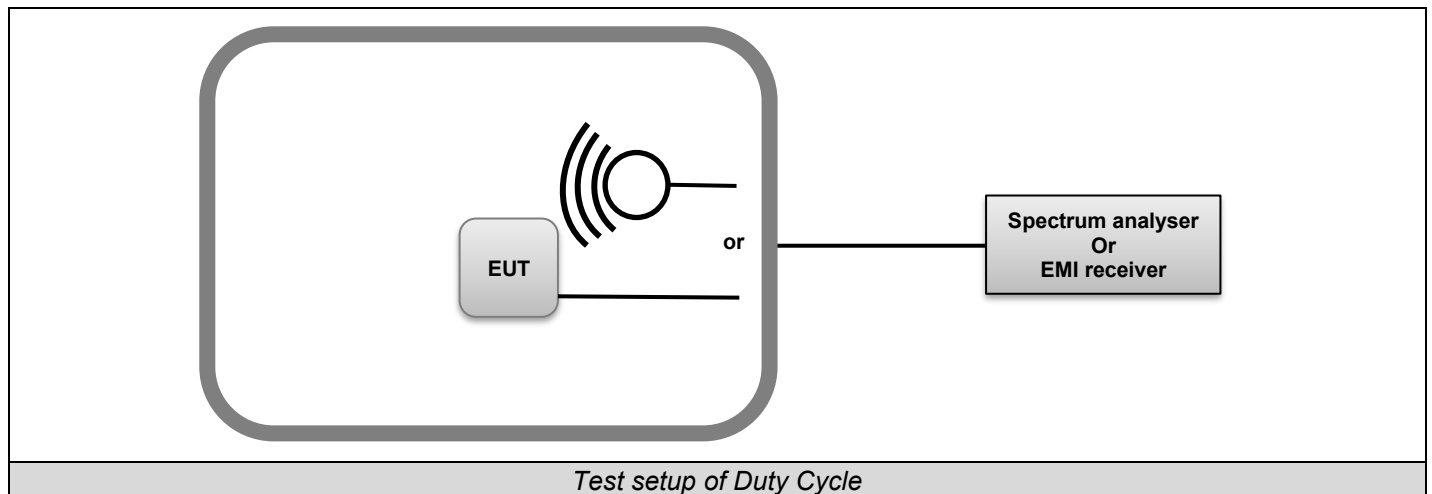

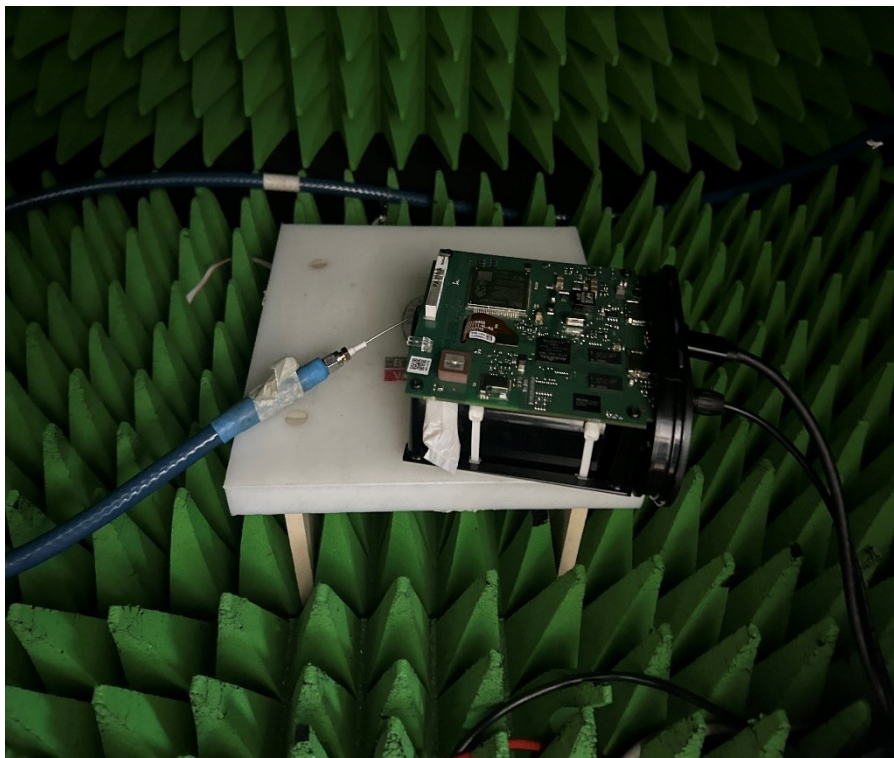


Photo of Duty Cycle

3.3. **LIMIT**

None




3.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
CABLE SMA 1m	RADIAL	11GHz	A5329862	07/23	07/24
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25

3.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

3.6. RESULTS

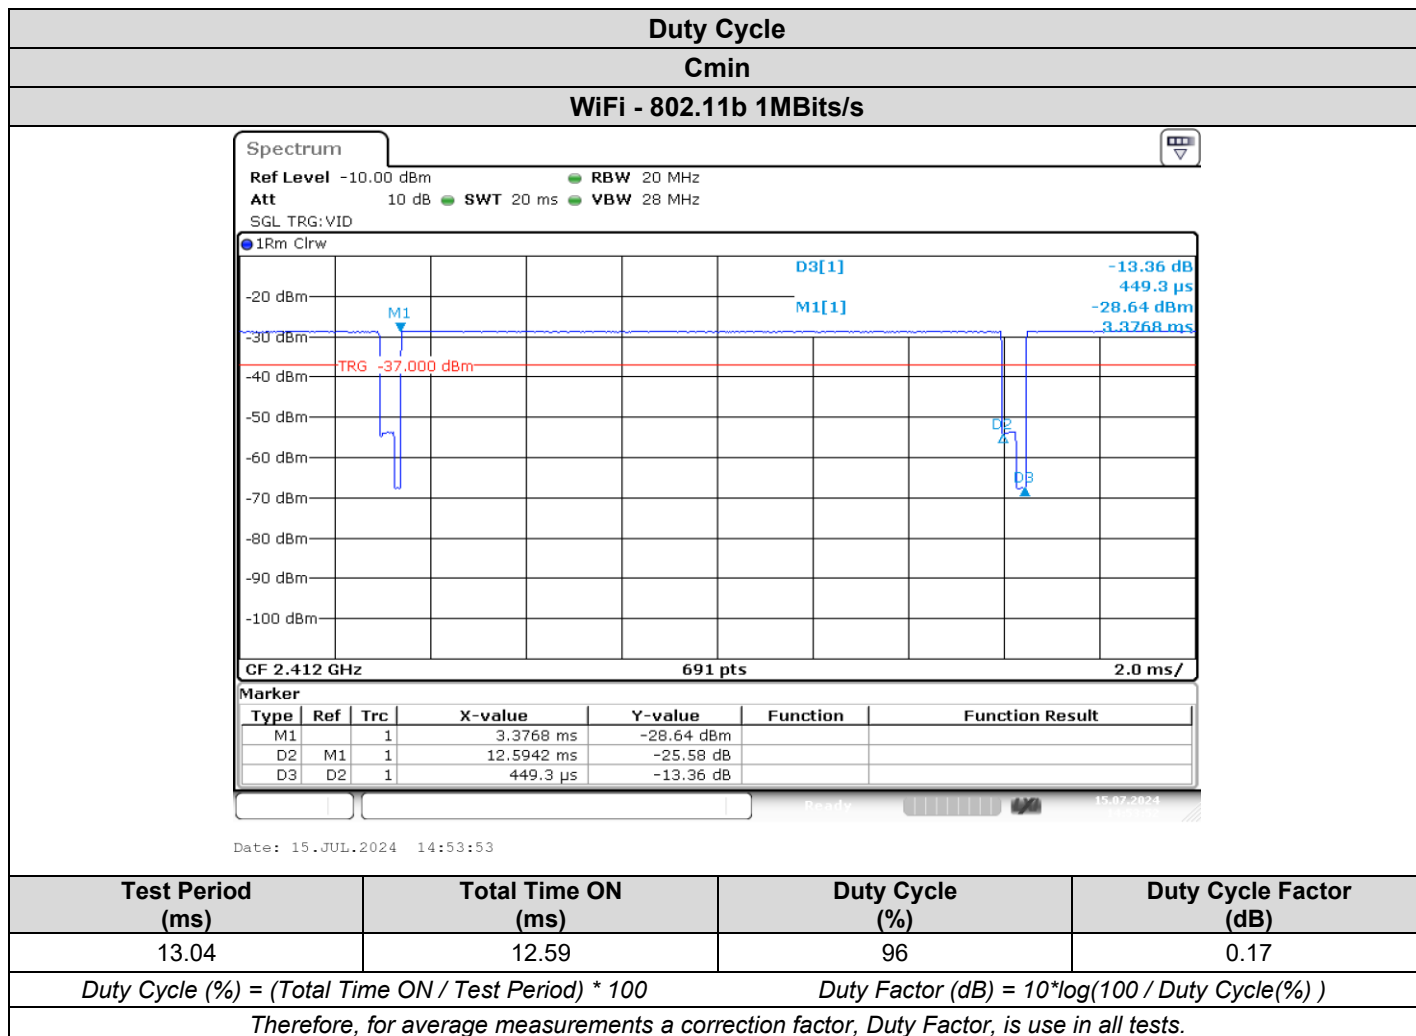

4. OCCUPIED BANDWIDTH

4.1. TEST CONDITIONS

Date of test : July 17, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 22

4.2. TEST SETUP


The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

ANSI C63.10 § 6.9.2 and RSS-Gen Issue 5 § 6.7

- RBW used in the range of 1% to 5% of the anticipated emission bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = Max Hold.
- Sweep = Auto couple.
- Allow the trace to stabilize.
- OBW 99% function of spectrum analyzer used

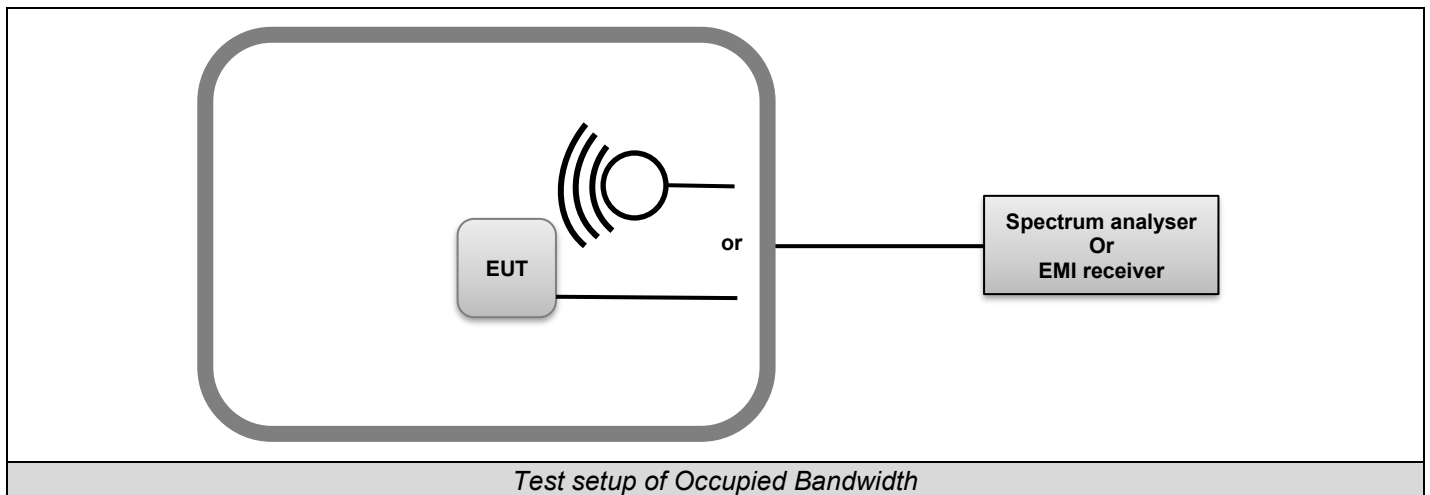

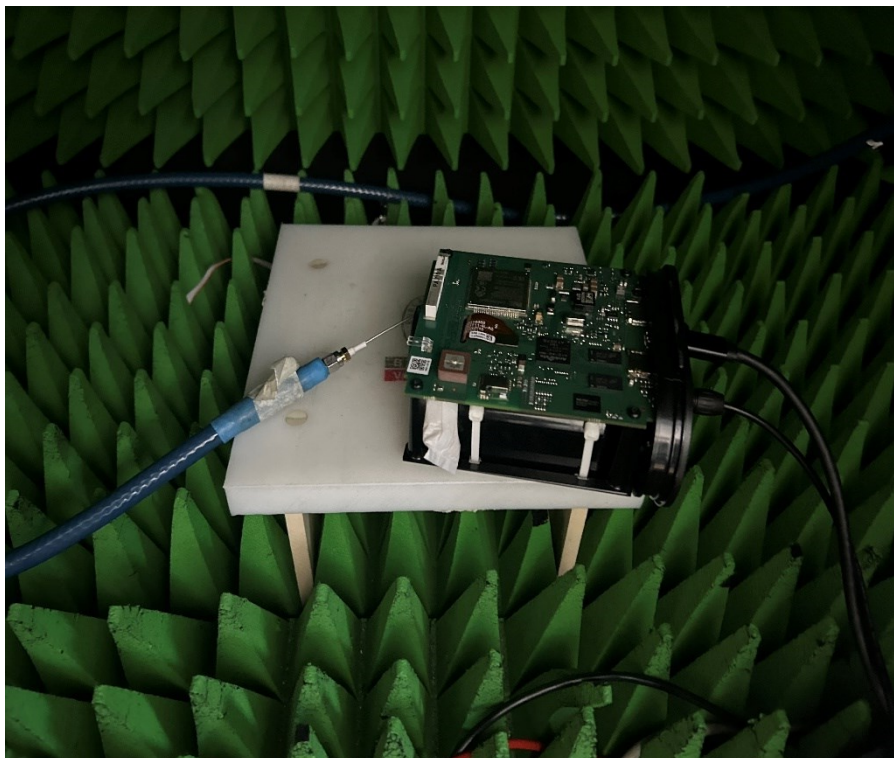


Photo of Occupied bandwidth

4.3. LIMIT

None




4.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
CABLE SMA 1m	RADIAL	11GHz	A5329862	07/23	07/24
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25

4.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION


None

4.6. RESULTS

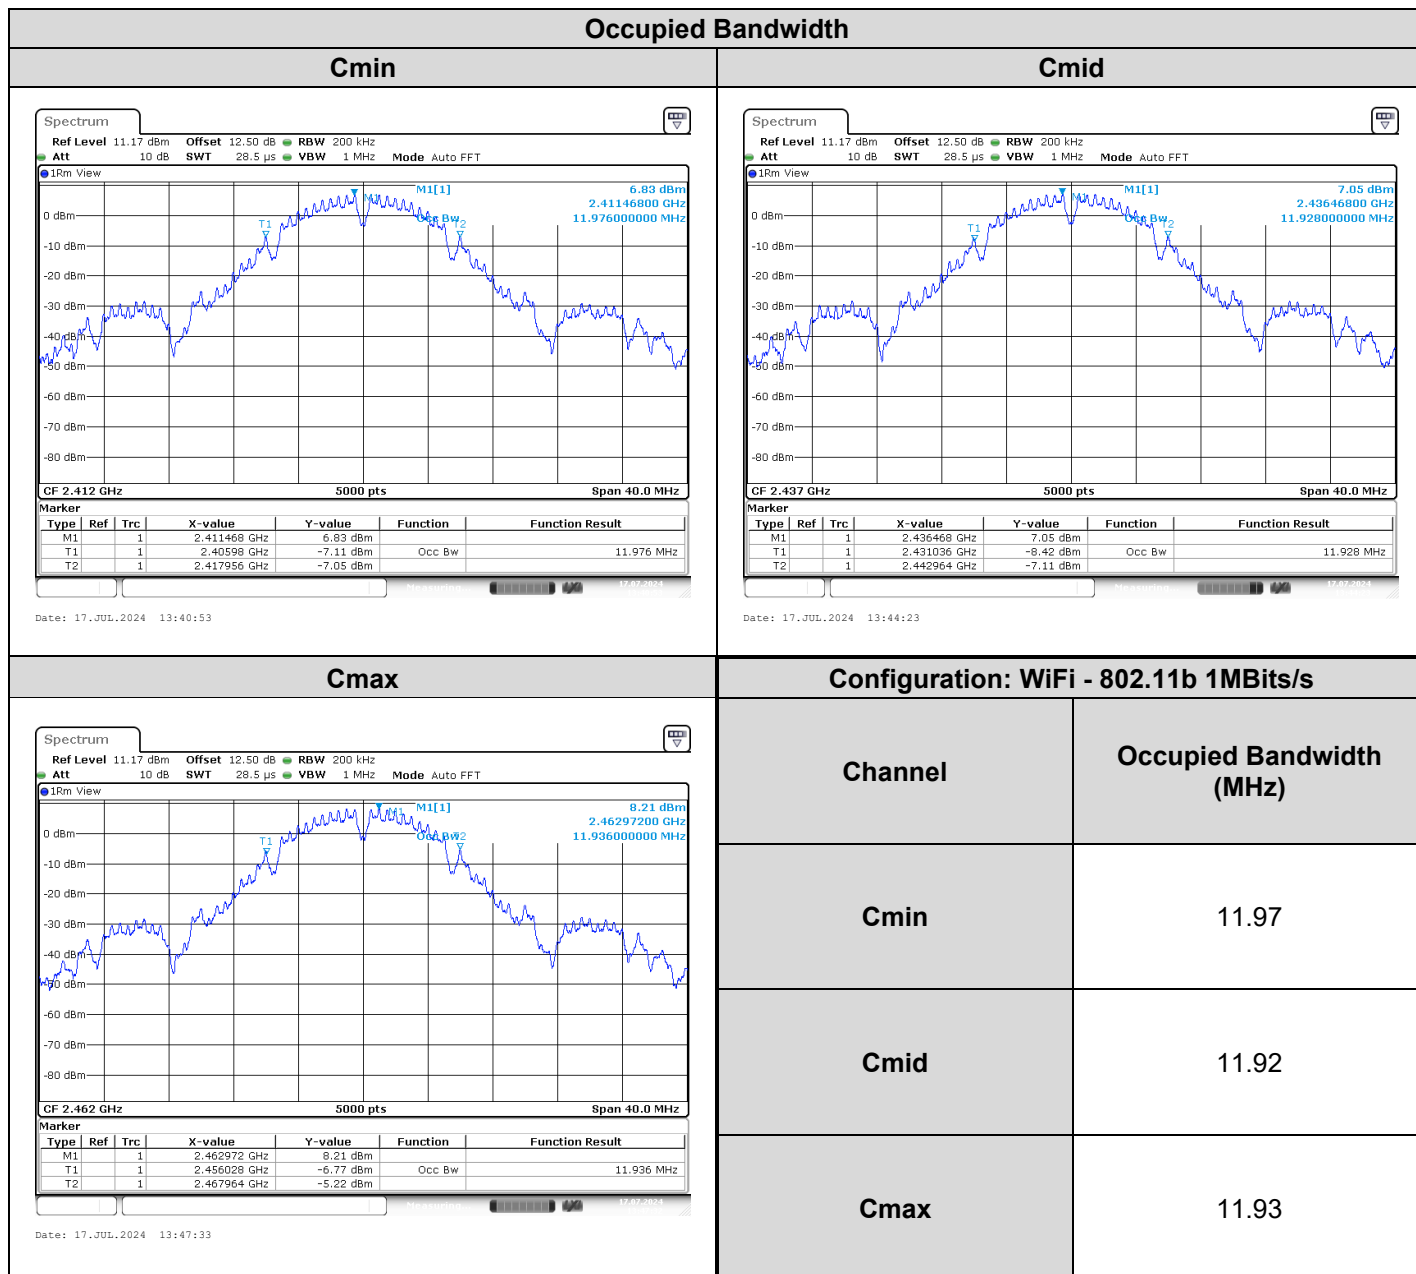


Occupied Bandwidth


Cmin

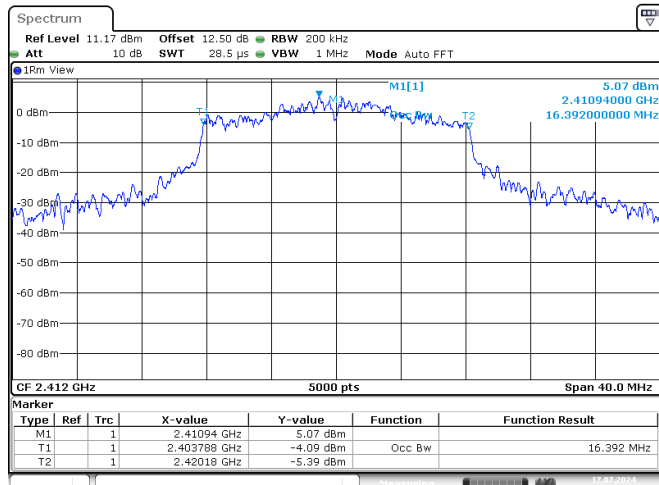

Cmid

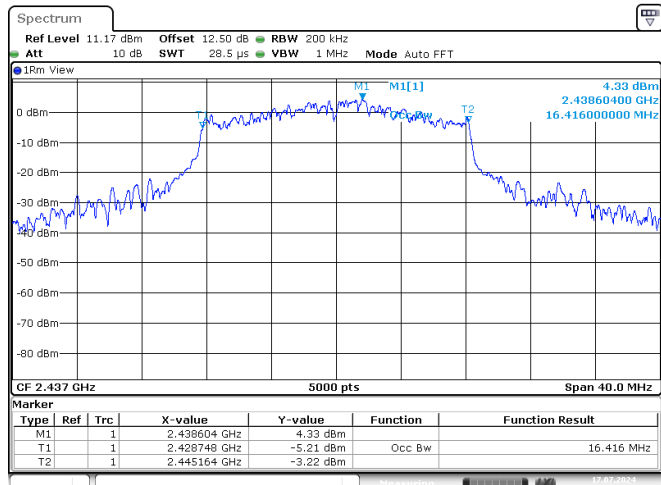

Cmax

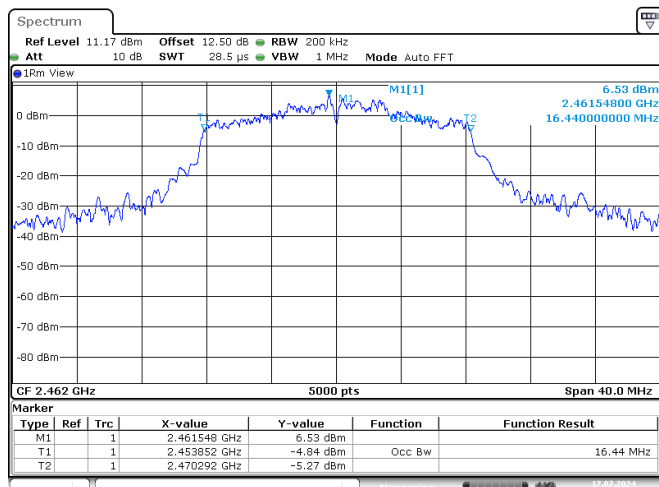


Configuration: WiFi - 802.11g 6Mbits/s


Channel	Occupied Bandwidth (MHz)
Cmin	16.39
Cmid	16.41
Cmax	16.44

Occupied Bandwidth


Cmin

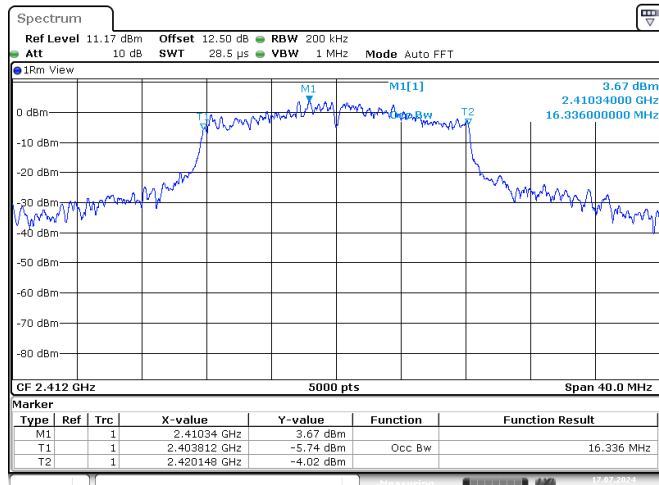

Cmid

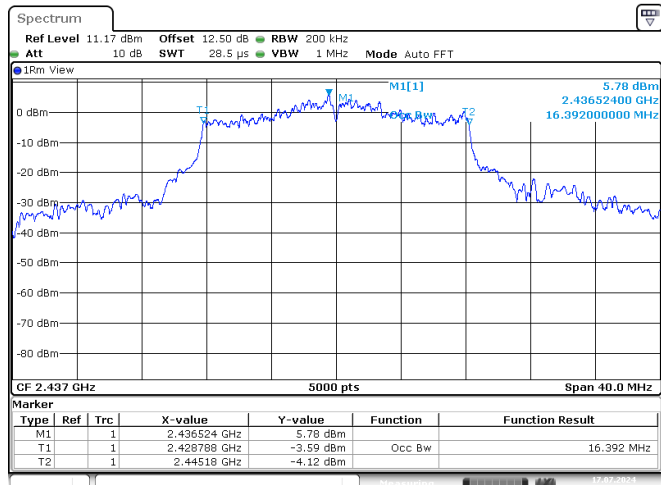

Cmax

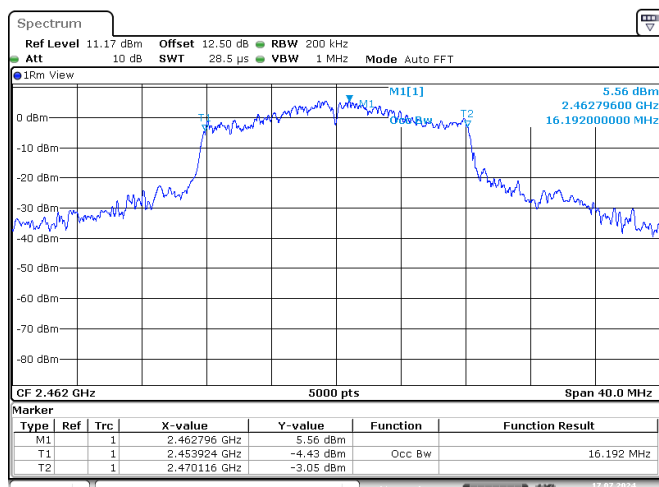

Configuration: Choisissez

Channel

Occupied Bandwidth (MHz)

Cmin

16.33

Cmid

16.39

Cmax

16.19

4.7. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **RSS-GEN** limits.

5. 6dB BANDWIDTH

5.1. TEST CONDITIONS

Date of test : July 17, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 22

5.2. TEST SETUP


The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.2

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

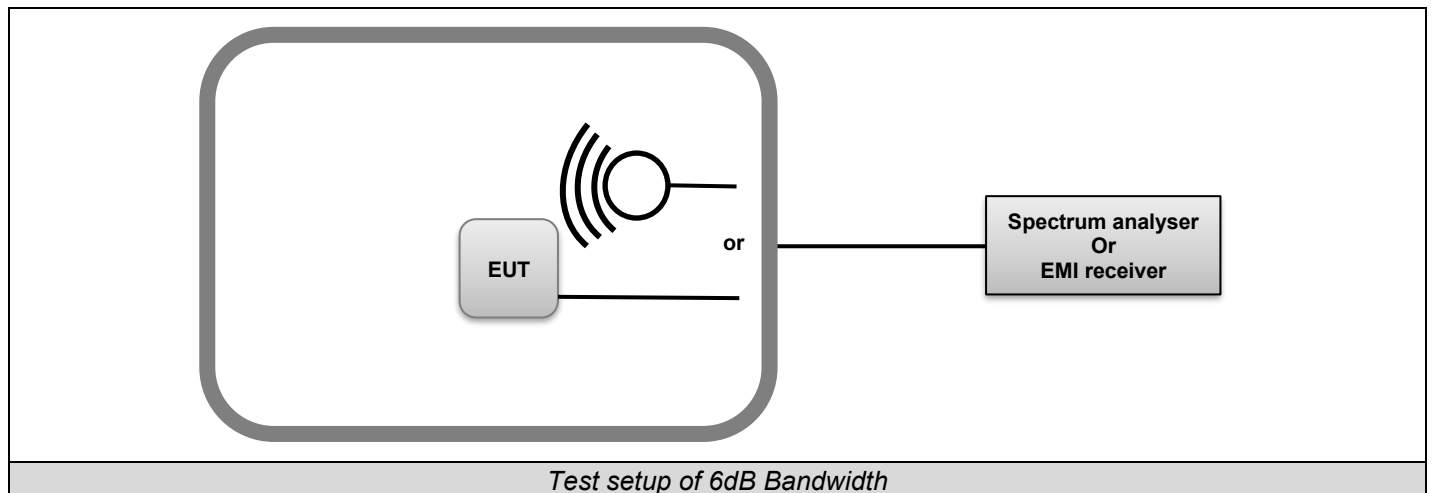

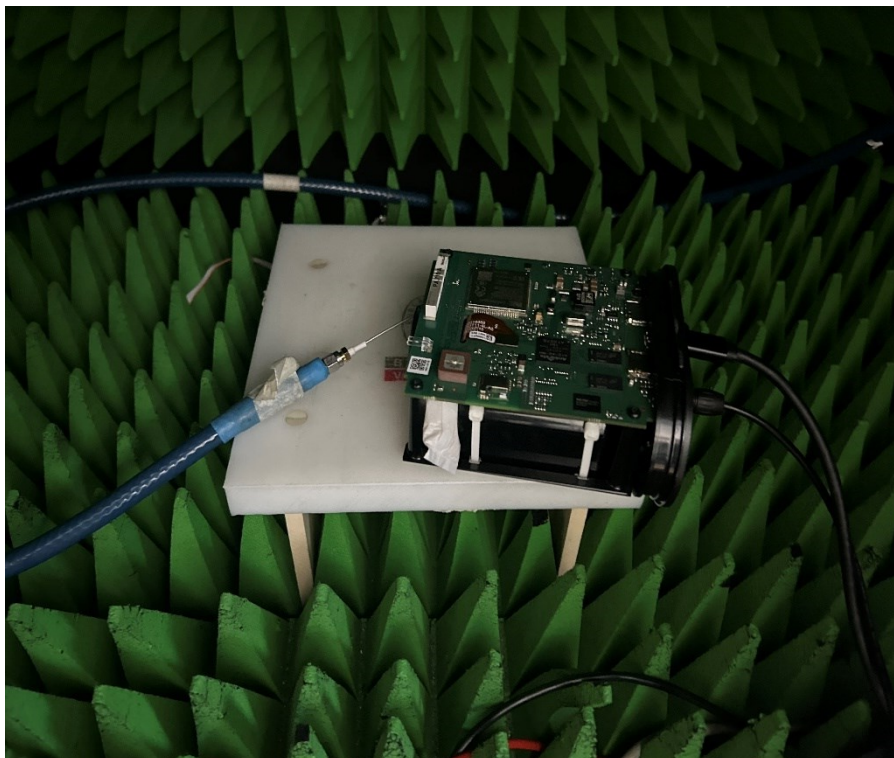


Photo of 6dB bandwidth

5.3. *LIMIT*

Frequency range	6dB bandwidth
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≥500kHz




5.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
CABLE SMA 1m	RADIAL	11GHz	A5329862	07/23	07/24
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25

5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION


None

5.6. RESULTS

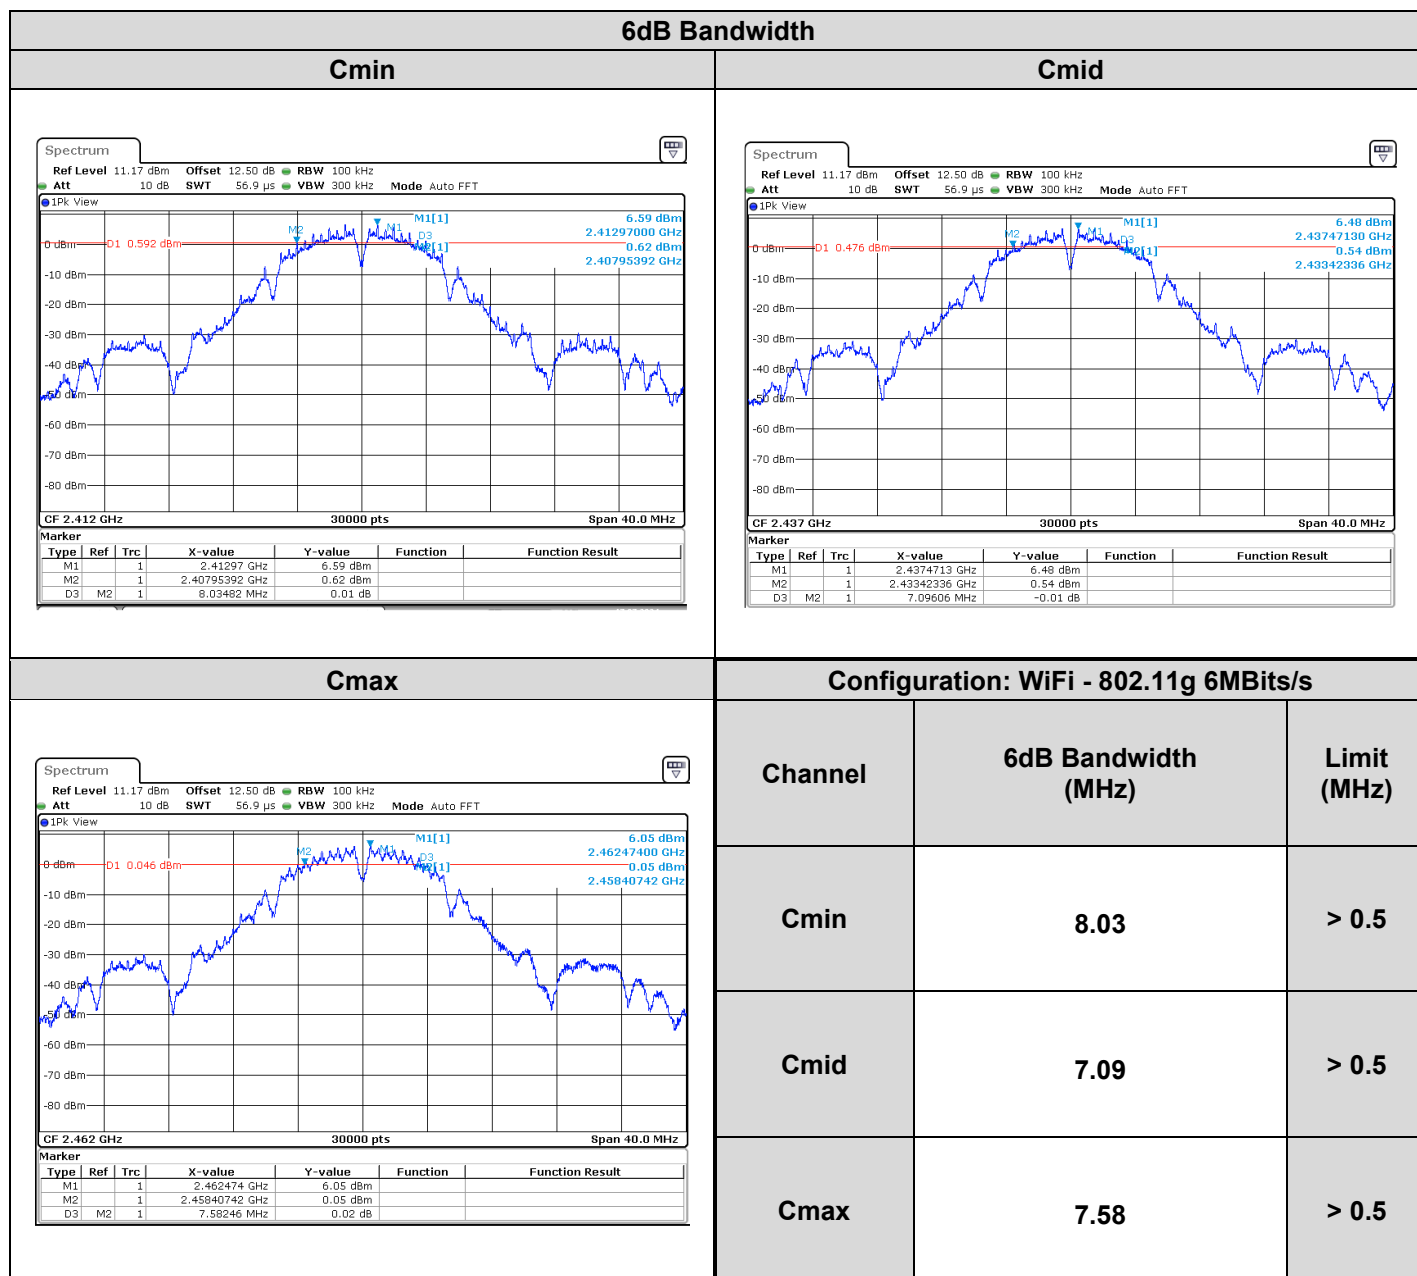


6dB Bandwidth


Cmin

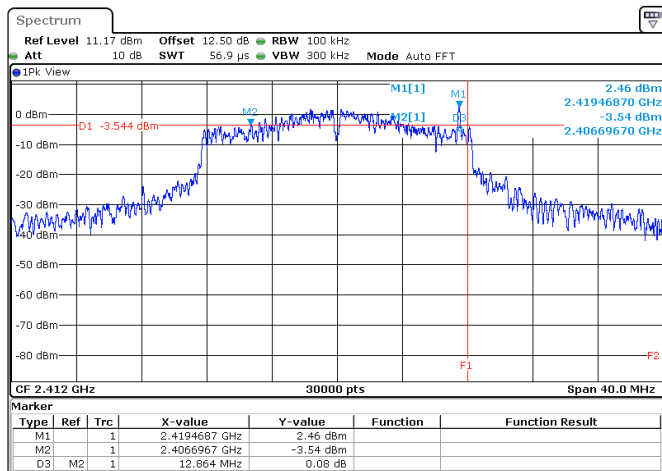

Cmid

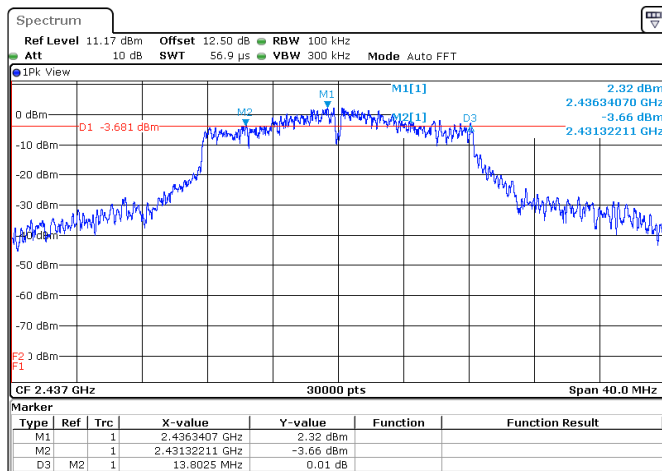

Cmax

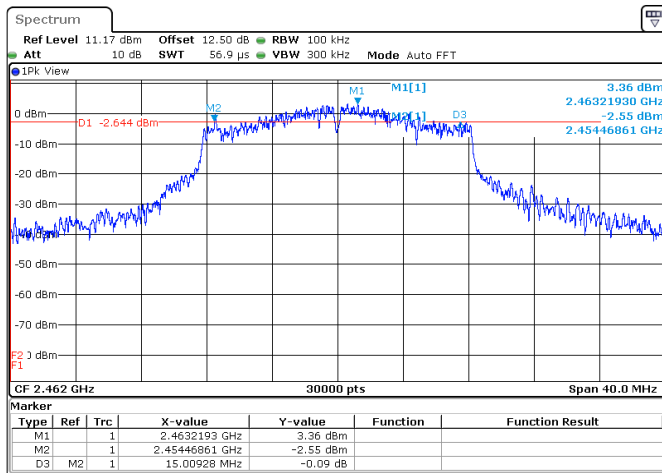


Configuration: WiFi - 802.11g 6Mbits/s


Channel	6dB Bandwidth (MHz)	Limit (MHz)
Cmin	12.86	> 0.5
Cmid	13.8	> 0.5
Cmax	15	> 0.5

6dB Bandwidth


Cmin

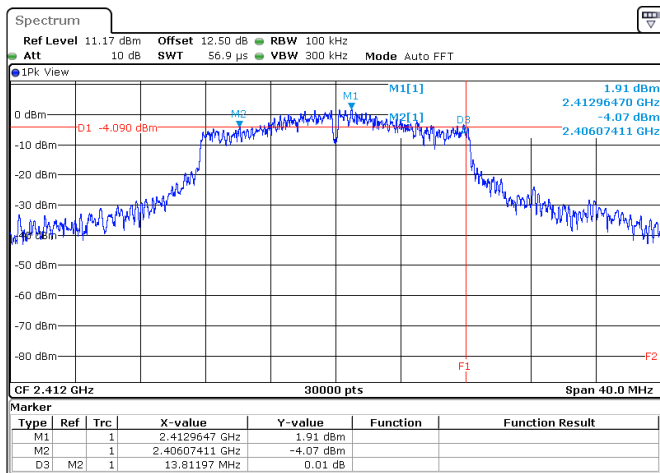

Cmid

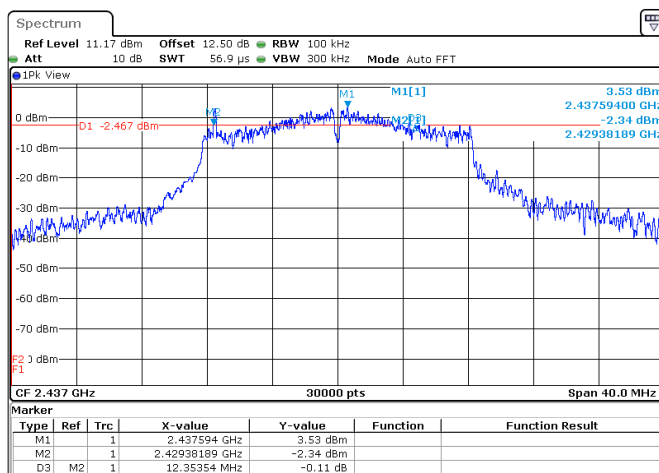

Cmax

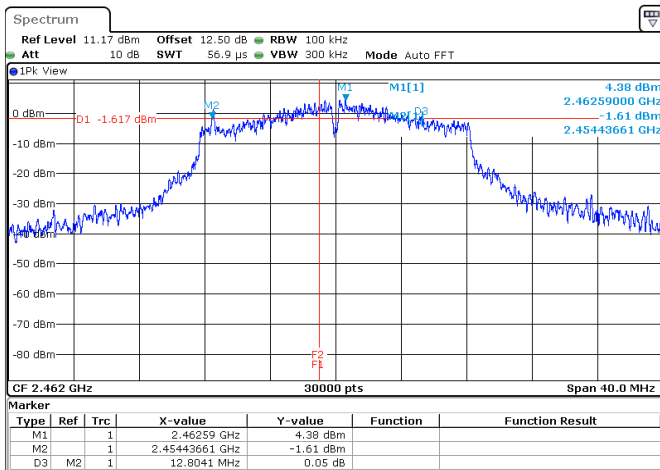

Configuration: WiFi - 802.11n HT20 MCS0

Channel	6dB Bandwidth (MHz)	Limit (MHz)
Cmin	13.811968	> 0.5
Cmid	12.353536	> 0.5
Cmax	12.804096	> 0.5

5.7. CONCLUSION

6dB Bandwidth measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1. TEST CONDITIONS

Date of test : July 17, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 22

6.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure used: KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- o Set the RBW $\geq$ DTS bandwidth.
- o Set VBW $\geq 3 \times$ RBW.
- o Set span $\geq 3 \times$ RBW
- o Sweep time = auto couple.
- o Detector = peak.
- o Trace mode = max hold.
- o Allow trace to fully stabilize.
- o Use peak marker function to determine the peak amplitude level.

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.2

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- o Set the RBW = 1 MHz.
- o Set the VBW $\geq 3 \times$ RBW
- o Set the span $\geq 1.5 \times$ DTS bandwidth.
- o Detector = peak.
- o Sweep time = auto couple.
- o Trace mode = max hold.
- o Allow trace to fully stabilize.
- o Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.2.2(Method AVGSA-1)

Subclause 11.9.2.2 of ANSI C63.10 is applicable, Method AVGSA-1 uses trace averaging with the EUT transmitting at full power throughout each sweep.


- o a) Set span to at least 1.5 times the OBW.
- o b) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- o c) Set VBW $\geq [3 \times$ RBW].
- o d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- o e) Sweep time = auto.
- o f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- o g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- o h) Trace average at least 100 traces in power averaging (rms) mode.
- o i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.2.2(Method AVGSA-2)

Subclause 11.9.2.2 of ANSI C63.10 is applicable.

Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- a) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- d) Set VBW $\geq [3 \times \text{RBW}]$.
- e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run.”
- i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

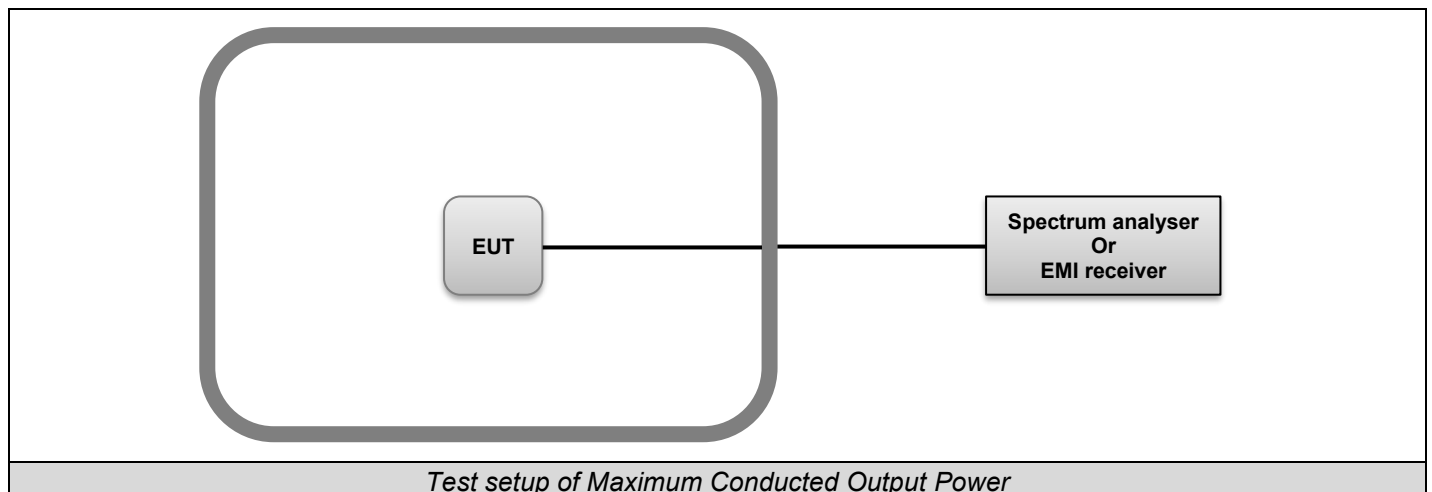

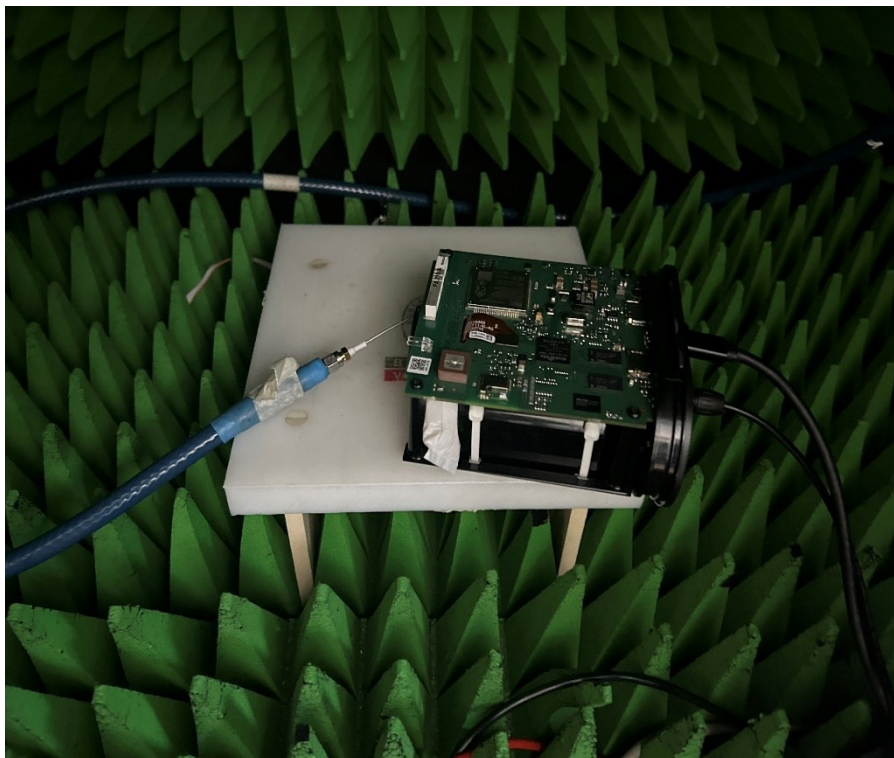


Photo of Maximum Conducted Output Power

6.3. LIMIT

Frequency range	Maximum Conducted Output Power
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≤30dBm*

*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi


6.4. TEST EQUIPMENT LIST


TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
CABLE SMA 1m	RADIALL	11GHz	A5329862	07/23	07/24
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25


6.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

6.6. RESULTS

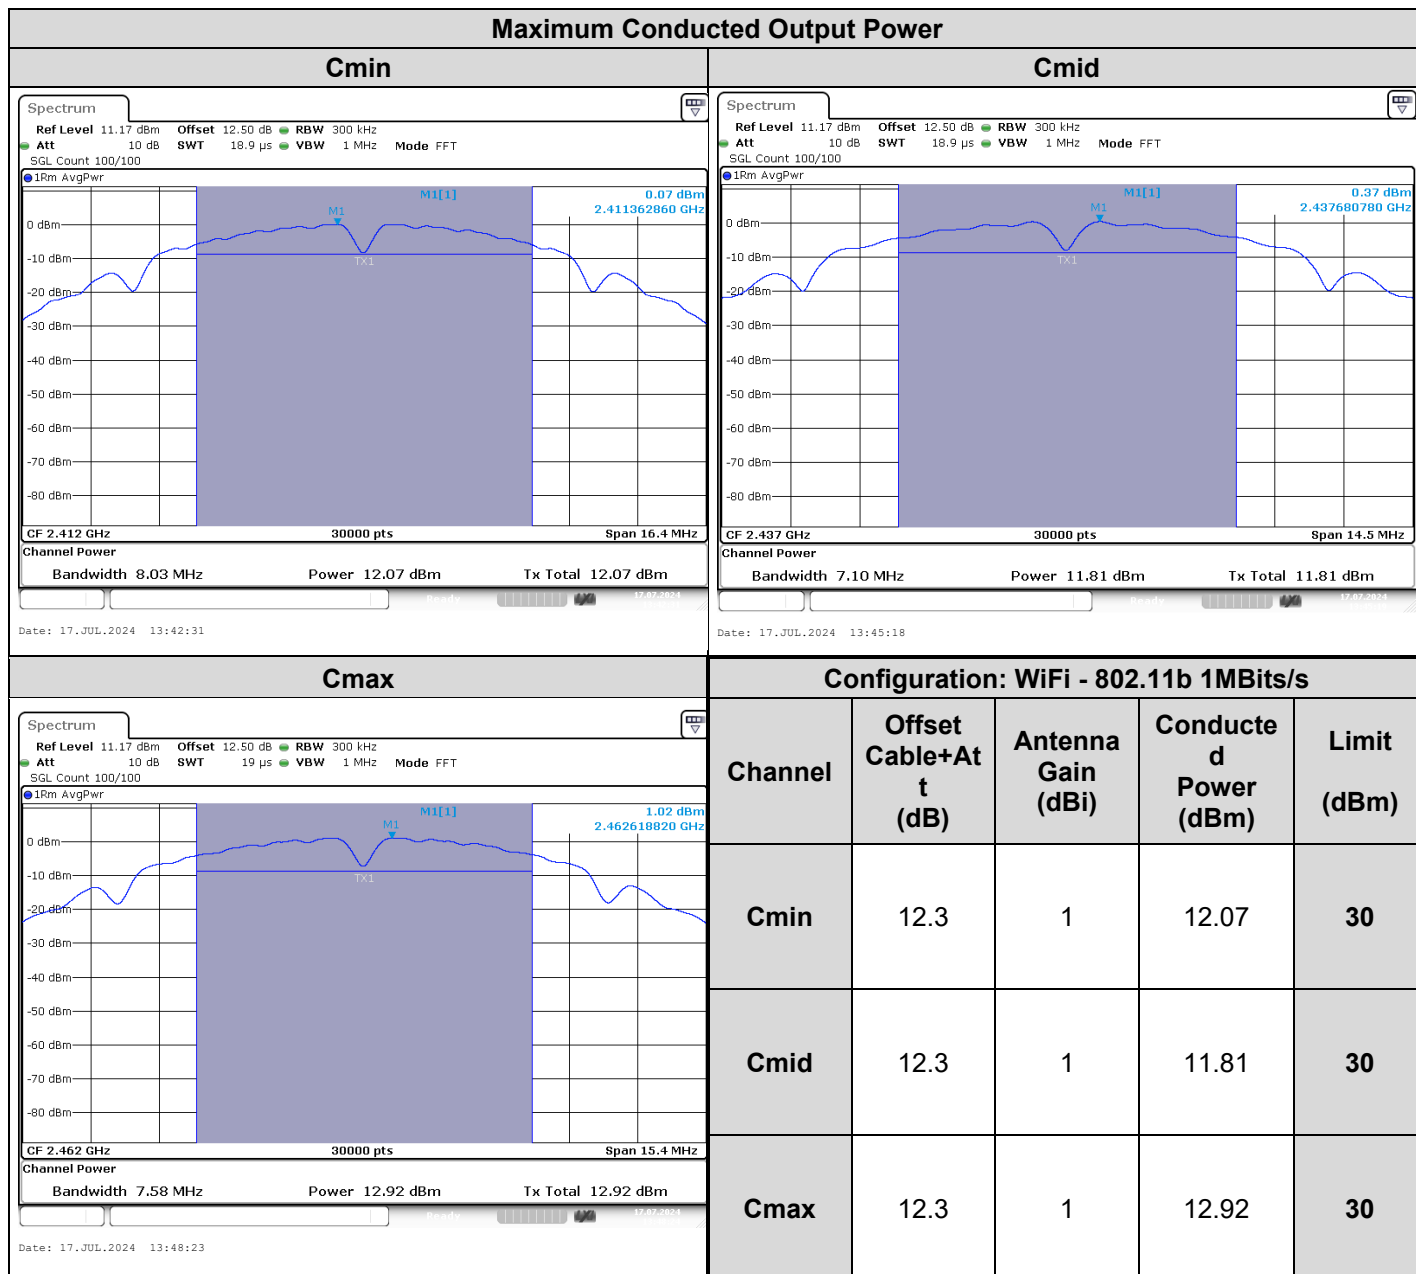

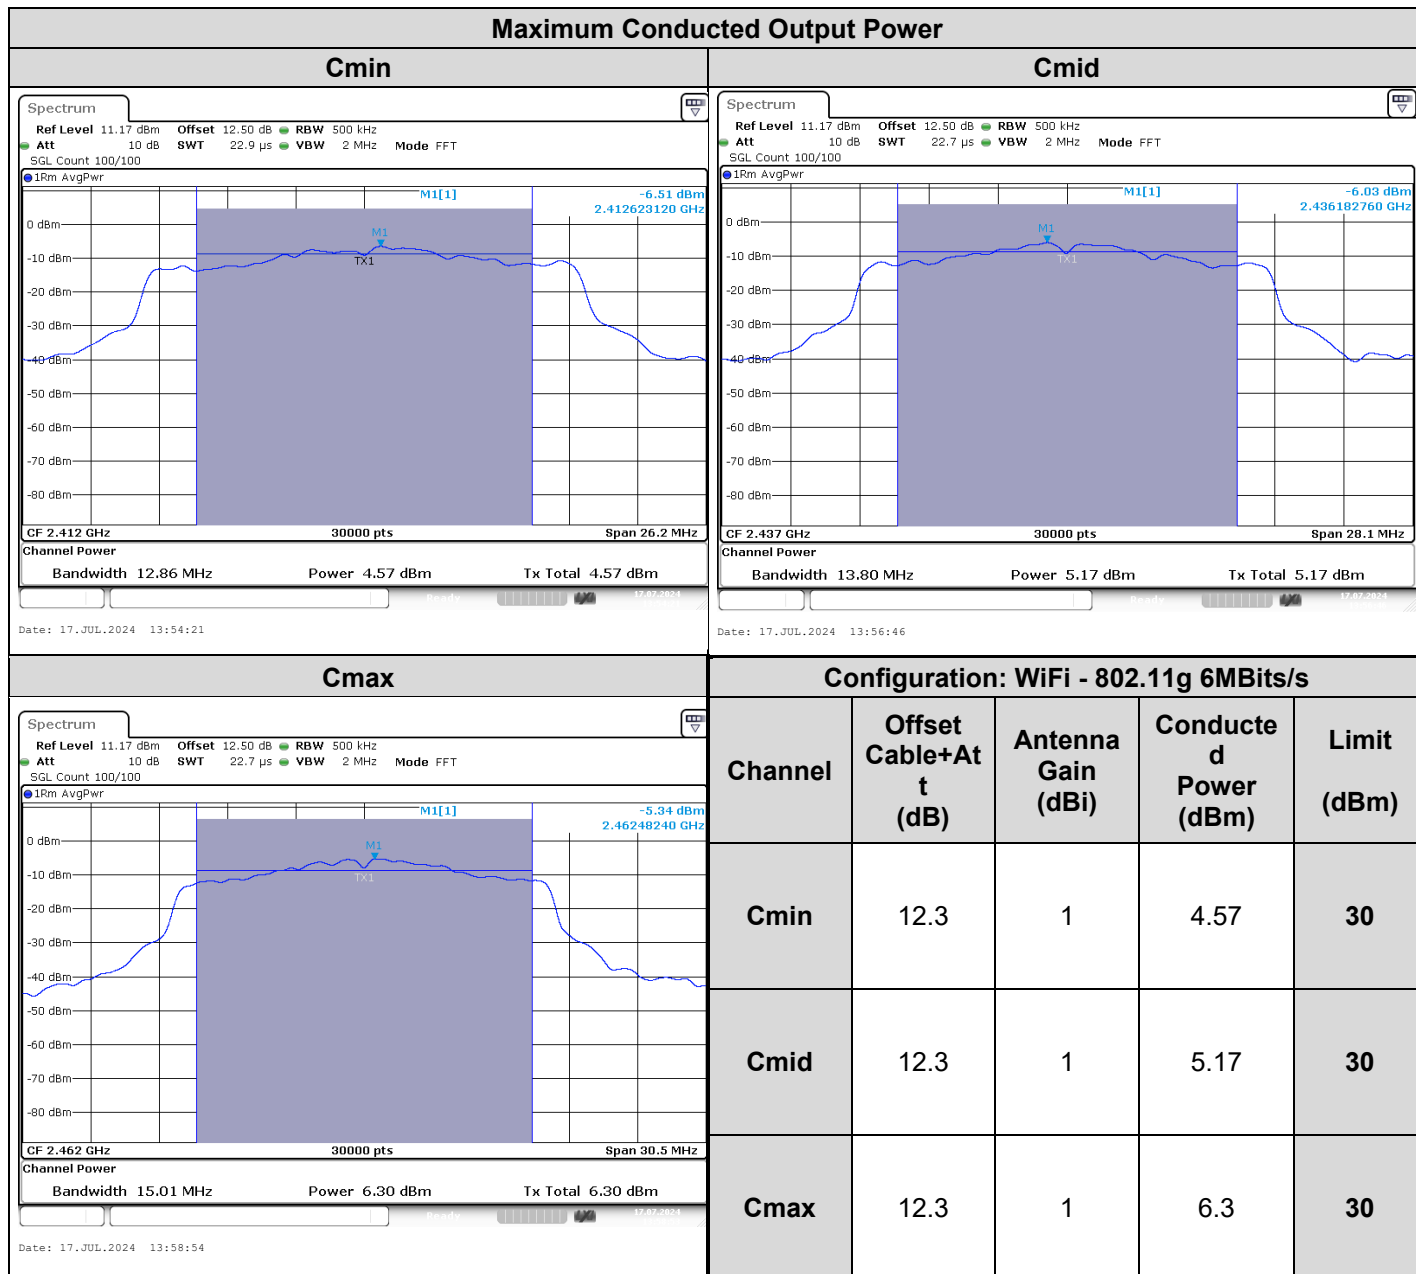

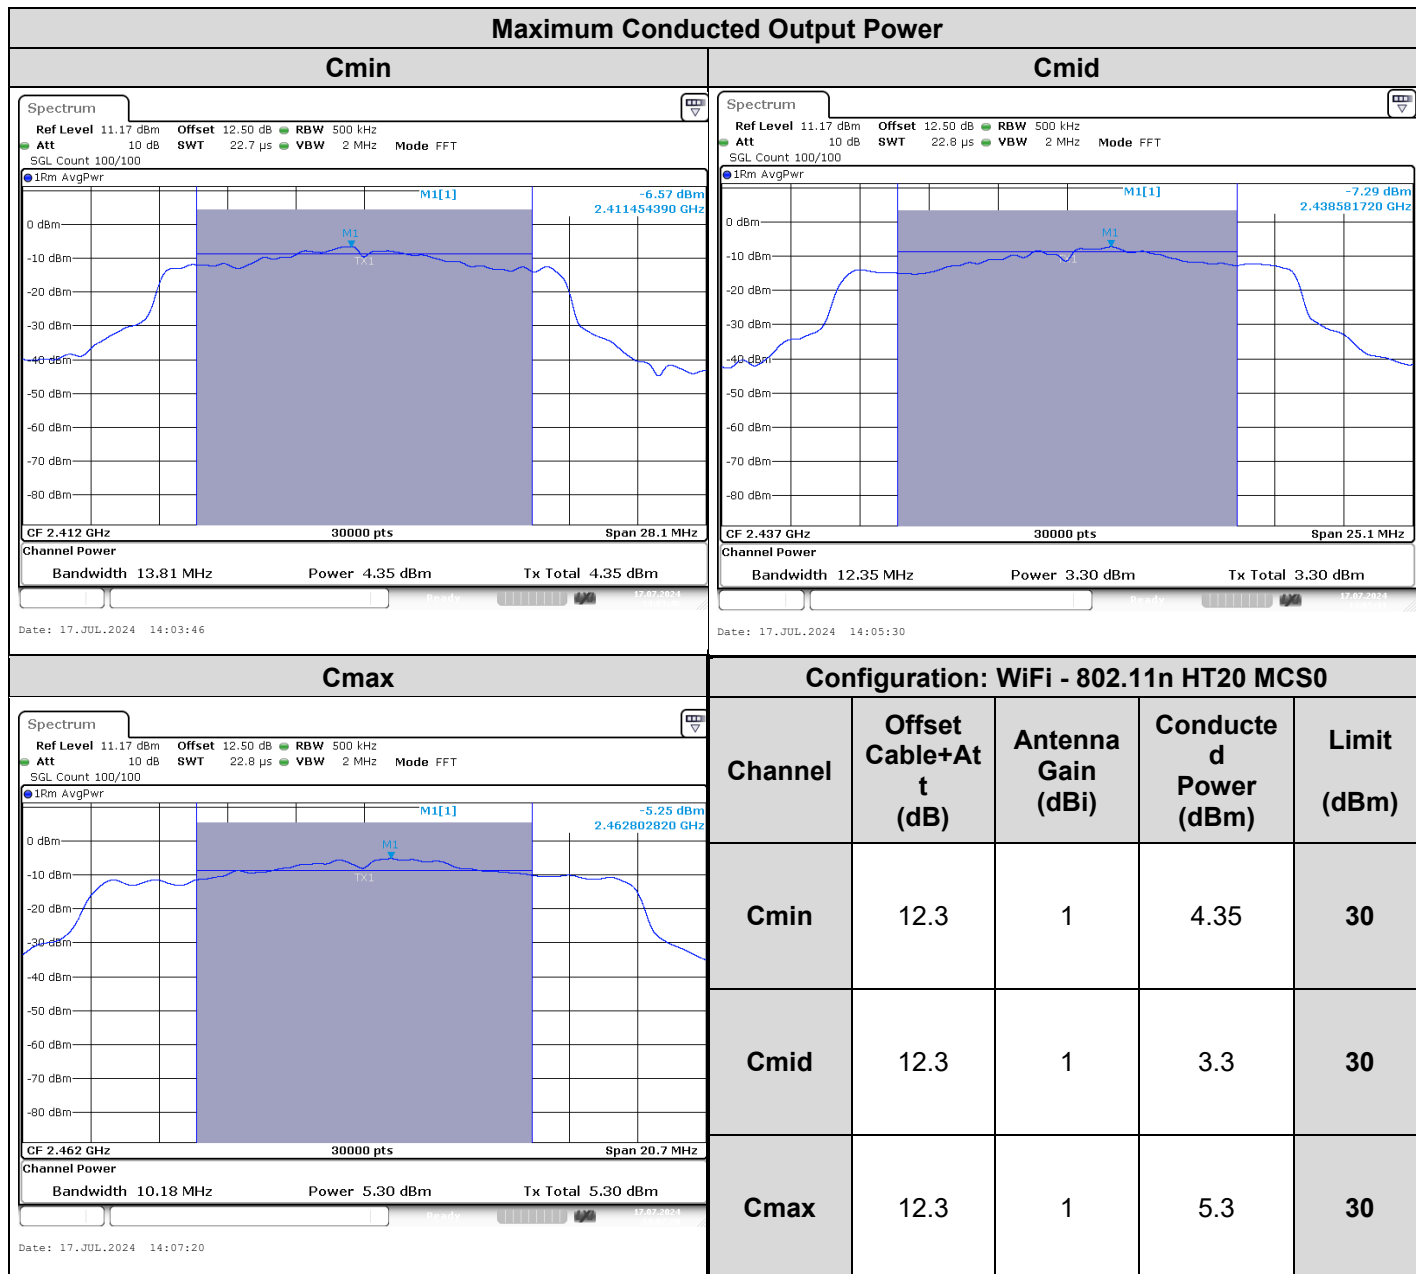

6.7. CONCLUSION

Maximum Output Conducted Power measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

7. POWER SPECTRAL DENSITY

7.1. TEST CONDITIONS

Date of test : July 17, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 22

7.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure used: KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)

Subclause 11.10 of ANSI C63.10 is applicable


- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method AVGPS-1)

Subclause 11.10 of ANSI C63.10 is applicable

Method AVGPS-1 uses trace averaging with EUT transmitting at full power throughout each sweep. The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = power averaging (rms) or sample detector (when rms not available).
- f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (rms) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

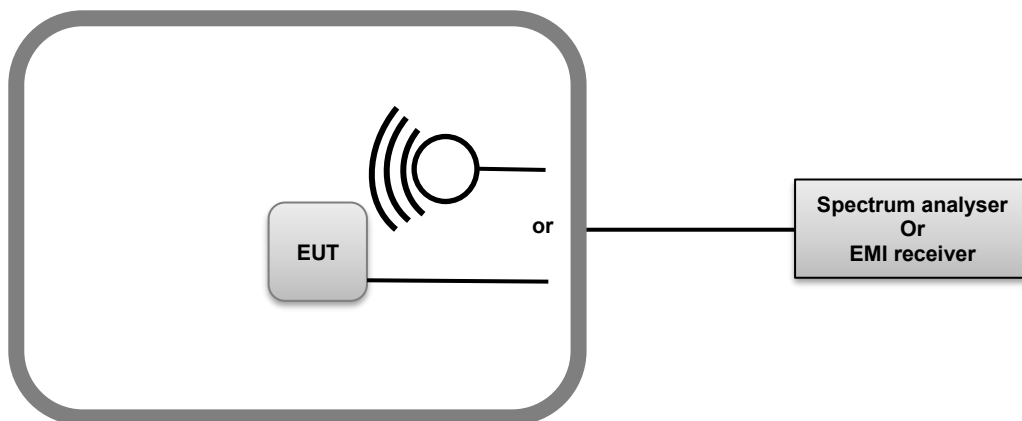

Test setup of Power Spectral Density

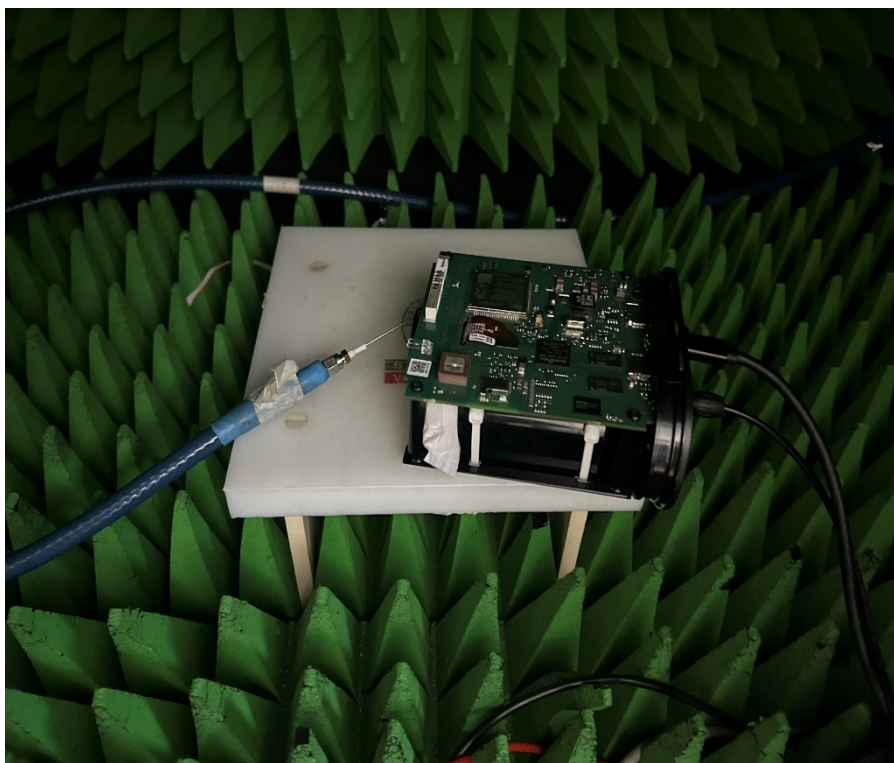


Photo of Power Spectral Density

7.3. LIMIT

Frequency range	Power Spectral Density
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≤8dBm / 3kHz *

*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi


7.4. TEST EQUIPMENT LIST


TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
CABLE SMA 1m	RADIALL	11GHz	A5329862	07/23	07/24
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25


7.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

7.6. RESULTS

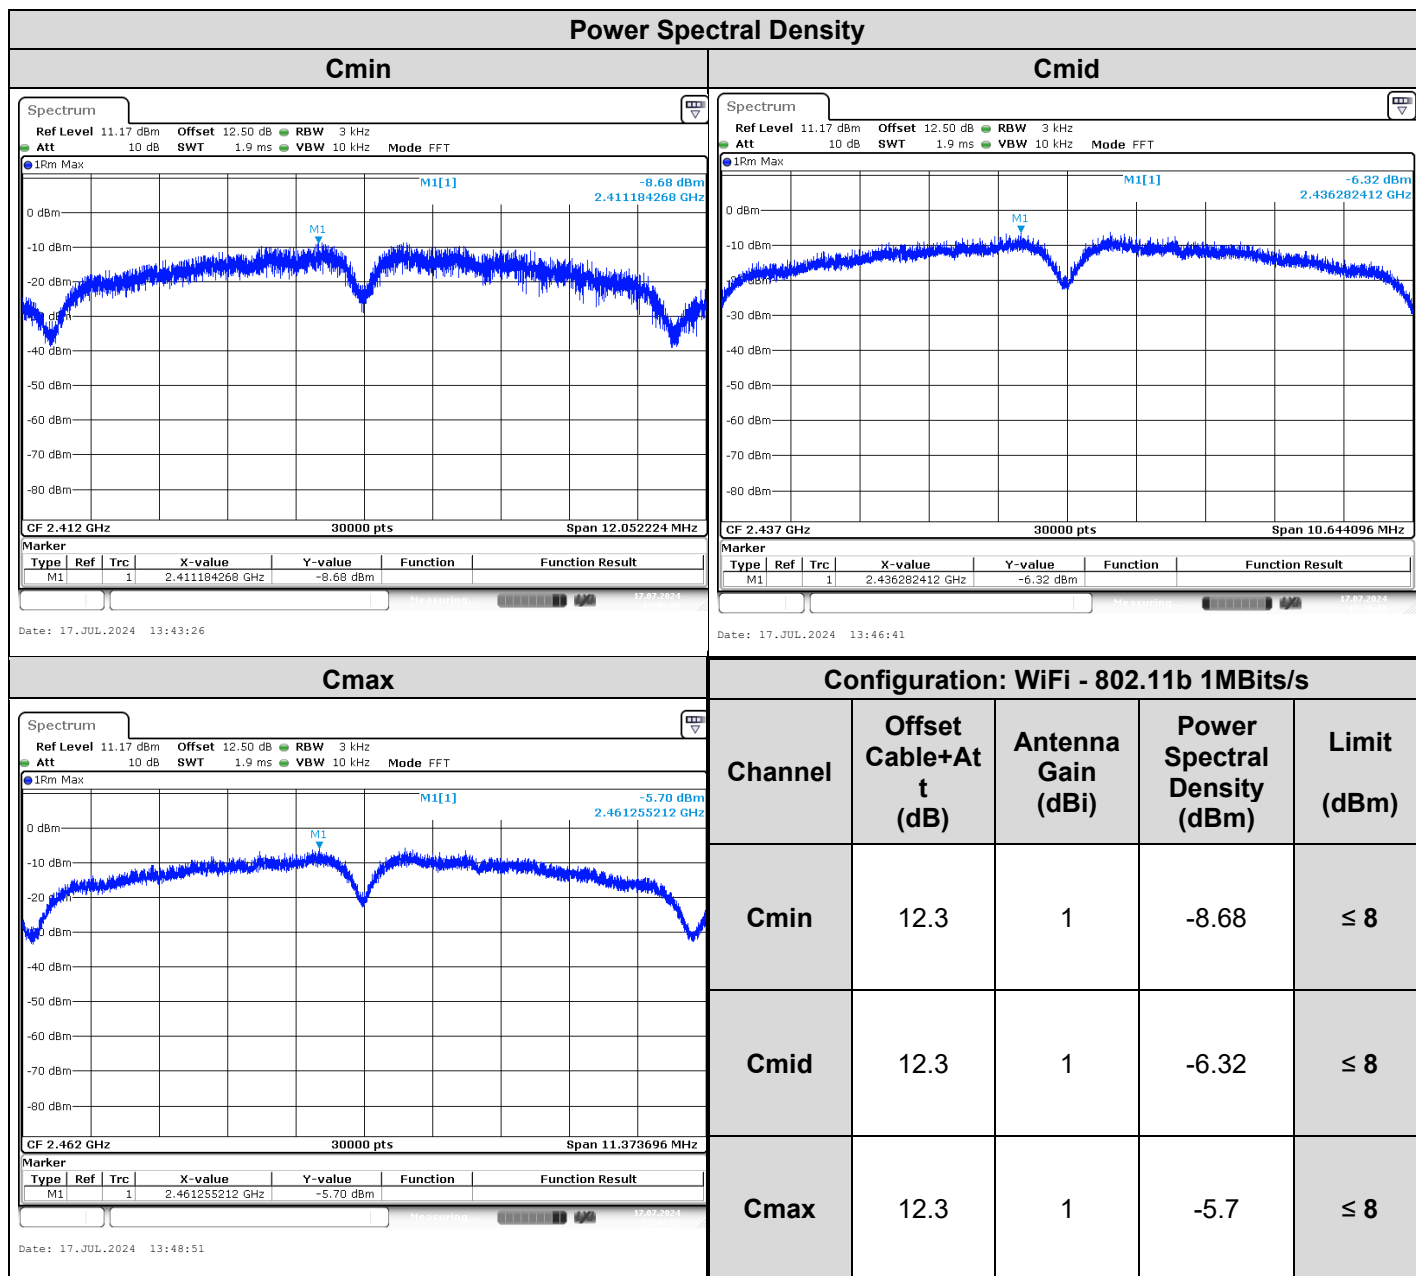

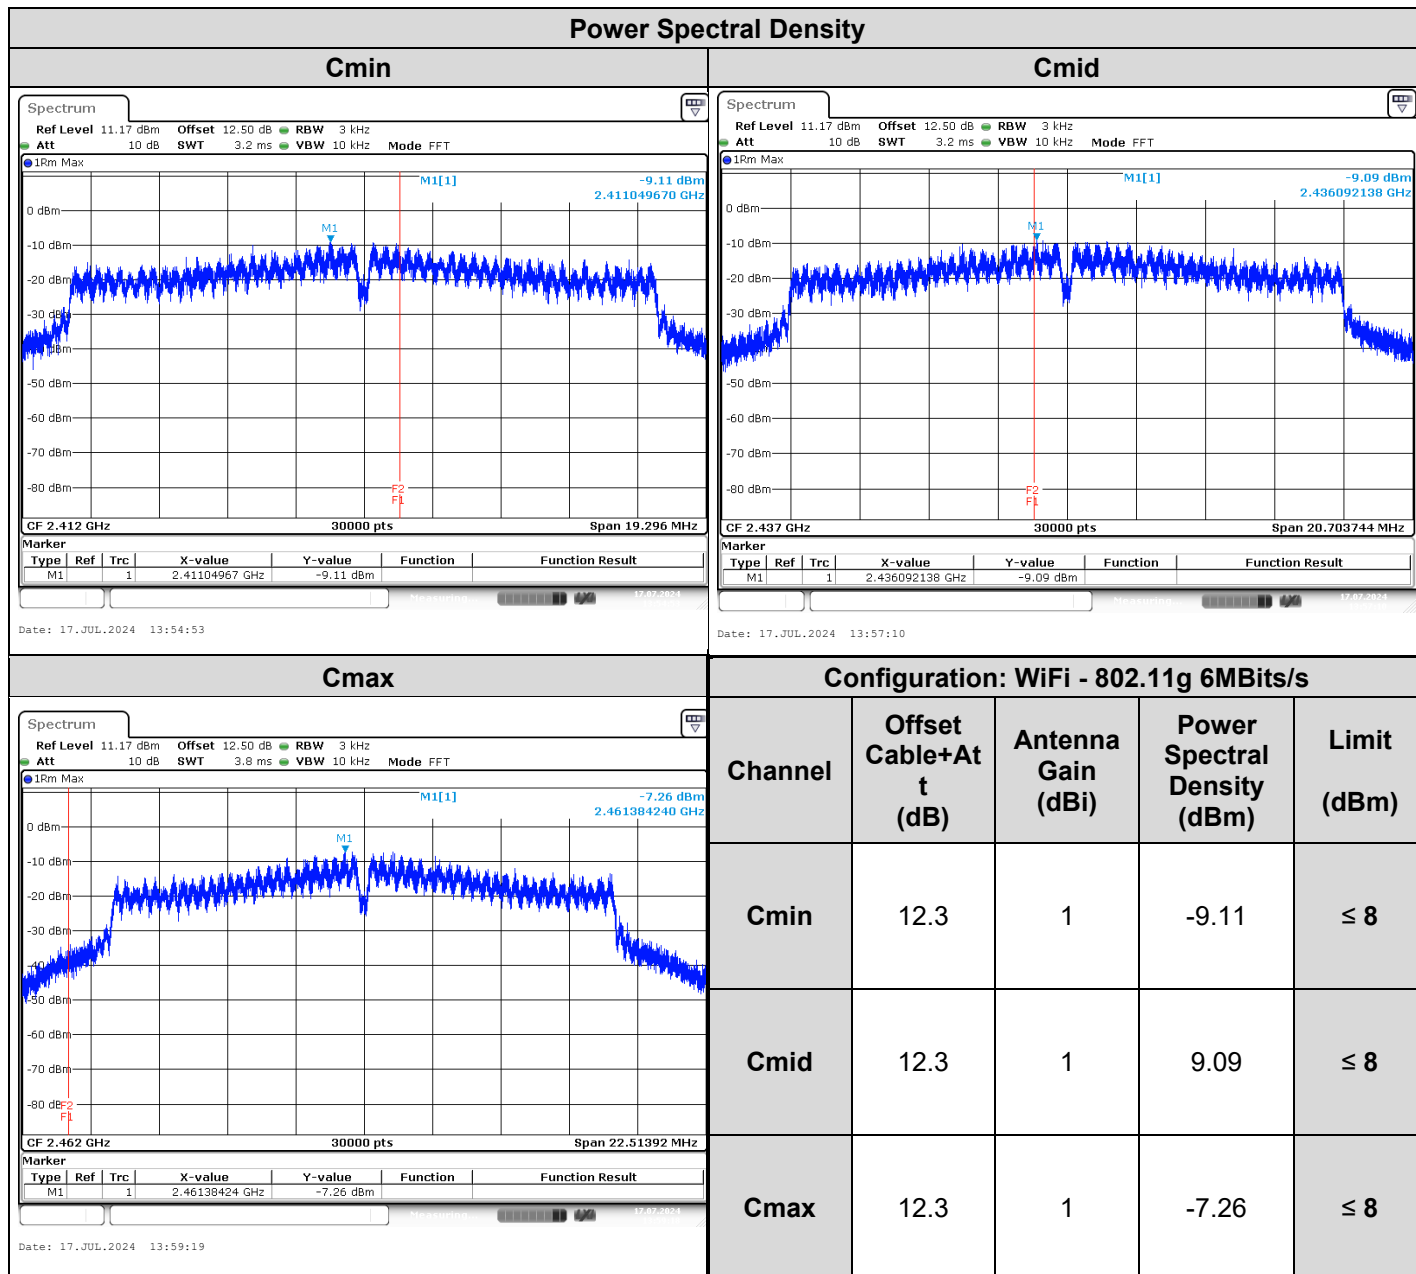

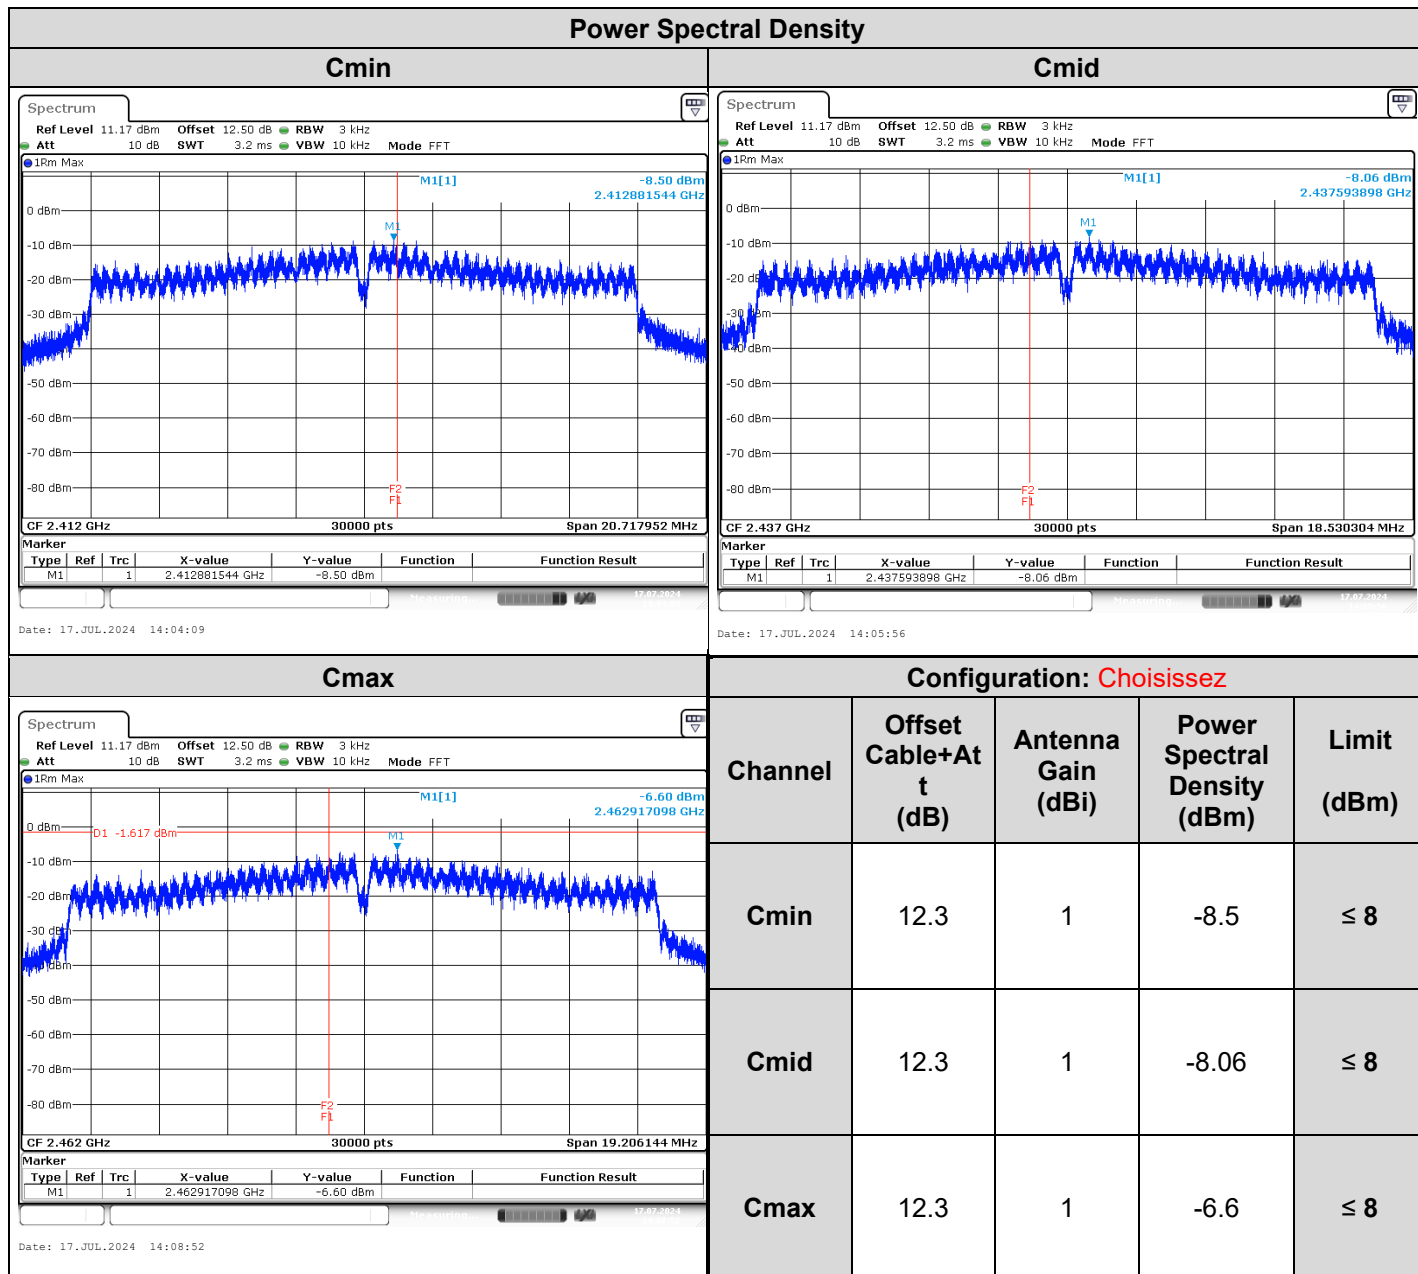

7.7. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

8. UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.1. TEST CONDITIONS


Date of test : July 17, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 22

8.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:
KDB 558074 D01 DTS Meas Guidance v05r02 § 8.5

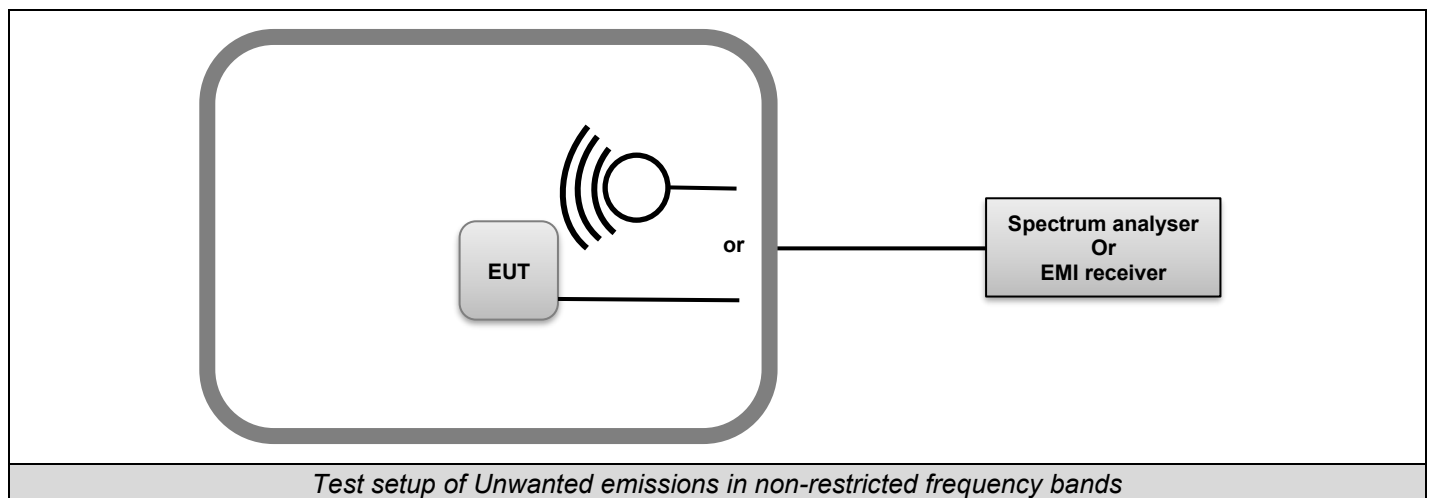

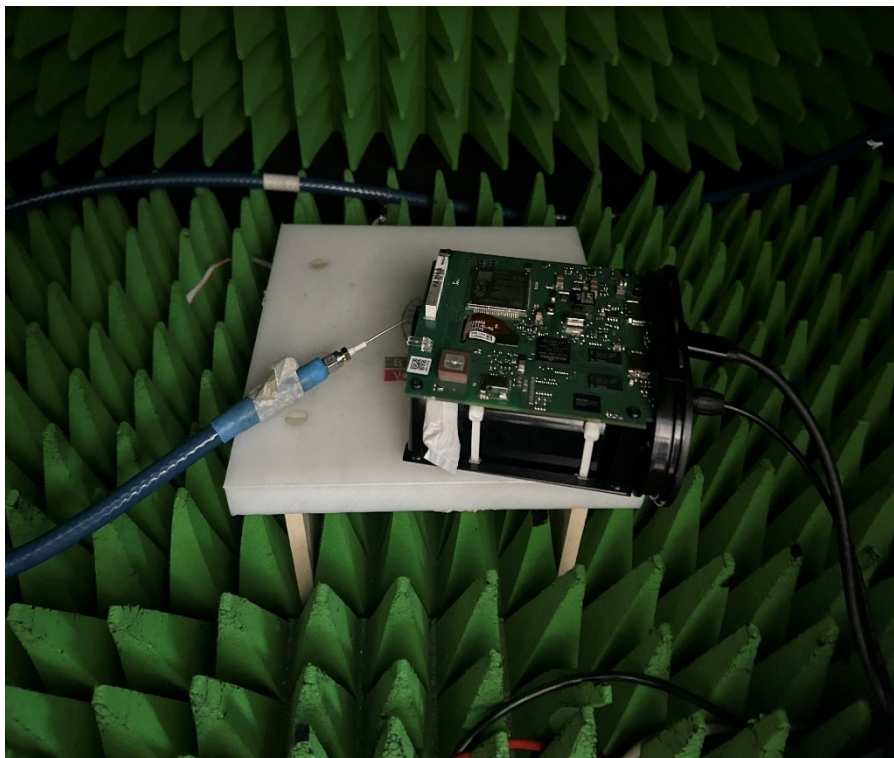


Photo of Unwanted emissions in non-restricted frequency bands



8.3. LIMIT

All Spurious Emissions must be at least 20dB below the Fundamental Radiator Level at the Band Edge of operating frequency band and in non-restricted bands.

8.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
CABLE SMA 1m	RADIALL	11GHz	A5329862	07/23	07/24
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25

8.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E

8.6. RESULTS

8.6.1. Operational frequency band


Unwanted emissions in non-restricted bands at the band edge

Configuration: WiFi - 802.11b 1Mbits/s

Cmin / Cmid / Cmax

Delta limit (dBc) determination

Tx1

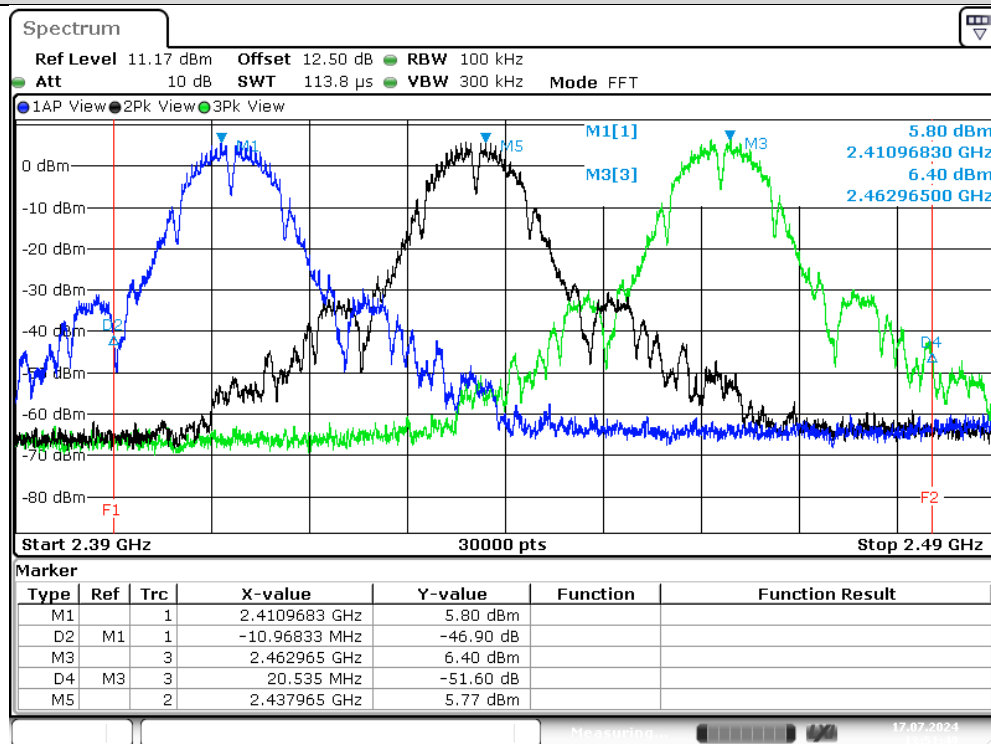

Date: 17.JUL.2024 13:51:48

Frequency (MHz)	Level (dBc)	Limit (dBc)
Cmin	-46.9	-20
Cmax	-51.6	-20



L C I E


Unwanted emissions in non-restricted bands at the band edge

Configuration: WiFi - 802.11g 6MBits/s

Cmin / Cmid / Cmax

Delta limit (dBc) determination

Tx1

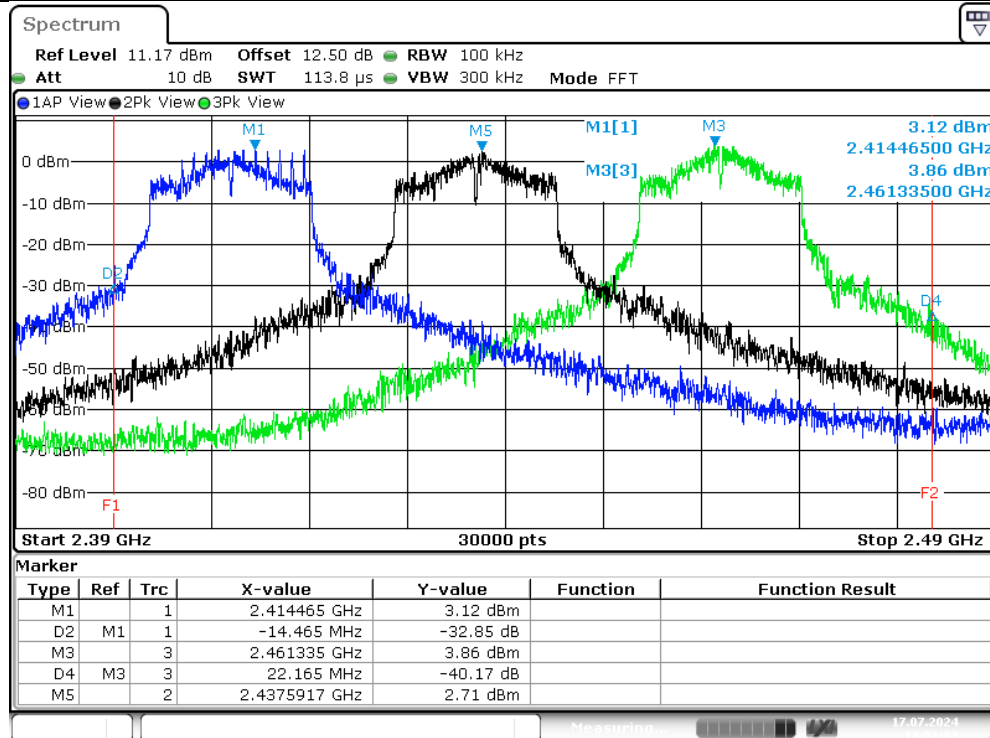

Date: 17.JUL.2024 14:02:04

Frequency (MHz)	Level (dBc)	Limit (dBc)
Cmin	-32.85	-20
Cmax	-40.17	-20



L C I E


Unwanted emissions in non-restricted bands at the band edge

Configuration: WiFi - 802.11n HT20 MCS0

Cmin / Cmid / Cmax

Delta limit (dBc) determination


Tx1

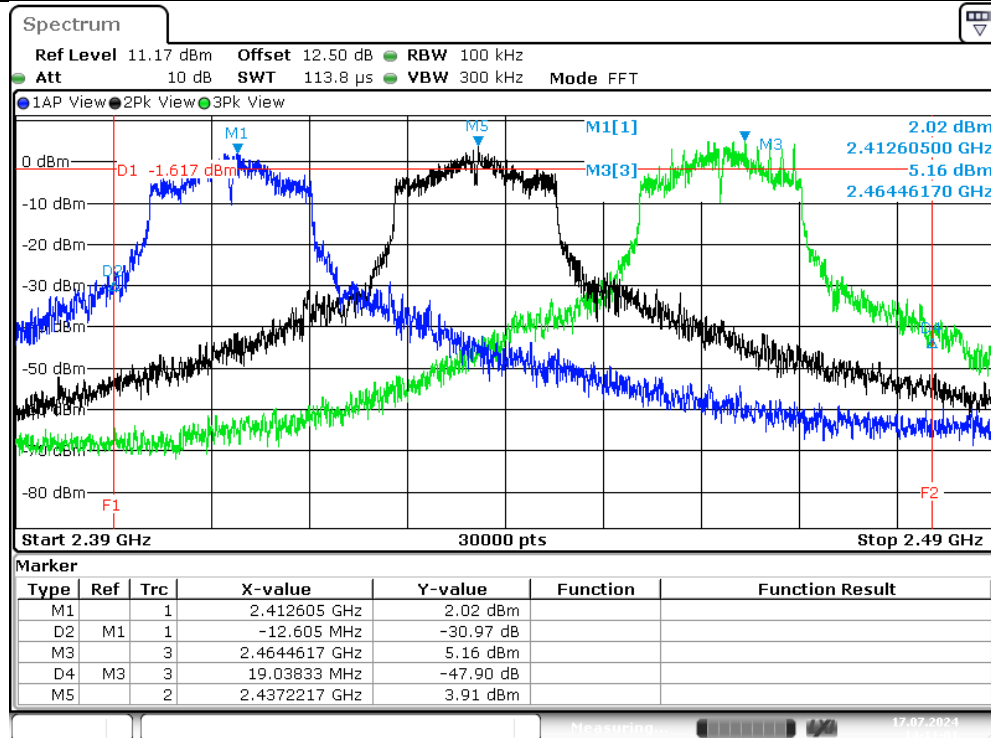

Date: 17.JUL.2024 14:11:01

Frequency (MHz)	Level (dBc)	Limit (dBc)
Cmin	-30.97	-20
Cmax	-47.9	-20

8.6.2. Non restricted frequency bands

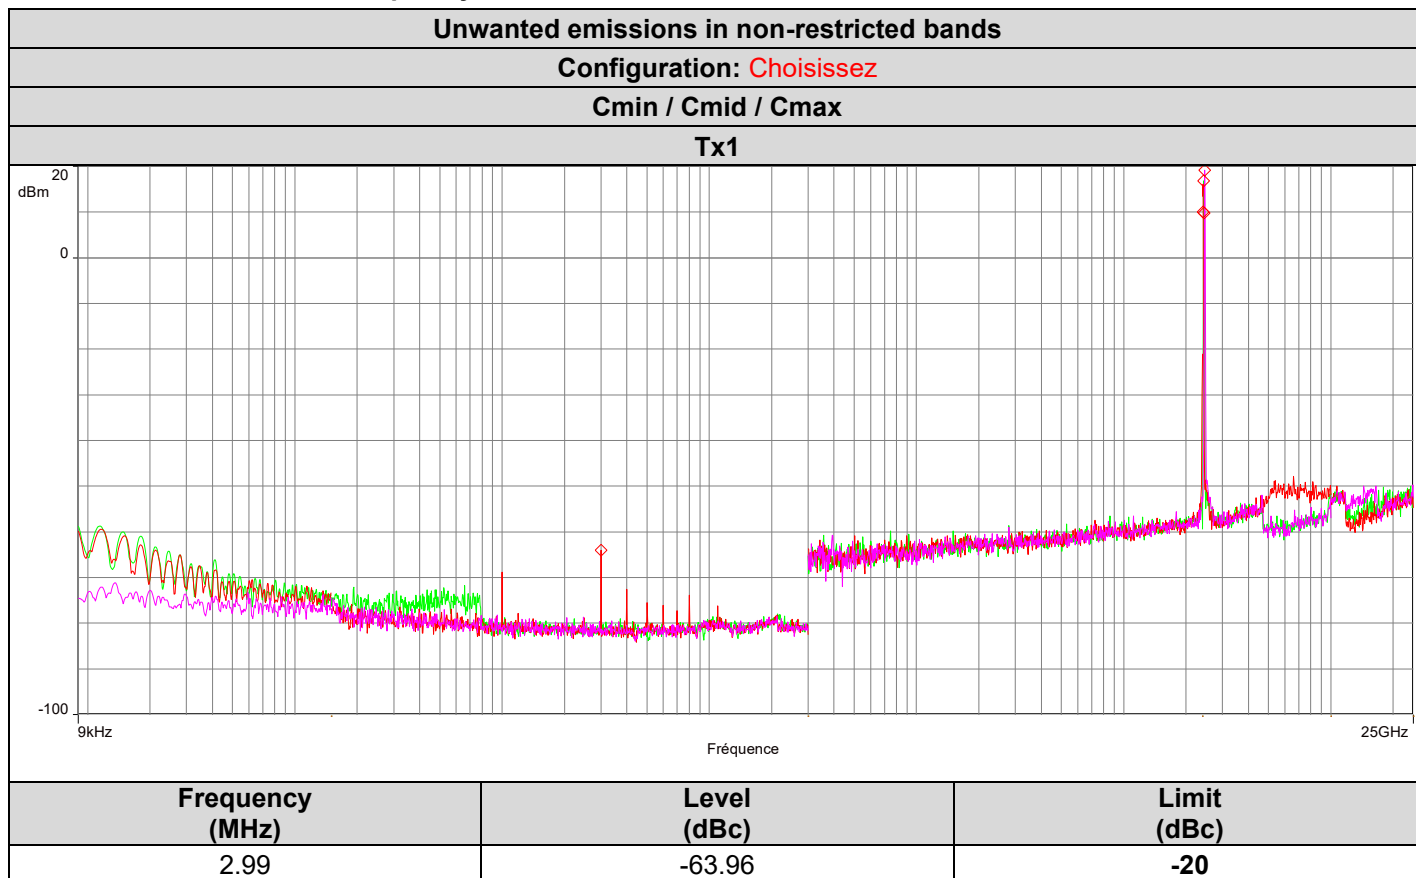

8.7. CONCLUSION

Unwanted emissions in non-restricted bands and at the band edge measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



9. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS

9.1. TEST CONDITIONS

Date of test : July 16, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 21

9.2. TEST SETUP

Test procedure:
ANSI C63.10 & FCC Part 15 subpart C

Following frequency ranges, test setup parameters are different and specified in this table:

Frequency range:	9kHz to 30MHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Parallel, Perpendicular and Ground parallel	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	1m
Antenna Type:	Loop	
RBW Filter:	200Hz below 150kHz / 9kHz above 150kHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	0.8m
Test site:	Full Anechoic Chamber	Open Aera Test Site
Distance EUT - Antenna:	3m	10m
Detector:	Peak	QPeak

Frequency range:	30MHz to 1GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Varied from 1m to 4m
Antenna Type:	Bi-Log	
RBW Filter:	120kHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	0.8m
Test site:	Full Anechoic Chamber	Open Aera Test Site
Distance EUT - Antenna:	3m	10m
Detector:	Peak	QPeak



Frequency range:	1GHz to 14GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Centered on EUT (§6.6.5 ANSI C63-10)
Antenna Type:	Horn	
RBW Filter:	1MHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	1.5m
Test site:	Full Anechoic Chamber	Full Anechoic Chamber
Distance EUT - Antenna:	3m	3m
Detector:	Peak & Average	Peak & Average

Frequency range:	14GHz to 25GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Centered on EUT (§6.6.5 ANSI C63-10)
Antenna Type:	Horn	
RBW Filter:	1MHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	1.5m
Test site:	Full Anechoic Chamber	Full Anechoic Chamber
Distance EUT - Antenna:	1m	1m
Detector:	Peak & Average	Peak & Average

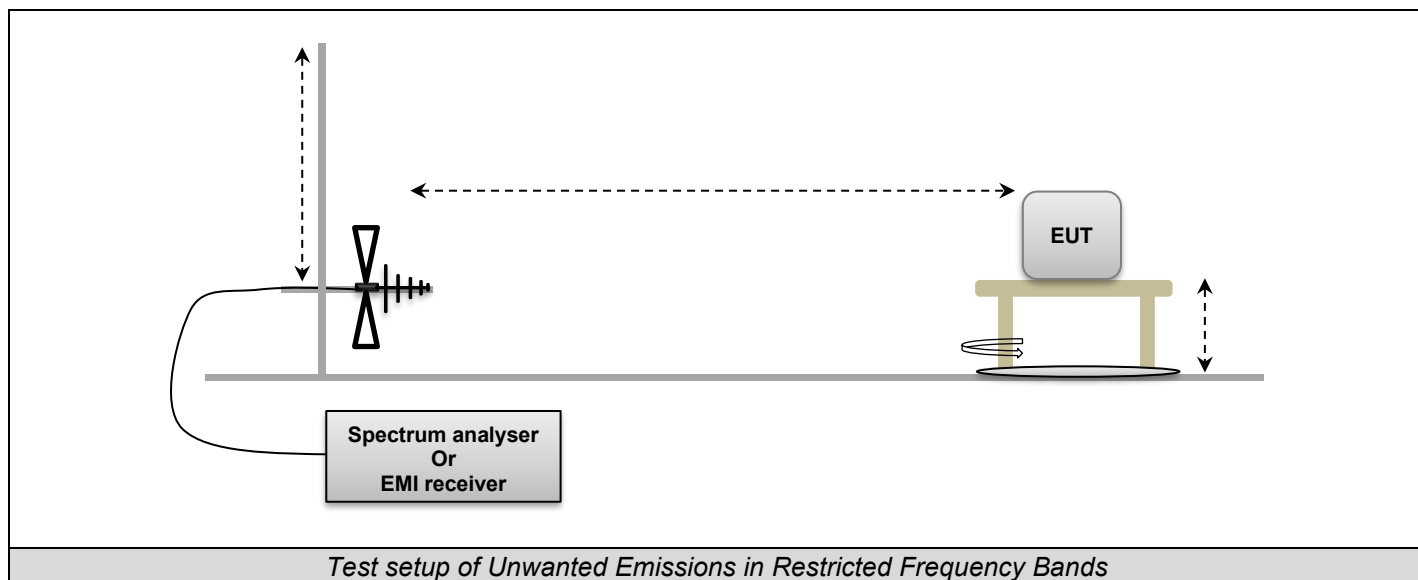




Photo of Unwanted Emissions in Restricted Frequency Bands

9.3. LIMIT

Measure at 300m		
Frequency range	Level	Detector
9kHz-490kHz	67.6dB μ V/m /F(kHz)	QPeak
Measure at 30m		
Frequency range	Level	Detector
490kHz-1.705MHz	87.6dB μ V/m /F(kHz)	QPeak
1.705MHz-30MHz	29.5dB μ V/m	QPeak
Measure at 10m		
Frequency range	Level	Detector
30MHz to 88MHz	29.5dB μ V/m	QPeak
88MHz to 216MHz	33dB μ V/m	QPeak
216MHz to 960MHz	35.5B μ V/m	QPeak
960MHz to 1000MHz	43.5dB μ V/m	QPeak
Above 1000MHz	63.5dB μ V/m	Peak
	43.5dB μ V/m	Average
Measure at 3m		
Frequency range	Level	Detector
30MHz to 88MHz	40dB μ V/m	QPeak
88MHz to 216MHz	43.5dB μ V/m	QPeak
216MHz to 960MHz	46B μ V/m	QPeak
960MHz to 1000MHz	54dB μ V/m	QPeak
Above 1000MHz	74dB μ V/m	Peak
	54dB μ V/m	Average

9.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Amplifier 10MHz - 18GHz	LCIE SUD EST	—	A7102082	05/22	05/24
Antenna Bi-log	AH System	SAS-521-7	C2040180	05/23	05/25
Antenna horn 18GHz	EMCO	3115	C2042029	03/22	03/25
BAT EMC	NEXIO	v3.21.0.32	L1000115		
CABLE	TELEDYNE	R82-0404-0.5M	A5330010	03/22	03/25
Cable 0.75m	-	18GHz	A5329900	08/22	08/24
Cable SMA 40cm	WITHWAVE	W101-SM1-0.4M	A5329979	10/23	10/26
Comb EMR HF	YORK	CGE01	A3169114		
CONTROLLER	INNCO	CO3000	D3044034		
Emission Cable (SMA 1m)	TELEDYNE	26GHz	A5329874	08/22	08/25
Emission Cable (SMA 3.3m)	TELEDYNE	26GHz	A5329875	08/22	08/25
Filter Matrice	LCIE SUD EST	Combined filters	A7484078	03/23	03/25
Rehausse Table C3	LCIE	—	F2000511		
Rehausse Table C3	LCIE	—	F2000507		
Semi-Anechoic chamber #3 (BF)	SIEPEL	—	D3044017_BF	04/22	04/25
Semi-Anechoic chamber #3 (VSWR)	SIEPEL	—	D3044017_VSWR	04/22	04/25
Spectrum analyzer	ROHDE & SCHWARZ	FSU 26	A4060058	09/23	09/25
Table C3	LCIE	—	F2000461		
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25
TILT	INNCO	TILT	D3044033		
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371		
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444		

9.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



9.6. RESULTS

For all following measurements, worst case is presented with different configurations and modulations of EUT.

9.6.1. 9kHz to 30MHz

Graphs – Pre characterization:


Graph identifier		Polarization	Mode	Channel	EUT position	Comments
Emr#	1	0°/90°	TX	Single	Axis XY/Z	See the following results
Emr#	2	180°	TX	Single	Axis XY/Z	See the following results

Radiated Emissions

Graph name: Emr#1


Frequency range: 9 kHz to 30 MHz

(0°/90°) - TX mode - Axis 0° (Worst case presented)

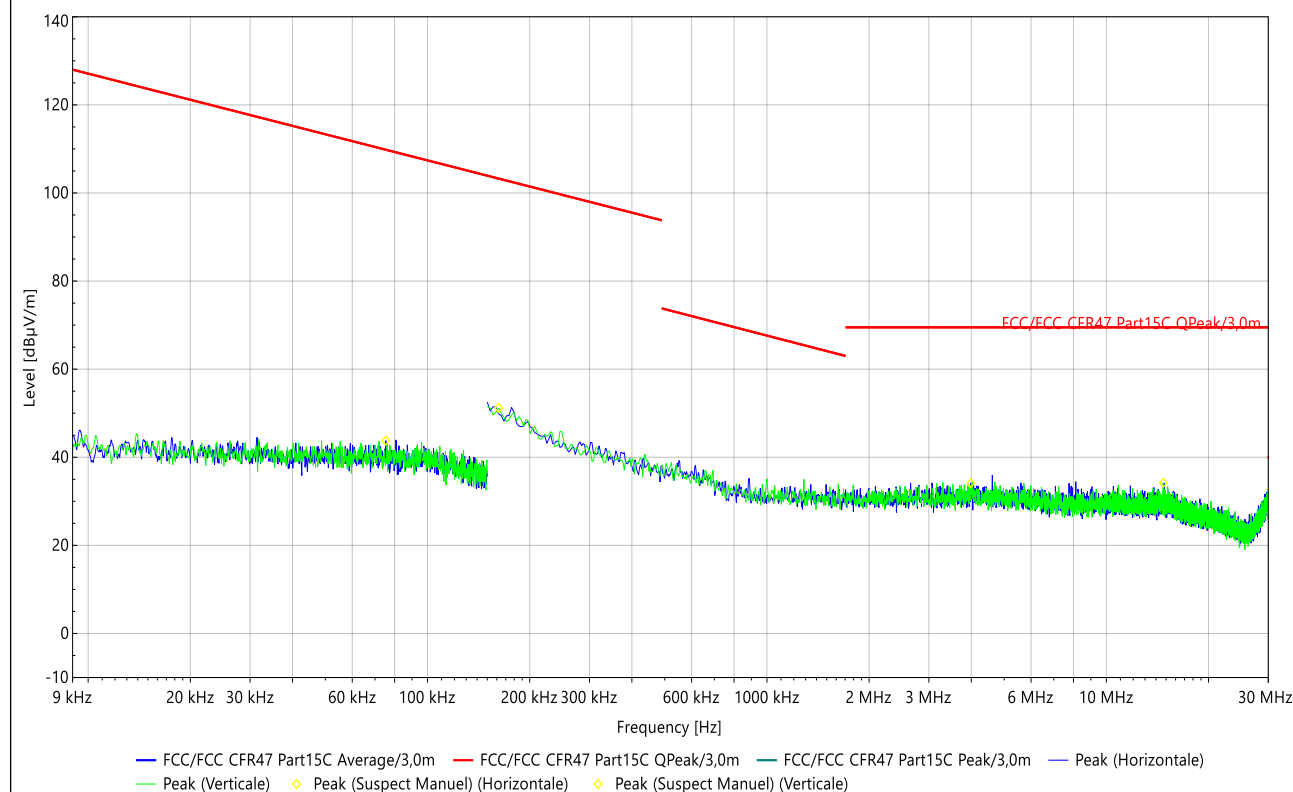

Frequency	PK Level (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
75.326 kHz	43.78	109.82	183	H	60.14
3.98274 MHz	34.10	69.50	131	H	40.21
161.94 kHz	51.21	103.27	275	V	56.17
14.71083 MHz	34.19	69.50	4	V	38.91

No significant frequency observed

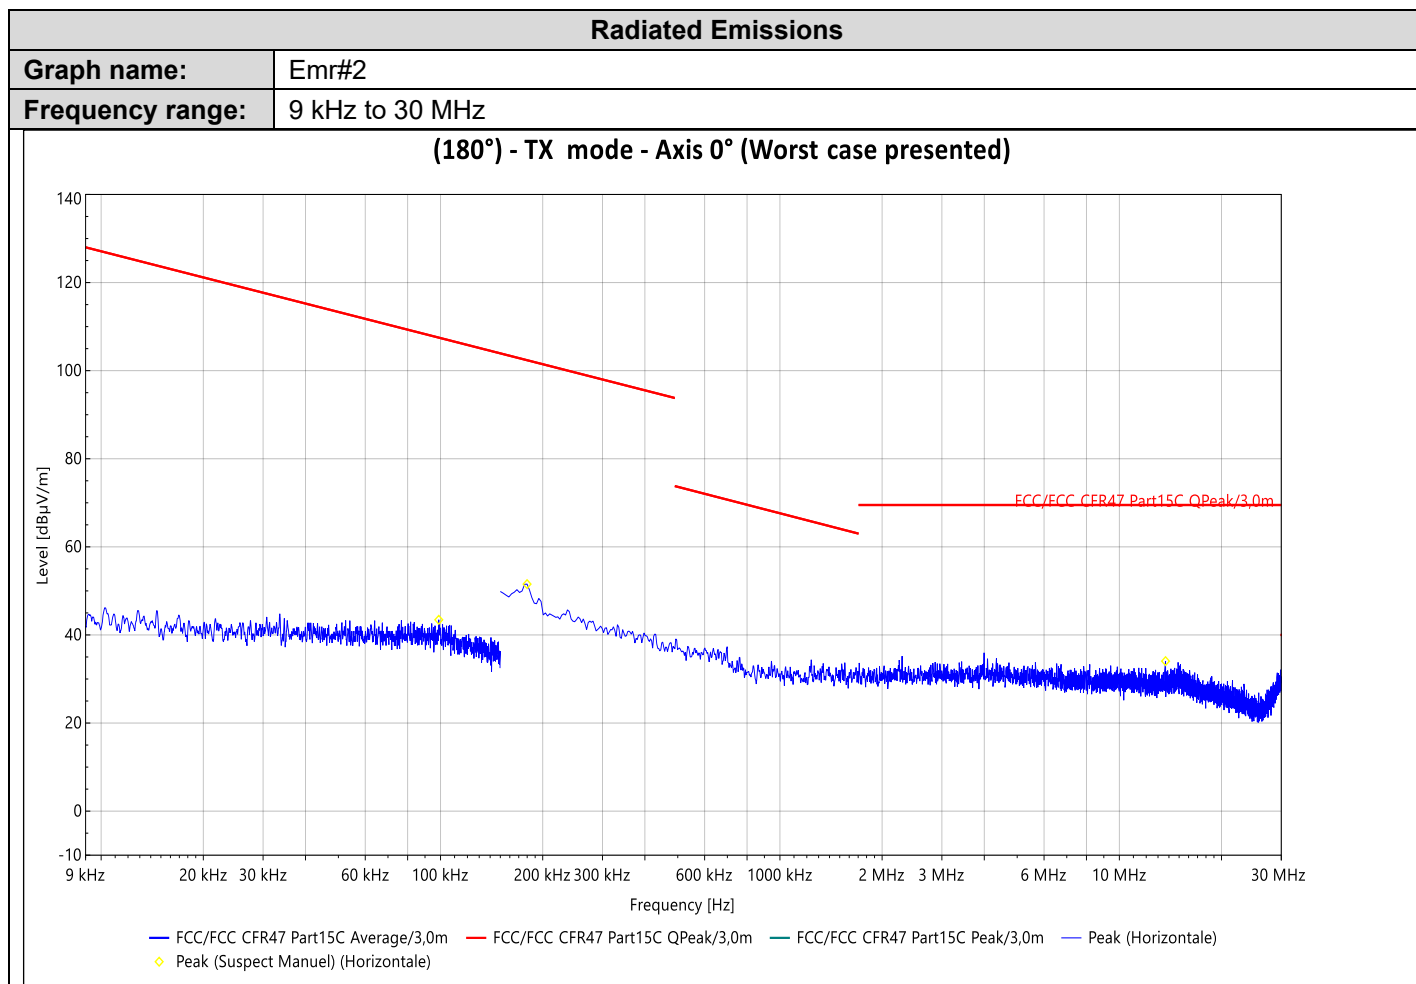

Pre-Characterization:

Frequency	PK Level (dBµV/m)	Lim.QP (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
98.816 kHz	43.44	107.50	122	H	60.28
179.85 kHz	51.54	102.38	357	H	55.32
13.681005 MHz	34.05	69.50	92	H	39.14

No significant frequency observed



9.6.2. 30MHz to 14GHz


Graphs – Pre characterization:

Graph identifier		Polarization	Mode	Channel	EUT position	Comments
Emr#	3	H/V	TX	Cmin	Axis XY/Z	See the following results
Emr#	4	H/V	TX	Cmid	Axis XY/Z	See the following results
Emr#	5	H/V	TX	Cmax	Axis XY/Z	See the following results

Radiated Emissions

Graph name: Emr#3
Frequency range: 30 MHz to 14 GHz


(H+V) - Cmin - TX mode - Automatic Axis

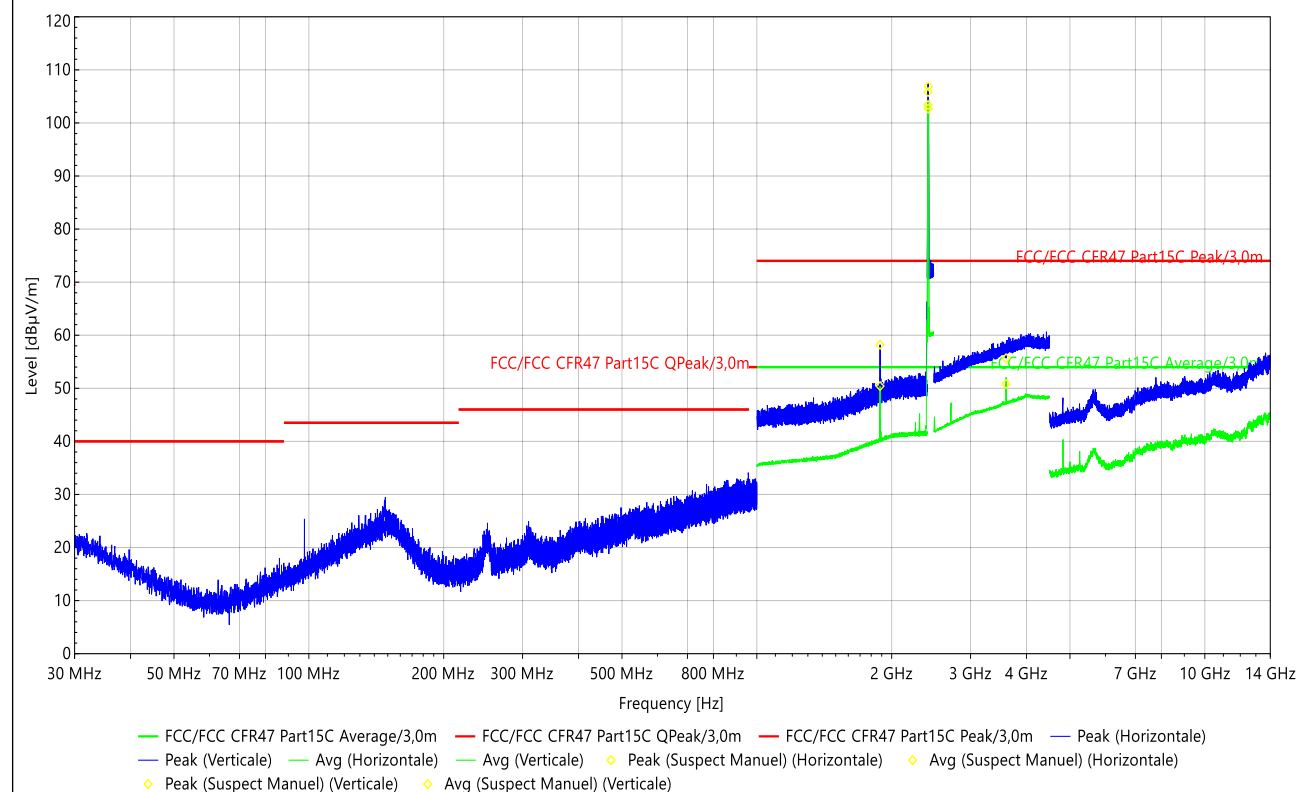

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
2.41123075 GHz*	105.81	74.00	103.39	54.00		268	H	35.72
2.4129425 GHz*	106.91	74.00	102.70	54.00		268	H	35.72
1.88375 GHz	58.22	74.00	50.41	54.00		114	H	34.65
3.599834399 GHz	55.66	74.00	50.82	54.00		233	V	40.39
4.012758320 GHz	60.12	74.00	48.32	54.00		218	V	40.39


*Carrier frequency
 No significant frequency observed

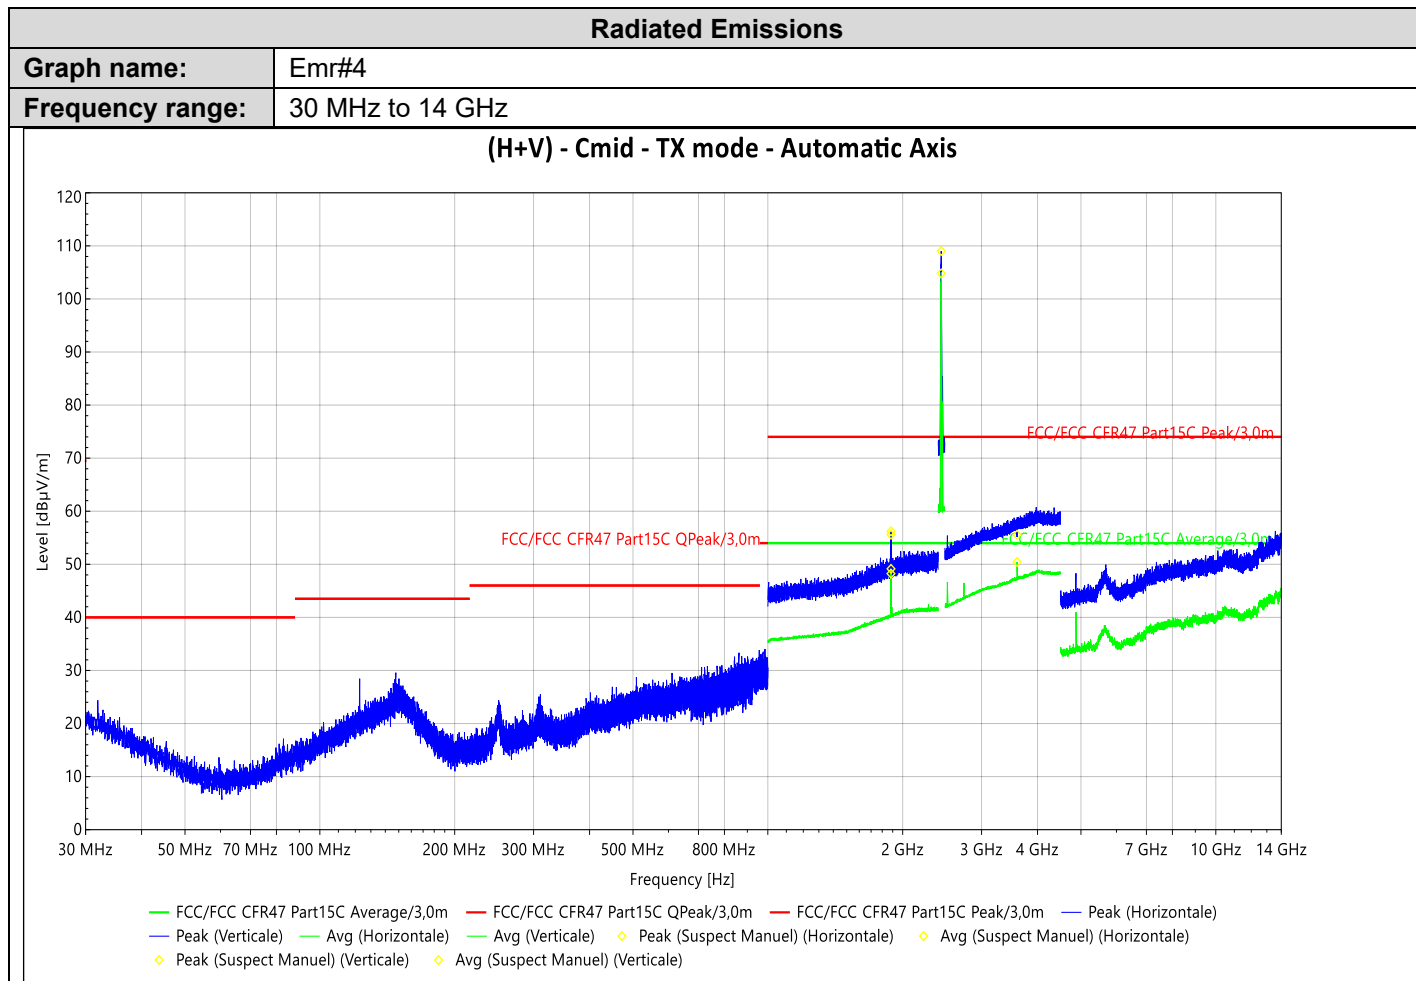

Pre-Characterization:

Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Avg (dBµV/m)	Lim.Avg (dBµV/m)	Lim.QP (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
1.88305 GHz	56.20	74.00	48.24	54.00		192	H	34.64
3.599834399 GHz	55.57	74.00	50.44	54.00		327	V	40.39
2.43795075 GHz*	109.03	74.00	104.81	54.00		301	V	35.77
1.8834 GHz	55.60	74.00	49.15	54.00		5	V	34.65
4.03758532 GHz	60.34	74.00	49.02	54.00		197	V	40.39

*Carrier frequency
No significant frequency observed

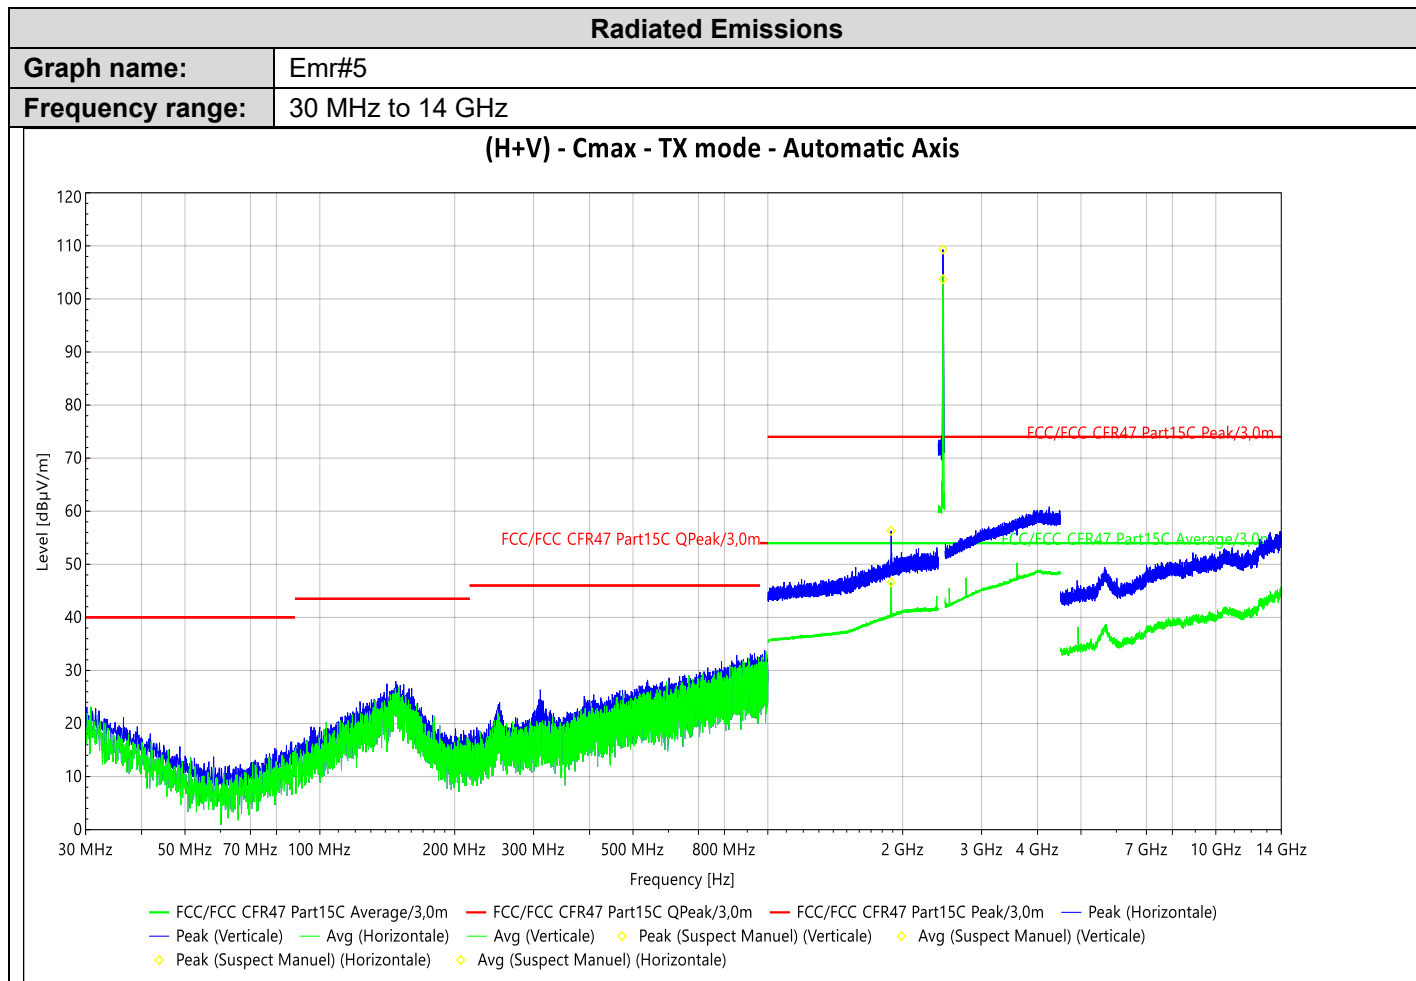

Pre-Characterization:

Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Avg (dBµV/m)	Lim.Avg (dBµV/m)	Lim.QP (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
2.46007825 GHz*	109.33	74.00	103.72	54.00		281	V	35.78
1.8841 GHz	56.31	74.00	46.61	54.00		354	H	34.65
4.009837189 GHz	60.02	74.00	48.12	54.00		183	V	40.39


*Carrier frequency
No significant frequency observed



9.6.3. 1GHz to 25GHz

Graphs – Pre characterization:

Graph identifier		Polarization	Mode	Channel	EUT position	Comments
Emr#	6	H/V	TX	Cmin	Axis XY/Z	See the following results
Emr#	7	H/V	TX	Cmid	Axis XY/Z	See the following results
Emr#	8	H/V	TX	Cmax	Axis XY/Z	See the following results

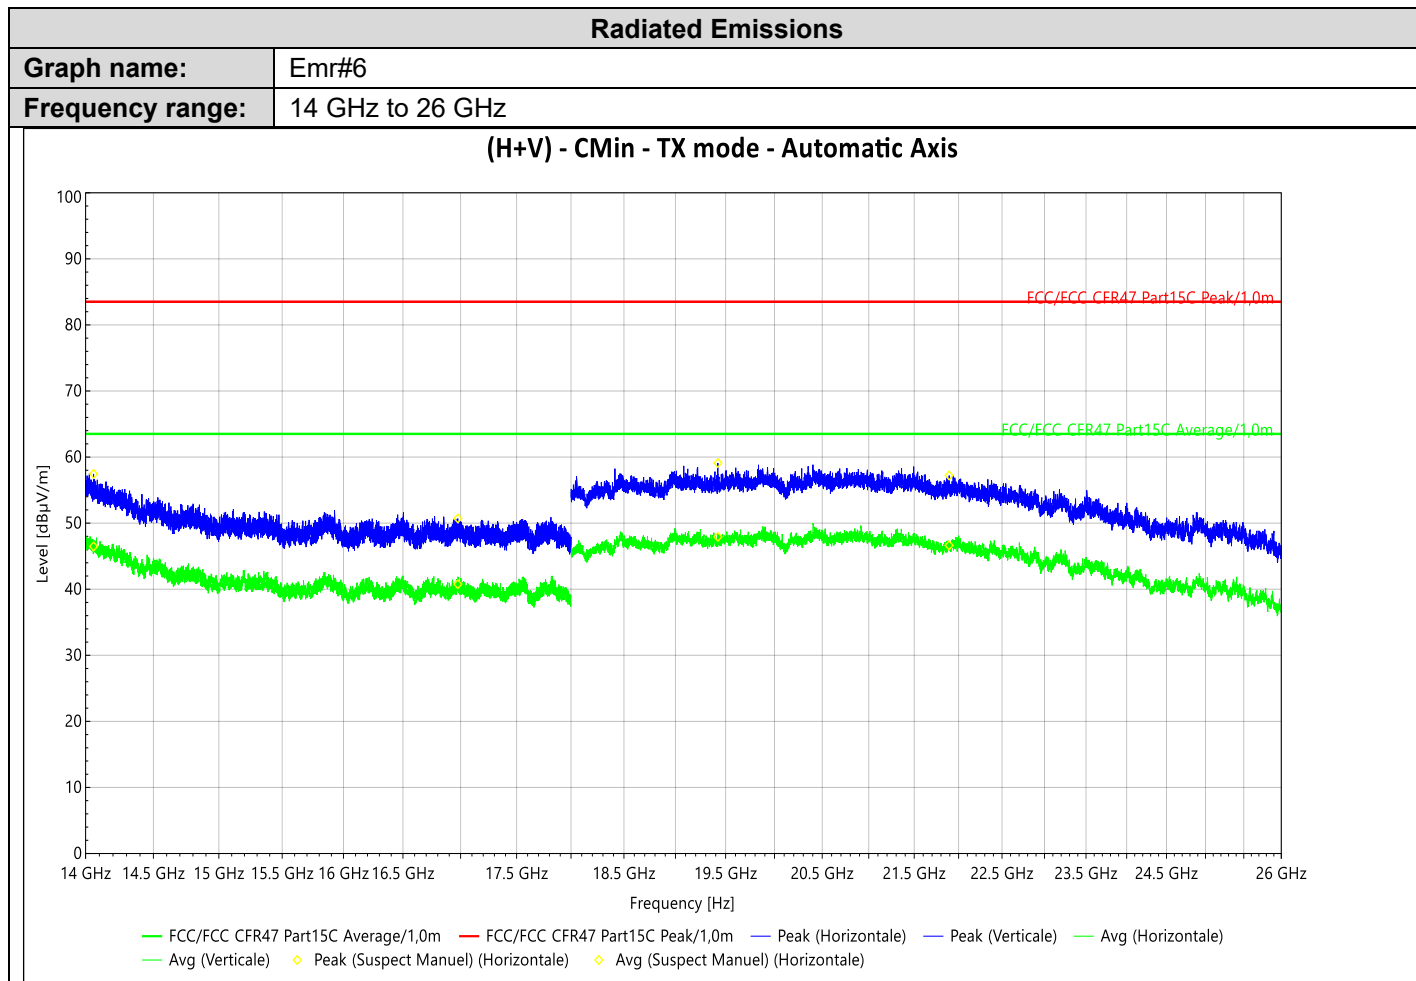

Pre-Characterization:


Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Avg (dBµV/m)	Lim.Avg (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
14.058 GHz	57.45	83.50	46.47	63.50	234	H	3.28
16.9755 GHz	50.70	83.50	40.76	63.50	30	H	-4.99
19.422 GHz	59.10	83.50	47.92	63.50	0	H	2.37
21.892 GHz	57.21	83.50	46.64	63.50	114	H	2.35

No significant frequency observed

Radiated Emissions

Graph name: Emr#7
Frequency range: 14 GHz to 26 GHz


(H+V) - CMid - TX mode - Automatic Axis

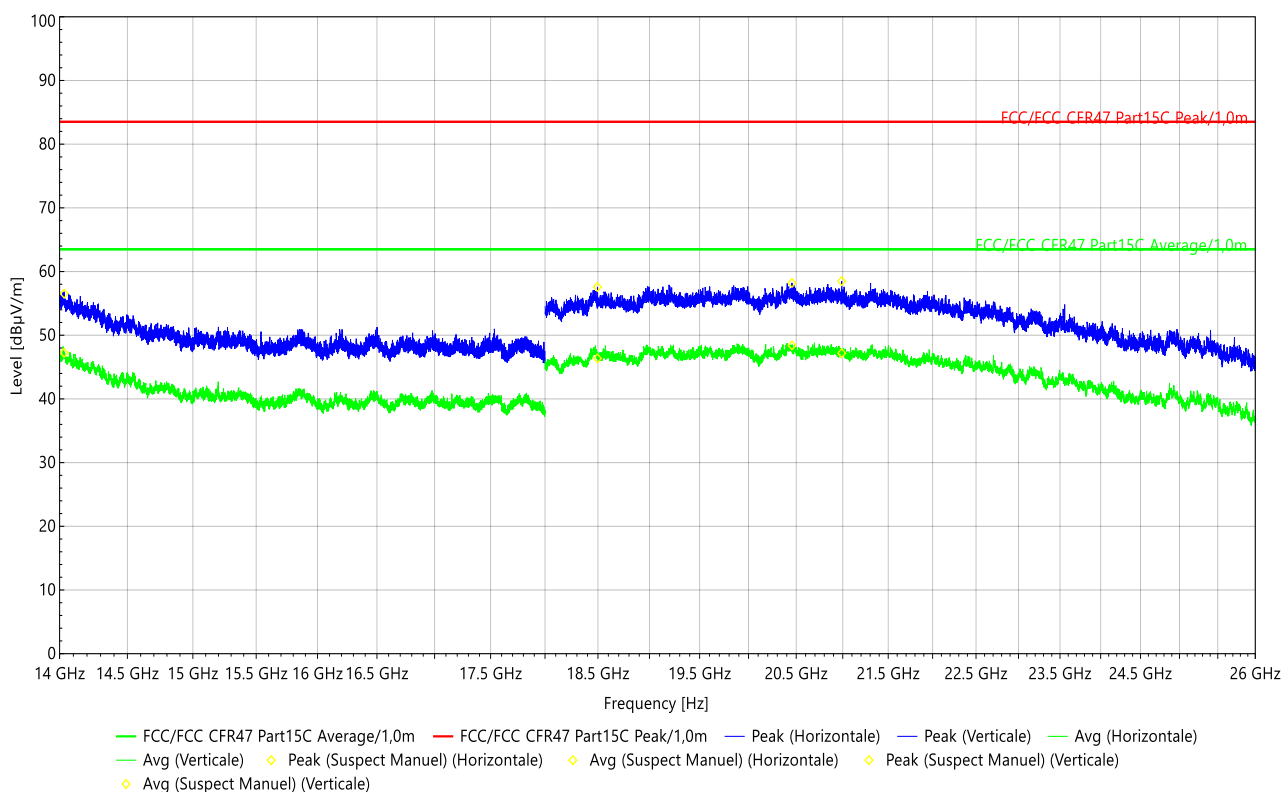

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
14.033 GHz	56.53	83.50	47.24	63.50	199	H	3.44
20.988 GHz	58.49	83.50	47.18	63.50	202	H	3.10
18.495 GHz	57.58	83.50	46.36	63.50	155	V	3.41
20.455 GHz	58.21	83.50	48.40	63.50	268	V	3.52

No significant frequency observed

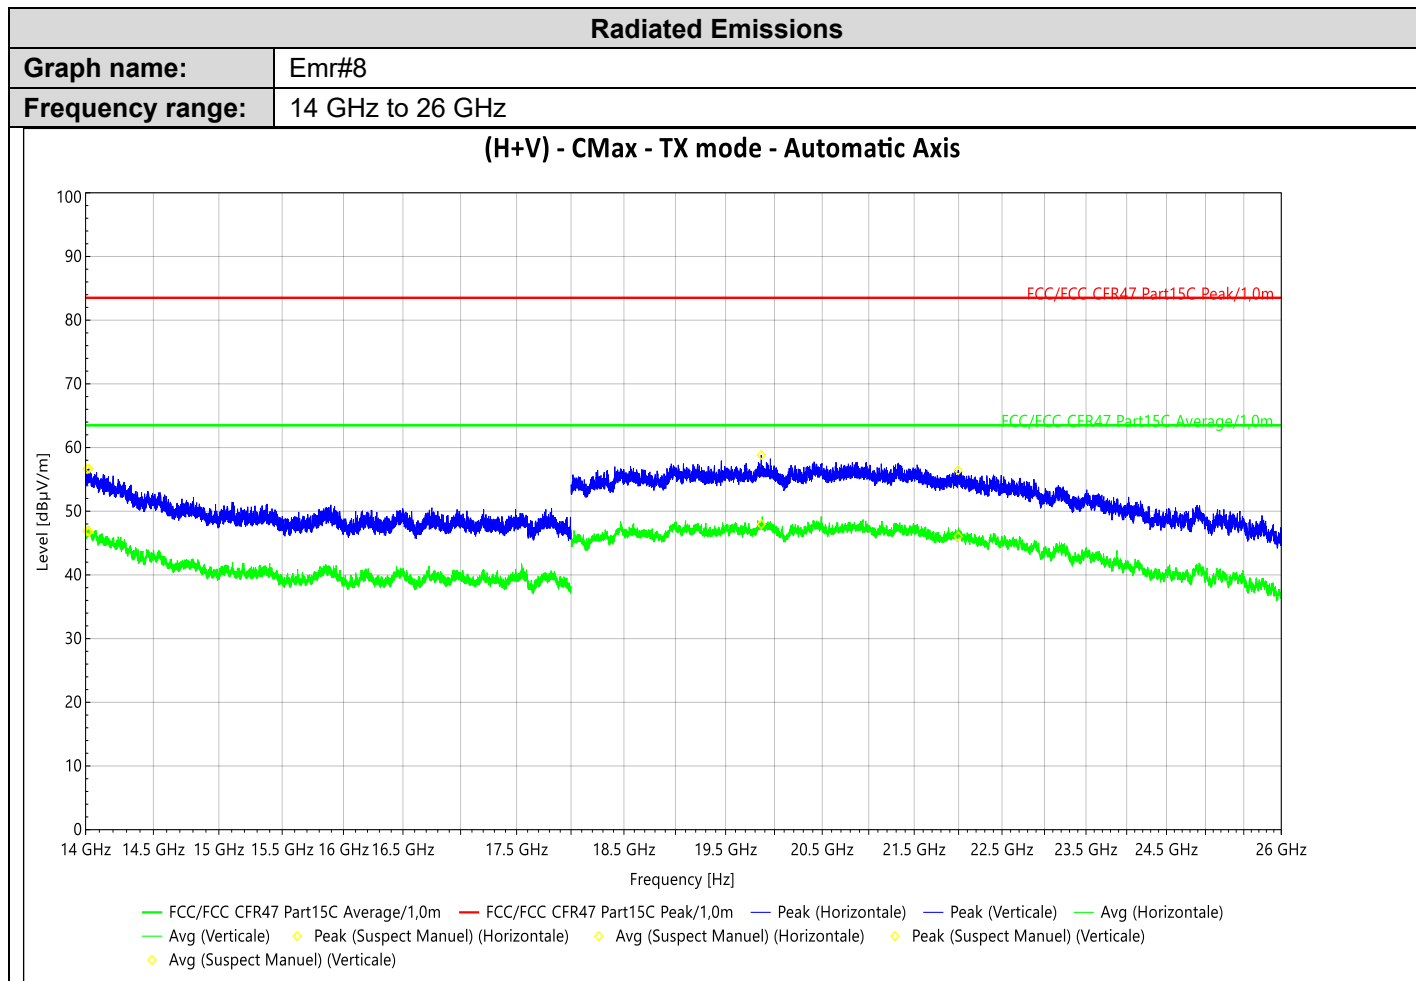

Pre-Characterization:

Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Avg (dBµV/m)	Lim.Avg (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
14.0105 GHz	56.62	83.50	46.87	63.50	214	H	3.57
21.995 GHz	56.44	83.50	46.04	63.50	126	H	2.14
14.025 GHz	56.68	83.50	46.80	63.50	84	V	3.48
19.863 GHz	58.84	83.50	47.95	63.50	8	V	3.69

No significant frequency observed

9.7. CONCLUSION

Unwanted emissions in non-restricted bands measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

10. UNCERTAINTIES CHART

<i>Kind of measurement</i>	<i>Wide uncertainty laboratory</i>
Occupied Channel Bandwidth	±2.8 %
Humidity	±3.2 %
Power Spectral Density, Conducted	±1.7 dB
Radio frequency	±0.3 ppm
RF power, conducted	±1.2 dB
RF power, radiated (Full anechoic chamber above 1GHz)	±3.7 dB
RF power, radiated (Semi anechoic chamber & open test site)	±5.6 dB
Spurious emission, conducted	±2.3 dB
Spurious emission, radiated (Full anechoic chamber above 1GHz)	±3.8 dB
Spurious emission, radiated (Semi anechoic chamber & open test site)	±5.7 dB
Temperature	±0.75 °C
Time	±2.3 %
Voltage	±1.7 %

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limit values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report.