

Appendix A

Detailed System Check Results

1. System Performance Check
System Performance Check 2450 MHz Head
System Performance Check 5250 MHz Head
System Performance Check 5600 MHz Head
System Performance Check 5750 MHz Head

System Performance Check 2450MHz Head


D2450V2-SN 733

Communication System: D2450; Frequency: 2450.000
Medium: HSL. Medium parameters used: $f= 2450.000$ MHz; $\sigma= 1.81$ S/m; $\epsilon_r = 40.6$

DASY 5 Configuration:
Probe: EX3DV4 - SN7838; ConvF(6.95, 6.95, 6.95); Calibrated: 2023/09/11
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1830; Calibrated: 2023/09/12
Phantom: SAM 8.0; Type: SAM Twin; Serial: 2256
DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (48.0 mm x 48.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 12.2 W/kg; SAR (10g) = 5.70 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.06 dB
SAR (1g) = 13.5 W/kg; SAR (10g) = 6.36 W/kg;

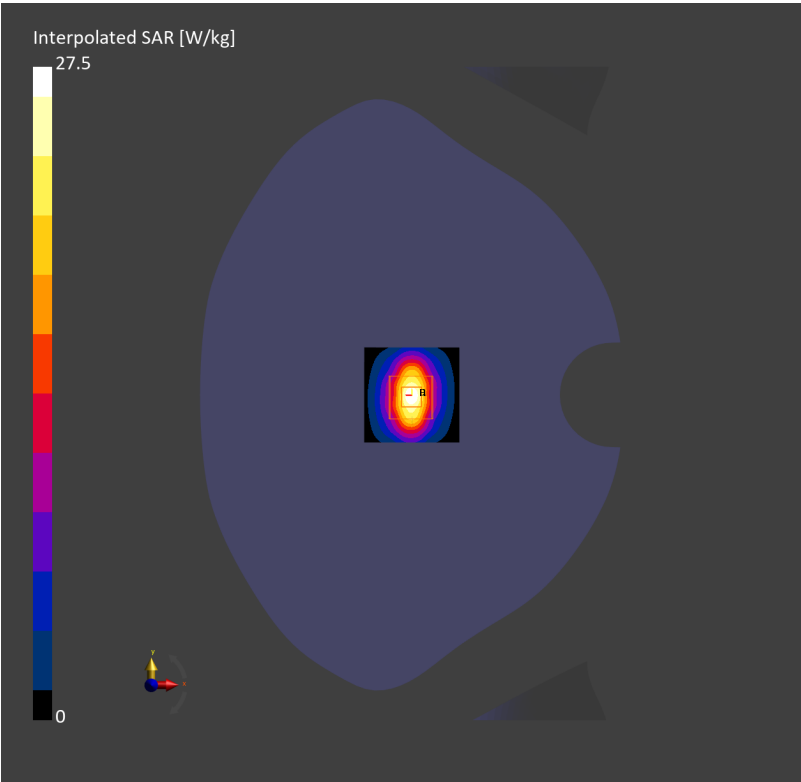

System Performance Check 5250MHz Head


D5GHzV2-SN 1165

Communication System: D5GHz; Frequency: 5250.000
Medium: HSL. Medium parameters used: $f=5250.000$ MHz; $\sigma=4.72$ S/m; $\epsilon_r=36.6$

DASY 5 Configuration:
Probe: EX3DV4 - SN7838; ConvF(6.95, 6.95, 6.95); Calibrated: 2023/09/11
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1830; Calibrated: 2023/09/12
Phantom: SAM 8.0; Type: SAM Twin; Serial: 2256
DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 6.97 W/kg; SAR (10g) = 2.01 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm
Power Drift = 0.01 dB
SAR (1g) = 7.57 W/kg; SAR (10g) = 2.18 W/kg;

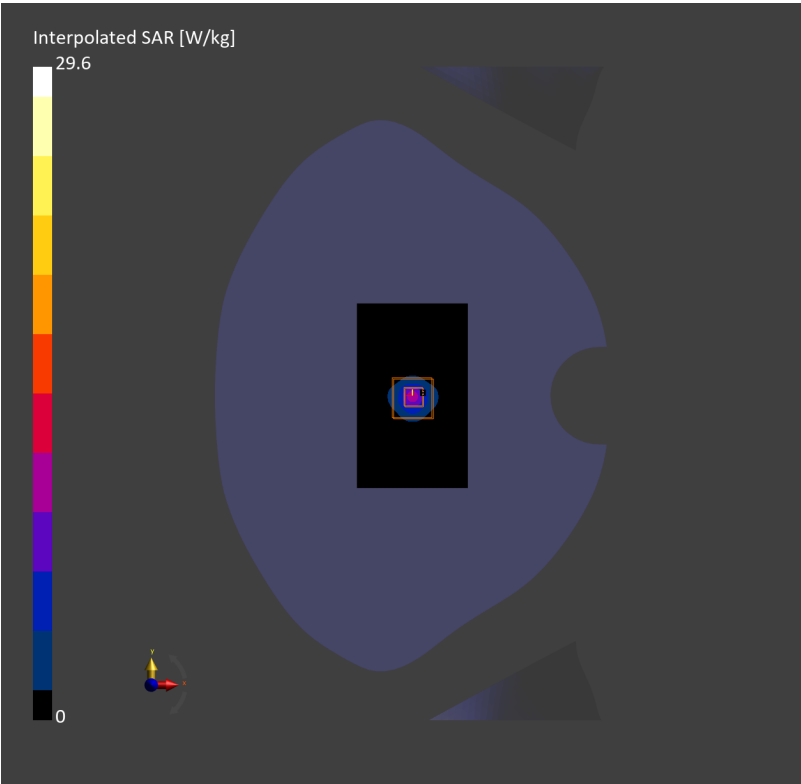

System Performance Check 5600MHz Head


D5GHzV2-SN 1165

Communication System: D5GHz; Frequency: 5600.000
Medium: HSL. Medium parameters used: $f=5600.000$ MHz; $\sigma=5.10$ S/m; $\epsilon_r=35.7$

DASY 5 Configuration:
Probe: EX3DV4 - SN7838; ConvF(6.95, 6.95, 6.95); Calibrated: 2023/09/11
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1830; Calibrated: 2023/09/12
Phantom: SAM 8.0; Type: SAM Twin; Serial: 2256
DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 7.71 W/kg; SAR (10g) = 2.20 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm
Power Drift = 0.01 dB
SAR (1g) = 8.32 W/kg; SAR (10g) = 2.39 W/kg;

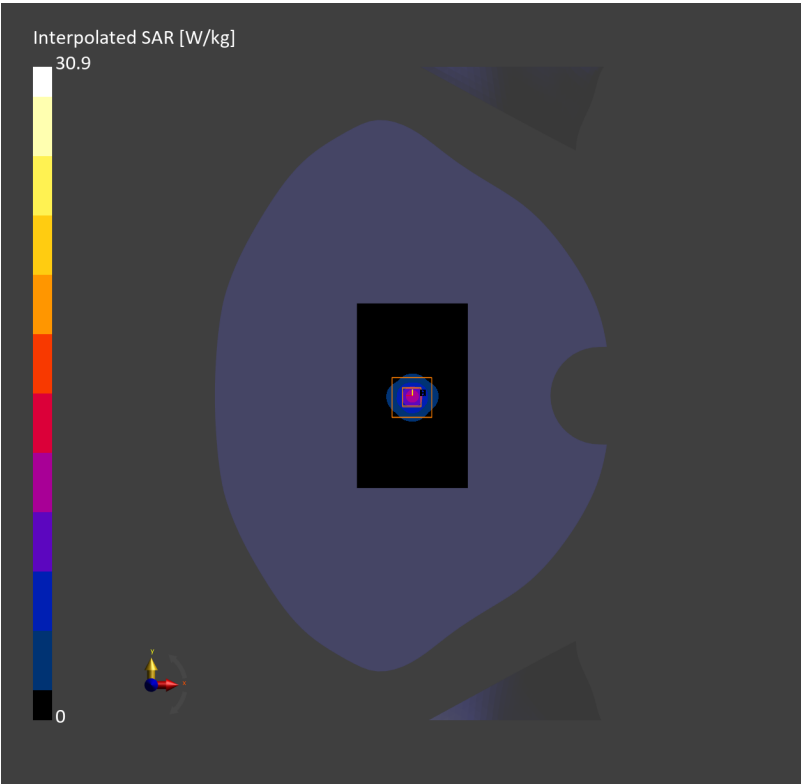

System Performance Check 5750MHz Head

D5GHzV2-SN 1165

Communication System: D5GHz; Frequency: 5750.000
Medium: HSL. Medium parameters used: $f=5750.000$ MHz; $\sigma=5.29$ S/m; $\epsilon_r=35.5$

DASY 5 Configuration:
Probe: EX3DV4 - SN7838; ConvF(6.95, 6.95, 6.95); Calibrated: 2023/09/11
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1830; Calibrated: 2023/09/12
Phantom: SAM 8.0; Type: SAM Twin; Serial: 2256
DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 6.68 W/kg; SAR (10g) = 1.90 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.06 dB
SAR (1g) = 7.29 W/kg; SAR (10g) = 2.08 W/kg;

