


Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5230	Voltage:	5V _{DC} 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:10:09

Test Graph

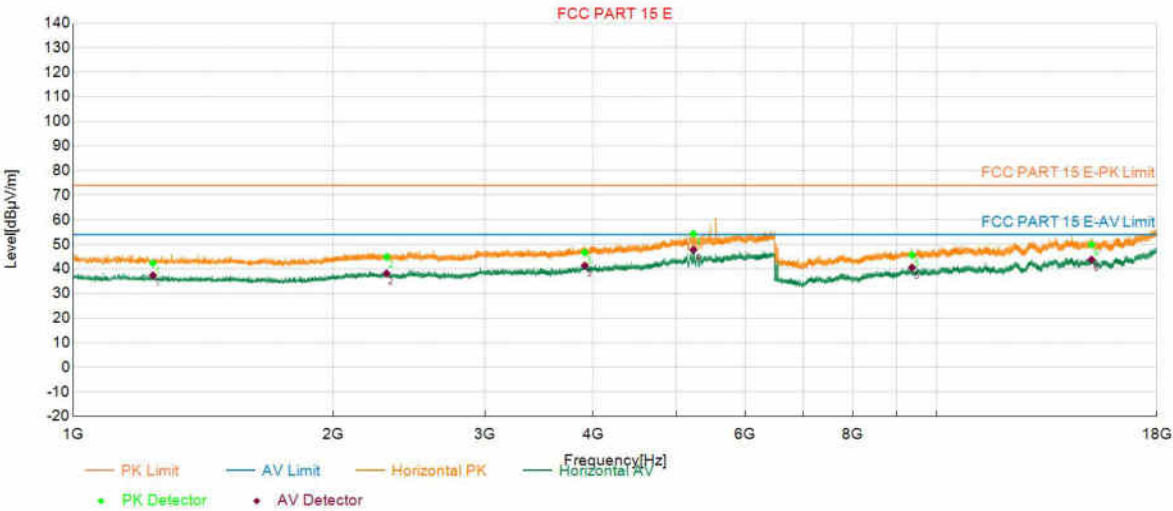


PK Final Data List											
NO.	Frequency [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1237.0737	3.57	42.39	74.00	31.61	37.38	54.00	16.62	150	236	Horizontal
2	2306.9307	8.05	44.92	74.00	29.08	38.16	54.00	15.84	150	303	Horizontal
3	3913.6414	14.50	46.65	74.00	27.35	41.34	54.00	12.66	150	126	Horizontal
4	5228.8229	20.04	54.27	74.00	19.73	47.77	54.00	6.23	150	169	Horizontal
5	9364.9365	5.67	45.67	74.00	28.33	40.55	54.00	13.45	150	296	Horizontal
6	15115.5116	14.51	49.90	74.00	24.10	43.73	54.00	10.27	150	100	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5230	Voltage:	5V= 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:11:30

Test Graph

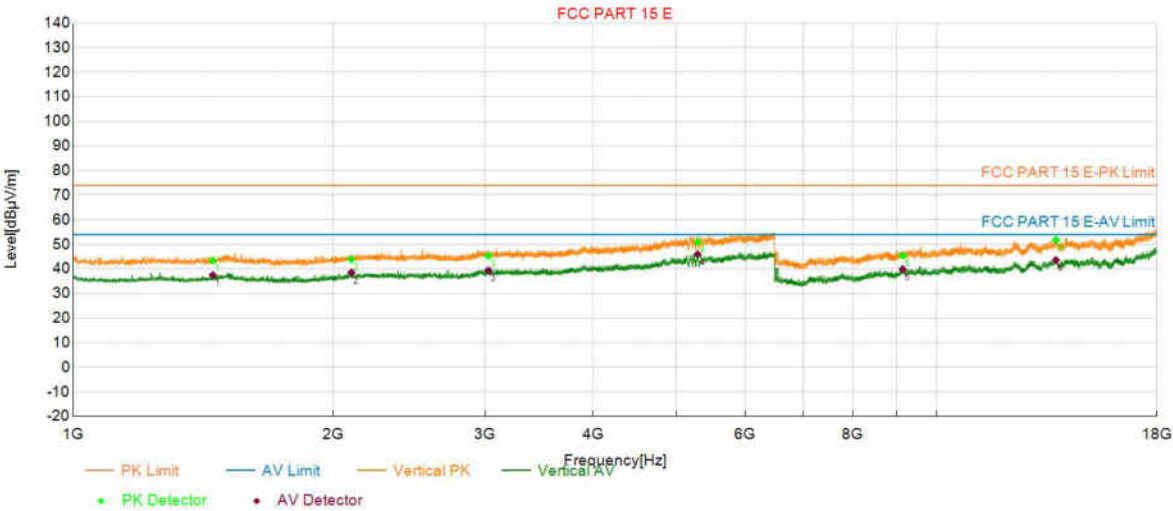


PK Final Data List											
NO.	Frequency [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1451.0451	4.34	43.37	74.00	30.63	37.45	54.00	16.55	150	254	Vertical
2	2100.1100	7.27	43.91	74.00	30.09	38.54	54.00	15.46	150	278	Vertical
3	3026.4026	10.63	45.37	74.00	28.63	39.40	54.00	14.60	150	114	Vertical
4	5287.6788	20.30	50.98	74.00	23.02	45.99	54.00	8.01	150	84	Vertical
5	9136.0636	4.54	45.43	74.00	28.57	39.90	54.00	14.10	150	252	Vertical
6	13748.0248	12.76	51.75	74.00	22.25	43.60	54.00	10.40	150	234	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5270	Voltage:	5V _{DC} 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:15:30

Test Graph

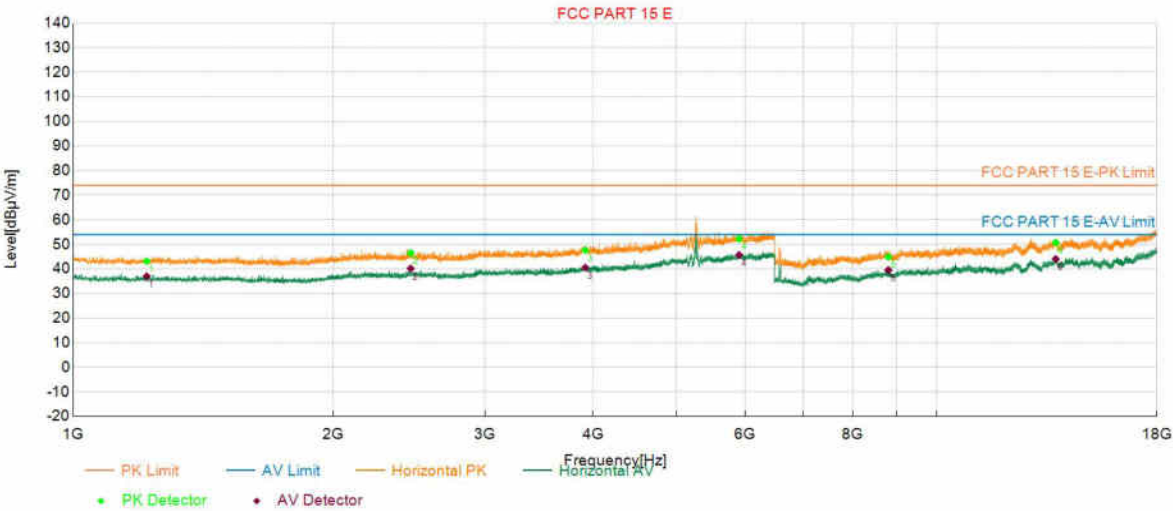


PK Final Data List											
NO.	Frequency [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1216.7217	3.41	43.14	74.00	30.86	36.99	54.00	17.01	150	237	Horizontal
2	2459.8460	8.42	46.49	74.00	27.51	40.17	54.00	13.83	150	65	Horizontal
3	3918.5919	14.52	47.65	74.00	26.35	40.48	54.00	13.52	150	201	Horizontal
4	5905.9406	22.89	52.24	74.00	21.76	45.67	54.00	8.33	150	207	Horizontal
5	8792.1792	3.96	44.90	74.00	29.10	39.53	54.00	14.47	150	31	Horizontal
6	13739.9740	12.84	50.76	74.00	23.24	44.07	54.00	9.93	150	2	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5270	Voltage:	5V _{DC} 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:16:50

Test Graph

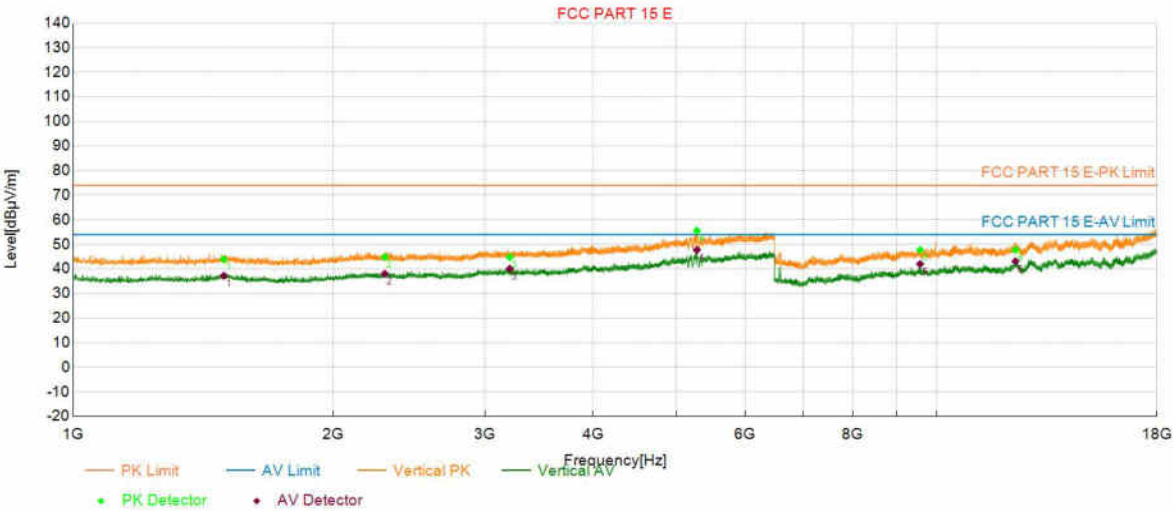


PK Final Data List											
NO.	Frequency [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1494.4995	4.44	43.85	74.00	30.15	37.23	54.00	16.77	150	125	Vertical
2	2295.3795	8.08	44.84	74.00	29.16	38.04	54.00	15.96	150	95	Vertical
3	3203.5204	11.31	44.83	74.00	29.17	40.06	54.00	13.94	150	360	Vertical
4	5277.2277	20.26	55.53	74.00	18.47	47.74	54.00	6.26	150	228	Vertical
5	9569.6570	5.35	47.71	74.00	26.29	42.02	54.00	11.98	150	123	Vertical
6	12339.1339	8.35	47.76	74.00	26.24	43.12	54.00	10.88	150	4	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5310	Voltage:	5V== 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:20:11

Test Graph

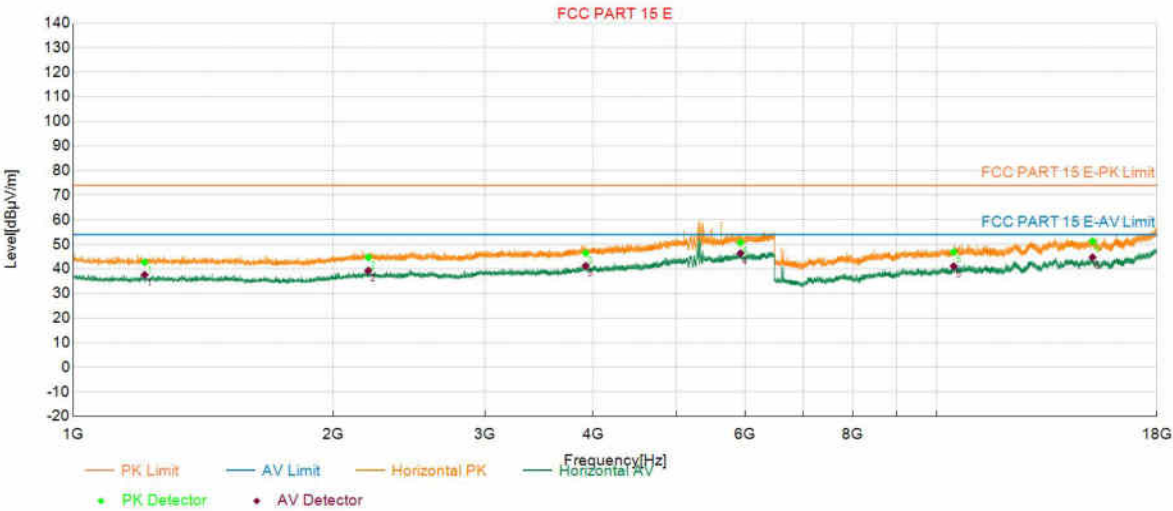


PK Final Data List											
NO.	Frequency [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1210.1210	3.36	42.70	74.00	31.30	37.63	54.00	16.37	150	246	Horizontal
2	2196.9197	8.11	44.72	74.00	29.28	39.32	54.00	14.68	150	155	Horizontal
3	3922.4422	14.53	46.45	74.00	27.55	41.23	54.00	12.77	150	167	Horizontal
4	5927.3927	22.72	50.64	74.00	23.36	46.37	54.00	7.63	150	2	Horizontal
5	10466.7467	6.90	46.91	74.00	27.09	41.11	54.00	12.89	150	33	Horizontal
6	15156.9157	14.33	51.27	74.00	22.73	44.72	54.00	9.28	150	0	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5310	Voltage:	5V= 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:21:31

Test Graph

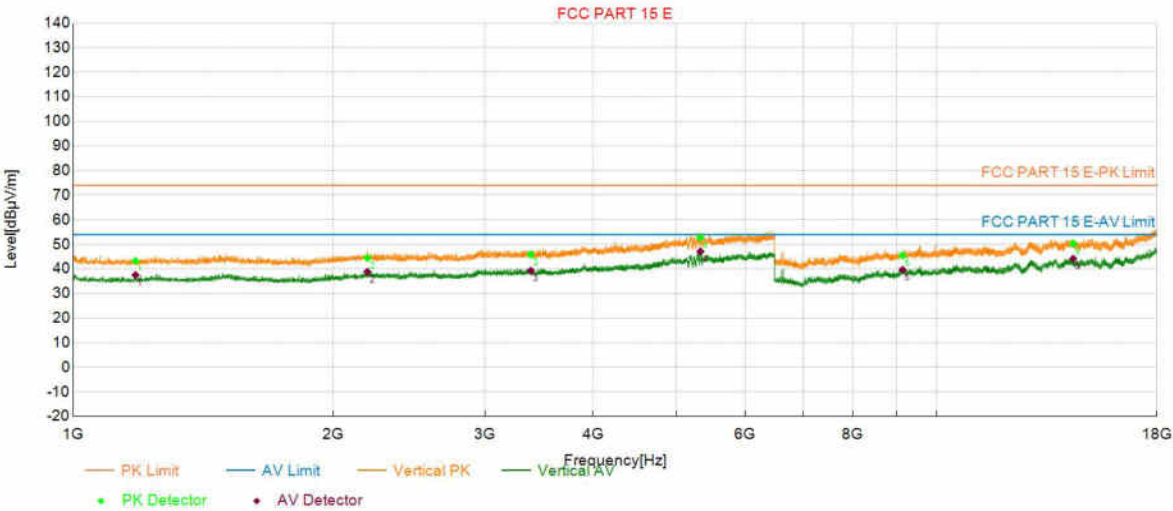


PK Final Data List											
NO.	Frequency [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1180.9681	3.09	43.27	74.00	30.73	37.51	54.00	16.49	150	138	Vertical
2	2191.9692	8.06	44.48	74.00	29.52	38.80	54.00	15.20	150	83	Vertical
3	3389.4389	11.60	45.78	74.00	28.22	39.27	54.00	14.73	150	236	Vertical
4	5326.1826	20.47	52.69	74.00	21.31	47.11	54.00	6.89	150	236	Vertical
5	9132.6133	4.54	45.46	74.00	28.54	39.62	54.00	14.38	150	11	Vertical
6	14389.7890	13.54	50.35	74.00	23.65	44.17	54.00	9.83	150	260	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5510	Voltage:	5V $\approx$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:24:40

Test Graph

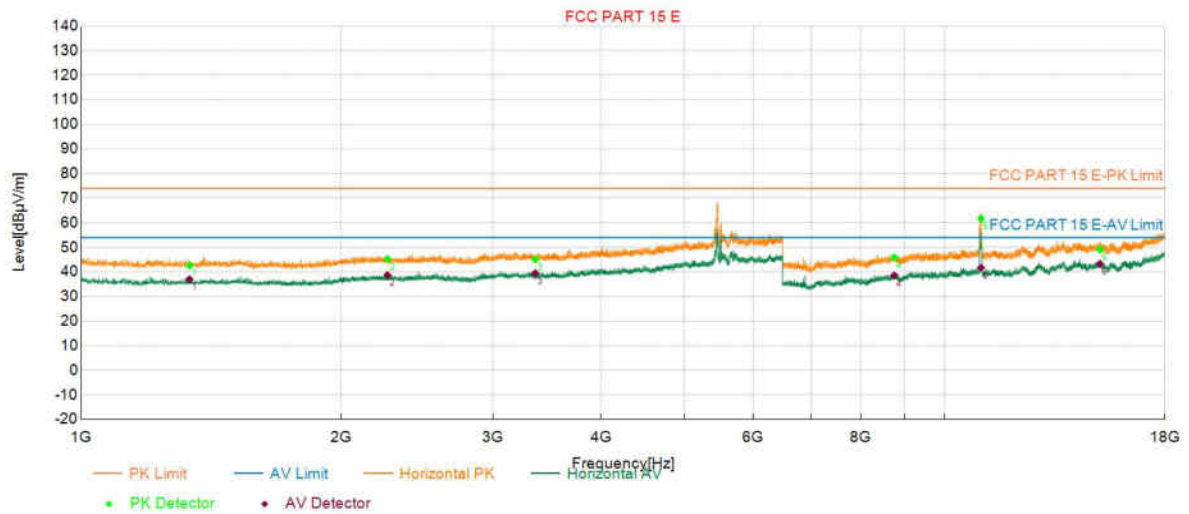

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1334.9835	4.10	42.62	74.00	31.38	37.03	54.00	16.97	150	207	Horizontal
2	2263.4763	7.99	45.33	74.00	28.67	38.69	54.00	15.31	150	83	Horizontal
3	3356.4356	11.59	45.08	74.00	28.92	39.47	54.00	14.53	150	29	Horizontal
4	8741.5742	4.01	45.86	74.00	28.14	38.54	54.00	15.46	150	266	Horizontal
5	11018.6435	6.95	61.70	74.00	12.30	41.68	54.00	12.32	170	182.5	Horizontal
6	15129.3129	14.46	49.10	74.00	24.90	43.31	54.00	10.69	150	313	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5510	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:26:00

Test Graph

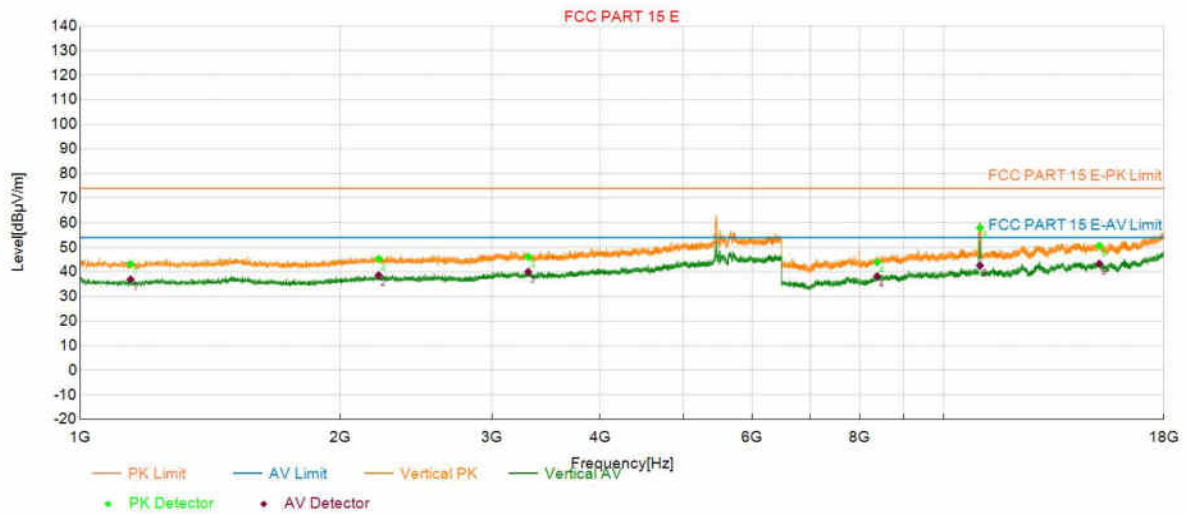

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1144.1144	2.78	43.21	74.00	30.79	36.94	54.00	17.06	150	132	Vertical
2	2216.7217	8.04	45.33	74.00	28.67	38.65	54.00	15.35	150	162	Vertical
3	3303.0803	11.56	46.10	74.00	27.90	40.04	54.00	13.96	150	360	Vertical
4	8378.1378	2.73	43.89	74.00	30.11	38.26	54.00	15.74	150	142	Vertical
5	11019.9520	6.95	57.90	74.00	16.10	42.59	54.00	11.41	150	240	Vertical
6	15148.8649	14.37	50.61	74.00	23.39	43.33	54.00	10.67	150	124	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5550	Voltage:	5V $\approx$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:43:06

Test Graph

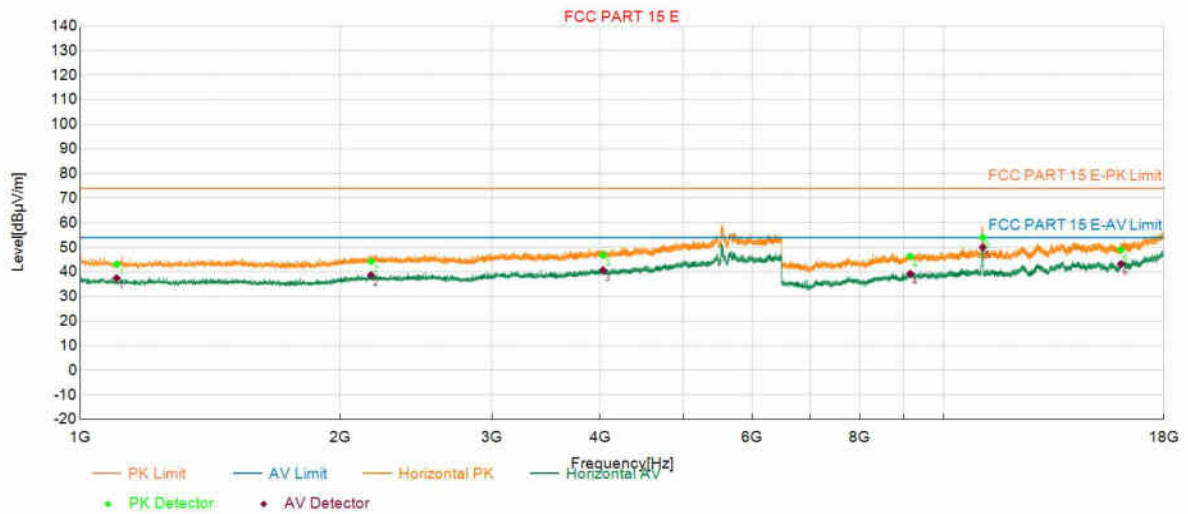

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1102.3102	2.68	43.08	74.00	30.92	37.46	54.00	16.54	150	204	Horizontal
2	2172.7173	7.87	44.28	74.00	29.72	38.72	54.00	15.28	150	44	Horizontal
3	4032.4532	14.62	46.81	74.00	27.19	40.71	54.00	13.29	150	223	Horizontal
4	9147.5648	4.58	46.31	74.00	27.69	39.27	54.00	14.73	150	244	Horizontal
5	11103.9104	7.02	53.98	74.00	20.02	49.99	54.00	4.01	150	191	Horizontal
6	16050.5551	12.44	48.98	74.00	25.02	43.24	54.00	10.76	150	345	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5550	Voltage:	5V $\approx$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:44:27

Test Graph

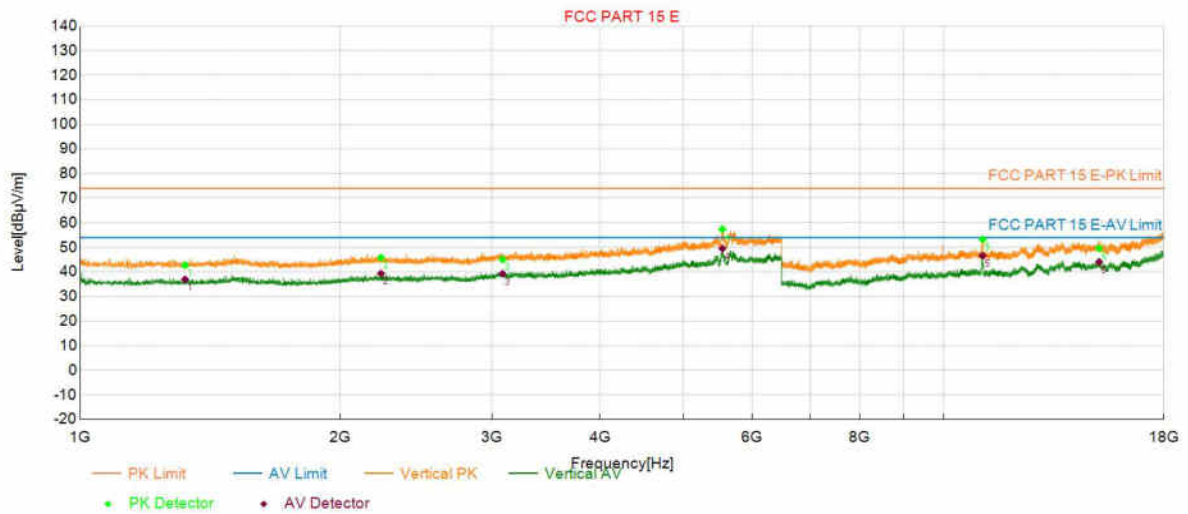

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1322.8823	3.99	42.74	74.00	31.26	36.95	54.00	17.05	150	134	Vertical
2	2230.4730	8.01	45.83	74.00	28.17	39.33	54.00	14.67	150	222	Vertical
3	3084.7085	11.21	45.11	74.00	28.89	39.24	54.00	14.76	150	68	Vertical
4	5544.0044	22.34	57.38	74.00	16.62	49.49	54.00	4.51	150	228	Vertical
5	11097.0097	7.00	53.25	74.00	20.75	46.57	54.00	7.43	150	245	Vertical
6	15139.6640	14.41	49.58	74.00	24.42	44.05	54.00	9.95	150	227	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5670	Voltage:	5V== 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:48:02

Test Graph

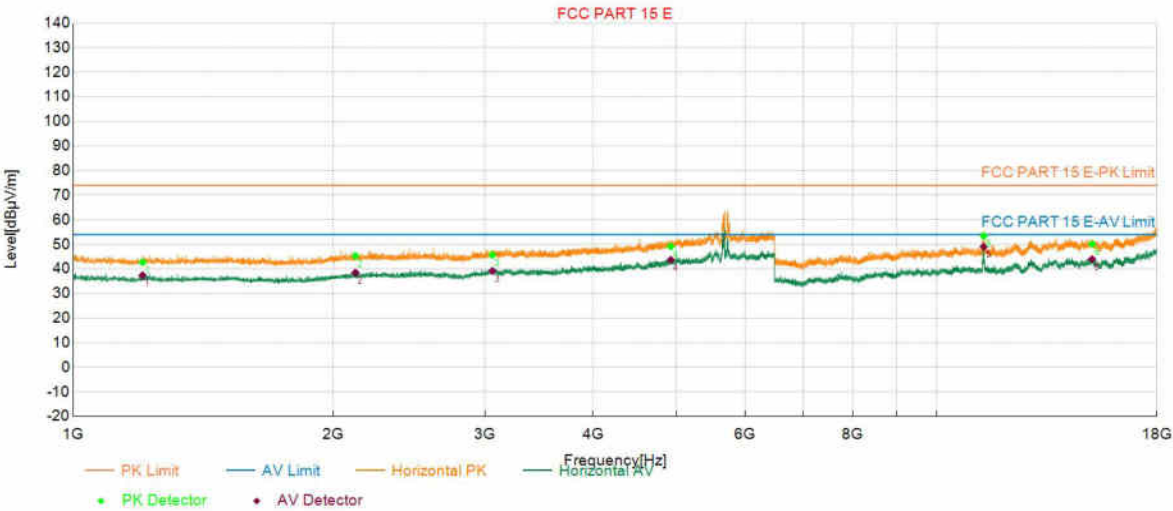


PK Final Data List											
NO.	Frequency [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1203.5204	3.42	42.71	74.00	31.29	37.39	54.00	16.61	150	245	Horizontal
2	2122.6623	7.52	45.25	74.00	28.75	38.49	54.00	15.51	150	190	Horizontal
3	3058.3058	11.15	45.67	74.00	28.33	39.17	54.00	14.83	150	233	Horizontal
4	4922.4422	18.88	49.14	74.00	24.86	43.68	54.00	10.32	150	355	Horizontal
5	11339.6840	7.60	53.41	74.00	20.59	49.02	54.00	4.98	150	195	Horizontal
6	15136.2136	14.42	50.10	74.00	23.90	43.97	54.00	10.03	150	136	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5670	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:49:23

Test Graph

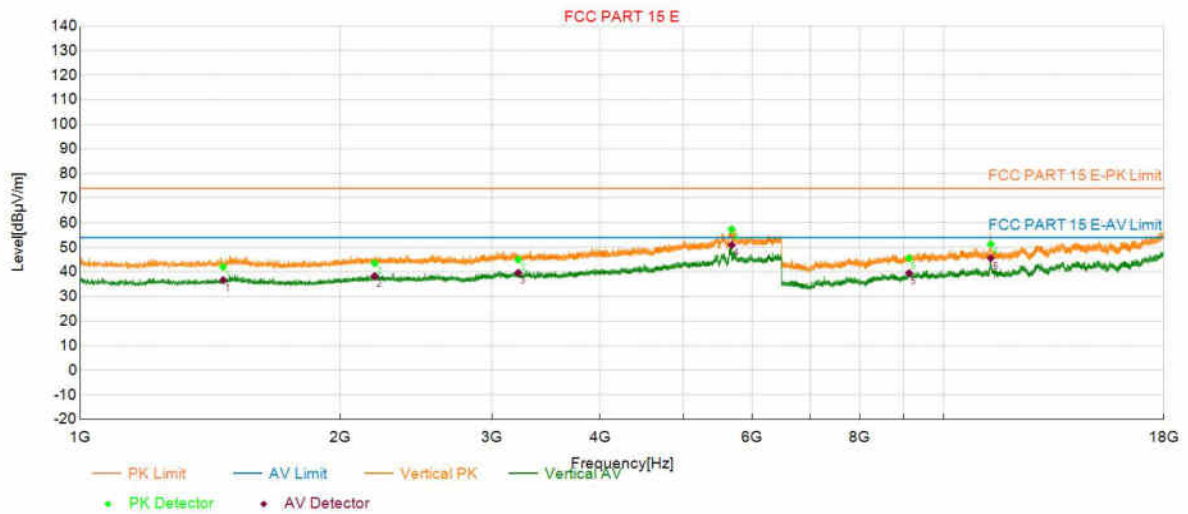

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1464.2464	4.44	42.01	74.00	31.99	36.66	54.00	17.34	150	241	Vertical
2	2193.0693	8.03	43.54	74.00	30.46	38.30	54.00	15.70	150	283	Vertical
3	3216.7217	11.38	45.01	74.00	28.99	39.63	54.00	14.37	150	11	Vertical
4	5684.2684	23.88	57.33	74.00	16.67	50.98	54.00	3.02	150	229	Vertical
5	9118.8119	4.50	45.54	74.00	28.46	39.52	54.00	14.48	150	22	Vertical
6	11340.8341	7.60	51.27	74.00	22.73	45.58	54.00	8.42	150	107	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5755	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:52:39

Test Graph

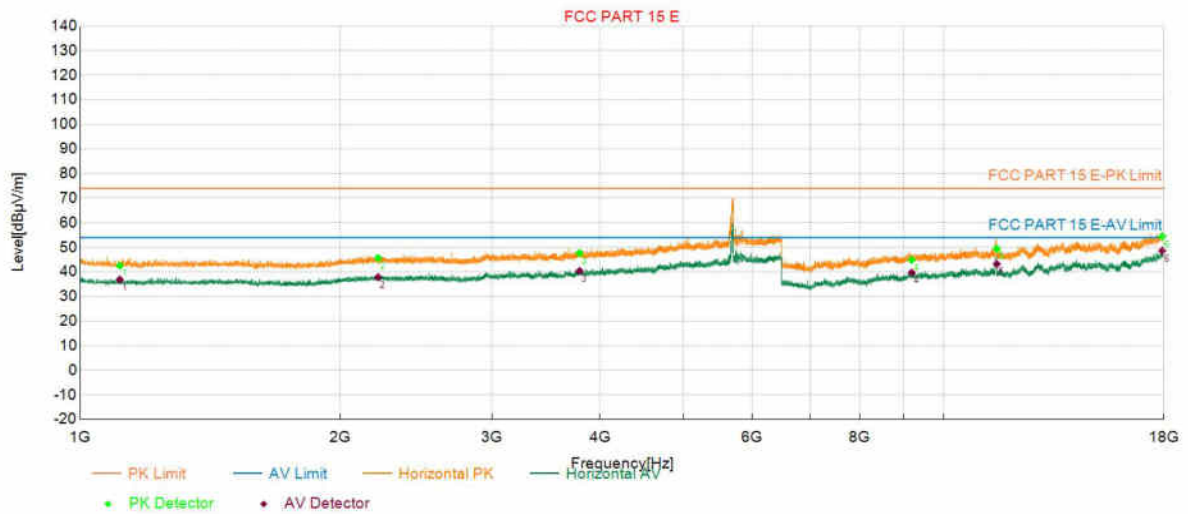

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1111.6612	2.61	42.56	74.00	31.44	36.89	54.00	17.11	150	248	Horizontal
2	2213.4213	8.04	45.64	74.00	28.36	37.85	54.00	16.15	150	307	Horizontal
3	3787.6788	13.45	47.66	74.00	26.34	40.39	54.00	13.61	150	358	Horizontal
4	9184.3684	4.69	44.90	74.00	29.10	39.70	54.00	14.30	150	58	Horizontal
5	11522.5523	7.42	49.40	74.00	24.60	43.25	54.00	10.75	150	252	Horizontal
6	17912.5913	18.62	54.48	74.00	19.52	48.55	54.00	5.45	150	239	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5755	Voltage:	5V== 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:53:59

Test Graph

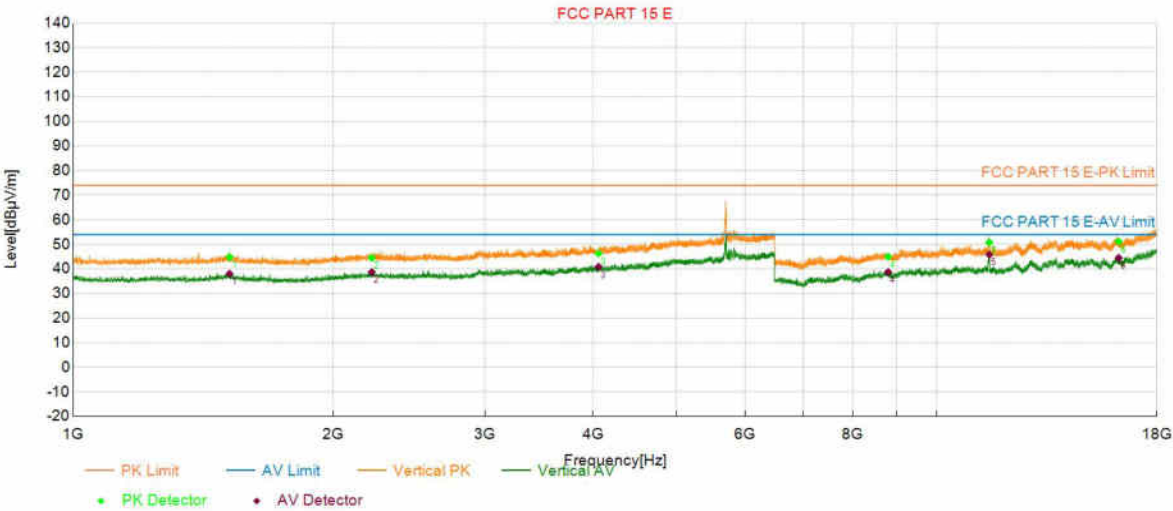


PK Final Data List											
NO.	Frequency [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1517.6018	4.52	44.80	74.00	29.20	38.01	54.00	15.99	150	134	Vertical
2	2217.2717	8.03	44.49	74.00	29.51	38.72	54.00	15.28	150	115	Vertical
3	4058.8559	14.60	46.33	74.00	27.67	40.83	54.00	13.17	150	358	Vertical
4	8788.7289	3.96	44.96	74.00	29.04	38.70	54.00	15.30	150	28	Vertical
5	11507.6008	7.54	50.81	74.00	23.19	45.84	54.00	8.16	150	175	Vertical
6	16248.3748	13.68	51.15	74.00	22.85	44.48	54.00	9.52	150	347	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5795	Voltage:	5V= 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:57:10

Test Graph

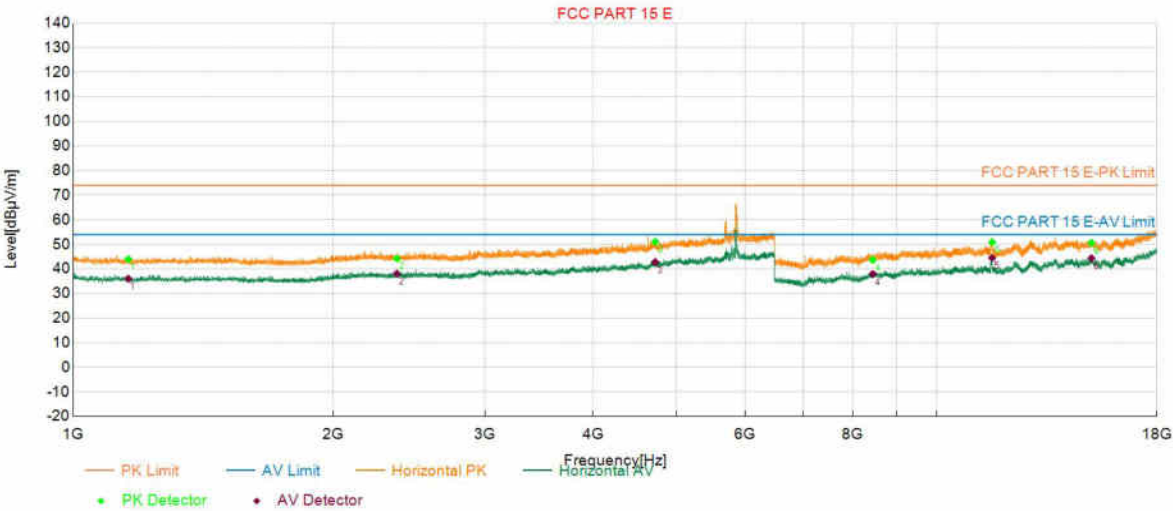


PK Final Data List											
NO.	Frequency [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1158.4158	2.83	43.93	74.00	30.07	36.04	54.00	17.96	150	245	Horizontal
2	2371.2871	7.86	44.26	74.00	29.74	38.11	54.00	15.89	150	55	Horizontal
3	4722.2222	17.57	51.02	74.00	22.98	42.82	54.00	11.18	150	275	Horizontal
4	8433.3433	3.05	43.67	74.00	30.33	37.95	54.00	16.05	150	5	Horizontal
5	11597.3097	6.86	50.90	74.00	23.10	44.47	54.00	9.53	150	196	Horizontal
6	15110.9111	14.53	50.58	74.00	23.42	44.36	54.00	9.64	150	88	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5795	Voltage:	5V $\approx$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC PART 15 E			

Start of Test:2025-05-14 10:58:30

Test Graph

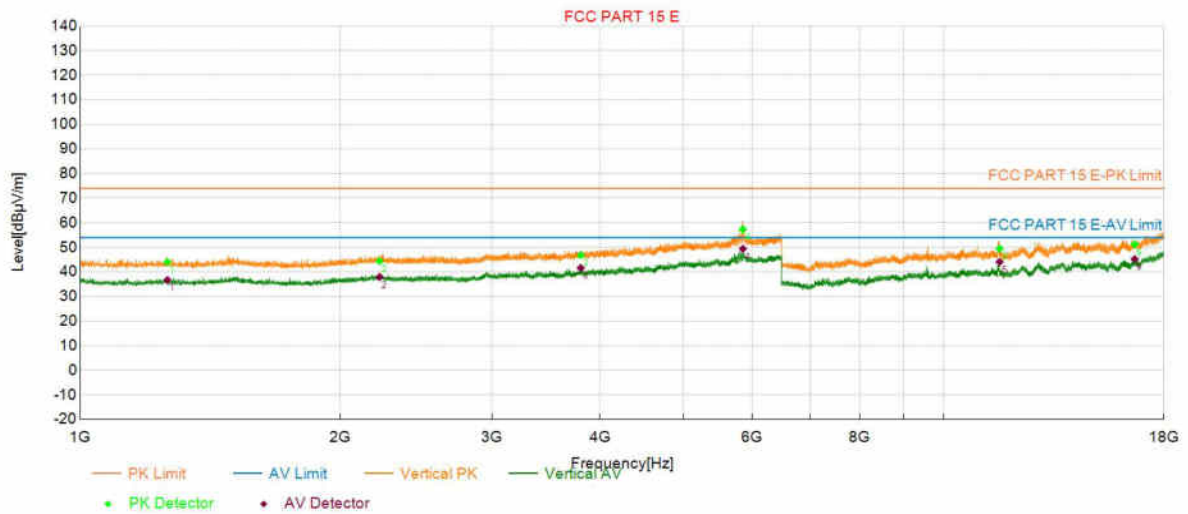

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1261.8262	3.61	43.99	74.00	30.01	36.68	54.00	17.32	150	125	Vertical
2	2222.2222	8.02	44.40	74.00	29.60	37.94	54.00	16.06	150	227	Vertical
3	3799.7800	13.56	46.82	74.00	27.18	41.62	54.00	12.38	150	199	Vertical
4	5855.3355	24.06	57.29	74.00	16.71	49.42	54.00	4.58	150	107	Vertical
5	11609.9610	6.86	49.48	74.00	24.52	44.05	54.00	9.95	150	352	Vertical
6	16646.3146	13.50	51.21	74.00	22.79	45.23	54.00	8.77	150	64	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11A_5180	Voltage:	5V $\approx$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 14:53:33

Test Graph

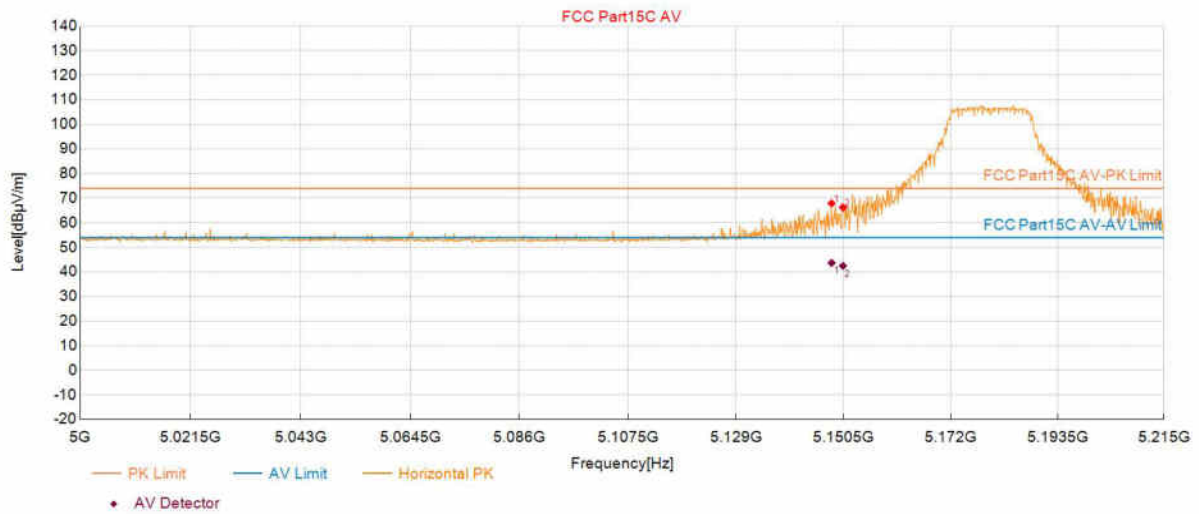

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5148.1016	67.89	17.80	74.00	6.11	150	175	Horizontal
2	5150.3602	66.23	17.79	74.00	7.77	150	184	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5148.1016	17.80	43.68	54.00	10.32	150	175	Horizontal
2	5150.3602	17.79	42.47	54.00	11.53	150	184	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11A_5180	Voltage:	5V $\approx$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 14:54:12

Test Graph

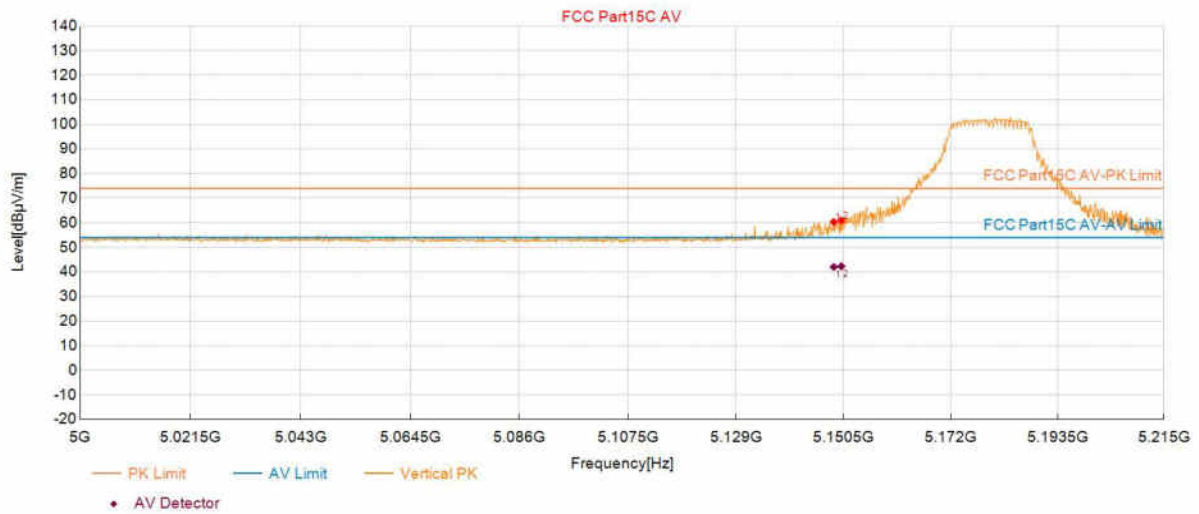

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5148.5318	60.29	17.80	74.00	13.71	150	267	Vertical
2	5150.0375	60.95	17.79	74.00	13.05	150	350	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5148.5318	17.80	41.99	54.00	12.01	150	267	Vertical
2	5150.0375	17.79	42.29	54.00	11.71	150	350	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11A_5320	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 14:58:21

Test Graph

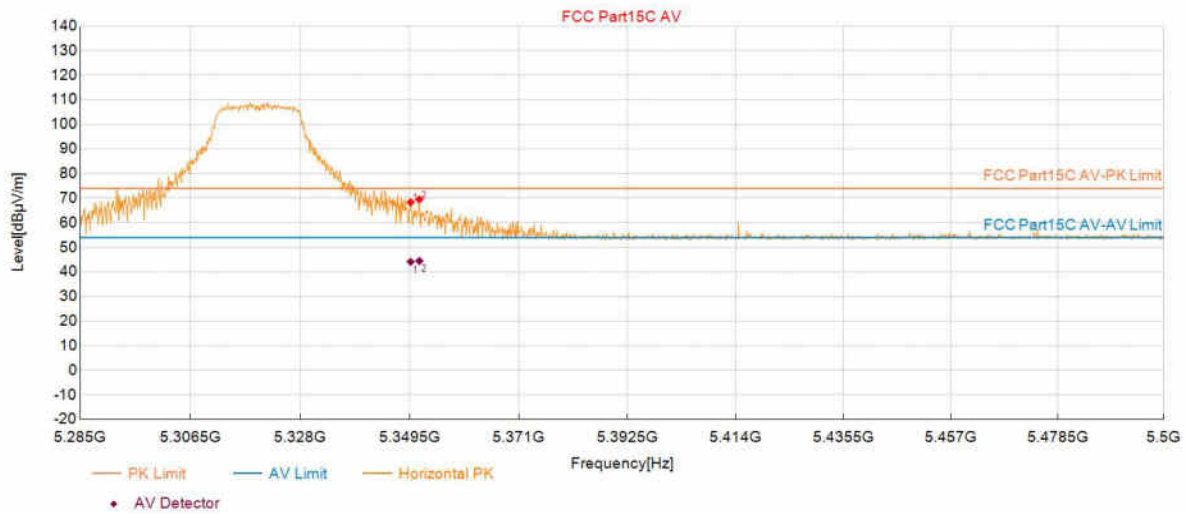

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5349.6398	68.33	18.32	74.00	5.67	150	182	Horizontal
2	5351.3607	69.47	18.34	74.00	4.53	150	182	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5349.6398	18.32	44.11	54.00	9.89	150	182	Horizontal
2	5351.3607	18.34	44.46	54.00	9.54	150	182	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11A_5320	Voltage:	5V== 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 14:59:01

Test Graph

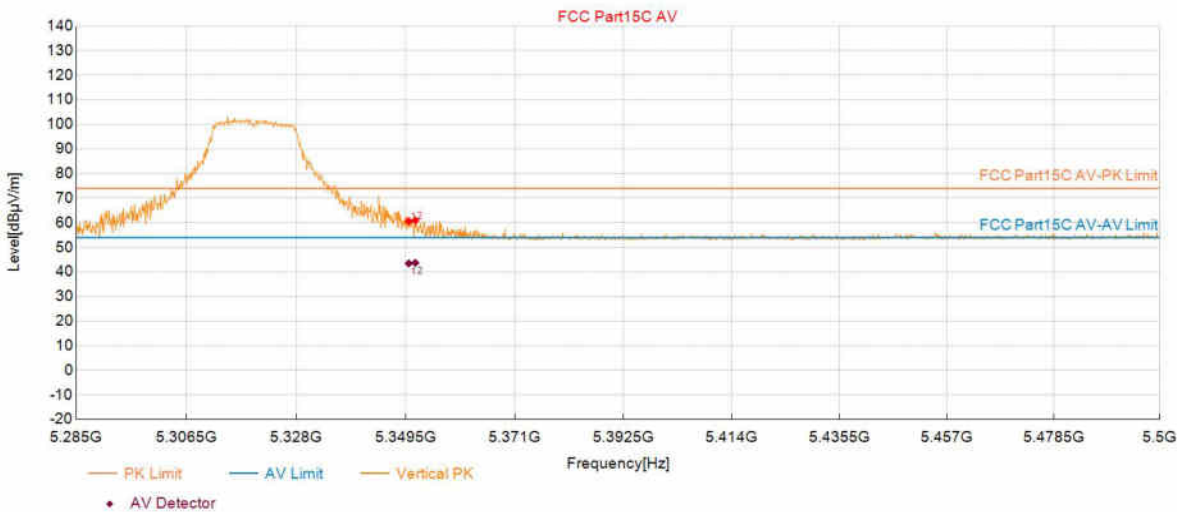

Suspected Data List								
NO.	Frequency [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0700	60.63	18.34	74.00	13.37	150	219	Vertical
2	5351.3607	60.91	18.34	74.00	13.09	150	171	Vertical


PK Final Data List								
NO.	Frequency [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0700	18.34	43.45	54.00	10.55	150	219	Vertical
2	5351.3607	18.34	43.68	54.00	10.32	150	171	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11A_5500	Voltage:	5V _{DC} 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 15:02:41

Test Graph

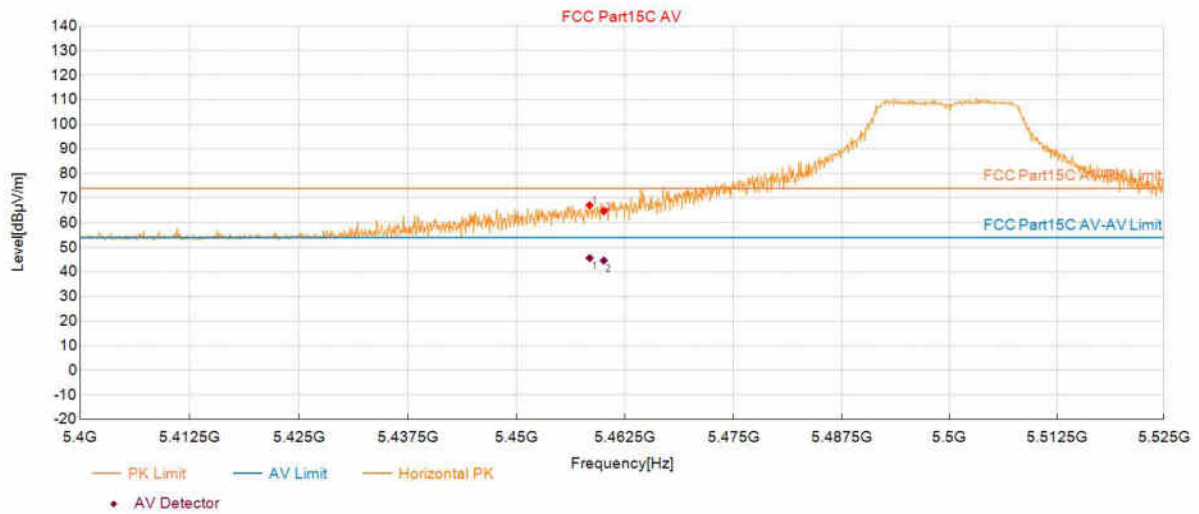

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5458.4042	67.12	18.72	74.00	6.88	150	152	Horizontal
2	5460.0300	64.67	18.72	74.00	9.33	150	169	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5458.4042	18.72	45.60	54.00	8.40	150	152	Horizontal
2	5460.0300	18.72	44.63	54.00	9.37	150	169	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11A_5500	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 15:03:21

Test Graph

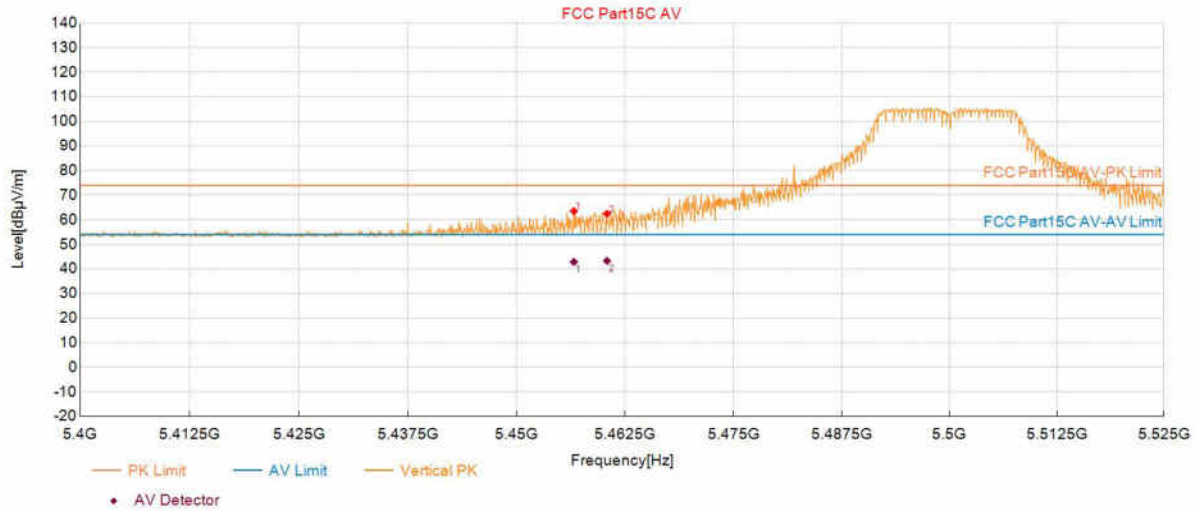

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5456.5908	63.53	18.72	74.00	10.47	150	235	Vertical
2	5460.4052	62.42	18.72	74.00	11.58	150	231	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5456.5908	18.72	42.86	54.00	11.14	150	235	Vertical
2	5460.4052	18.72	43.27	54.00	10.73	150	231	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11A_5700	Voltage:	5V $\approx$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 15:45:13

Test Graph

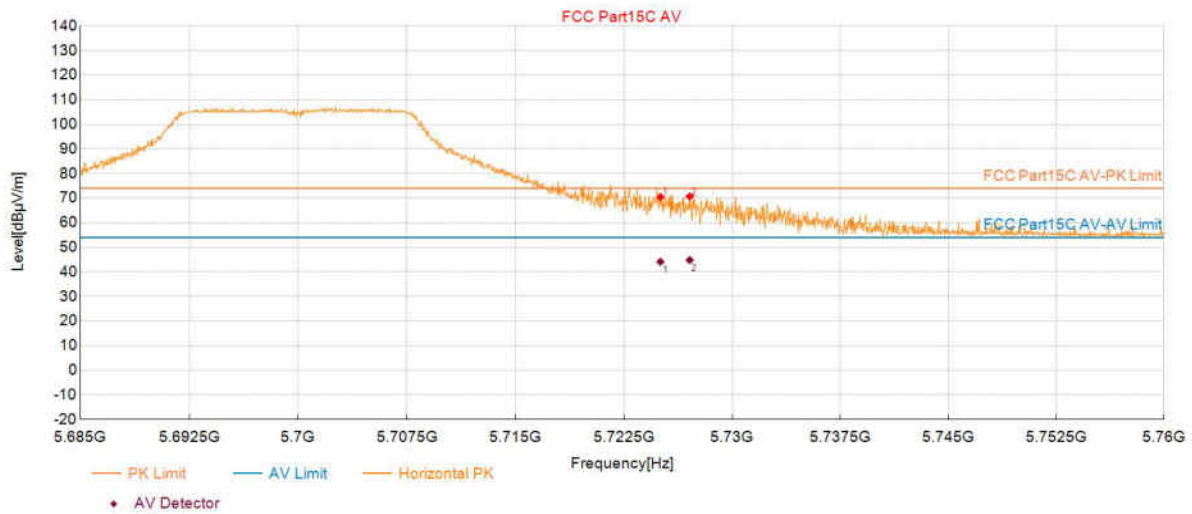

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	70.49	19.93	74.00	3.51	150	182	Horizontal
2	5727.0585	70.66	19.94	74.00	3.34	150	173	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	19.93	44.12	54.00	9.88	150	182	Horizontal
2	5727.0585	19.94	44.83	54.00	9.17	150	173	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11A_5700	Voltage:	5V _{DC} 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 15:45:53

Test Graph

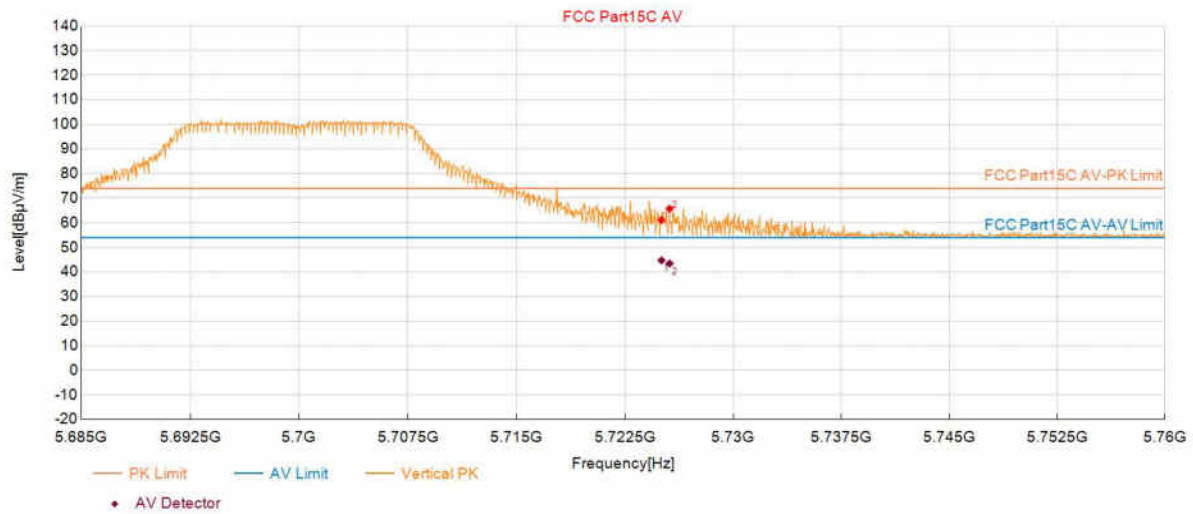

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	61.06	19.93	74.00	12.94	150	219	Vertical
2	5725.5953	65.68	19.93	74.00	8.32	150	237	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	19.93	44.70	54.00	9.30	150	219	Vertical
2	5725.5953	19.93	43.42	54.00	10.58	150	237	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N20_5180	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 15:53:06

Test Graph

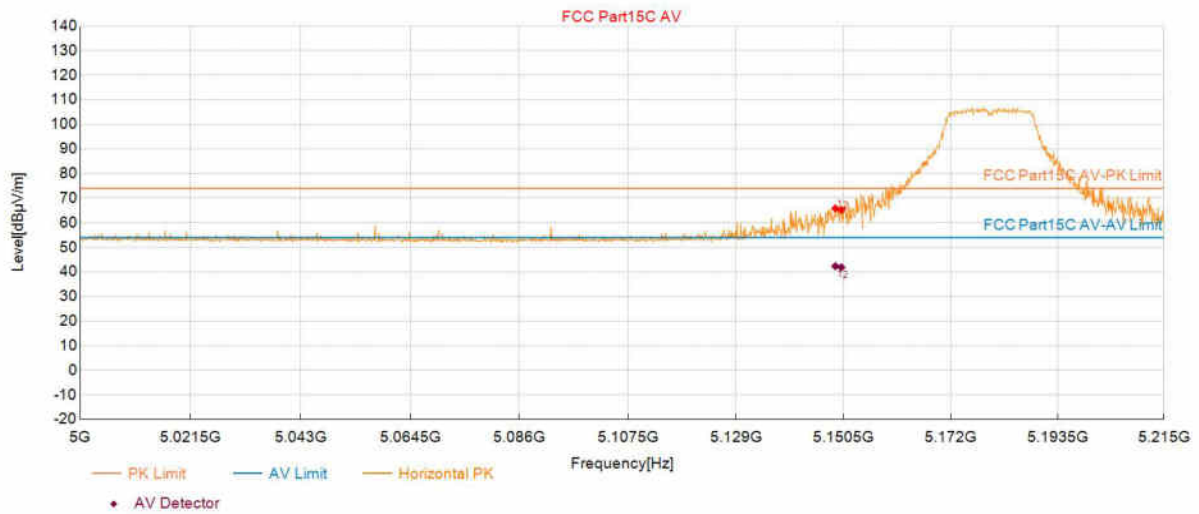

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5148.8544	65.83	17.80	74.00	8.17	150	206	Horizontal
2	5150.0375	65.22	17.79	74.00	8.78	150	170	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5148.8544	17.80	42.35	54.00	11.65	150	206	Horizontal
2	5150.0375	17.79	41.88	54.00	12.12	150	170	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N20_5180	Voltage:	5V _{DC} 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 15:53:46

Test Graph

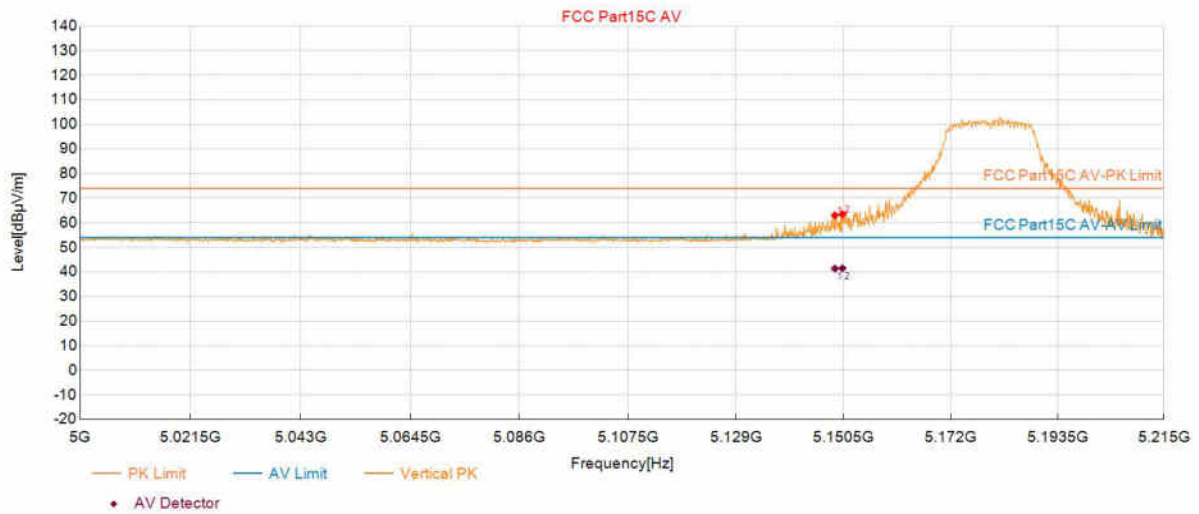

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5148.7469	63.05	17.80	74.00	10.95	150	153	Vertical
2	5150.2526	63.47	17.79	74.00	10.53	150	340	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5148.7469	17.80	41.34	54.00	12.66	150	153	Vertical
2	5150.2526	17.79	41.48	54.00	12.52	150	340	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N20_5320	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 15:58:56

Test Graph

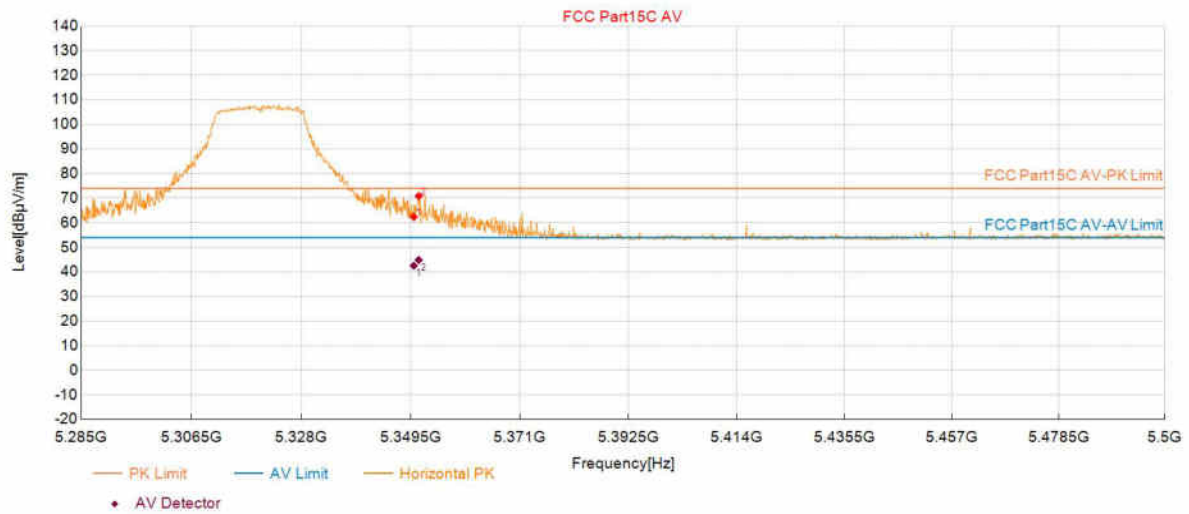

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0700	62.39	18.34	74.00	11.61	150	189	Horizontal
2	5351.0380	70.85	18.34	74.00	3.15	150	162	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0700	18.34	42.53	54.00	11.47	150	189	Horizontal
2	5351.0380	18.34	44.85	54.00	9.15	150	162	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N20_5320	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 15:59:36

Test Graph

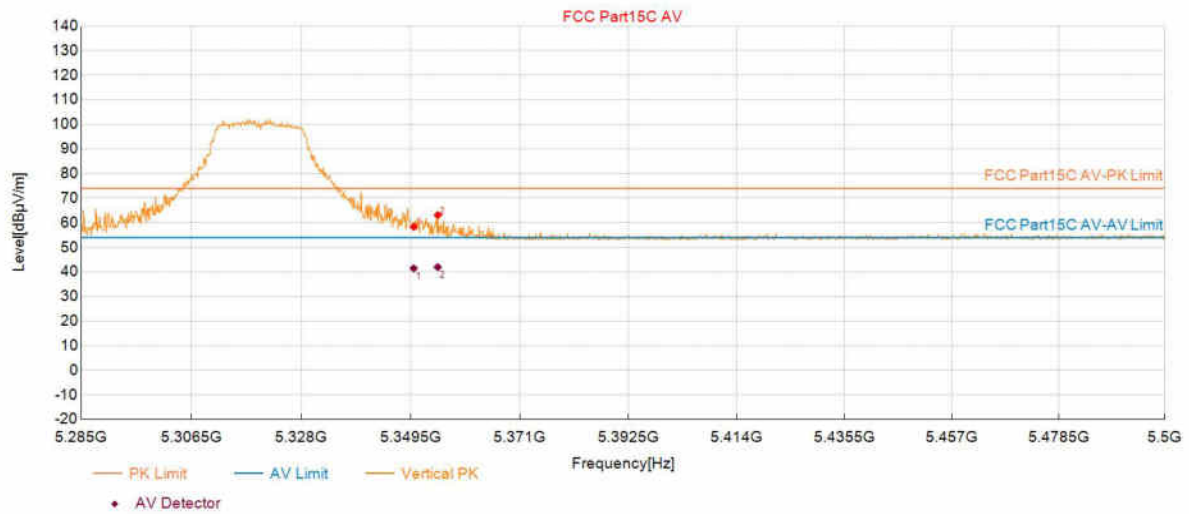

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0700	58.34	18.34	74.00	15.66	150	162	Vertical
2	5354.8024	63.11	18.36	74.00	10.89	150	175	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0700	18.34	41.44	54.00	12.56	150	162	Vertical
2	5354.8024	18.36	41.95	54.00	12.05	150	175	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N20_5500	Voltage:	5V $\equiv$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 16:07:59

Test Graph

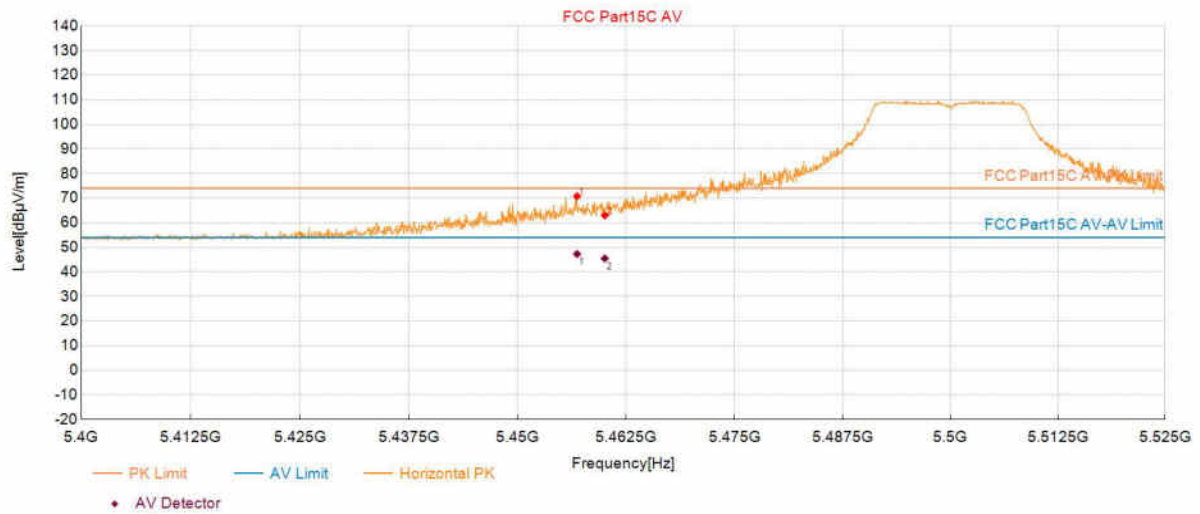

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5456.8409	70.78	18.72	74.00	3.22	150	171	Horizontal
2	5460.0300	62.98	18.72	74.00	11.02	150	183	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5456.8409	18.72	47.31	54.00	6.69	150	171	Horizontal
2	5460.0300	18.72	45.49	54.00	8.51	150	183	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N20_5500	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 16:08:39

Test Graph

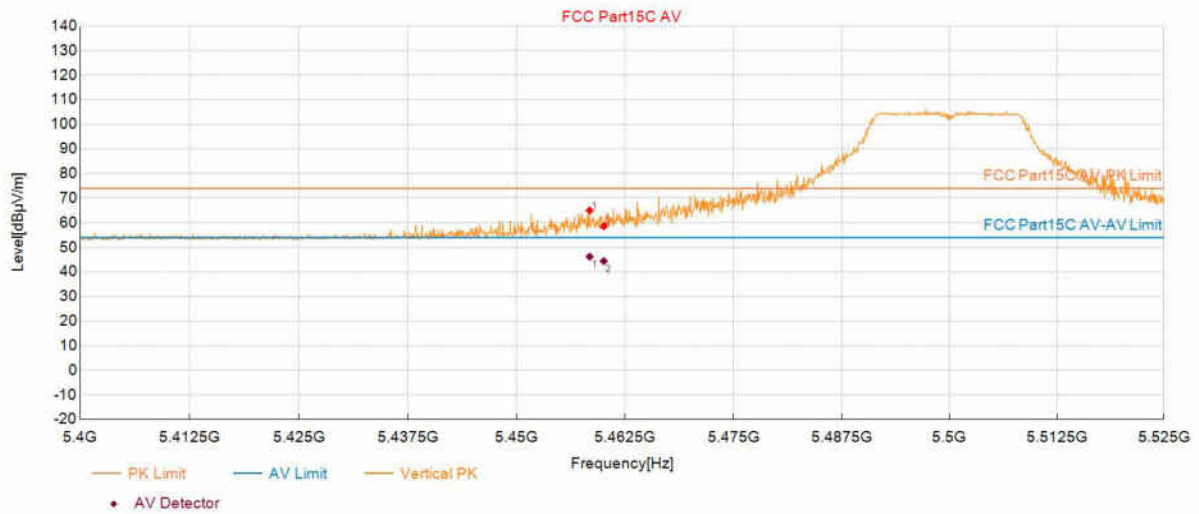

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5458.4042	64.98	18.72	74.00	9.02	150	228	Vertical
2	5460.0300	58.62	18.72	74.00	15.38	150	232	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5458.4042	18.72	46.21	54.00	7.79	150	228	Vertical
2	5460.0300	18.72	44.38	54.00	9.62	150	232	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N20 5700	Voltage:	5V $\equiv$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 14		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-16 16:57:31

Test Graph

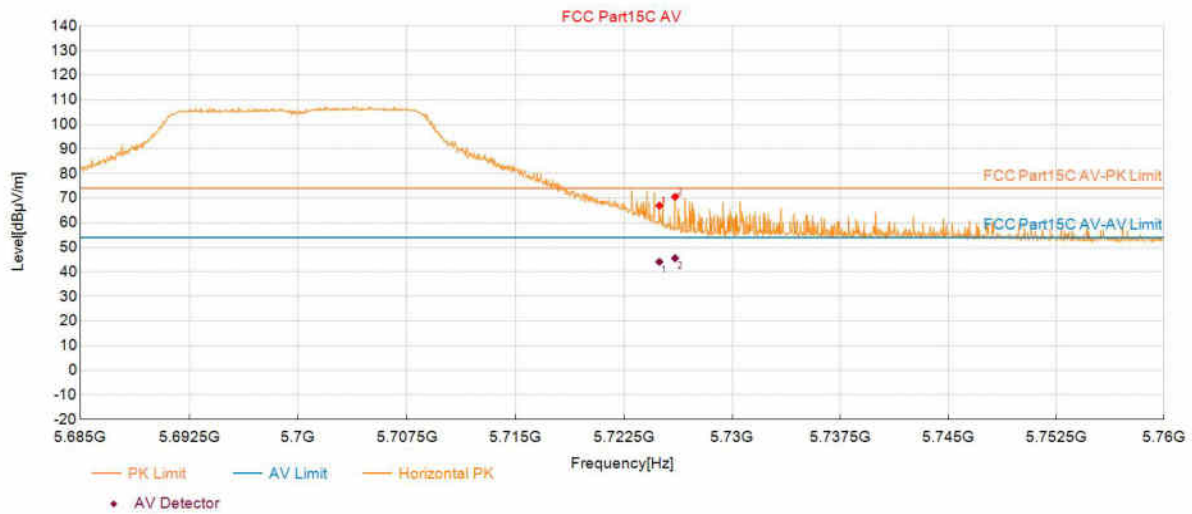

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5724.9575	66.98	19.92	74.00	7.02	150	201	Horizontal
2	5726.0455	70.53	19.93	74.00	3.47	150	178	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5724.9575	19.92	44.11	54.00	9.89	150	201	Horizontal
2	5726.0455	19.93	45.59	54.00	8.41	150	178	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N20 5700	Voltage:	5V $\approx$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 14		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-16 16:58:14

Test Graph

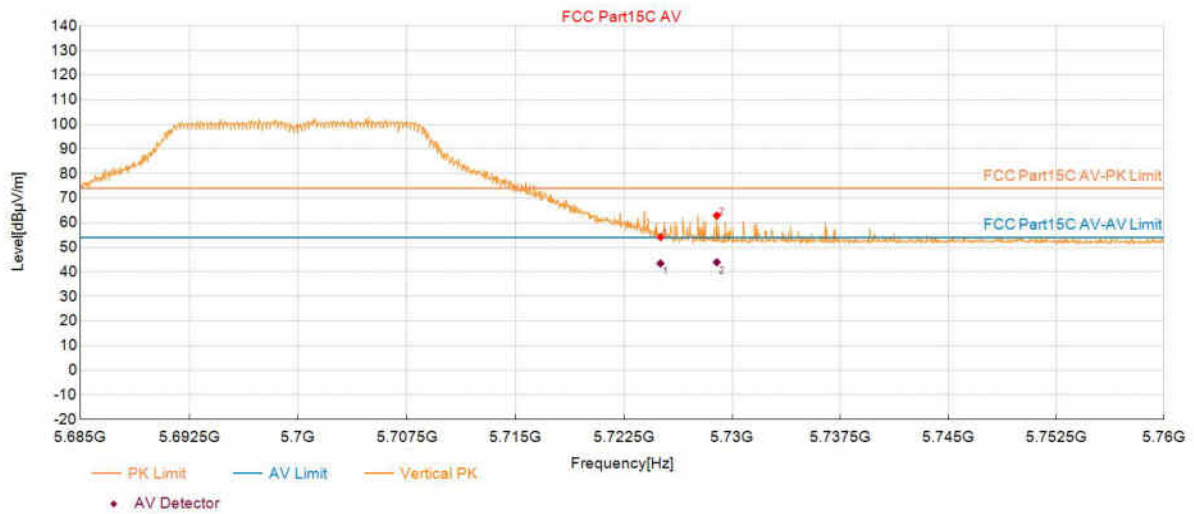

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	54.15	19.93	74.00	19.85	150	232	Vertical
2	5728.9345	62.95	19.94	74.00	11.05	150	227	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	19.93	43.45	54.00	10.55	150	232	Vertical
2	5728.9345	19.94	43.95	54.00	10.05	150	227	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5190	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 16:26:25

Test Graph

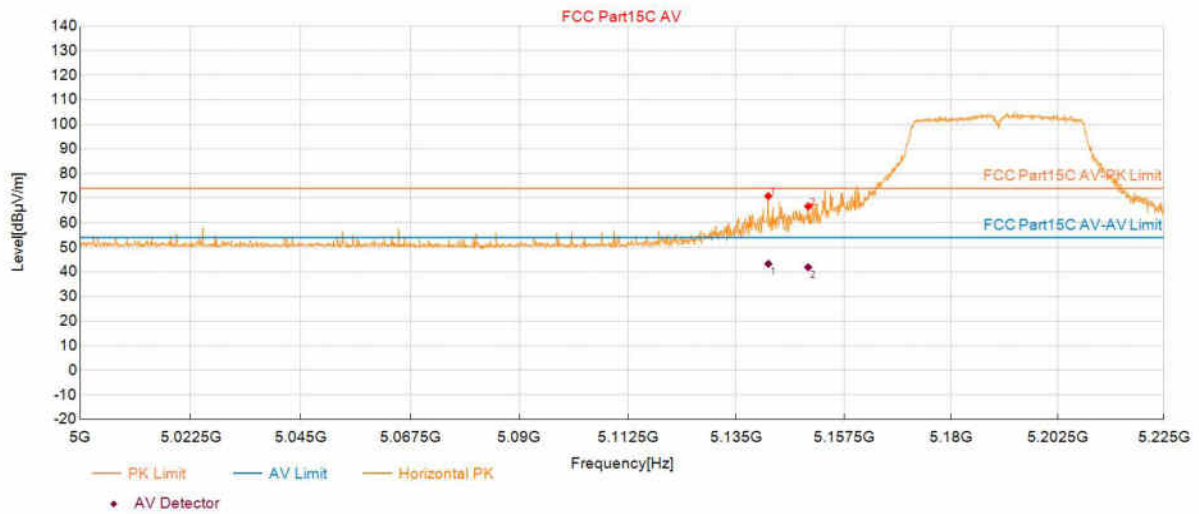

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5141.7084	70.81	17.80	74.00	3.19	150	169	Horizontal
2	5150.0375	66.65	17.79	74.00	7.35	150	161	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5141.7084	17.80	43.29	54.00	10.71	150	169	Horizontal
2	5150.0375	17.79	41.89	54.00	12.11	150	161	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5190	Voltage:	5V= 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 16:27:05

Test Graph

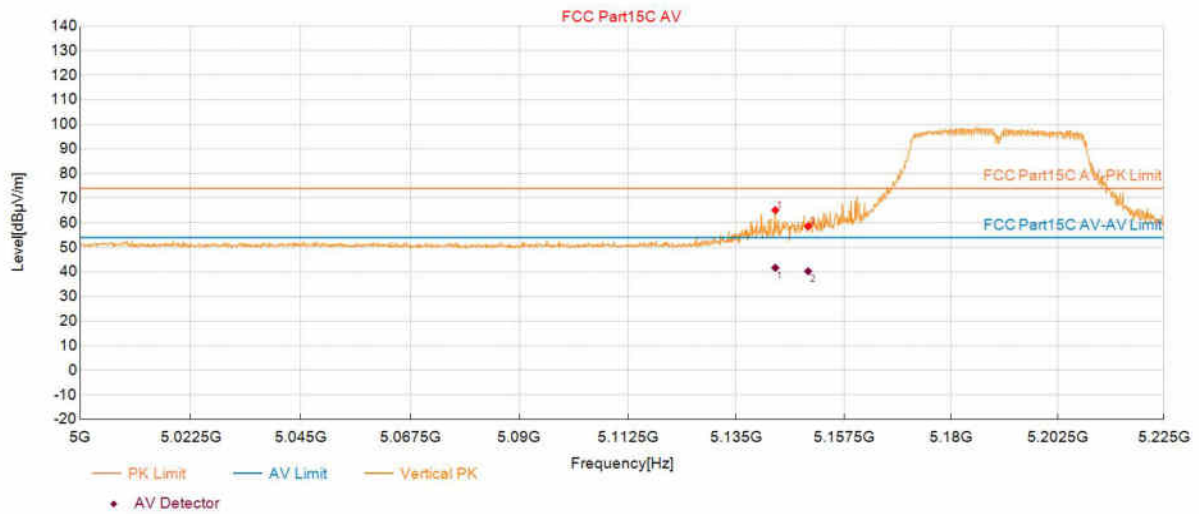

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5143.1716	65.12	17.80	74.00	8.88	150	225	Vertical
2	5150.0375	58.60	17.79	74.00	15.40	150	176	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5143.1716	17.80	41.67	54.00	12.33	150	225	Vertical
2	5150.0375	17.79	40.28	54.00	13.72	150	176	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5310	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 16:36:02

Test Graph

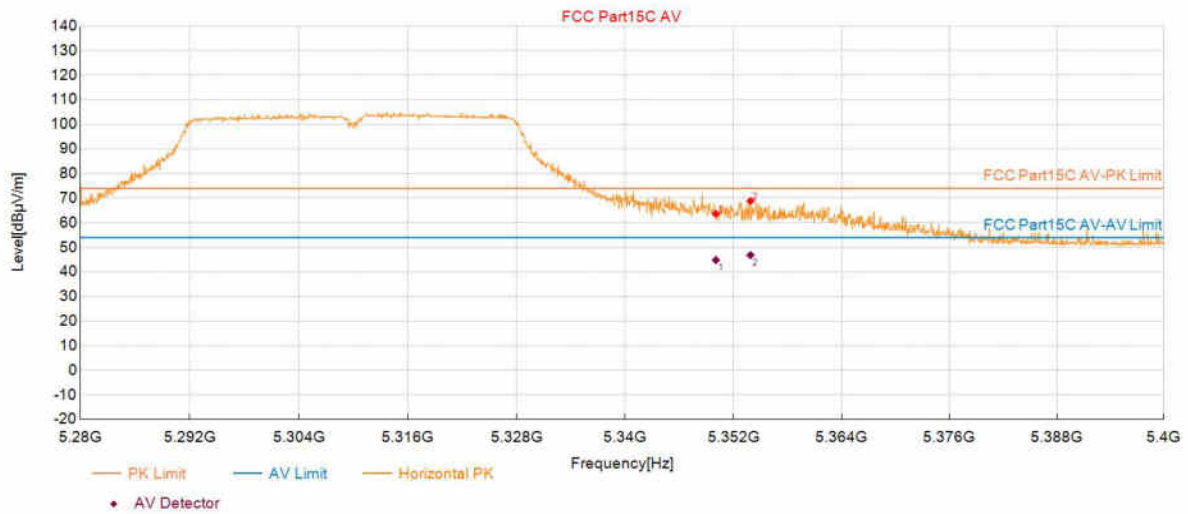

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0550	63.59	18.34	74.00	10.41	150	132	Horizontal
2	5353.8969	68.83	18.36	74.00	5.17	150	168	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0550	18.34	44.84	54.00	9.16	150	132	Horizontal
2	5353.8969	18.36	46.84	54.00	7.16	150	168	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40_5310	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 16:36:41

Test Graph

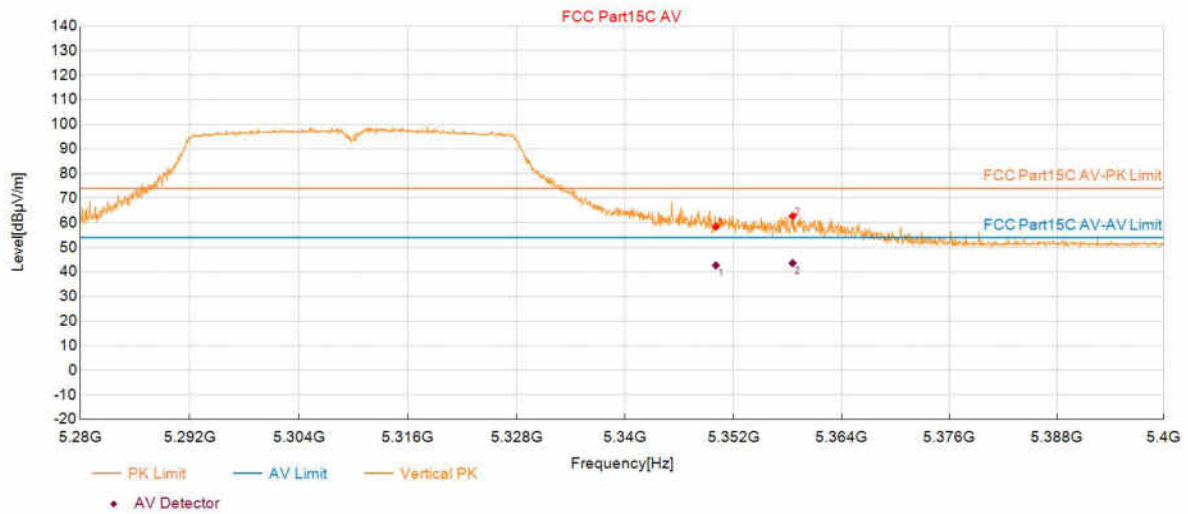

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0550	58.37	18.34	74.00	15.63	150	160	Vertical
2	5358.5793	62.68	18.38	74.00	11.32	150	230	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0550	18.34	42.67	54.00	11.33	150	160	Vertical
2	5358.5793	18.38	43.57	54.00	10.43	150	230	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40 5510	Voltage:	5V $\equiv$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 17		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-16 17:10:00

Test Graph

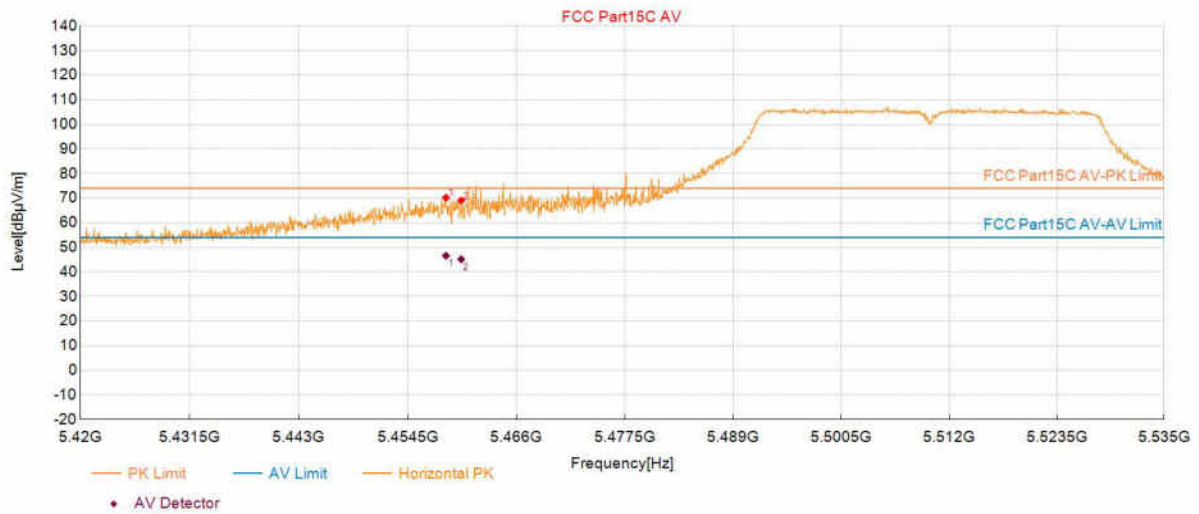

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5458.5443	70.19	18.72	74.00	3.81	150	156	Horizontal
2	5460.1551	69.01	18.72	74.00	4.99	150	188	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5458.5443	18.72	46.58	54.00	7.42	150	156	Horizontal
2	5460.1551	18.72	45.16	54.00	8.84	150	188	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40 5510	Voltage:	5V $\equiv$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 17		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-16 17:10:43

Test Graph

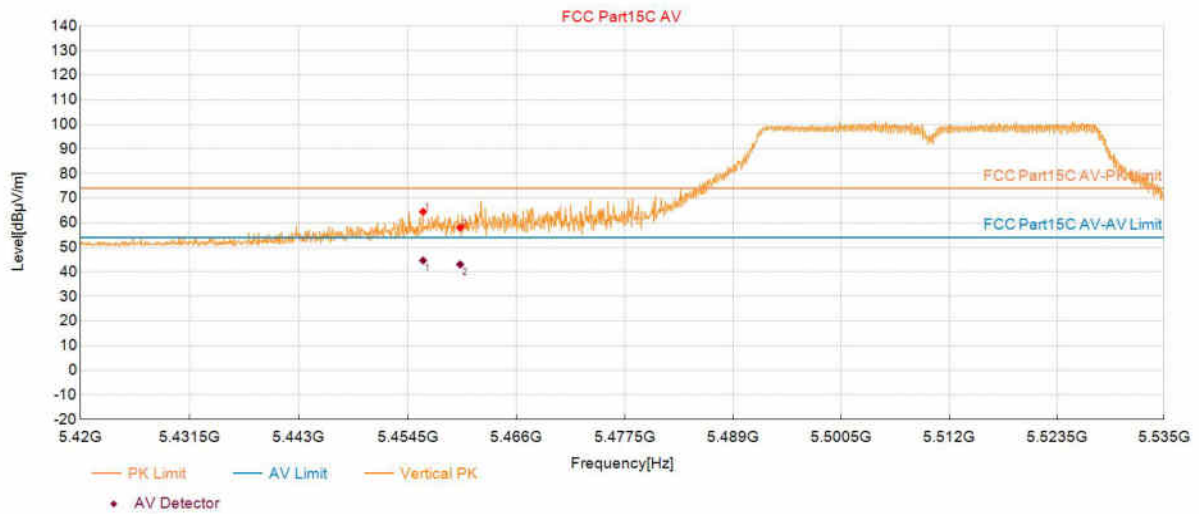

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5456.1281	64.47	18.72	74.00	9.53	150	233	Vertical
2	5460.0400	58.01	18.72	74.00	15.99	150	233	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5456.1281	18.72	44.64	54.00	9.36	150	233	Vertical
2	5460.0400	18.72	43.05	54.00	10.95	150	233	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40 5670	Voltage:	5V $\approx$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 17		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-16 17:16:03

Test Graph

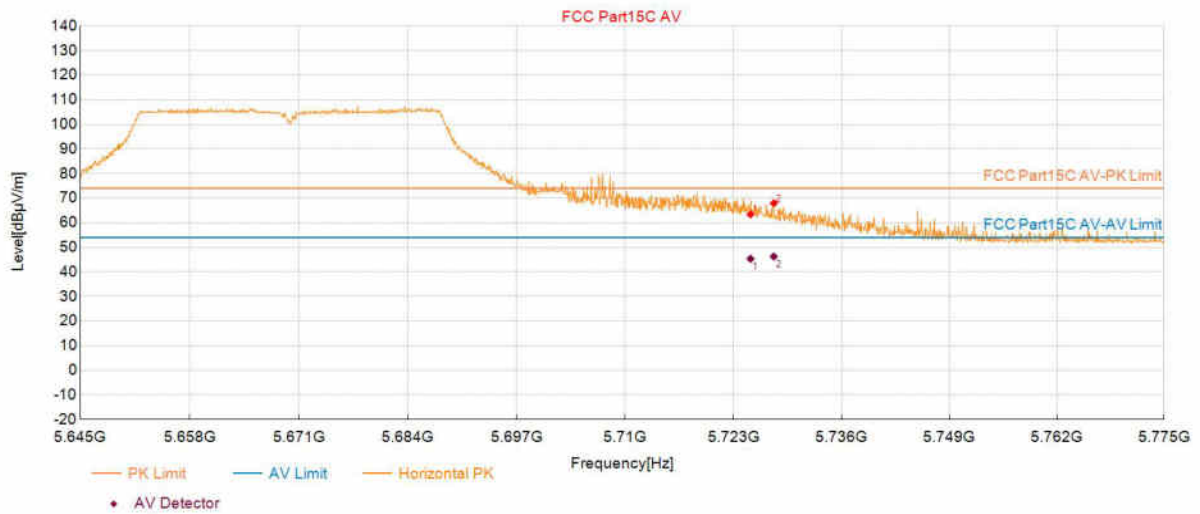

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0550	63.44	19.93	74.00	10.56	150	200	Horizontal
2	5727.8514	67.96	19.94	74.00	6.04	150	188	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0550	19.93	45.33	54.00	8.67	150	200	Horizontal
2	5727.8514	19.94	46.27	54.00	7.73	150	188	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11N40 5670	Voltage:	5V $\equiv$ 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 17		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-16 17:16:42

Test Graph

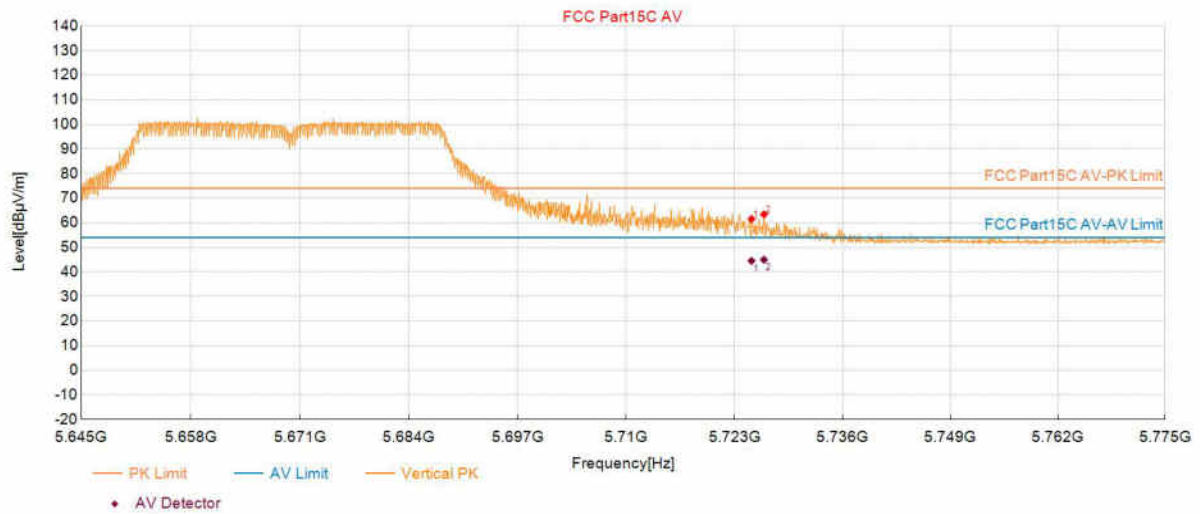

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0550	61.54	19.93	74.00	12.46	150	260	Vertical
2	5726.5508	63.42	19.93	74.00	10.58	150	238	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0550	19.93	44.50	54.00	9.50	150	260	Vertical
2	5726.5508	19.93	44.94	54.00	9.06	150	238	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11AC20_5180	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 16:52:40

Test Graph

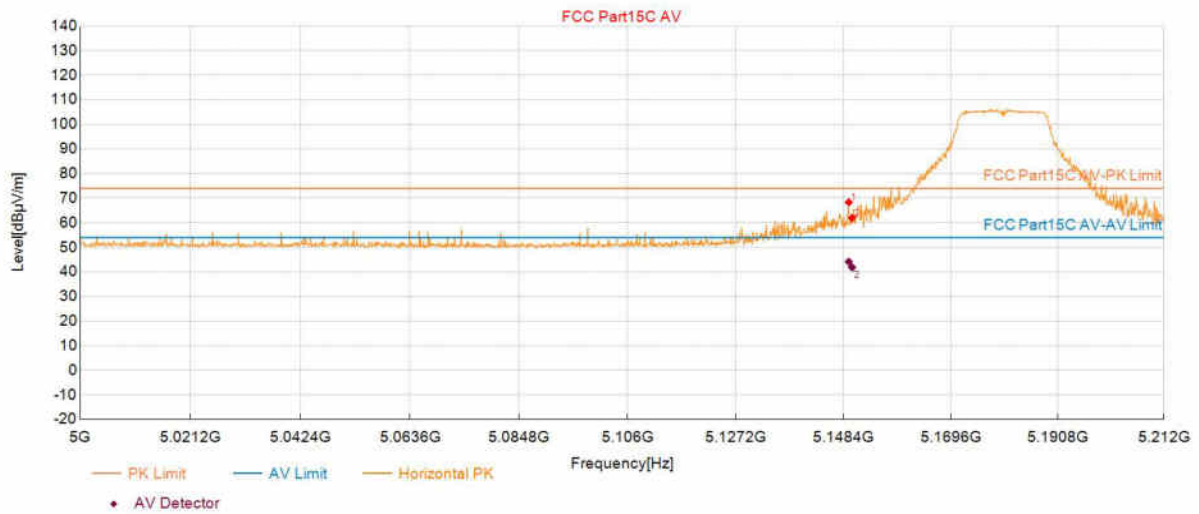

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5149.4287	68.32	17.80	74.00	5.68	150	180	Horizontal
2	5150.0650	61.95	17.79	74.00	12.05	150	194	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5149.4287	17.80	44.16	54.00	9.84	150	180	Horizontal
2	5150.0650	17.79	41.90	54.00	12.10	150	194	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11AC20_5180	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 16:53:20

Test Graph

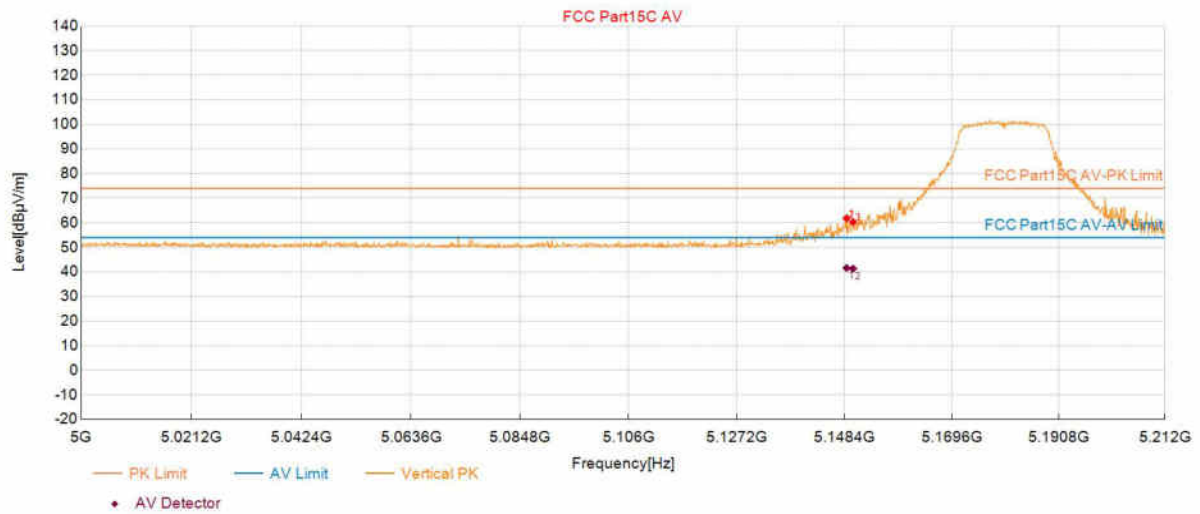

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5148.7924	61.79	17.80	74.00	12.21	150	262	Vertical
2	5148.7924	61.79	17.80	74.00	12.21	150	262	Vertical
3	5150.0650	60.25	17.79	74.00	13.75	150	168	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5148.7924	17.80	41.60	54.00	12.40	150	262	Vertical
2	5150.0650	17.79	41.32	54.00	12.68	150	168	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11AC20_5320	Voltage:	5V= 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 16:58:03

Test Graph

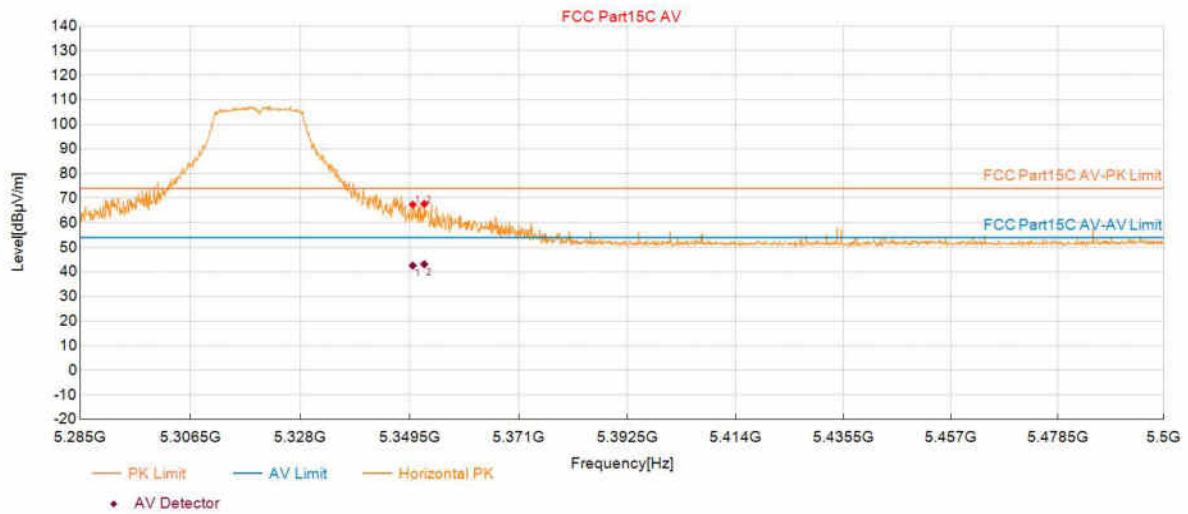

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0700	67.35	18.34	74.00	6.65	150	174	Horizontal
2	5352.3287	67.63	18.35	74.00	6.37	150	192	Horizontal

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0700	18.34	42.56	54.00	11.44	150	174	Horizontal
2	5352.3287	18.35	43.13	54.00	10.87	150	192	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11AC20_5320	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 16:58:43

Test Graph

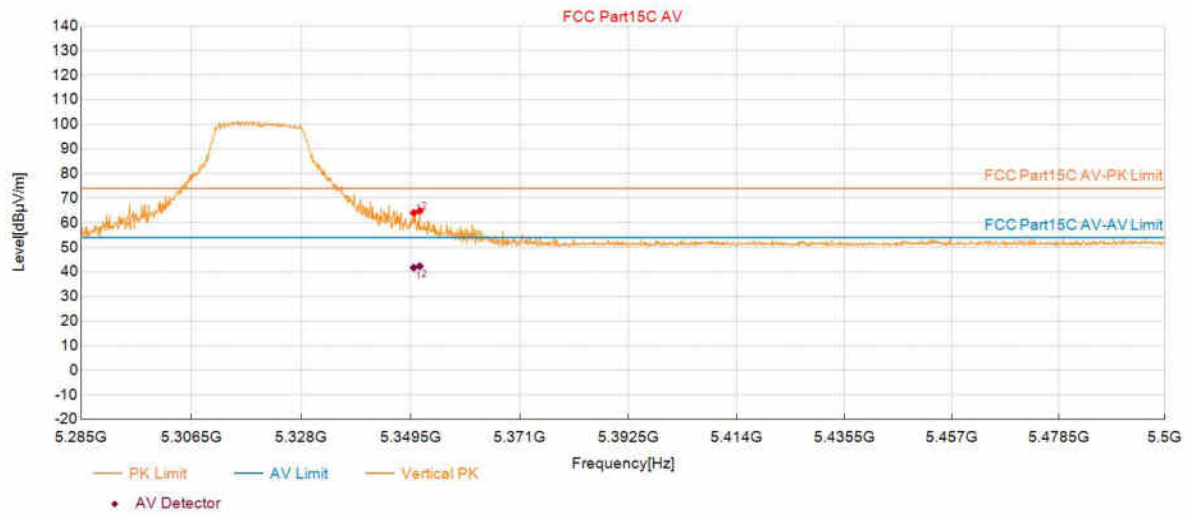

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0700	64.02	18.34	74.00	9.98	150	166	Vertical
2	5351.2531	64.80	18.34	74.00	9.20	150	172	Vertical

PK Final Data List


NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0700	18.34	41.75	54.00	12.25	150	166	Vertical
2	5351.2531	18.34	42.31	54.00	11.69	150	172	Vertical

Test Report

Project Information			
Customer:			
EUT:	Seedpace Interactive Player		
Model:	XHS10A	SN:	
Mode:	11AC20_5500	Voltage:	5V--- 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2025-05-14 17:05:35

Test Graph

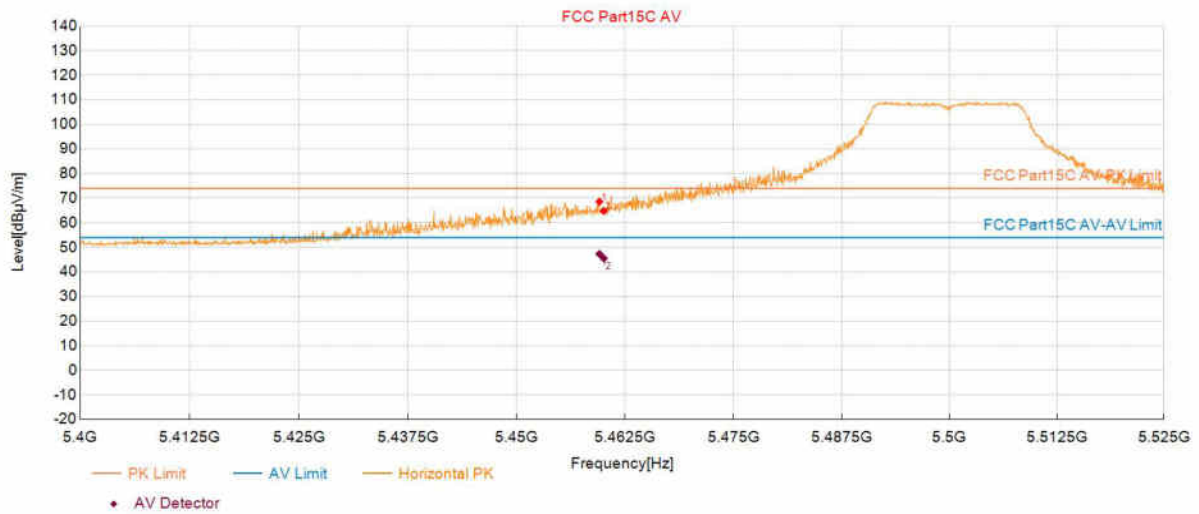

Suspected Data List

NO.	Frequency [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5459.5298	68.56	18.72	74.00	5.44	150	158	Horizontal
2	5460.0300	64.79	18.72	74.00	9.21	150	145	Horizontal

PK Final Data List

NO.	Frequency [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5459.5298	18.72	47.31	54.00	6.69	150	158	Horizontal
2	5460.0300	18.72	45.50	54.00	8.50	150	145	Horizontal