



## ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.element.com>

### PART 22H & 90 MEASUREMENT REPORT

**Applicant Name:**

Centum Research & Technology S.L

Fonte das Abelleiras S/N

Edificio Citexvi

36310 Vigo (Spain)

**Date of Testing:**

04/05 - 10/09/2024

**Test Report Issue Date:**

12/2/2024

**Test Site/Location:**

Element lab., Columbia, MD, USA

**Test Report Serial No.:**

1M2402290014-04.2A93U

**FCC ID:**

**2A93U-58450**

**APPLICANT:**

**Centum Research & Technology S.L**

**Application Type:**

Certification

**Model:**

Lifeseeker SAR XL S10

**EUT Type:**

Geolocation System

**FCC Classification:**

PCS Licensed Transmitter (PCB)

**FCC Rule Part:**

§22(H), §90(S)

**Test Procedure(s):**

ANSI C63.26-2015

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**RJ Ortanez**  
Executive Vice President



<b>FCC ID:</b> 2A93U-58450	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2402290014-04.2A93U	<b>Test Dates:</b> 04/05 - 10/09/2024	<b>EUT Type:</b> Geolocation System	Page 1 of 32

## T A B L E O F C O N T E N T S

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	Software and Firmware .....	5
2.5	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS .....	10
7.1	Summary.....	10
7.2	Transmitter Conducted Output Power/ Effective Radiated Power.....	11
7.3	Occupied Bandwidth .....	14
7.4	Spurious and Harmonic Emissions at Antenna Terminal .....	16
7.5	Band Edge Emissions at Antenna Terminal .....	20
7.6	Radiated Spurious Emissions Measurements.....	25
7.7	Frequency Stability / Temperature Variation .....	30
8.0	CONCLUSION.....	32

<b>FCC ID:</b> 2A93U-58450	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2402290014-04.2A93U	<b>Test Dates:</b> 04/05 - 10/09/2024	<b>EUT Type:</b> Geolocation System	Page 2 of 32

# MEASUREMENT REPORT

FCC Part 22H & 90



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 26	5 MHz	QPSK	861.5 - 866.5	0.942	29.74	4M80G7D

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 3 of 32

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

**Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.**

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 4 of 32

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Centum Geolocation System FCC ID: 2A93U-58450**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90 and 22H.

**Test Device Serial No.: 213006**

### 2.2 Device Capabilities

This device contains the following capabilities:

LTE Bands 26/5, 25/2, 12, 13, 66/4 (with 5MHz operation only), UMTS 850, UMTS 1700, UMTS 1900, UMTS B12, UMTS B13, GSM 850, and GSM1900

LTE operation only supports QPSK modulation.

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The EUT used test software provided by the manufacturer to generate the RF waveforms at maximum (>98%) duty cycle.

### 2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version 3.x installed on the EUT.

### 2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 5 of 32

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

**Deviation from Measurement Procedure.....None**

### 3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 6 of 32

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 7 of 32

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
N/A	ETS-001	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	ETS-001
N/A	ETS-002	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	ETS-002
EMCO	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	4/9/2024	Annual	4/9/2025	MY52350166
Keysight Technologies	N9038A	MXE EMI Receiver	8/30/2023	Annual	8/30/2024	MY51210133
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	9/25/2023	Annual	9/25/2024	100342
Sunol Sciences	JB5	Bi-Log Antenna (30M-5GHz)	8/30/2022	Biennial	8/30/2024	A051107
N/A	RF010	SMA-SMA RF Cable	5/21/2024	Annual	5/21/2025	RF010
N/A	WL25-4	WLAN Cable Set (25GHz)	5/21/2024	Annual	5/21/2025	WL25-4

**Table 5-1. Test Equipment (04/05 – 06/24/2024)**

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Espec	ESX-2CA	Environmental Chamber	9/26/2024	Biennial	9/26/2026	017620

**Table 5-2. Test Equipment (10/07 – 10/09/2024)**

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 8 of 32



## 6.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm –  $(-24.80) = 50.3$  dBc.

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 9 of 32

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Centum Research & Technology S.L  
 FCC ID: 2A93U-58450  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
<b>CONDUCTED</b>	Transmitter Conducted Output Power	2.1046(a), 90.635(b)	< 100 Watts	PASS	Section 7.2
	Effective Radiated Power (LTE Band 26)	22.913(a)(5)	< 7 Watts max. ERP for operation crossing over into the 869- 894MHz band	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (LTE Band 26)	2.1051, 90.691(a)	> 43 + 10 log10(P[Watts]) for all out-of-band emissions except emissions beyond 37.5kHz from the block edge > 50 + 10 log10(P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	PASS	Sections 7.4, 7.5
	Frequency Stability	2.1055, 90.213	< 2.5 ppm	PASS	Section 7.7
<b>RADIATED</b>	Radiated Spurious Emissions (LTE Band 26)	2.1053, 90.691(a)	> 43 + 10 log10(P[Watts]) for all out-of-band emissions except emissions beyond 37.5kHz from the block edge	PASS	Section 7.6

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.2.2.

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 10 of 32

## 7.2 Transmitter Conducted Output Power/ Effective Radiated Power

### Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

### Test Procedure Used

ANSI C63.26-2015 – Section 5.2.4.4.1

### Test Settings

1. Span = 2 x OBW to 3 x OBW
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**


### Test Notes

1. The applicant has declared the usage of a 5dBi antenna for frequencies shown in this test report. Additionally, the applicant has declared that it will always use a long RF cable with similar path loss as shown in the tables in this section. Thus, there is a net antenna gain used to determine ERP compliance per Part 90.
2. In the following tables, the ERP is determined by subtracting 2.15dB from the calculated EIRP value.

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 11 of 32


Bandwidth	Channel	Frequency [MHz]	Conducted Power [dBm]	Ant Gain [dBi]	Cable Loss [dBm]	Adjusted Ant Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
5 MHz	8715	861.5	32.89	5.00	6.00	-1.00	29.74	0.942	38.45	-8.71
	8765	866.5	32.82	5.00	6.01	-1.01	29.66	0.924	38.45	-8.79

**Table 7-2. Transmitter Conducted Output Power/ Effective Radiated Power (LTE Band 26)**

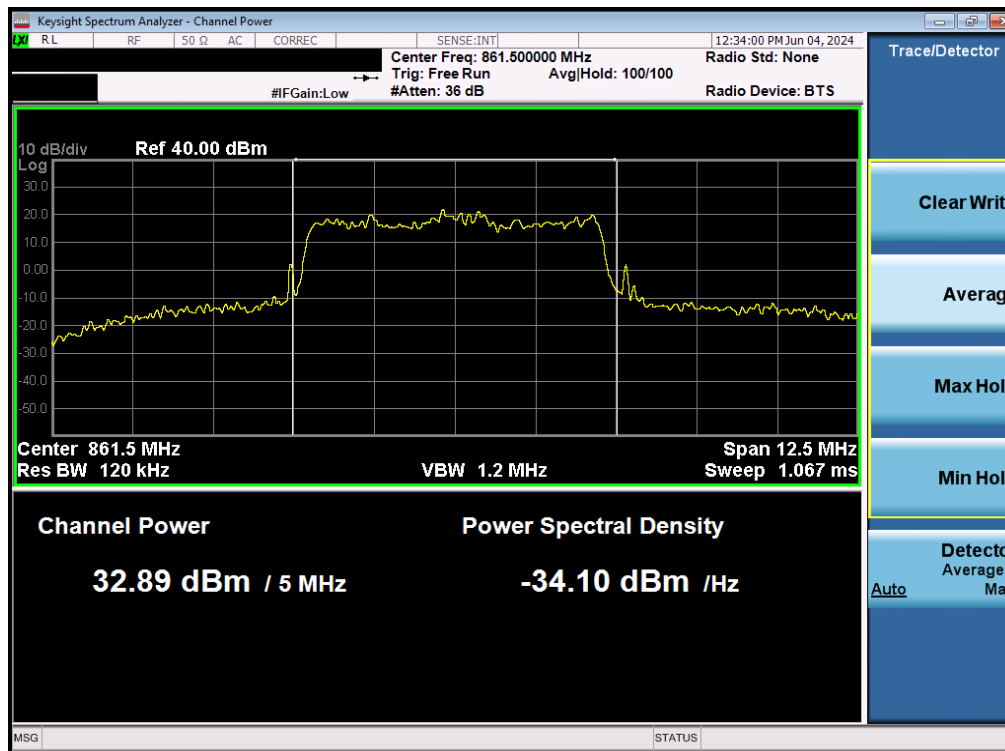

**Plot 7-1. Conducted Spurious Plot (LTE Band 26)**

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 12 of 32

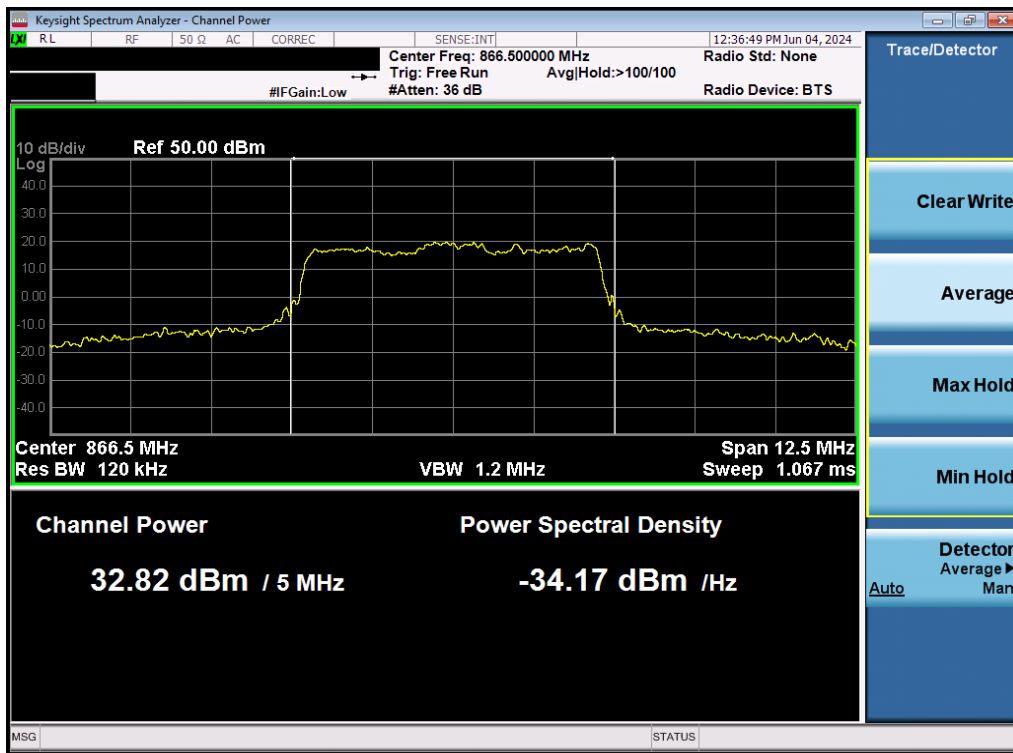

Plot 7-2. Conducted Spurious Plot (LTE Band 26)

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 13 of 32

## 7.3 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst-case configuration results are reported in this section.

### Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 14 of 32



Plot 7-3. Occupied Bandwidth Plot (LTE Band 26)

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 15 of 32

## 7.4 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{\text{Watts}})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW  $\geq$  100kHz
3. VBW  $\geq$  3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


Per Part 90, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 16 of 32



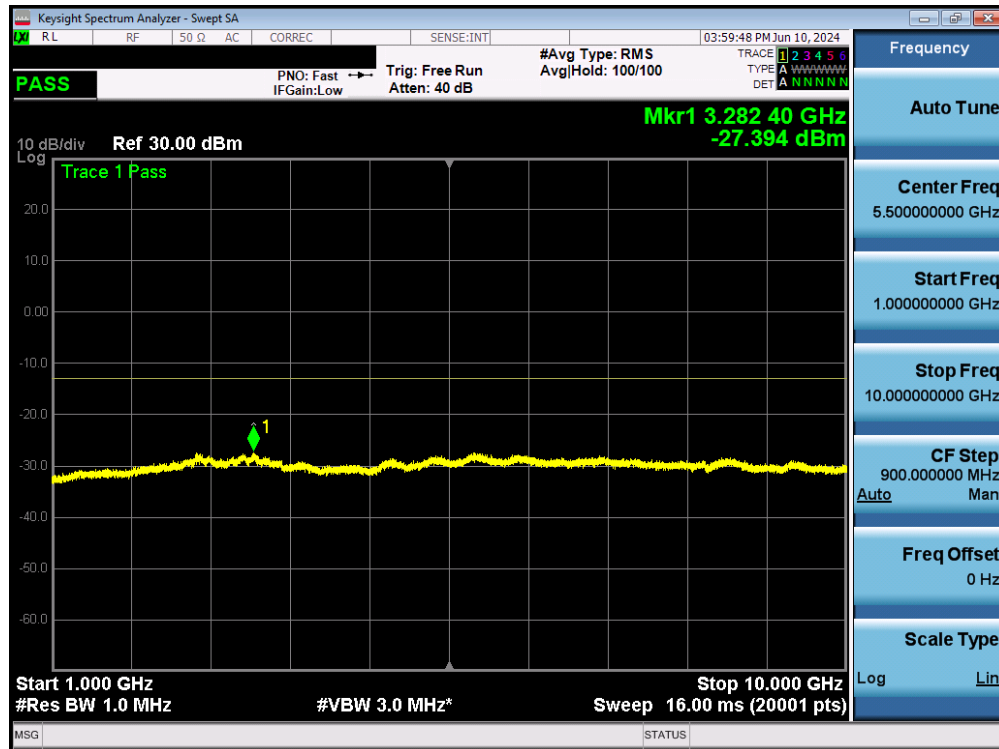


Plot 7-4. Conducted Spurious Plot (LTE Band 26 - Low Channel)

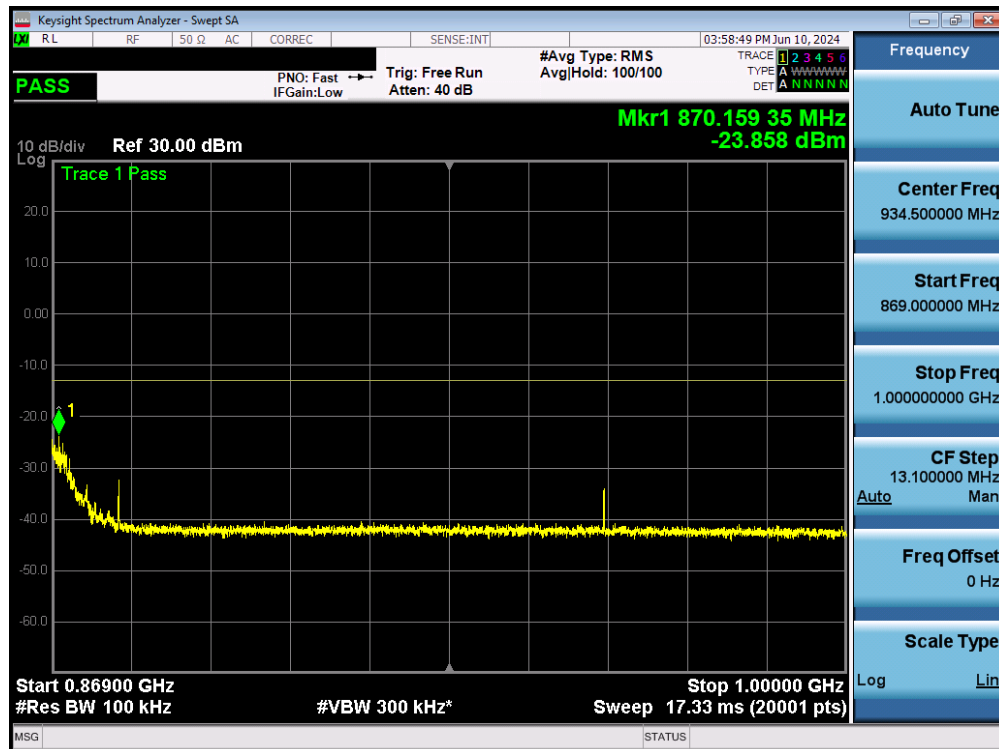

Plot 7-5. Conducted Spurious Plot (LTE Band 26 - Low Channel)

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 17 of 32

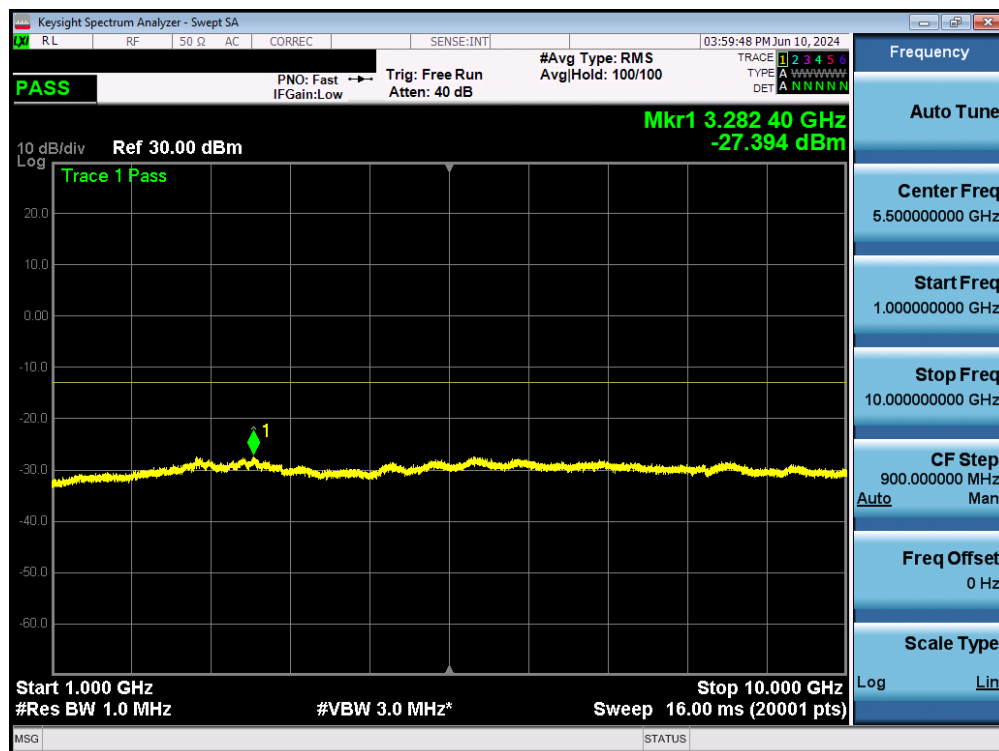


Plot 7-6. Conducted Spurious Plot (LTE Band 26 - Low Channel)




Plot 7-7. Conducted Spurious Plot (LTE Band 26 - High Channel)

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 18 of 32

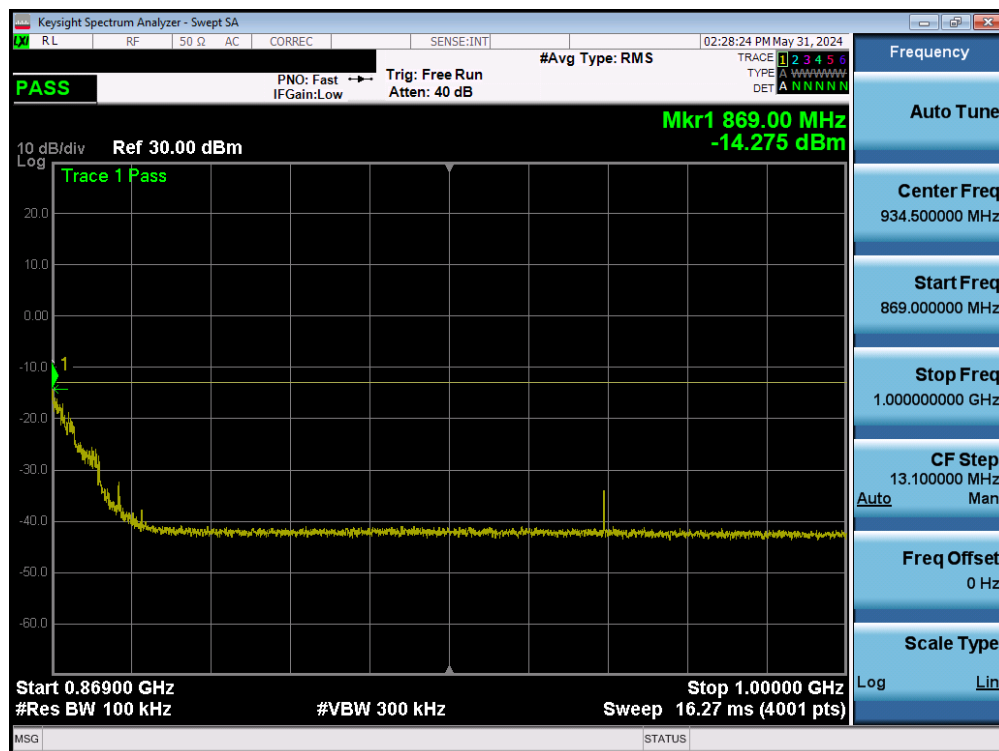

Plot 7-8. Conducted Spurious Plot (LTE Band 26 - High Channel)

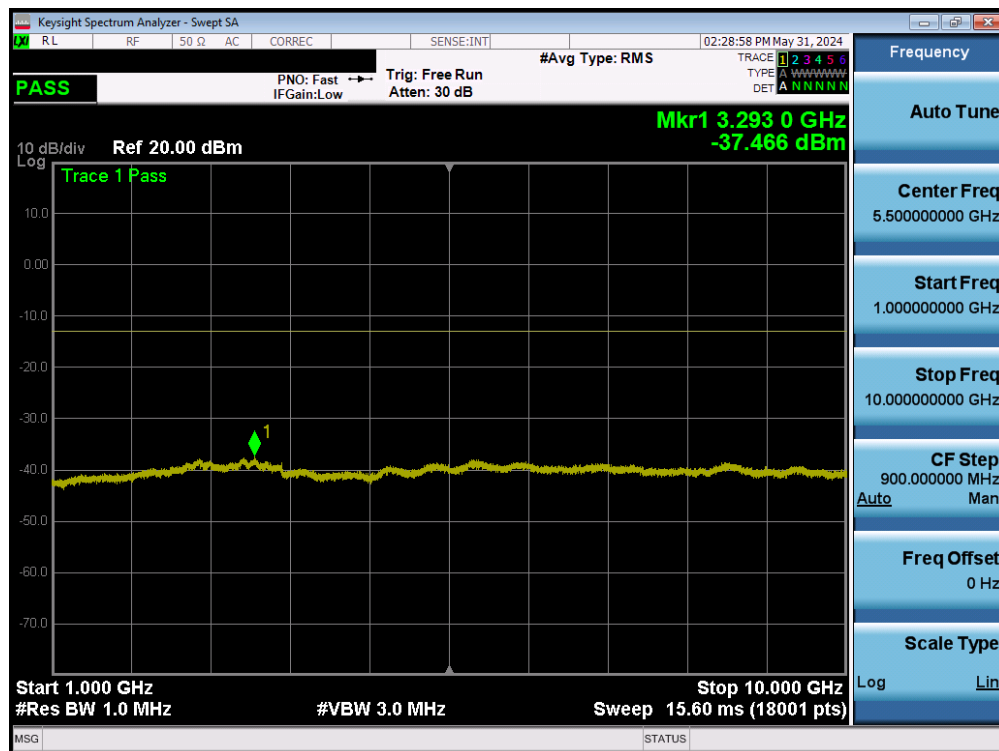

Plot 7-9. Conducted Spurious Plot (LTE Band 26 - High Channel)

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 19 of 32

## 7.5 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

***For LTE B26 operation under Part 90.691, the minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is  $43 + 10\log_{10}(P_{\text{Watts}})$ , where  $P$  is the transmitter power in Watts. The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is  $50 + 10\log_{10}(P_{\text{Watts}})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used

ANSI C63.26-2015 – Section 5.7.3

### Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes

1. Per KDB 971168 D02 VIII)c), an RBW = 300Hz was used for measurements within 37.5kHz from the band edge. The plots in this section are recorded using RBW = 1kHz.
2. For offsets greater than 37.5kHz from the band edge, an RBW = 100kHz was used.

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 20 of 32

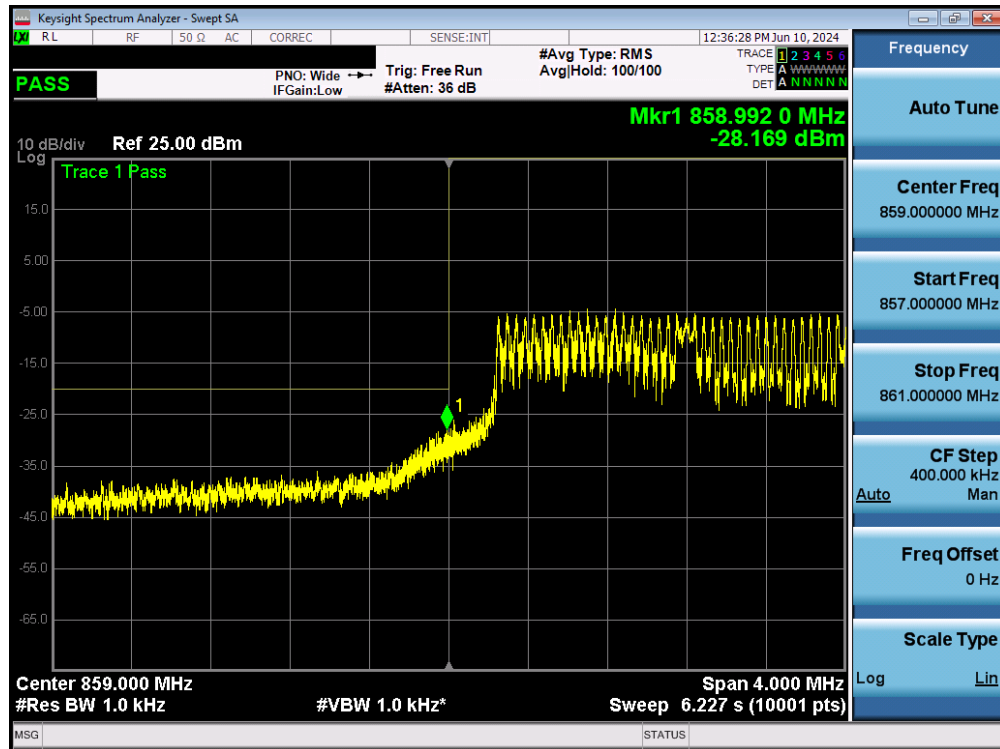


Plot 7-10. Lower Channel Edge Plot (LTE Band 26 - Low Channel)




Plot 7-11. Lower Channel Edge Plot (LTE Band 26 - Low Channel)

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 21 of 32

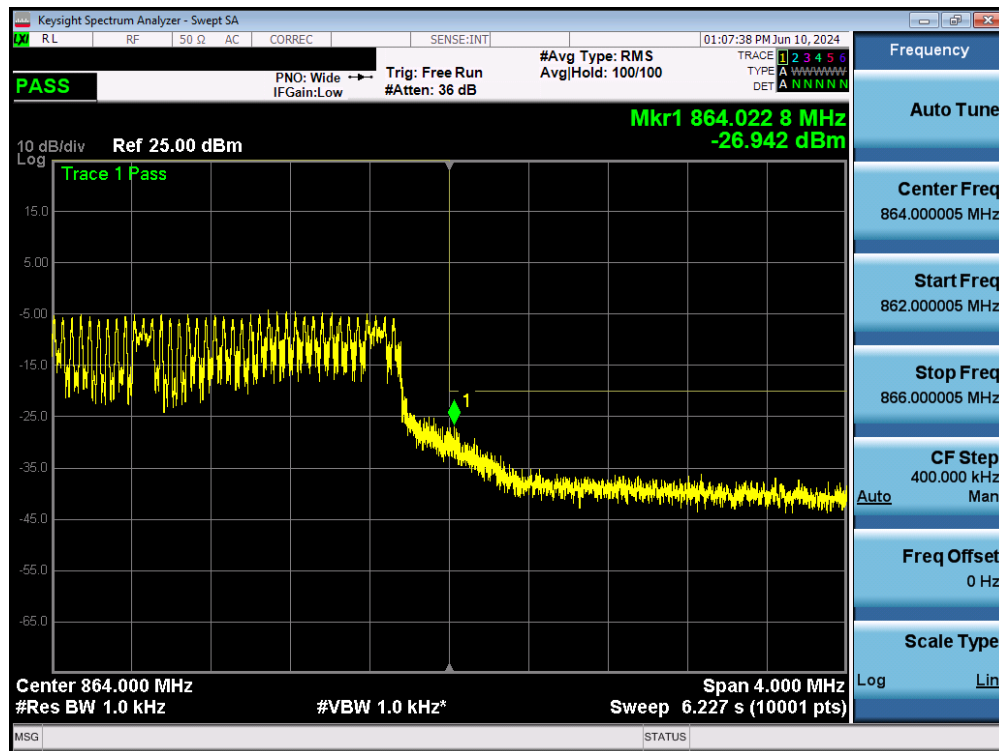


Plot 7-12. Upper Channel Edge Plot (LTE Band 26 - Low Channel)

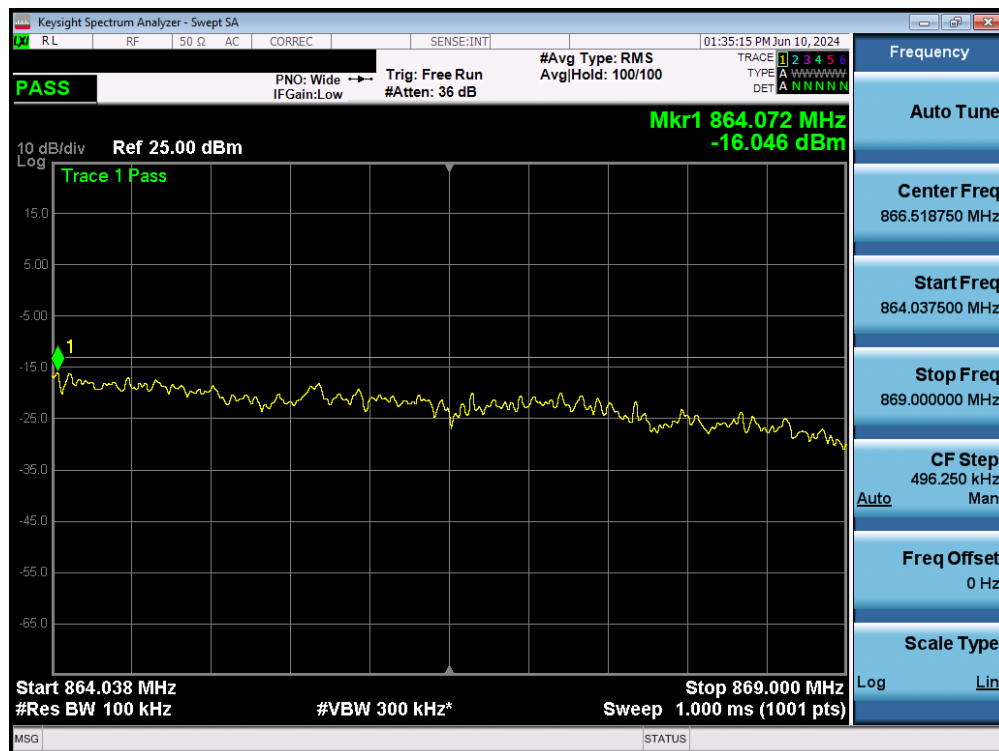


Plot 7-13. Upper Channel Edge Plot (LTE Band 26 - Low Channel)

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 22 of 32

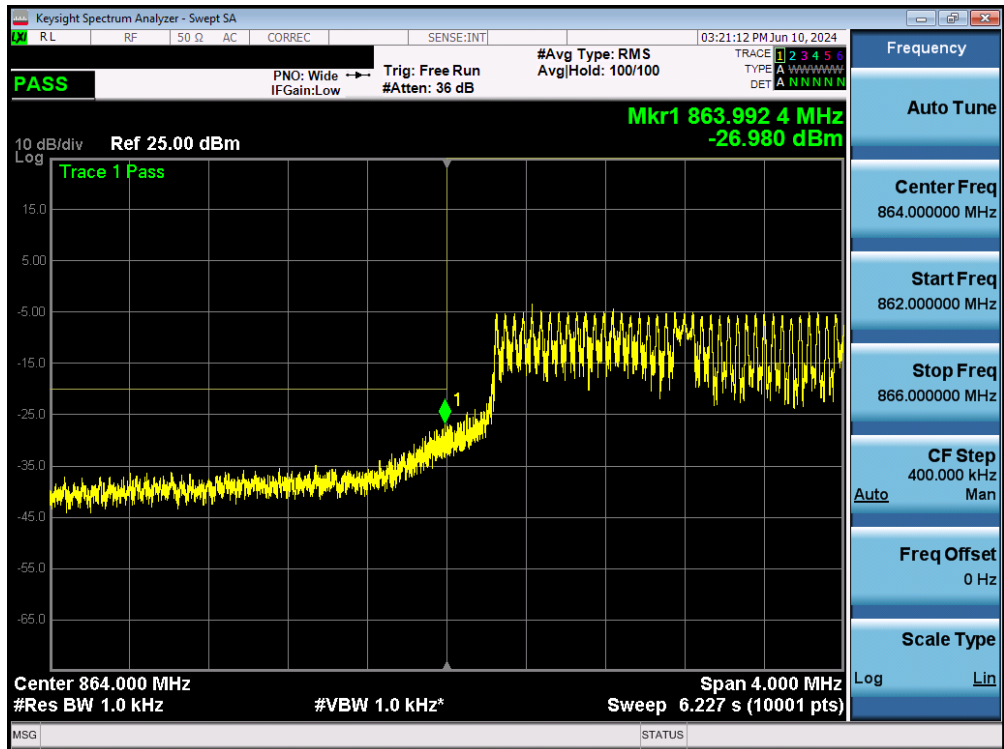


Plot 7-14. Lower Channel Edge Plot (LTE Band 26 - High Channel)

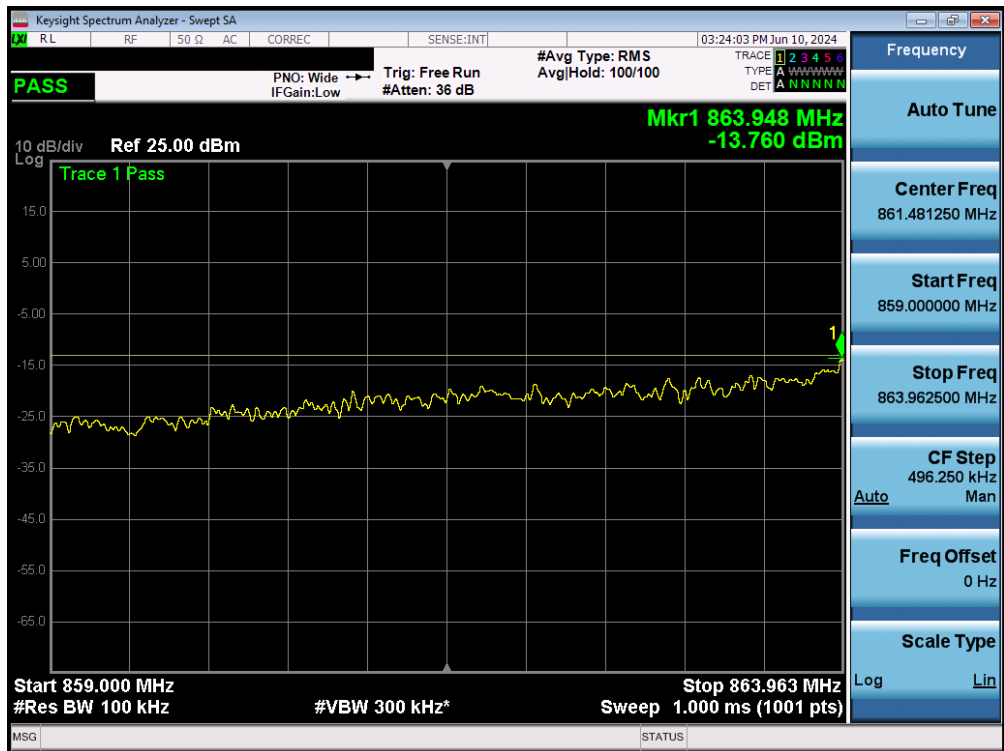


Plot 7-15. Lower Channel Edge Plot (LTE Band 26 - High Channel)

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 23 of 32



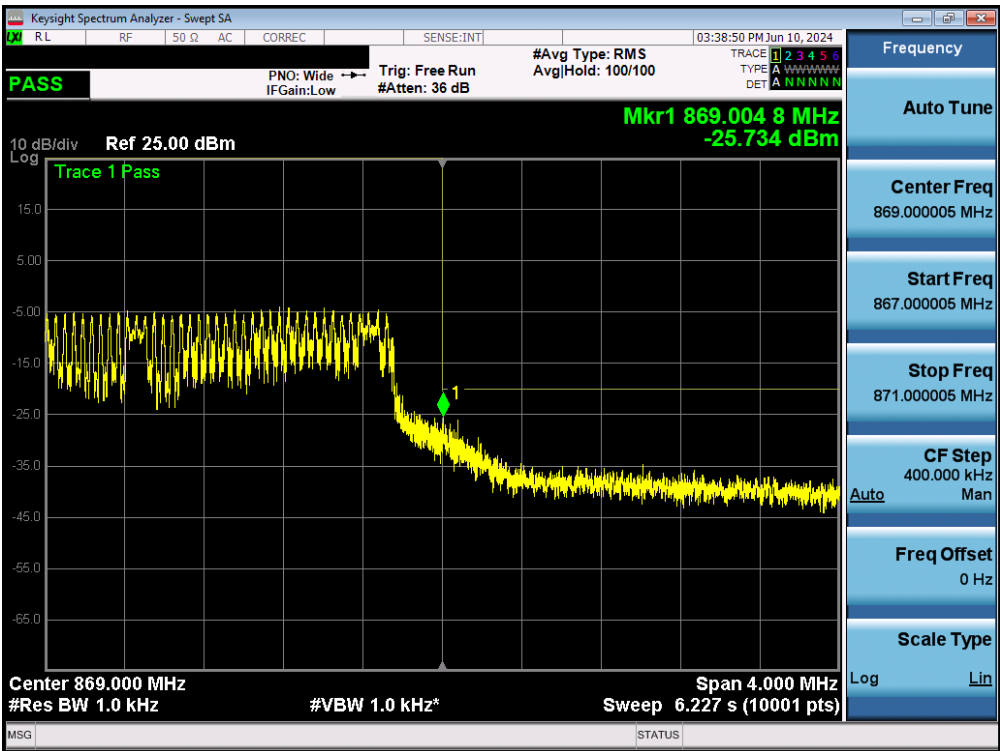

Plot 7-16. Upper Channel Edge Plot (LTE Band 26 - High Channel)

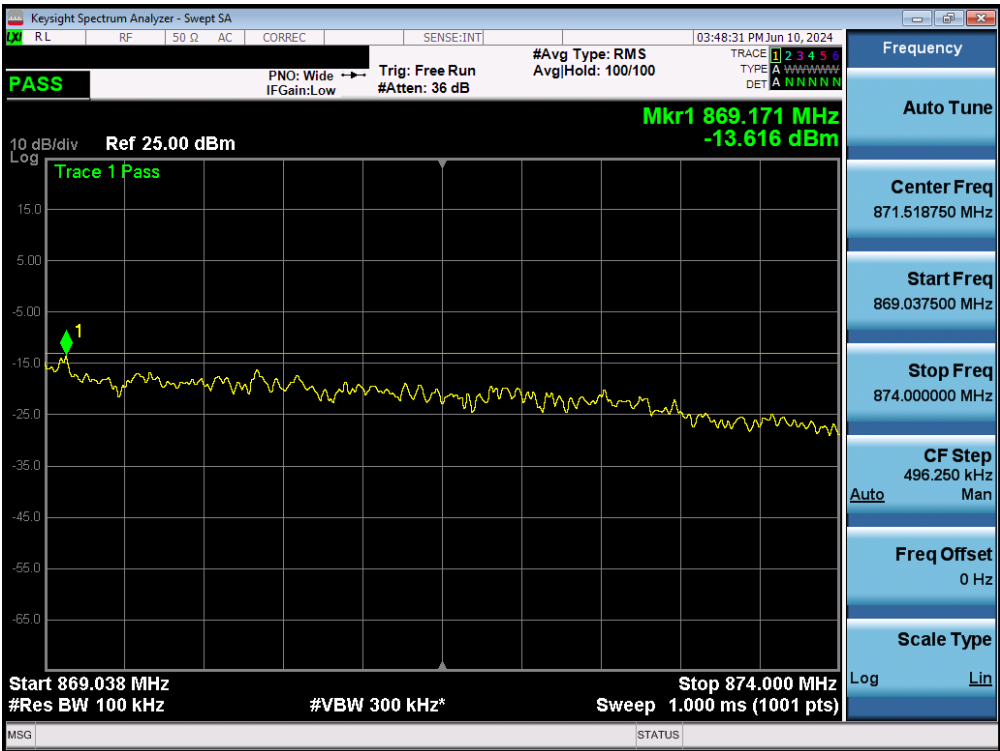

Plot 7-17. Upper Channel Edge Plot (LTE Band 26 - High Channel)

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 24 of 32



## 7.6 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into a 50 ohm termination. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 25 of 32

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

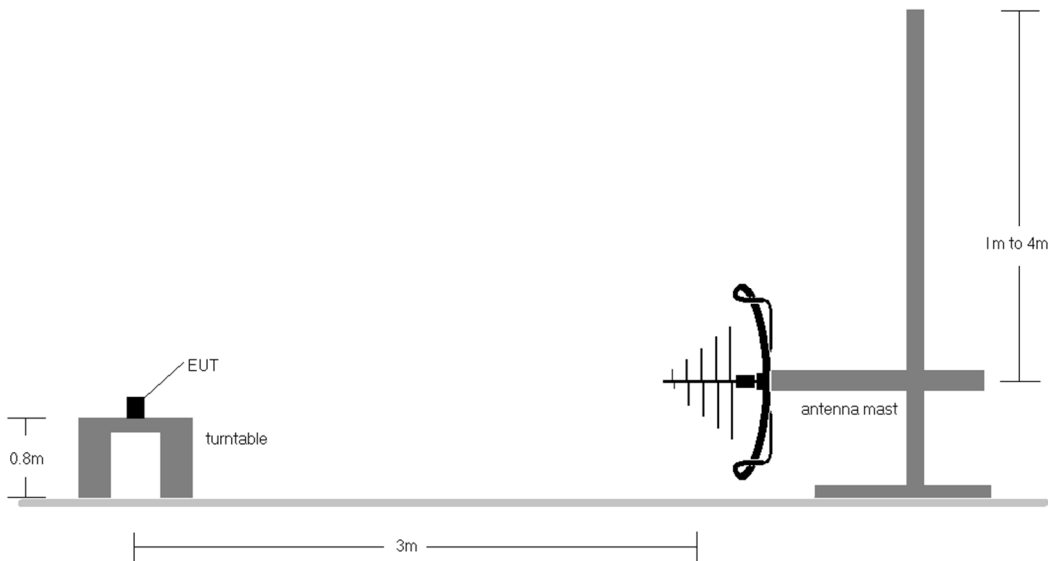

**Figure 7-5. Test Instrument & Measurement Setup < 1GHz**

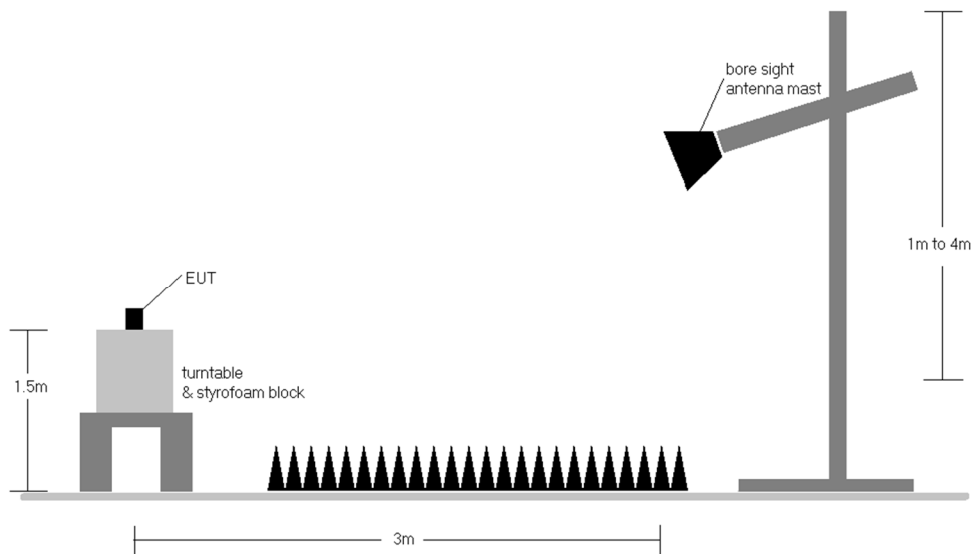


**Figure 7-6. Test Instrument & Measurement Setup >1 GHz**

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 26 of 32


## Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
  - a)  $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - b)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested while powered by a 28VDC power source.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

<b>FCC ID:</b> 2A93U-58450	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2402290014-04.2A93U	<b>Test Dates:</b> 04/05 - 10/09/2024	<b>EUT Type:</b> Geolocation System	Page 27 of 32

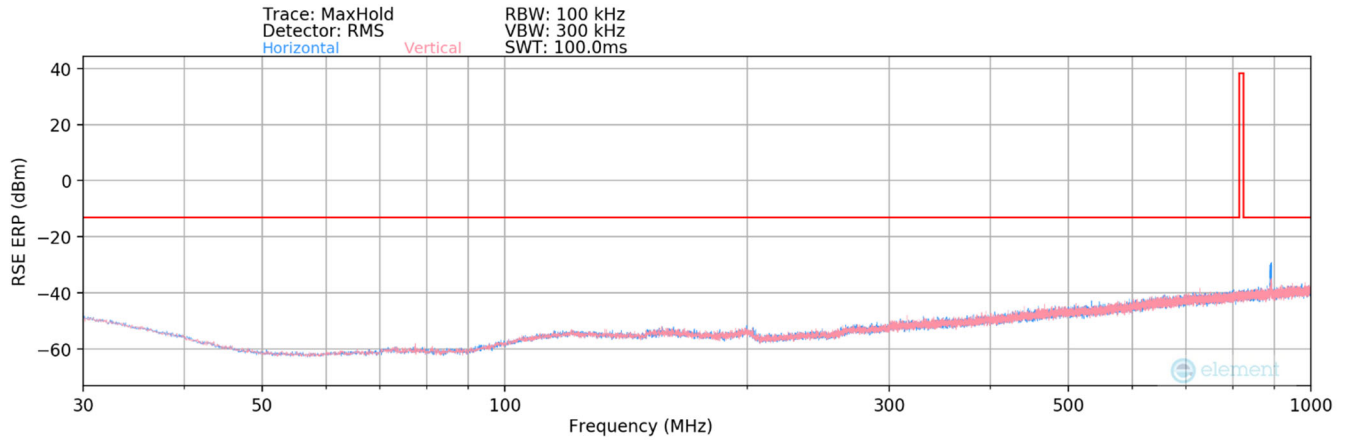

**Plot 7-18. Radiated Spurious Plot (LTE Band 26) - Below 1GHz**

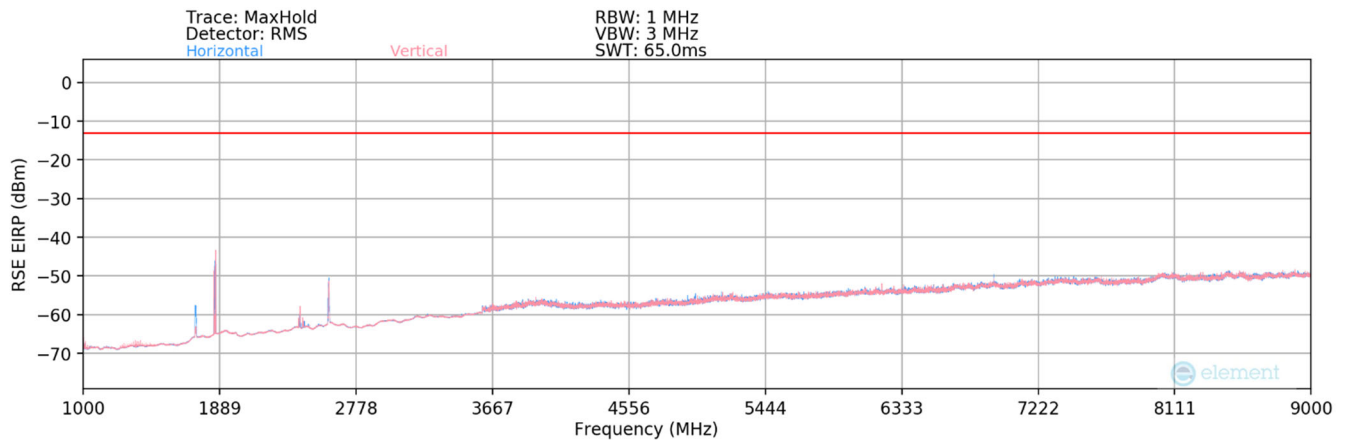

**Plot 7-19. Radiated Spurious Plot (LTE Band 26) – Above 1GHz**

Bandwidth (MHz):	5
Frequency (MHz):	866.5

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
891.00	H	112	187	-86.16	31.38	52.22	-45.19	-13.00	-32.19

**Table 7-3. Radiated Spurious Data (LTE Band 26) – Below 1 GHz**

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System		Page 28 of 32

Bandwidth (MHz):	5
Frequency (MHz):	861.5

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1723.00	H	119	248	-65.85	4.84	45.99	-49.27	-13.00	-36.27
2584.50	H	-	-	-71.81	8.44	43.63	-51.63	-13.00	-38.63
3446.00	H	-	-	-71.53	10.18	45.65	-49.60	-13.00	-36.60
4307.50	H	-	-	-73.21	11.87	45.66	-49.60	-13.00	-36.60
5169.00	H	-	-	-73.45	13.94	47.49	-47.77	-13.00	-34.77

**Table 7-4. Radiated Spurious Data (LTE Band 26) – Low Channel**

Bandwidth (MHz):	5
Frequency (MHz):	866.5

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1733.00	H	150	252	-65.32	4.96	46.64	-48.62	-13.00	-35.62
2599.50	H	149	264	-64.18	8.63	51.45	-43.80	-13.00	-30.80
3466.00	H	-	-	-71.27	10.11	45.84	-49.42	-13.00	-36.42
4332.50	H	-	-	-73.09	12.13	46.04	-49.22	-13.00	-36.22
5199.00	H	-	-	-73.28	14.21	47.93	-47.33	-13.00	-34.33

**Table 7-5. Radiated Spurious Data (LTE Band 26) – High Channel**

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 29 of 32

## 7.7 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.***

### Test Procedure Used

ANSI C63.26-2015 – Section 5.6

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None


FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 30 of 32

## LTE Band 26

Operating Frequency (Hz):	861,500,000
Ref. Voltage (VDC):	28
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	28	- 30	861,492,582	920	0.0001068
		- 20	861,492,558	896	0.0001040
		- 10	861,492,064	402	0.0000467
		0	861,492,391	729	0.0000846
		+ 10	861,491,998	336	0.0000390
		+ 20 (Ref)	861,491,662	0	0.0000000
		+ 30	861,491,888	226	0.0000262
		+ 40	861,492,547	885	0.0001027
		+ 50	861,492,331	669	0.0000777
85 %	23.8	+ 20	861,491,849	187	0.0000217
115 %	32.2	+ 20	861,491,742	80	0.0000093

Table 7-6. LTE Band 26 Frequency Stability Data

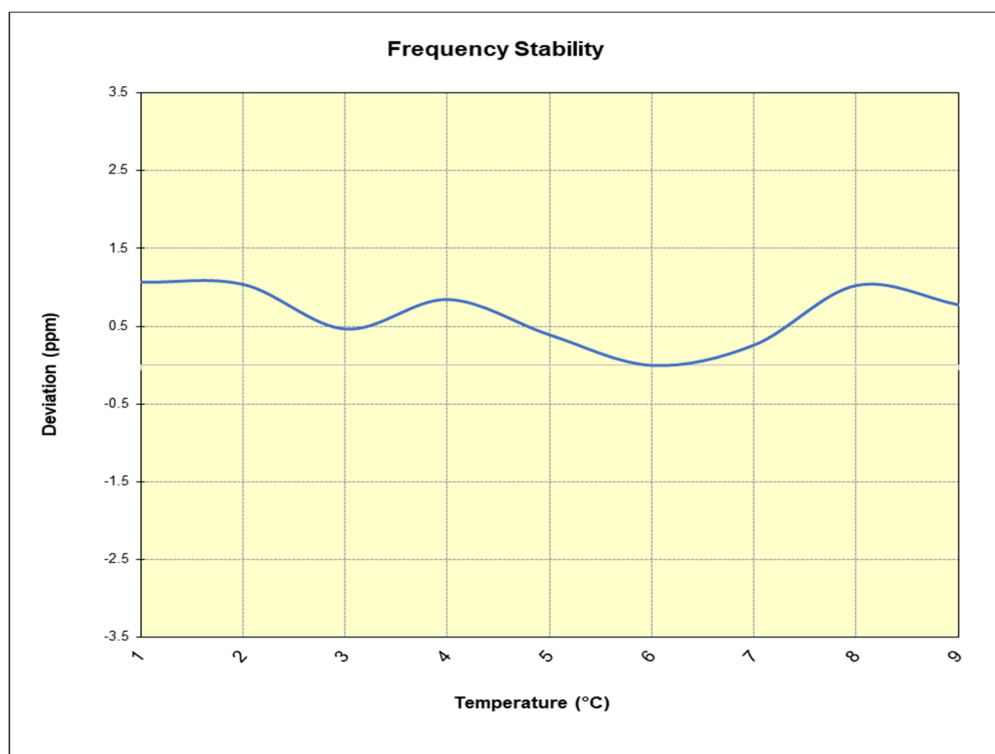

Plot 7-20. LTE Band 26 Frequency Stability Chart

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 31 of 32



8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Centum Geolocation System** **FCC ID: 2A93U-58450** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

FCC ID: 2A93U-58450	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2402290014-04.2A93U	Test Dates: 04/05 - 10/09/2024	EUT Type: Geolocation System	Page 32 of 32