

REV.	DESCRIPTION	ENG.	APPROVAL


A

B


C

D

E

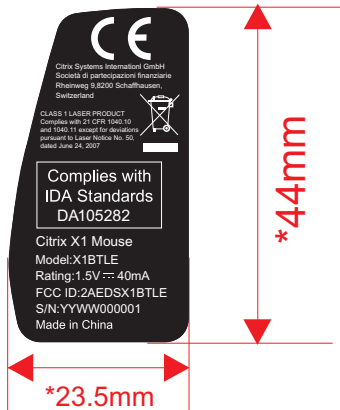

1:1

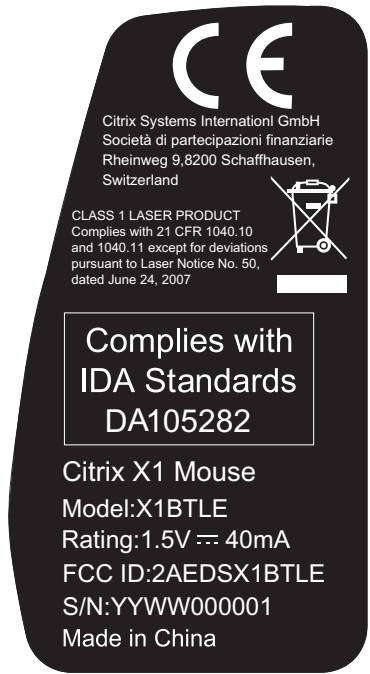

2:1

NOTE:

1. Printing: Pantone white on black background.
2. TOL: +0.3/-0.5mm
3. The dimensions marked with "*" are important.
4. Glue T=0.025~0.03mm
5. Stickiness: 3.0kg/cm²
6. Product must be halogen free
7. Requirement of PRIMAX Part:
 1. Comply with PRIMAX QW-5Q002 "Green Product Chemical Substances Specifion."
 2. Follow customer's specification as required.
 3. Follow Halogen-Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.
8. S/N: YY WW XXXXXX

Serial No.(From 000001.000002.000003.....999999)
Week(01.02...)此周別碼為生產日期，作大貨時請生管提供
Year(2014=14, 2015=15...)

9.30400999901X,30401019300X日期流水碼需對應,同一周別不可重號

A

B

C

D

E

DO NOT SCALE DRAWING		PRIMAX [®]		致伸資訊電子有限公司 PRIMAX ELECTRONICS LTD.											
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PRIMAX ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF PRIMAX ELECTRONICS LTD.		USED Citrix		APPD. Sarah.Lee											
		FINISH		CHKD. Apple.Zhao											
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1.0°		SCALE / UNIT mm		DR. Helen.Yuan2014/11/27											
<table><tr><th>DIMENSIONS</th><th>TOLERANCE</th></tr><tr><td>0.00 TO 30.00mm</td><td>±0.10mm</td></tr><tr><td>30.01 TO 80.00mm</td><td>±0.13mm</td></tr><tr><td>80.01 TO 150.00mm</td><td>±0.15mm</td></tr><tr><td>150.01 ↑</td><td>±0.20mm</td></tr></table>		DIMENSIONS	TOLERANCE	0.00 TO 30.00mm	±0.10mm	30.01 TO 80.00mm	±0.13mm	80.01 TO 150.00mm	±0.15mm	150.01 ↑	±0.20mm	TITLE BOTTOM LABEL			
DIMENSIONS	TOLERANCE														
0.00 TO 30.00mm	±0.10mm														
30.01 TO 80.00mm	±0.13mm														
80.01 TO 150.00mm	±0.15mm														
150.01 ↑	±0.20mm														
MATERIAL		DWG NO. 304009999xxx			SIZE A4										
80#合成紙+霧P		FILE NAME 304009999xxx	SHEET	1/1	REV. 1										