Internal photos

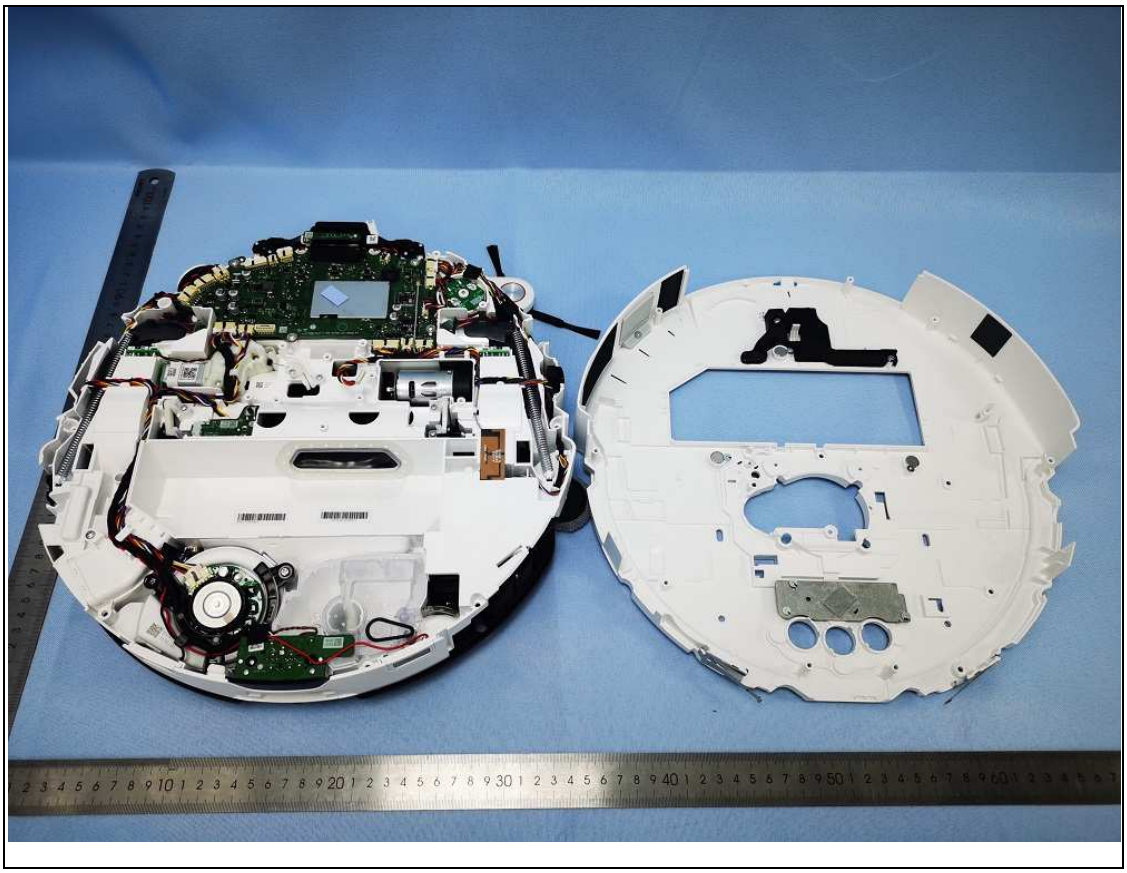

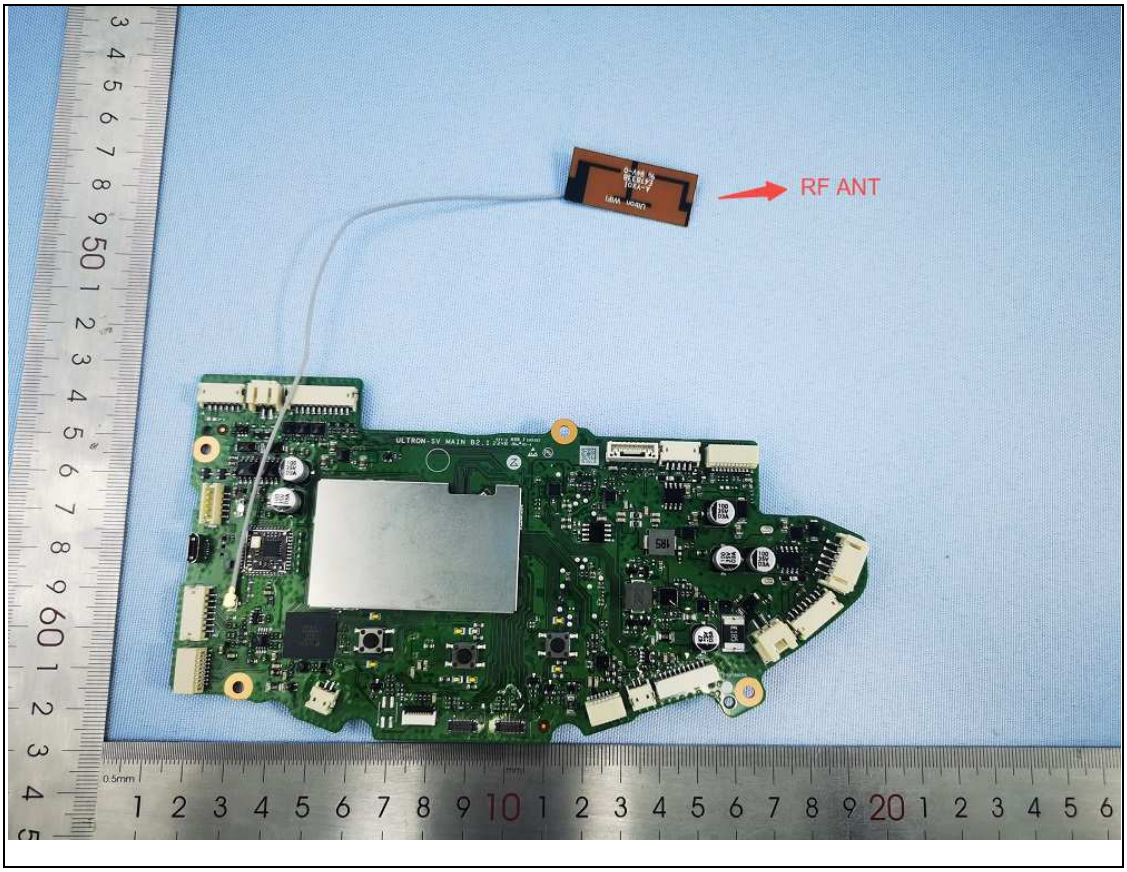

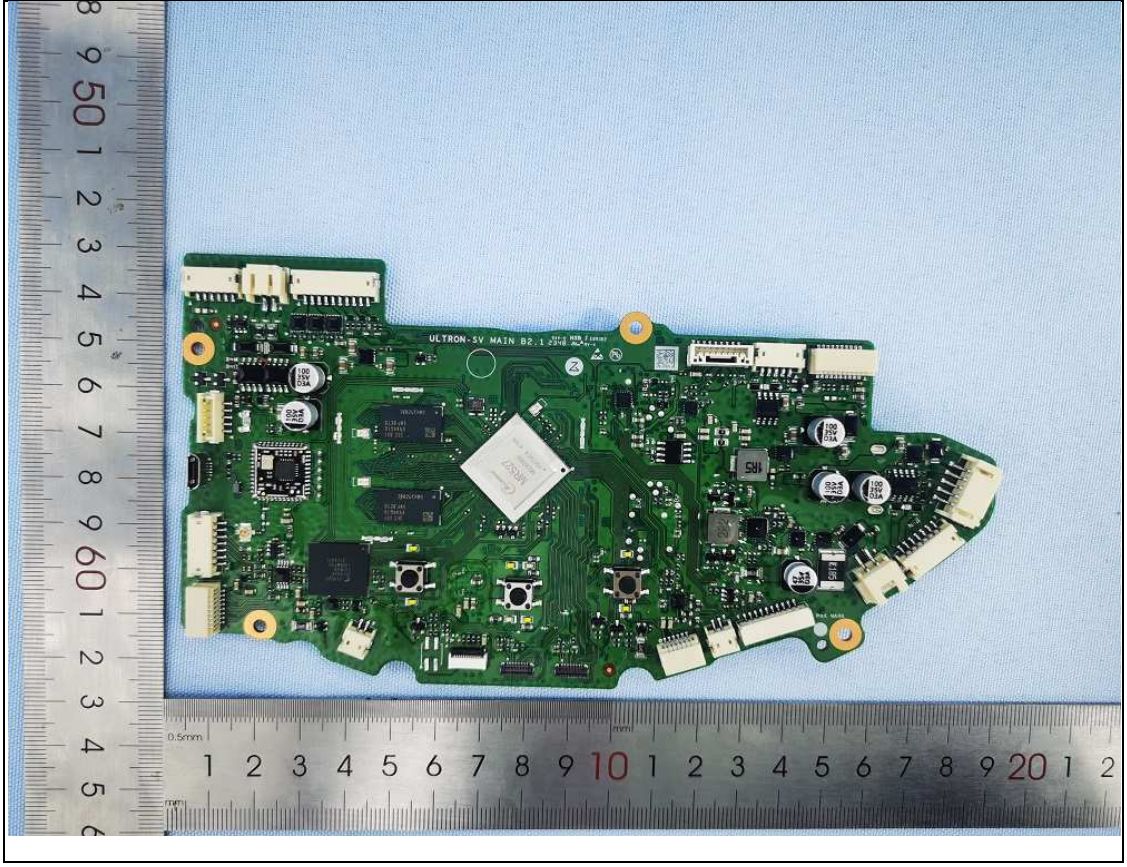
ULTRON-SV MAIN B2.1

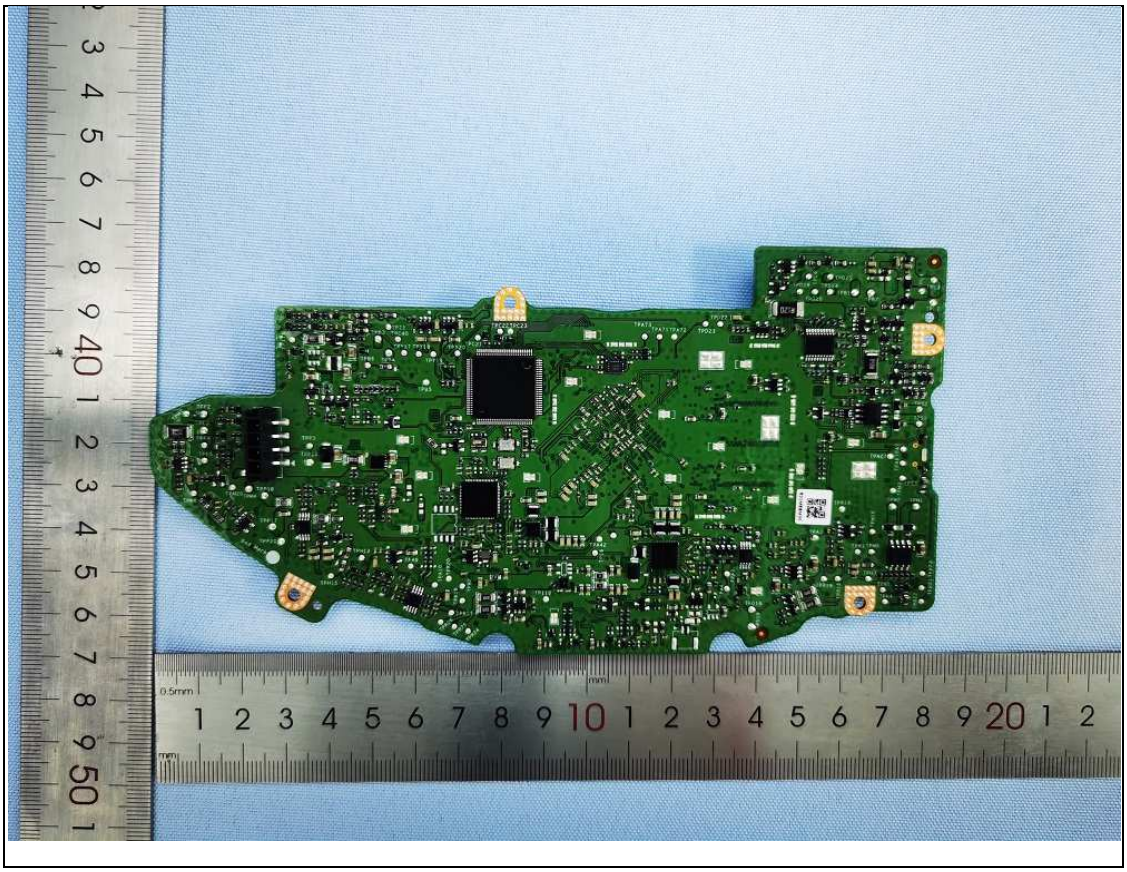

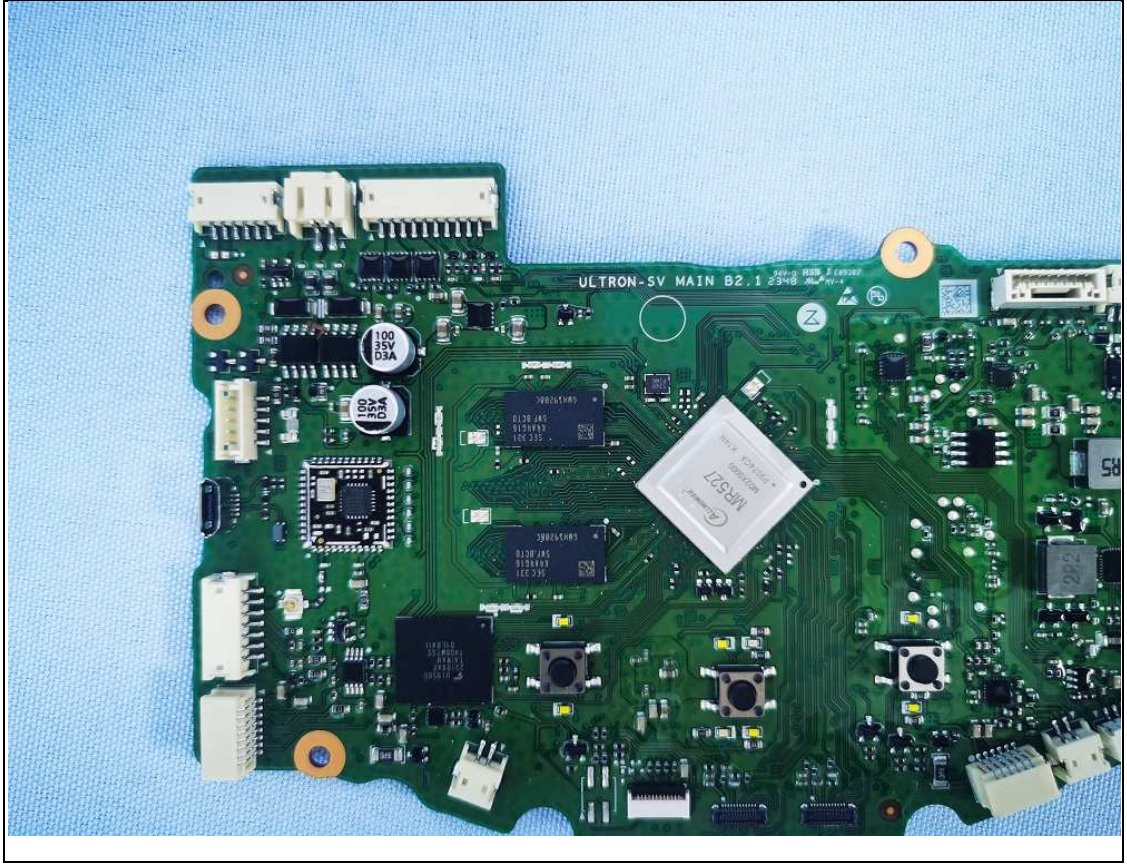
ULTRON-SV MAIN B2.1
100
35V
D3A
MR521

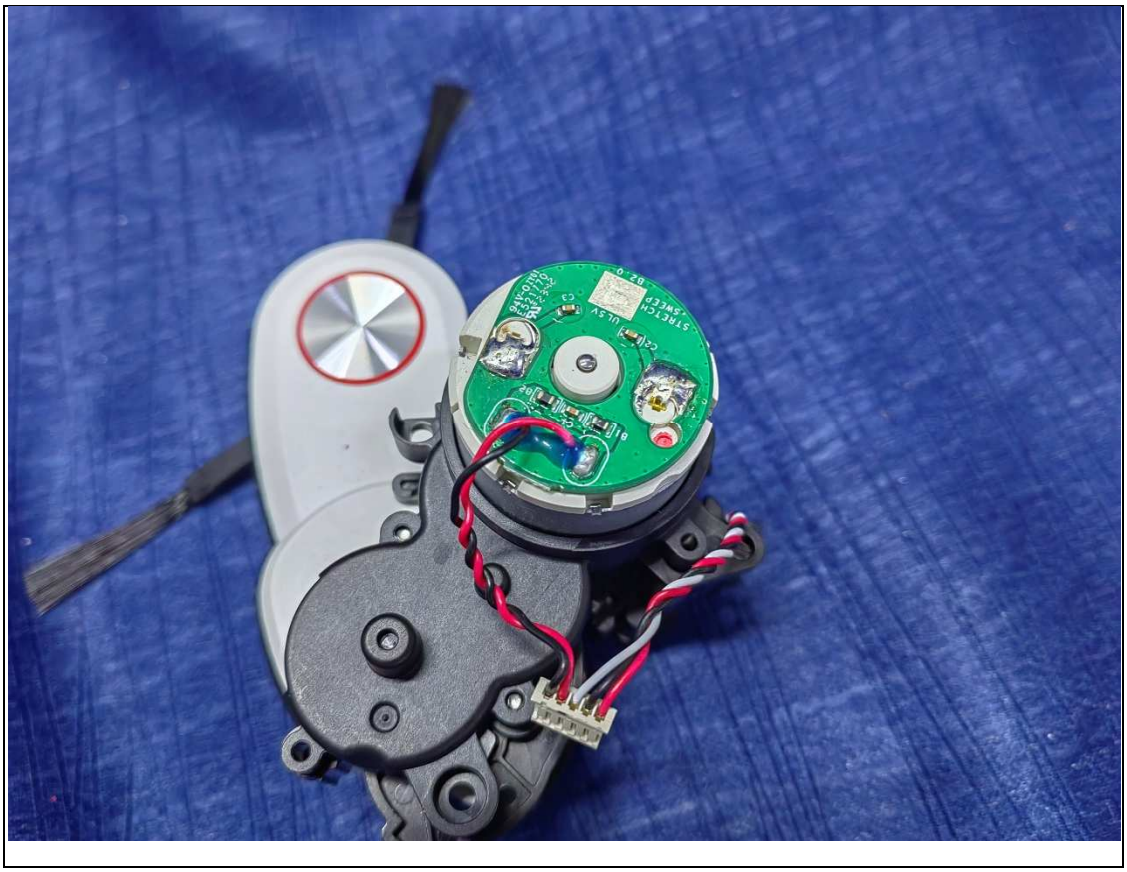

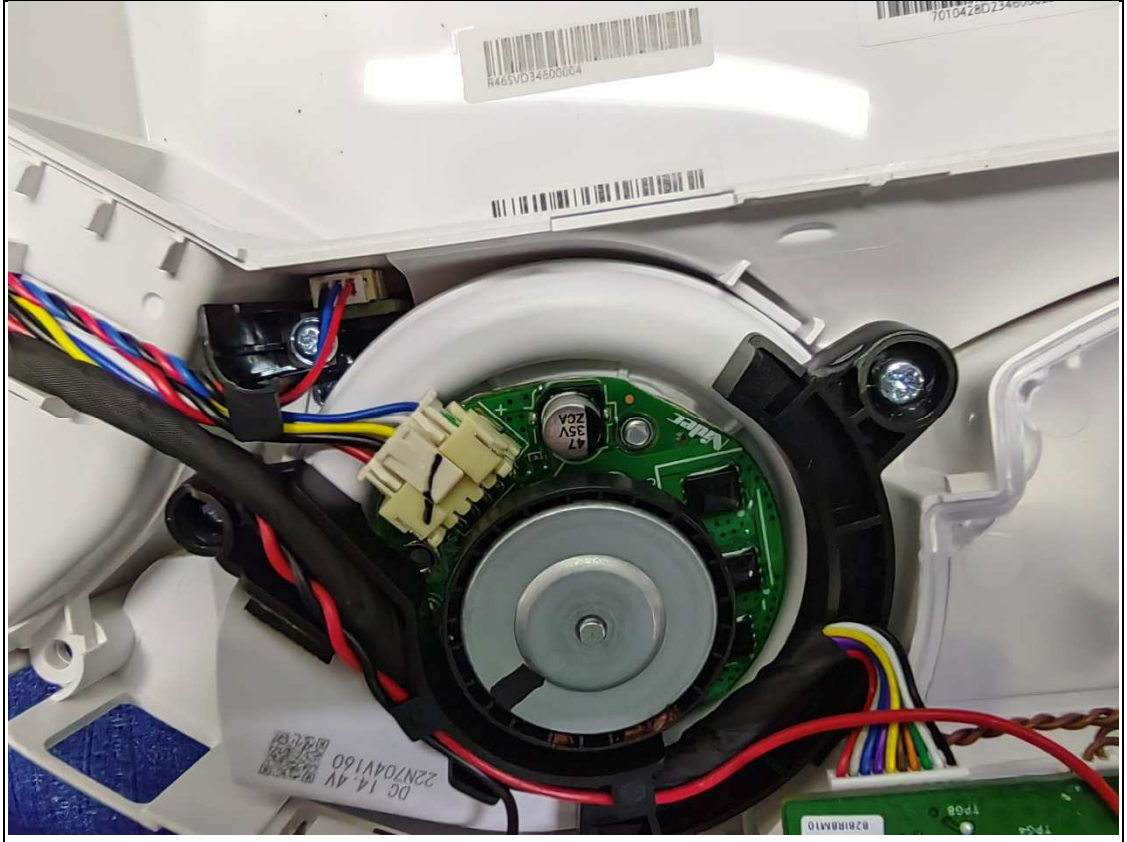
R465VD34600004
DC 14.4V
22N704V160
47
35V
ZOA
TP68

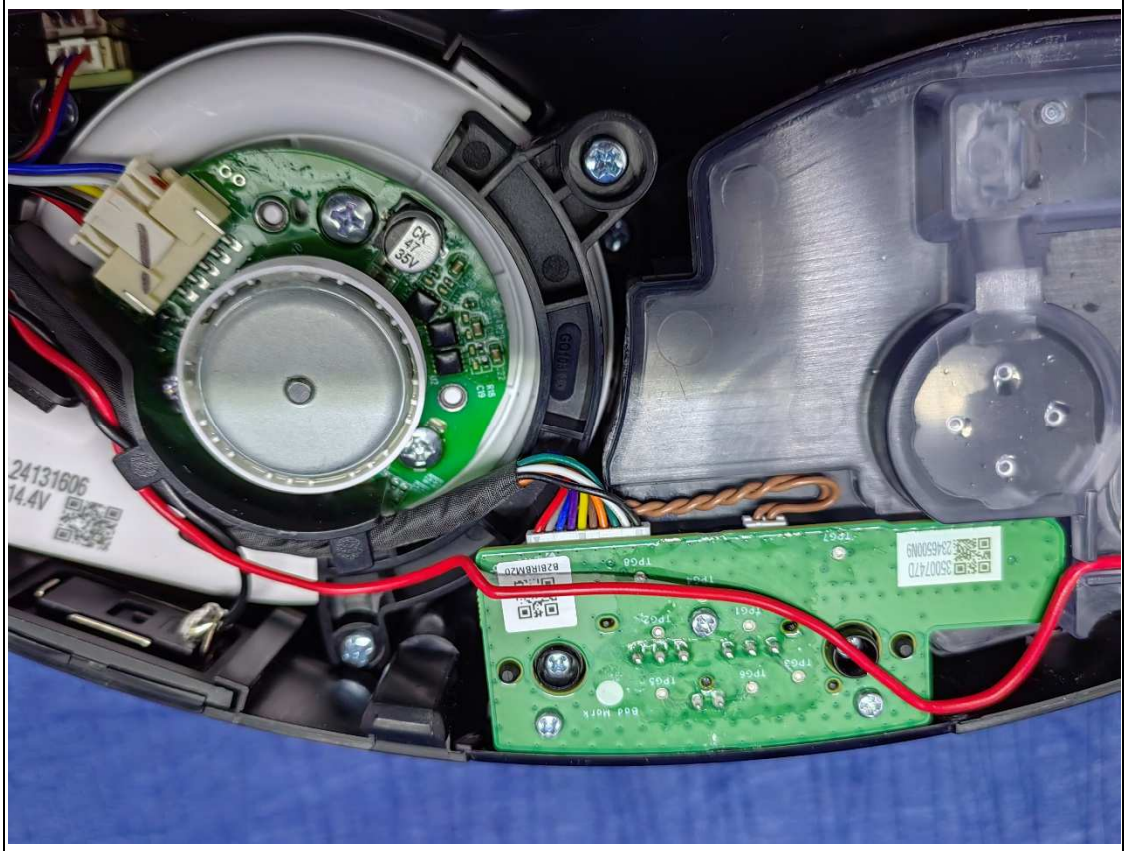
24131606
14.4V
35007470
20465000N9
TP67
TP68
TP61
TP02
TP03
TP06
Bad Mark

ULTRON-5V
LDS-B MK3
LEDK1
KEYK1
3500745D
2346500B3
23W3 E09302
HSB 1
94V-0
Bad Mark
KEYK2

WARNING:
Use specified charger only.
Must be disposed of properly.
Use only with specified products at room temperature(0~40°C).
Please refer to user guide for details.
May explode if damaged or disposed of in fire.
Do not short-circuit, disassemble, crush or expose to high temperature (>60°C).
Li-ion 20
3060078
X04DB1
50103
10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160

飞毛腿
WARNING
Dry location use only.
Do not disassemble,impact and crush the battery.
Do not put the battery into fire or heat the battery.
Do not continue to use if the battery balloons severely.
Do not expose battery to high temperature.
Stop immerse the battery in water.
Stop using the battery after it is immersed in water.
Li-ion 20
+ Red wire / 红线
- Black wire / 黑线
3060078F07DAQ00021