

EMC EMISSIONS - TEST REPORT

Test Report No.	BC201533-1	Issue Date	April 3, 2002
Model / Serial No.	AMS-SM01 & SCRAM / 103 & 112		
Product Type	Smart Modem & Secured Remote Alcohol Monitoring Bracelet		
Client	Alcohol Monitoring Systems, LLC		
Manufacturer	Alcohol Monitoring Systems, LLC		
License holder	Alcohol Monitoring Systems, LLC		
Address	9135 Ridgeline Blvd., #190 Highlands Ranch, CO 80129		
Test Criteria Applied	FCC Part 15 Class B	47 CFR 15: Radio Frequency Devices	
Test Result	PASS		
Test Project Number	BC201533		
References			
Total Pages Including Appendices:	61		



Reviewed By : Todd Seeley



Reviewed By : Robert Cresswell

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.

TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval of TÜV Product Service. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI



D I R E C T O R Y

Documentation	Page(s)
Test report	<u>1 - 6</u>
Directory	<u>2</u>
Test Regulations	<u>3</u>
General Remarks	<u>3</u>
Test-setup Photographs	<u>See FCC Exhibit</u>
 Appendix A	
Test Data Sheets and Test Equipment Used	<u>7 - 53</u>
 Appendix B	
Test Plan/Constructional Data Form	<u>54 - 61</u>

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty for Conducted Emissions in the frequency range of 150kHz – 30MHz is calculated to be $\pm 2.30\text{dB}$ and for Radiated Emissions is calculated to be $\pm 3.60\text{dB}$ in the frequency range of 30MHz – 200MHz and $\pm 3.38\text{dB}$ in the frequency range of 200MHz – 1000MHz.

EUT Received Date: 25 March 2002

Testing Start Date: 25 March 2002

Testing End Date: 26 March 2002

The tests were performed according to following regulations :

- - FCC Part 15:2001
- - FCC Part 15.249

- Class B
- Class B

Emission Test Results:

Conducted emissions, Powerline 450 kHz- 30 MHz

Test Result	PASS		
Minimum limit margin	11.7 dB	at	2.84 MHz
Maximum limit exceeding	dB	at	MHz
Remarks:			

Radiated emissions (electric field) 30 MHz - 1000 MHz

Test Result	PASS		
Minimum limit margin	0.7 dB	at	56.53 MHz
Maximum limit exceeding	dB	at	MHz
Remarks:			

GENERAL REMARKS:

None

Modifications required to pass:

See Modification Sheet – pages 4-6

Test Specification Deviations: Additions to or Exclusions from:

None

MODIFICATION SHEET

Test Report #: BC201533 Test Area: TT1-1

Test Method: Tst Date: 26 Mar 02

EUT Model #: AMS-SM01 EUT POWER: 120 V AC 60 Hz

EUT Serial #: 103 Temperature: 23 °C


Manufacturer: AM Air Pressure: 80.0 kPa

EUT Description: Smart Modem Relative Humidity: 25 %

Notes: Page: 1 of 3

Date of Modification: 26 Mar 02 Number of Modification Nb

Data Sheet Reference: Refe Photos Taken Pht

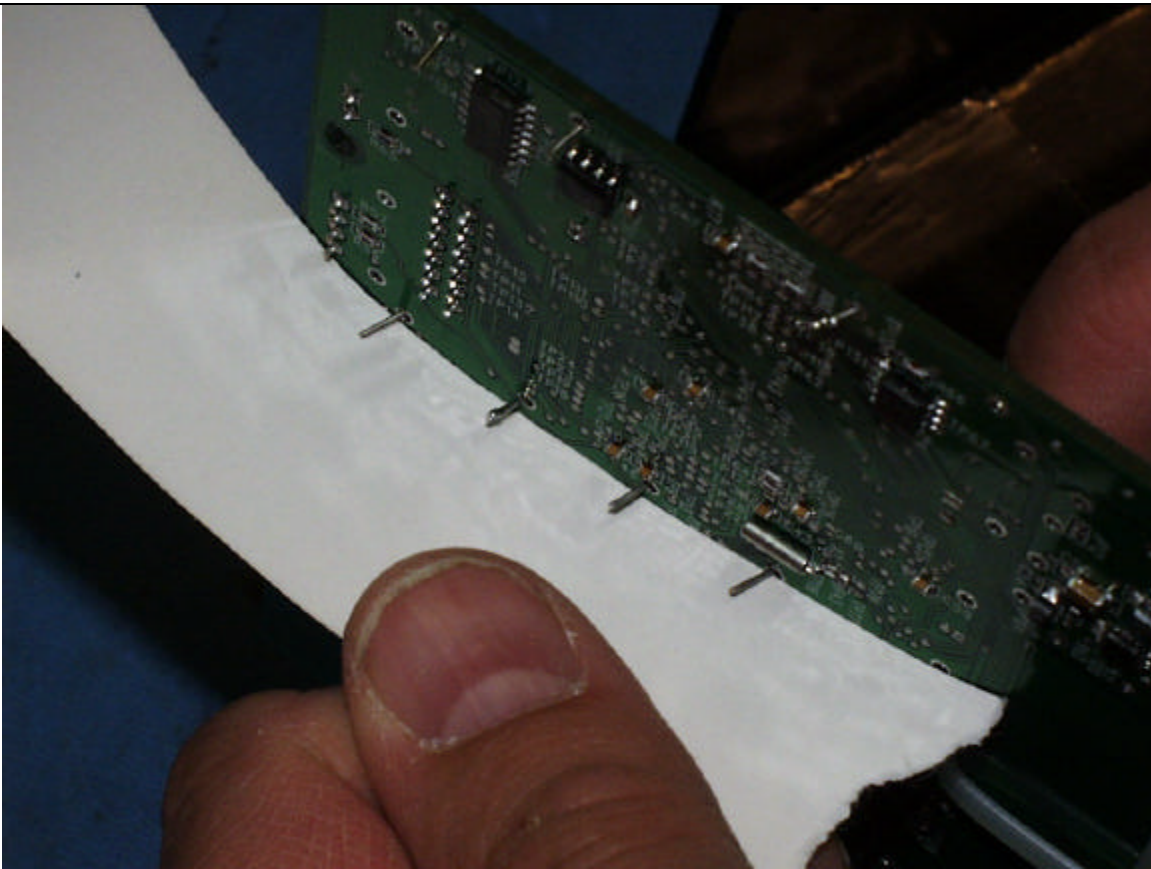

Customer: Jeff Hawthorne
Printed

Tested by: Dan Dillon
Printed

Reviewed by: Todd Seeley
Printed

Signature On File
Signature

Daniel M. Dillon
Signature

Todd Seeley
Signature

MODIFICATION SHEET

Test Report #: BC201533 Test Area: TT1-1

Test Method: Tst Date: 26 Mar 02

EUT Model #: AMS-SM01 EUT POWER: 120 V AC 60 Hz

EUT Serial #: 103 Temperature: 23 °C


Manufacturer: AM Air Pressure: 80.0 kPa

EUT Description: Smart Modem Relative Humidity: 25 %

Notes: Page: 2 of 3

Date of Modification: 26 Mar 02 Number of Modification Nb

Data Sheet Reference: Refe Photos Taken Pht

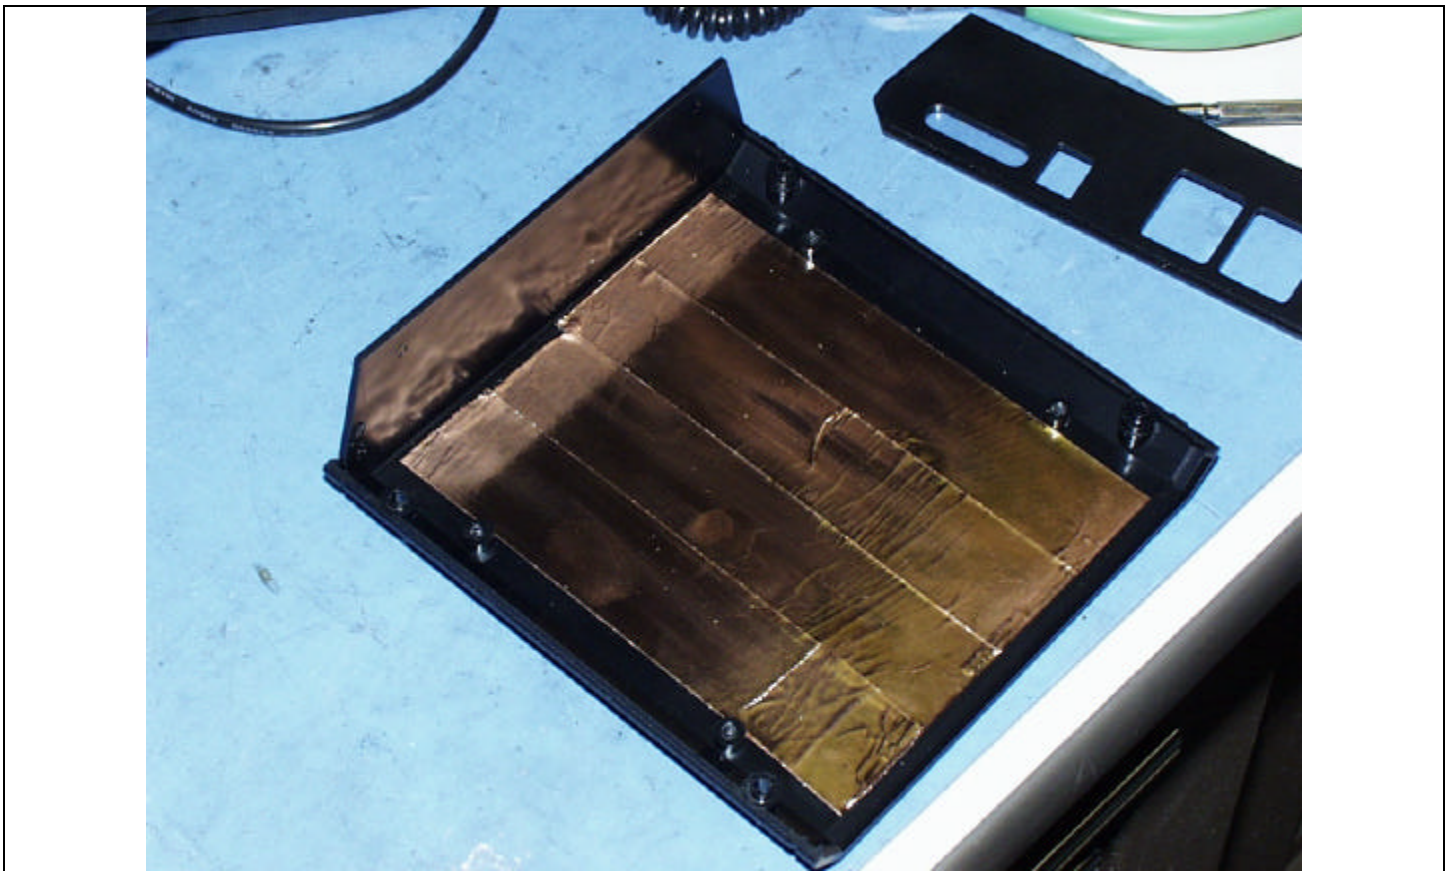

Customer: Jeff Hawthorne
Printed

Tested by: Dan Dillon
Printed

Reviewed by: Todd Seeley
Printed

Signature On File
Signature

Daniel M. Dillon
Signature

Todd Seeley
Signature

MODIFICATION SHEET

Test Report #: BC201533 Test Area: TT1-1

Test Method: Tst Date: 26 Mar 02

EUT Model #: AMS-SM01 EUT POWER: 120 V AC 60 Hz

EUT Serial #: 103 Temperature: 23 °C

Manufacturer: AM Air Pressure: 80.0 kPa

EUT Description: Smart Modem Relative Humidity: 25 %

Notes: Page: 3 of 3

Date of Modification: 26 Mar 02 Number of Modification Nb

Data Sheet Reference: Refe Photos Taken Pht

Modifications Made:

- 1 Added copper image plane to the bottom of the chassis and connected it with ground. This reduced emissions in the 55 – 65 MHz range enough to meet the FCC B radiated emissions limit.

Customer: Jeff Hawthorne
Printed

Tested by: Dan Dillon
Printed

Reviewed by: Todd Seeley
Printed

Signature On File
Signature


Signature


Signature

Appendix A

Test Data Sheets
and
Test Equipment Used



Conducted Electromagnetic Emissions



Test Report #: **BC201533 Run 01**
 Test Method: FCC
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: AM
 EUT Description: Smart Modem
 Notes: Dialing out, RF off

Test Area: Pinewood Site 1 Cond
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 23 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 1 of 2

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / LISN / ATTEN	FINAL	TEST POINT	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB)	(dBuV)		FCC B	N/A
0.450	22.0 Qp	0.1 / 0.0 / -10.0	32.1	Neutral	-15.9	N/A
0.452	22.0 Qp	0.1 / 0.0 / -10.0	32.1	Neutral	-15.9	N/A
2.80	25.0 Qp	0.3 / 0.0 / -10.0	35.3	Neutral	-12.7	N/A
3.40	20.0 Qp	0.3 / 0.0 / -10.0	30.3	Neutral	-17.7	N/A
5.00	11.0 Qp	0.4 / 0.0 / -10.0	21.4	Neutral	-26.6	N/A
7.40	9.0 Qp	0.6 / 0.0 / -10.0	19.6	Neutral	-28.4	N/A
17.20	5.0 Qp	0.9 / 0.0 / -10.0	15.9	Neutral	-32.1	N/A
0.450	19.0 Qp	0.1 / 0.0 / -10.0	29.1	Line 1	-18.9	N/A
0.452	19.0 Qp	0.1 / 0.0 / -10.0	29.1	Line 1	-18.9	N/A
2.84	26.0 Qp	0.3 / 0.0 / -10.0	36.3	Line 1	-11.7	N/A
3.40	7.0 Qp	0.3 / 0.0 / -10.0	17.3	Line 1	-30.7	N/A
5.00	16.0 Qp	0.4 / 0.0 / -10.0	26.4	Line 1	-21.6	N/A
7.40	9.0 Qp	0.6 / 0.0 / -10.0	19.6	Line 1	-28.4	N/A
17.20	5.0 Qp	0.9 / 0.0 / -10.0	15.9	Line 1	-32.1	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Conducted Electromagnetic Emissions



Test Report #: **BC201533 Run 01**
Test Method: FCC
EUT Model #: AMS-SM01
EUT Serial #: 103
Manufacturer: AM
EUT Description: Smart Modem
Notes: Dialing out, RF off

Test Area: Pinewood Site 1 Cond
Test Date: 25-Mar-2002
EUT Power: 120 VAC / 60 Hz

Temperature: 23 °C
Relative Humidity: <26 %
Air Pressure: 80 kPa
Page: 2 of 2

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / LISN / ATTEN	FINAL	TEST POINT	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB)	(dBuV)		FCC B	N/A
***** Measurement Summary *****						
2.84	26.0 Qp	0.3 / 0.0 / -10.0	36.3	Line 1	-11.7	N/A
2.80	25.0 Qp	0.3 / 0.0 / -10.0	35.3	Neutral	-12.7	N/A
0.452	22.0 Qp	0.1 / 0.0 / -10.0	32.1	Neutral	-15.9	N/A
3.40	20.0 Qp	0.3 / 0.0 / -10.0	30.3	Neutral	-17.7	N/A
5.00	16.0 Qp	0.4 / 0.0 / -10.0	26.4	Line 1	-21.6	N/A
7.40	9.0 Qp	0.6 / 0.0 / -10.0	19.6	Line 1	-28.4	N/A
17.20	5.0 Qp	0.9 / 0.0 / -10.0	15.9	Line 1	-32.1	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Conducted Electromagnetic Emissions



Test Report #: **BC201533 Run 02**
 Test Method: FCC
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: AM
 EUT Description: Smart Modem
 Notes: RF on

Test Area: Pinewood Site 1 Cond
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 23 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 1 of 2

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / LISN / ATTEN	FINAL	TEST POINT	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB)	(dBuV)		FCC B	N/A
0.450	21.0 Qp	0.1 / 0.0 / -10.0	31.1	Neutral	-16.9	N/A
0.466	21.0 Qp	0.1 / 0.0 / -10.0	31.1	Neutral	-16.9	N/A
3.00	3.0 Qp	0.3 / 0.0 / -10.0	13.3	Neutral	-34.7	N/A
3.40	2.0 Qp	0.3 / 0.0 / -10.0	12.3	Neutral	-35.7	N/A
0.880	10.0 Qp	0.2 / 0.0 / -10.0	20.2	Neutral	-27.8	N/A
21.67	2.0 Qp	1.0 / 0.0 / -10.0	13.0	Neutral	-35.0	N/A
0.450	18.0 Qp	0.1 / 0.0 / -10.0	28.1	Line 1	-19.9	N/A
0.490	17.0 Qp	0.1 / 0.0 / -10.0	27.1	Line 1	-20.9	N/A
0.960	12.0 Qp	0.2 / 0.0 / -10.0	22.2	Line 1	-25.8	N/A
3.00	4.0 Qp	0.3 / 0.0 / -10.0	14.3	Line 1	-33.7	N/A
3.57	11.0 Qp	0.3 / 0.0 / -10.0	21.3	Line 1	-26.7	N/A
3.87	2.0 Qp	0.3 / 0.0 / -10.0	12.3	Line 1	-35.7	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Conducted Electromagnetic Emissions



Test Report #: **BC201533 Run 02**
 Test Method: FCC
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: AM
 EUT Description: Smart Modem
 Notes: RF on

Test Area: Pinewood Site 1 Cond
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 23 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 2 of 2

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / LISN / ATTEN	FINAL	TEST POINT	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB)	(dBuV)		FCC B	N/A
***** Measurement Summary *****						
0.450	21.0 Qp	0.1 / 0.0 / -10.0	31.1	Neutral	-16.9	N/A
0.466	21.0 Qp	0.1 / 0.0 / -10.0	31.1	Neutral	-16.9	N/A
0.490	17.0 Qp	0.1 / 0.0 / -10.0	27.1	Line 1	-20.9	N/A
0.960	12.0 Qp	0.2 / 0.0 / -10.0	22.2	Line 1	-25.8	N/A
3.57	11.0 Qp	0.3 / 0.0 / -10.0	21.3	Line 1	-26.7	N/A
0.880	10.0 Qp	0.2 / 0.0 / -10.0	20.2	Neutral	-27.8	N/A
3.00	4.0 Qp	0.3 / 0.0 / -10.0	14.3	Line 1	-33.7	N/A
21.67	2.0 Qp	1.0 / 0.0 / -10.0	13.0	Neutral	-35.0	N/A
3.40	2.0 Qp	0.3 / 0.0 / -10.0	12.3	Neutral	-35.7	N/A
3.87	2.0 Qp	0.3 / 0.0 / -10.0	12.3	Line 1	-35.7	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 1 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
200.03	34.8 Qp	0.8 / 11.5 / 22.1	24.9	V / 1.0 / 0.0	-18.6	N/A
201.46	34.6 Qp	0.8 / 11.7 / 22.1	24.9	V / 1.0 / 0.0	-18.6	N/A
202.75	29.8 Qp	0.8 / 11.8 / 22.1	20.2	V / 1.0 / 0.0	-23.3	N/A
205.65	42.4 Qp	0.8 / 12.1 / 22.1	33.1	V / 1.0 / 0.0	-10.4	N/A
209.84	38.2 Qp	0.8 / 12.6 / 22.1	29.4	V / 1.0 / 0.0	-14.1	N/A
214.04	42.6 Qp	0.8 / 13.0 / 22.1	34.2	V / 1.0 / 0.0	-9.3	N/A
218.24	39.8 Qp	0.8 / 13.5 / 22.1	31.9	V / 1.0 / 0.0	-14.1	N/A
222.44	39.5 Qp	0.8 / 13.9 / 22.1	32.1	V / 1.0 / 0.0	-13.9	N/A
226.64	37.6 Qp	0.8 / 14.2 / 22.1	30.4	V / 1.0 / 0.0	-15.6	N/A
230.82	40.8 Qp	0.8 / 14.2 / 22.1	33.7	V / 1.0 / 0.0	-12.3	N/A
235.03	41.2 Qp	0.8 / 14.3 / 22.1	34.2	V / 1.0 / 0.0	-11.8	N/A
239.22	41.8 Qp	0.8 / 14.3 / 22.1	34.8	V / 1.0 / 0.0	-11.2	N/A
243.43	41.2 Qp	0.8 / 14.3 / 22.1	34.3	V / 1.0 / 0.0	-11.7	N/A
247.61	40.7 Qp	0.8 / 14.4 / 22.1	33.8	V / 1.0 / 0.0	-12.2	N/A
251.81	39.5 Qp	0.8 / 14.4 / 22.1	32.6	V / 1.0 / 0.0	-13.4	N/A
256.01	34.6 Qp	0.8 / 14.3 / 22.1	27.7	V / 1.0 / 0.0	-18.3	N/A
260.21	33.3 Qp	0.8 / 14.3 / 22.1	26.3	V / 1.0 / 0.0	-19.7	N/A
264.41	30.6 Qp	0.8 / 14.2 / 22.1	23.5	V / 1.0 / 0.0	-22.5	N/A
268.61	33.8 Qp	0.9 / 14.2 / 22.1	26.7	V / 1.0 / 0.0	-19.3	N/A
272.80	32.3 Qp	0.9 / 14.1 / 22.1	25.2	V / 1.0 / 0.0	-20.8	N/A
277.00	34.6 Qp	0.9 / 14.1 / 22.1	27.5	V / 1.0 / 0.0	-18.5	N/A
281.19	35.4 Qp	0.9 / 14.2 / 22.1	28.3	V / 1.0 / 0.0	-17.7	N/A
285.38	33.4 Qp	0.9 / 14.2 / 22.1	26.4	V / 1.0 / 0.0	-19.6	N/A
289.58	31.1 Qp	0.9 / 14.3 / 22.1	24.2	V / 1.0 / 0.0	-21.8	N/A
293.79	33.5 Qp	0.9 / 14.3 / 22.1	26.7	V / 1.0 / 0.0	-19.3	N/A
297.99	31.2 Qp	0.9 / 14.4 / 22.1	24.4	V / 1.0 / 0.0	-21.6	N/A
302.19	33.4 Qp	0.9 / 14.4 / 22.0	26.6	V / 1.0 / 0.0	-19.4	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 2 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
306.37	33.0 Qp	0.9 / 14.4 / 22.0	26.3	V / 1.0 / 0.0	-19.7	N/A
310.56	31.5 Qp	0.9 / 14.4 / 22.0	24.8	V / 1.0 / 0.0	-21.2	N/A
314.76	31.9 Qp	0.9 / 14.4 / 22.0	25.2	V / 1.0 / 0.0	-20.8	N/A
318.96	28.9 Qp	0.9 / 14.4 / 22.0	22.2	V / 1.0 / 0.0	-23.8	N/A
323.17	29.2 Qp	0.9 / 14.4 / 22.0	22.6	V / 1.0 / 0.0	-23.4	N/A
327.36	26.4 Qp	1.0 / 14.4 / 22.0	19.8	V / 1.0 / 0.0	-26.2	N/A
331.56	25.8 Qp	1.0 / 14.5 / 22.0	19.3	V / 1.0 / 0.0	-26.7	N/A
339.95	30.8 Qp	1.0 / 14.6 / 22.0	24.4	V / 1.0 / 0.0	-21.6	N/A
344.14	31.7 Qp	1.0 / 14.7 / 22.0	25.4	V / 1.0 / 0.0	-20.6	N/A
348.34	34.7 Qp	1.0 / 14.8 / 22.0	28.5	V / 1.0 / 0.0	-17.5	N/A
352.54	31.2 Qp	1.0 / 14.8 / 21.9	25.1	V / 1.0 / 0.0	-20.9	N/A
356.74	32.7 Qp	1.0 / 14.8 / 21.9	26.6	V / 1.0 / 0.0	-19.4	N/A
360.94	29.9 Qp	1.0 / 14.8 / 21.9	23.8	V / 1.0 / 0.0	-22.2	N/A
365.12	33.5 Qp	1.0 / 14.9 / 21.9	27.5	V / 1.0 / 0.0	-18.5	N/A
369.31	33.0 Qp	1.0 / 14.9 / 21.9	27.0	V / 1.0 / 0.0	-19.0	N/A
373.51	34.2 Qp	1.0 / 14.9 / 21.9	28.2	V / 1.0 / 0.0	-17.8	N/A
377.71	32.8 Qp	1.1 / 15.2 / 21.9	27.1	V / 1.0 / 0.0	-18.9	N/A
381.92	31.4 Qp	1.1 / 15.7 / 21.9	26.2	V / 1.0 / 0.0	-19.8	N/A
386.12	30.7 Qp	1.1 / 16.2 / 21.9	26.1	V / 1.0 / 0.0	-19.9	N/A
390.31	29.7 Qp	1.1 / 16.7 / 21.9	25.5	V / 1.0 / 0.0	-20.5	N/A
394.51	29.8 Qp	1.1 / 17.2 / 21.9	26.1	V / 1.0 / 0.0	-19.9	N/A
398.70	25.9 Qp	1.1 / 17.6 / 21.9	22.8	V / 1.0 / 0.0	-23.2	N/A
402.90	25.4 Qp	1.1 / 17.7 / 21.8	22.4	V / 1.0 / 0.0	-23.6	N/A
407.09	26.7 Qp	1.1 / 17.5 / 21.8	23.5	V / 1.0 / 0.0	-22.5	N/A
411.29	26.7 Qp	1.1 / 17.3 / 21.8	23.3	V / 1.0 / 0.0	-22.7	N/A
415.49	27.9 Qp	1.1 / 17.1 / 21.8	24.4	V / 1.0 / 0.0	-21.6	N/A
419.69	29.9 Qp	1.1 / 16.9 / 21.8	26.2	V / 1.0 / 0.0	-19.8	N/A
423.88	29.9 Qp	1.1 / 16.7 / 21.8	25.9	V / 1.0 / 0.0	-20.1	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 3 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
428.08	33.4 Qp	1.2 / 16.7 / 21.8	29.4	V / 1.0 / 0.0	-16.6	N/A
432.28	32.0 Qp	1.2 / 16.8 / 21.8	28.1	V / 1.0 / 0.0	-17.9	N/A
436.48	34.5 Qp	1.2 / 16.8 / 21.8	30.7	V / 1.0 / 0.0	-15.3	N/A
440.68	30.2 Qp	1.2 / 16.8 / 21.8	26.4	V / 1.0 / 0.0	-19.6	N/A
444.85	32.4 Qp	1.2 / 16.9 / 21.8	28.6	V / 1.0 / 0.0	-17.4	N/A
449.05	27.9 Qp	1.2 / 16.9 / 21.8	24.2	V / 1.0 / 0.0	-21.8	N/A
453.27	30.6 Qp	1.2 / 17.0 / 21.8	27.0	V / 1.0 / 0.0	-19.0	N/A
461.66	28.7 Qp	1.2 / 17.3 / 21.8	25.4	V / 1.0 / 0.0	-20.6	N/A
470.04	31.1 Qp	1.2 / 17.5 / 21.8	28.1	V / 1.0 / 0.0	-17.9	N/A
474.24	28.8 Qp	1.2 / 17.7 / 21.8	25.9	V / 1.0 / 0.0	-20.1	N/A
478.44	32.7 Qp	1.3 / 17.8 / 21.8	30.0	V / 1.0 / 0.0	-16.0	N/A
482.64	28.9 Qp	1.3 / 17.9 / 21.8	26.3	V / 1.0 / 0.0	-19.7	N/A
486.84	32.9 Qp	1.3 / 18.0 / 21.8	30.4	V / 1.0 / 0.0	-15.6	N/A
491.04	29.6 Qp	1.3 / 18.1 / 21.8	27.2	V / 1.0 / 0.0	-18.8	N/A
495.24	33.6 Qp	1.3 / 18.2 / 21.8	31.4	V / 1.0 / 0.0	-14.6	N/A
499.42	31.7 Qp	1.3 / 18.3 / 21.8	29.5	V / 1.0 / 0.0	-16.5	N/A
503.62	34.6 Qp	1.3 / 18.2 / 21.8	32.4	V / 1.0 / 0.0	-13.6	N/A
507.82	33.2 Qp	1.3 / 18.1 / 21.8	30.9	V / 1.0 / 0.0	-15.1	N/A
512.02	35.3 Qp	1.3 / 18.1 / 21.8	32.9	V / 1.0 / 0.0	-13.1	N/A
516.22	34.6 Qp	1.3 / 18.0 / 21.8	32.0	V / 1.0 / 0.0	-14.0	N/A
520.42	35.9 Qp	1.3 / 17.9 / 21.9	33.2	V / 1.0 / 0.0	-12.8	N/A
524.61	35.5 Qp	1.3 / 17.8 / 21.9	32.7	V / 1.0 / 0.0	-13.3	N/A
528.80	36.2 Qp	1.3 / 18.0 / 21.9	33.6	V / 1.0 / 0.0	-12.4	N/A
533.00	35.2 Qp	1.3 / 18.2 / 21.9	32.8	V / 1.0 / 0.0	-13.2	N/A
537.19	38.9 Qp	1.3 / 18.4 / 22.0	36.7	V / 1.0 / 0.0	-9.3	N/A
541.39	33.1 Qp	1.3 / 18.7 / 22.0	31.1	V / 1.0 / 0.0	-14.9	N/A
545.59	33.1 Qp	1.3 / 18.9 / 22.0	31.3	V / 1.0 / 0.0	-14.7	N/A
549.79	30.7 Qp	1.3 / 19.1 / 22.0	29.1	V / 1.0 / 0.0	-16.9	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 4 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
553.99	29.4 Qp	1.4 / 19.3 / 22.1	27.9	V / 1.0 / 0.0	-18.1	N/A
558.18	26.8 Qp	1.4 / 19.4 / 22.1	25.4	V / 1.0 / 0.0	-20.6	N/A
566.58	28.2 Qp	1.4 / 19.8 / 22.1	27.1	V / 1.0 / 0.0	-18.9	N/A
570.78	28.9 Qp	1.4 / 19.9 / 22.2	28.0	V / 1.0 / 0.0	-18.0	N/A
574.96	30.2 Qp	1.4 / 20.1 / 22.2	29.5	V / 1.0 / 0.0	-16.5	N/A
579.16	32.9 Qp	1.4 / 20.1 / 22.2	32.1	V / 1.0 / 0.0	-13.9	N/A
583.36	33.0 Qp	1.4 / 20.1 / 22.2	32.3	V / 1.0 / 0.0	-13.7	N/A
587.56	34.0 Qp	1.4 / 20.0 / 22.3	33.2	V / 1.0 / 0.0	-12.8	N/A
591.75	32.2 Qp	1.4 / 20.0 / 22.3	31.3	V / 1.0 / 0.0	-14.7	N/A
595.95	34.9 Qp	1.4 / 20.0 / 22.3	34.0	V / 1.0 / 0.0	-12.0	N/A
600.15	33.0 Qp	1.4 / 20.0 / 22.3	32.1	V / 1.0 / 0.0	-13.9	N/A
604.35	36.5 Qp	1.4 / 20.2 / 22.5	35.5	V / 1.0 / 0.0	-10.5	N/A
608.54	32.0 Qp	1.4 / 20.3 / 22.7	31.1	V / 1.0 / 0.0	-14.9	N/A
612.74	35.2 Qp	1.4 / 20.5 / 22.8	34.3	V / 1.0 / 0.0	-11.7	N/A
616.94	29.4 Qp	1.4 / 20.6 / 23.0	28.5	V / 1.0 / 0.0	-17.5	N/A
621.14	34.2 Qp	1.4 / 20.8 / 23.1	33.2	V / 1.0 / 0.0	-12.8	N/A
625.34	29.2 Qp	1.4 / 20.9 / 23.3	28.2	V / 1.0 / 0.0	-17.8	N/A
629.52	35.1 Qp	1.4 / 20.9 / 23.5	33.9	V / 1.0 / 0.0	-12.1	N/A
633.72	28.1 Qp	1.4 / 20.9 / 23.6	26.9	V / 1.0 / 0.0	-19.1	N/A
637.92	34.1 Qp	1.4 / 21.0 / 23.8	32.7	V / 1.0 / 0.0	-13.3	N/A
642.10	26.7 Qp	1.4 / 21.0 / 23.9	25.2	V / 1.0 / 0.0	-20.8	N/A
646.30	33.6 Qp	1.4 / 21.0 / 24.1	32.0	V / 1.0 / 0.0	-14.0	N/A
650.50	26.2 Qp	1.5 / 21.0 / 24.3	24.3	V / 1.0 / 0.0	-21.7	N/A
654.70	33.5 Qp	1.5 / 21.0 / 24.4	31.5	V / 1.0 / 0.0	-14.5	N/A
658.90	26.2 Qp	1.5 / 21.0 / 24.6	24.0	V / 1.0 / 0.0	-22.0	N/A
663.10	33.1 Qp	1.5 / 20.9 / 24.7	30.8	V / 1.0 / 0.0	-15.2	N/A
667.29	26.8 Qp	1.5 / 20.9 / 24.9	24.3	V / 1.0 / 0.0	-21.7	N/A
671.49	32.2 Qp	1.5 / 20.9 / 25.1	29.6	V / 1.0 / 0.0	-16.4	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 5 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
675.69	26.8 Qp	1.5 / 20.9 / 25.2	24.0	V / 1.0 / 0.0	-22.0	N/A
679.89	32.5 Qp	1.5 / 20.9 / 25.4	29.5	V / 1.0 / 0.0	-16.5	N/A
684.09	26.0 Qp	1.5 / 20.9 / 25.5	22.8	V / 1.0 / 0.0	-23.2	N/A
688.27	29.4 Qp	1.5 / 20.8 / 25.7	26.1	V / 1.0 / 0.0	-19.9	N/A
692.47	25.2 Qp	1.5 / 20.8 / 25.9	21.7	V / 1.0 / 0.0	-24.3	N/A
696.67	30.8 Qp	1.5 / 20.8 / 26.0	27.0	V / 1.0 / 0.0	-19.0	N/A
700.87	26.6 Qp	1.5 / 20.8 / 26.1	22.7	V / 1.0 / 0.0	-23.3	N/A
705.07	34.4 Qp	1.5 / 20.8 / 25.9	30.8	V / 1.0 / 0.0	-15.2	N/A
709.27	27.2 Qp	1.5 / 20.8 / 25.7	23.9	V / 1.0 / 0.0	-22.1	N/A
713.46	31.8 Qp	1.5 / 20.9 / 25.5	28.6	V / 1.0 / 0.0	-17.4	N/A
717.62	32.0 Qp	1.5 / 20.9 / 25.3	29.1	V / 1.0 / 0.0	-16.9	N/A
721.84	29.2 Qp	1.5 / 20.9 / 25.2	26.5	V / 1.0 / 0.0	-19.5	N/A
730.24	28.0 Qp	1.5 / 21.0 / 24.8	25.7	V / 1.0 / 0.0	-20.3	N/A
738.64	28.6 Qp	1.5 / 21.1 / 24.4	26.8	V / 1.0 / 0.0	-19.2	N/A
747.04	30.1 Qp	1.5 / 21.3 / 24.0	28.8	V / 1.0 / 0.0	-17.2	N/A
755.44	27.8 Qp	1.6 / 21.4 / 23.6	27.1	V / 1.0 / 0.0	-18.9	N/A
763.81	29.2 Qp	1.6 / 21.6 / 23.2	29.1	V / 1.0 / 0.0	-16.9	N/A
772.21	29.6 Qp	1.6 / 21.7 / 22.9	30.1	V / 1.0 / 0.0	-15.9	N/A
776.41	25.9 Qp	1.6 / 21.8 / 22.7	26.6	V / 1.0 / 0.0	-19.4	N/A
780.61	30.2 Qp	1.6 / 21.9 / 22.5	31.2	V / 1.0 / 0.0	-14.8	N/A
788.99	29.9 Qp	1.6 / 22.0 / 22.1	31.3	V / 1.0 / 0.0	-14.7	N/A
793.19	26.1 Qp	1.6 / 22.0 / 21.9	27.8	V / 1.0 / 0.0	-18.2	N/A
797.39	31.6 Qp	1.6 / 22.1 / 21.7	33.5	V / 1.0 / 0.0	-12.5	N/A
801.59	25.2 Qp	1.6 / 22.1 / 21.6	27.3	V / 1.0 / 0.0	-18.7	N/A
805.79	31.9 Qp	1.6 / 22.2 / 21.6	34.1	V / 1.0 / 0.0	-11.9	N/A
809.99	25.2 Qp	1.6 / 22.3 / 21.5	27.5	V / 1.0 / 0.0	-18.5	N/A
814.19	30.6 Qp	1.6 / 22.3 / 21.5	33.0	V / 1.0 / 0.0	-13.0	N/A
818.39	25.9 Qp	1.6 / 22.4 / 21.5	28.4	V / 1.0 / 0.0	-17.6	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 6 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
822.57	29.8 Qp	1.6 / 22.5 / 21.4	32.4	V / 1.0 / 0.0	-13.6	N/A
826.77	23.4 Qp	1.6 / 22.5 / 21.4	26.2	V / 1.0 / 0.0	-19.8	N/A
830.97	27.0 Qp	1.6 / 22.6 / 21.4	29.9	V / 1.0 / 0.0	-16.1	N/A
839.37	27.9 Qp	1.7 / 22.7 / 21.3	30.9	V / 1.0 / 0.0	-15.1	N/A
843.54	24.8 Qp	1.7 / 22.7 / 21.3	27.9	V / 1.0 / 0.0	-18.1	N/A
847.74	31.2 Qp	1.7 / 22.8 / 21.2	34.5	V / 1.0 / 0.0	-11.5	N/A
864.54	37.2 Qp	1.7 / 23.1 / 21.1	40.9	V / 1.0 / 0.0	-5.1	N/A
898.12	23.9 Qp	1.7 / 24.2 / 20.9	29.0	V / 1.0 / 0.0	-17.0	N/A
910.70	24.2 Qp	1.8 / 24.6 / 20.8	29.8	V / 1.0 / 0.0	-16.2	N/A
914.90	29.6 Qp	1.8 / 24.8 / 20.8	35.4	V / 1.0 / 0.0	-10.6	N/A
919.10	27.8 Qp	1.8 / 24.9 / 20.8	33.7	V / 1.0 / 0.0	-12.3	N/A
923.30	32.7 Qp	1.8 / 25.0 / 20.8	38.8	V / 1.0 / 0.0	-7.2	N/A
927.50	29.0 Qp	1.8 / 25.1 / 20.7	35.2	V / 1.0 / 0.0	-10.8	N/A
931.70	31.6 Qp	1.8 / 25.2 / 20.7	37.9	V / 1.0 / 0.0	-8.1	N/A
940.10	29.7 Qp	1.8 / 25.4 / 20.7	36.2	V / 1.0 / 0.0	-9.8	N/A
944.30	26.8 Qp	1.8 / 25.5 / 20.7	33.4	V / 1.0 / 0.0	-12.6	N/A
948.48	29.2 Qp	1.8 / 25.6 / 20.7	36.0	V / 1.0 / 0.0	-10.0	N/A
956.86	30.7 Qp	1.8 / 25.7 / 20.6	37.5	V / 1.0 / 0.0	-8.5	N/A
961.06	28.0 Qp	1.8 / 25.7 / 20.6	35.0	V / 1.0 / 0.0	-19.0	N/A
965.26	31.0 Qp	1.8 / 25.8 / 20.6	38.0	V / 1.0 / 0.0	-16.0	N/A
969.46	28.7 Qp	1.9 / 25.8 / 20.6	35.8	V / 1.0 / 0.0	-18.2	N/A
973.66	32.5 Qp	1.9 / 25.9 / 20.6	39.6	V / 1.0 / 0.0	-14.4	N/A
977.86	30.6 Qp	1.9 / 25.8 / 20.5	37.7	V / 1.0 / 0.0	-16.3	N/A
982.06	33.6 Qp	1.9 / 25.7 / 20.5	40.7	V / 1.0 / 0.0	-13.3	N/A
986.24	31.8 Qp	1.9 / 25.6 / 20.5	38.8	V / 1.0 / 0.0	-15.2	N/A
990.44	34.6 Qp	1.9 / 25.5 / 20.5	41.5	V / 1.0 / 0.0	-12.5	N/A
994.64	31.2 Qp	1.9 / 25.4 / 20.5	38.0	V / 1.0 / 0.0	-16.0	N/A
998.84	31.8 Qp	1.9 / 25.3 / 20.5	38.5	V / 1.0 / 0.0	-15.5	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 7 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
200.03	37.0 Qp	0.8 / 11.5 / 22.1	27.1	V / 1.0 / 90.0	-16.4	N/A
256.01	36.5 Qp	0.8 / 14.3 / 22.1	29.6	V / 1.0 / 90.0	-16.4	N/A
264.41	33.0 Qp	0.8 / 14.2 / 22.1	25.9	V / 1.0 / 90.0	-20.1	N/A
272.80	34.6 Qp	0.9 / 14.1 / 22.1	27.6	V / 1.0 / 90.0	-18.4	N/A
323.17	31.7 Qp	0.9 / 14.4 / 22.0	25.0	V / 1.0 / 90.0	-21.0	N/A
327.36	27.3 Qp	1.0 / 14.4 / 22.0	20.7	V / 1.0 / 90.0	-25.3	N/A
331.56	28.2 Qp	1.0 / 14.5 / 22.0	21.6	V / 1.0 / 90.0	-24.4	N/A
348.34	35.1 Qp	1.0 / 14.8 / 22.0	28.9	V / 1.0 / 90.0	-17.1	N/A
352.54	34.1 Qp	1.0 / 14.8 / 21.9	28.0	V / 1.0 / 90.0	-18.0	N/A
356.74	34.9 Qp	1.0 / 14.8 / 21.9	28.8	V / 1.0 / 90.0	-17.2	N/A
360.94	33.1 Qp	1.0 / 14.8 / 21.9	27.1	V / 1.0 / 90.0	-18.9	N/A
373.51	34.7 Qp	1.0 / 14.9 / 21.9	28.7	V / 1.0 / 90.0	-17.3	N/A
377.71	33.8 Qp	1.1 / 15.2 / 21.9	28.2	V / 1.0 / 90.0	-17.8	N/A
381.92	34.0 Qp	1.1 / 15.7 / 21.9	28.8	V / 1.0 / 90.0	-17.2	N/A
386.12	34.5 Qp	1.1 / 16.2 / 21.9	29.8	V / 1.0 / 90.0	-16.2	N/A
390.31	34.1 Qp	1.1 / 16.7 / 21.9	30.0	V / 1.0 / 90.0	-16.0	N/A
394.51	34.0 Qp	1.1 / 17.2 / 21.9	30.4	V / 1.0 / 90.0	-15.6	N/A
398.70	31.9 Qp	1.1 / 17.6 / 21.9	28.8	V / 1.0 / 90.0	-17.2	N/A
402.90	31.5 Qp	1.1 / 17.7 / 21.8	28.4	V / 1.0 / 90.0	-17.6	N/A
407.09	31.6 Qp	1.1 / 17.5 / 21.8	28.3	V / 1.0 / 90.0	-17.7	N/A
411.29	31.8 Qp	1.1 / 17.3 / 21.8	28.3	V / 1.0 / 90.0	-17.7	N/A
415.49	31.0 Qp	1.1 / 17.1 / 21.8	27.4	V / 1.0 / 90.0	-18.6	N/A
444.85	35.3 Qp	1.2 / 16.9 / 21.8	31.5	V / 1.0 / 90.0	-14.5	N/A
449.05	30.6 Qp	1.2 / 16.9 / 21.8	26.9	V / 1.0 / 90.0	-19.1	N/A
453.27	33.5 Qp	1.2 / 17.0 / 21.8	29.9	V / 1.0 / 90.0	-16.1	N/A
461.66	29.0 Qp	1.2 / 17.3 / 21.8	25.7	V / 1.0 / 90.0	-20.3	N/A
520.42	36.0 Qp	1.3 / 17.9 / 21.9	33.3	V / 1.0 / 90.0	-12.7	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 8 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
528.80	36.8 Qp	1.3 / 18.0 / 21.9	34.2	V / 1.0 / 90.0	-11.8	N/A
541.39	34.7 Qp	1.3 / 18.7 / 22.0	32.7	V / 1.0 / 90.0	-13.3	N/A
545.59	36.9 Qp	1.3 / 18.9 / 22.0	35.1	V / 1.0 / 90.0	-10.9	N/A
549.79	32.4 Qp	1.3 / 19.1 / 22.0	30.8	V / 1.0 / 90.0	-15.2	N/A
553.99	31.2 Qp	1.4 / 19.3 / 22.1	29.8	V / 1.0 / 90.0	-16.2	N/A
558.18	29.4 Qp	1.4 / 19.4 / 22.1	28.0	V / 1.0 / 90.0	-18.0	N/A
566.58	31.8 Qp	1.4 / 19.8 / 22.1	30.7	V / 1.0 / 90.0	-15.3	N/A
570.78	33.4 Qp	1.4 / 19.9 / 22.2	32.5	V / 1.0 / 90.0	-13.5	N/A
574.96	32.7 Qp	1.4 / 20.1 / 22.2	32.0	V / 1.0 / 90.0	-14.0	N/A
579.16	35.6 Qp	1.4 / 20.1 / 22.2	34.9	V / 1.0 / 90.0	-11.1	N/A
583.36	34.7 Qp	1.4 / 20.1 / 22.2	33.9	V / 1.0 / 90.0	-12.1	N/A
587.56	36.8 Qp	1.4 / 20.0 / 22.3	36.0	V / 1.0 / 90.0	-10.0	N/A
591.75	34.5 Qp	1.4 / 20.0 / 22.3	33.6	V / 1.0 / 90.0	-12.4	N/A
595.95	36.6 Qp	1.4 / 20.0 / 22.3	35.8	V / 1.0 / 90.0	-10.2	N/A
600.15	33.7 Qp	1.4 / 20.0 / 22.3	32.8	V / 1.0 / 90.0	-13.2	N/A
608.54	32.8 Qp	1.4 / 20.3 / 22.7	31.8	V / 1.0 / 90.0	-14.2	N/A
616.94	30.1 Qp	1.4 / 20.6 / 23.0	29.1	V / 1.0 / 90.0	-16.9	N/A
625.34	30.4 Qp	1.4 / 20.9 / 23.3	29.5	V / 1.0 / 90.0	-16.5	N/A
633.72	30.2 Qp	1.4 / 20.9 / 23.6	28.9	V / 1.0 / 90.0	-17.1	N/A
637.92	35.9 Qp	1.4 / 21.0 / 23.8	34.5	V / 1.0 / 90.0	-11.5	N/A
642.10	30.1 Qp	1.4 / 21.0 / 23.9	28.6	V / 1.0 / 90.0	-17.4	N/A
646.30	37.9 Qp	1.4 / 21.0 / 24.1	36.2	V / 1.0 / 90.0	-9.8	N/A
650.50	30.7 Qp	1.5 / 21.0 / 24.3	28.9	V / 1.0 / 90.0	-17.1	N/A
654.70	37.2 Qp	1.5 / 21.0 / 24.4	35.3	V / 1.0 / 90.0	-10.7	N/A
658.90	29.4 Qp	1.5 / 21.0 / 24.6	27.3	V / 1.0 / 90.0	-18.7	N/A
663.10	35.6 Qp	1.5 / 20.9 / 24.7	33.3	V / 1.0 / 90.0	-12.7	N/A
667.29	28.2 Qp	1.5 / 20.9 / 24.9	25.7	V / 1.0 / 90.0	-20.3	N/A
671.49	33.6 Qp	1.5 / 20.9 / 25.1	31.0	V / 1.0 / 90.0	-15.0	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 9 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
675.69	27.7 Qp	1.5 / 20.9 / 25.2	24.8	V / 1.0 / 90.0	-21.2	N/A
679.89	33.6 Qp	1.5 / 20.9 / 25.4	30.6	V / 1.0 / 90.0	-15.4	N/A
684.09	27.9 Qp	1.5 / 20.9 / 25.5	24.7	V / 1.0 / 90.0	-21.3	N/A
688.27	33.6 Qp	1.5 / 20.8 / 25.7	30.3	V / 1.0 / 90.0	-15.7	N/A
692.47	28.3 Qp	1.5 / 20.8 / 25.9	24.8	V / 1.0 / 90.0	-21.2	N/A
696.67	35.2 Qp	1.5 / 20.8 / 26.0	31.5	V / 1.0 / 90.0	-14.5	N/A
700.87	29.2 Qp	1.5 / 20.8 / 26.1	25.3	V / 1.0 / 90.0	-20.7	N/A
705.07	36.7 Qp	1.5 / 20.8 / 25.9	33.1	V / 1.0 / 90.0	-12.9	N/A
709.27	28.7 Qp	1.5 / 20.8 / 25.7	25.3	V / 1.0 / 90.0	-20.7	N/A
713.46	35.4 Qp	1.5 / 20.9 / 25.5	32.2	V / 1.0 / 90.0	-13.8	N/A
721.84	36.3 Qp	1.5 / 20.9 / 25.2	33.6	V / 1.0 / 90.0	-12.4	N/A
730.24	36.4 Qp	1.5 / 21.0 / 24.8	34.1	V / 1.0 / 90.0	-11.9	N/A
738.64	38.1 Qp	1.5 / 21.1 / 24.4	36.4	V / 1.0 / 90.0	-9.6	N/A
747.04	38.6 Qp	1.5 / 21.3 / 24.0	37.3	V / 1.0 / 90.0	-8.7	N/A
755.44	36.9 Qp	1.6 / 21.4 / 23.6	36.2	V / 1.0 / 90.0	-9.8	N/A
763.81	37.1 Qp	1.6 / 21.6 / 23.2	37.0	V / 1.0 / 90.0	-9.0	N/A
772.21	37.4 Qp	1.6 / 21.7 / 22.9	37.9	V / 1.0 / 90.0	-8.1	N/A
776.41	29.4 Qp	1.6 / 21.8 / 22.7	30.1	V / 1.0 / 90.0	-15.9	N/A
780.61	36.8 Qp	1.6 / 21.9 / 22.5	37.7	V / 1.0 / 90.0	-8.3	N/A
788.99	34.4 Qp	1.6 / 22.0 / 22.1	35.8	V / 1.0 / 90.0	-10.2	N/A
793.19	26.8 Qp	1.6 / 22.0 / 21.9	28.5	V / 1.0 / 90.0	-17.5	N/A
797.39	34.2 Qp	1.6 / 22.1 / 21.7	36.1	V / 1.0 / 90.0	-9.9	N/A
805.79	33.6 Qp	1.6 / 22.2 / 21.6	35.8	V / 1.0 / 90.0	-10.2	N/A
809.99	25.9 Qp	1.6 / 22.3 / 21.5	28.3	V / 1.0 / 90.0	-17.7	N/A
814.19	34.6 Qp	1.6 / 22.3 / 21.5	37.0	V / 1.0 / 90.0	-9.0	N/A
818.39	26.4 Qp	1.6 / 22.4 / 21.5	29.0	V / 1.0 / 90.0	-17.0	N/A
822.57	34.9 Qp	1.6 / 22.5 / 21.4	37.5	V / 1.0 / 90.0	-8.5	N/A
826.77	26.6 Qp	1.6 / 22.5 / 21.4	29.3	V / 1.0 / 90.0	-16.7	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 10 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
830.97	34.6 Qp	1.6 / 22.6 / 21.4	37.5	V / 1.0 / 90.0	-8.5	N/A
839.37	34.6 Qp	1.7 / 22.7 / 21.3	37.6	V / 1.0 / 90.0	-8.4	N/A
843.54	27.6 Qp	1.7 / 22.7 / 21.3	30.7	V / 1.0 / 90.0	-15.3	N/A
847.74	34.9 Qp	1.7 / 22.8 / 21.2	38.1	V / 1.0 / 90.0	-7.9	N/A
910.70	26.5 Qp	1.8 / 24.6 / 20.8	32.1	V / 1.0 / 90.0	-13.9	N/A
914.90	31.6 Qp	1.8 / 24.8 / 20.8	37.3	V / 1.0 / 90.0	-8.7	N/A
432.52	33.3 Qp	1.2 / 16.8 / 21.8	29.4	V / 1.0 / 180.0	-16.6	N/A
474.31	33.1 Qp	1.2 / 17.7 / 21.8	30.3	V / 1.0 / 180.0	-15.7	N/A
474.31	33.2 Qp	1.2 / 17.7 / 21.8	30.4	V / 1.0 / 180.0	-15.6	N/A
238.38	30.8 Qp	0.8 / 14.3 / 22.1	23.8	V / 1.0 / 180.0	-22.2	N/A
280.03	27.4 Qp	0.9 / 14.2 / 22.1	20.4	V / 1.0 / 180.0	-25.6	N/A
294.91	27.9 Qp	0.9 / 14.3 / 22.1	21.0	V / 1.0 / 180.0	-25.0	N/A
314.56	27.4 Qp	0.9 / 14.4 / 22.0	20.7	V / 1.0 / 180.0	-25.3	N/A
420.26	27.3 Qp	1.1 / 16.9 / 21.8	23.5	V / 1.0 / 180.0	-22.5	N/A
422.71	30.4 Qp	1.1 / 16.8 / 21.8	26.5	V / 1.0 / 180.0	-19.5	N/A
425.17	30.4 Qp	1.2 / 16.7 / 21.8	26.4	V / 1.0 / 180.0	-19.6	N/A
430.08	29.1 Qp	1.2 / 16.7 / 21.8	25.2	V / 1.0 / 180.0	-20.8	N/A
435.00	32.0 Qp	1.2 / 16.8 / 21.8	28.2	V / 1.0 / 180.0	-17.8	N/A
439.93	29.4 Qp	1.2 / 16.8 / 21.8	25.6	V / 1.0 / 180.0	-20.4	N/A
442.37	32.4 Qp	1.2 / 16.8 / 21.8	28.6	V / 1.0 / 180.0	-17.4	N/A
449.75	27.9 Qp	1.2 / 16.9 / 21.8	24.2	V / 1.0 / 180.0	-21.8	N/A
452.21	32.8 Qp	1.2 / 17.0 / 21.8	29.2	V / 1.0 / 180.0	-16.8	N/A
454.67	28.2 Qp	1.2 / 17.0 / 21.8	24.7	V / 1.0 / 180.0	-21.3	N/A
459.56	29.2 Qp	1.2 / 17.2 / 21.8	25.9	V / 1.0 / 180.0	-20.1	N/A
462.02	32.5 Qp	1.2 / 17.3 / 21.8	29.3	V / 1.0 / 180.0	-16.7	N/A
464.49	27.8 Qp	1.2 / 17.4 / 21.8	24.6	V / 1.0 / 180.0	-21.4	N/A
466.94	28.9 Qp	1.2 / 17.4 / 21.8	25.7	V / 1.0 / 180.0	-20.3	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 11 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
469.40	27.2 Qp	1.2 / 17.5 / 21.8	24.1	V / 1.0 / 180.0	-21.9	N/A
471.87	29.2 Qp	1.2 / 17.6 / 21.8	26.3	V / 1.0 / 180.0	-19.7	N/A
476.79	28.4 Qp	1.3 / 17.7 / 21.8	25.6	V / 1.0 / 180.0	-20.4	N/A
479.25	29.3 Qp	1.3 / 17.8 / 21.8	26.6	V / 1.0 / 180.0	-19.4	N/A
481.70	32.5 Qp	1.3 / 17.9 / 21.8	29.9	V / 1.0 / 180.0	-16.1	N/A
484.15	27.4 Qp	1.3 / 17.9 / 21.8	24.8	V / 1.0 / 180.0	-21.2	N/A
489.07	27.8 Qp	1.3 / 18.0 / 21.8	25.4	V / 1.0 / 180.0	-20.6	N/A
491.53	32.3 Qp	1.3 / 18.1 / 21.8	29.9	V / 1.0 / 180.0	-16.1	N/A
493.99	29.5 Qp	1.3 / 18.2 / 21.8	27.2	V / 1.0 / 180.0	-18.8	N/A
498.91	30.9 Qp	1.3 / 18.3 / 21.8	28.8	V / 1.0 / 180.0	-17.2	N/A
501.35	34.4 Qp	1.3 / 18.3 / 21.8	32.2	V / 1.0 / 180.0	-13.8	N/A
503.81	28.4 Qp	1.3 / 18.2 / 21.8	26.1	V / 1.0 / 180.0	-19.9	N/A
506.27	28.6 Qp	1.3 / 18.2 / 21.8	26.3	V / 1.0 / 180.0	-19.7	N/A
508.73	30.4 Qp	1.3 / 18.1 / 21.8	28.1	V / 1.0 / 180.0	-17.9	N/A
511.19	33.4 Qp	1.3 / 18.1 / 21.8	30.9	V / 1.0 / 180.0	-15.1	N/A
513.65	28.8 Qp	1.3 / 18.0 / 21.8	26.3	V / 1.0 / 180.0	-19.7	N/A
516.11	27.6 Qp	1.3 / 18.0 / 21.8	25.1	V / 1.0 / 180.0	-20.9	N/A
518.57	29.9 Qp	1.3 / 17.9 / 21.9	27.2	V / 1.0 / 180.0	-18.8	N/A
521.00	33.4 Qp	1.3 / 17.9 / 21.9	30.7	V / 1.0 / 180.0	-15.3	N/A
525.92	27.4 Qp	1.3 / 17.8 / 21.9	24.7	V / 1.0 / 180.0	-21.3	N/A
528.38	29.0 Qp	1.3 / 18.0 / 21.9	26.4	V / 1.0 / 180.0	-19.6	N/A
530.84	34.4 Qp	1.3 / 18.1 / 21.9	31.9	V / 1.0 / 180.0	-14.1	N/A
533.30	28.2 Qp	1.3 / 18.2 / 21.9	25.8	V / 1.0 / 180.0	-20.2	N/A
540.68	31.4 Qp	1.3 / 18.6 / 22.0	29.3	V / 1.0 / 180.0	-16.7	N/A
545.60	26.2 Qp	1.3 / 18.9 / 22.0	24.4	V / 1.0 / 180.0	-21.6	N/A
557.88	27.2 Qp	1.4 / 19.4 / 22.1	25.9	V / 1.0 / 180.0	-20.1	N/A
560.34	30.7 Qp	1.4 / 19.5 / 22.1	29.5	V / 1.0 / 180.0	-16.5	N/A
565.25	26.4 Qp	1.4 / 19.7 / 22.1	25.4	V / 1.0 / 180.0	-20.6	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 12 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
567.72	27.7 Qp	1.4 / 19.8 / 22.1	26.7	V / 1.0 / 180.0	-19.3	N/A
570.17	29.9 Qp	1.4 / 19.9 / 22.2	29.0	V / 1.0 / 180.0	-17.0	N/A
570.17	29.9 Qp	1.4 / 19.9 / 22.2	29.1	V / 1.0 / 180.0	-16.9	N/A
587.37	26.8 Qp	1.4 / 20.1 / 22.3	25.9	V / 1.0 / 180.0	-20.1	N/A
589.83	25.9 Qp	1.4 / 20.0 / 22.3	25.1	V / 1.0 / 180.0	-20.9	N/A
592.29	24.7 Qp	1.4 / 20.0 / 22.3	23.8	V / 1.0 / 180.0	-22.2	N/A
597.21	27.4 Qp	1.4 / 20.0 / 22.3	26.5	V / 1.0 / 180.0	-19.5	N/A
599.67	27.6 Qp	1.4 / 20.0 / 22.3	26.6	V / 1.0 / 180.0	-19.4	N/A
604.57	26.3 Qp	1.4 / 20.2 / 22.5	25.4	V / 1.0 / 180.0	-20.6	N/A
607.02	26.6 Qp	1.4 / 20.3 / 22.6	25.6	V / 1.0 / 180.0	-20.4	N/A
626.67	26.2 Qp	1.4 / 20.9 / 23.3	25.1	V / 1.0 / 180.0	-20.9	N/A
629.13	26.2 Qp	1.4 / 20.9 / 23.4	25.1	V / 1.0 / 180.0	-20.9	N/A
631.60	26.2 Qp	1.4 / 20.9 / 23.5	25.0	V / 1.0 / 180.0	-21.0	N/A
641.43	27.4 Qp	1.4 / 21.0 / 23.9	25.8	V / 1.0 / 180.0	-20.2	N/A
643.89	26.2 Qp	1.4 / 21.0 / 24.0	24.6	V / 1.0 / 180.0	-21.4	N/A
648.82	31.4 Qp	1.4 / 21.0 / 24.2	29.6	V / 1.0 / 180.0	-16.4	N/A
651.26	31.1 Qp	1.5 / 21.0 / 24.3	29.2	V / 1.0 / 180.0	-16.8	N/A
653.73	27.0 Qp	1.5 / 21.0 / 24.4	25.1	V / 1.0 / 180.0	-20.9	N/A
658.63	26.7 Qp	1.5 / 21.0 / 24.6	24.5	V / 1.0 / 180.0	-21.5	N/A
661.10	27.8 Qp	1.5 / 21.0 / 24.7	25.6	V / 1.0 / 180.0	-20.4	N/A
668.48	28.2 Qp	1.5 / 20.9 / 24.9	25.6	V / 1.0 / 180.0	-20.4	N/A
670.93	29.3 Qp	1.5 / 20.9 / 25.0	26.6	V / 1.0 / 180.0	-19.4	N/A
673.38	25.8 Qp	1.5 / 20.9 / 25.1	23.0	V / 1.0 / 180.0	-23.0	N/A
678.30	27.4 Qp	1.5 / 20.9 / 25.3	24.4	V / 1.0 / 180.0	-21.6	N/A
680.76	26.2 Qp	1.5 / 20.9 / 25.4	23.2	V / 1.0 / 180.0	-22.8	N/A
688.14	29.1 Qp	1.5 / 20.8 / 25.7	25.7	V / 1.0 / 180.0	-20.3	N/A
690.58	27.1 Qp	1.5 / 20.8 / 25.8	23.6	V / 1.0 / 180.0	-22.4	N/A
697.96	29.2 Qp	1.5 / 20.8 / 26.1	25.4	V / 1.0 / 180.0	-20.6	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 13 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
700.42	25.8 Qp	1.5 / 20.8 / 26.1	22.0	V / 1.0 / 180.0	-24.0	N/A
707.80	30.1 Qp	1.5 / 20.8 / 25.8	26.6	V / 1.0 / 180.0	-19.4	N/A
710.26	27.2 Qp	1.5 / 20.8 / 25.7	23.9	V / 1.0 / 180.0	-22.1	N/A
717.62	29.6 Qp	1.5 / 20.9 / 25.3	26.6	V / 1.0 / 180.0	-19.4	N/A
727.46	29.0 Qp	1.5 / 20.9 / 24.9	26.6	V / 1.0 / 180.0	-19.4	N/A
737.28	29.2 Qp	1.5 / 21.1 / 24.5	27.3	V / 1.0 / 180.0	-18.7	N/A
747.11	27.9 Qp	1.5 / 21.3 / 24.0	26.7	V / 1.0 / 180.0	-19.3	N/A
756.95	24.9 Qp	1.6 / 21.4 / 23.6	24.3	V / 1.0 / 180.0	-21.7	N/A
796.26	25.5 Qp	1.6 / 22.1 / 21.8	27.4	V / 1.0 / 180.0	-18.6	N/A
806.10	24.6 Qp	1.6 / 22.2 / 21.6	26.8	V / 1.0 / 180.0	-19.2	N/A
202.75	30.4 Qp	0.8 / 11.8 / 22.1	20.9	V / 1.0 / 270.0	-22.6	N/A
210.16	31.2 Qp	0.8 / 12.6 / 22.1	22.4	V / 1.0 / 270.0	-21.1	N/A
294.91	29.4 Qp	0.9 / 14.3 / 22.1	22.6	V / 1.0 / 270.0	-23.4	N/A
481.70	33.2 Qp	1.3 / 17.9 / 21.8	30.6	V / 1.0 / 270.0	-15.4	N/A
484.15	28.9 Qp	1.3 / 17.9 / 21.8	26.3	V / 1.0 / 270.0	-19.7	N/A
489.07	29.1 Qp	1.3 / 18.0 / 21.8	26.7	V / 1.0 / 270.0	-19.3	N/A
491.53	33.0 Qp	1.3 / 18.1 / 21.8	30.6	V / 1.0 / 270.0	-15.4	N/A
493.99	31.3 Qp	1.3 / 18.2 / 21.8	29.0	V / 1.0 / 270.0	-17.0	N/A
501.35	36.0 Qp	1.3 / 18.3 / 21.8	33.8	V / 1.0 / 270.0	-12.2	N/A
503.81	30.9 Qp	1.3 / 18.2 / 21.8	28.6	V / 1.0 / 270.0	-17.4	N/A
508.73	30.9 Qp	1.3 / 18.1 / 21.8	28.5	V / 1.0 / 270.0	-17.5	N/A
511.19	36.2 Qp	1.3 / 18.1 / 21.8	33.8	V / 1.0 / 270.0	-12.2	N/A
513.65	31.1 Qp	1.3 / 18.0 / 21.8	28.6	V / 1.0 / 270.0	-17.4	N/A
516.11	29.7 Qp	1.3 / 18.0 / 21.8	27.1	V / 1.0 / 270.0	-18.9	N/A
521.00	35.9 Qp	1.3 / 17.9 / 21.9	33.2	V / 1.0 / 270.0	-12.8	N/A
525.92	28.7 Qp	1.3 / 17.8 / 21.9	26.0	V / 1.0 / 270.0	-20.0	N/A
533.30	29.2 Qp	1.3 / 18.2 / 21.9	26.8	V / 1.0 / 270.0	-19.2	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC Part 15 Test Date: 25-Mar-2002
 EUT Model #: AMS-SM01 EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 14 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
540.68	33.1 Qp	1.3 / 18.6 / 22.0	31.1	V / 1.0 / 270.0	-14.9	N/A
587.37	27.8 Qp	1.4 / 20.1 / 22.3	27.0	V / 1.0 / 270.0	-19.0	N/A
589.83	26.5 Qp	1.4 / 20.0 / 22.3	25.7	V / 1.0 / 270.0	-20.3	N/A
678.30	28.3 Qp	1.5 / 20.9 / 25.3	25.3	V / 1.0 / 270.0	-20.7	N/A
680.76	27.9 Qp	1.5 / 20.9 / 25.4	24.8	V / 1.0 / 270.0	-21.2	N/A
The following were maximized between 200 and 1000 MHz, vertical						
214.04 MHz was from the support equipment and was deleted from the summary						
537.19 MHz was from the support equipment and was deleted from the summary						
587.56 MHz was from the support equipment and was deleted from the summary						
646.3 MHz was from the support equipment and was deleted from the summary						
738.64 MHz was from the support equipment and was deleted from the summary						
747.11	33.6 Qp	1.5 / 21.3 / 24.0	32.4	V / 1.6 / 323.0	-13.6	N/A
755.44 MHz was from the support equipment and was deleted from the summary						
763.81 MHz was from the support equipment and was deleted from the summary						
772.21 MHz was from the support equipment and was deleted from the summary						
780.61 MHz was from the support equipment and was deleted from the summary						
797.39 MHz was from the support equipment and was deleted from the summary						
814.19 MHz was from the support equipment and was deleted from the summary						
822.57, 830.97, 839.37, 847.74, 864.54, 914.9, 923.3, 931.7, 940.1, 948.48, 956.86 MHz were all from support equipment and were deleted from the summary						
501.35	38.0 Qp	1.3 / 18.3 / 21.8	35.8	V / 1.0 / 330.0	-10.2	N/A
511.19	37.3 Qp	1.3 / 18.1 / 21.8	34.9	V / 1.0 / 324.0	-11.1	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 15 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
521.00	39.5 Qp	1.3 / 17.9 / 21.9	36.8	V / 1.0 / 325.0	-9.2	N/A
200.03	28.9 Qp	0.8 / 11.5 / 22.1	19.1	H / 2.0 / 0.0	-24.4	N/A
314.56	26.4 Qp	0.9 / 14.4 / 22.0	19.8	H / 2.0 / 0.0	-26.2	N/A
340.03	28.2 Qp	1.0 / 14.6 / 22.0	21.8	H / 2.0 / 0.0	-24.2	N/A
340.03	27.8 Qp	1.0 / 14.6 / 22.0	21.5	H / 2.0 / 0.0	-24.5	N/A
442.37	26.6 Qp	1.2 / 16.8 / 21.8	22.8	H / 2.0 / 0.0	-23.2	N/A
452.21	29.5 Qp	1.2 / 17.0 / 21.8	25.9	H / 2.0 / 0.0	-20.1	N/A
454.67	28.1 Qp	1.2 / 17.0 / 21.8	24.6	H / 2.0 / 0.0	-21.4	N/A
462.02	29.8 Qp	1.2 / 17.3 / 21.8	26.5	H / 2.0 / 0.0	-19.5	N/A
464.49	27.8 Qp	1.2 / 17.4 / 21.8	24.6	H / 2.0 / 0.0	-21.4	N/A
469.40	30.2 Qp	1.2 / 17.5 / 21.8	27.2	H / 2.0 / 0.0	-18.8	N/A
471.87	33.2 Qp	1.2 / 17.6 / 21.8	30.3	H / 2.0 / 0.0	-15.7	N/A
474.31	30.9 Qp	1.2 / 17.7 / 21.8	28.0	H / 2.0 / 0.0	-18.0	N/A
626.67	28.2 Qp	1.4 / 20.9 / 23.3	27.2	H / 1.5 / 0.0	-18.8	N/A
629.13	31.7 Qp	1.4 / 20.9 / 23.4	30.6	H / 1.5 / 0.0	-15.4	N/A
631.60	28.4 Qp	1.4 / 20.9 / 23.5	27.2	H / 1.5 / 0.0	-18.8	N/A
658.63	28.8 Qp	1.5 / 21.0 / 24.6	26.6	H / 1.5 / 0.0	-19.4	N/A
661.10	30.1 Qp	1.5 / 21.0 / 24.7	27.9	H / 1.5 / 0.0	-18.1	N/A
668.48	29.2 Qp	1.5 / 20.9 / 24.9	26.7	H / 1.5 / 0.0	-19.3	N/A
670.93	30.6 Qp	1.5 / 20.9 / 25.0	27.9	H / 1.5 / 0.0	-18.1	N/A
673.38	26.7 Qp	1.5 / 20.9 / 25.1	23.9	H / 1.5 / 0.0	-22.1	N/A
678.30	28.4 Qp	1.5 / 20.9 / 25.3	25.5	H / 1.5 / 0.0	-20.5	N/A
688.14	29.9 Qp	1.5 / 20.8 / 25.7	26.5	H / 1.5 / 0.0	-19.5	N/A
690.58	30.1 Qp	1.5 / 20.8 / 25.8	26.6	H / 1.5 / 0.0	-19.4	N/A
697.96	32.3 Qp	1.5 / 20.8 / 26.1	28.5	H / 1.5 / 0.0	-17.5	N/A
700.42	30.3 Qp	1.5 / 20.8 / 26.1	26.5	H / 1.5 / 0.0	-19.5	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 16 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
707.80	31.2 Qp	1.5 / 20.8 / 25.8	27.7	H / 1.5 / 0.0	-18.3	N/A
710.26	30.4 Qp	1.5 / 20.8 / 25.7	27.1	H / 1.5 / 0.0	-18.9	N/A
717.62	34.4 Qp	1.5 / 20.9 / 25.3	31.4	H / 1.5 / 0.0	-14.6	N/A
727.46	34.5 Qp	1.5 / 20.9 / 24.9	32.1	H / 1.5 / 0.0	-13.9	N/A
737.28	36.0 Qp	1.5 / 21.1 / 24.5	34.2	H / 1.5 / 0.0	-11.8	N/A
747.11	34.9 Qp	1.5 / 21.3 / 24.0	33.7	H / 1.5 / 0.0	-12.3	N/A
756.95	34.4 Qp	1.6 / 21.4 / 23.6	33.8	H / 1.5 / 0.0	-12.2	N/A
776.59	33.3 Qp	1.6 / 21.8 / 22.7	34.0	H / 1.5 / 0.0	-12.0	N/A
796.26	28.2 Qp	1.6 / 22.1 / 21.8	30.1	H / 1.5 / 0.0	-15.9	N/A
766.77	33.0 Qp	1.6 / 21.6 / 23.1	33.1	H / 1.5 / 0.0	-12.9	N/A
786.43	32.5 Qp	1.6 / 21.9 / 22.2	33.9	H / 1.5 / 0.0	-12.1	N/A
454.67	28.7 Qp	1.2 / 17.0 / 21.8	25.1	H / 2.0 / 90.0	-20.9	N/A
528.38	28.8 Qp	1.3 / 18.0 / 21.9	26.2	H / 1.5 / 90.0	-19.8	N/A
530.84	32.9 Qp	1.3 / 18.1 / 21.9	30.4	H / 1.5 / 90.0	-15.6	N/A
533.30	29.2 Qp	1.3 / 18.2 / 21.9	26.9	H / 1.5 / 90.0	-19.1	N/A
540.68	35.3 Qp	1.3 / 18.6 / 22.0	33.3	H / 1.5 / 90.0	-12.7	N/A
557.88	30.5 Qp	1.4 / 19.4 / 22.1	29.2	H / 1.5 / 90.0	-16.8	N/A
560.34	34.0 Qp	1.4 / 19.5 / 22.1	32.7	H / 1.5 / 90.0	-13.3	N/A
565.25	29.1 Qp	1.4 / 19.7 / 22.1	28.0	H / 1.5 / 90.0	-18.0	N/A
567.72	30.3 Qp	1.4 / 19.8 / 22.1	29.3	H / 1.5 / 90.0	-16.7	N/A
587.37	28.2 Qp	1.4 / 20.1 / 22.3	27.4	H / 1.5 / 90.0	-18.6	N/A
592.29	28.1 Qp	1.4 / 20.0 / 22.3	27.2	H / 1.5 / 90.0	-18.8	N/A
597.21	30.4 Qp	1.4 / 20.0 / 22.3	29.5	H / 1.5 / 90.0	-16.5	N/A
599.67	29.6 Qp	1.4 / 20.0 / 22.3	28.6	H / 1.5 / 90.0	-17.4	N/A
604.57	28.8 Qp	1.4 / 20.2 / 22.5	27.8	H / 1.5 / 90.0	-18.2	N/A
678.30	29.7 Qp	1.5 / 20.9 / 25.3	26.7	H / 1.5 / 90.0	-19.3	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC Part 15 Test Date: 25-Mar-2002
 EUT Model #: AMS-SM01 EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 17 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
420.26	28.1 Qp	1.1 / 16.9 / 21.8	24.3	H / 2.0 / 180.0	-21.7	N/A
422.71	30.9 Qp	1.1 / 16.8 / 21.8	27.0	H / 2.0 / 180.0	-19.0	N/A
454.67	29.3 Qp	1.2 / 17.0 / 21.8	25.8	H / 2.0 / 180.0	-20.2	N/A
474.31	29.4 Qp	1.2 / 17.7 / 21.8	26.6	H / 2.0 / 180.0	-19.4	N/A
518.57	30.8 Qp	1.3 / 17.9 / 21.9	28.1	H / 1.5 / 180.0	-17.9	N/A
528.38	30.9 Qp	1.3 / 18.0 / 21.9	28.3	H / 1.5 / 180.0	-17.7	N/A
533.30	31.1 Qp	1.3 / 18.2 / 21.9	28.7	H / 1.5 / 180.0	-17.3	N/A
540.68	37.2 Qp	1.3 / 18.6 / 22.0	35.2	H / 1.5 / 180.0	-10.8	N/A
557.88	30.7 Qp	1.4 / 19.4 / 22.1	29.3	H / 1.5 / 180.0	-16.7	N/A
560.34	34.5 Qp	1.4 / 19.5 / 22.1	33.2	H / 1.5 / 180.0	-12.8	N/A
570.17	32.5 Qp	1.4 / 19.9 / 22.2	31.7	H / 1.5 / 180.0	-14.3	N/A
587.37	31.9 Qp	1.4 / 20.1 / 22.3	31.1	H / 1.5 / 180.0	-14.9	N/A
589.83	31.9 Qp	1.4 / 20.0 / 22.3	31.1	H / 1.5 / 180.0	-14.9	N/A
599.67	30.0 Qp	1.4 / 20.0 / 22.3	29.1	H / 1.5 / 180.0	-16.9	N/A
607.02	29.5 Qp	1.4 / 20.3 / 22.6	28.6	H / 1.5 / 180.0	-17.4	N/A
626.67	29.3 Qp	1.4 / 20.9 / 23.3	28.3	H / 1.5 / 180.0	-17.7	N/A
631.60	29.7 Qp	1.4 / 20.9 / 23.5	28.5	H / 1.5 / 180.0	-17.5	N/A
641.43	30.8 Qp	1.4 / 21.0 / 23.9	29.3	H / 1.5 / 180.0	-16.7	N/A
643.89	28.8 Qp	1.4 / 21.0 / 24.0	27.2	H / 1.5 / 180.0	-18.8	N/A
651.26	34.2 Qp	1.5 / 21.0 / 24.3	32.4	H / 1.5 / 180.0	-13.6	N/A
653.73	30.1 Qp	1.5 / 21.0 / 24.4	28.1	H / 1.5 / 180.0	-17.9	N/A
658.63	31.0 Qp	1.5 / 21.0 / 24.6	28.9	H / 1.5 / 180.0	-17.1	N/A
661.10	32.5 Qp	1.5 / 21.0 / 24.7	30.2	H / 1.5 / 180.0	-15.8	N/A
668.48	31.4 Qp	1.5 / 20.9 / 24.9	28.8	H / 1.5 / 180.0	-17.2	N/A
670.93	32.5 Qp	1.5 / 20.9 / 25.0	29.8	H / 1.5 / 180.0	-16.2	N/A
673.38	28.4 Qp	1.5 / 20.9 / 25.1	25.6	H / 1.5 / 180.0	-20.4	N/A
678.30	31.6 Qp	1.5 / 20.9 / 25.3	28.6	H / 1.5 / 180.0	-17.4	N/A
680.76	31.5 Qp	1.5 / 20.9 / 25.4	28.4	H / 1.5 / 180.0	-17.6	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 18 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
688.14	33.0 Qp	1.5 / 20.8 / 25.7	29.7	H / 1.5 / 180.0	-16.3	N/A
690.58	32.5 Qp	1.5 / 20.8 / 25.8	29.0	H / 1.5 / 180.0	-17.0	N/A
697.96	32.7 Qp	1.5 / 20.8 / 26.1	28.9	H / 1.5 / 180.0	-17.1	N/A
806.10	24.9 Qp	1.6 / 22.2 / 21.6	27.2	H / 1.5 / 180.0	-18.8	N/A
700.42	30.0 Qp	1.5 / 20.8 / 26.1	26.2	H / 1.5 / 270.0	-19.8	N/A
707.80	30.3 Qp	1.5 / 20.8 / 25.8	26.8	H / 1.5 / 270.0	-19.2	N/A
The following were maximized between 200 and 1000 MHz, horizontal						
540.68	38.9 Qp	1.3 / 18.6 / 22.0	36.8	H / 3.3 / 338.0	-9.2	N/A
737.28	38.1 Qp	1.5 / 21.1 / 24.5	36.2	H / 1.3 / 356.0	-9.8	N/A
776.59	38.2 Qp	1.6 / 21.8 / 22.7	38.9	H / 1.1 / 350.0	-7.1	N/A
31.95	30.8 Pk	0.2 / 13.0 / 22.4	21.6	V / 1.0 / 0.0	-18.4	N/A
34.41	31.8 Qp	0.2 / 12.7 / 22.4	22.2	V / 1.0 / 0.0	-17.8	N/A
36.88	34.4 Qp	0.2 / 12.4 / 22.4	24.6	V / 1.0 / 0.0	-15.4	N/A
39.34	35.7 Qp	0.2 / 12.1 / 22.4	25.6	V / 1.0 / 0.0	-14.4	N/A
41.77	38.4 Qp	0.3 / 11.8 / 22.4	28.0	V / 1.0 / 0.0	-12.0	N/A
46.70	42.7 Qp	0.3 / 11.1 / 22.3	31.7	V / 1.0 / 0.0	-8.3	N/A
49.16	42.1 Qp	0.3 / 10.7 / 22.3	30.8	V / 1.0 / 0.0	-9.2	N/A
51.62	47.5 Qp	0.3 / 10.4 / 22.2	35.9	V / 1.0 / 0.0	-4.1	N/A
54.08	48.9 Qp	0.3 / 10.1 / 22.1	37.2	V / 1.0 / 0.0	-2.8	N/A
56.53	44.3 Qp	0.3 / 9.8 / 22.0	32.4	V / 1.0 / 0.0	-7.6	N/A
58.99	42.2 Qp	0.4 / 9.4 / 21.9	30.1	V / 1.0 / 0.0	-9.9	N/A
61.45	50.9 Qp	0.4 / 9.2 / 21.9	38.5	V / 1.0 / 0.0	-1.5	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 19 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
63.91	44.7 Qp	0.4 / 9.0 / 21.9	32.2	V / 1.0 / 0.0	-7.8	N/A
66.38	37.8 Qp	0.4 / 8.8 / 21.9	25.2	V / 1.0 / 0.0	-14.8	N/A
68.83	31.7 Qp	0.4 / 8.7 / 21.9	19.0	V / 1.0 / 0.0	-21.0	N/A
71.27	37.3 Qp	0.4 / 8.7 / 21.9	24.6	V / 1.0 / 0.0	-15.4	N/A
73.72	39.1 Qp	0.5 / 8.7 / 21.9	26.4	V / 1.0 / 0.0	-13.6	N/A
76.19	44.5 Qp	0.5 / 8.5 / 21.9	31.5	V / 1.0 / 0.0	-8.5	N/A
78.64	38.5 Qp	0.5 / 8.2 / 22.0	25.2	V / 1.0 / 0.0	-14.8	N/A
81.11	33.4 Qp	0.5 / 7.9 / 22.0	19.7	V / 1.0 / 0.0	-20.3	N/A
83.56	32.2 Qp	0.5 / 7.8 / 22.2	18.4	V / 1.0 / 0.0	-21.6	N/A
86.03	32.3 Qp	0.5 / 7.7 / 22.3	18.3	V / 1.0 / 0.0	-21.7	N/A
90.94	37.1 Pk	0.6 / 8.0 / 22.5	23.2	V / 1.0 / 0.0	-20.3	N/A
103.24	30.6 Pk	0.6 / 9.2 / 22.5	17.9	V / 1.0 / 0.0	-25.6	N/A
108.16	32.1 Qp	0.6 / 9.8 / 22.5	20.1	V / 1.0 / 0.0	-23.4	N/A
110.59	35.2 Qp	0.6 / 10.2 / 22.5	23.6	V / 1.0 / 0.0	-19.9	N/A
113.06	31.4 Qp	0.6 / 10.5 / 22.5	20.1	V / 1.0 / 0.0	-23.4	N/A
115.52	32.6 Qp	0.6 / 10.8 / 22.4	21.6	V / 1.0 / 0.0	-21.9	N/A
117.97	31.4 Qp	0.6 / 11.0 / 22.4	20.6	V / 1.0 / 0.0	-22.9	N/A
120.44	35.6 Qp	0.6 / 11.2 / 22.4	25.0	V / 1.0 / 0.0	-18.5	N/A
122.89	33.5 Qp	0.6 / 11.5 / 22.4	23.2	V / 1.0 / 0.0	-20.3	N/A
125.36	33.0 Qp	0.6 / 11.7 / 22.4	22.9	V / 1.0 / 0.0	-20.6	N/A
127.81	31.4 Qp	0.6 / 11.9 / 22.4	21.5	V / 1.0 / 0.0	-22.0	N/A
130.25	33.5 Qp	0.6 / 12.0 / 22.4	23.7	V / 1.0 / 0.0	-19.8	N/A
132.72	30.9 Qp	0.6 / 12.1 / 22.4	21.3	V / 1.0 / 0.0	-22.2	N/A
135.18	31.4 Qp	0.7 / 12.1 / 22.4	21.8	V / 1.0 / 0.0	-21.7	N/A
137.63	31.6 Qp	0.7 / 12.2 / 22.4	22.0	V / 1.0 / 0.0	-21.5	N/A
140.09	34.6 Qp	0.7 / 12.2 / 22.4	25.2	V / 1.0 / 0.0	-18.3	N/A
142.56	32.0 Qp	0.7 / 12.2 / 22.4	22.6	V / 1.0 / 0.0	-20.9	N/A
145.01	31.4 Qp	0.7 / 12.2 / 22.3	21.9	V / 1.0 / 0.0	-21.6	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC Part 15 Test Date: 25-Mar-2002
 EUT Model #: AMS-SM01 EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 20 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
147.47	31.1 Qp	0.7 / 12.3 / 22.3	21.7	V / 1.0 / 0.0	-21.8	N/A
149.94	34.3 Qp	0.7 / 12.4 / 22.3	25.0	V / 1.0 / 0.0	-18.5	N/A
152.39	36.2 Qp	0.7 / 12.4 / 22.3	27.0	V / 1.0 / 0.0	-16.5	N/A
159.77	31.7 Qp	0.7 / 12.5 / 22.3	22.6	V / 1.0 / 0.0	-20.9	N/A
169.59	29.2 Qp	0.7 / 12.6 / 22.3	20.3	V / 1.0 / 0.0	-23.2	N/A
176.96	31.2 Qp	0.7 / 12.8 / 22.2	22.5	V / 1.0 / 0.0	-21.0	N/A
180.03	36.5 Qp	0.7 / 13.0 / 22.2	28.0	V / 1.0 / 0.0	-15.5	N/A
40.02	39.6 Qp	0.3 / 12.0 / 22.4	29.4	V / 1.0 / 0.0	-10.6	N/A
Maximized the following						
61.45	51.9 Qp	0.4 / 9.2 / 21.9	39.5	V / 1.0 / 113.0	-0.5	N/A
Cables maximized						
61.45	53.6 Qp	0.4 / 9.2 / 21.9	41.2	V / 1.0 / 118.0	1.2 *	N/A
54.08	51.8 Qp	0.3 / 10.1 / 22.1	40.1	V / 1.0 / 150.0	0.1 *	N/A
61.45	52.3 Qp	0.4 / 9.2 / 21.9	40.0	V / 1.0 / 150.0	0.0 *	N/A
56.53	53.6 Qp	0.3 / 9.8 / 22.0	41.7	V / 1.0 / 0.0	1.7 *	N/A
61.45	53.1 Qp	0.4 / 9.2 / 21.9	40.7	V / 1.0 / 0.0	0.7 *	N/A
31.95	33.6 Pk	0.2 / 13.0 / 22.4	24.4	V / 1.0 / 90.0	-15.6	N/A
39.34	37.0 Qp	0.2 / 12.1 / 22.4	26.9	V / 1.0 / 90.0	-13.1	N/A
41.77	39.0 Qp	0.3 / 11.8 / 22.4	28.6	V / 1.0 / 90.0	-11.4	N/A
46.70	42.4 Qp	0.3 / 11.1 / 22.3	31.4	V / 1.0 / 90.0	-8.6	N/A
49.16	42.1 Qp	0.3 / 10.7 / 22.3	30.9	V / 1.0 / 90.0	-9.1	N/A
56.53	52.6 Qp	0.3 / 9.8 / 22.0	40.7	V / 1.0 / 90.0	0.7 *	N/A
58.99	42.0 Qp	0.4 / 9.4 / 21.9	29.8	V / 1.0 / 90.0	-10.2	N/A
58.99	43.2 Qp	0.4 / 9.4 / 21.9	31.1	V / 1.0 / 90.0	-8.9	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 21 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
63.91	47.3 Qp	0.4 / 9.0 / 21.9	34.8	V / 1.0 / 90.0	-5.2	N/A
66.38	44.4 Qp	0.4 / 8.8 / 21.9	31.8	V / 1.0 / 90.0	-8.2	N/A
68.83	43.8 Qp	0.4 / 8.7 / 21.9	31.1	V / 1.0 / 90.0	-8.9	N/A
71.27	45.1 Qp	0.4 / 8.7 / 21.9	32.4	V / 1.0 / 90.0	-7.6	N/A
73.72	43.0 Qp	0.5 / 8.7 / 21.9	30.2	V / 1.0 / 90.0	-9.8	N/A
76.19	45.5 Qp	0.5 / 8.5 / 21.9	32.5	V / 1.0 / 90.0	-7.5	N/A
78.64	42.9 Qp	0.5 / 8.2 / 22.0	29.6	V / 1.0 / 90.0	-10.4	N/A
81.11	38.7 Qp	0.5 / 7.9 / 22.0	25.1	V / 1.0 / 90.0	-14.9	N/A
83.56	39.8 Qp	0.5 / 7.8 / 22.2	25.9	V / 1.0 / 90.0	-14.1	N/A
86.03	39.5 Qp	0.5 / 7.7 / 22.3	25.5	V / 1.0 / 90.0	-14.5	N/A
103.24	37.2 Pk	0.6 / 9.2 / 22.5	24.5	V / 1.0 / 90.0	-19.0	N/A
108.16	34.4 Qp	0.6 / 9.8 / 22.5	22.4	V / 1.0 / 90.0	-21.1	N/A
117.97	32.8 Qp	0.6 / 11.0 / 22.4	22.0	V / 1.0 / 90.0	-21.5	N/A
40.02	39.9 Qp	0.3 / 12.0 / 22.4	29.7	V / 1.0 / 180.0	-10.3	N/A
41.77	38.8 Qp	0.3 / 11.8 / 22.4	28.4	V / 1.0 / 180.0	-11.6	N/A
46.70	43.1 Qp	0.3 / 11.1 / 22.3	32.2	V / 1.0 / 180.0	-7.8	N/A
49.16	42.9 Qp	0.3 / 10.7 / 22.3	31.6	V / 1.0 / 180.0	-8.4	N/A
51.62	47.1 Qp	0.3 / 10.4 / 22.2	35.5	V / 1.0 / 180.0	-4.5	N/A
56.53	52.9 Qp	0.3 / 9.8 / 22.0	41.0	V / 1.0 / 180.0	1.0 *	N/A
58.99	44.1 Qp	0.4 / 9.4 / 21.9	31.9	V / 1.0 / 180.0	-8.1	N/A
63.91	47.8 Qp	0.4 / 9.0 / 21.9	35.3	V / 1.0 / 180.0	-4.7	N/A
103.24	39.4 Qp	0.6 / 9.2 / 22.5	26.7	V / 1.0 / 180.0	-16.8	N/A
108.16	34.2 Qp	0.6 / 9.8 / 22.5	22.2	V / 1.0 / 180.0	-21.3	N/A
117.97	33.6 Qp	0.6 / 11.0 / 22.4	22.8	V / 1.0 / 180.0	-20.7	N/A
39.34	37.0 Qp	0.2 / 12.1 / 22.4	26.9	V / 1.0 / 270.0	-13.1	N/A
41.77	38.8 Qp	0.3 / 11.8 / 22.4	28.4	V / 1.0 / 270.0	-11.6	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 22 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
46.70	43.1 Qp	0.3 / 11.1 / 22.3	32.1	V / 1.0 / 270.0	-7.9	N/A
51.62	47.2 Qp	0.3 / 10.4 / 22.2	35.7	V / 1.0 / 270.0	-4.3	N/A
56.53	53.2 Qp	0.3 / 9.8 / 22.0	41.3	V / 1.0 / 270.0	1.3 *	N/A
61.45	52.6 Qp	0.4 / 9.2 / 21.9	40.3	V / 1.0 / 270.0	0.3 *	N/A
63.91	47.6 Qp	0.4 / 9.0 / 21.9	35.1	V / 1.0 / 270.0	-4.9	N/A
117.97	33.5 Qp	0.6 / 11.0 / 22.4	22.7	V / 1.0 / 270.0	-20.8	N/A
56.53	53.6 Qp	0.3 / 9.8 / 22.0	41.6	V / 1.0 / 270.0	1.6 *	N/A
66.38	44.1 Qp	0.4 / 8.8 / 21.9	31.5	V / 1.0 / 270.0	-8.5	N/A
56.54	39.2 Qp	0.3 / 9.8 / 22.0	27.3	H / 2.0 / 0.0	-12.7	N/A
61.46	39.1 Qp	0.4 / 9.2 / 21.9	26.7	H / 2.0 / 0.0	-13.3	N/A
56.53	38.6 Qp	0.3 / 9.8 / 22.0	26.6	H / 2.0 / 90.0	-13.4	N/A
61.45	36.5 Qp	0.4 / 9.2 / 21.9	24.2	H / 2.0 / 90.0	-15.8	N/A
76.19	33.0 Qp	0.5 / 8.5 / 21.9	20.1	H / 2.0 / 90.0	-19.9	N/A
81.11	34.0 Qp	0.5 / 7.9 / 22.0	20.4	H / 2.0 / 90.0	-19.6	N/A
56.53	36.1 Qp	0.3 / 9.8 / 22.0	24.2	H / 2.0 / 180.0	-15.8	N/A
61.45	36.3 Qp	0.4 / 9.2 / 21.9	24.0	H / 2.0 / 180.0	-16.0	N/A
110.59	32.8 Qp	0.6 / 10.2 / 22.5	21.1	H / 2.0 / 180.0	-22.4	N/A
46.70	31.4 Qp	0.3 / 11.1 / 22.3	20.5	H / 2.0 / 270.0	-19.5	N/A
49.16	30.6 Qp	0.3 / 10.7 / 22.3	19.3	H / 2.0 / 270.0	-20.7	N/A
51.62	34.2 Qp	0.3 / 10.4 / 22.2	22.7	H / 2.0 / 270.0	-17.3	N/A
54.08	35.0 Qp	0.3 / 10.1 / 22.1	23.3	H / 2.0 / 270.0	-16.7	N/A
56.53	38.5 Qp	0.3 / 9.8 / 22.0	26.5	H / 2.0 / 270.0	-13.5	N/A
61.45	40.5 Qp	0.4 / 9.2 / 21.9	28.1	H / 2.0 / 270.0	-11.9	N/A
63.91	33.5 Qp	0.4 / 9.0 / 21.9	21.0	H / 2.0 / 270.0	-19.0	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 23 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
The following were maximized between 30 and 200 MHz, horizontal						
56.53	45.6 Qp	0.3 / 9.8 / 22.0	33.6	H / 3.3 / 87.0	-6.4	N/A
61.45	45.1 Qp	0.4 / 9.2 / 21.9	32.7	H / 3.7 / 0.0	-7.3	N/A
54.08	52.0 Qp	0.3 / 10.1 / 22.1	40.3	V / 1.0 / 110.0	0.3 *	N/A
56.53	54.4 Qp	0.3 / 9.8 / 22.0	42.5	V / 1.0 / 126.0	2.5 *	N/A
61.45	52.1 Qp	0.4 / 9.2 / 21.9	39.8	V / 1.0 / 130.0	-0.2	N/A
54.08	46.5 Qp	0.3 / 10.1 / 22.1	34.8	V / 1.0 / 122.0	-5.2	N/A
56.53	48.7 Qp	0.3 / 9.8 / 22.0	36.8	V / 1.0 / 166.0	-3.2	N/A
61.45	51.7 Qp	0.4 / 9.2 / 21.9	39.4	V / 1.0 / 118.0	-0.6	N/A
Cables maximized						
61.45	54.6 Qp	0.4 / 9.2 / 21.9	42.2	V / 1.0 / 118.0	2.2 *	N/A
56.53	52.1 Qp	0.3 / 9.8 / 22.0	40.2	V / 1.0 / 140.0	0.2 *	N/A
Added copper image plane to bottom of board						
Maximized the following						
56.53	49.1 Qp	0.3 / 9.8 / 22.0	37.2	V / 1.0 / 96.0	-2.8	N/A
Cables maximized						
56.53	51.2 Qp	0.3 / 9.8 / 22.0	39.3	V / 1.0 / 96.0	-0.7	N/A
54.08	49.1 Qp	0.3 / 10.1 / 22.1	37.4	V / 1.0 / 124.0	-2.6	N/A
61.45	47.6 Qp	0.4 / 9.2 / 21.9	35.3	V / 1.0 / 47.0	-4.7	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 24 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
Cables were Maximized						
76.19	47.2 Qp	0.5 / 8.5 / 21.9	34.3	V / 1.0 / 0.0	-5.7	N/A
Rechecked all emissions within 10 dB of the limit						
No higher emissions found						

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 25 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dBm) (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) FCC B (< 1GHz)	DELTA2 (dB) N/A
***** Measurement Summary *****						
56.53	51.2 Qp	0.3 / 9.8 / 22.0	39.3	V / 1.0 / 96.0	-0.7	N/A
54.08	49.1 Qp	0.3 / 10.1 / 22.1	37.4	V / 1.0 / 124.0	-2.6	N/A
51.62	47.5 Qp	0.3 / 10.4 / 22.2	35.9	V / 1.0 / 0.0	-4.1	N/A
61.45	47.6 Qp	0.4 / 9.2 / 21.9	35.3	V / 1.0 / 47.0	-4.7	N/A
63.91	47.8 Qp	0.4 / 9.0 / 21.9	35.3	V / 1.0 / 180.0	-4.7	N/A
76.19	47.2 Qp	0.5 / 8.5 / 21.9	34.3	V / 1.0 / 0.0	-5.7	N/A
776.59	38.2 Qp	1.6 / 21.8 / 22.7	38.9	H / 1.1 / 350.0	-7.1	N/A
71.27	45.1 Qp	0.4 / 8.7 / 21.9	32.4	V / 1.0 / 90.0	-7.6	N/A
46.70	43.1 Qp	0.3 / 11.1 / 22.3	32.2	V / 1.0 / 180.0	-7.8	N/A
58.99	44.1 Qp	0.4 / 9.4 / 21.9	31.9	V / 1.0 / 180.0	-8.1	N/A
66.38	44.4 Qp	0.4 / 8.8 / 21.9	31.8	V / 1.0 / 90.0	-8.2	N/A
49.16	42.9 Qp	0.3 / 10.7 / 22.3	31.6	V / 1.0 / 180.0	-8.4	N/A
68.83	43.8 Qp	0.4 / 8.7 / 21.9	31.1	V / 1.0 / 90.0	-8.9	N/A
521.00	39.5 Qp	1.3 / 17.9 / 21.9	36.8	V / 1.0 / 325.0	-9.2	N/A
540.68	38.9 Qp	1.3 / 18.6 / 22.0	36.8	H / 3.3 / 338.0	-9.2	N/A
73.72	43.0 Qp	0.5 / 8.7 / 21.9	30.2	V / 1.0 / 90.0	-9.8	N/A
737.28	38.1 Qp	1.5 / 21.1 / 24.5	36.2	H / 1.3 / 356.0	-9.8	N/A
501.35	38.0 Qp	1.3 / 18.3 / 21.8	35.8	V / 1.0 / 330.0	-10.2	N/A
595.95	36.6 Qp	1.4 / 20.0 / 22.3	35.8	V / 1.0 / 90.0	-10.2	N/A
788.99	34.4 Qp	1.6 / 22.0 / 22.1	35.8	V / 1.0 / 90.0	-10.2	N/A
805.79	33.6 Qp	1.6 / 22.2 / 21.6	35.8	V / 1.0 / 90.0	-10.2	N/A
40.02	39.9 Qp	0.3 / 12.0 / 22.4	29.7	V / 1.0 / 180.0	-10.3	N/A
78.64	42.9 Qp	0.5 / 8.2 / 22.0	29.6	V / 1.0 / 90.0	-10.4	N/A
205.65	42.4 Qp	0.8 / 12.1 / 22.1	33.1	V / 1.0 / 0.0	-10.4	N/A
604.35	36.5 Qp	1.4 / 20.2 / 22.5	35.5	V / 1.0 / 0.0	-10.5	N/A
654.70	37.2 Qp	1.5 / 21.0 / 24.4	35.3	V / 1.0 / 90.0	-10.7	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 26 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
927.50	29.0 Qp	1.8 / 25.1 / 20.7	35.2	V / 1.0 / 0.0	-10.8	N/A
545.59	36.9 Qp	1.3 / 18.9 / 22.0	35.1	V / 1.0 / 90.0	-10.9	N/A
511.19	37.3 Qp	1.3 / 18.1 / 21.8	34.9	V / 1.0 / 324.0	-11.1	N/A
579.16	35.6 Qp	1.4 / 20.1 / 22.2	34.9	V / 1.0 / 90.0	-11.1	N/A
239.22	41.8 Qp	0.8 / 14.3 / 22.1	34.8	V / 1.0 / 0.0	-11.2	N/A
41.77	39.0 Qp	0.3 / 11.8 / 22.4	28.6	V / 1.0 / 90.0	-11.4	N/A
637.92	35.9 Qp	1.4 / 21.0 / 23.8	34.5	V / 1.0 / 90.0	-11.5	N/A
243.43	41.2 Qp	0.8 / 14.3 / 22.1	34.3	V / 1.0 / 0.0	-11.7	N/A
612.74	35.2 Qp	1.4 / 20.5 / 22.8	34.3	V / 1.0 / 0.0	-11.7	N/A
235.03	41.2 Qp	0.8 / 14.3 / 22.1	34.2	V / 1.0 / 0.0	-11.8	N/A
528.80	36.8 Qp	1.3 / 18.0 / 21.9	34.2	V / 1.0 / 90.0	-11.8	N/A
730.24	36.4 Qp	1.5 / 21.0 / 24.8	34.1	V / 1.0 / 90.0	-11.9	N/A
583.36	34.7 Qp	1.4 / 20.1 / 22.2	33.9	V / 1.0 / 90.0	-12.1	N/A
629.52	35.1 Qp	1.4 / 20.9 / 23.5	33.9	V / 1.0 / 0.0	-12.1	N/A
786.43	32.5 Qp	1.6 / 21.9 / 22.2	33.9	H / 1.5 / 0.0	-12.1	N/A
247.61	40.7 Qp	0.8 / 14.4 / 22.1	33.8	V / 1.0 / 0.0	-12.2	N/A
756.95	34.4 Qp	1.6 / 21.4 / 23.6	33.8	H / 1.5 / 0.0	-12.2	N/A
230.82	40.8 Qp	0.8 / 14.2 / 22.1	33.7	V / 1.0 / 0.0	-12.3	N/A
747.11	34.9 Qp	1.5 / 21.3 / 24.0	33.7	H / 1.5 / 0.0	-12.3	N/A
919.10	27.8 Qp	1.8 / 24.9 / 20.8	33.7	V / 1.0 / 0.0	-12.3	N/A
591.75	34.5 Qp	1.4 / 20.0 / 22.3	33.6	V / 1.0 / 90.0	-12.4	N/A
721.84	36.3 Qp	1.5 / 20.9 / 25.2	33.6	V / 1.0 / 90.0	-12.4	N/A
990.44	34.6 Qp	1.9 / 25.5 / 20.5	41.5	V / 1.0 / 0.0	-12.5	N/A
944.30	26.8 Qp	1.8 / 25.5 / 20.7	33.4	V / 1.0 / 0.0	-12.6	N/A
520.42	36.0 Qp	1.3 / 17.9 / 21.9	33.3	V / 1.0 / 90.0	-12.7	N/A
663.10	35.6 Qp	1.5 / 20.9 / 24.7	33.3	V / 1.0 / 90.0	-12.7	N/A
560.34	34.5 Qp	1.4 / 19.5 / 22.1	33.2	H / 1.5 / 180.0	-12.8	N/A
621.14	34.2 Qp	1.4 / 20.8 / 23.1	33.2	V / 1.0 / 0.0	-12.8	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC Part 15 Test Date: 25-Mar-2002
 EUT Model #: AMS-SM01 EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 27 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
705.07	36.7 Qp	1.5 / 20.8 / 25.9	33.1	V / 1.0 / 90.0	-12.9	N/A
766.77	33.0 Qp	1.6 / 21.6 / 23.1	33.1	H / 1.5 / 0.0	-12.9	N/A
39.34	37.0 Qp	0.2 / 12.1 / 22.4	26.9	V / 1.0 / 270.0	-13.1	N/A
512.02	35.3 Qp	1.3 / 18.1 / 21.8	32.9	V / 1.0 / 0.0	-13.1	N/A
533.00	35.2 Qp	1.3 / 18.2 / 21.9	32.8	V / 1.0 / 0.0	-13.2	N/A
600.15	33.7 Qp	1.4 / 20.0 / 22.3	32.8	V / 1.0 / 90.0	-13.2	N/A
524.61	35.5 Qp	1.3 / 17.8 / 21.9	32.7	V / 1.0 / 0.0	-13.3	N/A
541.39	34.7 Qp	1.3 / 18.7 / 22.0	32.7	V / 1.0 / 90.0	-13.3	N/A
982.06	33.6 Qp	1.9 / 25.7 / 20.5	40.7	V / 1.0 / 0.0	-13.3	N/A
251.81	39.5 Qp	0.8 / 14.4 / 22.1	32.6	V / 1.0 / 0.0	-13.4	N/A
570.78	33.4 Qp	1.4 / 19.9 / 22.2	32.5	V / 1.0 / 90.0	-13.5	N/A
503.62	34.6 Qp	1.3 / 18.2 / 21.8	32.4	V / 1.0 / 0.0	-13.6	N/A
651.26	34.2 Qp	1.5 / 21.0 / 24.3	32.4	H / 1.5 / 180.0	-13.6	N/A
713.46	35.4 Qp	1.5 / 20.9 / 25.5	32.2	V / 1.0 / 90.0	-13.8	N/A
222.44	39.5 Qp	0.8 / 13.9 / 22.1	32.1	V / 1.0 / 0.0	-13.9	N/A
727.46	34.5 Qp	1.5 / 20.9 / 24.9	32.1	H / 1.5 / 0.0	-13.9	N/A
910.70	26.5 Qp	1.8 / 24.6 / 20.8	32.1	V / 1.0 / 90.0	-13.9	N/A
516.22	34.6 Qp	1.3 / 18.0 / 21.8	32.0	V / 1.0 / 0.0	-14.0	N/A
574.96	32.7 Qp	1.4 / 20.1 / 22.2	32.0	V / 1.0 / 90.0	-14.0	N/A
83.56	39.8 Qp	0.5 / 7.8 / 22.2	25.9	V / 1.0 / 90.0	-14.1	N/A
209.84	38.2 Qp	0.8 / 12.6 / 22.1	29.4	V / 1.0 / 0.0	-14.1	N/A
218.24	39.8 Qp	0.8 / 13.5 / 22.1	31.9	V / 1.0 / 0.0	-14.1	N/A
530.84	34.4 Qp	1.3 / 18.1 / 21.9	31.9	V / 1.0 / 180.0	-14.1	N/A
608.54	32.8 Qp	1.4 / 20.3 / 22.7	31.8	V / 1.0 / 90.0	-14.2	N/A
570.17	32.5 Qp	1.4 / 19.9 / 22.2	31.7	H / 1.5 / 180.0	-14.3	N/A
973.66	32.5 Qp	1.9 / 25.9 / 20.6	39.6	V / 1.0 / 0.0	-14.4	N/A
86.03	39.5 Qp	0.5 / 7.7 / 22.3	25.5	V / 1.0 / 90.0	-14.5	N/A
444.85	35.3 Qp	1.2 / 16.9 / 21.8	31.5	V / 1.0 / 90.0	-14.5	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 28 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
696.67	35.2 Qp	1.5 / 20.8 / 26.0	31.5	V / 1.0 / 90.0	-14.5	N/A
495.24	33.6 Qp	1.3 / 18.2 / 21.8	31.4	V / 1.0 / 0.0	-14.6	N/A
717.62	34.4 Qp	1.5 / 20.9 / 25.3	31.4	H / 1.5 / 0.0	-14.6	N/A
81.11	38.7 Qp	0.5 / 7.9 / 22.0	25.1	V / 1.0 / 90.0	-14.9	N/A
587.37	31.9 Qp	1.4 / 20.1 / 22.3	31.1	H / 1.5 / 180.0	-14.9	N/A
589.83	31.9 Qp	1.4 / 20.0 / 22.3	31.1	H / 1.5 / 180.0	-14.9	N/A
671.49	33.6 Qp	1.5 / 20.9 / 25.1	31.0	V / 1.0 / 90.0	-15.0	N/A
507.82	33.2 Qp	1.3 / 18.1 / 21.8	30.9	V / 1.0 / 0.0	-15.1	N/A
549.79	32.4 Qp	1.3 / 19.1 / 22.0	30.8	V / 1.0 / 90.0	-15.2	N/A
986.24	31.8 Qp	1.9 / 25.6 / 20.5	38.8	V / 1.0 / 0.0	-15.2	N/A
436.48	34.5 Qp	1.2 / 16.8 / 21.8	30.7	V / 1.0 / 0.0	-15.3	N/A
566.58	31.8 Qp	1.4 / 19.8 / 22.1	30.7	V / 1.0 / 90.0	-15.3	N/A
843.54	27.6 Qp	1.7 / 22.7 / 21.3	30.7	V / 1.0 / 90.0	-15.3	N/A
36.88	34.4 Qp	0.2 / 12.4 / 22.4	24.6	V / 1.0 / 0.0	-15.4	N/A
481.70	33.2 Qp	1.3 / 17.9 / 21.8	30.6	V / 1.0 / 270.0	-15.4	N/A
491.53	33.0 Qp	1.3 / 18.1 / 21.8	30.6	V / 1.0 / 270.0	-15.4	N/A
629.13	31.7 Qp	1.4 / 20.9 / 23.4	30.6	H / 1.5 / 0.0	-15.4	N/A
679.89	33.6 Qp	1.5 / 20.9 / 25.4	30.6	V / 1.0 / 90.0	-15.4	N/A
180.03	36.5 Qp	0.7 / 13.0 / 22.2	28.0	V / 1.0 / 0.0	-15.5	N/A
998.84	31.8 Qp	1.9 / 25.3 / 20.5	38.5	V / 1.0 / 0.0	-15.5	N/A
31.95	33.6 Pk	0.2 / 13.0 / 22.4	24.4	V / 1.0 / 90.0	-15.6	N/A
226.64	37.6 Qp	0.8 / 14.2 / 22.1	30.4	V / 1.0 / 0.0	-15.6	N/A
394.51	34.0 Qp	1.1 / 17.2 / 21.9	30.4	V / 1.0 / 90.0	-15.6	N/A
474.31	33.2 Qp	1.2 / 17.7 / 21.8	30.4	V / 1.0 / 180.0	-15.6	N/A
486.84	32.9 Qp	1.3 / 18.0 / 21.8	30.4	V / 1.0 / 0.0	-15.6	N/A
471.87	33.2 Qp	1.2 / 17.6 / 21.8	30.3	H / 2.0 / 0.0	-15.7	N/A
688.27	33.6 Qp	1.5 / 20.8 / 25.7	30.3	V / 1.0 / 90.0	-15.7	N/A
200.03	37.6 Qp	0.8 / 11.5 / 22.1	27.7	V / 1.0 / 90.0	-15.8	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 29 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
661.10	32.5 Qp	1.5 / 21.0 / 24.7	30.2	H / 1.5 / 180.0	-15.8	N/A
776.41	29.4 Qp	1.6 / 21.8 / 22.7	30.1	V / 1.0 / 90.0	-15.9	N/A
796.26	28.2 Qp	1.6 / 22.1 / 21.8	30.1	H / 1.5 / 0.0	-15.9	N/A
390.31	34.1 Qp	1.1 / 16.7 / 21.9	30.0	V / 1.0 / 90.0	-16.0	N/A
478.44	32.7 Qp	1.3 / 17.8 / 21.8	30.0	V / 1.0 / 0.0	-16.0	N/A
965.26	31.0 Qp	1.8 / 25.8 / 20.6	38.0	V / 1.0 / 0.0	-16.0	N/A
994.64	31.2 Qp	1.9 / 25.4 / 20.5	38.0	V / 1.0 / 0.0	-16.0	N/A
453.27	33.5 Qp	1.2 / 17.0 / 21.8	29.9	V / 1.0 / 90.0	-16.1	N/A
386.12	34.5 Qp	1.1 / 16.2 / 21.9	29.8	V / 1.0 / 90.0	-16.2	N/A
553.99	31.2 Qp	1.4 / 19.3 / 22.1	29.8	V / 1.0 / 90.0	-16.2	N/A
670.93	32.5 Qp	1.5 / 20.9 / 25.0	29.8	H / 1.5 / 180.0	-16.2	N/A
688.14	33.0 Qp	1.5 / 20.8 / 25.7	29.7	H / 1.5 / 180.0	-16.3	N/A
977.86	30.6 Qp	1.9 / 25.8 / 20.5	37.7	V / 1.0 / 0.0	-16.3	N/A
256.01	36.5 Qp	0.8 / 14.3 / 22.1	29.6	V / 1.0 / 90.0	-16.4	N/A
648.82	31.4 Qp	1.4 / 21.0 / 24.2	29.6	V / 1.0 / 180.0	-16.4	N/A
152.39	36.2 Qp	0.7 / 12.4 / 22.3	27.0	V / 1.0 / 0.0	-16.5	N/A
499.42	31.7 Qp	1.3 / 18.3 / 21.8	29.5	V / 1.0 / 0.0	-16.5	N/A
597.21	30.4 Qp	1.4 / 20.0 / 22.3	29.5	H / 1.5 / 90.0	-16.5	N/A
625.34	30.4 Qp	1.4 / 20.9 / 23.3	29.5	V / 1.0 / 90.0	-16.5	N/A
428.08	33.4 Qp	1.2 / 16.7 / 21.8	29.4	V / 1.0 / 0.0	-16.6	N/A
432.52	33.3 Qp	1.2 / 16.8 / 21.8	29.4	V / 1.0 / 180.0	-16.6	N/A
462.02	32.5 Qp	1.2 / 17.3 / 21.8	29.3	V / 1.0 / 180.0	-16.7	N/A
557.88	30.7 Qp	1.4 / 19.4 / 22.1	29.3	H / 1.5 / 180.0	-16.7	N/A
567.72	30.3 Qp	1.4 / 19.8 / 22.1	29.3	H / 1.5 / 90.0	-16.7	N/A
641.43	30.8 Qp	1.4 / 21.0 / 23.9	29.3	H / 1.5 / 180.0	-16.7	N/A
826.77	26.6 Qp	1.6 / 22.5 / 21.4	29.3	V / 1.0 / 90.0	-16.7	N/A
103.24	39.4 Qp	0.6 / 9.2 / 22.5	26.7	V / 1.0 / 180.0	-16.8	N/A
452.21	32.8 Qp	1.2 / 17.0 / 21.8	29.2	V / 1.0 / 180.0	-16.8	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 30 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
599.67	30.0 Qp	1.4 / 20.0 / 22.3	29.1	H / 1.5 / 180.0	-16.9	N/A
616.94	30.1 Qp	1.4 / 20.6 / 23.0	29.1	V / 1.0 / 90.0	-16.9	N/A
493.99	31.3 Qp	1.3 / 18.2 / 21.8	29.0	V / 1.0 / 270.0	-17.0	N/A
690.58	32.5 Qp	1.5 / 20.8 / 25.8	29.0	H / 1.5 / 180.0	-17.0	N/A
818.39	26.4 Qp	1.6 / 22.4 / 21.5	29.0	V / 1.0 / 90.0	-17.0	N/A
898.12	23.9 Qp	1.7 / 24.2 / 20.9	29.0	V / 1.0 / 0.0	-17.0	N/A
348.34	35.1 Qp	1.0 / 14.8 / 22.0	28.9	V / 1.0 / 90.0	-17.1	N/A
633.72	30.2 Qp	1.4 / 20.9 / 23.6	28.9	V / 1.0 / 90.0	-17.1	N/A
650.50	30.7 Qp	1.5 / 21.0 / 24.3	28.9	V / 1.0 / 90.0	-17.1	N/A
658.63	31.0 Qp	1.5 / 21.0 / 24.6	28.9	H / 1.5 / 180.0	-17.1	N/A
697.96	32.7 Qp	1.5 / 20.8 / 26.1	28.9	H / 1.5 / 180.0	-17.1	N/A
356.74	34.9 Qp	1.0 / 14.8 / 21.9	28.8	V / 1.0 / 90.0	-17.2	N/A
381.92	34.0 Qp	1.1 / 15.7 / 21.9	28.8	V / 1.0 / 90.0	-17.2	N/A
398.70	31.9 Qp	1.1 / 17.6 / 21.9	28.8	V / 1.0 / 90.0	-17.2	N/A
498.91	30.9 Qp	1.3 / 18.3 / 21.8	28.8	V / 1.0 / 180.0	-17.2	N/A
668.48	31.4 Qp	1.5 / 20.9 / 24.9	28.8	H / 1.5 / 180.0	-17.2	N/A
373.51	34.7 Qp	1.0 / 14.9 / 21.9	28.7	V / 1.0 / 90.0	-17.3	N/A
533.30	31.1 Qp	1.3 / 18.2 / 21.9	28.7	H / 1.5 / 180.0	-17.3	N/A
442.37	32.4 Qp	1.2 / 16.8 / 21.8	28.6	V / 1.0 / 180.0	-17.4	N/A
503.81	30.9 Qp	1.3 / 18.2 / 21.8	28.6	V / 1.0 / 270.0	-17.4	N/A
513.65	31.1 Qp	1.3 / 18.0 / 21.8	28.6	V / 1.0 / 270.0	-17.4	N/A
607.02	29.5 Qp	1.4 / 20.3 / 22.6	28.6	H / 1.5 / 180.0	-17.4	N/A
642.10	30.1 Qp	1.4 / 21.0 / 23.9	28.6	V / 1.0 / 90.0	-17.4	N/A
678.30	31.6 Qp	1.5 / 20.9 / 25.3	28.6	H / 1.5 / 180.0	-17.4	N/A
508.73	30.9 Qp	1.3 / 18.1 / 21.8	28.5	V / 1.0 / 270.0	-17.5	N/A
631.60	29.7 Qp	1.4 / 20.9 / 23.5	28.5	H / 1.5 / 180.0	-17.5	N/A
793.19	26.8 Qp	1.6 / 22.0 / 21.9	28.5	V / 1.0 / 90.0	-17.5	N/A
402.90	31.5 Qp	1.1 / 17.7 / 21.8	28.4	V / 1.0 / 90.0	-17.6	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 31 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
680.76	31.5 Qp	1.5 / 20.9 / 25.4	28.4	H / 1.5 / 180.0	-17.6	N/A
281.19	35.4 Qp	0.9 / 14.2 / 22.1	28.3	V / 1.0 / 0.0	-17.7	N/A
407.09	31.6 Qp	1.1 / 17.5 / 21.8	28.3	V / 1.0 / 90.0	-17.7	N/A
411.29	31.8 Qp	1.1 / 17.3 / 21.8	28.3	V / 1.0 / 90.0	-17.7	N/A
528.38	30.9 Qp	1.3 / 18.0 / 21.9	28.3	H / 1.5 / 180.0	-17.7	N/A
626.67	29.3 Qp	1.4 / 20.9 / 23.3	28.3	H / 1.5 / 180.0	-17.7	N/A
809.99	25.9 Qp	1.6 / 22.3 / 21.5	28.3	V / 1.0 / 90.0	-17.7	N/A
34.41	31.8 Qp	0.2 / 12.7 / 22.4	22.2	V / 1.0 / 0.0	-17.8	N/A
377.71	33.8 Qp	1.1 / 15.2 / 21.9	28.2	V / 1.0 / 90.0	-17.8	N/A
435.00	32.0 Qp	1.2 / 16.8 / 21.8	28.2	V / 1.0 / 180.0	-17.8	N/A
432.28	32.0 Qp	1.2 / 16.8 / 21.8	28.1	V / 1.0 / 0.0	-17.9	N/A
470.04	31.1 Qp	1.2 / 17.5 / 21.8	28.1	V / 1.0 / 0.0	-17.9	N/A
518.57	30.8 Qp	1.3 / 17.9 / 21.9	28.1	H / 1.5 / 180.0	-17.9	N/A
653.73	30.1 Qp	1.5 / 21.0 / 24.4	28.1	H / 1.5 / 180.0	-17.9	N/A
352.54	34.1 Qp	1.0 / 14.8 / 21.9	28.0	V / 1.0 / 90.0	-18.0	N/A
558.18	29.4 Qp	1.4 / 19.4 / 22.1	28.0	V / 1.0 / 90.0	-18.0	N/A
565.25	29.1 Qp	1.4 / 19.7 / 22.1	28.0	H / 1.5 / 90.0	-18.0	N/A
604.57	28.8 Qp	1.4 / 20.2 / 22.5	27.8	H / 1.5 / 90.0	-18.2	N/A
969.46	28.7 Qp	1.9 / 25.8 / 20.6	35.8	V / 1.0 / 0.0	-18.2	N/A
140.09	34.6 Qp	0.7 / 12.2 / 22.4	25.2	V / 1.0 / 0.0	-18.3	N/A
707.80	31.2 Qp	1.5 / 20.8 / 25.8	27.7	H / 1.5 / 0.0	-18.3	N/A
272.80	34.6 Qp	0.9 / 14.1 / 22.1	27.6	V / 1.0 / 90.0	-18.4	N/A
120.44	35.6 Qp	0.6 / 11.2 / 22.4	25.0	V / 1.0 / 0.0	-18.5	N/A
149.94	34.3 Qp	0.7 / 12.4 / 22.3	25.0	V / 1.0 / 0.0	-18.5	N/A
277.00	34.6 Qp	0.9 / 14.1 / 22.1	27.5	V / 1.0 / 0.0	-18.5	N/A
365.12	33.5 Qp	1.0 / 14.9 / 21.9	27.5	V / 1.0 / 0.0	-18.5	N/A
201.46	34.6 Qp	0.8 / 11.7 / 22.1	24.9	V / 1.0 / 0.0	-18.6	N/A
415.49	31.0 Qp	1.1 / 17.1 / 21.8	27.4	V / 1.0 / 90.0	-18.6	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 32 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
658.90	29.4 Qp	1.5 / 21.0 / 24.6	27.3	V / 1.0 / 90.0	-18.7	N/A
801.59	25.2 Qp	1.6 / 22.1 / 21.6	27.3	V / 1.0 / 0.0	-18.7	N/A
469.40	30.2 Qp	1.2 / 17.5 / 21.8	27.2	H / 2.0 / 0.0	-18.8	N/A
491.04	29.6 Qp	1.3 / 18.1 / 21.8	27.2	V / 1.0 / 0.0	-18.8	N/A
592.29	28.1 Qp	1.4 / 20.0 / 22.3	27.2	H / 1.5 / 90.0	-18.8	N/A
643.89	28.8 Qp	1.4 / 21.0 / 24.0	27.2	H / 1.5 / 180.0	-18.8	N/A
806.10	24.9 Qp	1.6 / 22.2 / 21.6	27.2	H / 1.5 / 180.0	-18.8	N/A
360.94	33.1 Qp	1.0 / 14.8 / 21.9	27.1	V / 1.0 / 90.0	-18.9	N/A
516.11	29.7 Qp	1.3 / 18.0 / 21.8	27.1	V / 1.0 / 270.0	-18.9	N/A
710.26	30.4 Qp	1.5 / 20.8 / 25.7	27.1	H / 1.5 / 0.0	-18.9	N/A
369.31	33.0 Qp	1.0 / 14.9 / 21.9	27.0	V / 1.0 / 0.0	-19.0	N/A
422.71	30.9 Qp	1.1 / 16.8 / 21.8	27.0	H / 2.0 / 180.0	-19.0	N/A
961.06	28.0 Qp	1.8 / 25.7 / 20.6	35.0	V / 1.0 / 0.0	-19.0	N/A
449.05	30.6 Qp	1.2 / 16.9 / 21.8	26.9	V / 1.0 / 90.0	-19.1	N/A
268.61	33.8 Qp	0.9 / 14.2 / 22.1	26.7	V / 1.0 / 0.0	-19.3	N/A
293.79	33.5 Qp	0.9 / 14.3 / 22.1	26.7	V / 1.0 / 0.0	-19.3	N/A
489.07	29.1 Qp	1.3 / 18.0 / 21.8	26.7	V / 1.0 / 270.0	-19.3	N/A
302.19	33.4 Qp	0.9 / 14.4 / 22.0	26.6	V / 1.0 / 0.0	-19.4	N/A
479.25	29.3 Qp	1.3 / 17.8 / 21.8	26.6	V / 1.0 / 180.0	-19.4	N/A
700.42	30.3 Qp	1.5 / 20.8 / 26.1	26.5	H / 1.5 / 0.0	-19.5	N/A
285.38	33.4 Qp	0.9 / 14.2 / 22.1	26.4	V / 1.0 / 0.0	-19.6	N/A
425.17	30.4 Qp	1.2 / 16.7 / 21.8	26.4	V / 1.0 / 180.0	-19.6	N/A
440.68	30.2 Qp	1.2 / 16.8 / 21.8	26.4	V / 1.0 / 0.0	-19.6	N/A
260.21	33.3 Qp	0.8 / 14.3 / 22.1	26.3	V / 1.0 / 0.0	-19.7	N/A
306.37	33.0 Qp	0.9 / 14.4 / 22.0	26.3	V / 1.0 / 0.0	-19.7	N/A
482.64	28.9 Qp	1.3 / 17.9 / 21.8	26.3	V / 1.0 / 0.0	-19.7	N/A
484.15	28.9 Qp	1.3 / 17.9 / 21.8	26.3	V / 1.0 / 270.0	-19.7	N/A
506.27	28.6 Qp	1.3 / 18.2 / 21.8	26.3	V / 1.0 / 180.0	-19.7	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 33 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
130.25	33.5 Qp	0.6 / 12.0 / 22.4	23.7	V / 1.0 / 0.0	-19.8	N/A
419.69	29.9 Qp	1.1 / 16.9 / 21.8	26.2	V / 1.0 / 0.0	-19.8	N/A
110.59	35.2 Qp	0.6 / 10.2 / 22.5	23.6	V / 1.0 / 0.0	-19.9	N/A
525.92	28.7 Qp	1.3 / 17.8 / 21.9	26.0	V / 1.0 / 270.0	-20.0	N/A
264.41	33.0 Qp	0.8 / 14.2 / 22.1	25.9	V / 1.0 / 90.0	-20.1	N/A
423.88	29.9 Qp	1.1 / 16.7 / 21.8	25.9	V / 1.0 / 0.0	-20.1	N/A
459.56	29.2 Qp	1.2 / 17.2 / 21.8	25.9	V / 1.0 / 180.0	-20.1	N/A
474.24	28.8 Qp	1.2 / 17.7 / 21.8	25.9	V / 1.0 / 0.0	-20.1	N/A
454.67	29.3 Qp	1.2 / 17.0 / 21.8	25.8	H / 2.0 / 180.0	-20.2	N/A
90.94	37.1 Pk	0.6 / 8.0 / 22.5	23.2	V / 1.0 / 0.0	-20.3	N/A
122.89	33.5 Qp	0.6 / 11.5 / 22.4	23.2	V / 1.0 / 0.0	-20.3	N/A
461.66	29.0 Qp	1.2 / 17.3 / 21.8	25.7	V / 1.0 / 90.0	-20.3	N/A
466.94	28.9 Qp	1.2 / 17.4 / 21.8	25.7	V / 1.0 / 180.0	-20.3	N/A
667.29	28.2 Qp	1.5 / 20.9 / 24.9	25.7	V / 1.0 / 90.0	-20.3	N/A
439.93	29.4 Qp	1.2 / 16.8 / 21.8	25.6	V / 1.0 / 180.0	-20.4	N/A
476.79	28.4 Qp	1.3 / 17.7 / 21.8	25.6	V / 1.0 / 180.0	-20.4	N/A
673.38	28.4 Qp	1.5 / 20.9 / 25.1	25.6	H / 1.5 / 180.0	-20.4	N/A
125.36	33.0 Qp	0.6 / 11.7 / 22.4	22.9	V / 1.0 / 0.0	-20.6	N/A
344.14	31.7 Qp	1.0 / 14.7 / 22.0	25.4	V / 1.0 / 0.0	-20.6	N/A
117.97	33.6 Qp	0.6 / 11.0 / 22.4	22.8	V / 1.0 / 180.0	-20.7	N/A
700.87	29.2 Qp	1.5 / 20.8 / 26.1	25.3	V / 1.0 / 90.0	-20.7	N/A
709.27	28.7 Qp	1.5 / 20.8 / 25.7	25.3	V / 1.0 / 90.0	-20.7	N/A
314.76	31.9 Qp	0.9 / 14.4 / 22.0	25.2	V / 1.0 / 0.0	-20.8	N/A
430.08	29.1 Qp	1.2 / 16.7 / 21.8	25.2	V / 1.0 / 180.0	-20.8	N/A
142.56	32.0 Qp	0.7 / 12.2 / 22.4	22.6	V / 1.0 / 0.0	-20.9	N/A
159.77	31.7 Qp	0.7 / 12.5 / 22.3	22.6	V / 1.0 / 0.0	-20.9	N/A
176.96	31.2 Qp	0.7 / 12.8 / 22.2	22.5	V / 1.0 / 0.0	-21.0	N/A
323.17	31.7 Qp	0.9 / 14.4 / 22.0	25.0	V / 1.0 / 90.0	-21.0	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 34 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
108.16	34.4 Qp	0.6 / 9.8 / 22.5	22.4	V / 1.0 / 90.0	-21.1	N/A
210.16	31.2 Qp	0.8 / 12.6 / 22.1	22.4	V / 1.0 / 270.0	-21.1	N/A
310.56	31.5 Qp	0.9 / 14.4 / 22.0	24.8	V / 1.0 / 0.0	-21.2	N/A
675.69	27.7 Qp	1.5 / 20.9 / 25.2	24.8	V / 1.0 / 90.0	-21.2	N/A
692.47	28.3 Qp	1.5 / 20.8 / 25.9	24.8	V / 1.0 / 90.0	-21.2	N/A
684.09	27.9 Qp	1.5 / 20.9 / 25.5	24.7	V / 1.0 / 90.0	-21.3	N/A
464.49	27.8 Qp	1.2 / 17.4 / 21.8	24.6	H / 2.0 / 0.0	-21.4	N/A
137.63	31.6 Qp	0.7 / 12.2 / 22.4	22.0	V / 1.0 / 0.0	-21.5	N/A
145.01	31.4 Qp	0.7 / 12.2 / 22.3	21.9	V / 1.0 / 0.0	-21.6	N/A
297.99	31.2 Qp	0.9 / 14.4 / 22.1	24.4	V / 1.0 / 0.0	-21.6	N/A
339.95	30.8 Qp	1.0 / 14.6 / 22.0	24.4	V / 1.0 / 0.0	-21.6	N/A
135.18	31.4 Qp	0.7 / 12.1 / 22.4	21.8	V / 1.0 / 0.0	-21.7	N/A
420.26	28.1 Qp	1.1 / 16.9 / 21.8	24.3	H / 2.0 / 180.0	-21.7	N/A
147.47	31.1 Qp	0.7 / 12.3 / 22.3	21.7	V / 1.0 / 0.0	-21.8	N/A
289.58	31.1 Qp	0.9 / 14.3 / 22.1	24.2	V / 1.0 / 0.0	-21.8	N/A
449.75	27.9 Qp	1.2 / 16.9 / 21.8	24.2	V / 1.0 / 180.0	-21.8	N/A
115.52	32.6 Qp	0.6 / 10.8 / 22.4	21.6	V / 1.0 / 0.0	-21.9	N/A
127.81	31.4 Qp	0.6 / 11.9 / 22.4	21.5	V / 1.0 / 0.0	-22.0	N/A
132.72	30.9 Qp	0.6 / 12.1 / 22.4	21.3	V / 1.0 / 0.0	-22.2	N/A
238.38	30.8 Qp	0.8 / 14.3 / 22.1	23.8	V / 1.0 / 180.0	-22.2	N/A
202.75	30.4 Qp	0.8 / 11.8 / 22.1	20.9	V / 1.0 / 270.0	-22.6	N/A
169.59	29.2 Qp	0.7 / 12.6 / 22.3	20.3	V / 1.0 / 0.0	-23.2	N/A
113.06	31.4 Qp	0.6 / 10.5 / 22.5	20.1	V / 1.0 / 0.0	-23.4	N/A
294.91	29.4 Qp	0.9 / 14.3 / 22.1	22.6	V / 1.0 / 270.0	-23.4	N/A
318.96	28.9 Qp	0.9 / 14.4 / 22.0	22.2	V / 1.0 / 0.0	-23.8	N/A
340.03	28.2 Qp	1.0 / 14.6 / 22.0	21.8	H / 2.0 / 0.0	-24.2	N/A
331.56	28.2 Qp	1.0 / 14.5 / 22.0	21.6	V / 1.0 / 90.0	-24.4	N/A
314.56	27.4 Qp	0.9 / 14.4 / 22.0	20.7	V / 1.0 / 180.0	-25.3	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 1**
 Test Method: FCC Part 15
 EUT Model #: AMS-SM01
 EUT Serial #: 103
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF off, modem continuously calling and transferring data.

Test Area: Pinewood Site 1 (3m)
 Test Date: 25-Mar-2002
 EUT Power: 120 VAC / 60 Hz

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 35 of 35

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB\m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
327.36	27.3 Qp	1.0 / 14.4 / 22.0	20.7	V / 1.0 / 90.0	-25.3	N/A
280.03	27.4 Qp	0.9 / 14.2 / 22.1	20.4	V / 1.0 / 180.0	-25.6	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 2** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC 15.249 <1GHz QP Test Date: 26-Mar-2002
 EUT Model #: AMS-SM01 / Scram EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 103 / 112
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem
 Notes: RF on, modem off
 Base station and bracelet on the table.

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 1 of 1

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	FCC 15.249 <1GHz QP	FCC 15.249 <1GHz Pk
All readings are maximized						
916.38	57.4 Qp	1.8 / 24.8 / 0.0	83.9	V / 1.0 / 255.0	-10.1	N/A
916.38	73.1 Pk	1.8 / 24.8 / 0.0	99.7	V / 1.0 / 255.0	N/A	-14.3
916.64	62.9 Pk	1.8 / 24.8 / 0.0	89.5	V / 1.7 / 255.0	N/A	-24.5
916.64	52.8 Qp	1.8 / 24.8 / 0.0	79.4	V / 1.7 / 237.0	-14.6	N/A
916.38	66.2 Pk	1.8 / 24.8 / 0.0	92.8	H / 1.0 / 183.0	N/A	-21.2
916.38	55.3 Qp	1.8 / 24.8 / 0.0	81.9	H / 1.0 / 183.0	-12.1	N/A
916.64	54.5 Qp	1.8 / 24.8 / 0.0	81.1	H / 1.0 / 320.0	-12.9	N/A
916.64	68.4 Pk	1.8 / 24.8 / 0.0	95.0	H / 1.0 / 320.0	N/A	-19.0
No Harmonics or Spurious Observed						

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 3** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC 15.249 >1GHz AV Test Date: 26-Mar-2002
 EUT Model #: AMS-SM01 / Scram EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 103 / 112
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem and RF Bracelet
 Notes: RF on, modem off
 Base station and bracelet on the table.

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 1 of 3

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV)	(m) (DEG)	FCC 15.249 >1GHz Av	FCC 15.249 >1GHz Pk
All readings are maximized						
1832.75	73.9 Pk	2.6 / 28.4 / 37.6	67.2	V / 1.0 / 0.0	N/A	-6.8
1832.76	44.0 Av	2.6 / 28.4 / 37.6	37.3	V / 1.0 / 0.0	-16.7	N/A
1833.27	57.0 Pk	2.6 / 28.4 / 37.6	50.3	V / 1.0 / 65.0	N/A	-23.7
1833.27	41.6 Av	2.6 / 28.4 / 37.6	35.0	V / 1.0 / 65.0	-19.0	N/A
2749.14	53.8 Pk	3.3 / 31.1 / 35.7	52.5	V / 1.0 / 300.0	N/A	-21.5
2749.14	40.9 Av	3.3 / 31.1 / 35.7	39.7	V / 1.0 / 300.0	-14.3	N/A
3665.54	39.1 Pk	4.0 / 33.3 / 36.1	40.3	V / 1.0 / 70.0	N/A	-33.7
3665.54	33.5 Av	4.0 / 33.3 / 36.1	34.7	V / 1.0 / 70.0	-19.3	N/A
4581.92	38.1 Pk	4.4 / 33.7 / 38.1	38.2	V / 1.0 / 320.0	N/A	-35.8
4581.91	32.8 Av	4.4 / 33.7 / 38.1	32.9	V / 1.0 / 320.0	-21.1	N/A
5498.27	41.8 Pk	4.9 / 35.7 / 38.3	44.0	V / 1.0 / 271.0	N/A	-30.0
5498.27	34.0 Av	4.9 / 35.7 / 38.3	36.2	V / 1.0 / 271.0	-17.8	N/A
The following is a noise floor reading						
6414.81	33.6 Av	4.8 / 36.4 / 37.6	37.3	V / 1.0 / 271.0	-16.7	N/A
The following is a noise floor reading						
7331.30	33.1 Av	5.4 / 37.7 / 37.8	38.3	V / 1.0 / 271.0	-15.7	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 3** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC 15.249 >1GHz AV Test Date: 26-Mar-2002
 EUT Model #: AMS-SM01 / Scram EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 103 / 112
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem and RF Bracelet
 Notes: RF on, modem off
 Base station and bracelet on the table.

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 2 of 3

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	FCC 15.249 >1GHz Av	FCC 15.249 >1GHz Pk
The following is a noise floor reading						
8247.80	29.2 Av	5.9 / 38.3 / 45.5	27.9	V / 1.0 / 271.0	-26.1	N/A
The following is a noise floor reading						
9164.30	28.9 Av	6.3 / 39.5 / 45.4	29.2	V / 1.0 / 271.0	-24.8	N/A
The following is a noise floor reading						
9164.30	28.9 Av	6.3 / 39.5 / 45.4	29.2	H / 1.0 / 0.0	-24.8	N/A
The following is a noise floor reading						
8247.80	29.2 Av	5.9 / 38.3 / 45.5	27.8	H / 1.0 / 0.0	-26.2	N/A
The following is a noise floor reading						
7331.30	33.0 Av	5.4 / 37.7 / 37.8	38.2	H / 1.0 / 0.0	-15.8	N/A
The following is a noise floor reading						
6414.81	33.6 Av	4.8 / 36.4 / 37.6	37.3	H / 1.0 / 0.0	-16.7	N/A
5498.28	39.7 Pk	4.9 / 35.7 / 38.3	41.9	H / 1.0 / 320.0	N/A	-32.1
5498.28	30.7 Av	4.9 / 35.7 / 38.3	32.9	H / 1.0 / 320.0	-21.1	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 3** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC 15.249 >1GHz AV Test Date: 26-Mar-2002
 EUT Model #: AMS-SM01 / Scram EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 103 / 112
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: Smart Modem and RF Bracelet
 Notes: RF on, modem off
 Base station and bracelet on the table.

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 3 of 3

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	FCC 15.249 >1GHz Av	FCC 15.249 >1GHz Pk
4581.91	36.7 Pk	4.4 / 33.7 / 38.1	36.8	H / 1.0 / 65.0	N/A	-37.2
4581.92	31.8 Av	4.4 / 33.7 / 38.1	31.9	H / 1.0 / 65.0	-22.1	N/A
3665.54	39.1 Pk	4.0 / 33.3 / 36.1	40.3	H / 1.0 / 220.0	N/A	-33.7
3665.54	33.2 Av	4.0 / 33.3 / 36.1	34.5	H / 1.0 / 220.0	-19.5	N/A
2749.15	49.6 Pk	3.3 / 31.1 / 35.7	48.4	H / 1.0 / 310.0	N/A	-25.6
2749.15	38.9 Av	3.3 / 31.1 / 35.7	37.7	H / 1.0 / 310.0	-16.3	N/A
1833.27	59.3 Pk	2.6 / 28.4 / 37.6	52.6	H / 1.0 / 16.0	N/A	-21.4
1833.27	43.0 Av	2.6 / 28.4 / 37.6	36.3	H / 1.0 / 16.0	-17.7	N/A
1832.75	68.2 Pk	2.6 / 28.4 / 37.6	61.6	H / 1.0 / 118.0	N/A	-12.4
1832.75	47.0 Av	2.6 / 28.4 / 37.6	40.3	H / 1.0 / 118.0	-13.7	N/A
No other spurious or Harmonics observed						

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 04** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC Part 15 Test Date: 26-Mar-2002
 EUT Model #: Scram EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 112
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: RF Bracelet
 Notes: Bracelet only

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 1 of 2

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
No emissions found 30 - 1000 MHz, vertical						
No emissions found: 30 - 1000 MHz, horizontal						
The following are noise floor readings						
200.00	21.5 Qp	0.8 / 11.5 / 22.2	11.6	V / 1.0 / 0.0	-31.9	N/A
239.56	20.9 Qp	0.8 / 14.3 / 22.1	13.9	V / 1.0 / 0.0	-32.1	N/A
240.19	24.2 Qp	0.8 / 14.3 / 22.1	17.2	V / 1.0 / 0.0	-28.8	N/A
250.00	23.8 Qp	0.8 / 14.4 / 22.1	16.9	V / 1.0 / 0.0	-29.1	N/A
260.00	20.2 Qp	0.8 / 14.3 / 22.1	13.3	V / 1.0 / 0.0	-32.7	N/A
500.00	19.2 Qp	1.3 / 18.3 / 21.8	17.0	V / 1.0 / 0.0	-29.0	N/A
900.00	18.9 Qp	1.8 / 24.3 / 20.9	24.1	V / 1.0 / 0.0	-21.9	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #: **BC201533 Run 04** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC Part 15 Test Date: 26-Mar-2002
 EUT Model #: Scram EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 112
 Manufacturer: Alcohol Monitoring Systems
 EUT Description: RF Bracelet
 Notes: Bracelet only

Temperature: 24 °C
 Relative Humidity: <26 %
 Air Pressure: 80 kPa
 Page: 2 of 2

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
***** Measurement Summary *****						
900.00	18.9 Qp	1.8 / 24.3 / 20.9	24.1	V / 1.0 / 0.0	-21.9	N/A
240.19	24.2 Qp	0.8 / 14.3 / 22.1	17.2	V / 1.0 / 0.0	-28.8	N/A
500.00	19.2 Qp	1.3 / 18.3 / 21.8	17.0	V / 1.0 / 0.0	-29.0	N/A
250.00	23.8 Qp	0.8 / 14.4 / 22.1	16.9	V / 1.0 / 0.0	-29.1	N/A
200.00	21.5 Qp	0.8 / 11.5 / 22.2	11.6	V / 1.0 / 0.0	-31.9	N/A
239.56	20.9 Qp	0.8 / 14.3 / 22.1	13.9	V / 1.0 / 0.0	-32.1	N/A
260.00	20.2 Qp	0.8 / 14.3 / 22.1	13.3	V / 1.0 / 0.0	-32.7	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Equipment Report

26-Mar-2002

Project Number: BC201533

Project Date: 26-Mar-2002

Company Name: AM

Equip ID	Manufacturer	Model Number	Serial Number	Description	Date	Calibration Interval	Due	Cal Code
----------	--------------	--------------	---------------	-------------	------	----------------------	-----	----------

Test Performed C Conducted Emissions

8004	RHODE & SCHWARZ	ESH3	872318/036	Low Frequency Receiver (9 kHz - 30 MHz)	30-Oct-2001	12	30-Oct-2002	G
8184	RHODE & SCHWARZ	ESH2-Z5	830364/002	LISN 50 ohm/50uH 3 line (1kHz - 30 MHz)	23-Mar-2001	13	23-Apr-2002	B
8257	HP	11947A	3107A01984	Transient Limiter	09-Sep-2001	12	09-Sep-2002	B

Test Performed R Radiated Emissions

7514	A.H.SYSTEMS	SAS-200/512	104	Log Periodic Antenna (200-1500 MHz)	26-Sep-2001	12	26-Sep-2002	G
7617	MINI-CIRCUITS LAB	ZHL-42	N052792-2	Amplifier	23-Apr-2001	12	23-Apr-2002	B
7637	MITEQ	AM-2A-000110-N	848495	Amplifier	20-Mar-2002	12	20-Mar-2003	G
8179	EMCO	3108	2149	Biconical Dipole Antenna (30-300 MHz)	18-Jun-2001	12	18-Jun-2002	G
8207	AVANTEK	AWT-18037	1002	RF Pre-Amplifier (8-18 GHz)	23-Apr-2001	12	23-Apr-2002	B
8208	AVANTEK	AFT97-8434-10F	1007	RF Pre-Amplifier (4-8 GHz)	23-Apr-2001	12	23-Apr-2002	B
505010	HEWLETT-PACKARD	8568B	2732A04156	Spectrum Analyzer	27-Feb-2002	12	27-Feb-2003	G

Cal Code Legend: G=Out Source, Y=No Cal required, R=Out of Service, B=In-House Verification Required

1 of 1

Appendix B

Test Plan
and
Constructional Data Form



EMC Test Plan and Constructional Data Form

PLEASE COMPLETE THIS DOCUMENT IN FULL, ENTERING N/A IF THE FIELD IS NOT APPLICABLE.

Applicant -- NOTE: This information will be input into your test report as shown below.
Press the F1 key at any time to get HELP for the current field selected.

Company: Alcohol Monitoring Systems LLC.

Address: 9135 S Ridgeline Blvd. #190
Highlands Ranch, Colorado 80129

Contact: Jeff Hawthorne Position: Vice President of Research & Development

Phone: (303) 989-8900 Fax: (303) 791-4262

E-mail Address: jhawthorne@alcoholmonitoring.com

General Equipment Description -- NOTE: This information will be input into your test report as shown below.

EUT Description 2 different products: 1) Modem Unit & 2) Secured Remote Alcohol Monitoring Bracelet

EUT Name 1) Smart Modem & 2) SCRAM Unit

Model No.: 1) AMS-SM01 & 2) SCRAM Serial No.: _____

Product Options: _____

Configurations to be tested: _____

Test Objective

- | | |
|--|---|
| ☒ EMC Directive 89/336/EEC (EMC) | ☒ FCC: Class ☐ A ☒ B Part <u>249</u> |
| Std: _____ | ☐ VCCI: Class ☐ A ☐ B _____ |
| ☐ Machinery Directive 89/392/EEC (EMC) | ☐ BCIQ: Class ☐ A ☐ B |
| Std: _____ | ☐ Canada: Class ☐ A ☐ B |
| ☐ Medical Device Directive 93/42/EEC (EMC) | ☐ Australia: Class ☐ A ☐ B |
| Std: _____ | ☐ Other: _____ |
| ☐ Vehicle Directive 72/245/EEC (EMC) | |
| Std: _____ | |
| ☐ FDA Reviewers Guidance for Premarket Notification Submissions (EMC) | |

EMC Test Plan and Constructional Data Form

**TÜV Product Service Certification Requested**

- ☐ Attestation of Conformity (AoC) ☐ International EMC Mark (IEM)
☐ Certificate of Conformity (CoC) ☐ Compliance Document
Protection Class (N/A for vehicles) ☐ Class I ☐ Class II ☐ Class III
(Press **F1** when field is selected to show additional information on Protection Class.)

Attendance

Test will be: ☒ Attended by the customer ☐ Unattended by the customer

Failure - Complete this section if testing will not be attended by the customer.

If a failure occurs, TÜV Product Service should:

- ☒ Call contact listed above, if not available then stop testing. (After hrs phone): _____
☒ Continue testing to complete test series.
☐ Continue testing to define corrective action.
☐ Stop testing.

EUT Specifications and Requirements

Length: _____ Width: _____ Height: _____ Weight: _____

Power Requirements

Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)

Voltage: Modem = 110 (If battery powered, make sure battery life is sufficient to complete testing.)
AC, Scram = _____
Battery _____

of Phases: _____

Current (Amps/phase(max)): _____ Current (Amps/phase(nominal)): _____

Other _____

Other Special Requirements**Typical Installation and/or Operating Environment**

(ie. Hospital, Small Business, Industrial/Factory, etc.)
Home use

EMC Test Plan and Constructional Data Form



EUT Power Cable

☐ Permanent	OR	☒ Removable	Length (in meters):	
☐ Shielded	OR	☐ Unshielded		
☐ Not Applicable				

EMC Test Plan and Constructional Data Form

EUT Interface Ports and Cables												
Interface			Shielding									
Type	Analog	Digital	Qty	Yes	No	Type	Termination	Connector Type	Port Termination	Length (in meters)	Removable	Permanent
EXAMPLE: RS232	☐	☒	2	☒	☐	Foil over braid	Coaxial	Metallized 9-pin D-Sub	Characteristic Impedance	6	☒	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐

EMC Test Plan and Constructional Data Form**EUT Software.**

Revision Level: Modem = 1.1 Scram = 3.8

Description:

EUT Operating Modes to be Tested -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing. Consult with your TÜV Product Service Representative if additional assistance is required.

1.

2.

3.

EUT System Components -- List and describe all components which are part of the EUT. For FCC testing a minimum configuration is required. (ie. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc.)

Description	Model #	Serial #	FCC ID #
Modem Unit	AMS-SM01		
SCRAM Unit	SCRAM		

Support Equipment -- List and describe all support equipment which is not part of the EUT. (i.e. peripherals, simulators, etc)			
Description	Model #	Serial #	FCC ID #
Laptop Computer	Dell 4100		

[illegible]

Manufacturer	Model #	Serial #	Type
Ault Inc.			☐ Switched-mode: (Frequency) _____ ☐ Linear ☒ Other: <u>Class 2 power supply</u>
			☐ Switched-mode: (Frequency) _____ ☐ Linear ☐ Other: _____

Manufacturer	Model #	Location in EUT

Form

EMC Test Plan and Constructional Data Form



Critical EMI Components (Capacitors, ferrites, etc.)

Description	Manufacturer	Part # or Value	Qty	Component # / Location

EMC Critical Detail -- Describe other EMC Design details used to reduce high frequency noise.

(PLEASE INSERT "ELECTRONIC SIGNATURE" BELOW IF POSSIBLE)

Authorization Signatures

A handwritten signature in black ink, appearing to read 'John H. [unclear]', written over a horizontal line.

Customer authorization to perform tests
according to this test plan.

4/3/02

Date

A handwritten signature in black ink, appearing to read 'John H. [unclear]', written over a horizontal line.

Test Plan/CDF Prepared By (please print)

4/3/02

Date

A handwritten signature in black ink, appearing to read 'Todd [unclear]', written over a horizontal line.

Reviewed by TÜV Product Service Associate

4/3/02

Date