Exhibit 9

SECTION 2.1033(c) (11)

A description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation and for limiting power.

RESPONSE: The modulation control and power limiting functions are controlled by the **CBR/ AS5CMP-26,** which supplies the signals to be amplified. External to the **ICLA/AS5CMP-27** there are cavity type transmit filters which limit spurious and harmonic content. The performance characteristics of these filters are included in Figures 9a, 9b and 9c

Complete circuit diagrams.

RESPONSE: The complete circuit diagrams, for which confidential status has been requested, was included with the original filing documents for **ICLA/ AS5CMP-27**. This information is unchanged from the original filing.

(LUCENT TECHNOLOGIES CONFIDENTIAL PROPRIETARY INFORMATION)

(MPD TECHNOLOGIES CONFIDENTIAL PROPRIETARY INFORMATION)

Exhibit 9 continued

Figure 9a C Block Duplex Filter

AS5CMP-26/ AS5CMP-27 FLEXENT PCS CDMA DUPLEX TRANSMIT FILTER

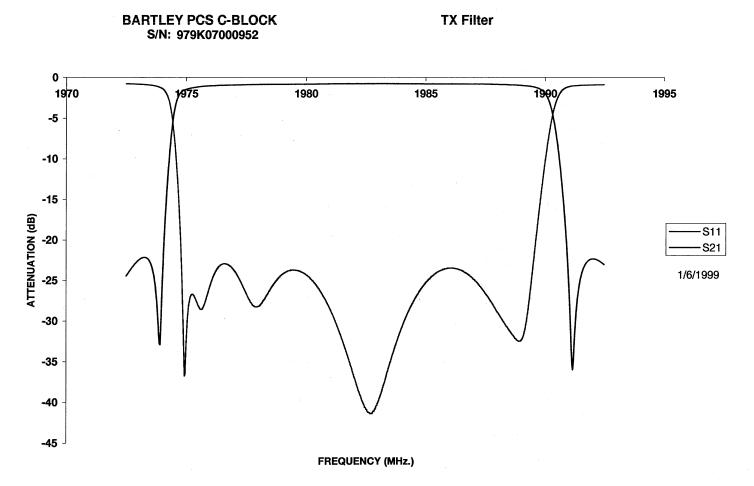


Exhibit 9 continued

Figure 9b D Block Duplex Filter

AS5CMP-26/ AS5CMP-27 FLEXENT PCS CDMA DUPLEX TRANSMIT FILTER

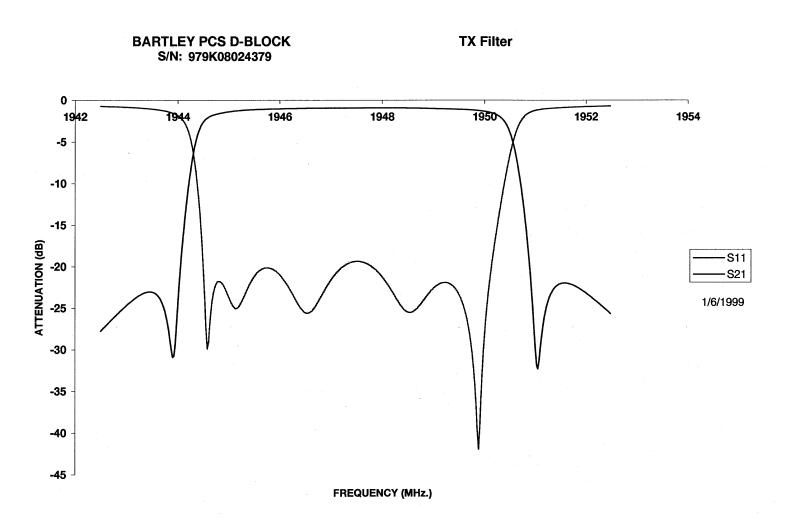


Exhibit 9 continued

Figure 9c F Block Duplex Filter

AS5CMP-26/ AS5CMP-27 FLEXENT PCS CDMA DUPLEX TRANSMIT FILTER

