



**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT** 

## INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 247 REQUIREMENT

OF

**FCC Applicant:** Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co.,

Ltd., Bantian, Longgang District, Shenzhen, 518129, China

IC Applicant: Huawei Technologies Co., Ltd.

> Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China(Peoples

Republic Of)

**Product Name: Notebook Computer** 

HUAWEI, HONOR **Brand Name:** 

FCC Model No.: VLR-W09, VLR-W19, VLR-W29, VLR-WXXXXX(X Can be 0-9, A-Z,

a-z, blank or symbol "-")

IC Model No.: VLR-W29, VLR-W09, VLR-W19

**Model Difference:** For the marketing purpose, only different model designations on the

marking plate for different markets. No RF concern.

**Report Number:** T190315W02-RP1

FCC ID: QISVLR-WX9

IC: 6369A-VLRWX9

**FCC Rule Part:** §15.247, Cat: DTS

IC Rule Part: RSS-247 issue 2 Feb 2017

**Issue Date:** Apr. 02, 2019

Date of Test: Mar. 15, 2019 ~ Mar. 27, 2019

Date of EUT Received: Mar. 15, 2019

Issued by Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan.

(R.O.C.)

service@ccsrf.com

s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: T190315W02-RP1

Page 2 of 120

Note: The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this re-

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Henry Chiang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: T190315W02-RP1

Page 3 of 120

# **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190315W02-RP1	Rev.00	Initial creation of docu- ment	All	Apr. 02, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 4 of 120



## **Table of Contents**

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSION TEST	13
7	DUTY CYCLE OF TEST SIGNAL	17
8	PEAK OUTPUT POWER MEASUREMENT	19
9	6dB & 99% BANDWIDTH MEASUREMENT	30
10	CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	41
11	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	50
12	POWER SPECTRAL DENSITY	115
13	ANTENNA REQUIREMENT	120

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



**GENERAL INFORMATION** 

## 1.1 Product description

Product Name:	Notebook Computer		
Brand Name:	HUAWEI, HONOR		
FCC Model No.:		, VLR-W19, VLR-W29,VLR-WXXXXX(X Can be 0-9, blank or symbol "-" )	
IC Model No.:	VLR-W29	, VLR-W09, VLR-W19	
Model Difference:	For the marketing purpose, only different model designations on the marking plate for different markets. No RF concern.		
Product SW/HW version:	1809 (OS Build 17763.316) / C3A		
Radio SW/HW version:	Wi-Fi Con	nponent: 20 / Wi-Fi Component: 9560	
Test SW Version:	N/A		
RF power setting in TEST SW:	N/A		
	7.6Vdc from Rechargeable Li-ion Battery or 5Vdc / 9Vdc / 12Vdc / 15Vdc / 20V dc from AC/DC Adapter.		
Power Supply:	Battery: Model No.: HB4593R1ECW, Supplier: HUAWEI		
	Adapter:	Model No.: HW-200325YYY (Y=0-9, A-Z or blank) Supplier: HUAWEI	

#### WLAN 2.4GHz:

Wi-Fi	Frequency Range	Channels	Rated Power in dBm (Peak)	Rated Power in dBm (EIRP)	Type of Emission	Modulation Technology	
802.11b			18.55	19.98	14M9G1D	DSSS,	
802.11g	2412-2462	11	20.72	19.91	17M1D1D		
802.11n HT20			20.83	19.83	18M1D1D	OFDM	
802.11n HT40	2422-2452	7	20.34	19.01	36M5D1D		
Antenna	Designation:	Main Anto	PIFA Antenna, Main Antenna Gain: 1.95 dBi Aux Antenna Gain: 0.65 dBi				
Modulati	on type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM					
802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 144.4Mbps 802.11 n_40MHz: 13.5 – 300.0Mbps							

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: T190315W02-RP1

Page 6 of 120

## 1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance v05r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

RSS-247 issue 2 Feb. 2017

RSS-Gen. issue 5 Apr. 2018

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

## 1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309 Canada Registration number: 2324G

#### 1.4 Special Accessories

There are no special accessories used while test was conducted.

## 1.5 Equipment Modifications

There was no modification incorporated into the EUT.

s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留Ý0天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms\_and\_conditions.htm</u> and for electronic

format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190315W02-RP1

Page 7 of 120

## SYSTEM TEST CONFIGURATION

## 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 Test Procedure

#### 2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### 2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

#### 2.3.3 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max, emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level. Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss and attenuator.

### 2.5 Configuration of Tested System

Fig. 2-1 Radiated & Conducted Emission Configuration



Fig 2-2 AC power line Configuration




Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A

ss otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





## **SUMMARY OF TEST RESULTS**

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	RSS-247 §5.4(4)	Peak Output Power	Compliant
§15.247(a)(2)	RSS-247 §5.1 (1) RSS-Gen §6.7	6dB & 99% Emission Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5 RSS-Gen §8.10	Conducted Band Edge and Spurious Emission	Compliant
§15.205 §15.209 §15.247(d)	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10 RSS-Gen §6.13	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	RSS-247 §5.2(2)	Power Spectral Density	Compliant
§15.203 §15.247(b)	RSS- Gen §6.8	Antenna Requirement	Compliant

## **DESCRIPTION OF TEST MODES**

## 4.1 Operated in 2400 ~ 2483.5MHz Band


11 channels are provided for 802.11b, 802.11g and 802.11n\_HT20

•	·	•	
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

## 7 channels are provided for 802.11n\_HT40

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 10 of 120



#### 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case. The gevin UE is pre-scanned among below modes.
- 4. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.

#### AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral
Worst Case	Operation in normal mode

#### **RADIATED EMISSION TEST:**


RADIATED EMISSION TEST (BELOW 1 GHz)							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
802.11g	1 to 11	1,6,11	OFDM	6	MIMO		
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	MCS 8	MIMO		

RADIATED EMISSION TEST (ABOVE 1 GHz)							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
802.11b	1 to 11	1, 6, 11	DSSS	1	MIMO		
802.11g	1 to 11	1, 6, 11	OFDM	6	MIMO		
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 8	MIMO		
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	MCS 8	MIMO		

#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.

s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







#### ANTENNA PORT CONDUCTED MEASUREMENT:

—							
CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
802.11b	1 to 11	1, 6, 11	DSSS	11	MAIN		
802.11g	1 to 11	1, 6, 11	OFDM	54	Aux		
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 8	Aux		
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	MCS 8	Aux		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





## **MEASUREMENT UNCERTAINTY**

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.92 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.92 dB
Peak Power Density	+/- 1.996 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

#### Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.



#### CONDUCTED EMISSION TEST

## 6.1 Standard Applicable

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Lin dB(	
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

#### Note

#### 6.2 Measurement Equipment Used

	Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
EXA Signal Ana-	KEYSIGHT	N9010B	MY5546016	08/09/2018	08/08/2019			
lyzer	KE TOIOITT	1490100	7	00/03/2010	00/00/2013			
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019			
<b>EMI Test Receiver</b>	R&S	ESCI	100064	07/24/2018	07/23/2019			
LISN	SCHWARZ	NSLK 8127	8127-541	01/31/2010	01/30/2020			
LIOIN	BECK	NOLK 0121	0127-341	01/31/2019	01/30/2020			
Software		EZ-EMC(CCS-3A1-CE)						

#### 6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

<sup>1.</sup> The lower limit shall apply at the transition frequencies


<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



Page 14 of 120



## 6.4 Test SET-UP (Block Diagram of Configuration)

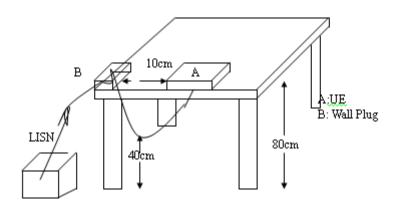

#### 6.5 Measurement Procedure


- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

#### 6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The \* reveals the worst-case results that closet to the limit.

ss otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 15 of 120

## AC POWER LINE CONDUCTED EMISSION TEST DATA

**Description:** Operation Date: 2019/3/26


Temp.(°C)/Hum.(%): 26(°C)/62% Line: L1

Test Voltage: AC 120V/60Hz Test By: Henry

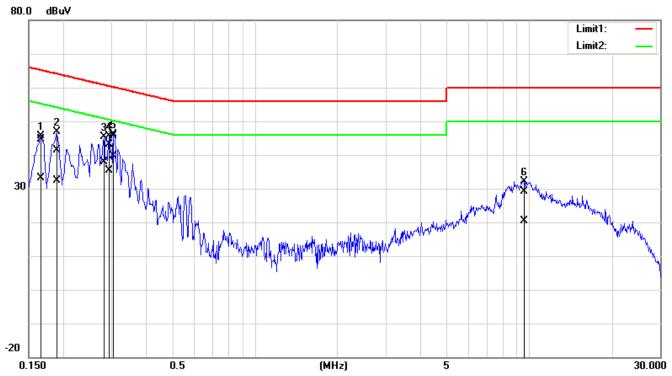

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1660	44.57	33.08	0.16	44.73	33.24	65.15	55.16	-20.42	-21.92	Pass
2	0.1900	41.23	32.18	0.15	41.38	32.33	64.03	54.04	-22.65	-21.71	Pass
3	0.2819	45.35	37.73	0.15	45.50	37.88	60.76	50.76	-15.26	-12.88	Pass
4	0.2940	43.05	35.15	0.15	43.20	35.30	60.41	50.41	-17.21	-15.11	Pass
5*	0.3060	45.39	39.53	0.16	45.55	39.69	60.08	50.08	-14.53	-10.39	Pass
6	9.5860	28.63	19.93	0.45	29.08	20.38	60.00	50.00	-30.92	-29.62	Pass

ss otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Line:

**Description:** 2019/3/26 Operation Date: Temp.(°C)/Hum.(%): 26(°C)/62%

Test Voltage: AC 120V/60Hz Test By: Henry

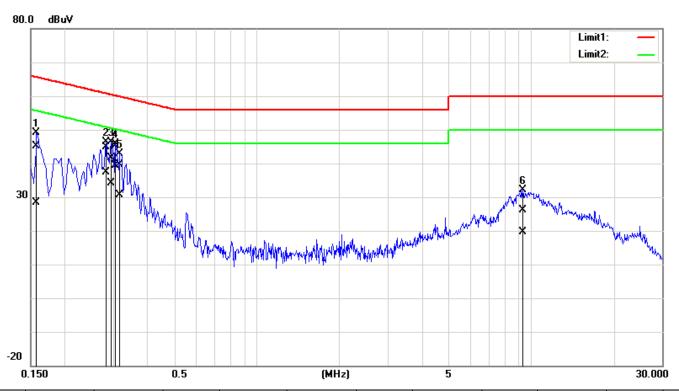

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1580	45.08	28.36	0.10	45.18	28.46	65.56	55.57	-20.38	-27.11	Pass
2	0.2819	44.85	37.24	0.10	44.95	37.34	60.76	50.76	-15.81	-13.42	Pass
3	0.2940	41.56	34.12	0.10	41.66	34.22	60.41	50.41	-18.75	-16.19	Pass
4*	0.3060	45.10	39.26	0.11	45.21	39.37	60.08	50.08	-14.87	-10.71	Pass
5	0.3180	39.41	30.46	0.11	39.52	30.57	59.76	49.76	-20.24	-19.19	Pass
6	9.3220	25.86	19.22	0.36	26.22	19.58	60.00	50.00	-33.78	-30.42	Pass

ss otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## **DUTY CYCLE OF TEST SIGNAL**

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

#### Formula:

Duty Cycle = Ton / (Ton+Toff)

#### **Measurement Procedure:**

- 1. Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak

## **Duty Cycle:**

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11b	96.98	0.13	0.08	1.00
802.11g	84.66	0.72	0.49	1.00
802.11n_20	84.61	0.73	0.52	1.00
802.11n_40	84.25	0.74	1.07	2.00

b = 96.98%, g = 84.66%,  $n_ht_20 = 84.61\%$ 


Duty Cycle Factor:  $10 * \log(1/0.9698) = 0.13$ Duty Cycle Factor:  $10 * \log(1/0.8466) = 0.72$ Duty Cycle Factor:  $10 * \log(1/0.8461) = 0.73$ Duty Cycle Factor:  $10 * \log(1/0.8425) = 0.74$ 

s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




#### 7.1 DUTY CYCLE TEST SIGNAL Measurement Result


#### 802.11 b

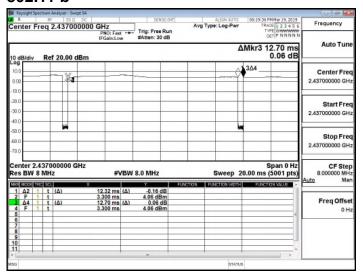


### 802.11 g

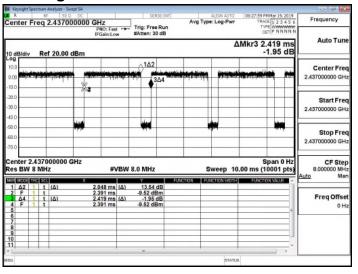

#### 802.11 n 20 MHz

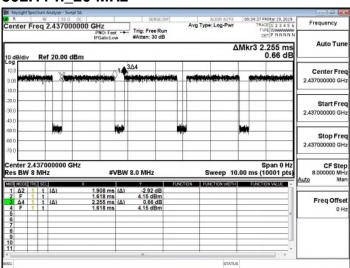

## 802.11 n\_40 MHz

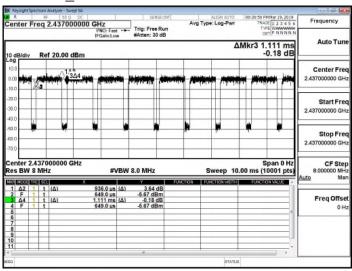

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

#### PEAK OUTPUT POWER MEASUREMENT

## 8.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

Per RSS-247 §5.4(d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

As per FCC KDB 662911 D01

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi.

(i) If transmit signals are correlated, then Directional gain

=  $10 \log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})^2/N_{ANT}] dBi$ 

[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




## 8.2 Measurement Equipment Used

	Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Power Meter	Anritsu	ML2496A	1326001	08/03/2018	08/02/2019				
Power Sensor	Anritsu	MA2411B	1315048	08/03/2018	08/02/2019				
Power Sensor	Anritsu	MA2411B	1315049	08/03/2018	08/02/2019				
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020				
Attenuator	Marvelous	WATT-218FS -10	RF245	02/26/2019	02/25/2020				

#### 8.3 Test Set-up

#### Power Meter:



#### 8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guid-
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

#### **Power Meter:**

It is used as the auxiliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Spectrum or Power Meter.

ss otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 8.5 Measurement Result

802.1	1b Ch0				
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	1	16.32	30.00	PASS
6	2437	1	18.42	30.00	PASS
11	2462	1	16.53	30.00	PASS
802.1	1b Ch0				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	1	13.77	30.00	PASS
6	2437	1	15.72	30.00	PASS
11	2462	1	13.87	30.00	PASS

802.1	802.11b Ch1								
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT				
1	2412	1	16.51	30.00	PASS				
6	2437	1	18.55	30.00	PASS				
11	2462	1	16.48	30.00	PASS				
802.1	1b Ch1								
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT				
1	2412	1	13.57	30.00	PASS				
6	2437	1	15.40	30.00	PASS				
11	2462	1	13.53	30.00	PASS				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



802.1	1b_2TX						
СН	Freq.	Data Rate	l de	output wer (m)	Total Peak Output Power	Limit (dBm)	RESULT
	` '		CH 0	CH 1	(dBm)	,	
1	2412	1	12.79	13.67	16.26	30.00	PASS
6	2437	1	15.34	15.48	18.42	30.00	PASS
11	2462	1	13.14	13.44	16.30	30.00	PASS
802.1	1b_2TX						
СН	Freq.	Data Rate	Po	Output wer Bm)	Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT
	` ′		CH 0	CH1	(dBm)	,	
1	2412	1	10.48	10.71	13.74	30.00	PASS
6	2412 2437	1	10.48 12.47	10.71 12.49	13.74 15.62	30.00 30.00	PASS PASS

802.1	1g Ch0				
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	6	18.64	30.00	PASS
6	2437	6	20.02	30.00	PASS
11	2462	6	18.77	30.00	PASS
802.1	1g Ch0				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	6	13.72	30.00	PASS
6	2437	6	15.68	30.00	PASS
11	2462	6	13.79	30.00	PASS



802.1	802.11g Ch1								
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT				
1	2412	6	18.74	30.00	PASS				
6	2437	6	20.72	30.00	PASS				
11	2462	6	18.45	30.00	PASS				
802.1	1g Ch1			-	-				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT				
1	2412	6	13.70	30.00	PASS				
6	2437	6	15.64	30.00	PASS				
11	2462	6	13.72	30.00	PASS				

802.1	1g_2TX						
СН	Freq.	Data Rate	Po	<del>Juipui</del> wer (m)	Total Peak Output Power	Limit (dBm)	RESULT
	(,		CH 0	CH1	(dBm)		
1	2412	6	15.89	15.91	18.91	30.00	PASS
6	2437	6	17.41	17.99	20.72	30.00	PASS
11	2462	6	15.88 15.82		18.86	30.00	PASS
802.1	1g_2TX						
СН	Freq.	Data	Avg. Output Power (dBm)		Max. Avg. Output include tune up	Limit	RESULT
	(MHz)	Rate	(dE	3m)	tolerance Power	(dBm)	KLOOLI
	(MHZ)	Rate	CH 0	Bm) CH1	tolerance Power (dBm)	(dBm)	REGOLI
1	(MHz) 2412	<b>Rate</b> 6	•			(dBm) 30.00	PASS
1 6	` ′		CH 0	CH1	(dBm)		



802.1	802.11n_HT20M Ch0										
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT						
1	2412	MCS0	18.72	30.00	PASS						
6	2437	MCS0	17.72	30.00	PASS						
11	2462	MCS0	19.01	30.00	PASS						
802.1	1n_HT20	M Ch0									
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT						
1	2412	MCS0	13.80	30.00	PASS						
6	2437	MCS0	15.63	30.00	PASS						
11	2462	MCS0	13.72	30.00	PASS						

802.1	802.11n_HT20M Ch1									
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT					
1	2412	MCS0	18.95	30.00	PASS					
6	2437	MCS0	17.69	30.00	PASS					
11	2462	MCS0	18.97	30.00	PASS					
802.1	1n_HT20	M Ch1								
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT					
1	2412	MCS0	13.77	30.00	PASS					
6	2437	MCS0	15.50	30.00	PASS					
11	2462	MCS0	13.70	30.00	PASS					



802.1	802.11n_HT20M MIMO									
СН	Freq. (MHz)	Data Rate	Pov	ver     Sm	Total Peak Output Power	Limit (dBm)	RESULT			
	(		CH 0	CH 1	(dBm)	(4.2)				
1	2412	MCS8	15.54 16.17		18.88	30.00	PASS			
6	2437	MCS8	17.77	17.86	20.83	30.00	PASS			
11	2462	MCS8	15.95 16.07		19.02	30.00	PASS			
802.1	1n_HT20	M MIMC	)							
СН	CH Freq. Data P		Pov	Output wer Bm)	Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT			
	, ,		CH 0	CH 1	(dBm)	,				
1	2412	MCS8	9.41	10.11	13.51	30.00	PASS			
6	2437	MCS8	11.66	11.81	15.47	30.00	PASS			
11	2462	MCS8	9.76	9.95	13.59	30.00	PASS			

802.1	1n_HT40	M Ch0			
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
3	2422	MCS0	16.44	30.00	PASS
6	2437	MCS0	19.72	30.00	PASS
9	2452	MCS0	16.11	30.00	PASS
802.1	1n_HT40	M Ch0			
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
3	2422	MCS0	10.85	30.00	PASS
6	2437	MCS0	14.80	30.00	PASS
	2452	MCS0	9.65	30.00	PASS



802.1	1n_HT40	M Ch1			
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
3	2422	MCS0	16.24	30.00	PASS
6	2437	MCS0	20.34	30.00	PASS
9	2452	MCS0	15.89	30.00	PASS
802.1	1n_HT40	M Ch1			
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
3	2422	MCS0	10.80	30.00	PASS
6	2437	MCS0	14.58	30.00	PASS
9	2452	MCS0	9.53	30.00	PASS

802.1	1n_HT40	м мімс	)				
СН	Freq.	Data Rate	Po	<del>Juipui</del> wer Rm)	Total Peak Output Power	Limit (dBm)	RESULT
	(	rtato	CH 0	CH 1	(dBm)	iBm) , ,	
3	2422	MCS8	13.13	13.77	16.47	30.00	PASS
6	2437	MCS8	16.87	17.26	20.08	30.00	PASS
9	2452	MCS8	12.56 12.51		15.55	30.00	PASS
802.1	1n_HT40	M MIMC	)				
СН	Freq.	·		wer	Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT
			CH 0	CH1	(dBm)		
3	2422	MCS8	6.87	7.25	10.82	30.00	PASS
6	2437	MCS8	10.85	10.94	14.65	30.00	PASS
U							

<sup>\*</sup> Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.




#### **EIRP**

802.1	1b Ch0										
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT				
1	2412	1	13.77	1.95	15.72	36	PASS				
6	2437	1	15.72	1.95	17.67	36	PASS				
11	2462	1	13.87	1.95	15.82	36	PASS				
802.1°	802.11b Ch1										
	•										
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT				
<b>CH</b>	Freq.		•	Gain			<b>RESULT</b> PASS				
	Freq. (MHz)	Rate	Power (dBm)	Gain (dBi)	(dBm)	(dBm)					

802.1	802.11b_2TX											
СН	Freq. (MHz)	Data Rate	Pov	ver Sm)	Total Avg. Output Power	Antenna Gain	Gain   EIRP   Limit   R	RESULT				
	(111112)	Nato	CH 0	CH 1	(dBm)	(dBi)	(aBiii)	(abiii)				
1	2412	1	10.48	10.71	13.74	4.36	18.10	36	PASS			
6	2437	1	12.47	12.49	15.62	4.36	19.98	36	PASS			
11	2462	1	10.57	10.74	13.80	4.36	18.16	36	PASS			

802.1	1g Ch0						
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	6	13.72	1.95	15.67	36	PASS
6	2437	6	15.68	1.95	17.63	36	PASS
11	2462	6	13.79	1.95 15.74		36	PASS
802.1	1g Ch1						
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	6	13.70	0.65	14.35	36	PASS
6	2437	6	15.64	0.65	16.29	36	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





802.1	B02.11g_2TX											
СН	Freq. (MHz)	Data Rate	Po	ver Sm)	Total Avg. Output Power	Antenna Gain	EIRP (dBm)	Limit (dBm)	RESULT			
	(141112)	rate	CH 0	CH 1	(dBm)	(dBi)	(uBiii)	(abiii)				
1	2412	6	9.87	9.92	13.63	4.36	17.99	36	PASS			
6	2437	6	11.68	11.95	15.55	4.36	19.91	36	PASS			
11	2462	6	9.77	10.21	13.73	4.36	18.09	36	PASS			

2462	6	9.77	10.21	13.	.73		4.36	18.09	36	H	PASS	
802.1	1n_HT20I	M Ch0										
СН	Freq. (MHz)	Data Rate	•	Avg. Output Power (dBm)		na I	EIRP (dBm)	Limit (dBm)	I RESU	LT		
1	2412	MCS0	13.	13.80			15.75	36	PAS	S		
6	2437	MCS0	15.	15.63			17.58	36	PAS	S		
11	2462	MCS0	13.72		1.95		15.67	36	PAS	S		
802.11n_HT20M Ch1												
СН	Freq. (MHz)	Data Rate	_	Avg. Output Power (dBm)		na I	EIRP (dBm)	Limit (dBm)	I RESU	LT		
1	2412	MCS0	13.	77	0.65		14.42	36	PAS	S		
6	2437	MCS0	15.	50	0.65		16.15	36	PAS	S		
11	2462	MCS0	13.	70	0.65	·	14.35	36	PAS	S		

802.11n_HT20M MIMO									
СН	Freq.	Data Rate	Pov	ver Rm)	Total Avg. Output Power	Antenna Gain	EIRP (dBm)	Limit (dBm)	RESULT
	(2)	rato	CH 0	CH 1	(dBm)	(dBi)	(45)	(42)	
1	2412	MCS8	15.54	16.17	13.51	4.36	17.87	36	PASS
6	2437	MCS8	17.77	17.86	15.47	4.36	19.83	36	PASS
11	2462	MCS8	15.95	16.07	13.59	4.36	17.95	36	PASS



802.1	802.11n_HT40M Ch0										
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT				
3	2422	MCS0	10.85	1.95	12.80	36	PASS				
4	2427	MCS0	13.06	1.95	15.01	36	PASS				
6	2437	MCS0	14.80	1.95	16.75	36	PASS				
8	2447	MCS0	13.44	1.95	15.39	36	PASS				
9	2452	MCS0	9.65	1.95	11.60	36	PASS				

802.1	802.11n_HT40M Ch1										
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT				
3	2422	MCS0	10.80	0.65	11.45	36	PASS				
4	2427	MCS0	12.83	0.65	13.48	36	PASS				
6	2437	MCS0	14.58	0.65	15.23	36	PASS				
8	2447	MCS0	13.21	0.65	13.86	36	PASS				
9	2452	MCS0	9.53	0.65	10.18	36	PASS				

802.1°	802.11n_HT40M MIMO									
СН	Freq.	Data Rate	Pov	Output Power		Antenna Gain	EIRP (dBm)	Limit (dBm)	RESULT	
	(111112)	rato	CH 0	CH 1	(dBm)	(dBi)	(45)	(42)		
3	2422	MCS8	6.87	7.25	10.82	4.36	15.18	36	PASS	
4	2427	MCS8	8.99	9.14	12.82	4.36	17.18	36	PASS	
6	2437	MCS8	10.85	10.94	14.65	4.36	19.01	36	PASS	
8	2447	MCS8	9.56	9.75	13.41	4.36	17.77	36	PASS	
9	2452	MCS8	5.80	5.92	9.62	4.36	13.97	36	PASS	

<sup>\*</sup> Note: EIRP = Average Power + Gain

Page 30 of 120

#### 6DB & 99% BANDWIDTH MEASUREMENT

## 9.1 Standard Applicable


The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable **RSSs** 

#### 9.2 Measurement Equipment Used

Conducted Emission Test Site									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019				
DC Block	PASTERNACK	PE8210	RF29	02/26/2019	02/25/2020				
Attenuator	Marvelous	MVE2213-1 0	RF80	02/26/2019	02/25/2020				

#### 9.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Page 31 of 120

#### 9.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
  - Set the spectrum analyzer as RBW = 100 kHz, VBW = 3\*RBW, Span = 30M/50MHz, Detector=peak, Sweep=auto.
- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:
  - Set the spectrum analyzer as RBW=1%, VBW = 3\*RBW, Span = 30M/50MHz, Detector=Sample, Sweep=auto.
- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all frequency of interest measured was complete.

#### 9.5 Measurement Result

000 441 010

#### 6dB Bandwidth

Freq. 6dB BW Limit Result					802.11b Cn1			
	Freq.	6dB BW	Limit	Pocult	Freq.	6dB BW	Limit	
	(MHz)	(kHz)	(kHz)	Result	(MHz)	(kHz)	(kHz)	

(MHz)	(kHz)	(kHz)	Result	(MHz)	(kHz)	(kHz)	Result
2412	10090.00	> 500	PASS	2412	10090.00	> 500	PASS
2437	10090.00	> 500	PASS	2437	10090.00	> 500	PASS
2462	10090.00	> 500	PASS	2462	10090.00	> 500	PASS

802.11g Ch0 802.11g Ch1

Freq.	6dB BW	Limit	Result	Freq.	6dB BW	Limit	Result
(MHz)	(kHz)	(kHz)	Result	(MHz)	(kHz)	(kHz)	Result
2412	16370.00	> 500	PASS	2412	16400.00	> 500	PASS
2437	16380.00	> 500	PASS	2437	16390.00	> 500	PASS
2462	16380.00	> 500	PASS	2462	16380.00	> 500	PASS

802.11\_n\_HT20 Ch0 802.11\_n\_HT20 Ch1

Freq.	6dB BW	Limit	Result	Freq.	6dB BW	Limit	Result
(MHz)	(kHz)	(kHz)	Result	(MHz)	(kHz)	(kHz)	Result
2412	17620.00	> 500	PASS	2412	17600.00	> 500	PASS
2437	17610.00	> 500	PASS	2437	17620.00	> 500	PASS
2462	17610.00	> 500	PASS	2462	17620.00	> 500	PASS

s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



802.11\_n\_HT40 Ch0

#### 802.11\_n\_HT40 Ch1

Freq.	6dB BW	Limit	Result	Freq.	6dB BW	Limit	Result
(MHz)	(kHz)	(kHz)	Result	(MHz)	(kHz)	(kHz)	Resuit
2422	36360.00	> 500	PASS	2422	36360.00	> 500	PASS
2437	36350.00	> 500	PASS	2437	36350.00	> 500	PASS
2452	36360.00	> 500	PASS	2452	36350.00	> 500	PASS

#### 99% Bandwidth

802.11b Ch	0	802.11b Ch1			
Freq. (MHz)	99% BW (MHz)	Freq. (MHz)	99% BW (MHz)		
2412	14.915	2412	14.917		
2437	14.909	2437	14.907		
2462	14.927	2462	14.932		

802.11g Ch	0	802.11g Ch1			
Freq.	Freq. 99% BW		99% BW		
(MHz)	(MHz)	(MHz)	(MHz)		
2412	17.069	2412	17.064		
2437	17.083	2437	17.062		
2462	17.089	2462	17.079		

802.11n_HT20M Ch0		802.11n_HT20M Ch1	
Freq.	99% BW	Freq.	99% BW
(MHz)	(MHz)	(MHz)	(MHz)
2412	18.137	2412	18.131
2437	18.094	2437	18.070
2462	18.110	2462	18.121

802.11n_HT40M Ch0		802.11n_HT40M Ch1	
Freq.	99% BW	Freq.	99% BW
(MHz)	(MHz)	(MHz)	(MHz)
2422	36.486	2422	36.468
2437	36.470	2437	36.473
2452	36.494	2452	36.484


\*Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




#### 802.11b (Main)


#### 6dB Band Width Test Data CH-Low



## 6dB Band Width Test Data CH-Mid




#### 6dB Band Width Test Data CH-High




#### 802.11g (Main)


#### 6dB Band Width Test Data CH-Low



## 6dB Band Width Test Data CH-Mid



### 6dB Band Width Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




## 802.11n 20M (Main)


#### 6dB Band Width Test Data CH-Low



#### 6dB Band Width Test Data CH-Mid




#### 6dB Band Width Test Data CH-High




## 802.11n 40M (Main)


#### 6dB Band Width Test Data CH-Low



#### 6dB Band Width Test Data CH-Mid



### 6dB Band Width Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




#### 802.11b (Aux)


#### 6dB Band Width Test Data CH-Low



#### 6dB Band Width Test Data CH-Mid




#### 6dB Band Width Test Data CH-High




#### 802.11g (Aux)


### 6dB Band Width Test Data CH-Low



#### 6dB Band Width Test Data CH-Mid



#### 6dB Band Width Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




#### 802.11n 20M (Aux)


## 6dB Band Width Test Data CH-Low



## 6dB Band Width Test Data CH-Mid




### 6dB Band Width Test Data CH-High




#### 802.11n 40M (Aux)


#### 6dB Band Width Test Data CH-Low



#### 6dB Band Width Test Data CH-Mid



#### 6dB Band Width Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




### 802.11b (Main)


### 99% Band Width Test Data CH-Low



### 99% Band Width Test Data CH-Mid




### 99% Band Width Test Data CH-High




### 802.11g (Main)


### 99% Band Width Test Data CH-Low



# 99% Band Width Test Data CH-Mid



## 99% Band Width Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




### 802.11n 20M (Main)


### 99% Band Width Test Data CH-Low



# 99% Band Width Test Data CH-Mid




## 99% Band Width Test Data CH-High




### 802.11n 40M (Main)


### 99% Band Width Test Data CH-Low



### 99% Band Width Test Data CH-Mid



## 99% Band Width Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




802.11b (Aux)


## 99% Band Width Test Data CH-Low



### 99% Band Width Test Data CH-Mid




# 99% Band Width Test Data CH-High




### 802.11g (Aux)


### 99% Band Width Test Data CH-Low



# 99% Band Width Test Data CH-Mid



## 99% Band Width Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




### 802.11n 20M (Aux)


# 99% Band Width Test Data CH-Low



# 99% Band Width Test Data CH-Mid




## 99% Band Width Test Data CH-High




### 802.11n 40M (Aux)


### 99% Band Width Test Data CH-Low



### 99% Band Width Test Data CH-Mid



## 99% Band Width Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT

#### **Standard Applicable** 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

#### **Measurement Equipment Used** 10.2

Conducted Emission Test Site										
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.					
Spectrum Analyzer	Agilent	_	NAVEO 4000E	_	11/20/2019					
DC Block	PASTERNACK	PE8210	RF29	02/26/2019	02/25/2020					
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020					

#### 10.3 **Test SET-UP**



s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 10.4 Measurement Procedure

# **Conducted Band Edge Limt**

- Set analyzer center frequency to DTS channel center frequency.
- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9.Use the peak marker function to determine the maximum amplitude level.

# **Conducted Band Edge:**

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

### **Conducted Spurious Emission:**

- 1. To connect Antenna Port of EUT to Spectrum
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector = Peak, Sweep = Auto.
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





#### 10.5 **Measurement Result**

Referer	nce Leve	l of Limit 802.11b mode	Referer	nce Leve	l of Limit 802.11g mode
Freq.	req. PSD Reference Level of Limit			PSD	Reference Level of Limit
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)
2412	4.87	-15.13	2412	3.33	-16.67
2437	7.26	-12.74	2437	5.42	-14.58
2462	5.15	-14.85	2462	3.46	-16.54

ĺ	Reference Level of Limit 802.11n20 mode Reference Level of Limit 802.11n40 MOD										
	Veiereil	C FCACI	of Little 602.111120 illoue	Veletell	C FEACI	JI LIIIIIL 602.1 11140 WODL					
	Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit					
	(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)					
	2412	3.50	-16.50	2422	-2.63	-22.63					
	2437	4.60	-15.40	2437	1.43	-18.57					
	2462	3.41	-16.59	2452	-2.49	-22.49					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Offices where stated the Builds shown in this set report felier only to the sample(s) tested and swins in the sample(s) are feliatine for 90 days only. Per part of 18 page 1 instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page 44 of 120




802.11b Band Edge Limit Test Data CH-Low

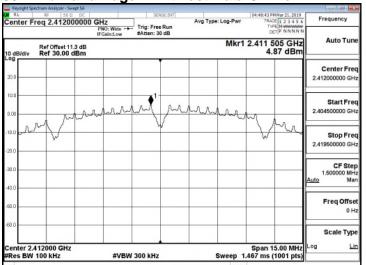


802.11b Band Edge Limit Test Data CH-High

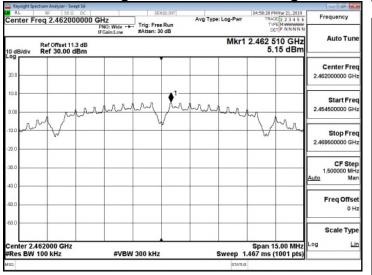


802.11g Band Edge Limit Test Data CH-Low

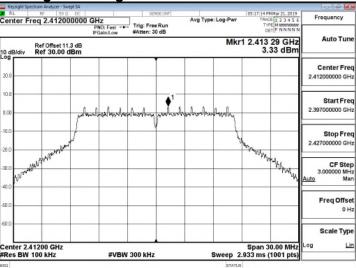

802.11g Band Edge Limit Test Data CH-High

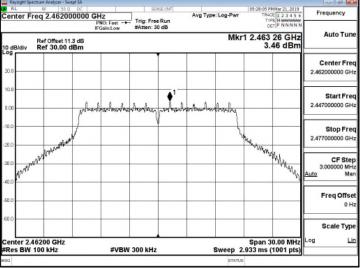


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 45 of 120




### 802.11n HT20 Band Edge Limit Test Data CH-Low

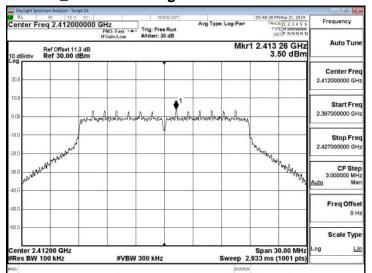


### 802.11n HT20 Band Edge Limit Test Data CH-High

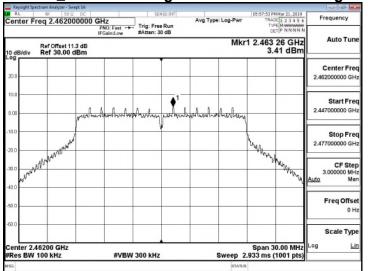

## 802.11n\_HT40 Band Edge Limit Test Data CH-Low

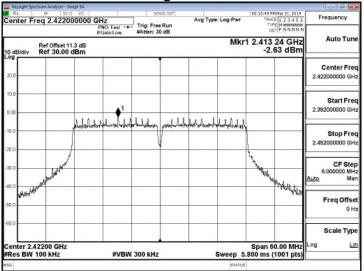

# 802.11n\_HT40 Band Edge Limit Test Data CH-High

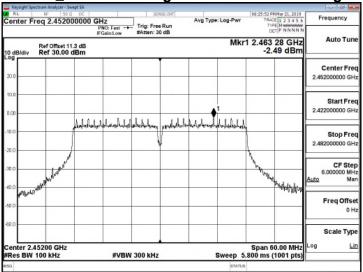

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 46 of 120




802.11b **Band Edge Test Data CH-Low** 

Avg Type: Log-Pw Auto Tun Mkr3 2.390 0 GHz -48.00 dBm Center Free Start Free 2.350000000 GH Liver W The property Stop Free CF Step Span 100.0 MHz Sweep 9.600 ms (1001 pts) Freq Offse Scale Type


802.11g **Band Edge Test Data CH-Low** 

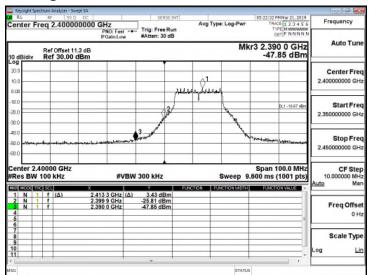


# **Band Edge Test Data CH-High**

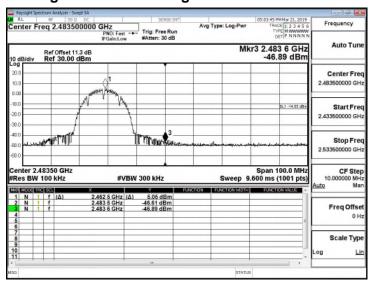

# **Band Edge Test Data CH-High**

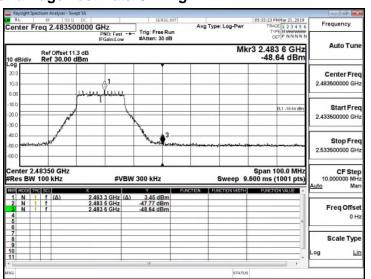


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 47 of 120




# 802.11n HT20 **Band Edge Test Data CH-Low**

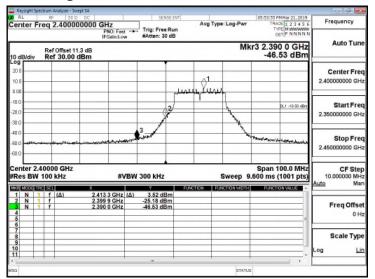


# **Band Edge Test Data CH-High**

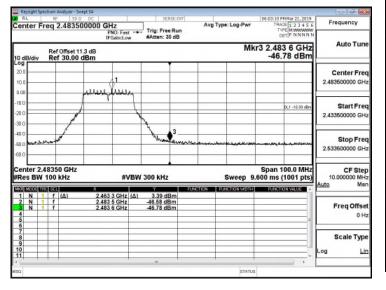


# 802.11n\_HT40 **Band Edge Test Data CH-Low**

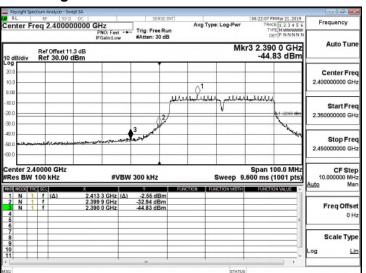


### **Band Edge Test Data CH-High**

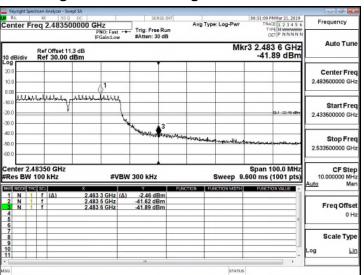


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




**Spurious Emis**sion\_802.11b\_20MHz\_Chain0\_2412MHz




Spurious Emission\_802.11b\_20MHz\_Chain0\_2437MHz




**Spurious Emis**sion\_802.11b\_20MHz\_Chain0\_2462MHz




**Spurious Emis**sion\_802.11g\_20MHz\_Chain0\_2412MHz




Spurious Emission\_802.11g\_20MHz\_Chain0\_2437MHz



Spurious Emission\_802.11g\_20MHz\_Chain0\_2462MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 49 of 120




Spurious Emission\_802.11n\_20MHz\_Chain0\_2412MHz




Spurious Emission\_802.11n\_20MHz\_Chain0\_2437MHz




Spurious Emission\_802.11n\_20MHz\_Chain0\_2462MHz




Spurious Emission 802.11n 40MHz Chain0 2422MHz



Spurious Emission\_802.11n\_40MHz\_Chain0\_2437MHz



Spurious Emission\_802.11n\_40MHz\_Chain0\_2452MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

#### **Standard Applicable** 11.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the RSS-Gen §8.10 Table 7.

And according to 15.33(a)(1) & RSS-Gen §6.13(a) for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-Gen §8.9 Table 5 & 6 Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 51 of 120



# 11.2 Measurement Equipment Used:


	966A Chamber								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020				
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019				
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020				
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020				
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020				
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019				
Loop Antenna	ETS.LINDGREN	6502	148045	10/08/2018	10/07/2019				
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020				
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020				
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019				
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R				
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R				
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R				
Software		e3 V6	.11-20180413						

NOTE: N.C.R refers to Not Calibrated Required.




### 11.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

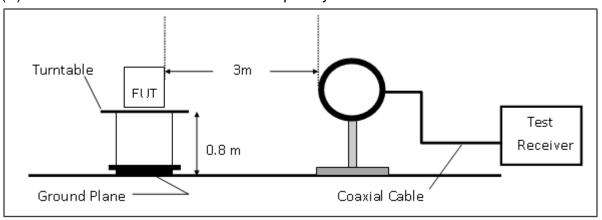


(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

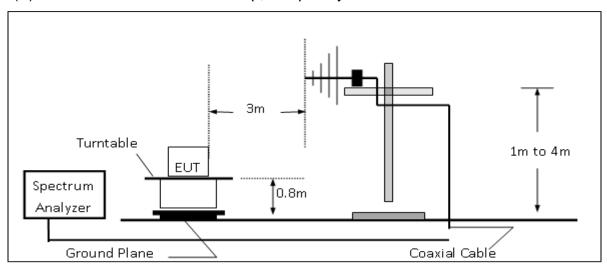

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

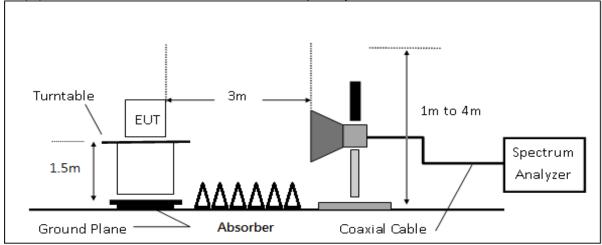

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 11.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 12. Repeat above procedures until all default test channel measured were complete.

s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: T190315W02-RP1

Page 54 of 120

## 11.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	G	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre\_Amplifier Gain(dB)

## 11.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

### 11.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm and for electronic


Inis document is issued by the Company subject to Terms and Conditions for Service printed overleaf, available on request or accessible at <a href="https://www.scs.com/terms">www.scs.com/terms</a> and conditions, into and for electronic Documents at tweeting the comment and pursification issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






# Radiated Band Edge Measurement Result (802.11b)

**Operation Band** :802.11b **Test Date** :2019-03-20 Fundamental Frequency :2412 MHz Temp./Humi. :24/62 :BE CH LOW **Operation Mode** Engineer :Jerry EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

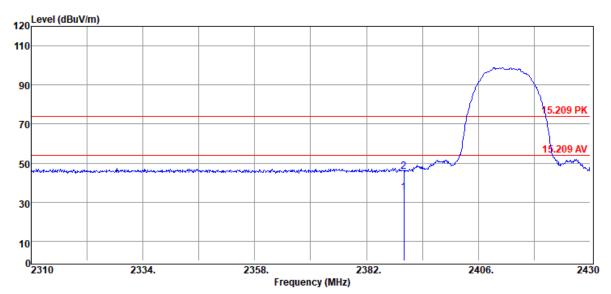

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2390.00	Average	38.14	-3.33	34.81	54.00	-19.19
2390.00	Peak	49.13	-3.33	45.80	74.00	-28.20


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11b :2412 MHz :BE CH LOW :H Plan

Test Date :2019-03-20
Temp./Humi. :24/62
Engineer :Jerry
Measurement Antenna Pol. :HORIZONTAL

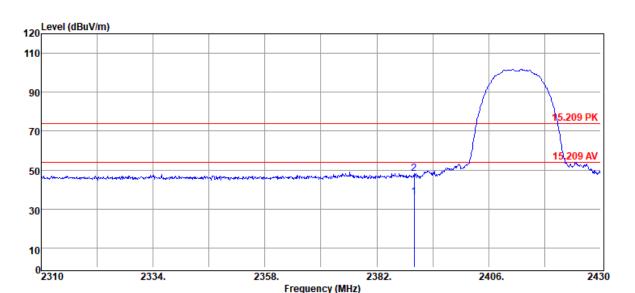

		The second secon					
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
2390.00	Average	39.39	-3.33	36.06	54.00	-17.94	
2390.00	Peak	51.57	-3.33	48.24	74.00	-25.76	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 咬非另有效明,此和生处果保料则键之类只含含,同時此类只像保留创产。未和生产领表入司案而选可,不可部份通剩。



:Jerry




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:802.11b :2462 MHz :BE CH HIGH :H Plan

Test Date :2019-03-20 Temp./Humi. :24/62


Measurement Antenna Pol. : VERTICAL

Engineer

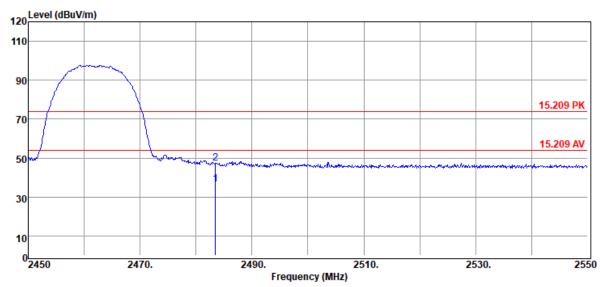


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	39.13	-2.72	36.41	54.00	-17.59
2483.50	Peak	50.19	-2.72	47.47	74.00	-26.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 咬非另有效明,此和生处果保料则键之类只含含,同時此类只像保留创产。未和生产领表入司案而选可,不可部份通剩。






:802.11b :2462 MHz :BE CH HIGH :H Plan Test Date :2019-03-20
Temp./Humi. :24/62
Engineer :Jerry
Measurement Antenna Pol. :HORIZONTAL

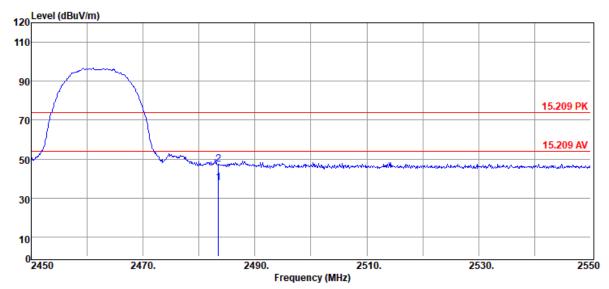

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	40.34	-2.72	37.62	54.00	-16.38
2483.50	Peak	50.07	-2.72	47.35	74.00	-26.65


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有物理,此報此社里得對副鍵之樣只會看,同時此樣只像保留仍長。太報此去經太公司皇而性可,不可無於過剰。





# Radiated Band Edge Measurement Result (802.11g)

**Operation Band** :802.11g **Test Date** :2019-03-20 Fundamental Frequency :2412 MHz Temp./Humi. :24/62 :BE CH LOW **Operation Mode** Engineer :Jerry EUT Pol. ·H Plan Measurement Antenna Pol. :VERTICAL

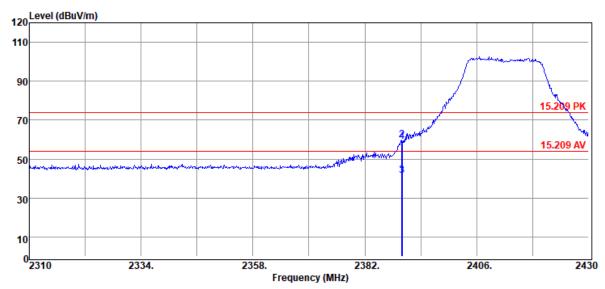


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2389.92	Average	44.92	-3.33	41.59	54.00	-12.41
2389.92	Peak	63.11	-3.33	59.78	74.00	-14.22
2390.00	Average	45.02	-3.33	41.69	54.00	-12.31
2390.00	Peak	62.20	-3.33	58.87	74.00	-15.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm and for electronic


format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






:802.11g :2412 MHz :BE CH LOW ·H Plan

**Test Date** :2019-03-20 Temp./Humi. :24/62 Engineer :Jerry Measurement Antenna Pol. :HORIZONTAL

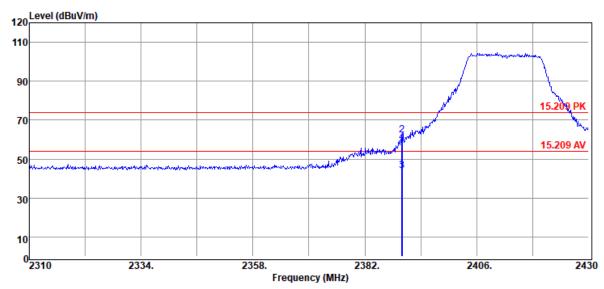

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2389.92	Average	46.90	-3.33	43.57	54.00	-10.43
2389.92	Peak	65.60	-3.33	62.27	74.00	-11.73
2390.00	Average	47.29	-3.33	43.96	54.00	-10.04
2390.00	Peak	62.02	-3.33	58.69	74.00	-15.31


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





:802.11g :2462 MHz :BE CH HIGH :H Plan Test Date :2019-03-20
Temp./Humi. :24/62
Engineer :Jerry


Measurement Antenna Pol. :HORIZONTAL

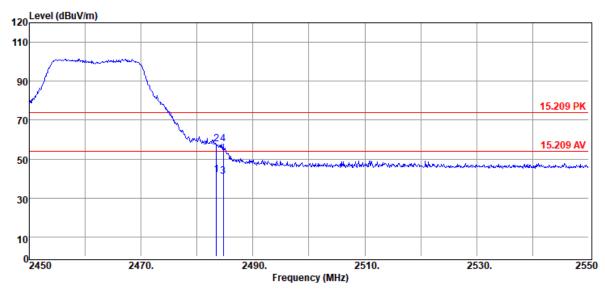

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	44.53	-2.72	41.81	54.00	-12.19
2483.50	Peak	60.33	-2.72	57.61	74.00	-16.39
2484.70	Average	43.92	-2.70	41.22	54.00	-12.78
2484.70	Peak	60.57	-2.70	57.87	74.00	-16.13

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and invited to the conditions of the invitation of the invi


format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






:802.11g :2462 MHz :BE CH HIGH ·H Plan

**Test Date** :2019-03-20 Temp./Humi. :24/62 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

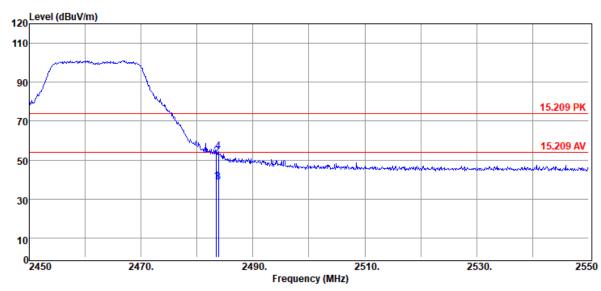

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	41.57	-2.72	38.85	54.00	-15.15
2483.50	Peak	54.76	-2.72	52.04	74.00	-21.96
2483.80	Average	41.51	-2.71	38.80	54.00	-15.20
2483.80	Peak	57.01	-2.71	54.30	74.00	-19.70


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






# Radiated Band Edge Measurement Result (802.11n20)

**Operation Band** :802.11n20 Test Date :2019-03-20 Fundamental Frequency :2412 MHz Temp./Humi. :24/62 **Operation Mode** :BE CH LOW Engineer :Jerry EUT Pol. ·H Plan Measurement Antenna Pol. :VERTICAL

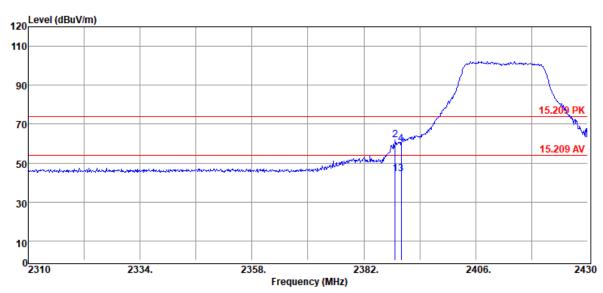

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2388.72	Average	47.71	-3.33	44.38	54.00	-9.62
2388.72	Peak	65.00	-3.33	61.67	74.00	-12.33
2390.00	Average	47.58	-3.33	44.25	54.00	-9.75
2390.00	Peak	63.32	-3.33	59.99	74.00	-14.01


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 成北又左约明,此如先处思虑韩国建立城中的各类,同或北极中的区域,是如此上海,人口更无效而,不可如必消费。






:802.11n20 :2412 MHz :BE CH LOW :H Plan Test Date :2019-03-20
Temp./Humi. :24/62
Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

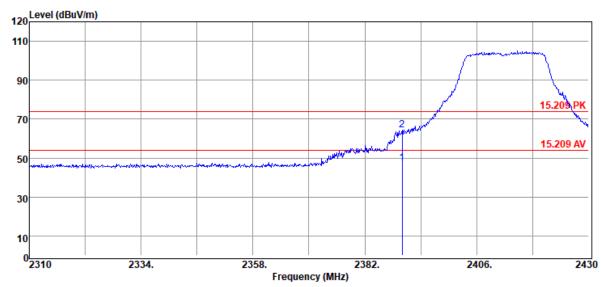


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2390.00	Average	50.86	-3.33	47.53	54.00	-6.47
2390.00	Peak	67.48	-3.33	64.15	74.00	-9.85


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有物理,此報此社里得對副鍵之樣只會看,同時此樣只像保留仍長。太報此去經太公司皇而性可,不可無於過剰。






:802.11n20 :2462 MHz :BE CH HIGH :H Plan Test Date :2019-03-20
Temp./Humi. :24/62
Engineer :Jerry
Measurement Antenna Pol. :HORIZONTAL



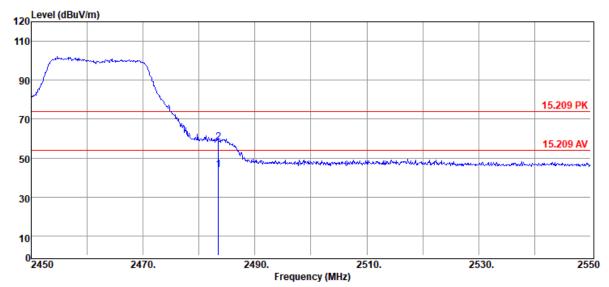

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	46.93	-2.72	44.21	54.00	-9.79
2483.50	Peak	61.00	-2.72	58.28	74.00	-15.72


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有物理,此報此社里得對副鍵之樣只會看,同時此樣只像保留仍長。太報此去經太公司皇而性可,不可無於過剰。






:802.11n20 :2462 MHz :BE CH HIGH ·H Plan

**Test Date** :2019-03-20 Temp./Humi. :24/62 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

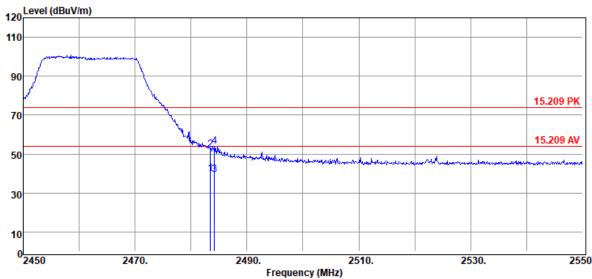

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
 2483.50	Average	42.74	-2.72	40.02	54.00	-13.98
2483.50	Peak	54.91	-2.72	52.19	74.00	-21.81
2484.20	Average	42.33	-2.71	39.62	54.00	-14.38
2484.20	Peak	56.62	-2.71	53.91	74.00	-20.09


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





# Radiated Band Edge Measurement Result (802.11n40)


**Operation Band** :802.11n40 Test Date :2019-03-20 Fundamental Frequency :2422 MHz Temp./Humi. :24/62 **Operation Mode** :BE CH LOW Engineer :Jerry EUT Pol. ·H Plan Measurement Antenna Pol. :VERTICAL

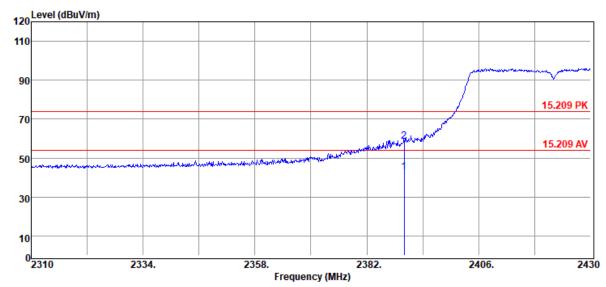

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2390.00	Average	46.00	-3.33	42.67	54.00	-11.33
2390.00	Peak	61.98	-3.33	58.65	74.00	-15.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm and for electronic






:802.11n40 :2422 MHz :BE CH LOW ·H Plan


**Test Date** :2019-03-20 Temp./Humi. :24/62 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

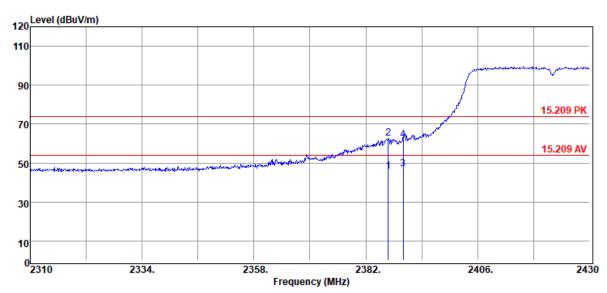

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2386.80	Average	49.09	-3.32	45.77	54.00	-8.23
2386.80	Peak	66.02	-3.32	62.70	74.00	-11.30
2390.00	Average	50.06	-3.33	46.73	54.00	-7.27
2390.00	Peak	65.03	-3.33	61.70	74.00	-12.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :802.11n40 Fundamental Frequency :2427 MHz Operation Mode :BE CH 4 EUT Pol. :H Plan


Test Date :2019-03-20
Temp./Humi. :24/62
Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

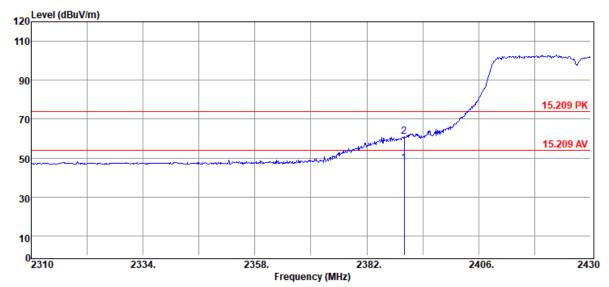

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2390.00	Average	50.85	-3.33	47.52	54.00	-6.48
2390.00	Peak	64.43	-3.33	61.10	74.00	-12.90


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 成北又左约明,此如先处思虑韩国建立城中的各类,同或北极中的区域,是如此上海,人口更无效而,不可如必消费。






**Operation Band** :802.11n40 Fundamental Frequency :2427 MHz **Operation Mode** :BE CH 4 EUT Pol. :H Plan

**Test Date** :2019-03-20 Temp./Humi. :24/62 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

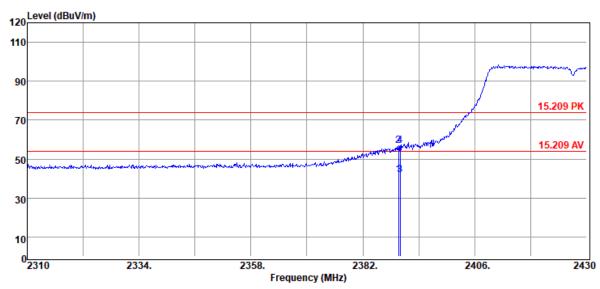

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2389.68	Average	45.33	-3.33	42.00	54.00	-12.00
2389.68	Peak	60.41	-3.33	57.08	74.00	-16.92
2390.00	Average	45.45	-3.33	42.12	54.00	-11.88
2390.00	Peak	60.09	-3.33	56.76	74.00	-17.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n40 Fundamental Frequency :2447 MHz Operation Mode :BE CH 8 EUT Pol. :H Plan


**Test Date** :2019-03-20 Temp./Humi. :24/62 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

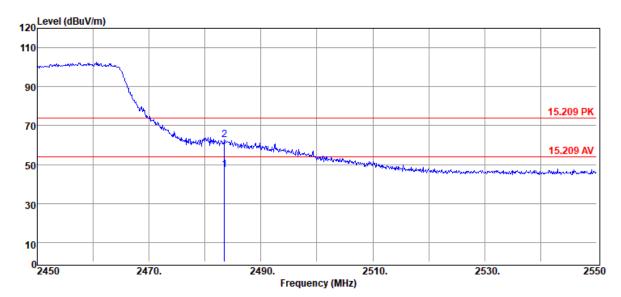

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	50.26	-2.72	47.54	54.00	-6.46
2483.50	Peak	65.41	-2.72	62.69	74.00	-11.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 :2447 MHz :BE CH 8 :H Plan

**Test Date** :2019-03-20 Temp./Humi. :24/62


Engineer :Jerry

Measurement Antenna Pol. :VERTICAL

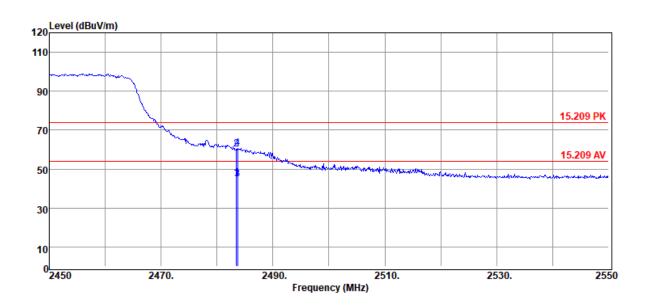

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	48.02	-2.72	45.30	54.00	-8.70
2483.50	Peak	63.01	-2.72	60.29	74.00	-13.71
2483.70	Average	47.71	-2.71	45.00	54.00	-9.00
2483.70	Peak	63.45	-2.71	60.74	74.00	-13.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 :2452 MHz :BE CH HIGH :H Plan


**Test Date** :2019-03-20 Temp./Humi. :24/62 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

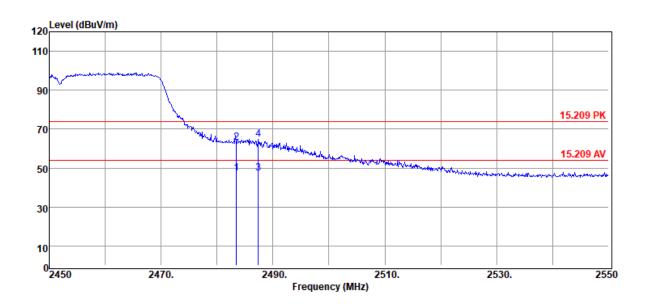

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	50.06	-2.72	47.34	54.00	-6.66
2483.50	Peak	66.01	-2.72	63.29	74.00	-10.71
2487.40	Average	49.84	-2.69	47.15	54.00	-6.85
2487.40	Peak	67.36	-2.69	64.67	74.00	-9.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 :2452 MHz :BE CH HIGH :H Plan

**Test Date** :2019-03-20 Temp./Humi. :24/62


Engineer :Jerry

Measurement Antenna Pol. :VERTICAL

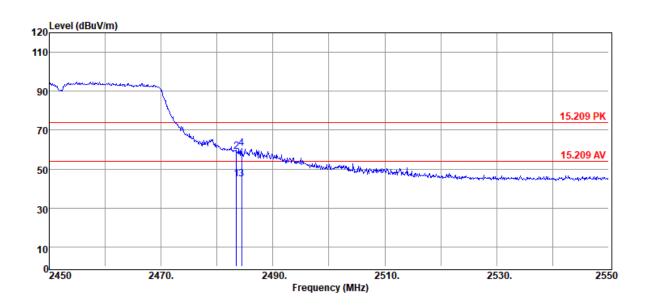

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	47.69	-2.72	44.97	54.00	-9.03
2483.50	Peak	61.83	-2.72	59.11	74.00	-14.89
2484.40	Average	47.42	-2.71	44.71	54.00	-9.29
2484.40	Peak	63.21	-2.71	60.50	74.00	-13.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Below 1GHz Worst-Case Data:** 

## Radiated Spurious Emission Measurement Result (802.11g)


**Operation Band** :802.11a **Test Date** :2019-03-27 Fundamental Frequency :2412 MHz Temp./Humi. :21/61

**Operation Mode** :TX CH LOW Engineer :Jerry EUT Pol. :H Plan :VERTICAL Measurement Antenna Pol.

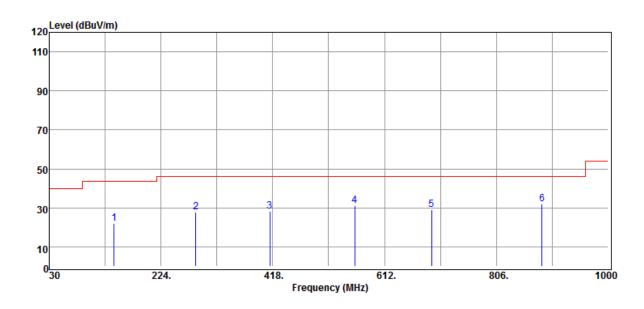

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
142.52	Peak	31.17	-9.19	21.98	43.50	-21.52
284.14	Peak	35.51	-7.74	27.77	46.00	-18.23
413.15	Peak	32.69	-4.38	28.31	46.00	-17.69
560.59	Peak	32.54	-1.50	31.04	46.00	-14.96
693.48	Peak	27.90	1.04	28.94	46.00	-17.06
885.54	Peak	27.68	4.39	32.07	46.00	-13.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g :2412 MHz :TX CH LOW ·H Plan


**Test Date** :2019-03-27 Temp./Humi. :21/61 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

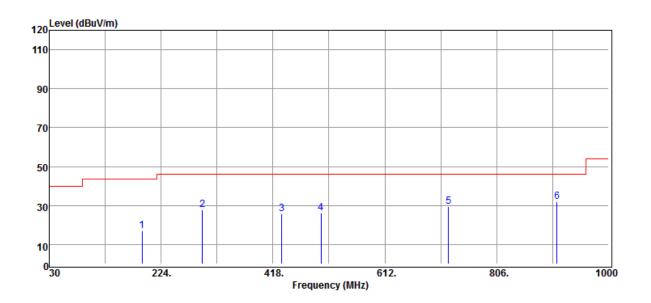

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
191.02	Peak	26.87	-10.04	16.83	43.50	-26.67
295.78	Peak	35.23	-7.61	27.62	46.00	-18.38
433.52	Peak	29.66	-3.72	25.94	46.00	-20.06
501.42	Peak	28.26	-2.09	26.17	46.00	-19.83
722.58	Peak	28.27	1.41	29.68	46.00	-16.32
910.76	Peak	27.12	4.78	31.90	46.00	-14.10


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11g Fundamental Frequency :2437 MHz **Operation Mode** :TX CH MID EUT Pol. ·H Plan

**Test Date** :2019-03-27 Temp./Humi. :21/61 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

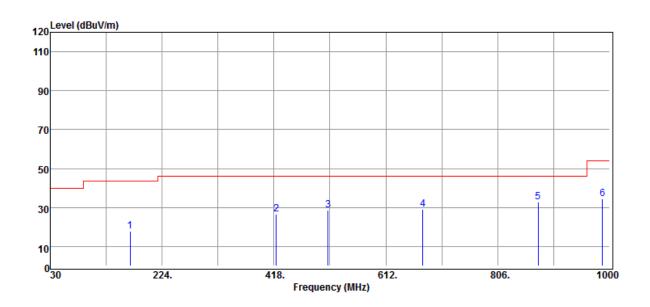

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
168.71	Peak	27.73	-9.98	17.75	43.50	-25.75
421.88	Peak	30.56	-4.16	26.40	46.00	-19.60
512.09	Peak	30.59	-1.94	28.65	46.00	-17.35
676.02	Peak	28.12	0.95	29.07	46.00	-16.93
875.84	Peak	28.86	4.07	32.93	46.00	-13.07
987.39	Peak	27.85	6.44	34.29	54.00	-19.71


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11g Fundamental Frequency :2437 MHz **Operation Mode** :TX CH MID EUT Pol. ·H Plan

**Test Date** :2019-03-27 Temp./Humi. :21/61 Engineer :Jerry Measurement Antenna Pol. :HORIZONTAL

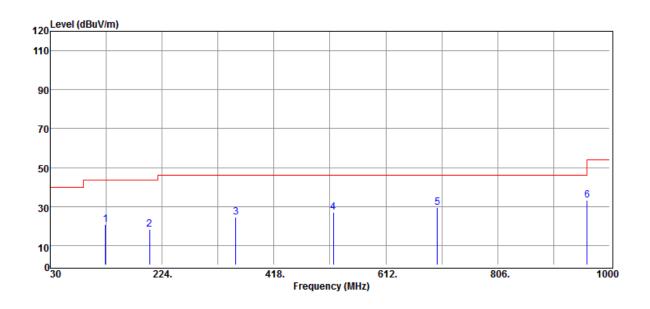

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
126.03	Peak	29.00	-8.31	20.69	43.50	-22.81
202.66	Peak	28.08	-9.77	18.31	43.50	-25.19
352.04	Peak	30.54	-6.09	24.45	46.00	-21.55
520.82	Peak	28.56	-1.38	27.18	46.00	-18.82
701.24	Peak	28.44	0.96	29.40	46.00	-16.60
961.20	Peak	27.24	5.94	33.18	54.00	-20.82


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g :2462 MHz :TX CH HIGH ·H Plan

**Test Date** :2019-03-27 Temp./Humi. :21/61 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

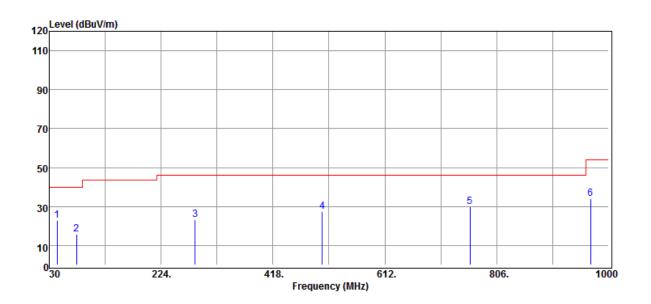

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
43.58	Peak	34.06	-11.40	22.66	40.00	-17.34
77.53	Peak	30.25	-14.54	15.71	40.00	-24.29
283.17	Peak	30.94	-7.72	23.22	46.00	-22.78
503.36	Peak	29.37	-2.10	27.27	46.00	-18.73
759.44	Peak	27.02	2.78	29.80	46.00	-16.20
968.96	Peak	27.66	6.55	34.21	54.00	-19.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g :2462 MHz :TX CH HIGH ·H Plan

**Test Date** :2019-03-27 Temp./Humi. :21/61


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

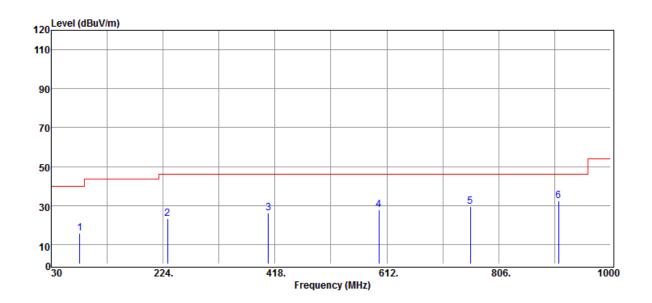

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
79.47	Peak	30.41	-14.63	15.78	40.00	-24.22
231.76	Peak	33.19	-10.04	23.15	46.00	-22.85
406.36	Peak	30.86	-4.56	26.30	46.00	-19.70
598.42	Peak	28.81	-0.91	27.90	46.00	-18.10
756.53	Peak	26.96	2.70	29.66	46.00	-16.34
909.79	Peak	27.76	4.78	32.54	46.00	-13.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Spurious Emission Measurement Result (802.11n\_HT40)

**Operation Band** :802.11n40 **Test Date** :2019-03-27


Fundamental Frequency Temp./Humi. :2422 MHz :21/61 **Operation Mode** :TX CH LOW Engineer :Jerry

EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

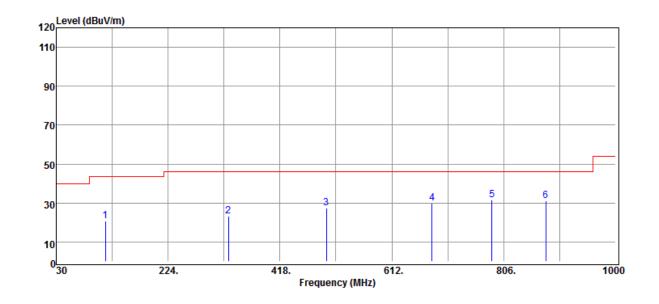

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
 115.36	Peak	29.46	-8.75	20.71	43.50	-22.79	
328.76	Peak	29.78	-6.37	23.41	46.00	-22.59	
498.51	Peak	29.33	-2.10	27.23	46.00	-18.77	
681.84	Peak	29.00	0.91	29.91	46.00	-16.09	
785.63	Peak	29.18	2.50	31.68	46.00	-14.32	
878.75	Peak	27.08	4.15	31.23	46.00	-14.77	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n40 Fundamental Frequency :2422 MHz **Operation Mode** :TX CH LOW

EUT Pol. :H Plan **Test Date** :2019-03-27


Temp./Humi. :21/61 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

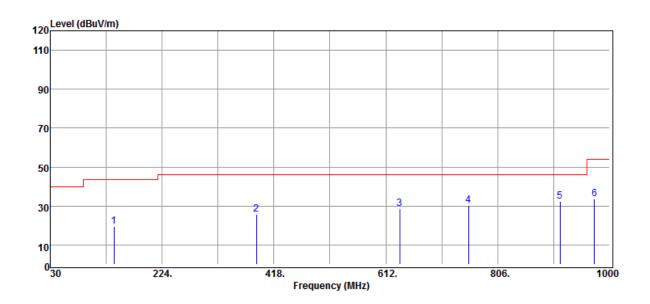

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
140.58	Peak	28.83	-9.18	19.65	43.50	-23.85
387.93	Peak	30.87	-5.27	25.60	46.00	-20.40
636.25	Peak	27.73	0.91	28.64	46.00	-17.36
755.56	Peak	27.45	2.68	30.13	46.00	-15.87
913.67	Peak	27.75	4.80	32.55	46.00	-13.45
973.81	Peak	27.13	6.64	33.77	54.00	-20.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n40 Fundamental Frequency :2437 MHz **Operation Mode** :TX CH MID EUT Pol. :H Plan


**Test Date** :2019-03-27 Temp./Humi. :21/61 Engineer :Jerry

Measurement Antenna Pol. :VERTICAL

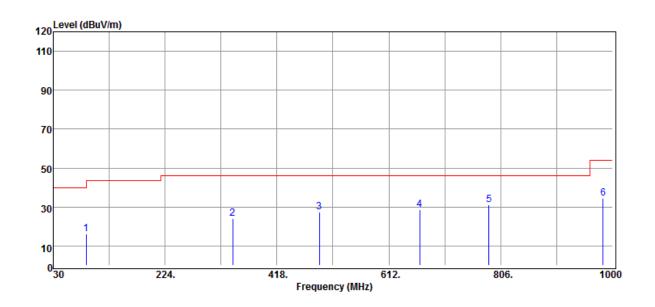

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
87.23	Peak	31.22	-15.01	16.21	40.00	-23.79	
341.37	Peak	30.41	-6.44	23.97	46.00	-22.03	
491.72	Peak	29.58	-2.18	27.40	46.00	-18.60	
665.35	Peak	27.55	0.94	28.49	46.00	-17.51	
785.63	Peak	28.64	2.50	31.14	46.00	-14.86	
983.51	Peak	27.90	6.49	34.39	54.00	-19.61	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n40 Fundamental Frequency :2437 MHz **Operation Mode** :TX CH MID

EUT Pol. :H Plan **Test Date** :2019-03-27


Temp./Humi. :21/61 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

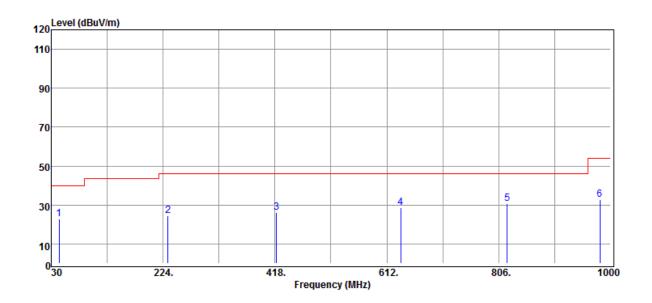

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	_
43.58	Peak	34.32	-11.40	22.92	40.00	-17.08	
232.73	Peak	34.31	-10.01	24.30	46.00	-21.70	
420.91	Peak	30.20	-4.20	26.00	46.00	-20.00	
636.25	Peak	27.71	0.91	28.62	46.00	-17.38	
820.55	Peak	26.79	3.98	30.77	46.00	-15.23	
981.57	Peak	26.23	6.57	32.80	54.00	-21.20	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 :2452 MHz :TX CH HIGH ·H Plan

**Test Date** :2019-03-27 Temp./Humi. :21/61 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

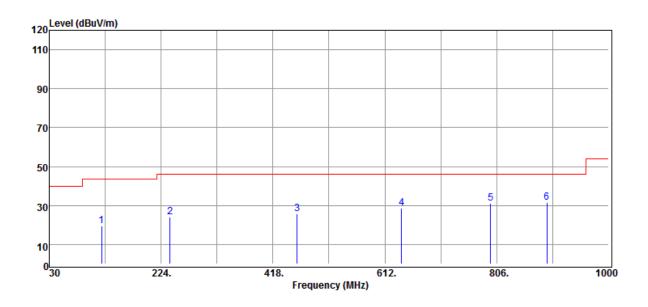

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
121.18	Peak	27.84	-8.32	19.52	43.50	-23.98
239.52	Peak	33.61	-9.68	23.93	46.00	-22.07
459.71	Peak	28.40	-2.76	25.64	46.00	-20.36
641.10	Peak	27.76	0.84	28.60	46.00	-17.40
795.33	Peak	28.65	2.62	31.27	46.00	-14.73
893.30	Peak	26.90	4.64	31.54	46.00	-14.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 :2452 MHz :TX CH HIGH ·H Plan

**Test Date** :2019-03-27 Temp./Humi. :21/61


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

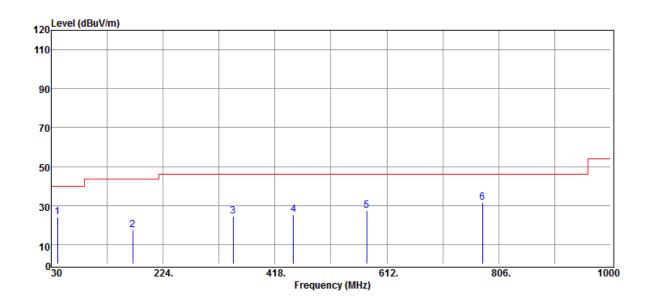

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
40.67	Peak	33.51	-9.47	24.04	40.00	-15.96
171.62	Peak	27.45	-10.21	17.24	43.50	-26.26
345.25	Peak	30.94	-6.37	24.57	46.00	-21.43
450.01	Peak	28.35	-3.03	25.32	46.00	-20.68
577.08	Peak	29.04	-1.45	27.59	46.00	-18.41
777.87	Peak	29.07	2.69	31.76	46.00	-14.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






## **Above 1GHz Data:**

## Radiated Spurious Emission Measurement Result (802.11 b)

**Operation Band** :802.11b **Test Date** :2019-03-20


Fundamental Frequency :2412 MHz Temp./Humi. :22/63 **Operation Mode** :TX CH LOW Engineer :Jerry

EUT Pol. :H Plan :VERTICAL Measurement Antenna Pol.

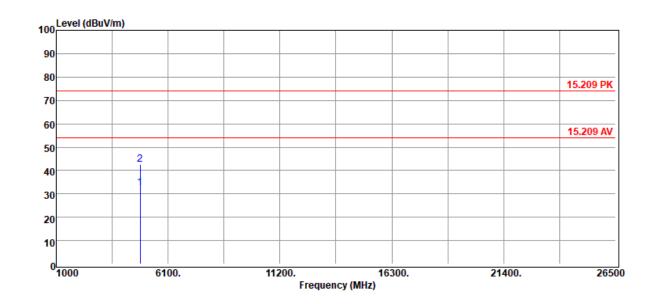

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4824.00	Average	29.37	3.02	32.39	54.00	-21.61
4824.00	Peak	39.40	3.02	42.42	74.00	-31.58


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11b Fundamental Frequency :2412 MHz Operation Mode :TX CH LOW EUT Pol. ·H Plan

**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry Measurement Antenna Pol. :HORIZONTAL

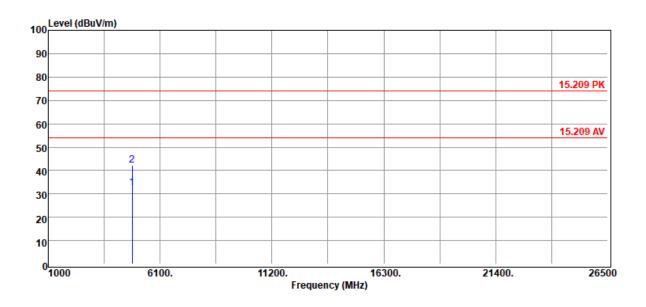

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4824.00	Average	29.53	3.02	32.55	54.00	-21.45
4824.00	Peak	39.21	3.02	42.23	74.00	-31.77


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :802.11b
Fundamental Frequency :2437 MHz
Operation Mode :TX CH MID
EUT Pol. :H Plan

Test Date :2019-03-20
Temp./Humi. :22/63
Engineer :Jerry
Measurement Antenna Pol. :VERTICAL

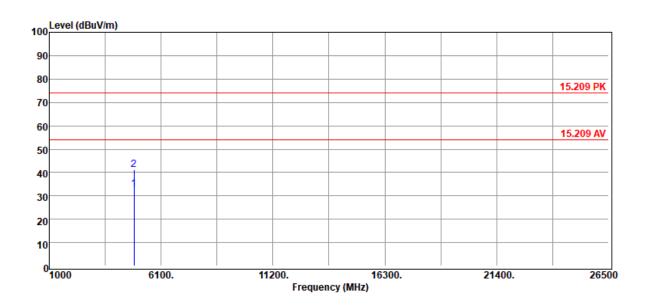

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4874.00	Average	29.59	3.36	32.95	54.00	-21.05
4874.00	Peak	37.98	3.36	41.34	74.00	-32.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 咬非另有效明,此和生处果保料则键之类只含含,同味此类只像保留创产。未和生产领表入司案而选可,不可部份通剩。






**Operation Band** :802.11b Fundamental Frequency :2437 MHz **Operation Mode** :TX CH MID EUT Pol. ·H Plan


**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

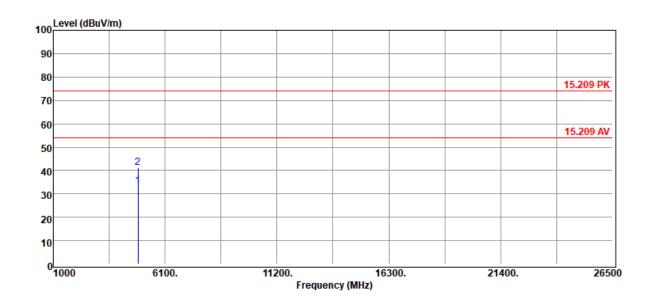

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4874.00	Average	29.75	3.36	33.11	54.00	-20.89	-
4874.00	Peak	37.74	3.36	41.10	74.00	-32.90	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :802
Fundamental Frequency :246
Operation Mode :TX
EUT Pol. :H F


:802.11b :2462 MHz :TX CH HIGH :H Plan Test Date :2019-03-20
Temp./Humi. :22/63
Engineer :Jerry

Measurement Antenna Pol. :VERTICAL

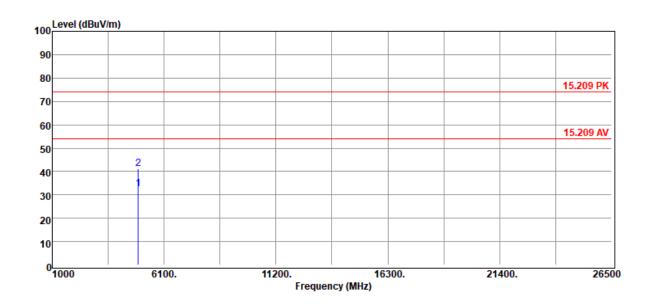

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4924.00	Average	28.75	3.93	32.68	54.00	-21.32
4924.00	Peak	37.31	3.93	41.24	74.00	-32.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 咬非另有效明,此和生处果保料则键之类只含含,同味此类只像保留创产。未和生产领表入司案而选可,不可部份通剩。






:802.11b :2462 MHz :TX CH HIGH ·H Plan

**Test Date** :2019-03-20 Temp./Humi. :22/63


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

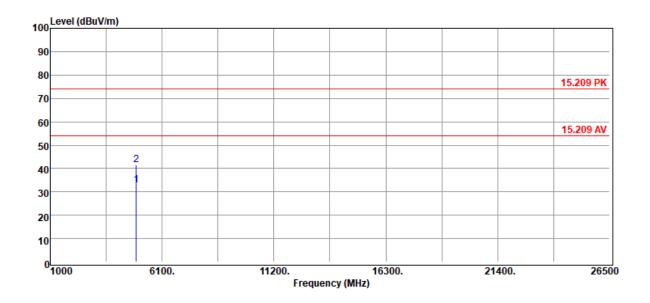

F	req.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
ľ	ИHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
49	24.00	Average	28.95	3.93	32.88	54.00	-21.12
49	24.00	Peak	37.54	3.93	41.47	74.00	-32.53


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Spurious Emission Measurement Result (802.11 g)

**Operation Band** :802.11g **Test Date** :2019-03-20 Fundamental Frequency :2412 MHz Temp./Humi. :22/63 :TX CH LOW Operation Mode Engineer :Jerry Measurement Antenna Pol. EUT Pol. ·H Plan :VERTICAL

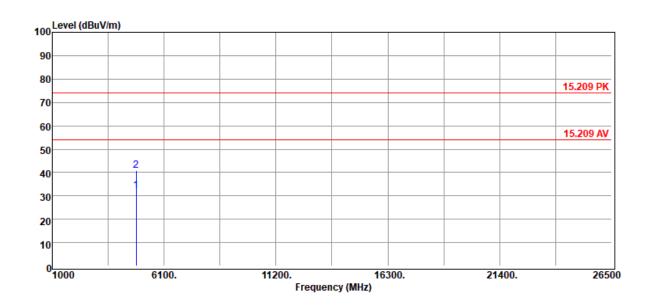

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4824.00	Average	29.19	3.02	32.21	54.00	-21.79	
4824.00	Peak	37.92	3.02	40.94	74.00	-33.06	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11g Fundamental Frequency :2412 MHz **Operation Mode** :TX CH LOW EUT Pol. ·H Plan


**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

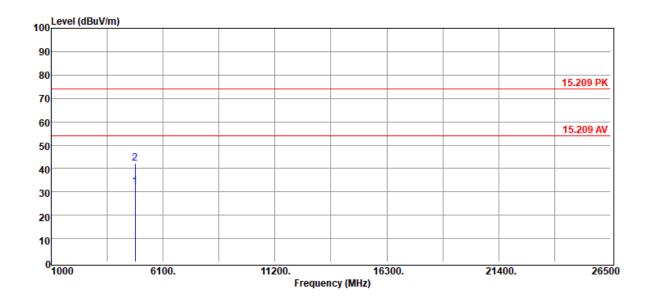

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4824.00	Average	29.28	3.02	32.30	54.00	-21.70	_
4824.00	Peak	39.27	3.02	42.29	74.00	-31.71	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





**Operation Band** :802.11g Fundamental Frequency :2437 MHz **Operation Mode** :TX CH MID EUT Pol. ·H Plan


**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

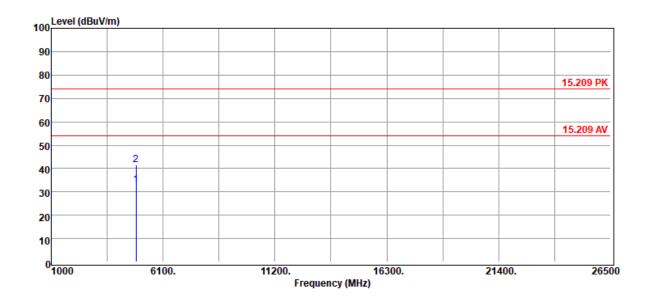

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4874.00	Average	29.52	3.36	32.88	54.00	-21.12	_
4874.00	Peak	38.08	3.36	41.44	74.00	-32.56	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm and for electronic






:802.11g :2437 MHz :TX CH MID ·H Plan


**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

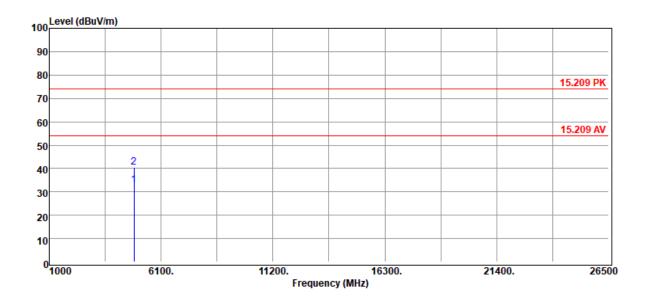


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4874.00	Average	29.59	3.36	32.95	54.00	-21.05
4874.00	Peak	37.14	3.36	40.50	74.00	-33.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





:802.11g :2462 MHz :TX CH HIGH :H Plan Test Date :2019-03-20
Temp./Humi. :22/63
Engineer :Jerry
Measurement Antenna Pol. :VERTICAL

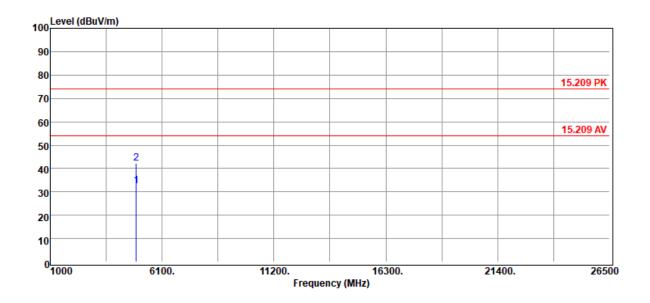


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4924.00	Average	28.54	3.93	32.47	54.00	-21.53
4924.00	Peak	38.26	3.93	42.19	74.00	-31.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 咬非另有效明,此和生处果保料则键之类只含含,同味此类只像保留创产。未和生产领表入司案而选可,不可部份通剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction






:802.11g :2462 MHz :TX CH HIGH ·H Plan


**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

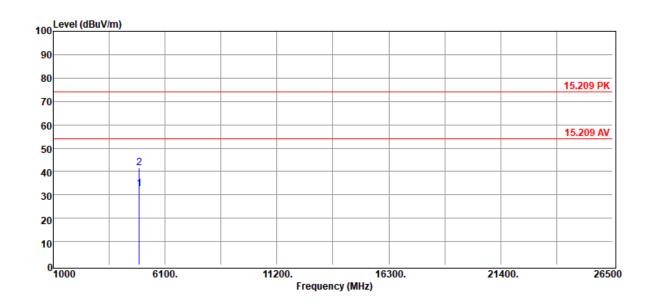

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m	_	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4924.00	Average	28.56	3.93	32.49	54.00	-21.51	
4924.00	Peak	37.57	3.93	41.50	74.00	-32.50	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Spurious Emission Measurement Result (802.11n\_HT20)

**Operation Band** :802.11n20 **Test Date** :2019-03-20 Fundamental Frequency Temp./Humi. :2412 MHz :22/63 :TX CH LOW Operation Mode Engineer :Jerry EUT Pol. ·H Plan Measurement Antenna Pol. :VERTICAL

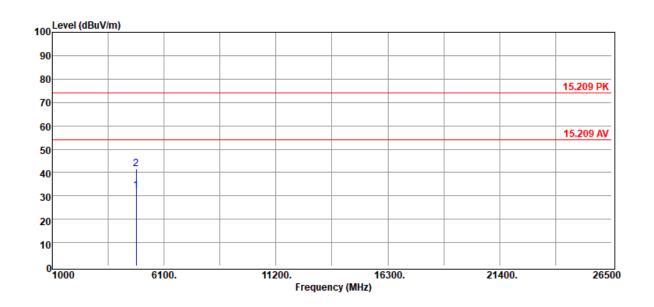

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4824.00	Average	29.02	3.02	32.04	54.00	-21.96	
4824.00	Peak	38.51	3.02	41.53	74.00	-32.47	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n20 Fundamental Frequency :2412 MHz Operation Mode :TX CH LOW EUT Pol. ·H Plan


**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

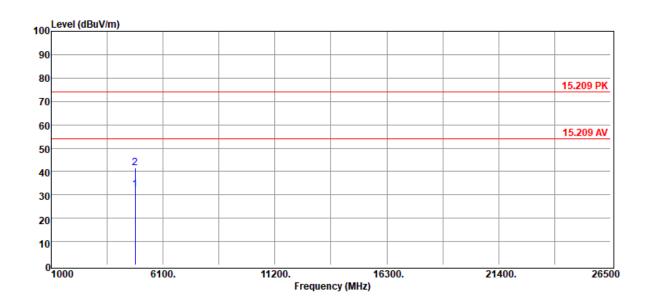

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m	_	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4824.00	Average	29.11	3.02	32.13	54.00	-21.87	_
4824.00	Peak	38.57	3.02	41.59	74.00	-32.41	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :802.11n20 Fundamental Frequency :2437 MHz Operation Mode :TX CH MID EUT Pol. :H Plan

Test Date :2019-03-20
Temp./Humi. :22/63
Engineer :Jerry
Measurement Antenna Pol. :VERTICAL

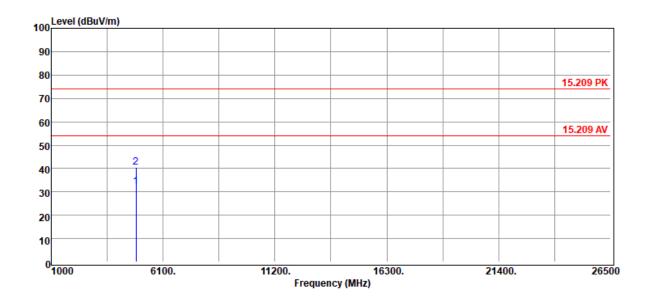

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4874.00	Average	28.93	3.36	32.29	54.00	-21.71	_
4874.00	Peak	37.25	3.36	40.61	74.00	-33.39	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 咬非另有效明,此和生处果保料则键之类只含含,同味此类只像保留创产。未和生产领表入司案而选可,不可部份通剩。






:802.11n20 :2437 MHz :TX CH MID ·H Plan

**Test Date** :2019-03-20 Temp./Humi. :22/63


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

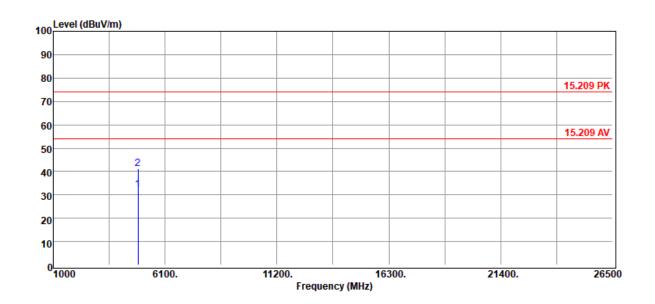

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m	_	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4874.00	Average	28.84	3.36	32.20	54.00	-21.80	_
4874.00	Peak	37.70	3.36	41.06	74.00	-32.94	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n20 :2462 MHz :TX CH HIGH ·H Plan

**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

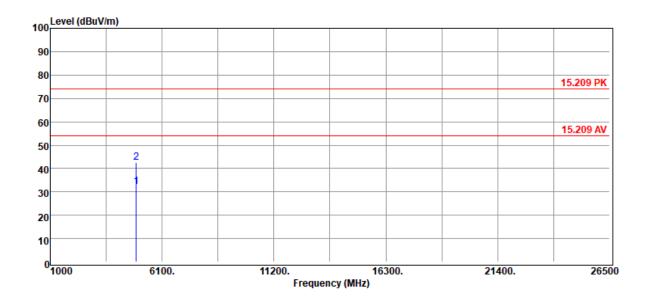

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4924.00	Average	28.36	3.93	32.29	54.00	-21.71
4924.00	Peak	38.63	3.93	42.56	74.00	-31.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n20 :2462 MHz :TX CH HIGH ·H Plan

**Test Date** :2019-03-20 Temp./Humi. :22/63


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

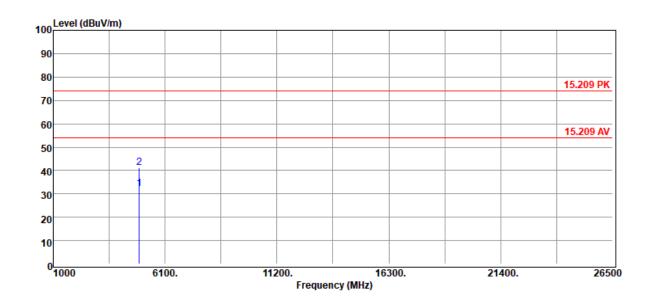

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4924.00	Average	28.31	3.93	32.24	54.00	-21.76	_
4924.00	Peak	37.31	3.93	41.24	74.00	-32.76	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






## Radiated Spurious Emission Measurement Result (802.11n\_HT40)

**Operation Band** :802.11n40 **Test Date** :2019-03-20 Fundamental Frequency :2422 MHz Temp./Humi. :22/63 :TX CH LOW Operation Mode Engineer :Jerry EUT Pol. ·H Plan Measurement Antenna Pol. :VERTICAL

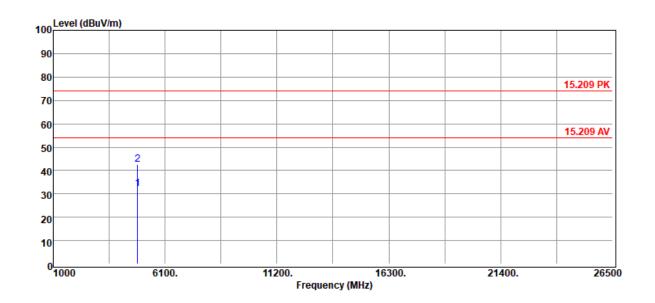

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4844.00	Average	29.01	3.04	32.05	54.00	-21.95	_
4844.00	Peak	39.50	3.04	42.54	74.00	-31.46	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n40 Fundamental Frequency :2422 MHz **Operation Mode** :TX CH LOW EUT Pol. ·H Plan


**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

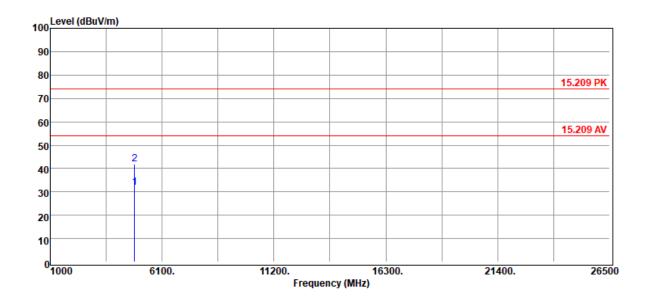

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4844.00	Average	28.97	3.04	32.01	54.00	-21.99
4844.00	Peak	38.78	3.04	41.82	74.00	-32.18


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n40 Fundamental Frequency :2427 MHz Operation Mode :TX CH 4 EUT Pol. :H Plan

**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

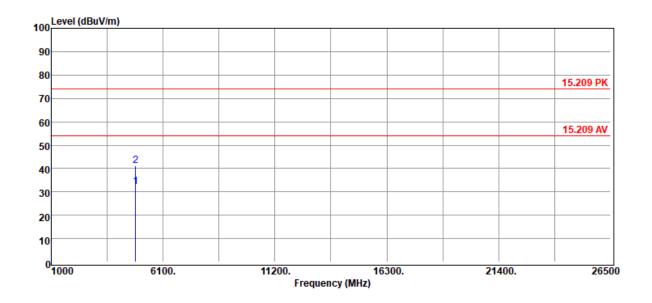

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4854.00	Average	28.93	3.12	32.05	54.00	-21.95	
4854.00	Peak	38.06	3.12	41.18	74.00	-32.82	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 :2427 MHz :TX CH 4 :H Plan

**Test Date** :2019-03-20 Temp./Humi. :22/63


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

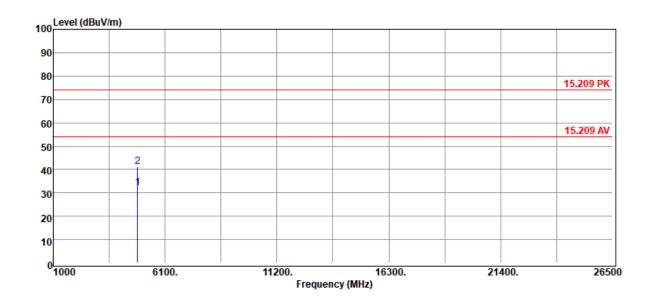

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4854.00	Average	28.93	3.12	32.05	54.00	-21.95
4854.00	Peak	37.95	3.12	41.07	74.00	-32.93


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n40 Fundamental Frequency :2437 MHz Operation Mode :TX CH MID EUT Pol. ·H Plan

**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

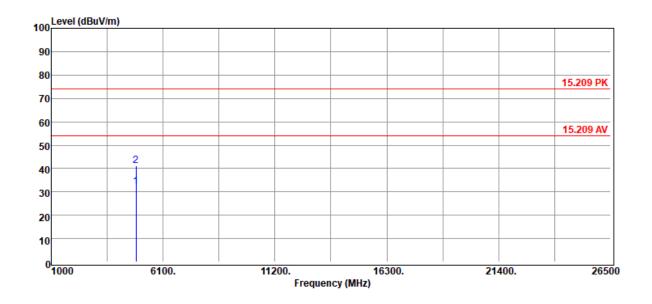

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m	_	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4874.00	Average	28.83	3.36	32.19	54.00	-21.81	
4874.00	Peak	37.77	3.36	41.13	74.00	-32.87	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n40 Fundamental Frequency :2437 MHz Operation Mode :TX CH MID EUT Pol. ·H Plan


**Test Date** :2019-03-20 Temp./Humi. :22/63 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

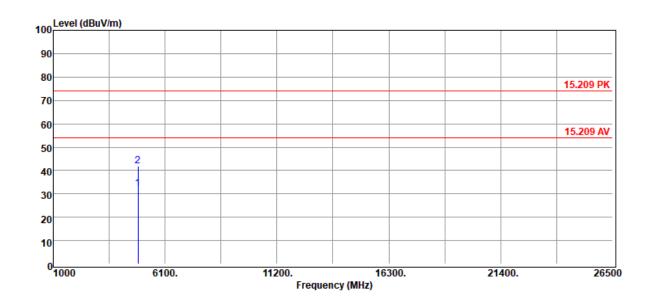

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4874.00	Average	28.72	3.36	32.08	54.00	-21.92	-
4874.00	Peak	38.37	3.36	41.73	74.00	-32.27	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n40 Fundamental Frequency :2447 MHz **Operation Mode** :TX CH 8 EUT Pol. :H Plan

**Test Date** :2019-03-21 Temp./Humi. :22/63 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

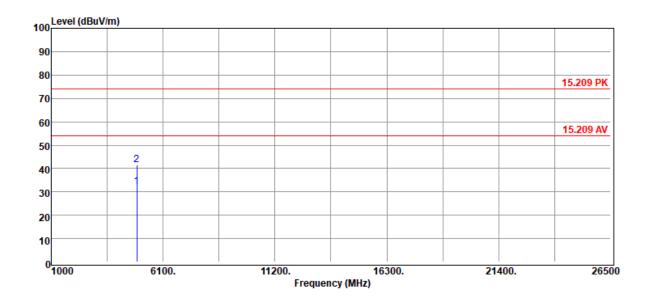

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m	-	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4894.00	Average	28.65	3.54	32.19	54.00	-21.81	_
4894.00	Peak	37.99	3.54	41.53	74.00	-32.47	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n40 Fundamental Frequency :2447 MHz **Operation Mode** :TX CH 8 EUT Pol. :H Plan


**Test Date** :2019-03-21 Temp./Humi. :22/63 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

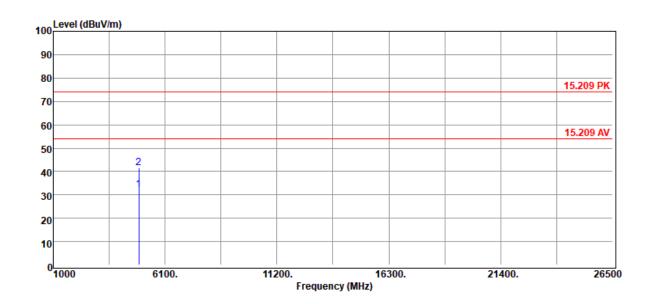

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4894.00	Average	28.59	3.54	32.13	54.00	-21.87	_
4894.00	Peak	37.93	3.54	41.47	74.00	-32.53	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :8
Fundamental Frequency :2
Operation Mode :5
EUT Pol. :1

:802.11n40 :2452 MHz :TX CH HIGH :H Plan Test Date :2019-03-21
Temp./Humi. :22/63
Engineer :Jerry
Measurement Antenna Pol. :VERTICAL

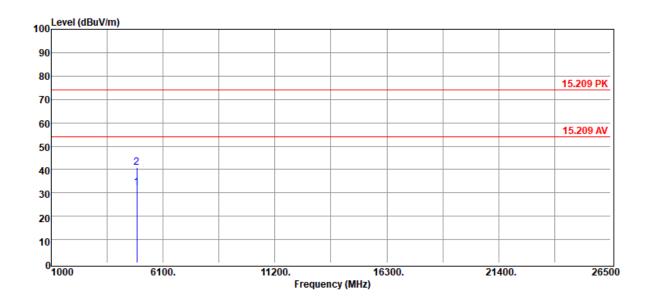

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4904.00	Average	28.48	3.64	32.12	54.00	-21.88
4904.00	Peak	37.23	3.64	40.87	74.00	-33.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留仍天。太報告未經未入司業而許可,不可部份複製。






**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n40 :2452 MHz :TX CH HIGH ·H Plan

**Test Date** :2019-03-21 Temp./Humi. :22/63 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

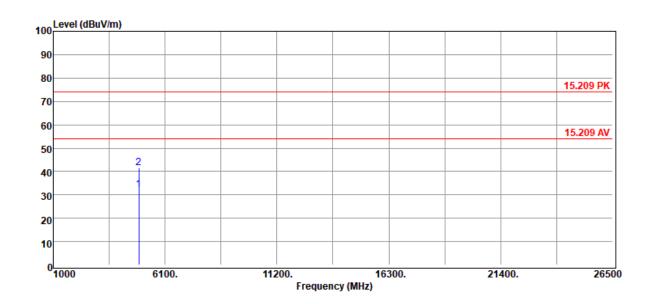

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m	-	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
4904.00	Average	28.47	3.64	32.11	54.00	-21.89	
4904.00	Peak	37.76	3.64	41.40	74.00	-32.60	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



12 POWER SPECTRAL DENSITY

#### **Standard Applicable** 12.1

Per Part 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


Per RSS-247 section 5.4 d

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

#### 12.2 **Measurement Equipment Used**

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019	
DC Block	PASTERNACK	PE8210	RF29	02/26/2019	02/25/2020	
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020	

#### 12.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 12.4 Measurement Procedure

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

# As per FCC KDB 662911 D01

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi.

(i) If transmit signals are correlated, then Directional gain

=  $10 \log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})^2/N_{ANT}] dBi$ 

[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.].

s otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: T190315W02-RP1

Page 117 of 120

### 12.5 Measurement Result

POWER DENSITY 802.11b_Ch0							
Freq.	PSD	Limit	Result				
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Resuit				
2412	-8.72	8.00	PASS				
2437	-6.77	8.00	PASS				
2462	-9.23	8.00	PASS				

POWER DENSITY 802.11g_Ch0						
Freq.	PSD	Limit	Result			
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result			
2412	-10.88	8.00	PASS			
2437	-9.51	8.00	PASS			
2462	-11.28	8.00	PASS			

	POWER DENSITY 802.11n HT20_Ch0							
Freq.	PSD	Limit	Result					
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Resuit					
2412	-12.40	8.00	PASS					
2437	-10.01	8.00	PASS					
2462	-11.97	8.00	PASS					

POWER DENSITY 802.11n HT40_Ch0						
Freq.	PSD	Limit	Docult			
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result			
2422	-17.95	8.00	PASS			
2437	-13.88	8.00	PASS			
2452	-18.08	8.00	PASS			

# **Note**

Cable Loss 11.30 dΒ


\*Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Offices where stated the Builds shown in this set report felier only to the sample(s) tested and swins in the sample(s) are feliatine for 90 days only. Per part of 18 page 1 instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




# 802.11b **Power Spectral Density Test Plot (CH-Low)**




# **Power Spectral Density Test Plot (CH-Mid)**




#### Power Spectral Density Test Plot (CH-High)




# 802.11g **Power Spectral Density Test Plot (CH-Low)**



# Power Spectral Density Test Plot (CH-Mid)



### Power Spectral Density Test Plot (CH-High)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




### 802.11n\_HT20


### Power Spectral Density Test Plot (CH-Low)



## Power Spectral Density Test Plot (CH-Mid)




### Power Spectral Density Test Plot (CH-High)




### 802.11n\_HT40


### Power Spectral Density Test Plot (CH-Low)




## Power Spectral Density Test Plot (CH-Mid)



### Power Spectral Density Test Plot (CH-High)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SGS

# 13 ANTENNA REQUIREMENT

# 13.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

# 13.2 Antenna Connected Construction

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 欧北早女福明,北朝先社県改教副建立株里名書。同時北接里は仅向20年。土和先士領土八司東五代司,五司和公清朝。