

MEASUREMENT REPORT

FCC PART 15.407 / RSS-247 WLAN 802.11a/n/ac

FCC ID: T2C-CP960
IC 10741A-CP960
APPLICANT: YEALINK(XIAMEN) NETWORK TECHNOLOGY
CO.,LTD

Application Type: Certification
Product: HD IP Conference Phone
Model No.: CP960
Brand Name: YEALINK
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15.407
IC Rule(s): RSS-247 Issue 2
Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v01r04,
KDB 644545 D03v01
Test Date: May 05, 2017 ~ May 31, 2017

Reviewed By : Sunny Sun
(Sunny Sun)
Approved By : Marlinchen
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v01r04. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1705RSU00804	Rev. 01	Initial Report	06-12-2017	Valid

CONTENTS

Description	Page
§2.1033 General Information	6
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Working Frequencies for this report	9
2.4. Test Mode	10
2.5. Description of Test Software	11
2.6. Device Capabilities	13
2.7. Test Configuration	15
2.8. EMI Suppression Device(s)/Modifications	15
2.9. Labeling Requirements.....	15
3. DESCRIPTION OF TEST	16
3.1. Evaluation Procedure	16
3.2. AC Line Conducted Emissions	16
3.3. Radiated Emissions	17
4. ANTENNA REQUIREMENTS.....	18
5. TEST EQUIPMENT CALIBRATION DATE	19
6. MEASUREMENT UNCERTAINTY.....	20
7. TEST RESULT	21
7.1. Summary	21
7.2. 26dB Bandwidth Measurement.....	23
7.2.1. Test Limit	23
7.2.2. Test Procedure used.....	23
7.2.3. Test Setting.....	23
7.2.4. Test Setup	23
7.2.5. Test Result.....	24
7.3. 6dB Bandwidth Measurement.....	41
7.3.1. Test Limit	41
7.3.2. Test Procedure used.....	41
7.3.3. Test Setting.....	41

7.3.4. Test Setup	41
7.3.5. Test Result.....	42
7.4. Operation Frequency Range of 26dBc Bandwidth Measurement.....	47
7.4.1. Test Limit	47
7.4.2. Test Procedure used.....	47
7.4.3. Test Setting.....	47
7.4.4. Test Setup	47
7.4.5. Test Result.....	48
7.5. Output Power Measurement	50
7.5.1. Test Limit	50
7.5.2. Test Procedure Used	50
7.5.3. Test Setting.....	50
7.5.4. Test Setup	51
7.5.5. Test Result.....	51
7.6. Power Spectral Density Measurement.....	57
7.6.1. Test Limit	57
7.6.2. Test Procedure Used	57
7.6.3. Test Setting.....	57
7.6.4. Test Setup	58
7.6.5. Test Result.....	59
7.7. Frequency Stability Measurement.....	77
7.7.1. Test Limit	77
7.7.2. Test Procedure Used	77
7.7.3. Test Setup	77
7.7.4. Test Result.....	78
7.8. Radiated Spurious Emission Measurement	79
7.8.1. Test Limit	79
7.8.2. Test Procedure Used	79
7.8.3. Test Setting.....	79
7.8.4. Test Setup	80
7.8.5. Test Result.....	82
7.9. Radiated Restricted Band Edge Measurement	151
7.9.1. Test Limit	151
7.9.2. Test Result.....	153
7.10. AC Conducted Emissions Measurement.....	267
7.10.1. Test Limit	267
7.10.2. Test Procedure	267
7.10.3. Test Setup	268
7.10.4. Test Result.....	269



8. CONCLUSION.....	271
--------------------	-----

§2.1033 General Information

Applicant:	YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD
Applicant Address:	309, 3th Floor, No.16, Yun Ding North Road, Huli District, Xiamen City, Fujian, P.R. China
Manufacturer:	YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD
Manufacturer Address:	309, 3th Floor, No.16, Yun Ding North Road, Huli District, Xiamen City, Fujian, P.R. China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
FCC Registration No.:	809388
IC Registration No.:	11384A
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	HD IP Conference Phone
Model No.	CP960
Brand Name:	YEALINK
Wi-Fi Specification:	802.11a/b/g/n/ac
Bluetooth Version	v3.0 + HS, v4.0
DECT Specification:	DECT 6.0

2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20: 5180~5320MHz, 5500~5700MHz, 5745~5825MHz For 802.11ac-VHT20: 5180~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40: 5190~5310MHz, 5510~5670MHz, 5755~5795MHz For 802.11ac-VHT40: 5190~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz, 5775MHz
Type of Modulation:	802.11a/n/ac: OFDM
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps 802.11ac: up to 433.3Mbps
Maximum Average Output Power:	802.11a: 9.23dBm 802.11n-HT20: 7.62dBm 802.11n-HT40: 7.79dBm 802.11ac-VHT20: 6.52dBm 802.11ac-VHT40: 6.35dBm 802.11ac-VHT80: 6.35dBm
Antenna Gain	2.19dBi

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
151	5755 MHz	159	5795 MHz	--	--

802.11ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

Note: The device can't operate in 5600~5650 MHz band in Canada (The frequency of blue font).

2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.11a
	Mode 2: Transmit by 802.11n-HT20
	Mode 3: Transmit by 802.11n-HT40
	Mode 4: Transmit by 802.11ac-VHT20
	Mode 5: Transmit by 802.11ac-VHT40
	Mode 6: Transmit by 802.11ac-VHT80

2.5. Description of Test Software

The test utility software used during testing was “Telnet.exe”.

Power Parameter Value

Mode	Channel No.	Frequency (MHz)	Power Parameter Value	Mode	Channel No.	Frequency (MHz)	Power Parameter Value
802.11a	36	5180	14.0	802.11 n-HT20	36	5180	13.0
	44	5220	14.0		44	5220	13.0
	48	5240	14.0		48	5240	13.0
	52	5260	14.0		52	5260	13.0
	60	5300	14.0		60	5300	13.0
	64	5320	14.0		64	5320	13.0
	100	5500	14.0		100	5500	13.0
	116	5580	14.0		116	5580	14.0
	120	5600	14.0		120	5600	13.0
	140	5700	14.0		140	5700	13.0
	149	5745	14.0		149	5745	13.0
	157	5785	14.0		157	5785	13.0
	165	5825	14.0		165	5825	13.0
802.11 n-HT40	38	5190	13.0	802.11 ac-VHT20	36	5180	12.0
	46	5230	13.0		44	5220	12.0
	54	5270	13.0		48	5240	12.0
	62	5310	13.0		52	5260	12.0
	102	5510	13.0		60	5300	12.0
	110	5550	13.0		64	5320	12.0
	118	5590	13.0		100	5500	12.0
	134	5670	13.0		120	5600	12.0
	151	5755	13.0		116	5580	12.0
	159	5795	13.0		140	5700	12.0
	--	--	--		144	5720	12.0
	--	--	--		149	5745	12.0
	--	--	--		157	5785	12.0
	--	--	--		165	5825	12.0

Mode	Channel No.	Frequency (MHz)	Power Parameter Value	Mode	Channel No.	Frequency (MHz)	Power Parameter Value
802.11 ac-VHT40	38	5190	12.0	802.11 ac-VHT80	42	5210	12.0
	46	5230	12.0		58	5290	12.0
	54	5270	12.0		106	5530	12.0
	62	5310	12.0		122	5610	12.0
	102	5510	12.0		138	5690	12.0
	110	5550	12.0		155	5775	12.0
	118	5590	12.0		--	--	--
	134	5670	12.0		--	--	--
	142	5710	12.0		--	--	--
	151	5755	12.0		--	--	--
	159	5795	12.0		--	--	--


2.6. Device Capabilities

This device contains the following capabilities:


802.11a/b/g/n/ac Wi-Fi, Bluetooth (v3.0 + HS, v4.0) and DECT Device.

Note: 5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average per the guidance of Section B)2)b) of KDB 789033 D02v01r04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Test Mode	Duty Cycle
802.11a	93.05 %
802.11n-HT20	93.05 %
802.11n-HT40	90.27 %
802.11ac-VHT20	92.80 %
802.11ac-VHT40	86.83 %
802.11ac-VHT80	76.52 %

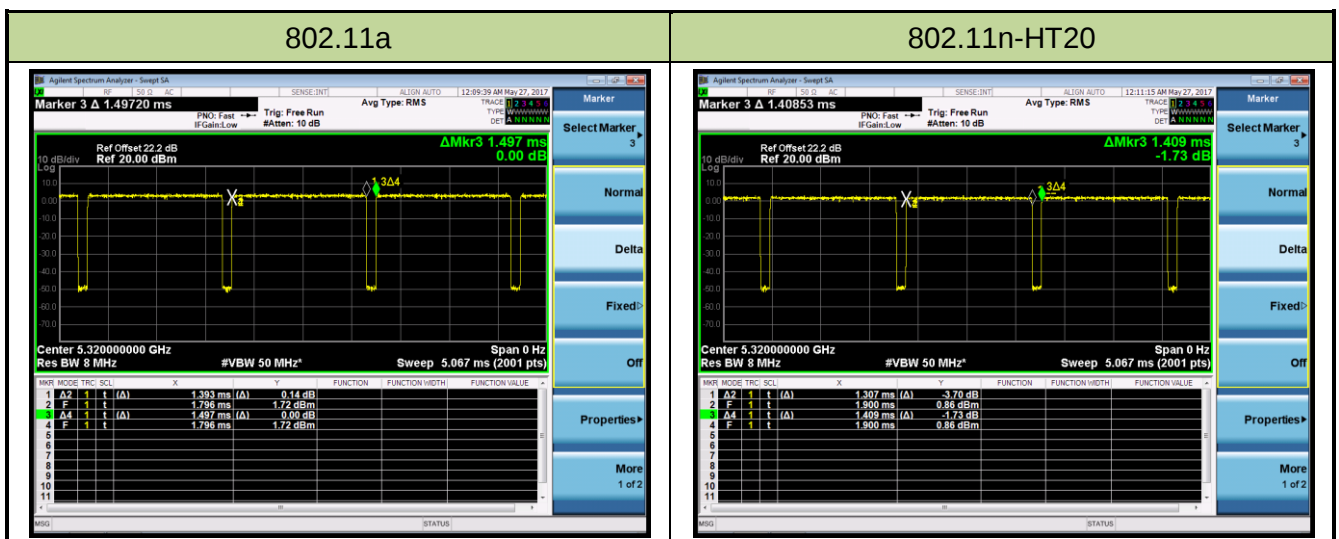


802.11n-HT40

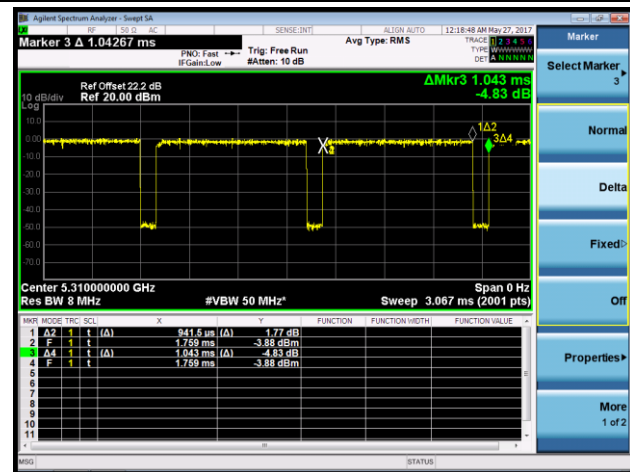


802.11ac-VHT20

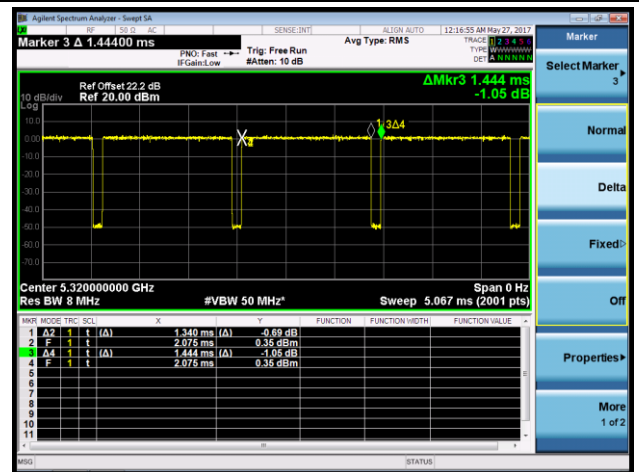

802.11ac-VHT40

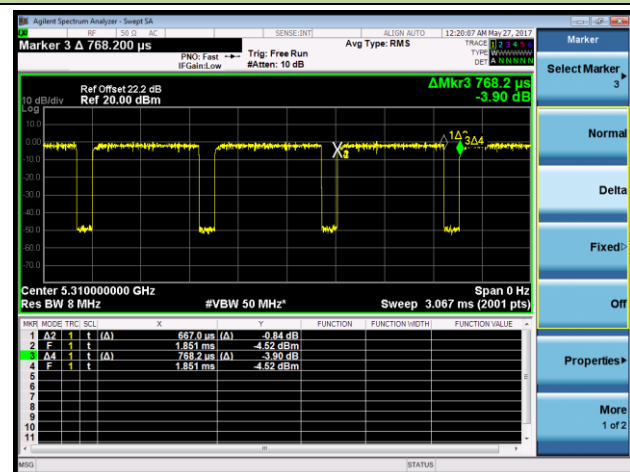

802.11ac-VHT80

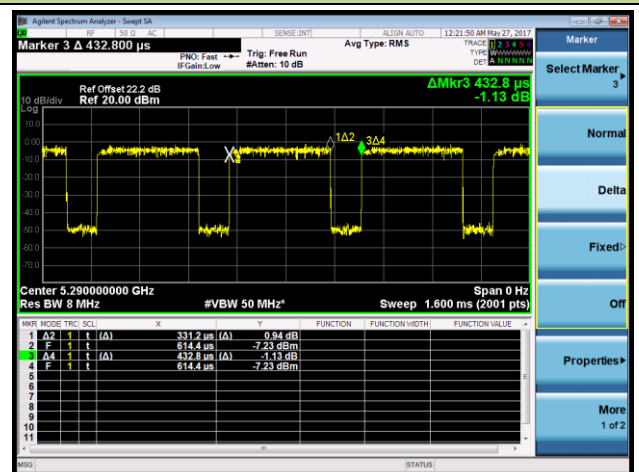

2.7. Test Configuration

The **HD IP Conference Phone** was tested per the guidance of KDB 789033 D02v01r04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v01r04 were used in the measurement of the **HD IP Conference Phone**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.9.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **HD IP Conference Phone** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **HD IP Conference Phone** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emission - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2017/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2017/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2017/06/20
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06181	1 year	2017/12/20
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06214	1 year	2018/05/10

Radiated Spurious Emission and Radiated Restricted Band Edge – AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cal. Due Date
MXE EMI Receiver	Agilent	N9038A	MRTSUE06125	1 year	2017/08/03
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2017/12/21
Bilog Period Antenna	Schwarzbeck	VULB9162	MRTSUE06022	1 year	2017/10/22
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2017/11/19
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06106	1 year	2017/12/10
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2018/04/25
Digital Thermometer & Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2017/11/30
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2018/05/10

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2018/05/07
USB wideband power sensor	Boonton	55006	MRTSUE06109	1 year	2018/05/07
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06180	1 year	2017/12/20

Software	Version	Function
e3	V 8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB

7. TEST RESULT

7.1. Summary

Product Name: HD IP Conference Phone
FCC ID: T2C-CP960
IC: 10741A-CP960
FCC Classification: Unlicensed National Information Infrastructure (UNII)
Data Rate / MCS 6Mbps for 802.11a; MCS0 for 802.11n-HT20MHz;
Tested: MCS0 for 802.11n-HT40MHz;
MCS0 for 802.11ac-VHT20MHz;
MCS0 for 802.11ac-VHT40MHz;
MCS0 for 802.11ac-VHT80MHz

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	Refer to Section 7.5		Pass	Section 7.5
15.407(h)(1)	Transmit Power Control	$\leq 24\text{ dBm}$		Pass	Section 7.6
15.407(a)(1)(ii), (2), (3), (5)	Peak Power Spectral Density	Refer to Section 7.7		Pass	Section 7.7
15.407(g)	Frequency Stability	N/A		Pass	Section 7.8
15.407(b)(1), (2), (3), (4)	Undesirable Emissions	$\leq -27\text{dBm/MHz EIRP}$ $\leq -17\text{dBm/MHz EIRP}$	Radiated	Pass	Section 7.9 & 7.10
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.11

RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
RSS-247 §6.2	99% Bandwidth	N/A	Conducted	Pass	Section 7.2
RSS-247 §6.2.4	6dB Bandwidth	>500kHz		Pass	Section 7.3
RSS-247 §6.2.1	Operation Frequency Range of 26dB BW	26dBc frequency range above 5250MHz		Pass	Section 7.4
RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	Max Conducted Output Power	Refer to Section 7.5		Pass	Section 7.5
	Maximum E.I.R.P				
RSS-247 §6.2.2, §6.2.3	Transmit Power Control	≤ 24 dBm		Pass	Section 7.6
RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	Peak Power Spectral Density	Refer to Section 7.7		Pass	Section 7.7
RSS-Gen [8.11]	Frequency Stability	N/A		Pass	Section 7.8
RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	Out-of-Band Emissions	≤ -27dBm/MHz EIRP ≤ -17dBm/MHz EIRP	Radiated	Pass	Section 7.9 & 7.10
RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in RSS-Gen [8.9]		Pass	
RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< RSS-Gen [8.8] limits	Line Conducted	Pass	Section 7.11

Notes: The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v01r04 - Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. $VBW \geq 3 \times RBW$.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

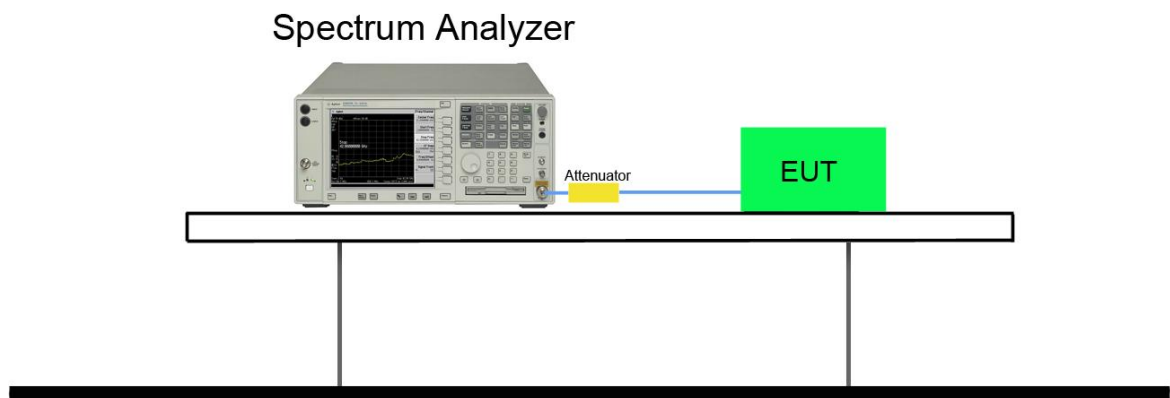

7.2.5. Test Result

Product	HD IP Conference Phone	Temperature	22°C
Test Engineer	Lewis Huang	Relative Humidity	54%
Test Site	TR3	Test Date	2017/05/26


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	6	36	5180	21.29	16.76
802.11a	6	44	5220	21.19	16.67
802.11a	6	48	5240	21.16	16.67
802.11a	6	52	5260	21.21	16.68
802.11a	6	60	5300	21.12	16.65
802.11a	6	64	5320	21.29	16.71
802.11a	6	100	5500	21.40	16.72
802.11a	6	116	5580	21.64	16.77
802.11a	6	120	5600	21.31	16.76
802.11a	6	140	5700	21.42	16.78
802.11a	6	149	5745	21.48	16.79
802.11a	6	157	5785	21.39	16.72
802.11a	6	165	5825	21.35	16.73
802.11n-HT20	6.5	36	5180	21.30	17.83
802.11n-HT20	6.5	44	5220	21.48	17.79
802.11n-HT20	6.5	48	5240	21.67	17.85
802.11n-HT20	6.5	52	5260	21.31	17.81
802.11n-HT20	6.5	60	5300	21.34	17.81
802.11n-HT20	6.5	64	5320	21.47	17.76
802.11n-HT20	6.5	100	5500	21.45	17.88
802.11n-HT20	6.5	116	5580	21.42	17.89
802.11n-HT20	6.5	120	5600	21.67	17.85
802.11n-HT20	6.5	140	5700	21.58	17.86
802.11n-HT20	6.5	149	5745	21.47	17.91
802.11n-HT20	6.5	157	5785	21.36	17.85
802.11n-HT20	6.5	165	5825	21.54	17.86

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11n-HT40	13.5	38	5190	39.62	36.26
802.11n-HT40	13.5	46	5230	39.63	36.26
802.11n-HT40	13.5	54	5270	39.97	36.26
802.11n-HT40	13.5	62	5310	39.83	36.23
802.11n-HT40	13.5	102	5510	39.99	36.33
802.11n-HT40	13.5	110	5550	39.77	36.24
802.11n-HT40	13.5	118	5590	39.82	36.38
802.11n-HT40	13.5	134	5670	40.53	36.39
802.11n-HT40	13.5	151	5755	39.90	36.33
802.11n-HT40	13.5	159	5795	39.95	36.29
802.11ac-VHT20	6.5	36	5180	21.75	17.94
802.11ac-VHT20	6.5	44	5220	21.43	17.80
802.11ac-VHT20	6.5	48	5240	21.66	17.78
802.11ac-VHT20	6.5	52	5260	21.59	17.84
802.11ac-VHT20	6.5	60	5300	21.30	17.76
802.11ac-VHT20	6.5	64	5320	21.50	17.81
802.11ac-VHT20	6.5	100	5500	21.51	17.79
802.11ac-VHT20	6.5	116	5580	21.48	17.88
802.11ac-VHT20	6.5	120	5600	21.48	17.85
802.11ac-VHT20	6.5	140	5700	21.60	17.83
802.11ac-VHT20	6.5	144	5720	21.77	17.90
802.11ac-VHT20	6.5	149	5745	21.22	17.77
802.11ac-VHT20	6.5	157	5785	21.28	17.80
802.11ac-VHT20	6.5	165	5825	21.40	17.84
802.11ac-VHT40	13.5	38	5190	39.78	36.25
802.11ac-VHT40	13.5	46	5230	39.61	36.18
802.11ac-VHT40	13.5	54	5270	39.60	36.20
802.11ac-VHT40	13.5	62	5310	39.67	36.19
802.11ac-VHT40	13.5	102	5510	39.79	36.27
802.11ac-VHT40	13.5	110	5550	39.50	36.23
802.11ac-VHT40	13.5	118	5590	39.89	36.27
802.11ac-VHT40	13.5	134	5670	40.49	36.34
802.11ac-VHT40	13.5	142	5710	40.51	36.27
802.11ac-VHT40	13.5	151	5755	39.82	36.29
802.11ac-VHT40	13.5	159	5795	39.67	36.26


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ac-VHT80	29.3	42	5210	81.03	75.56
802.11ac-VHT80	29.3	58	5290	81.00	75.41
802.11ac-VHT80	29.3	106	5530	80.91	75.65
802.11ac-VHT80	29.3	122	5610	81.06	75.37
802.11ac-VHT80	29.3	138	5690	81.18	75.49
802.11ac-VHT80	29.3	155	5775	81.26	75.51

802.11a 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

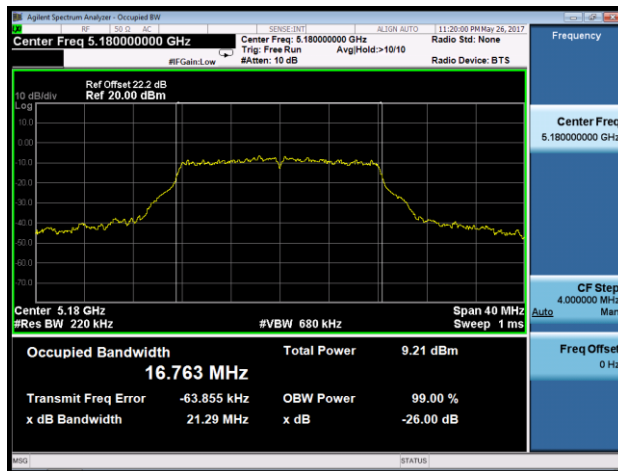


Channel 44 (5220MHz)

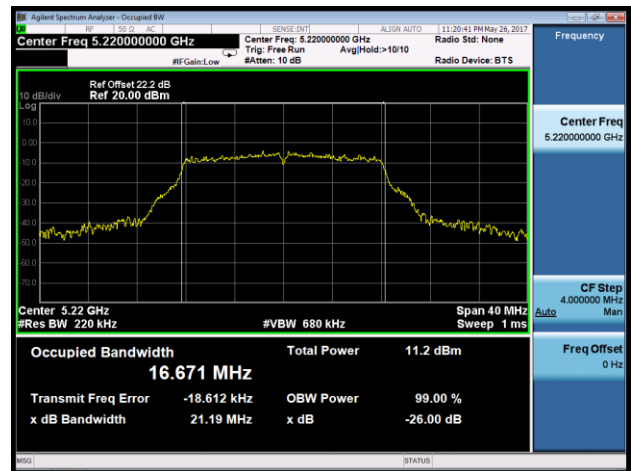


Channel 48 (5240MHz)

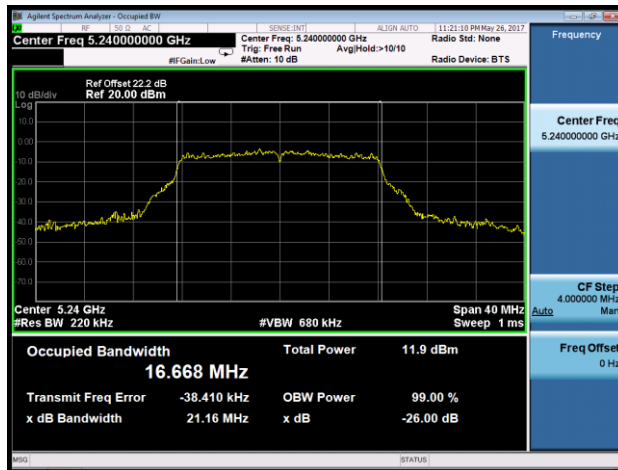


Channel 52 (5260MHz)

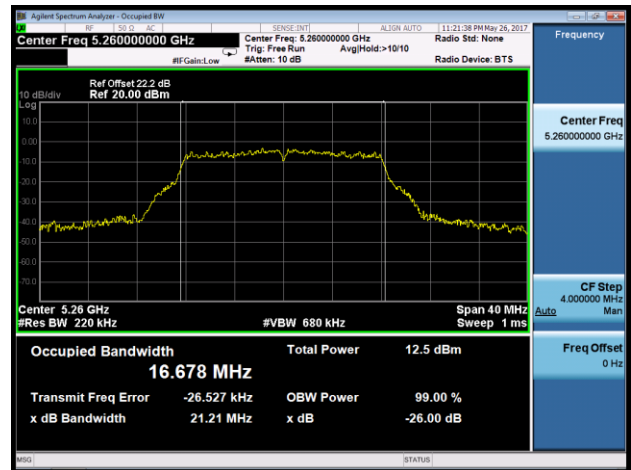

Channel 60 (5300MHz)

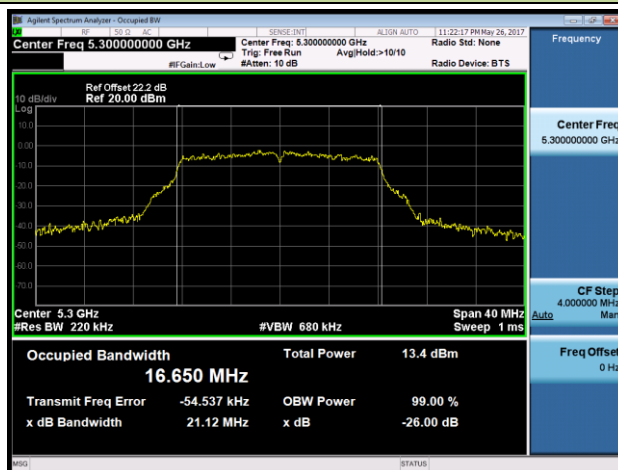


Channel 64 (5320MHz)

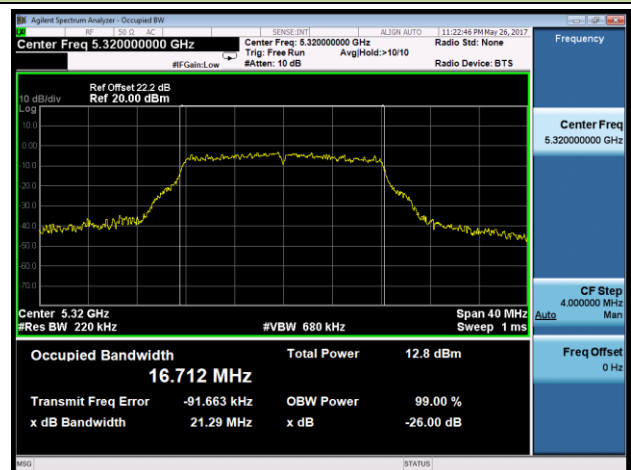


802.11a 26dB Bandwidth & 99% Bandwidth


Channel 100 (5500MHz)

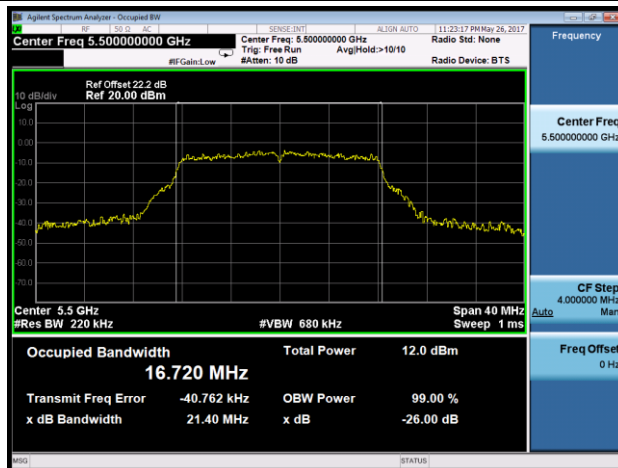


Channel 116 (5580MHz)

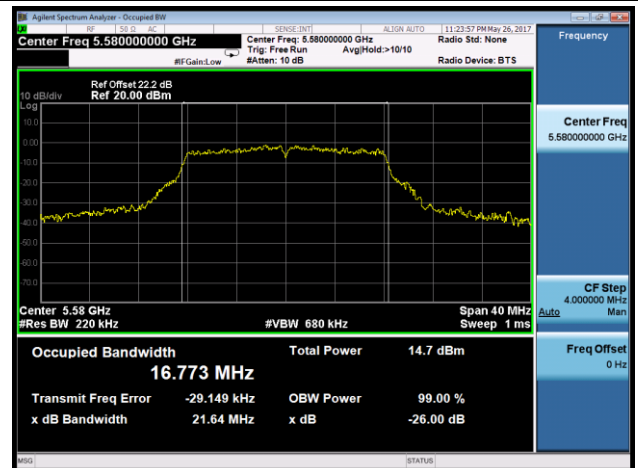


Channel 100 (5600MHz)

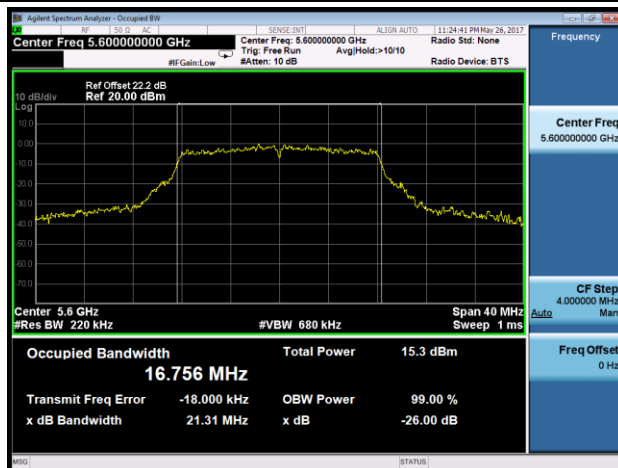


Channel 140 (5700MHz)

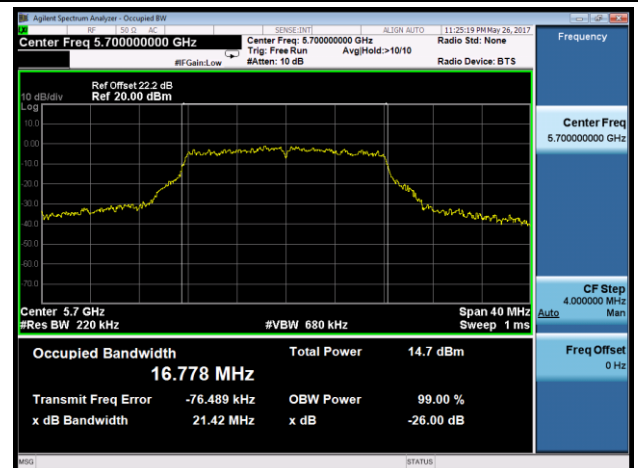

Channel 149 (5745MHz)

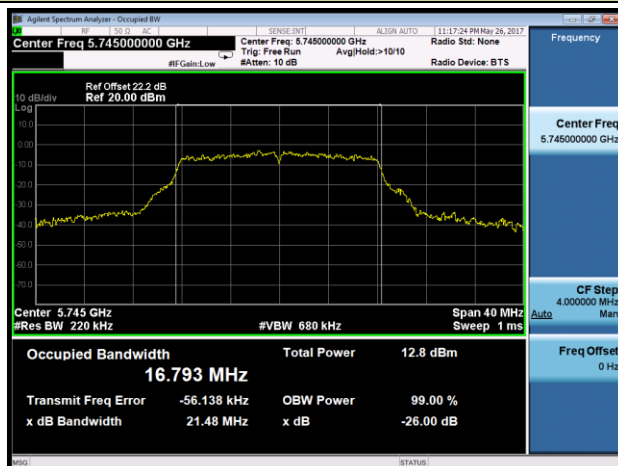


Channel 157 (5785MHz)

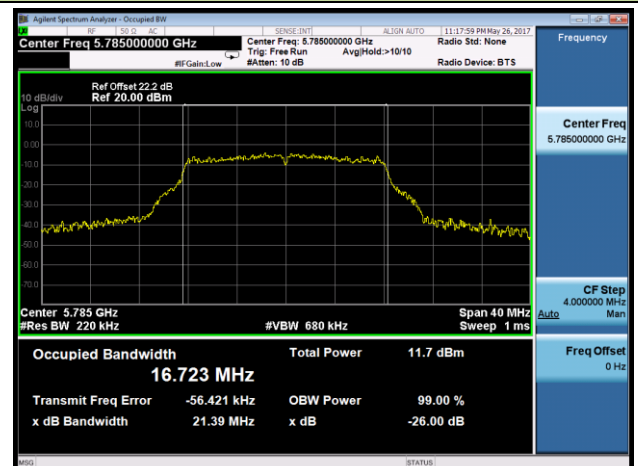


802.11a 26dB Bandwidth & 99% Bandwidth

Channel 165 (5825MHz)

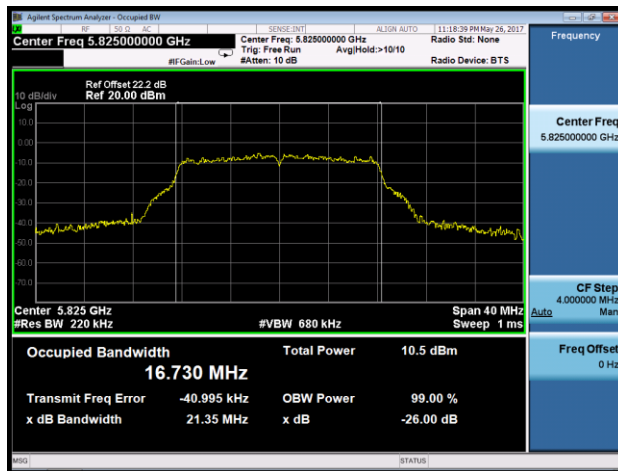


802.11n-HT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

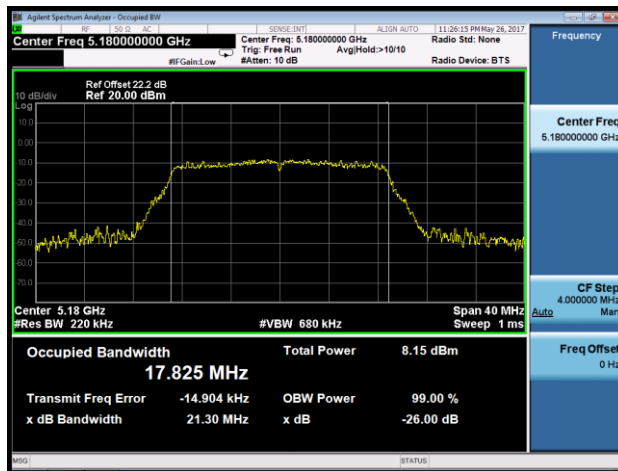


Channel 44 (5220MHz)

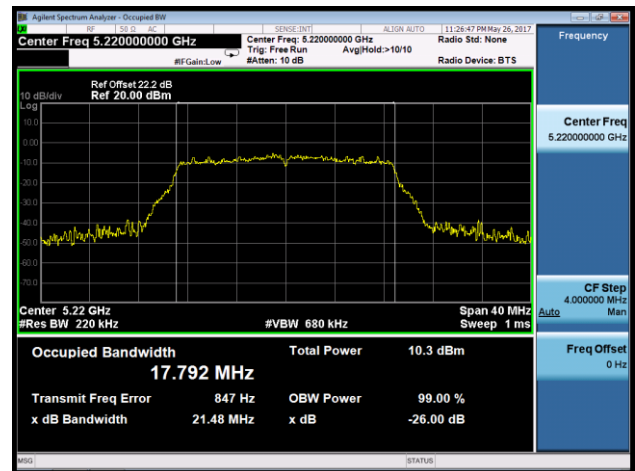


Channel 48 (5240MHz)

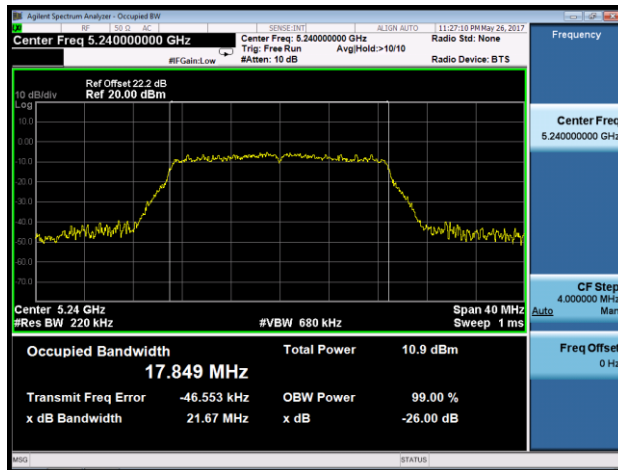


Channel 52 (5260MHz)

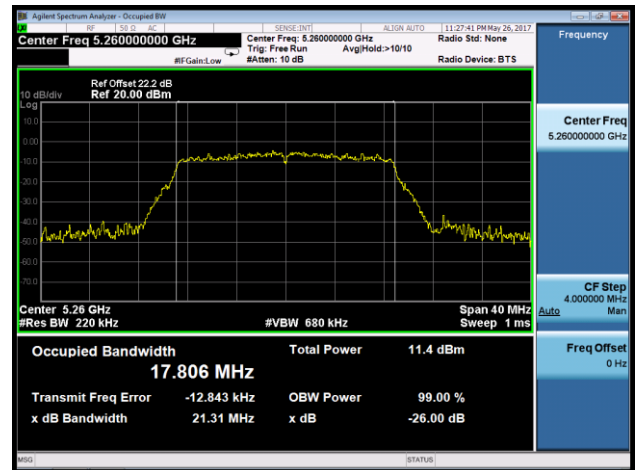

Channel 60 (5300MHz)

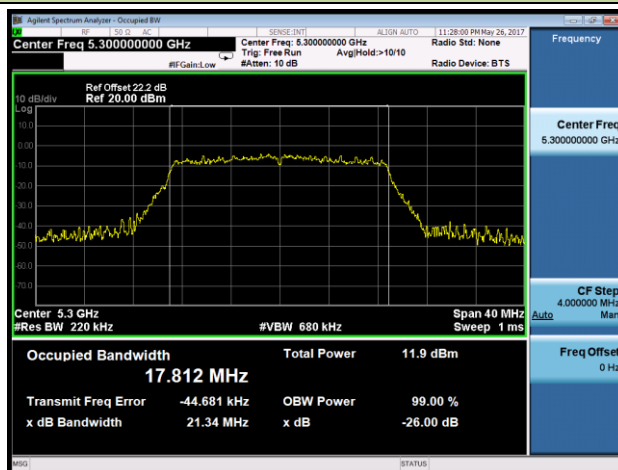


Channel 64 (5320MHz)

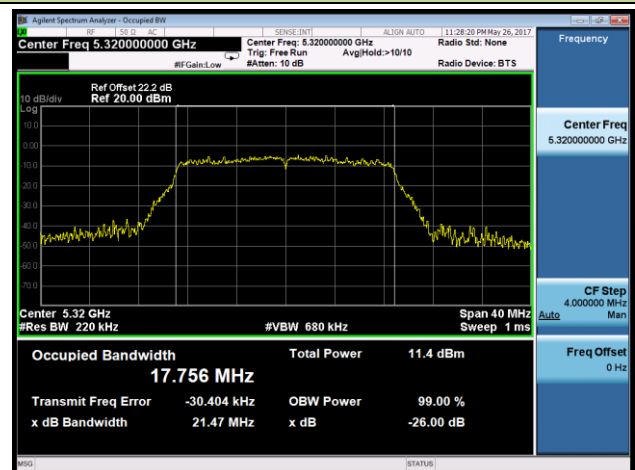


802.11n-HT20 26dB Bandwidth & 99% Bandwidth


Channel 100 (5500MHz)

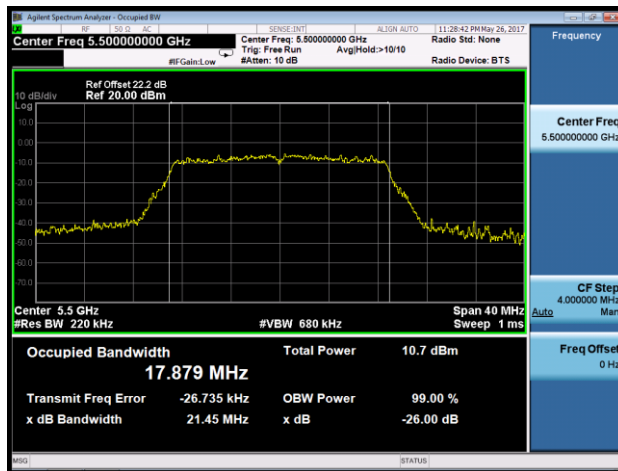


Channel 116 (5580MHz)

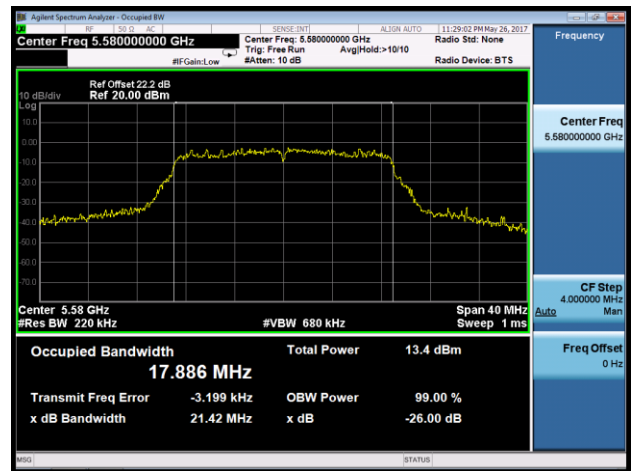


Channel 120 (5600MHz)

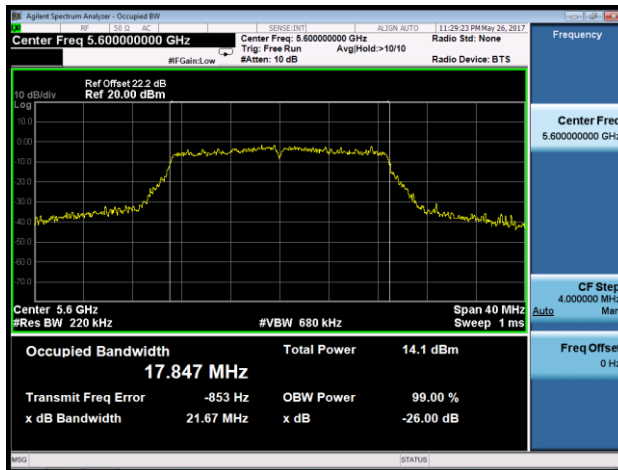


Channel 140 (5700MHz)

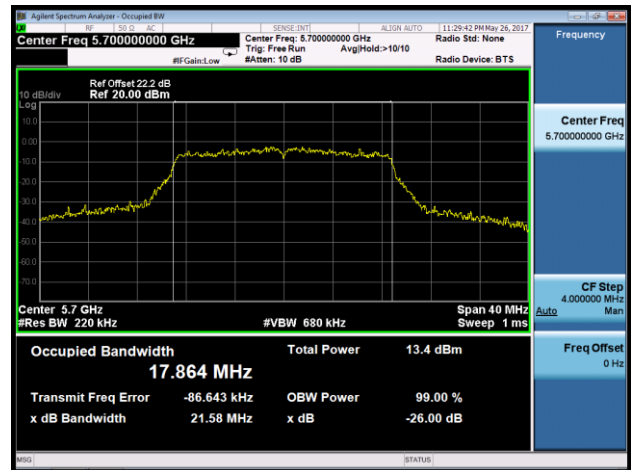

Channel 149 (5745MHz)

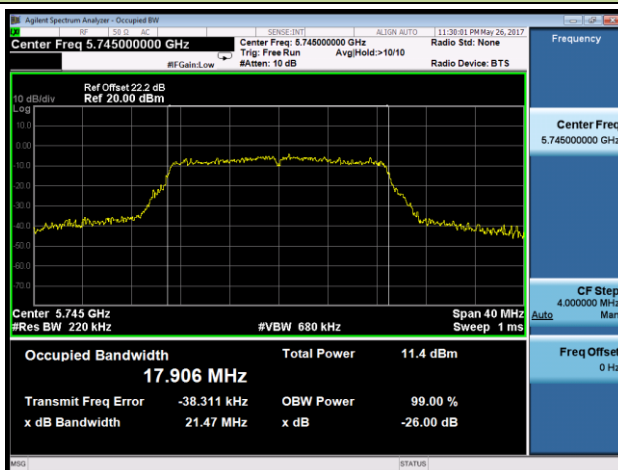


Channel 157 (5785MHz)

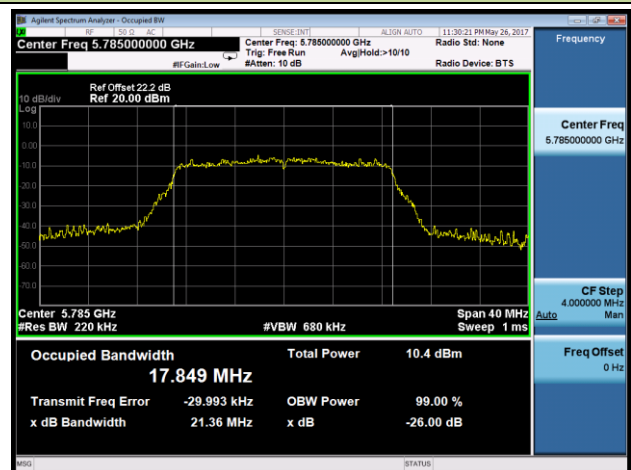


802.11n-HT20 26dB Bandwidth & 99% Bandwidth

Channel 165 (5825MHz)

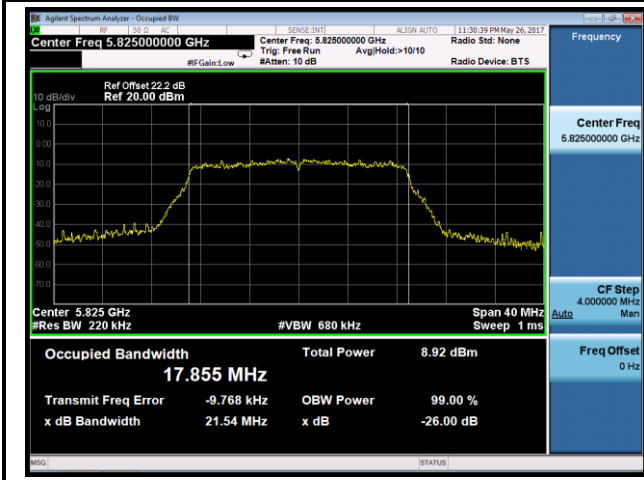


802.11n-HT40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

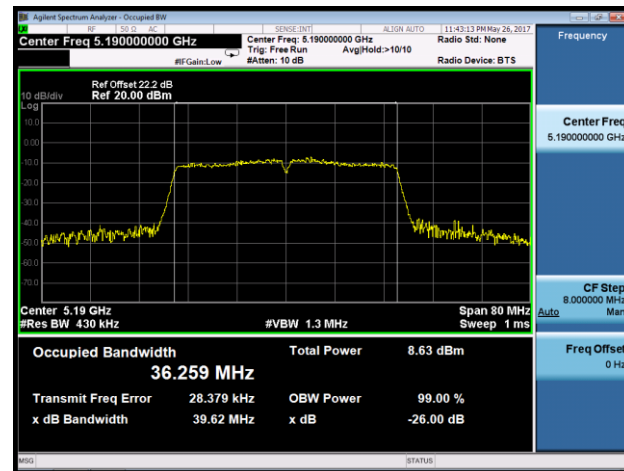


Channel 46 (5230MHz)

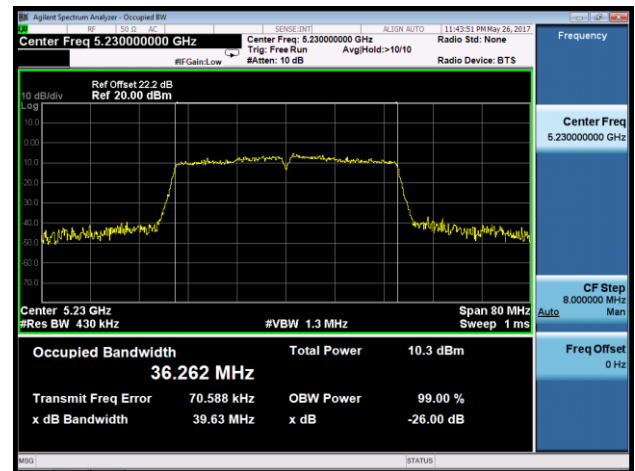


Channel 54 (5270MHz)

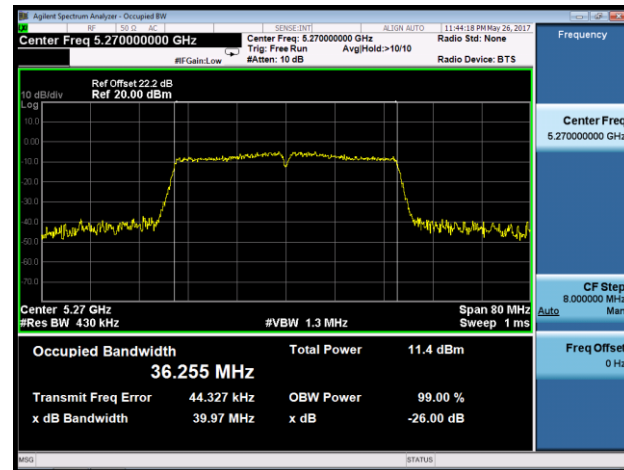


Channel 62 (5310MHz)

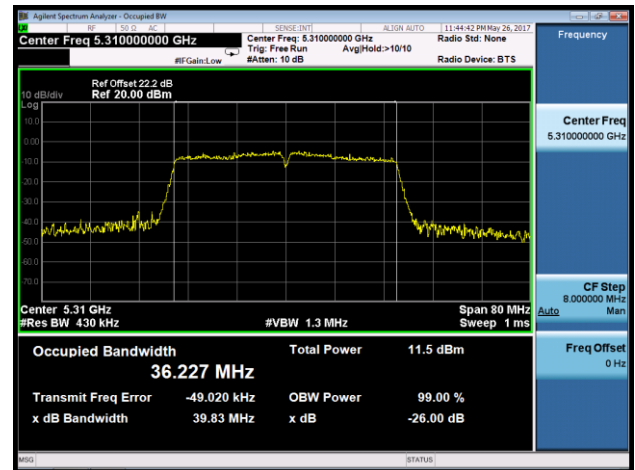

Channel 102 (5510MHz)

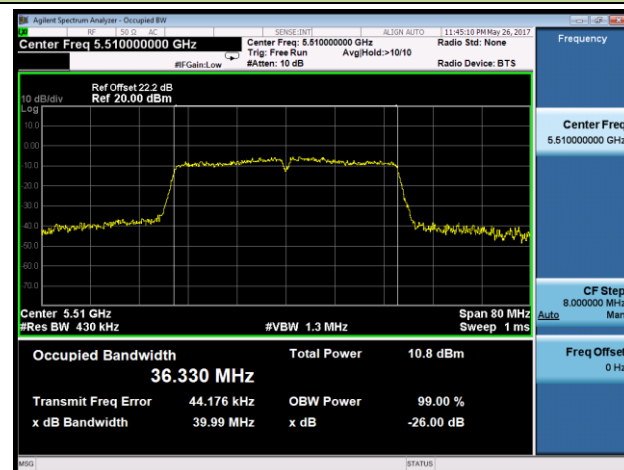


Channel 110 (5550MHz)

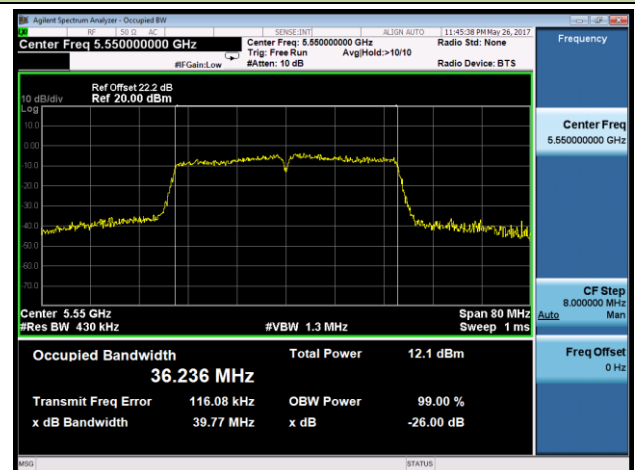


802.11n-HT40 26dB Bandwidth & 99% Bandwidth


Channel 118 (5590MHz)

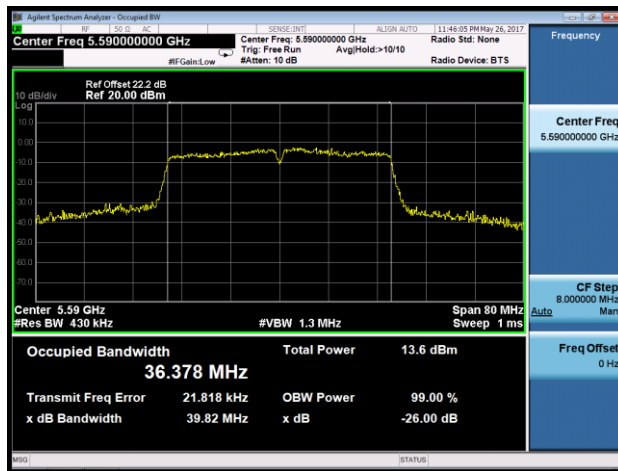


Channel 134 (5670MHz)

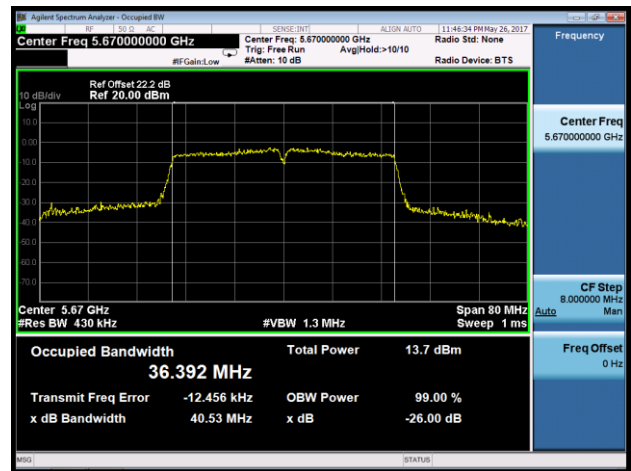

Channel 151 (5755MHz)

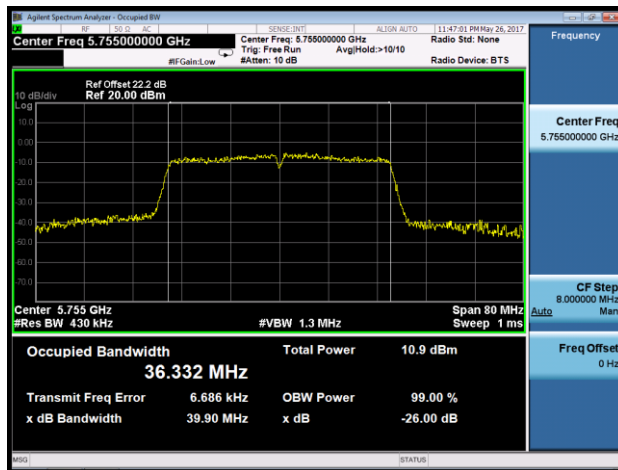


Channel 159 (5795MHz)

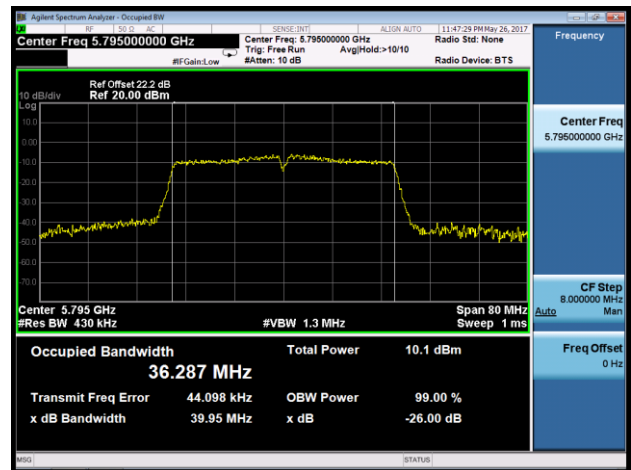


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

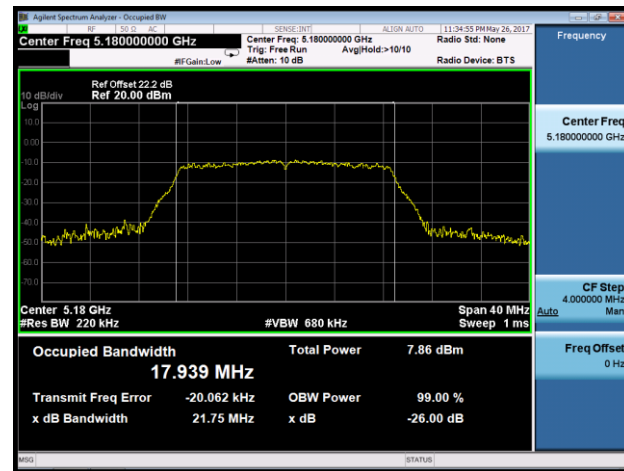


Channel 44 (5220MHz)

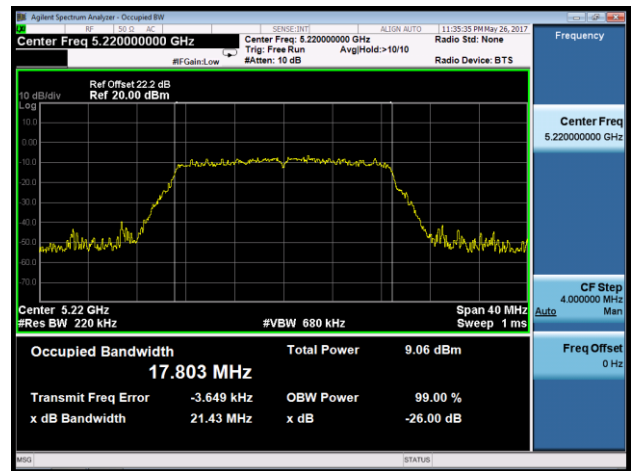


Channel 48 (5240MHz)

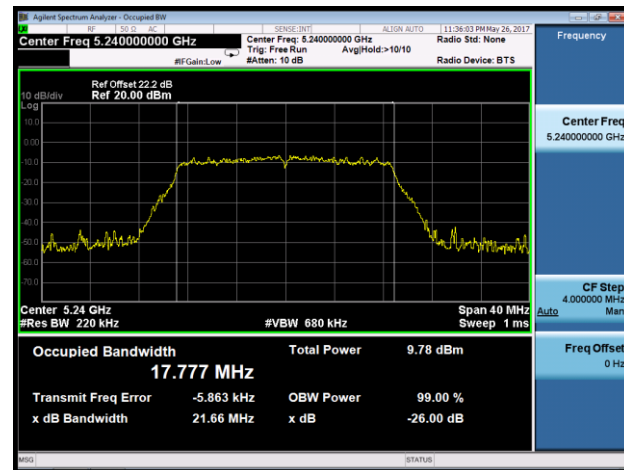


Channel 52 (5260MHz)

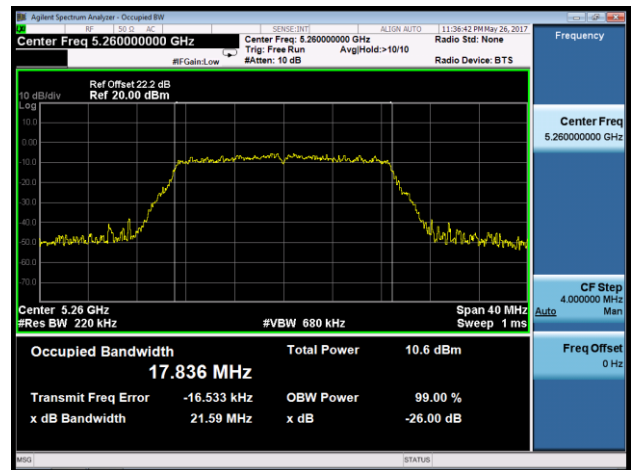

Channel 60 (5300MHz)

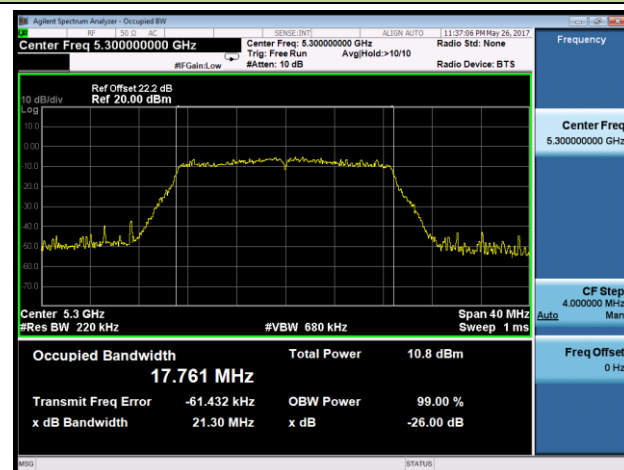


Channel 64 (5320MHz)

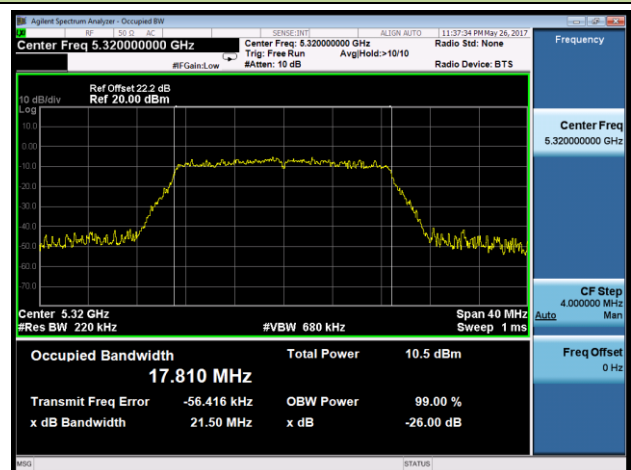


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 100 (5500MHz)

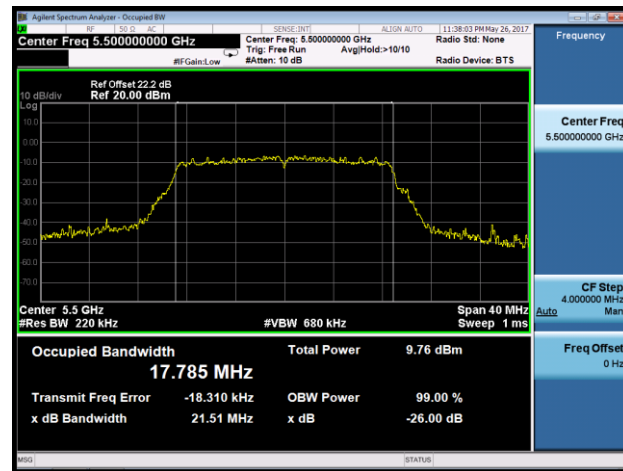


Channel 116 (5580MHz)

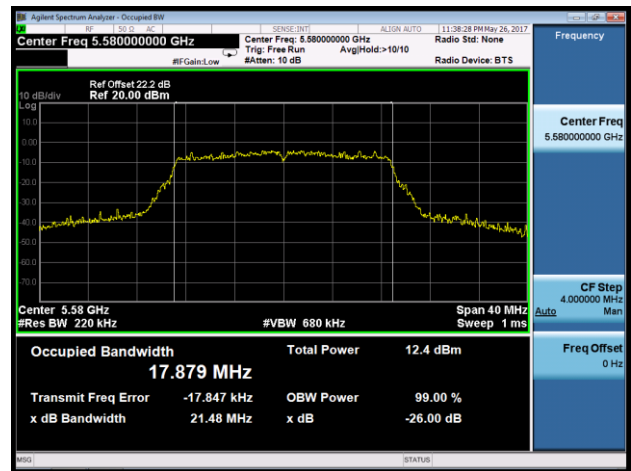


Channel 120 (5600MHz)

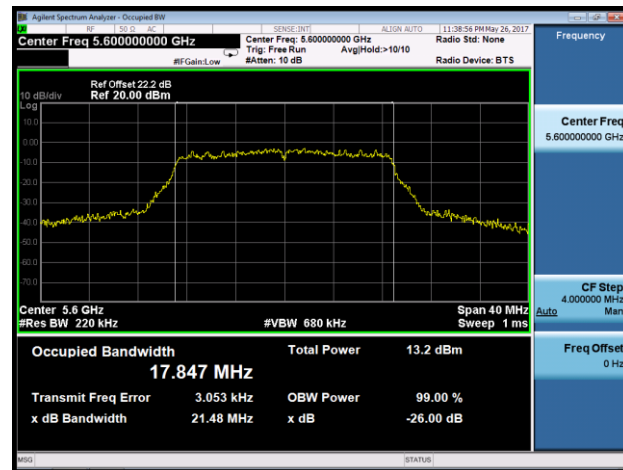

Channel 140 (5700MHz)

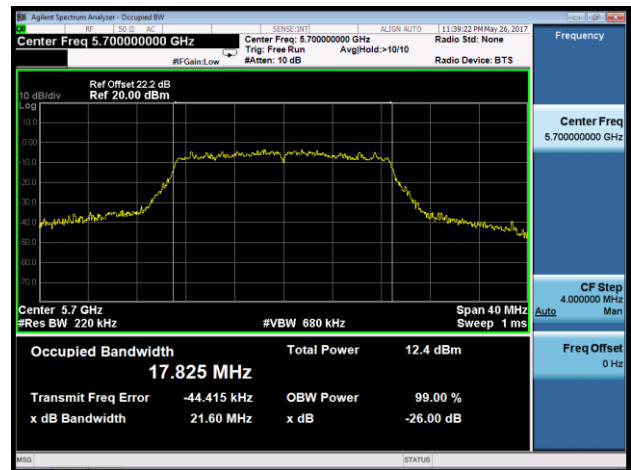

Channel 144 (5720MHz)

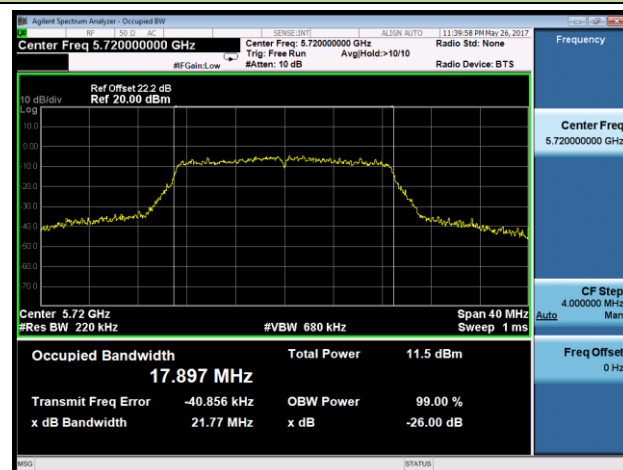

Channel 149 (5745MHz)

