


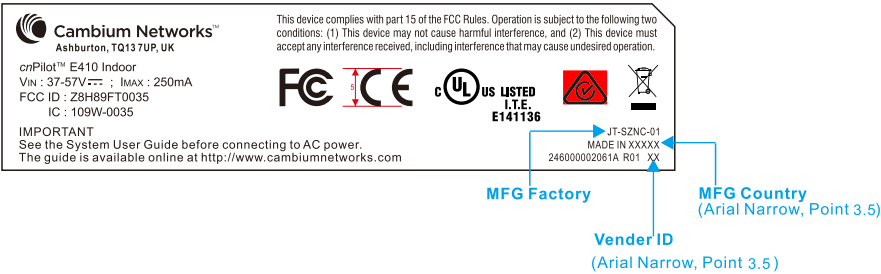
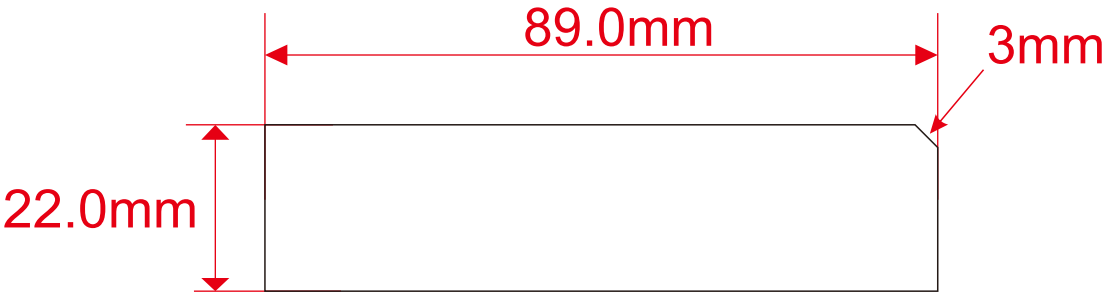


Safety Label Note:

- ① Printing color: Black
- ② 製造國家 (MFG Country) :
Decided by import & export country
For example:
1. MADE IN TAIWAN / Made in Taiwan
2. MADE IN CHINA / Made in China
印刷廠商代號 (Vender ID) : ( CSA Request)
Decided by Vender
製造工廠代號 (MFG Factory) : ( UL Request)
視代工廠而定 (Decided by MFG Factory) :
1. 昊陽/Joytech (深圳/ShenZhen) -----> None
2. Accton -----> AC
③ If  UL logo is printed, Vender must use
the label material applied for UL certification (PGDQ2)
需符合Outdoor Use



Modification		Card Paper / Top lineboard				Corrugate list				Cardboard Die Cut Legend				Unspecialized Die Cut Tolerance = +/- 0.3 mm				PE Bag (A Degree)				Clear		Pink		Label list				(Total Thickness = mm±10%)				Comply with RoHs				Accton TECHNOLOGY CORP.			
		CCNB	SBS	Double SBS		(A Degree)	Single wall Double wall GSM (g/m ²) (Top lineboard/Medium/Bottom lineboard)	Bursting Strength	End Use	(C) Cutting Line	(C) Crease Line	(PBL) Partial Blunt Line	(SO) Slit-Score Line	(SL) Slit Line	GRADE 0 1 2 3 4 5	Normal (Non Anti-Static)	Anti-Static	ESD Value Ω _{ohm} = 9-11	ESD Value Ω _{ohm} < 5	Material & Thickness	Adhesive (Except all leads in FP label.)	Others	Material Spec:	IQC Inspect Color	Please refer to	Approve	Melody	MAY26'17	Check	Design	Carry	MAY26'17	Part No. 246000002061A	REV. 01							
						Yellow	A/C Taiwan 230 X 180 X 230 250 X 150 X 250	16	33.6						16 63 05 01 015 02 02 05					Art paper 0.025mm / 25# / 1mil	Acrylic T=0.022mm																				
							B Taiwan 230 X 100 X 230 250 X 112 X 250	14	26.2						63 250 05 02 025 04 05 12					✓ Metalized ✓ 0.050mm. / 50# / 2mil ✓ Acrylic UL approved T=0.022mm																					
							Ch Taiwan 230 X 180 X 230 250 X 100 X 250	14	22.5						250 500 01 025 03 06 08 18 500 1000 03 05 08 12 30					White Polyester 0.076mm / 75# / 3mil	"R" Adhesive T=0.022mm																				
							AB Taiwan 230X100X100X100X230 250X100X100X100X250	18	37.1						Printing Tolerance = +/- 0.3 mm					(PP)Pepa paper 0.178mm / 7mil	Water Adhesive T=0.022mm																				
							BC Taiwan 230 X 100 X 230 205 X 140 X 230	16	26						Pulp Tray Recycle Kraft 80% Newsprint 20%					PC 8B35 0.254mm / 10mil	3M 467 T=0.05mm / 2mil																				
							B Taiwan 220 X 100 X 200 175 X 140 X 230	14	28.5						Weight/g= +/-5%					PC 8010 0.381mm / 15mil	3M 468 T=0.127mm / 5mil																				
							E Taiwan 220 X 100 X 200 175 X 100 X 250	12	18.6						Thickness/mm 1.5 2.0					Other 0.500mm / 20mil	3M 7945 T=0.127mm / 5mil																				
							AB Taiwan 230X100X100X100X230 175X100X100X100X250	18	37.1						Draft Angle 3° Hydrus % 7-11%					PP Film ✓ LF (T = 0.045mm) DF (T = 0.035mm)																					
							BC Taiwan 230 X 100 X 230 175 X 100 X 250	18	37.1																																
This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without expressed written permission.		Coated	UV	Mar Resistant	Variable	White	B Taiwan 220 X 100 X 200 175 X 140 X 230	14	28.5																																
							E Taiwan 220 X 100 X 200 175 X 100 X 250	12	18.6																																
							AB Taiwan 230X100X100X100X230 175X100X100X100X250	18	37.1																																
							BC Taiwan 230 X 100 X 230 175 X 100 X 250	18	37.1																																


(6) S/N LABEL:MSN, ESN 需與機構上的序號相同
246200000167A ACCLABEL 39X22mm(珍珠龍)

MODEL NO / HVIN:
cnPilot™ E410 Indoor

PART NO: PL-E410X00A-RW
||||| PL-E410X00A-RW |||||

SERIAL NO(MSN): XXXXXXXXXXXXX
||||| XXXXXXXXXXXXX |||||

MAC(ESN): XXXXXXXXXXXXX
||||| XXXXXXXXXXXXX |||||

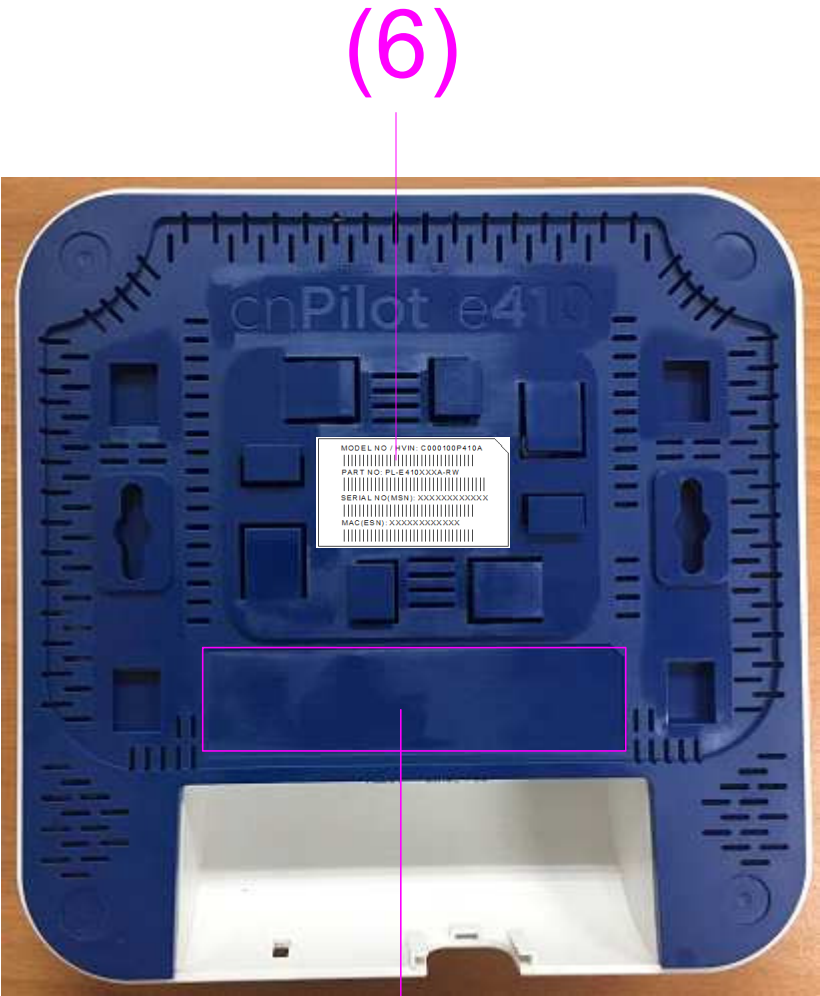

Cambium Networks™
Ashburton, TQ13 7UP, UK

cnPilot™ E410 Indoor
VIN : 37-57V ~~~ : Ibaax : 250mA
FCC ID : Z8H89FT0035
IC : 109W-0035

IMPORTANT
See the System User Guide before connecting to AC power.
The guide is available online at <http://www.cambiumnetworks.com>

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

FC

CE

UL

US LISTED
I.T.E.
E141136

JT-SZNC-01

MADE IN XXXXX

246000002061A R01 XX

MFG Factory

MFG Country
(Arial Narrow, Point 3.5)

Vender ID
(Arial Narrow, Point 3.5)

File Path. EAP7215A-1016-CAM FCC

Page 2 of 6