

TEST REPORT

For

Watch

Model Number: OPWE242

FCC ID: 2ABZ2-OPWE242

IC: 12739A-OPWE242

Report Number : WT248002351

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection

Site Location : No.4, Tongfa Road, Xili Street, Nanshan District,
Shenzhen, Guangdong, China

Tel : 0086-755-86928965

Fax : 0086-755-86009898-31396

Web : www.smq.com.cn

E-mail : emcrf@smq.com.cn

The "important statement" on the back of report's homepage is an element of the report, and any copy that does not contain the "important statement" is incomplete.

Revision History

No	Date	Remark
V1.0	2025.01.16	Initial issue

TEST REPORT DECLARATION

Applicant : OnePlus Technology (Shenzhen) Co., Ltd.
Address : 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building,
Binhe Avenue North, Futian District, Shenzhen, Guangdong,
518100, P.R. China
Manufacturer : OnePlus Technology (Shenzhen) Co., Ltd.
Address : 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building,
Binhe Avenue North, Futian District, Shenzhen, Guangdong,
518100, P.R. China
EUT Description : Watch
Model No. : OPWE242
Trade mark : ONEPLUS
HVIN : OPWE242
FCC ID : 2ABZ2-OPWE242
IC : 12739A-OPWE242

Test Standards:

FCC Part 15 Subpart C
RSS-247 Issue 3 (2023-08)
RSS-GEN Issue 5 (2021-02)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results, unless they depend on the manufacturer information.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.




Project Engineer:	 (Chen Silin 陈司林)	Date:	Jan. 16, 2025
Checked by:	 (Wan Xiaojing 万晓婧)	Date:	Jan. 16, 2025
Approved by:	 (Lin Bin 林斌)	Date:	Jan. 16, 2025

TABLE OF CONTENTS

TEST REPORT DECLARATION	3
1. TEST RESULTS SUMMARY	6
2. GENERAL INFORMATION.....	7
2.1. Report information.....	7
2.2. Laboratory Accreditation and Relationship to Customer	7
2.3. Measurement Uncertainty	8
3. PRODUCT DESCRIPTION.....	9
3.1. EUT Description.....	9
3.2. Related Submittal(s) / Grant (s)	9
3.3. Block Diagram of EUT Configuration	10
3.4. Operating Condition of EUT	10
3.5. Directional Antenna Gain	10
3.6. Support Equipment List	10
3.7. Test Conditions.....	10
3.8. Special Accessories.....	10
3.9. Equipment Modifications	10
4. TEST EQUIPMENT USED	11
5. DUTY CYCLE	12
5.1. LIMITS OF DUTY CYCLE.....	12
5.2. TEST PROCEDURE.....	12
5.3. TEST SETUP	12
5.4. TEST DATA.....	12
6. 6DB BANDWIDTH MEASUREMENT.....	14
6.1. LIMITS OF 6dB BANDWIDTH MEASUREMENT	14
6.2. TEST PROCEDURE.....	14
6.3. TEST SETUP	14
6.1. Test Data	14
7. 99% BANDWIDTH	19
7.1. LIMITS OF 99% Bandwidth	19
7.2. TEST PROCEDURE.....	19
7.3. TEST SETUP	19
7.4. TEST DATA.....	19
8. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	24
8.1. LIMITS OF Maximum Conducted Output Power Measurement	24
8.2. TEST PROCEDURE.....	24
8.3. TEST SETUP	24
8.4. TEST DATA.....	24
9. MAXIMUM POWER SPECTRAL DENSITY LEVEL MEASUREMENT	29
9.1. LIMITS OF Maximum Power Spectral Density Level Measurement.....	29
9.2. TEST DATA.....	29
10. CONDUCTED BANDEDGE AND SPURIOUS MEASUREMENT	33
10.1. LIMITS OF Conducted Bandedge and Spurious Measurement	33
10.2. TEST PROCEDURE.....	33

10.3.	TEST DATA.....	33
11.	RADIATED BANDEDGE AND SPURIOUS MEASUREMENT	46
11.1.	LIMITS OF Radiated Bandedge and Spurious Measurement	46
11.2.	TEST PROCEDURE.....	47
11.3.	TEST DATA.....	47
12.	CONDUCTED EMISSION TEST FOR AC POWER PORT MEASUREMENT	72
12.1.	Test Standard and Limit	72
12.2.	Test Procedure	72
12.3.	Test Arrangement.....	72
12.4.	Test Data	72
13.	ANTENNA REQUIREMENTS	75
13.1.	Antenna Connector	75
13.2.	Antenna Gain	75

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	IC Rules	Test Results
6dB DTS bandwidth measurement	15.247 (a) (2)	RSS-247 Clause 5.2(a)	Pass
99% Bandwidth	/	RSS-Gen Clause 6.7	Pass
Maximum Peak Conducted Power	15.247 (b) (3)	RSS-247 Clause 5.4(d)	Pass
Maximum Power Spectral Density Level	15.247 (e)	RSS-247 Clause 5.2(b)	Pass
Conducted Bandedge and Spurious	15.247 (d)	RSS-247 Clause 5.5	Pass
Radiated Bandedge and Spurious	15.247 (d) 15.209 15.205	RSS-247 Clause 5.5 RSS-Gen Clause 8.9	Pass
Conducted emission test for AC power port	15.207	RSS-Gen Clause 8.8	Pass
Antenna Requirements	15.203	RSS-GEN, Clause 6.8	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacturer.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for

Laboratory Accreditation (A2LA) and certificate number is 3292.01.

2.3.Measurement Uncertainty

Conducted Emission

9 kHz~150 kHz $U=3.7$ dB $k=2$

150 kHz~30MHz $U=3.3$ dB $k=2$

Radiated Emission

30MHz~1000MHz $U=4.3$ dB $k=2$

1GHz~6GHz $U=4.6$ dB $k=2$

6GHz~40GHz $U=5.1$ dB $k=2$

3. PRODUCT DESCRIPTION

NOTE: The extreme test conditions for temperature and antenna gain were declared by the manufacturer.

3.1. EUT Description

Description : Watch
Manufacturer : OnePlus Technology (Shenzhen) Co., Ltd.
Model Number : OPWE242
Operate Frequency : 2.412GHz~2.462GHz
Antenna Designation : Monopole Antenna
Antenna Gain: -3.5 dBi
Operating Voltage : DC 3.92 V
Software Version : OPWE242_11_A.02
Hardware Version : XK935

Remark: /

WLAN:


Table 2 Working Frequencies Lists (802.11b, 802.11g, 802.11n HT20)

Channel	Frequency	Channel	Frequency
1	2412MHz	8	2447MHz
2	2417MHz	9	2452MHz
3	2422MHz	10	2457MHz
4	2427MHz	11	2462MHz
5	2432MHz	---	---
6	2437MHz	---	---
7	2442MHz	---	---

3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2ABZ2-OPWE242** filing to comply with Section 15.207, 15.209, 15.247 of the FCC Part 15 Subpart C Rules.
This submittal(s) (test report) is intended for IC: **12739A-OPWE242** filing to comply with RSS-247 and RSS-GEN.

3.3. Block Diagram of EUT Configuration



3.4. Operating Condition of EUT

The Radiated spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).
Worst-case mode and channel used for 30-1000 MHz radiated and power line conducted emissions was the mode and channel with the highest output power.
Worst-case data rates as provided by the client were:
802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20 mode: MCS0

Modulation Mode:	Single(TX)
802.11b/g	support
802.11n HT20	support

3.5. Directional Antenna Gain

Directional gain need NOT to be considered.

3.6. Support Equipment List

Table 3 Support Equipment List

Name	Model No	S/N	Manufacturer
Adapter	VCB3HDUH	---	Huizhou Golden Lake Industrial Co., Ltd.

3.7. Test Conditions

Date of test: Dec.24, 2024- Jan.02, 2025
Date of EUT Receive: Dec.10, 2024
Temperature: 20 °C-25 °C
Relative Humidity: 25%-52%

3.8. Special Accessories

Not available for this EUT intended for grant.

3.9. Equipment Modifications

Not available for this EUT intended for grant.

4. TEST EQUIPMENT USED

Table 4 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB9054/05	Test Receiver	R&S	ESCI	Jun.17, 2024	1 Year
SB8501/06	AMN	R&S	ESH-Z5	Jan.16, 2024	1 Year
SB9549	Shielded Room	Albatross	SR	Aug.28, 2024	1 Year
SB17366	Test Receiver	R&S	ESR26	Apr.30, 2024	1 Year
SB3345	Loop Antenna	Schwarzbeck	FMZB1516	Jan.12, 2024	1 Year
SB3955	Broadband Antenna	SCHWARZBECK	VULB9163	Apr.30, 2024	1 Year
SB9555/01	Semi Anechoic Chamber	Albatross	9×6×6(m)	Aug.12, 2024	1 Year
SB8501/09	Test Receiver	R&S	ESU40	Jan.17, 2024	1 Year
SB3435	Horn Antenna	R&S	HF906	Nov.19, 2024	1 Year
SB9058/03	Pre-Amplifier	R&S	SCU 18	Jan.16, 2024	1 Year
SB8501/11	Antenna	R&S	3160-09	Feb.22, 2023	3 Years
SB8501/16	Pre-Amplifier	R&S	SCU-26	Jan.16, 2024	1 Year
SB9555/02	Fully Anechoic Chamber	Albatross	10.0×5.2×5.4(m)	Aug.08, 2024	1 Year
SB9060	Signal Analyzer	R&S	FSQ40	Apr.22, 2024	1 Year

Table 5 Test software

Name	Manufacturer	Version
Bluetooth and WiFi Test System	Shenzhen JS tonscond co.,ltd	3.3.10

5. DUTY CYCLE

5.1.LIMITS OF DUTY CYCLE

None; for reporting purposes only

5.2.TEST PROCEDURE

1. Set span = Zero
2. RBW = 10MHz
3. VBW = 10MHz,
4. Detector = Peak

5.3.TEST SETUP




5.4.TEST DATA

Table 6 Duty Cycle Test Data


Test Mode	On Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.00	94.34	0.25	0.01
802.11g	1.00	95.24	0.21	0.01
802.11n HT20	1.01	95.28	0.21	0.01

11B Ant1_2437

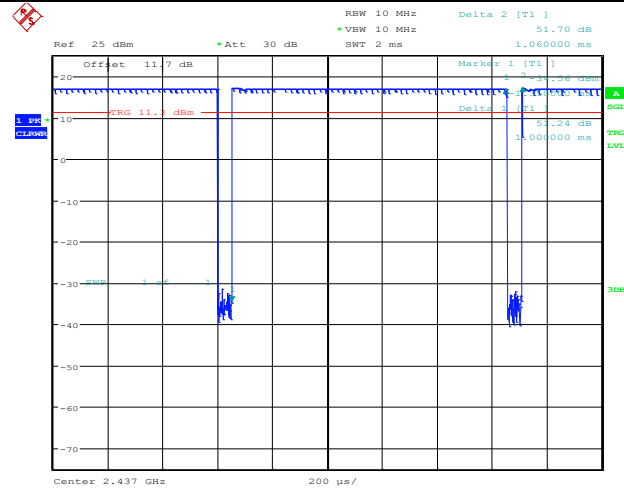


Date: 23.DEC.2024 14:04:52

11G Ant1_2437

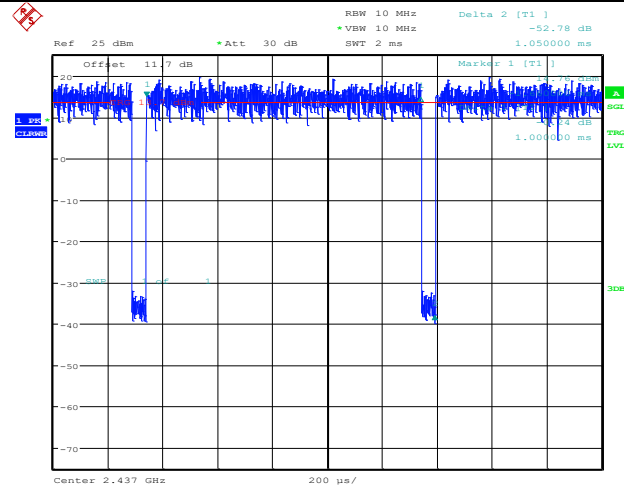

Date: 23.DEC.2024 15:07:07

11N20SISO Ant1_2437

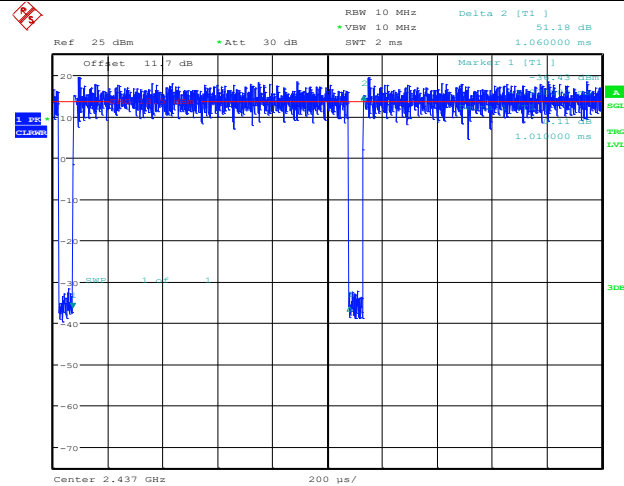

Date: 23.DEC.2024 16:23:30

6. 6DB BANDWIDTH MEASUREMENT

6.1.LIMITS OF 6dB BANDWIDTH MEASUREMENT

CFR 47 (FCC) part 15.247 (a) (2), 558074 D01 DTS Meas Guidance v05r02
RSS-247 Clause 5.2(a) The minimum 6 dB bandwidth shall be 500 kHz

6.2.TEST PROCEDURE

ANSI C63.10-2013 Clause 11.8

The transmitter output was connected to the spectrum analyzer.

- Set RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

6.3.TEST SETUP




6.1. Test Data

Table 7 6dB Bandwidth Test Data


TestMode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.00	2407.96	2415.96	0.5	PASS
		2437	8.04	2432.96	2441.00	0.5	PASS
		2462	7.56	2457.96	2465.52	0.5	PASS
11G	Ant1	2412	15.08	2404.44	2419.52	0.5	PASS
		2437	15.12	2429.44	2444.56	0.5	PASS
		2462	15.04	2454.44	2469.48	0.5	PASS
11N20SISO	Ant1	2412	15.08	2404.44	2419.52	0.5	PASS
		2437	15.12	2429.44	2444.56	0.5	PASS
		2462	14.40	2455.12	2469.52	0.5	PASS

11B Ant1_2412

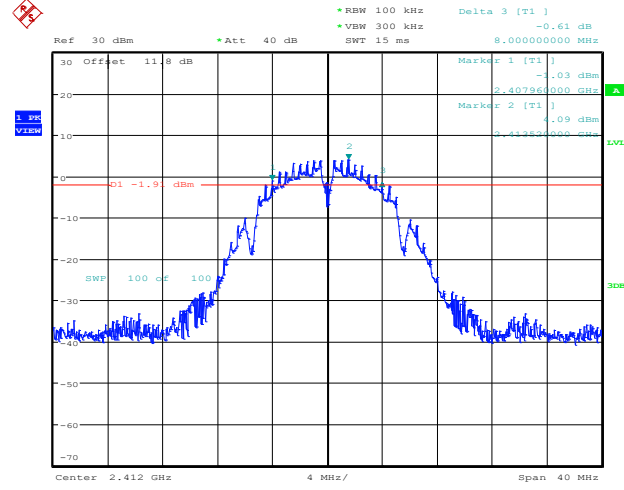


Date: 23.DEC.2024 12:16:01

11B Ant1_2437

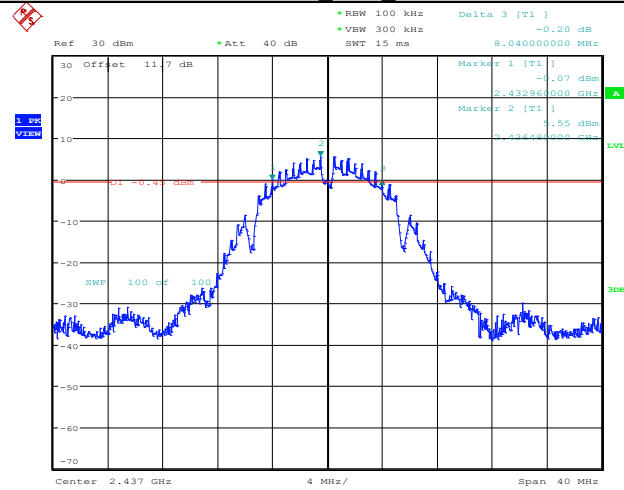


Date: 23.DEC.2024 14:05:09

11B Ant1_2462

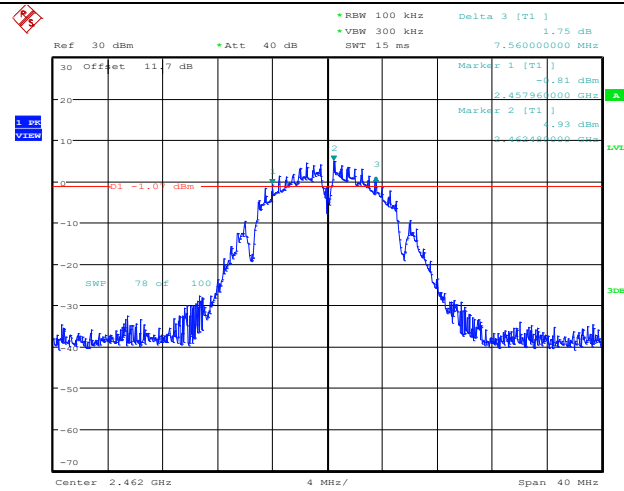


Date: 23.DEC.2024 14:24:58

11G Ant1_2412

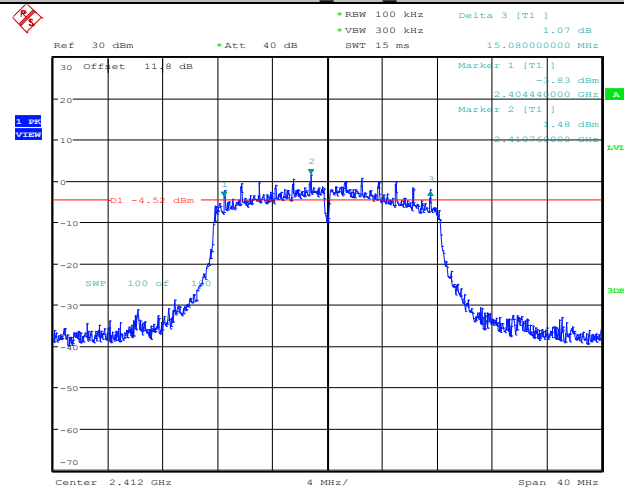


Date: 23.DEC.2024 14:52:35

11G Ant1_2437

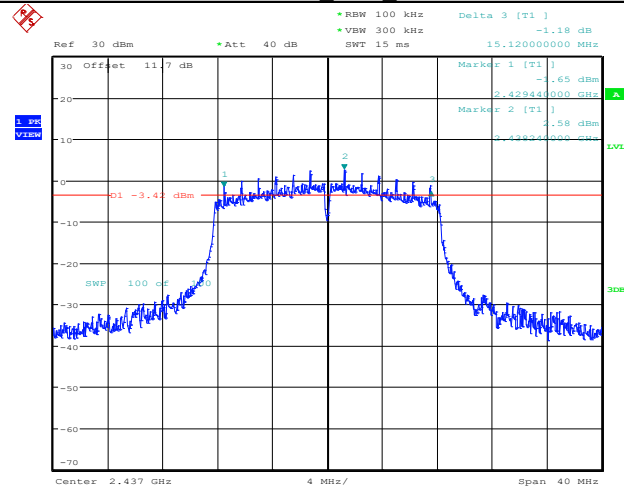


Date: 23.DEC.2024 15:07:16

11G Ant1_2462

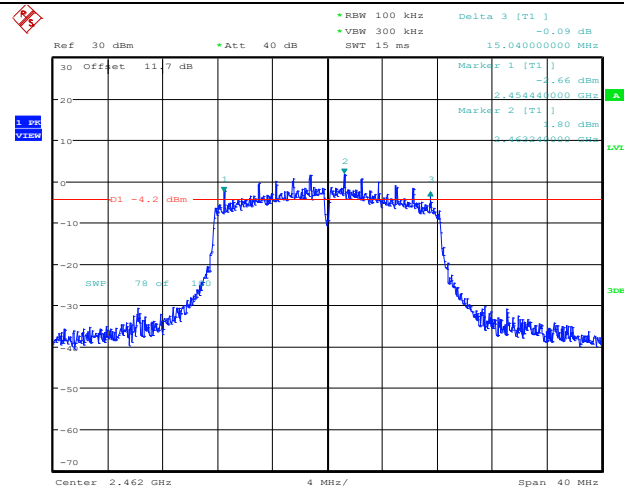


Date: 23.DEC.2024 15:29:09

11N20SISO_Ant1_2412

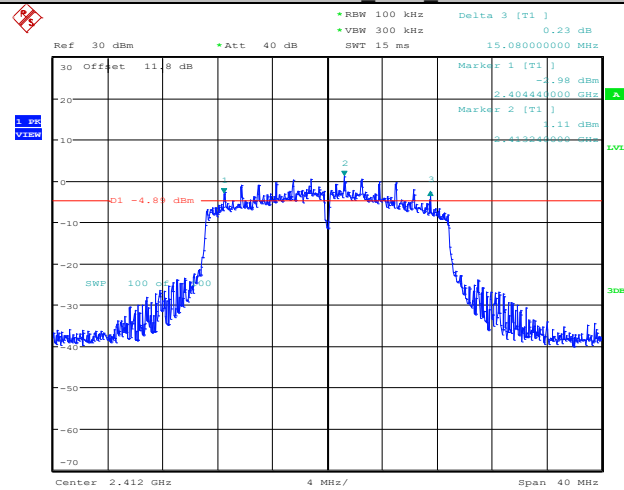

Date: 23.DEC.2024 15:43:26

11N20SISO_Ant1_2437

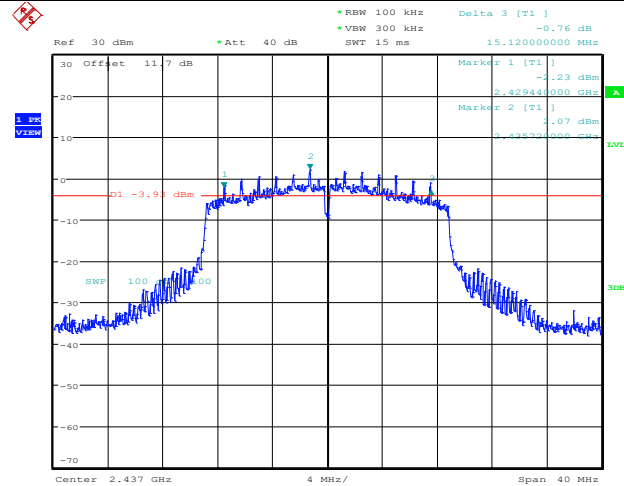

Date: 23.DEC.2024 16:26:29

11N20SISO_Ant1_2462

7. 99% BANDWIDTH

7.1.LIMITS OF 99% Bandwidth

RSS-GEN Clause 6.7, For reporting purposes only

7.2.TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer.

The transmitter output is connected to a spectrum analyzer.

The RBW is set to $\geq 1\%$ to 5% of the actual occupied.

The VBW is set to $\geq 3\text{RBW}$. The sweep time is coupled

7.3.TEST SETUP




7.4.TEST DATA

Table 8 99%Occupied Bandwidth Test Data


TestMode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	14.72	2404.4400	2419.1600	---	---
		2437	14.28	2429.8800	2444.1600	---	---
		2462	13.24	2455.2800	2468.5200	---	---
11G	Ant1	2412	16.96	2403.5200	2420.4800	---	---
		2437	17.28	2428.4400	2445.7200	---	---
		2462	16.84	2453.6000	2470.4400	---	---
11N20SISO	Ant1	2412	18.36	2402.8000	2421.1600	---	---
		2437	18.76	2427.6800	2446.4400	---	---
		2462	18.24	2452.8400	2471.0800	---	---

11B Ant1_2412

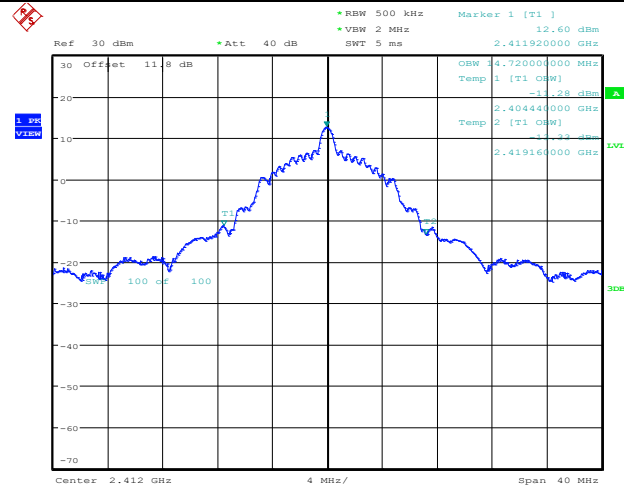


Date: 23.DEC.2024 13:33:49

11B Ant1_2437

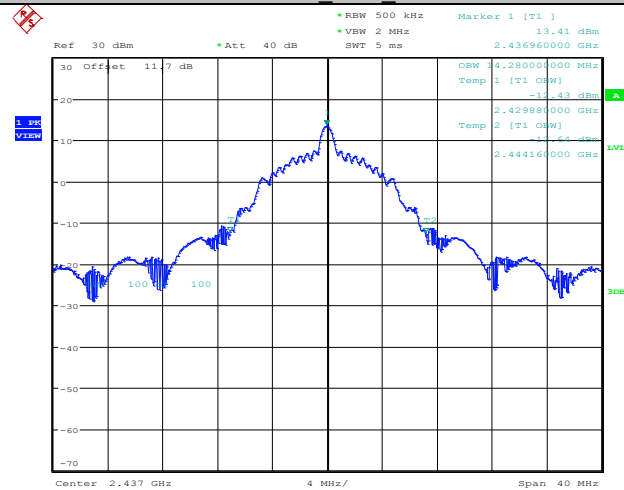


Date: 23.DEC.2024 14:10:25

11B Ant1_2462

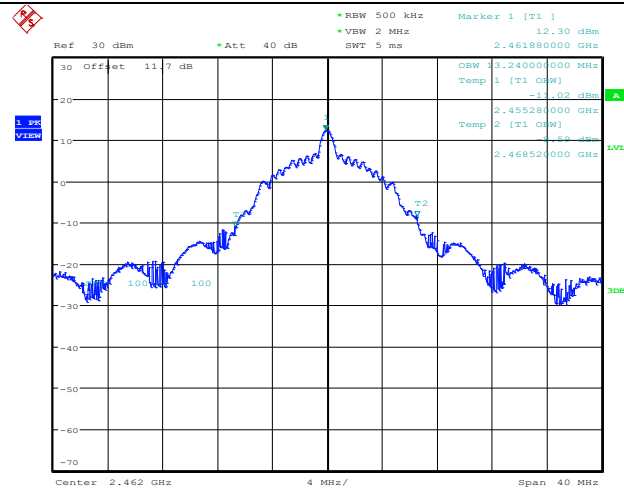


Date: 23.DEC.2024 14:26:54

11G_Ant1_2412

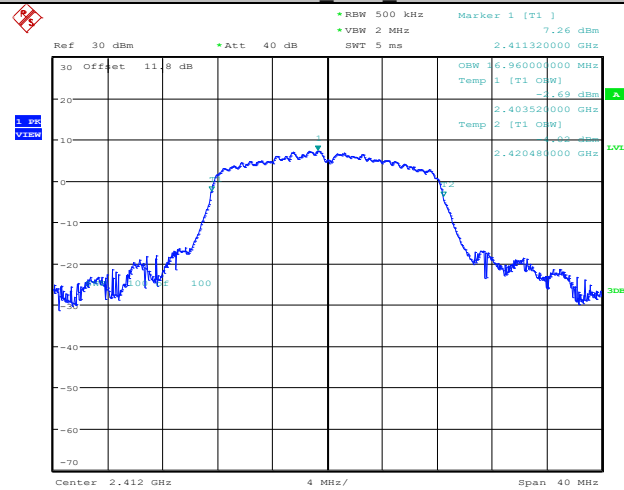


Date: 23.DEC.2024 14:52:58

11G_Ant1_2437

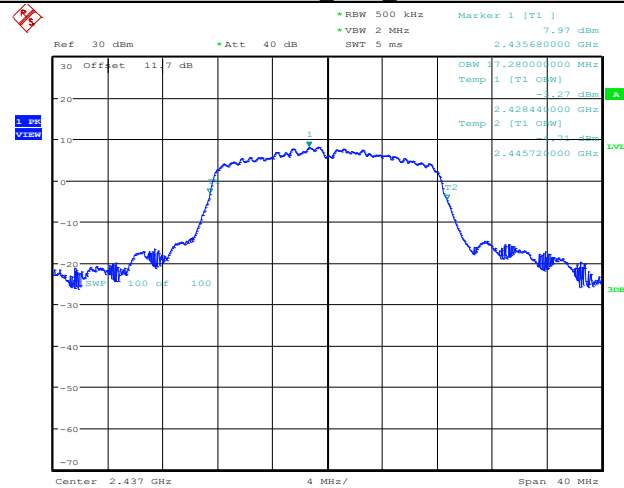


Date: 23.DEC.2024 15:10:13

11G_Ant1_2462

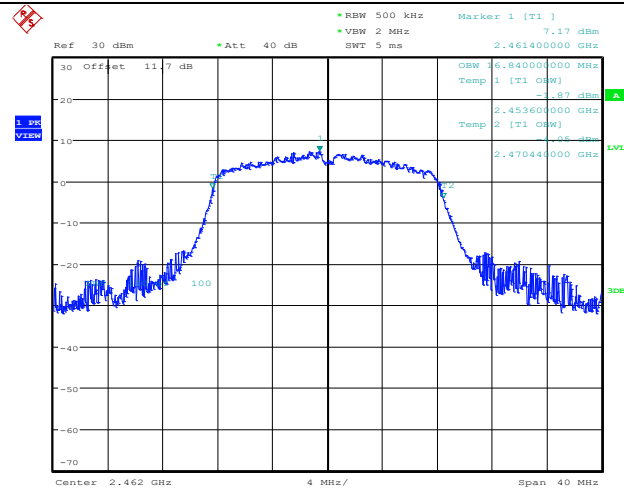


Date: 23.DEC.2024 15:29:16

11N20SISO_Ant1_2412

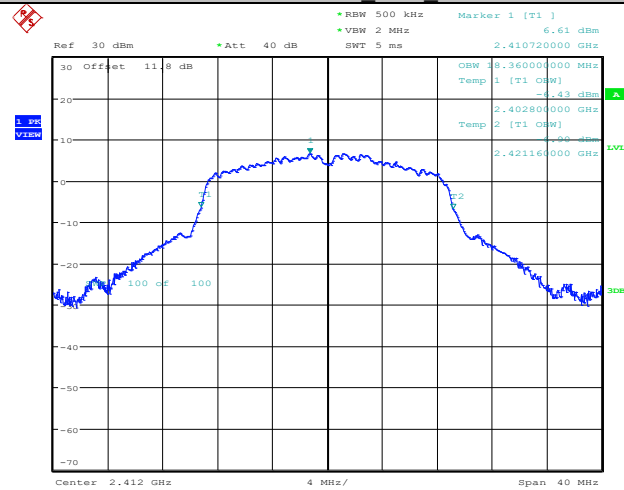


Date: 23.DEC.2024 15:43:58

11N20SISO_Ant1_2437

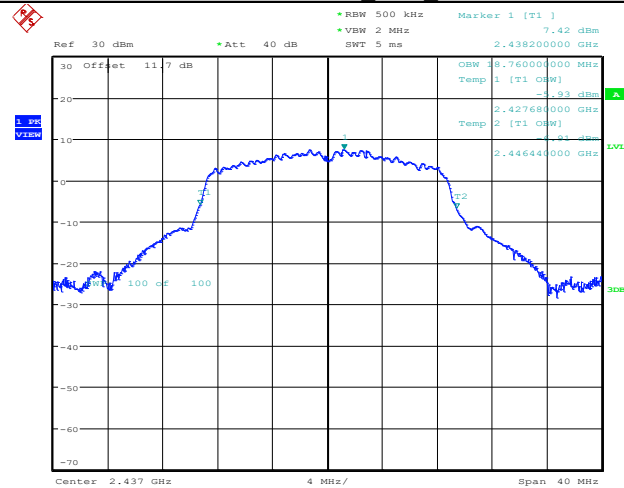

Date: 23.DEC.2024 16:26:58

11N20SISO_Ant1_2462

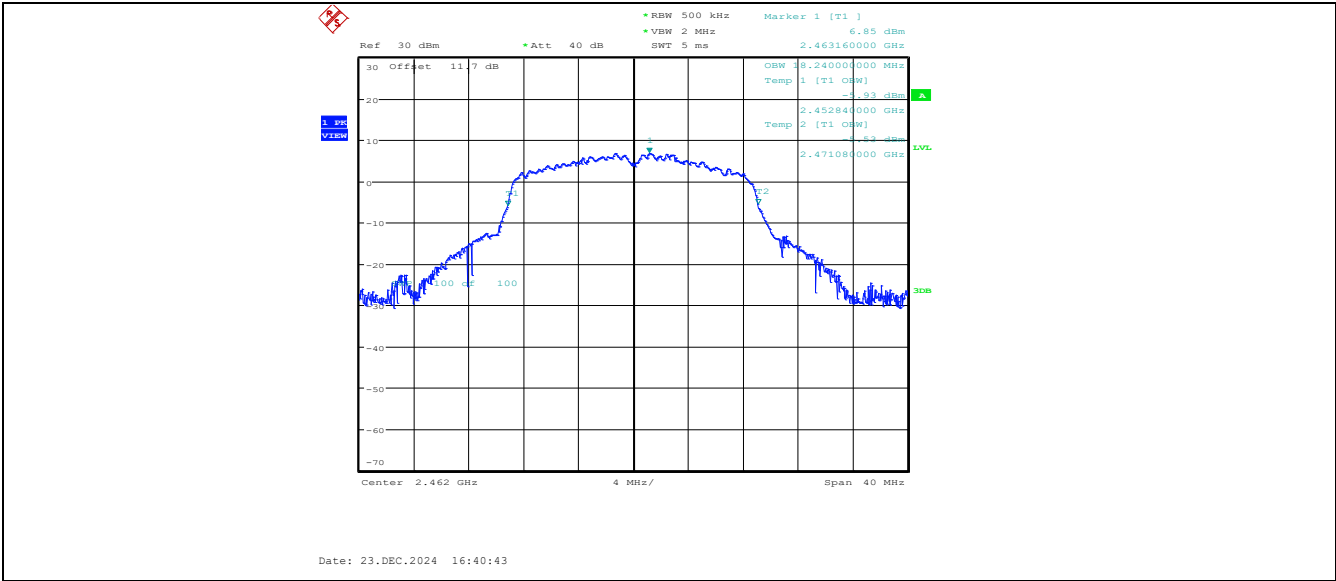

8. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

8.1. LIMITS OF Maximum Conducted Output Power Measurement

(FCC) part 15.247 (b) (3), 558074 D01 DTS Meas Guidance v05r02
RSS-247 Clause 5.4(d), For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.

8.2. TEST PROCEDURE

ANSI C63.10-2013 Clause 11.9

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth:

- a) Set the RBW = 1 MHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

8.3. TEST SETUP





8.4. TEST DATA

Table 9 Maximum Conducted Output Power Test Data

TestMode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Power Limit[dBm]	Antenna Gain[dBi]	EIRP [dBm]	EIRP Limit[dBm]	Verdict
11B	Ant1	2412	18.41	≤30	-3.5	14.91	≤36	PASS
		2437	19.16	≤30	-3.5	15.66	≤36	PASS
		2462	18.08	≤30	-3.5	14.58	≤36	PASS
11G	Ant1	2412	20.22	≤30	-3.5	16.72	≤36	PASS
		2437	21.09	≤30	-3.5	17.59	≤36	PASS
		2462	20.21	≤30	-3.5	16.71	≤36	PASS
11N20SISO	Ant1	2412	19.63	≤30	-3.5	16.13	≤36	PASS
		2437	20.51	≤30	-3.5	17.01	≤36	PASS
		2462	19.75	≤30	-3.5	16.25	≤36	PASS


Note: The Duty Cycle Factor is compensated in the graph.

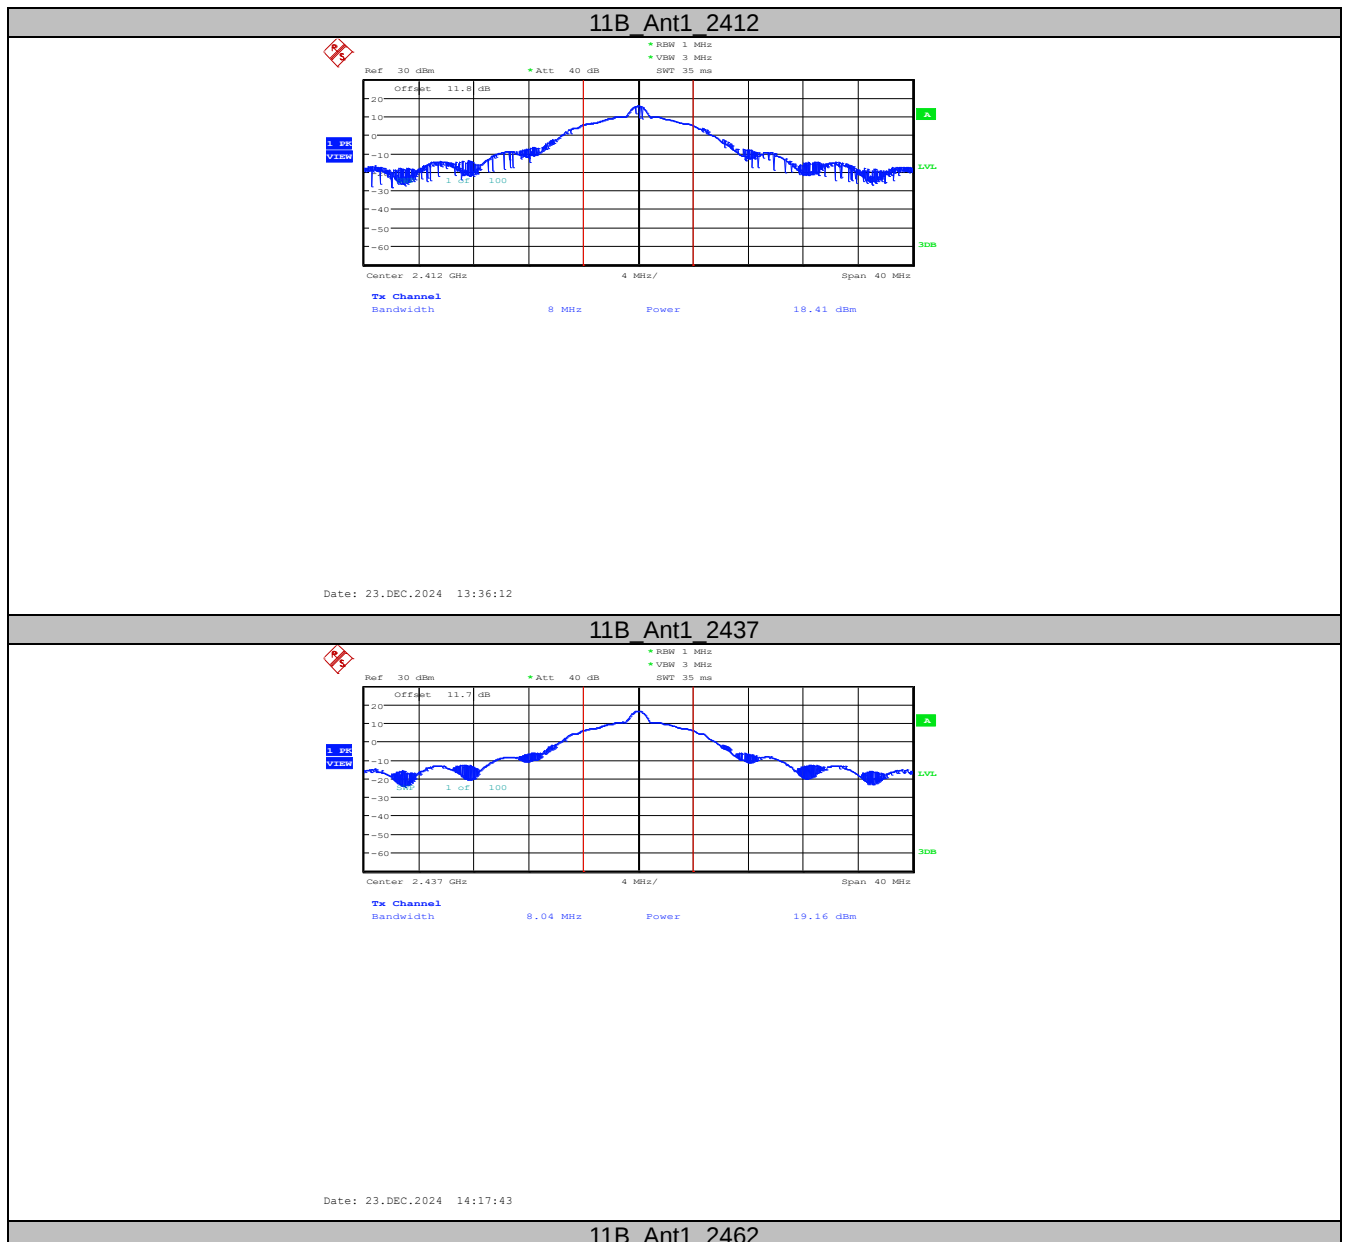

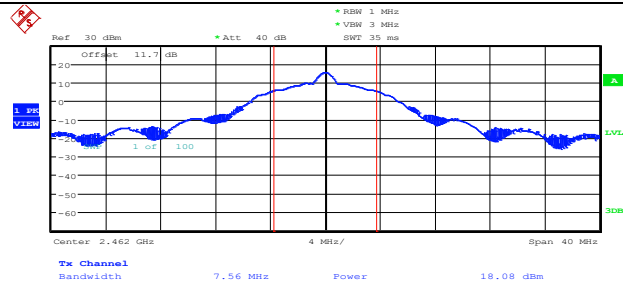


Date: 23.DEC.2024 14:33:13

11G_Ant1_2412

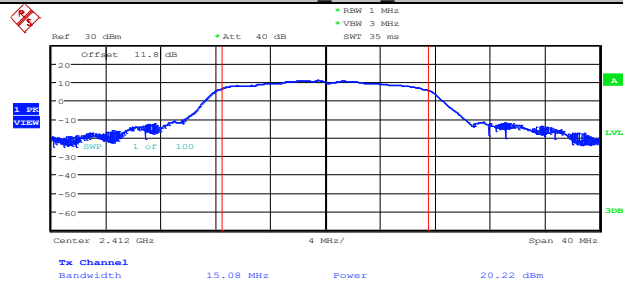


Date: 23.DEC.2024 14:56:27

11G_Ant1_2437

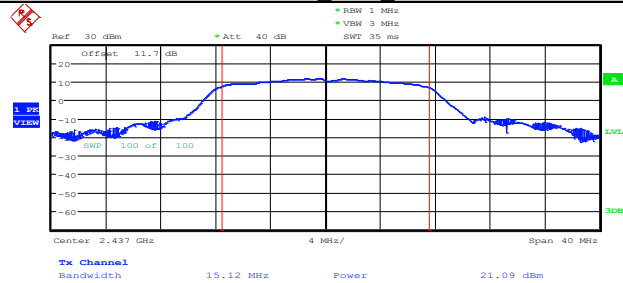


Date: 23.DEC.2024 15:13:26

11G_Ant1_2462

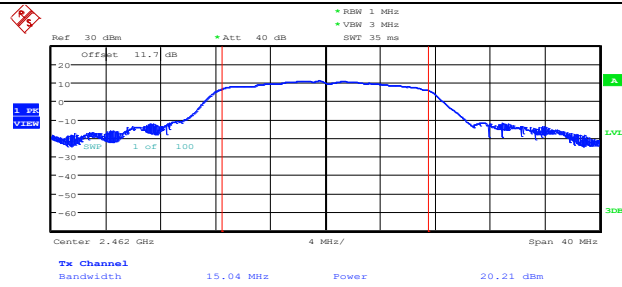


Date: 23.DEC.2024 15:32:36

11N20SISO_Ant1_2412

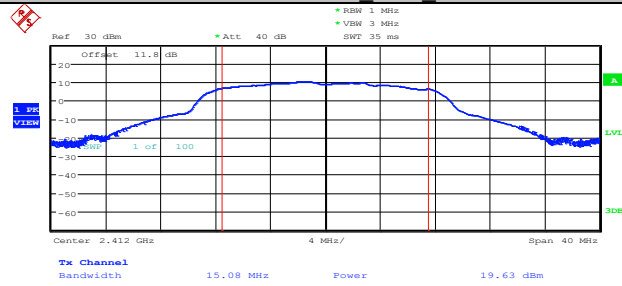


Date: 23.DEC.2024 15:49:49

11N20SISO_Ant1_2437

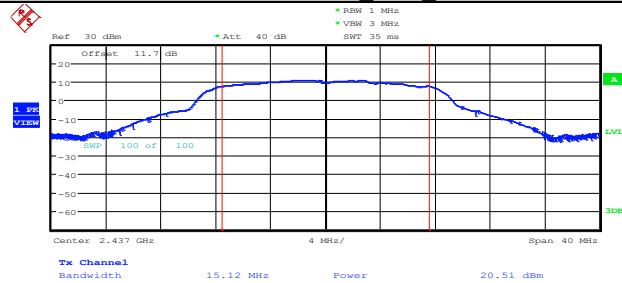

Date: 23.DEC.2024 16:29:42

11N20SISO_Ant1_2462

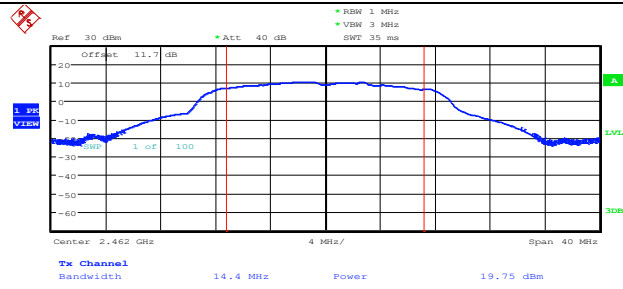

Date: 23.DEC.2024 16:46:16

9. MAXIMUM POWER SPECTRAL DENSITY LEVEL MEASUREMENT

9.1.LIMITS OF Maximum Power Spectral Density Level Measurement

CFR 47 (FCC) part 15.247 (e)

RSS-247 Clause 5.2(b), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. EST PROCEDURE

ANSI C63.10-2013 Clause 11.10

The transmitter output was connected to the spectrum analyzer.

a) Set analyzer center frequency to DTS channel center frequency.

b) Set the span to 1.5 times the DTS bandwidth.

c) Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.

d) Set VBW $\geq 3 \times \text{RBW}$.

e) Detector = peak.

f) Sweep time = auto couple.

g) Trace mode = max hold.

h) Allow trace to fully stabilize.

i) Use the peak marker function to determine the maximum amplitude level within the RBW.

j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


9.2. TEST DATA

Table 10 Maximum Power Spectral Density Level Test Data

TestMode	Antenna	Frequency [MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-10.00	≤ 8.00	PASS
		2437	-9.56	≤ 8.00	PASS
		2462	-10.39	≤ 8.00	PASS
11G	Ant1	2412	-12.33	≤ 8.00	PASS
		2437	-11.65	≤ 8.00	PASS
		2462	-12.40	≤ 8.00	PASS
11N20SISO	Ant1	2412	-12.39	≤ 8.00	PASS
		2437	-11.60	≤ 8.00	PASS
		2462	-12.23	≤ 8.00	PASS


Note: The Duty Cycle Factor is compensated in the graph.

11B Ant1_2412

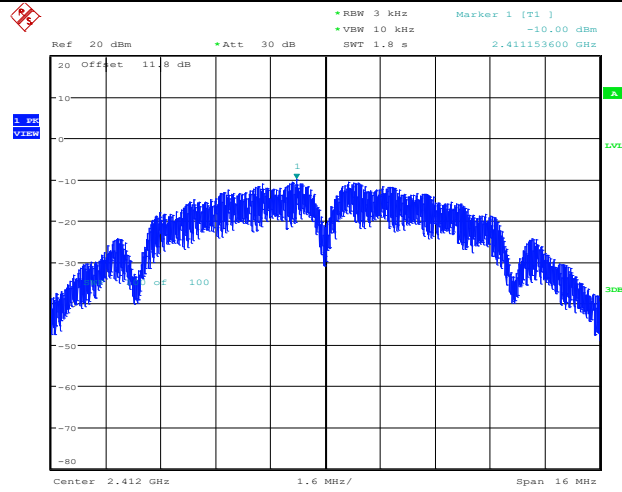


Date: 23.DEC.2024 13:40:11

11B Ant1_2437

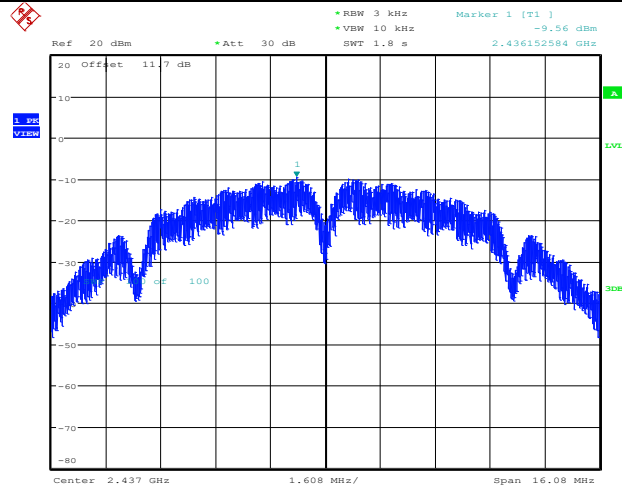


Date: 23.DEC.2024 14:21:42

11B Ant1_2462

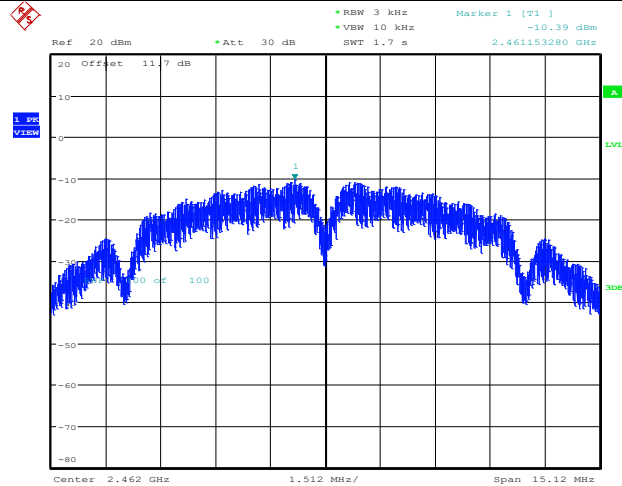


Date: 23.DEC.2024 14:36:59

11G Ant1_2412

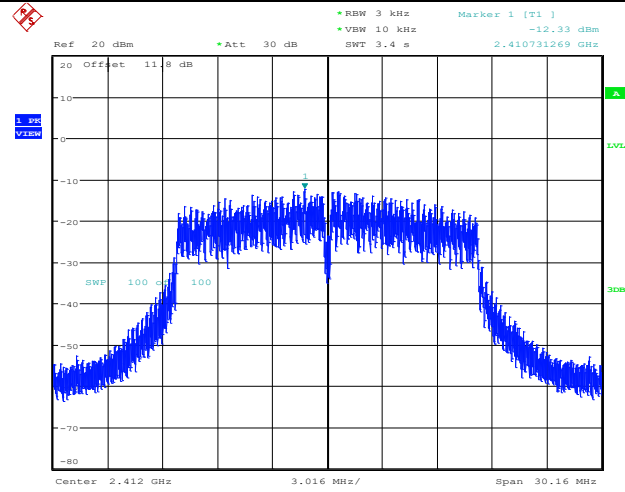


Date: 23.DEC.2024 15:03:54

11G Ant1_2437

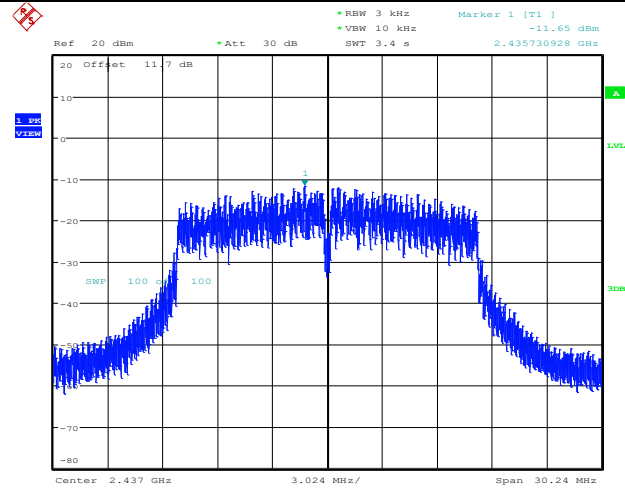


Date: 23.DEC.2024 15:20:52

11G Ant1_2462

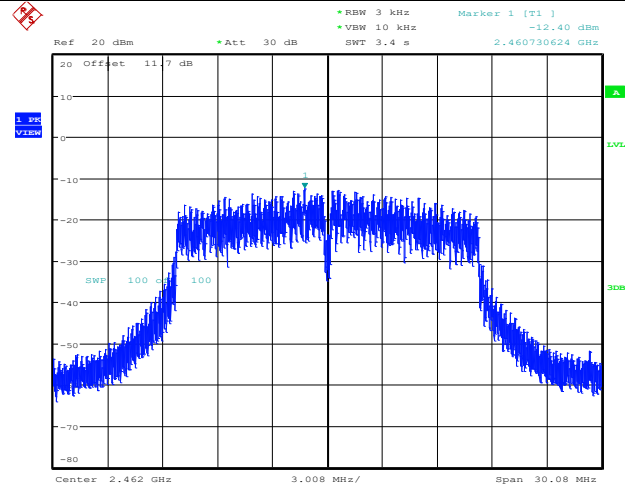


Date: 23.DEC.2024 15:40:03

11N20SISO_Ant1_2412

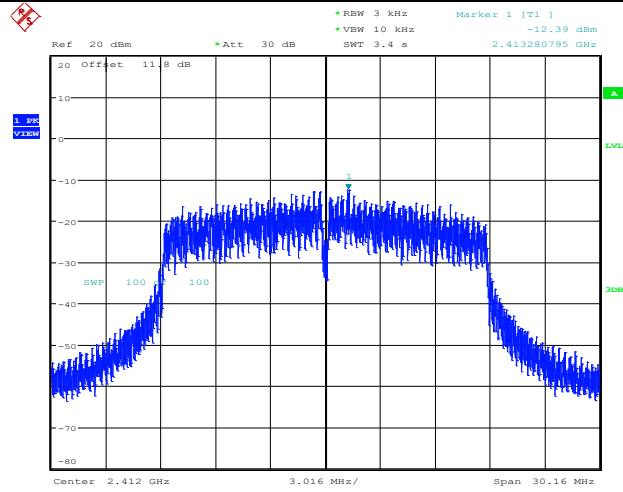


Date: 23.DEC.2024 15:57:15

11N20SISO_Ant1_2437

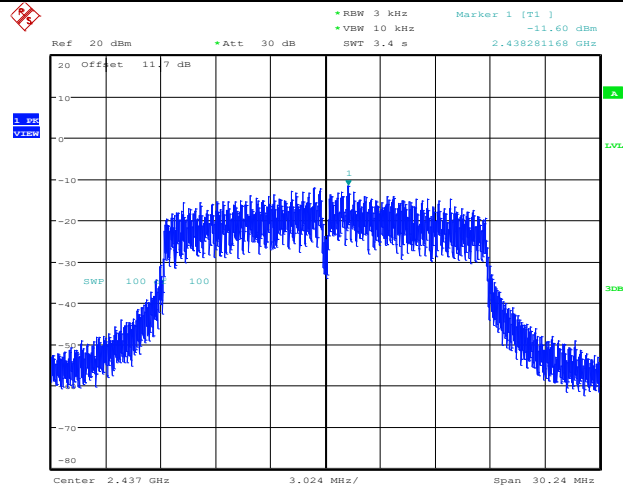

Date: 23.DEC.2024 16:37:08

11N20SISO_Ant1_2462

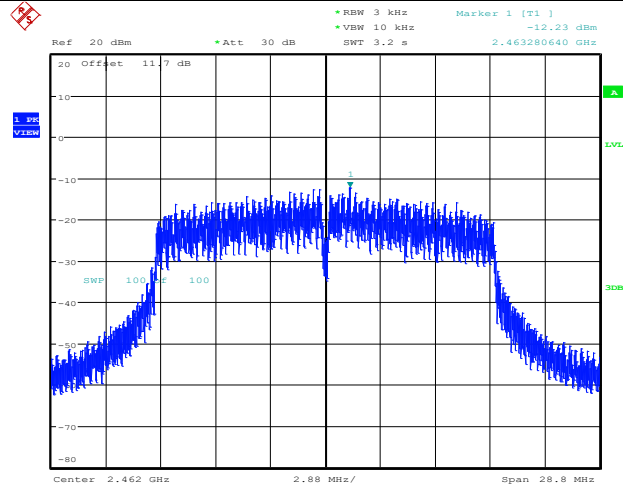

Date: 23.DEC.2024 16:53:17

10. CONDUCTED BANDEDGE AND SPURIOUS MEASUREMENT

10.1. LIMITS OF Conducted Bandedge and Spurious Measurement

CFR 47 (FCC) part 15.247 (d) and 558074 D01 DTS Meas Guidance v05r02, RSS-247 Clause 5.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

10.2. TEST PROCEDURE

ANSI C63.10-2013 Clause 11.11

The transmitter output was connected to the spectrum analyzer.

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement


- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.


Test Result: All emission outside of 2400-2483.5 are lower at least 20dB than fundamental frequency.

10.3. TEST DATA

Table 11 Band edge Test Data


TestMode	Antenna	ChName	Frequency [MHz]	RefLevel	Result	Limit	Verdict
11B	Ant1	Low	2412	4.87	-35.28	≤-15.13	PASS
		High	2462	4.88	-40.97	≤-15.12	PASS
11G	Ant1	Low	2412	1.37	-33.07	≤-18.63	PASS
		High	2462	1.72	-42.68	≤-18.28	PASS
11N20SISO	Ant1	Low	2412	1.15	-26.65	≤-18.85	PASS
		High	2462	1.24	-39.88	≤-18.76	PASS

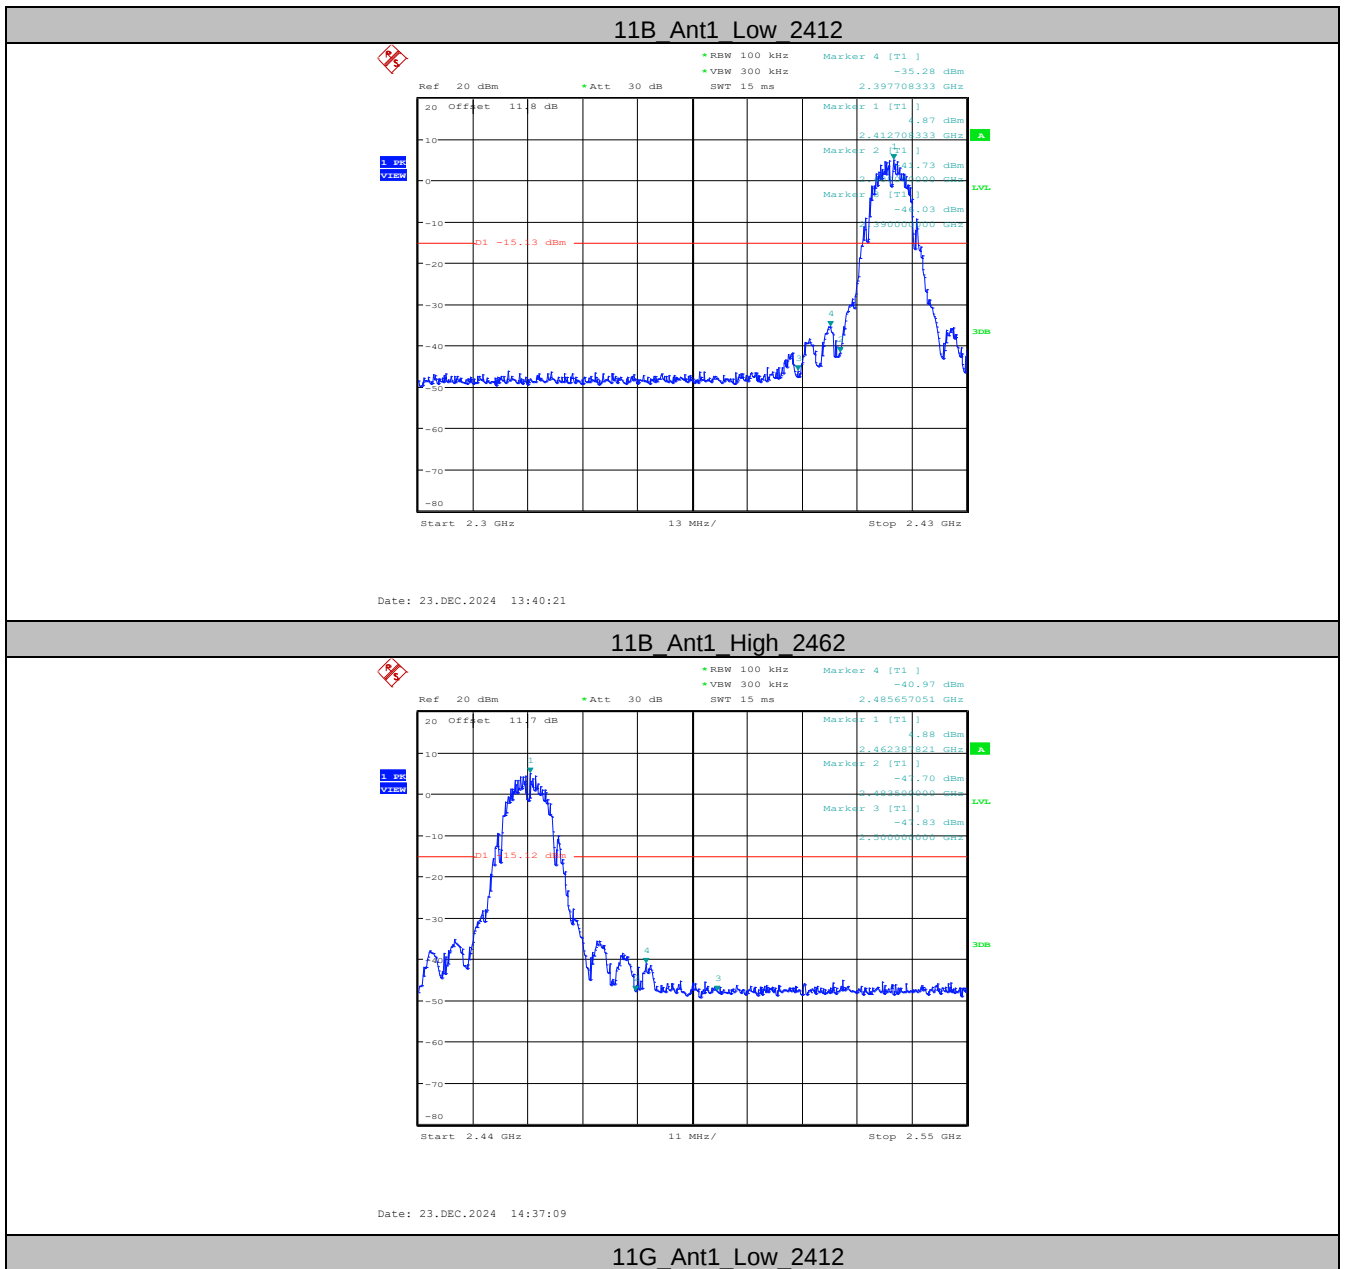

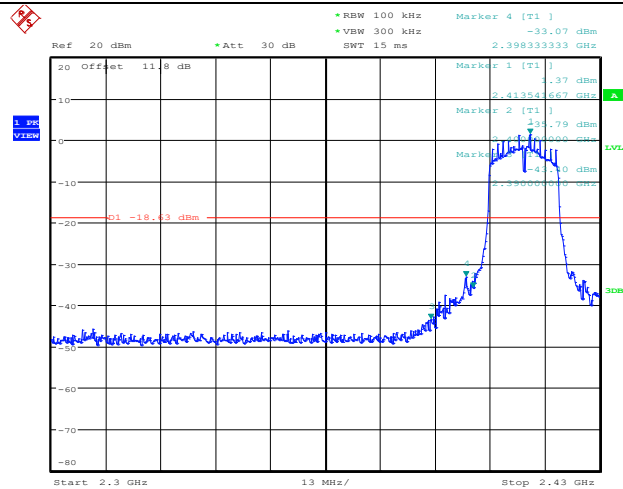


Date: 23.DEC.2024 15:04:04

11G Ant1 High 2462

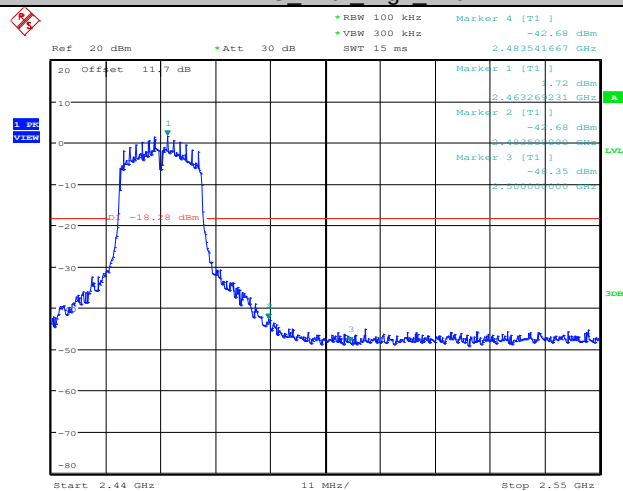

Date: 23.DEC.2024 15:40:13

11N20SISO Ant1 Low 2412

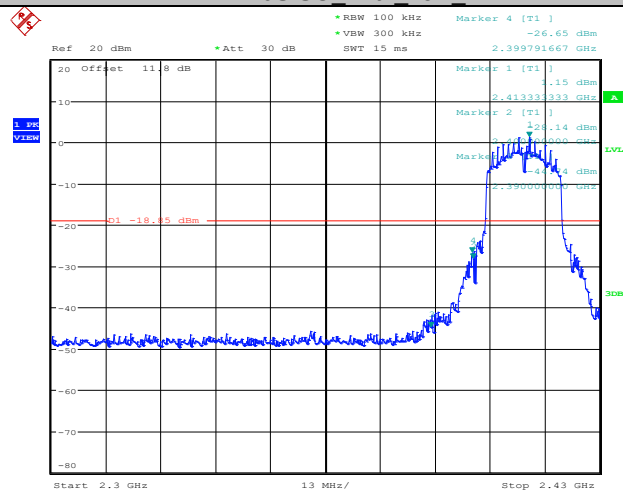

Date: 23.DEC.2024 15:57:25


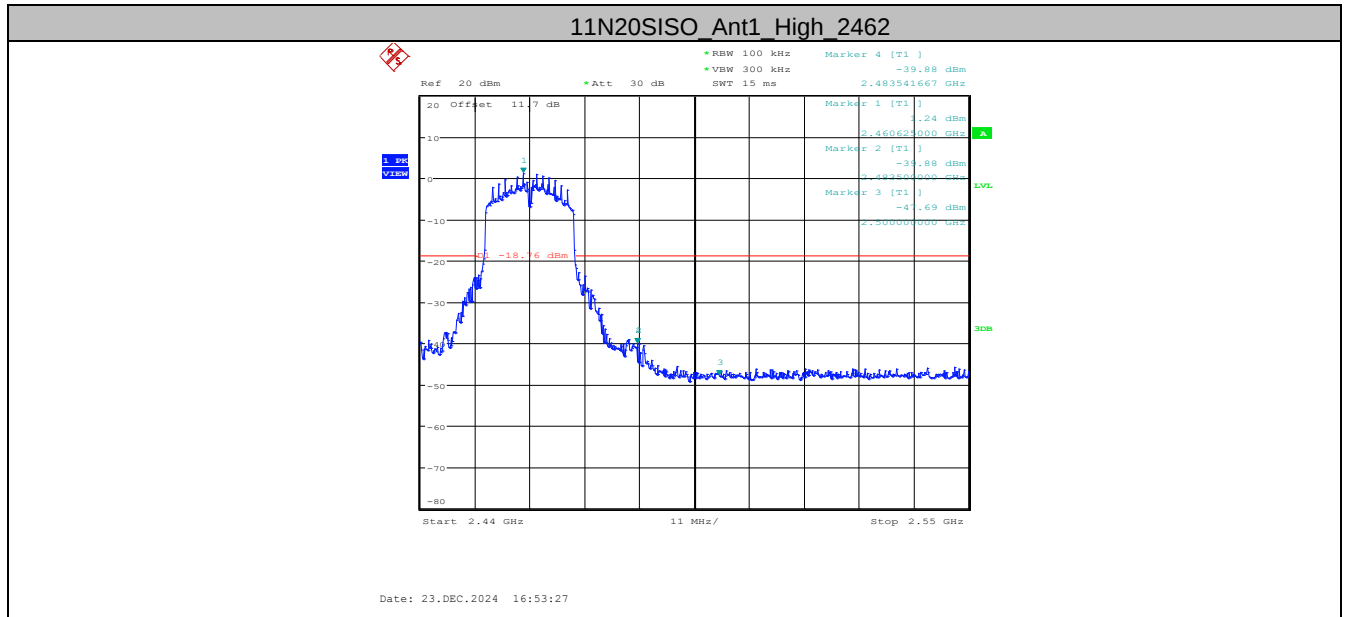


Table 12 Conducted Spurious Emission Test Data


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel	Result	Limit	Verdict
11B	Ant1	2412	Reference	5.31	5.31	---	PASS
			30~1000	5.31	-45.44	≤-14.69	PASS
			1000~26500	5.31	-51.38	≤-14.69	PASS
		2437	Reference	5.80	5.80	---	PASS
			30~1000	5.80	-45.41	≤-14.2	PASS
			1000~26500	5.80	-51.26	≤-14.2	PASS
		2462	Reference	4.96	4.96	---	PASS
			30~1000	4.96	-47.97	≤-15.04	PASS
			1000~26500	4.96	-52.63	≤-15.04	PASS
11G	Ant1	2412	Reference	1.81	1.81	---	PASS
			30~1000	1.81	-53.63	≤-18.19	PASS
			1000~26500	1.81	-52.31	≤-18.19	PASS
		2437	Reference	2.55	2.55	---	PASS
			30~1000	2.55	-54.61	≤-17.45	PASS
			1000~26500	2.55	-52.52	≤-17.45	PASS
		2462	Reference	1.71	1.71	---	PASS
			30~1000	1.71	-55.49	≤-18.29	PASS
			1000~26500	1.71	-51.57	≤-18.29	PASS
11N20SISO	Ant1	2412	Reference	1.28	1.28	---	PASS
			30~1000	1.28	-53.89	≤-18.72	PASS
			1000~26500	1.28	-51.81	≤-18.72	PASS
		2437	Reference	1.97	1.97	---	PASS
			30~1000	1.97	-54.93	≤-18.03	PASS
			1000~26500	1.97	-52.54	≤-18.03	PASS
		2462	Reference	1.50	1.50	---	PASS
			30~1000	1.50	-55.34	≤-18.5	PASS
			1000~26500	1.50	-51.34	≤-18.5	PASS

11B_Ant1_2412_0-Reference

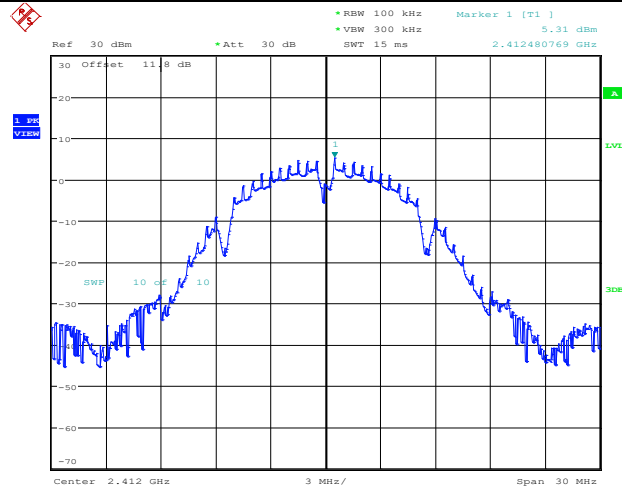


Date: 23.DEC.2024 13:41:30

11B_Ant1_2412_30~1000

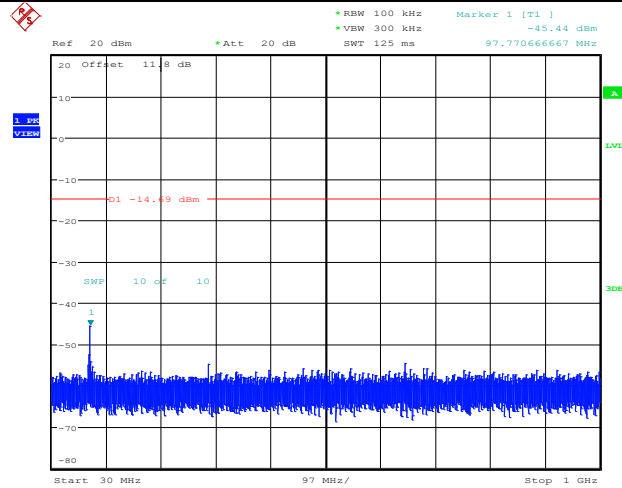


Date: 23.DEC.2024 13:41:39

11B_Ant1_2412_1000~26500

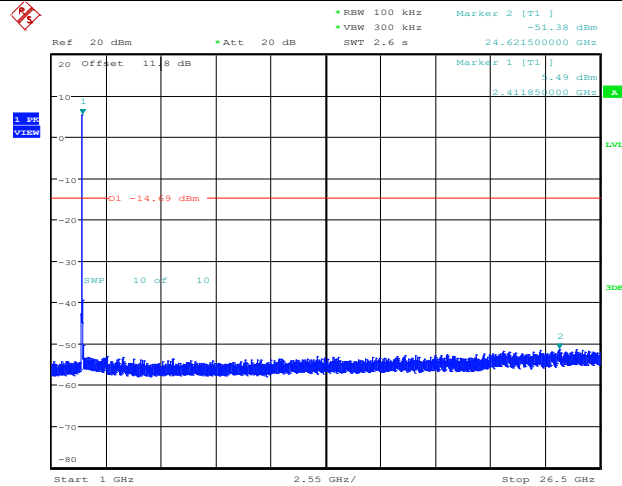


Date: 23.DEC.2024 14:02:03

11B_Ant1_2437_0-Reference

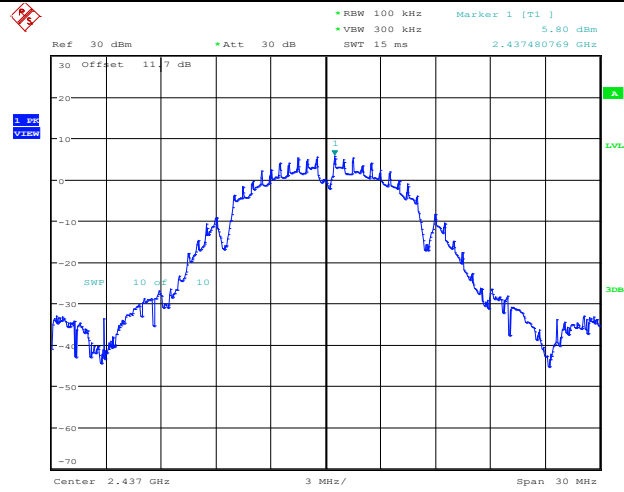


Date: 23.DEC.2024 14:21:50

11B_Ant1_2437_30~1000

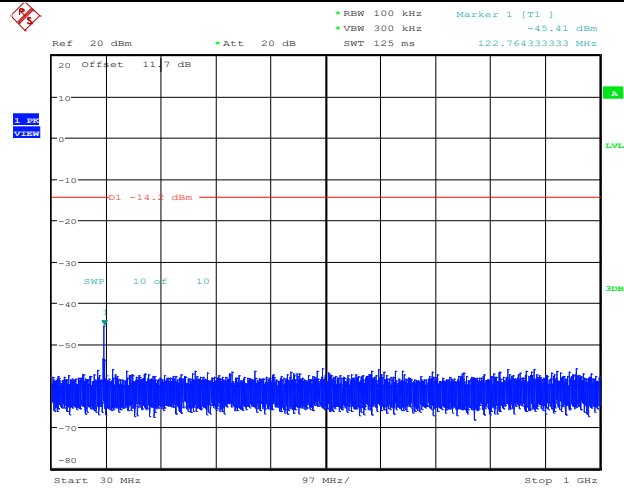


Date: 23.DEC.2024 14:21:59

11B_Ant1_2437_1000~26500

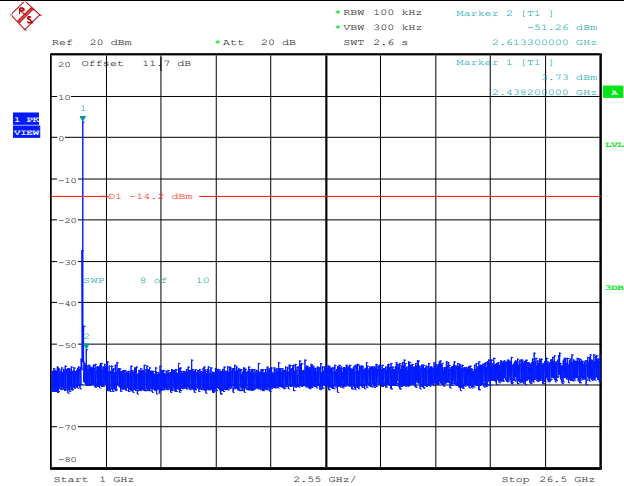


Date: 23.DEC.2024 14:22:22

11B_Ant1_2462_0-Reference

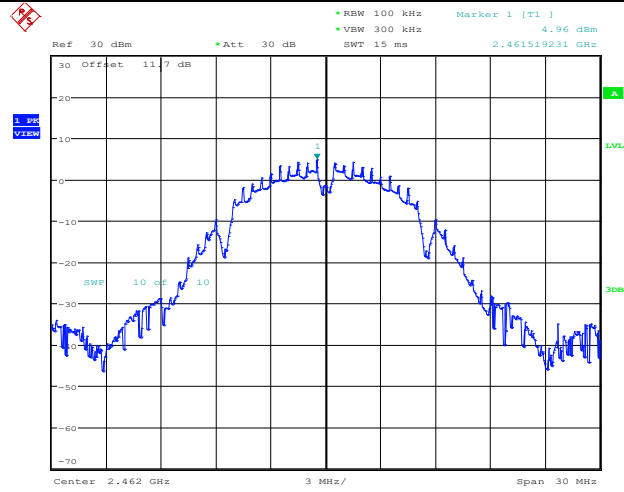


Date: 23.DEC.2024 14:38:18

11B_Ant1_2462_30~1000

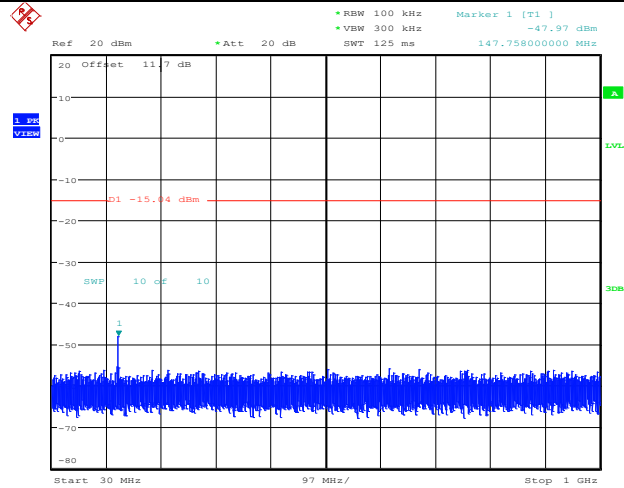


Date: 23.DEC.2024 14:38:27

11B_Ant1_2462_1000~26500

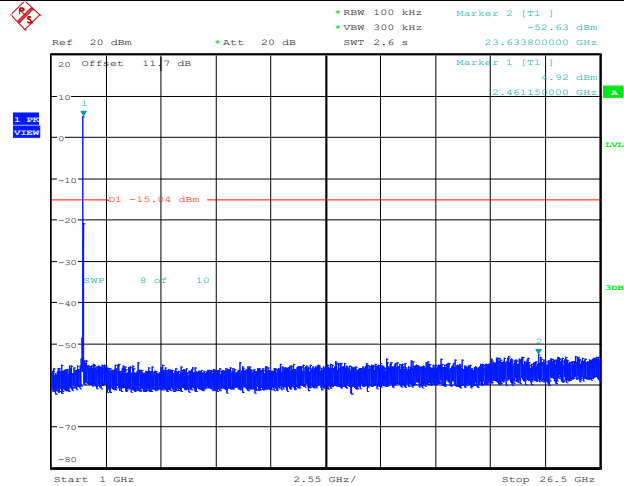


Date: 23.DEC.2024 14:38:49

11G_Ant1_2412_0-Reference

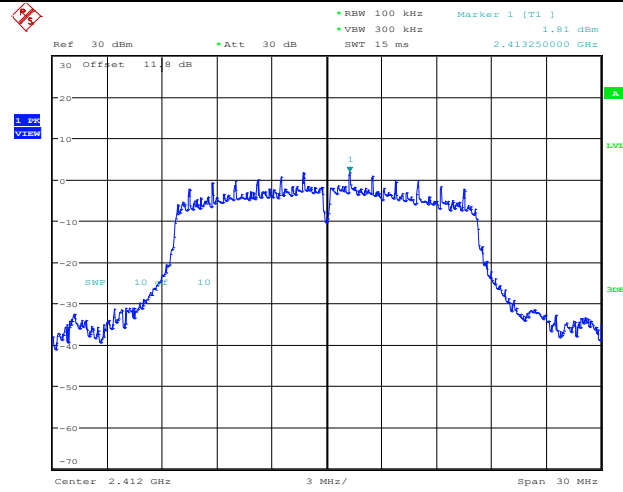


Date: 23.DEC.2024 15:05:12

11G_Ant1_2412_30~1000

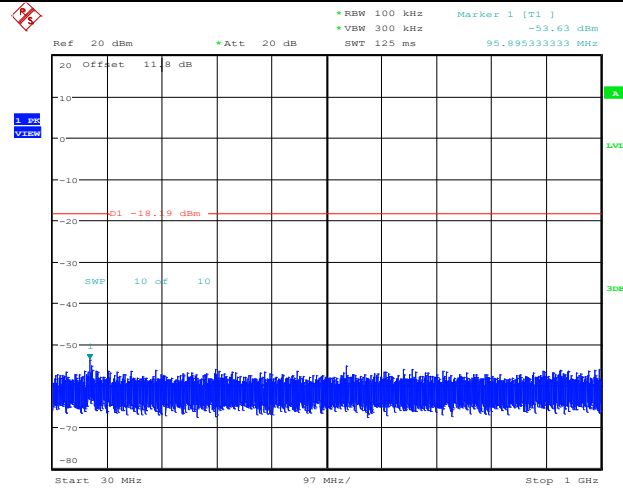


Date: 23.DEC.2024 15:05:21

11G_Ant1_2412_1000~26500

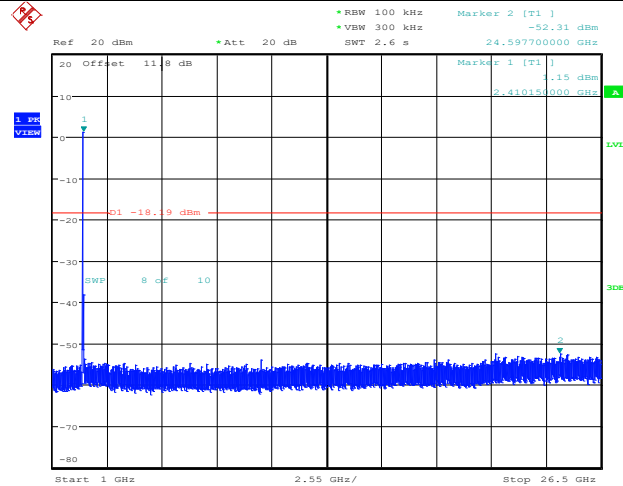


Date: 23.DEC.2024 15:05:44

11G_Ant1_2437_0-Reference

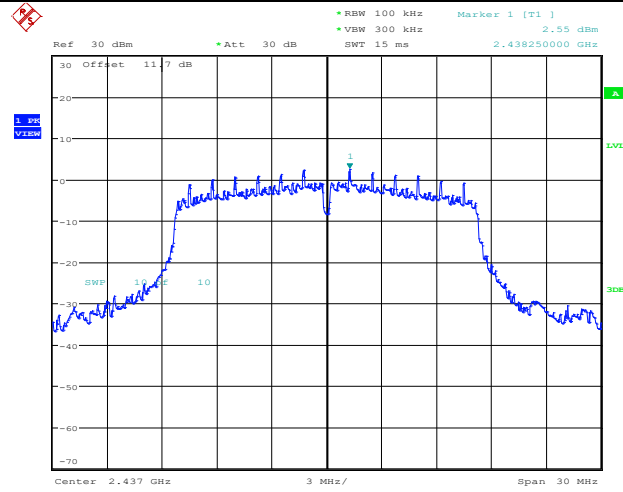


Date: 23.DEC.2024 15:21:00

11G_Ant1_2437_30~1000

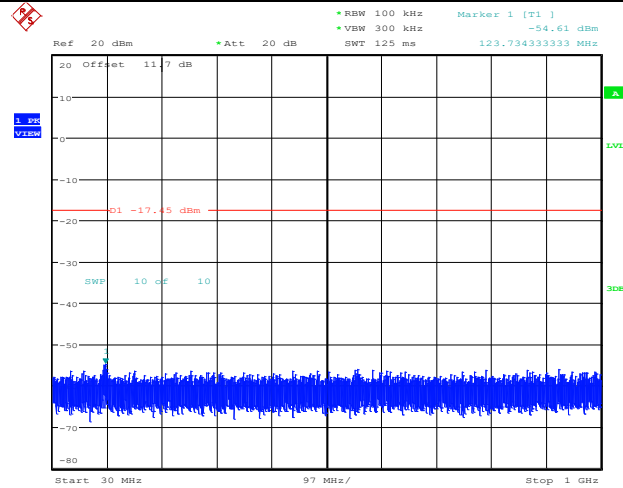


Date: 23.DEC.2024 15:21:09

11G_Ant1_2437_1000~26500

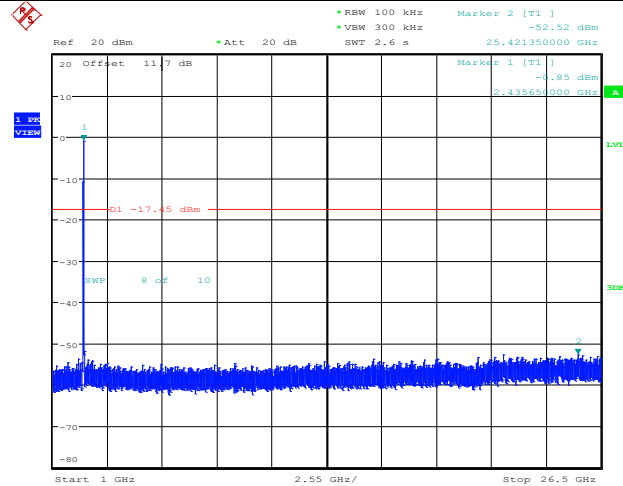


Date: 23.DEC.2024 15:21:32

11G_Ant1_2462_0-Reference

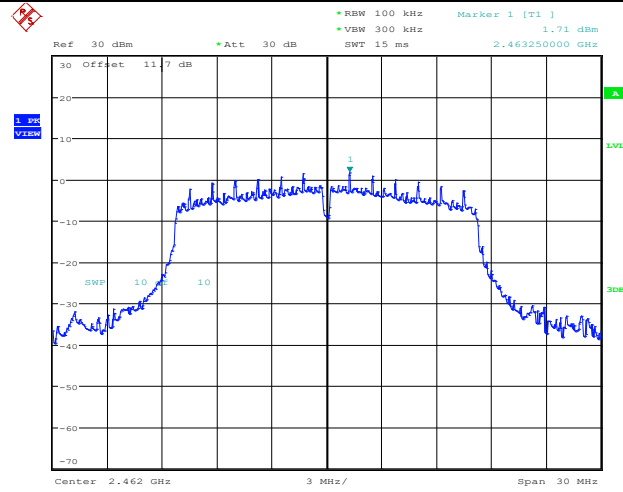


Date: 23.DEC.2024 15:41:21

11G_Ant1_2462_30~1000

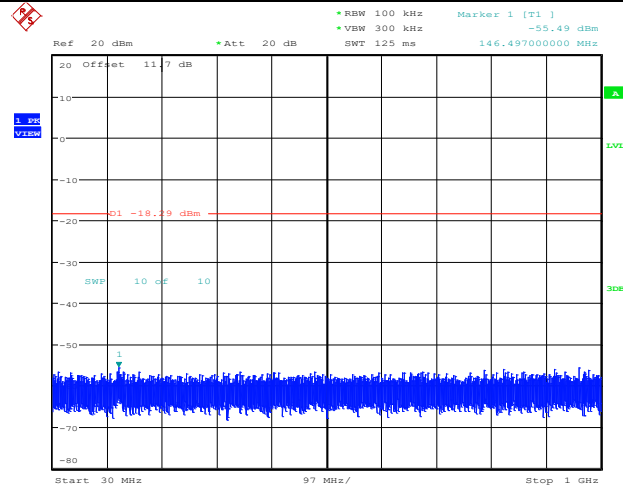


Date: 23.DEC.2024 15:41:30

11G_Ant1_2462_1000~26500

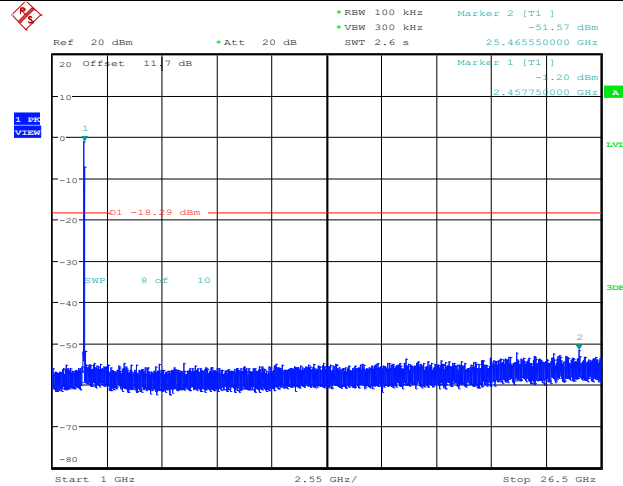


Date: 23.DEC.2024 15:41:53

11N20SISO_Ant1_2412_0~Reference

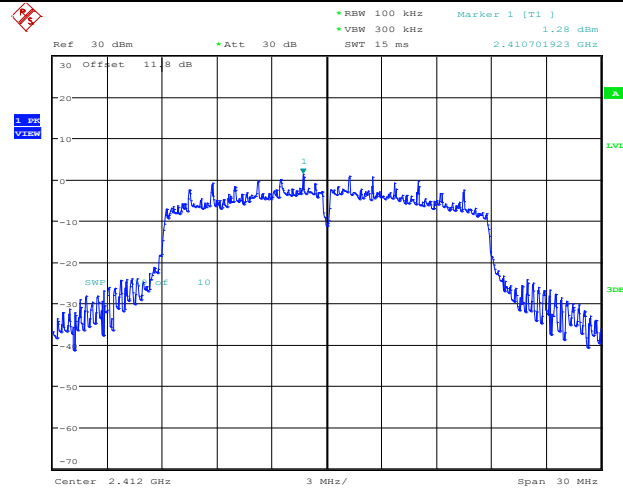


Date: 23.DEC.2024 15:58:34

11N20SISO_Ant1_2412_30~1000

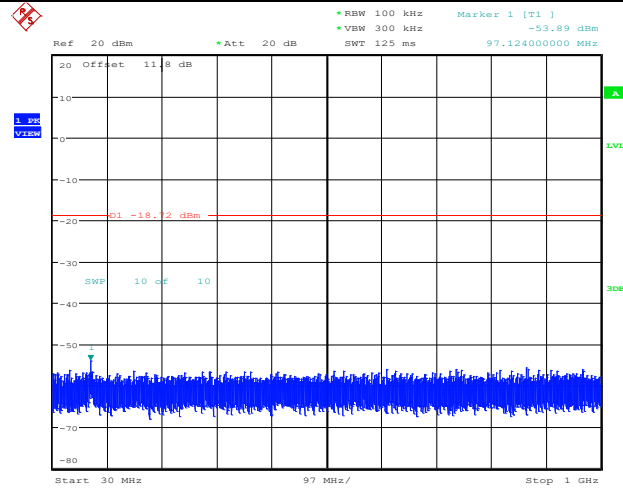


Date: 23.DEC.2024 15:58:43

11N20SISO_Ant1_2412_1000~26500

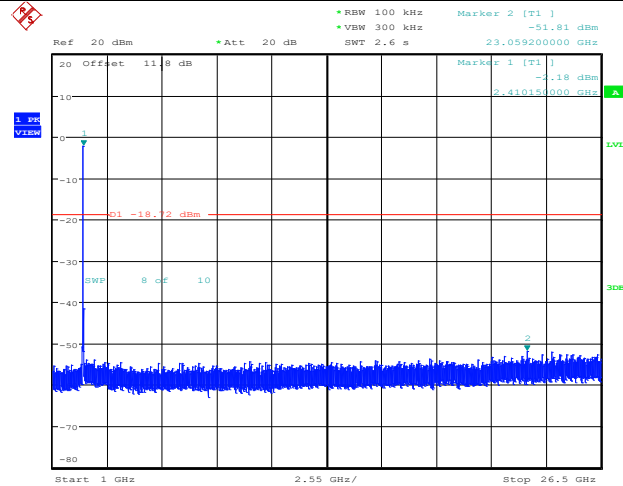


Date: 23.DEC.2024 15:59:05

11N20SISO_Ant1_2437_0~Reference

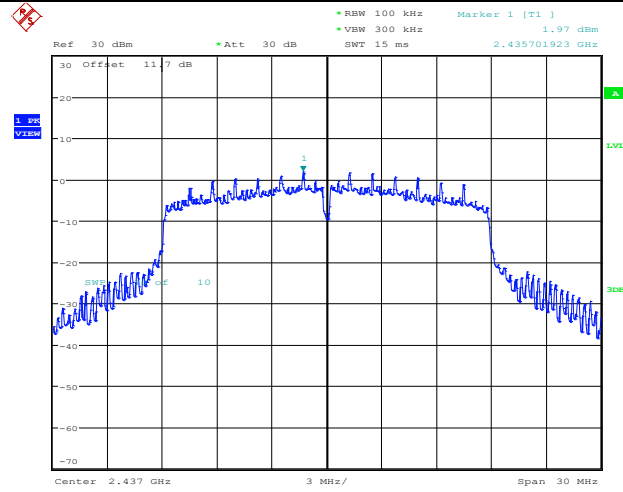


Date: 23.DEC.2024 16:37:16

11N20SISO_Ant1_2437_30~1000

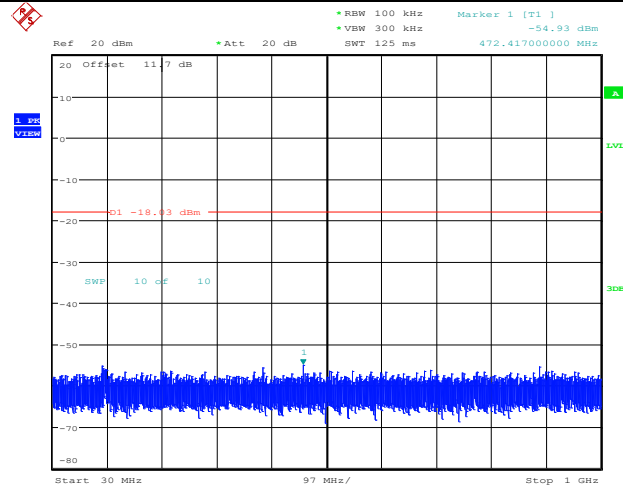


Date: 23.DEC.2024 16:37:25

11N20SISO_Ant1_2437_1000~26500

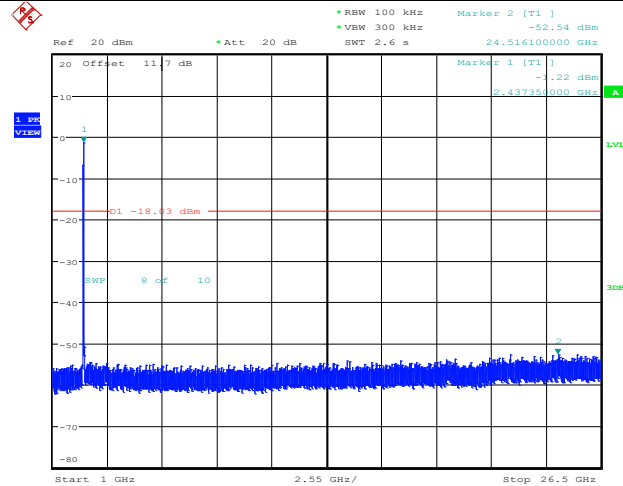


Date: 23.DEC.2024 16:37:47

11N20SISO_Ant1_2462_0~Reference

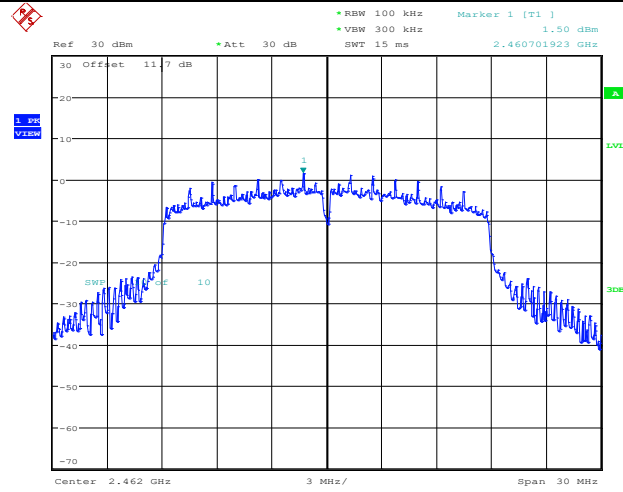


Date: 23.DEC.2024 16:56:18

11N20SISO_Ant1_2462_30~1000

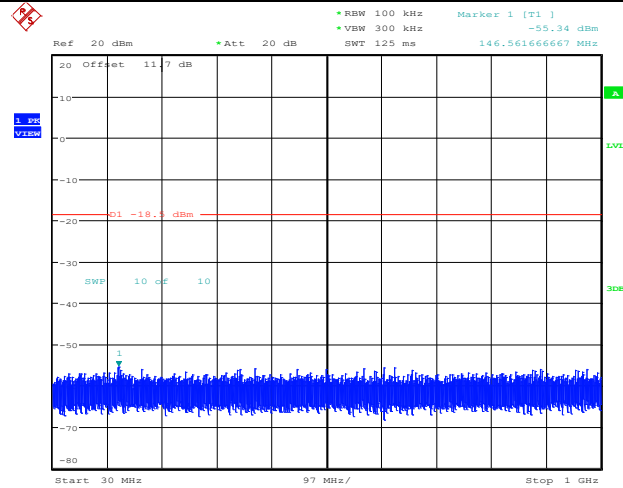

Date: 23.DEC.2024 16:56:27

11N20SISO_Ant1_2462_1000~26500

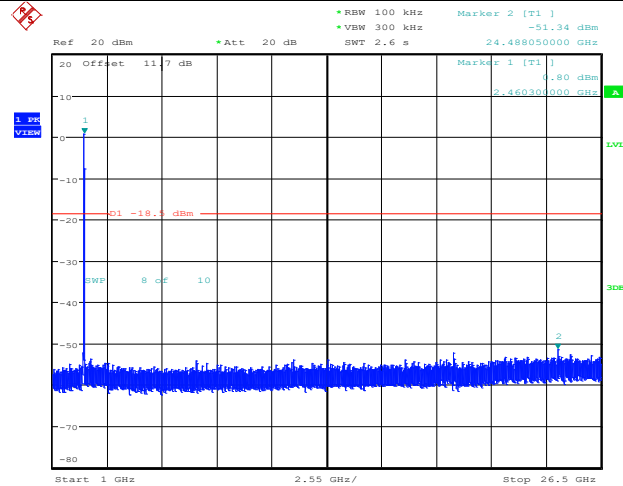

Date: 23.DEC.2024 16:56:50

11. RADIATED BANDEDGE AND SPURIOUS MEASUREMENT

11.1. LIMITS OF Radiated Bandedge and Spurious Measurement

CFR 47 (FCC) part 15.247 (d) and 558074 D01 DTS Meas Guidance v05r02

RSS-247 Clause 5.5 and RSS GEN Clause 8.9

Table 13 Radiation Emission Test Limit (9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Table 14 Radiation Emission Test Limit (Above 1G)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Table 15 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6-12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25-13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35-16.2
8.362 - 8.366	156.52475	2483.5 - 2500	17.7-21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01-23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6-24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2-31.8
12.51975	- 167.72 - 173.2	3345.8 - 3358	36.43-36.5
12.52025	240 - 285	3600 - 4400	(²)
12.57675	- 322 - 335.4		
12.57725			
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

11.2.TEST PROCEDURE

ANSI C63.10-2013 Clause 11.12

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. For measurement below 1GHz, the EUT was placed on a turntable with 0.8 meter, above ground. For measurement above 1 GHz, test at FAR, the EUT is placed on a non-conductive table, which is 1.5 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f > 1$ GHz for peak measurement. Set RBW = 1 MHz, and VBW= 1/T (on time) for average measurement.

11.3.TEST DATA

9 kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Table 16 Radiated Emission Test Data 9k Hz-30MHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dB μ V/m)	Level (dB μ V/m)	Polarity (H/V)	Limit (dB μ V/m)	Margin (dB)	Note
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

30MHz-1GHz

Worst case is shown below for 30MHz-1GHz only.

The emissions don't show in following result tables are more than 20dB below the limits.


Table 17 Radiated Emission Test Data 30MHz-1GHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dBμV/m)	Level (dBμV/m)	Polarity (Horizontal/Vertical)	Limit (dBμV/m)	Margin (dB)	Note
33.449	0.7	12.3	14.7	27.7	Vertical	40.0	12.3	QP
57.806	0.8	13.0	13.7	27.5	Vertical	40.0	12.5	QP
78.284	1.1	7.8	16.2	25.1	Vertical	40.0	14.9	QP
92.511	1.1	11.9	17.2	30.2	Vertical	43.5	13.3	QP
99.517	1.1	12.8	10.4	24.3	Vertical	43.5	19.2	QP
180.566	1.6	9.7	8.4	19.7	Vertical	43.5	23.8	QP
33.448	0.7	12.3	2.3	15.3	Horizontal	40	24.7	QP
44.873	0.7	13.6	1.5	15.8	Horizontal	40	24.2	QP
77.745	1.0	7.8	3.5	12.3	Horizontal	40	27.7	QP
93.050	1.1	11.9	6.5	19.5	Horizontal	43.5	24.0	QP
99.516	1.1	12.8	9.0	22.9	Horizontal	43.5	20.6	QP
129.587	1.3	10.5	2.5	14.3	Horizontal	43.5	29.2	QP


Remark: Emission level (dBuV)=Read Value(dBuV/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

30MHz-1GHz

Horizontal

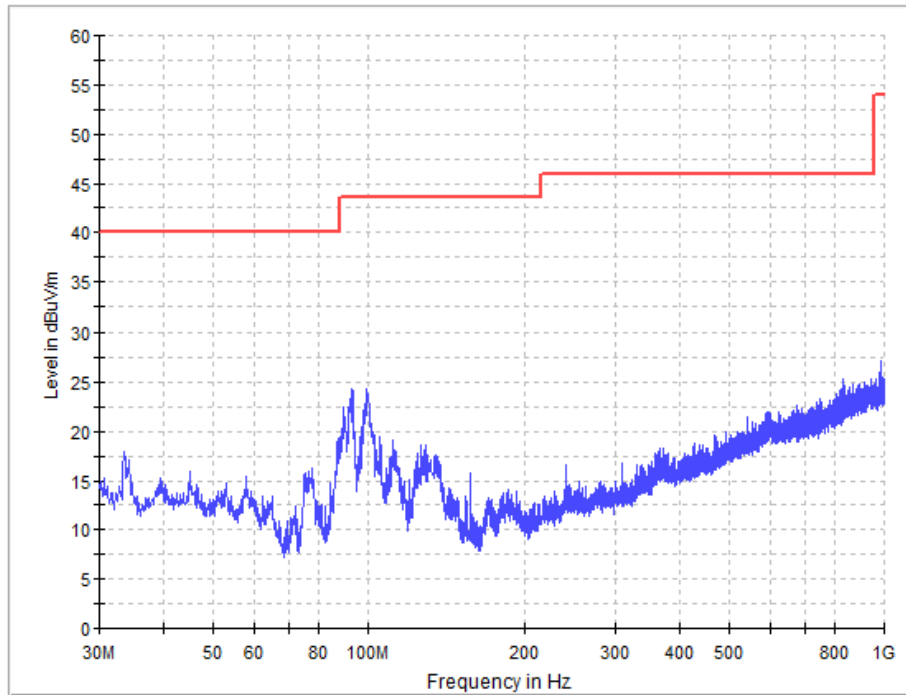


Vertical

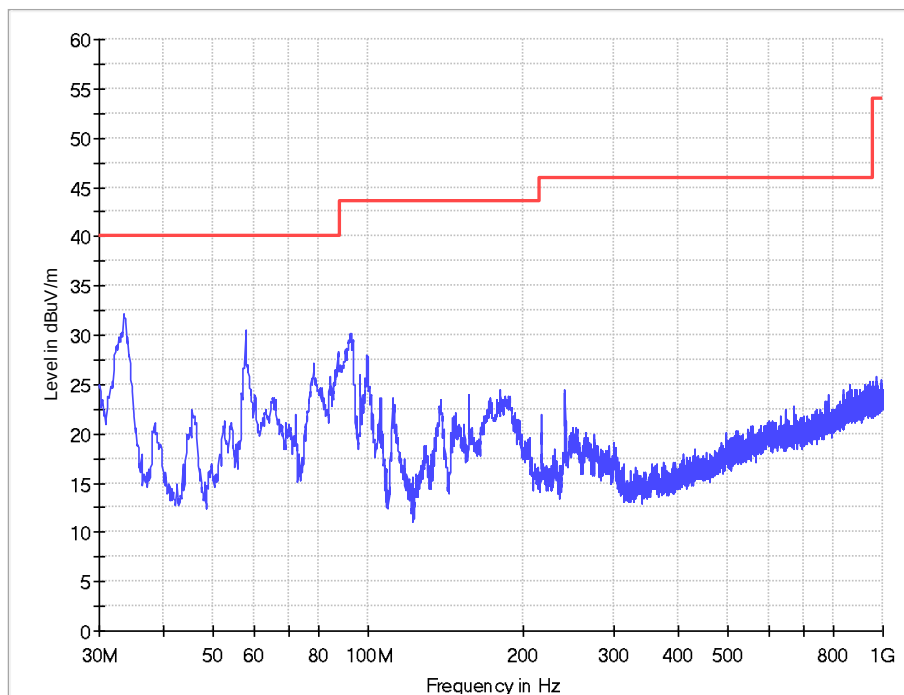


1-18G

802.11b CH1

Horizontal

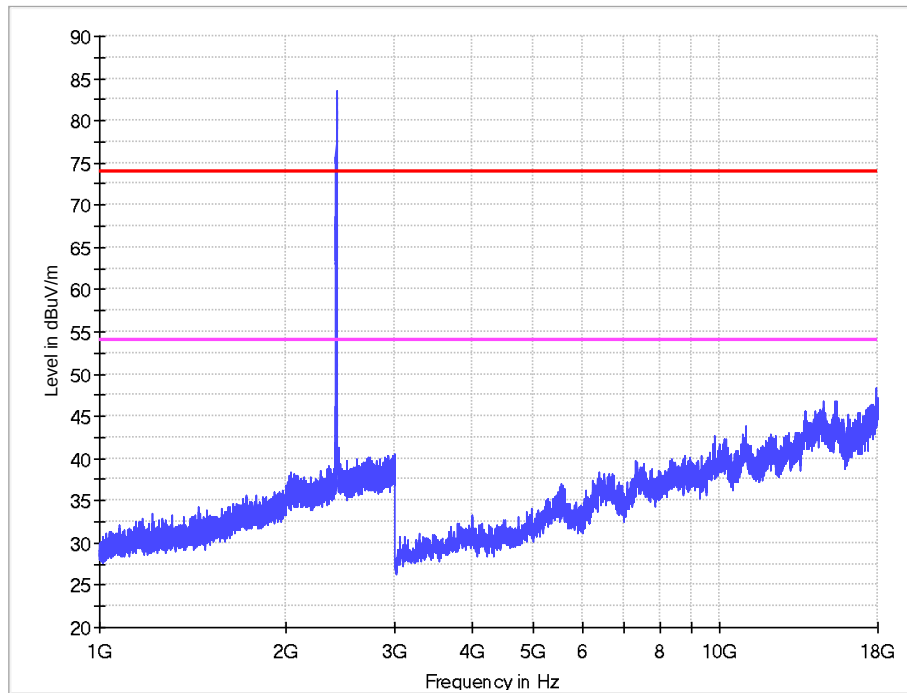


Vertical

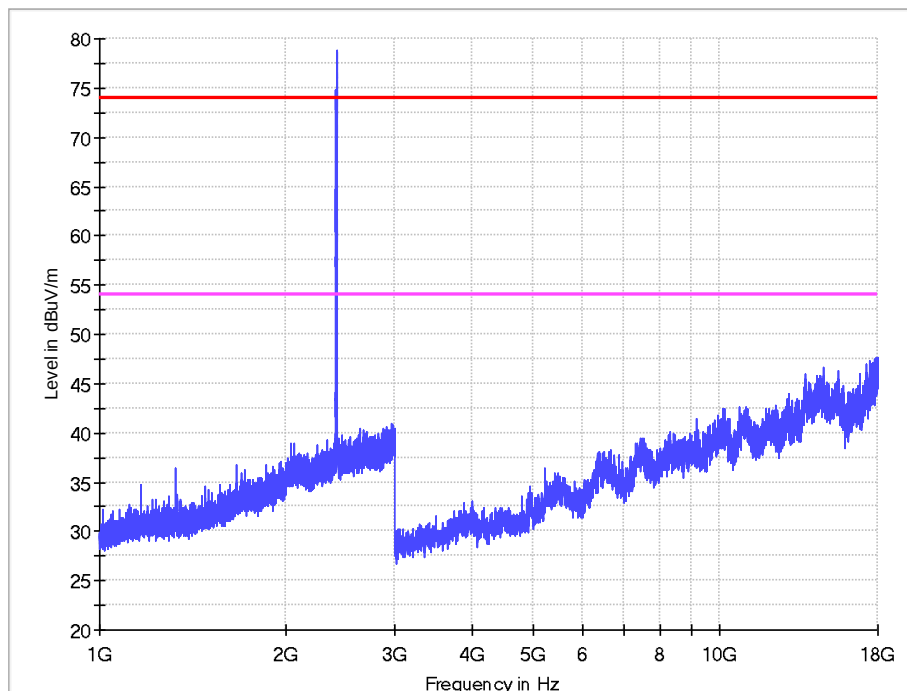


1-18G

802.11b CH6

Horizontal

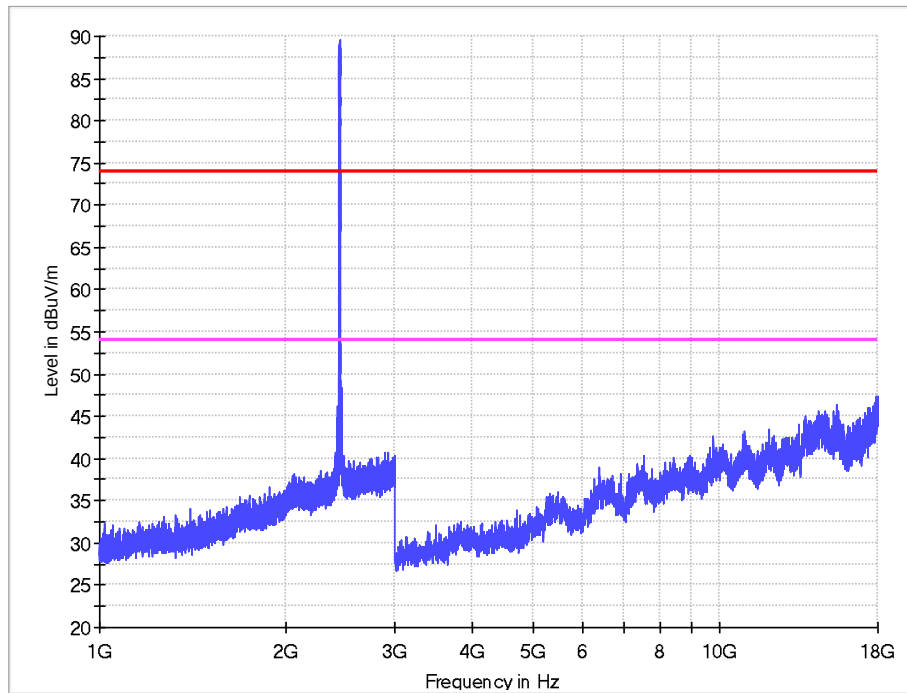


Vertical

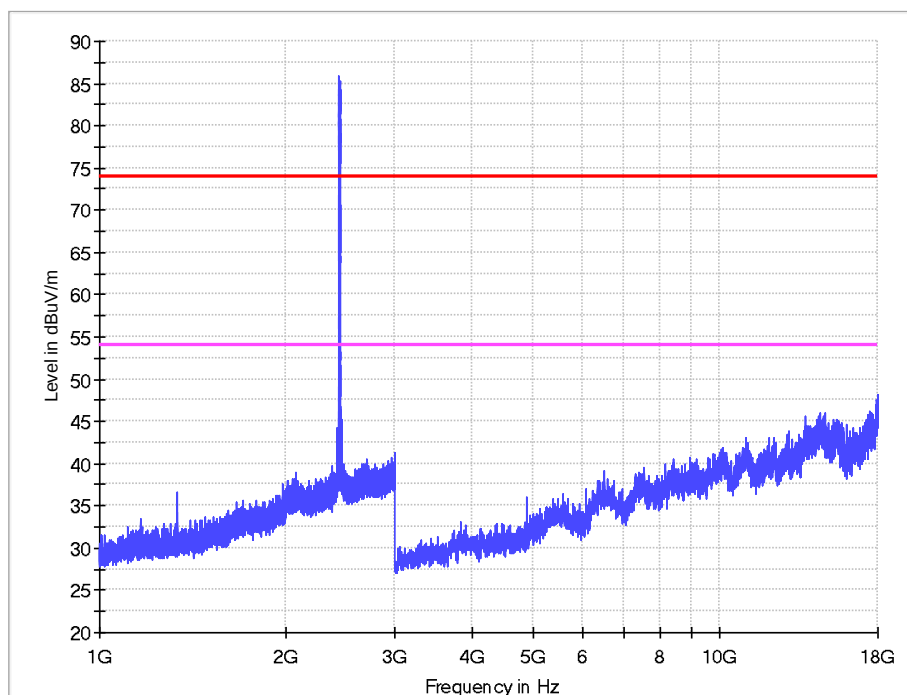


1-18G

802.11b CH11

Horizontal

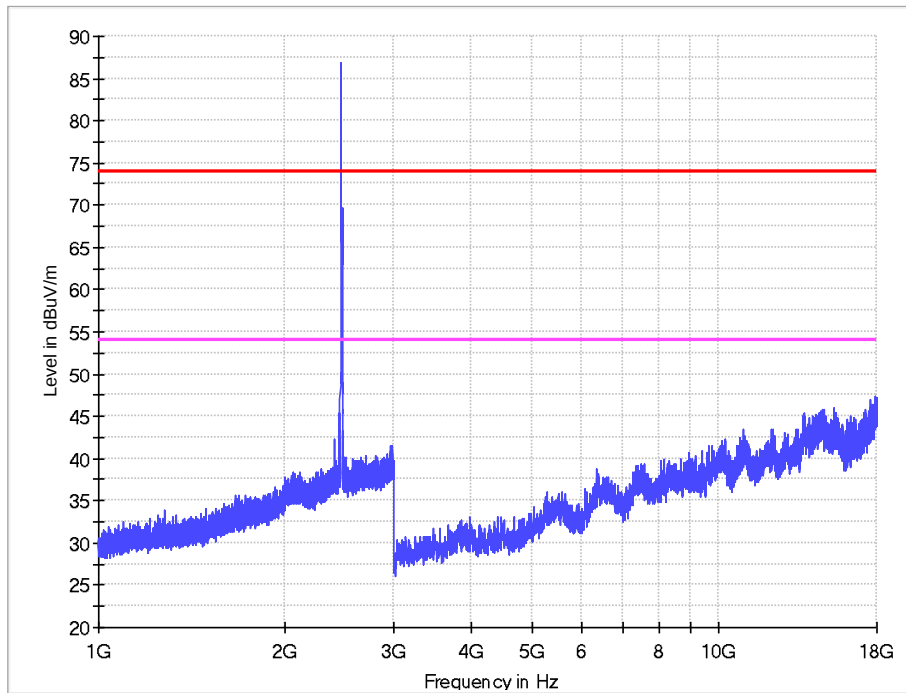


Vertical

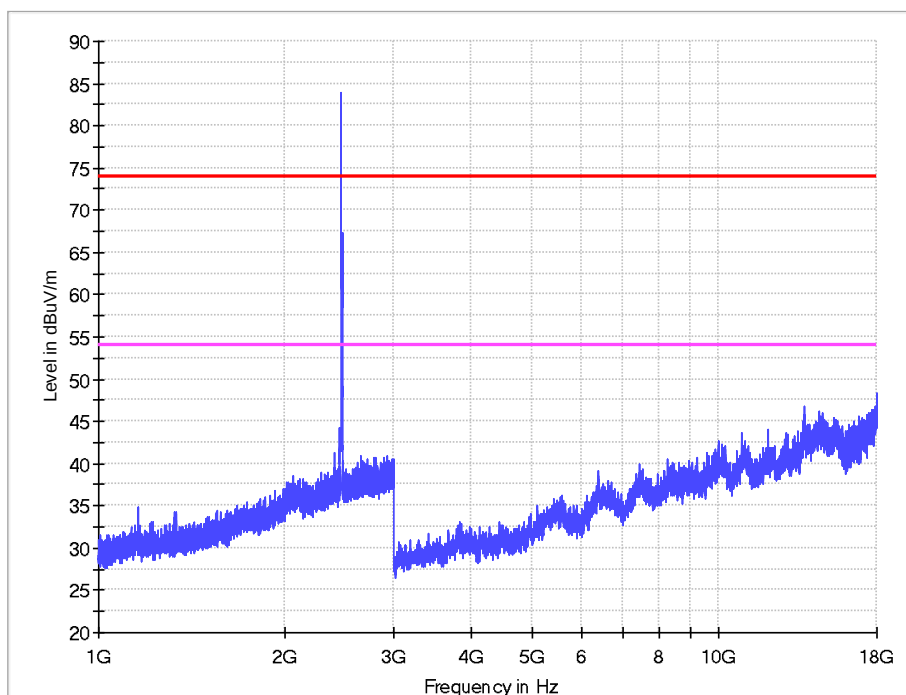


1-18G

802.11g CH1

Horizontal

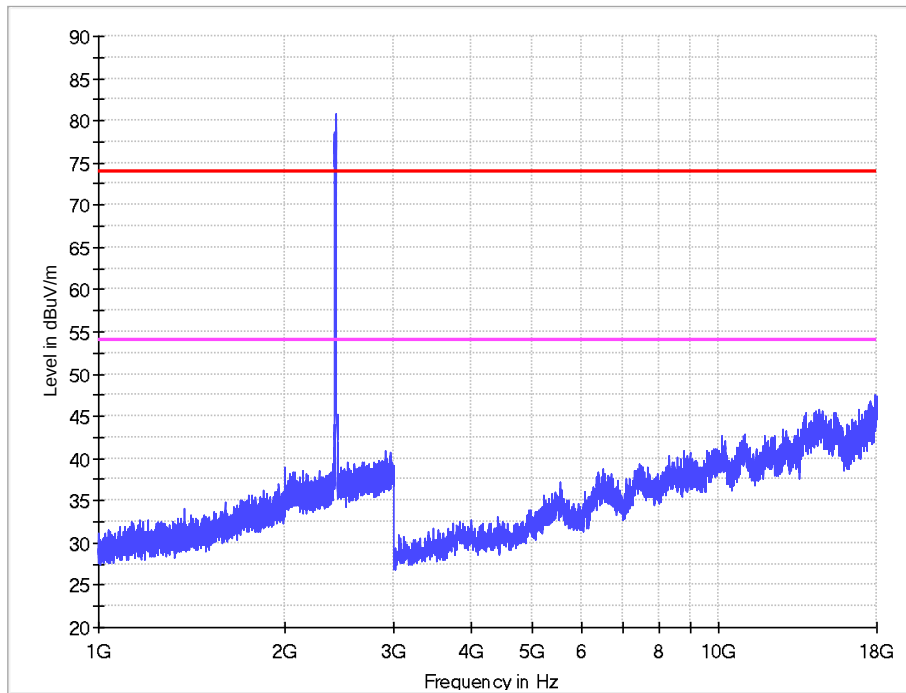


Vertical

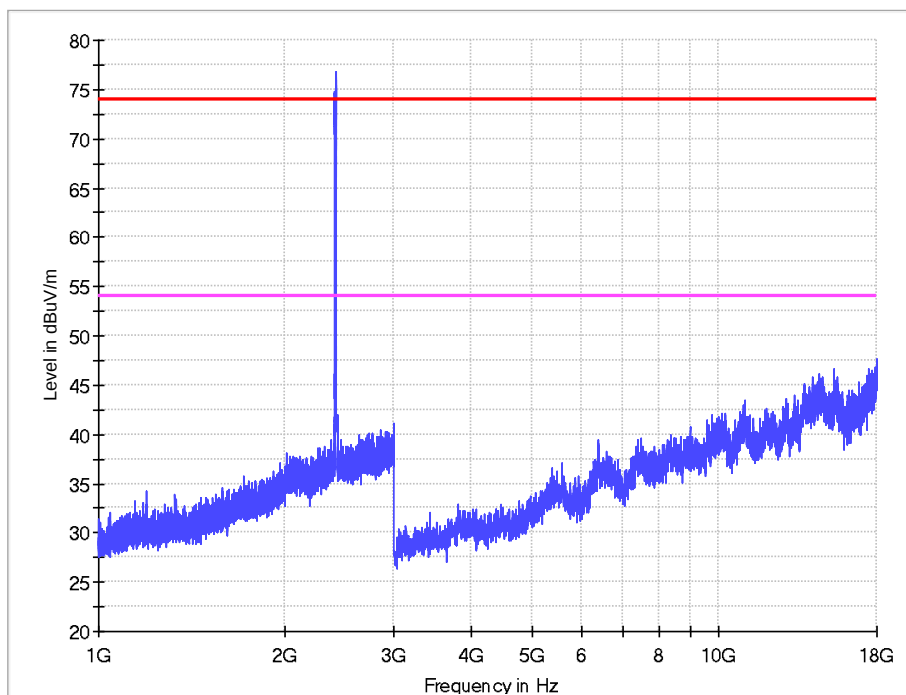


1-18G

802.11g CH6

Horizontal

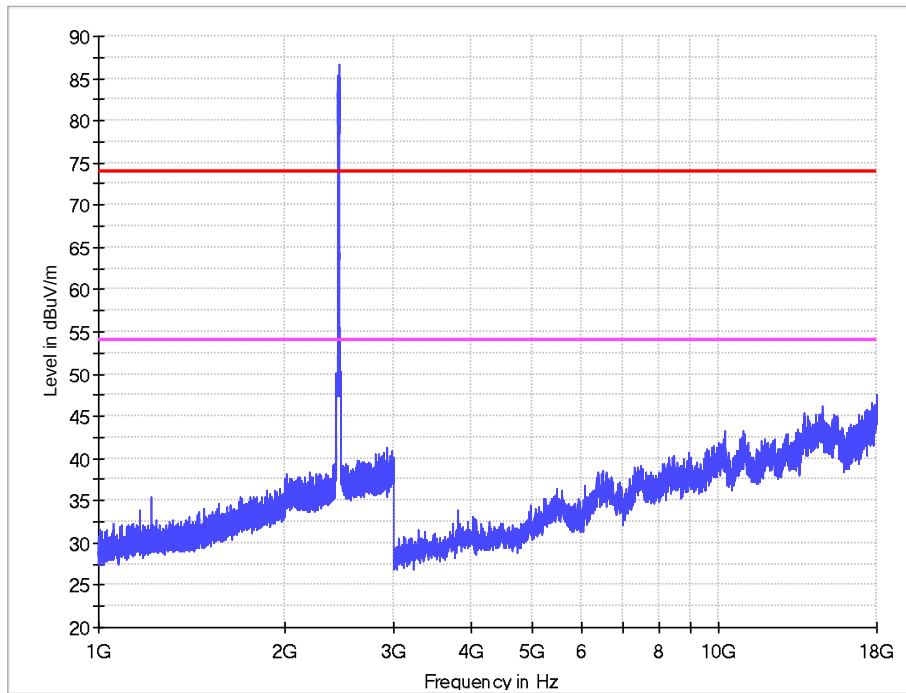


Vertical

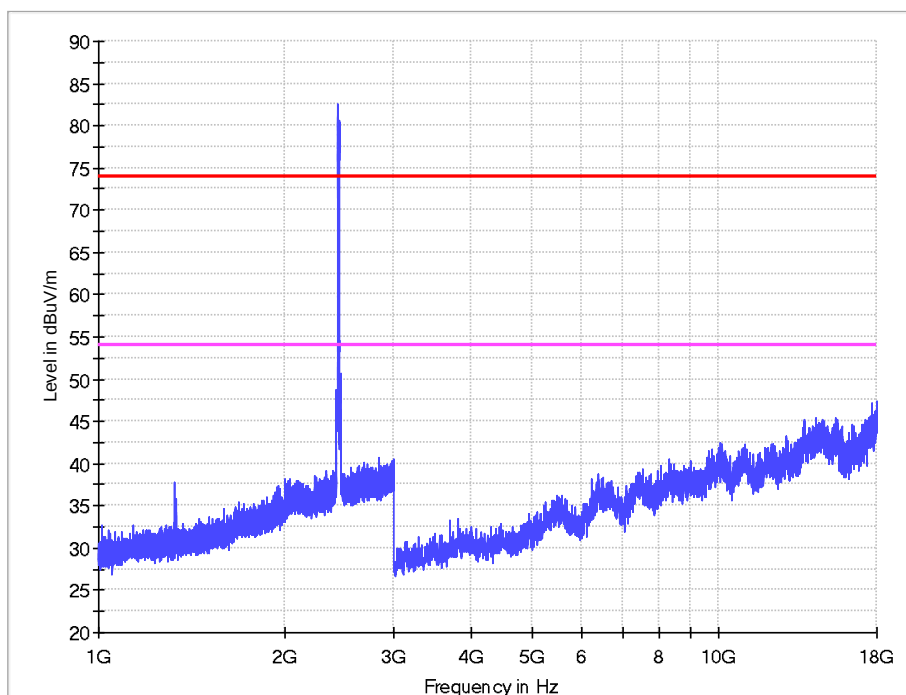


1-18G

802.11g CH11

Horizontal

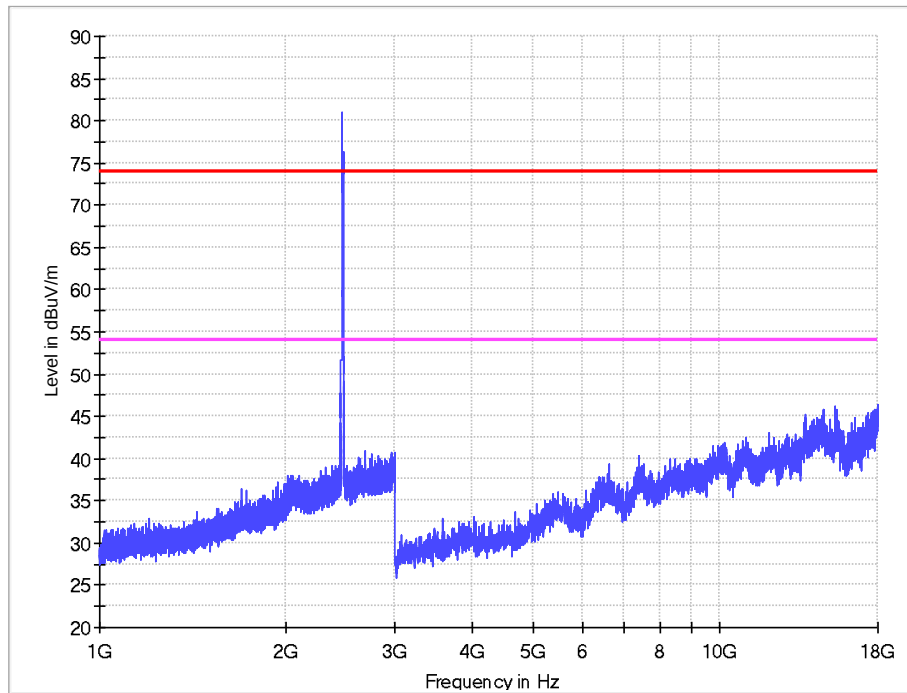


Vertical

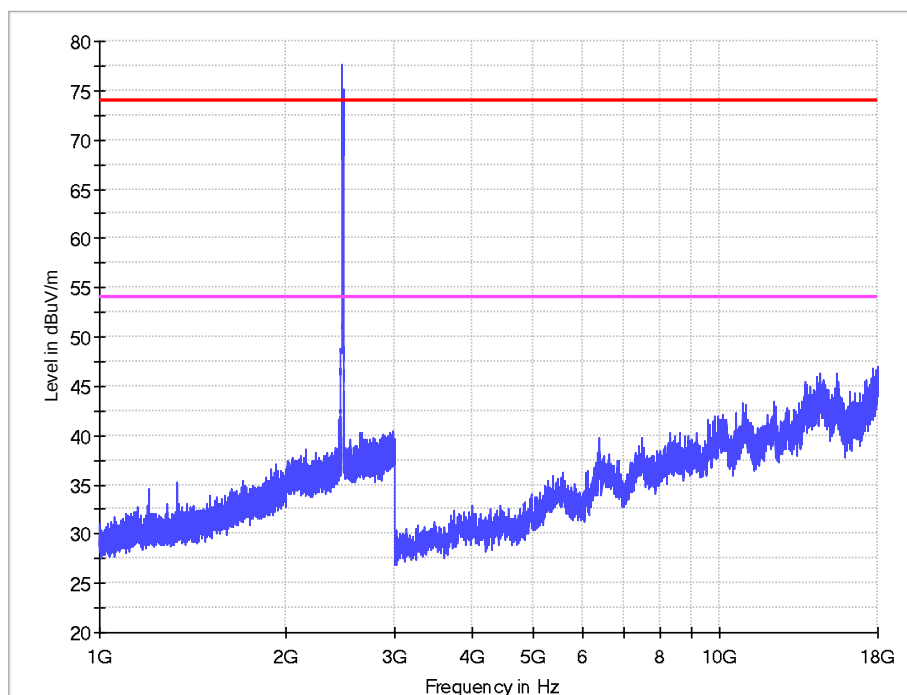


1-18G

802.11n-HT20 CH1

Horizontal

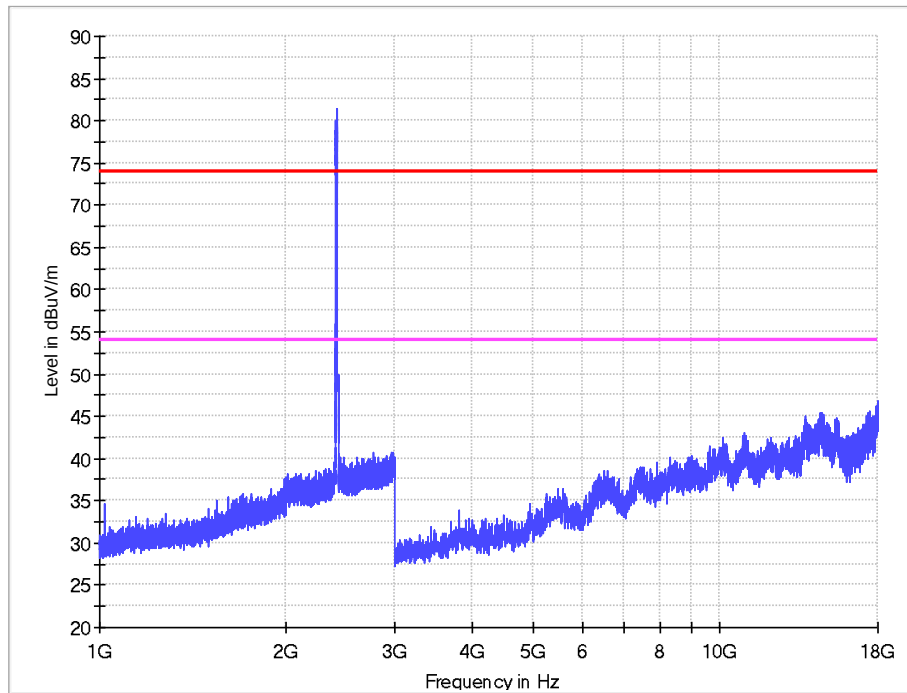


Vertical

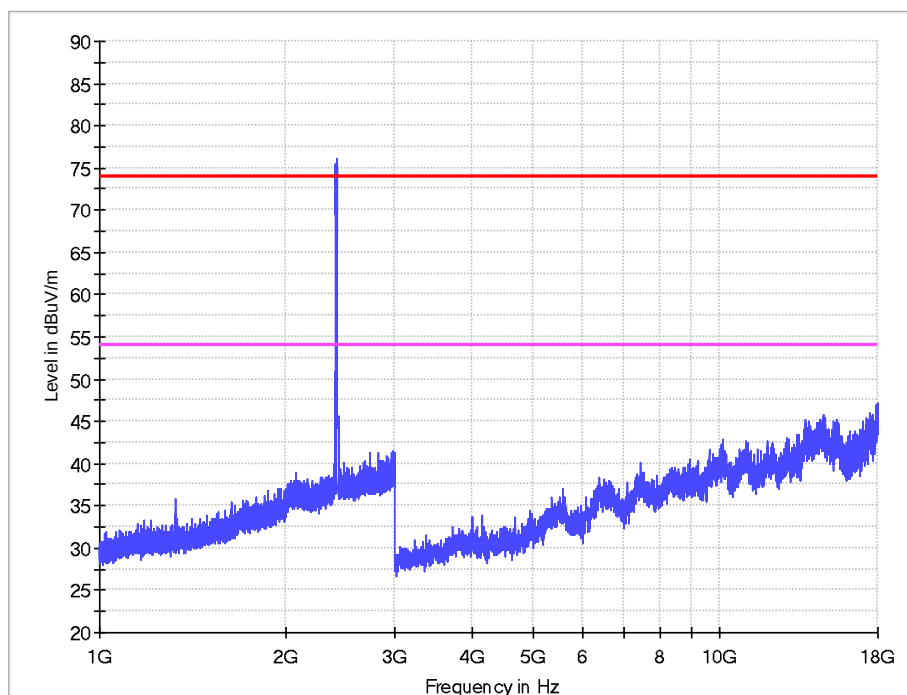


1-18G

802.11n-HT20 CH6

Horizontal

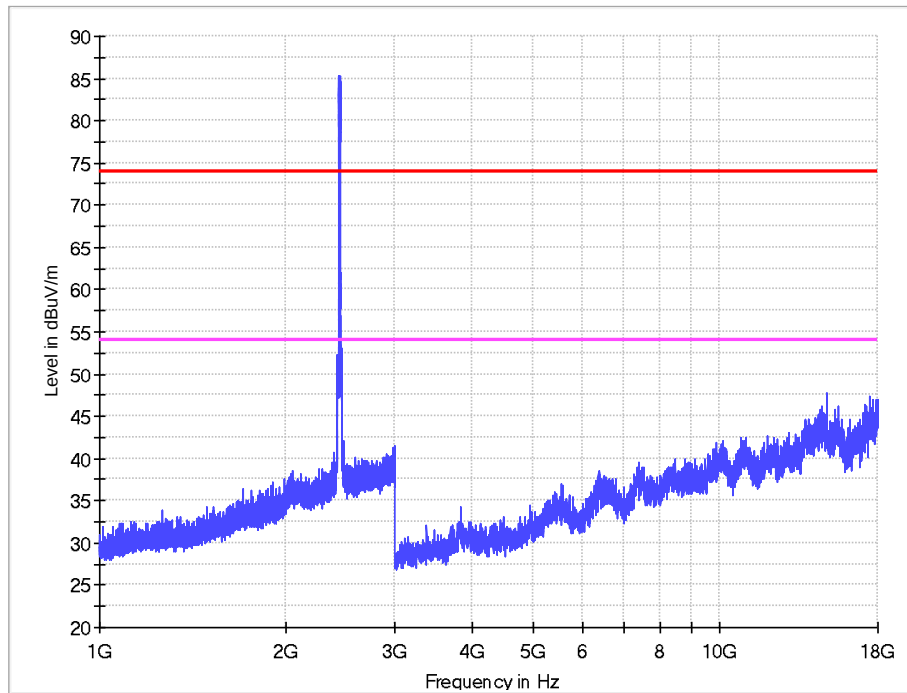


Vertical

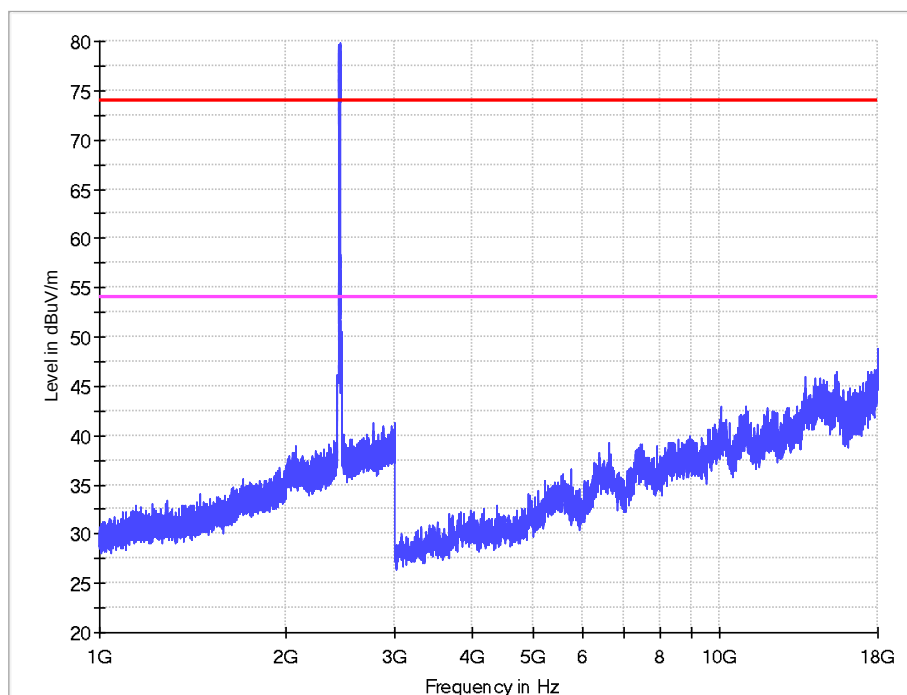


1-18G

802.11n-HT20 CH11

Horizontal

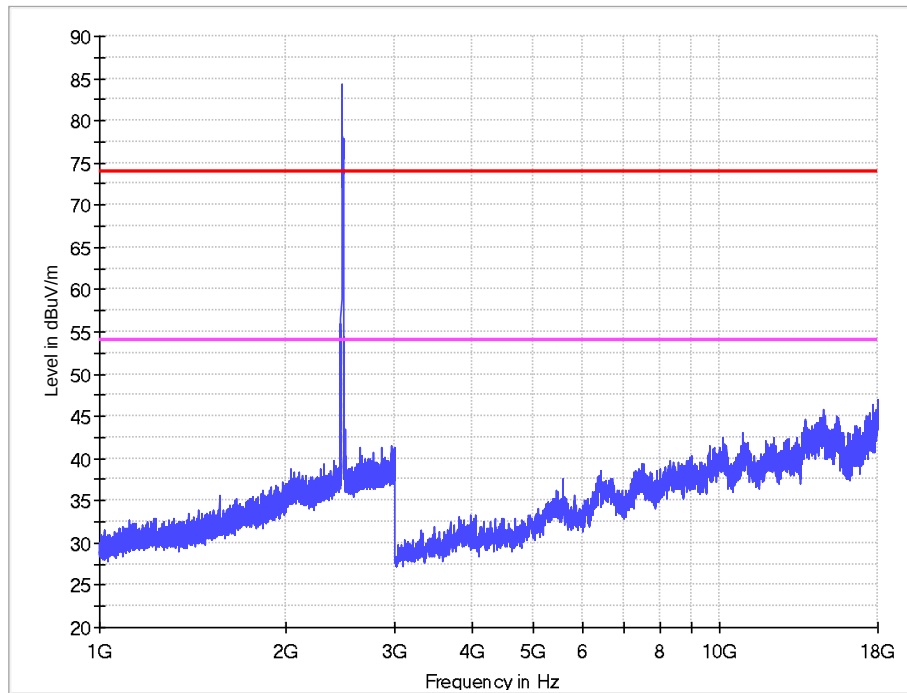


Vertical

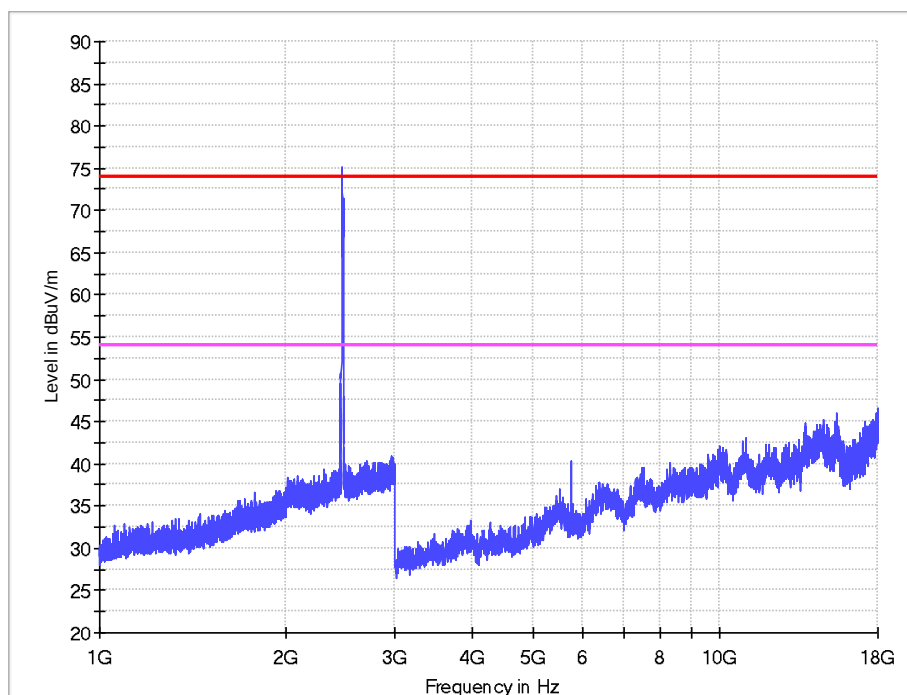


18-26.5G

(Worst Case)
Horizontal

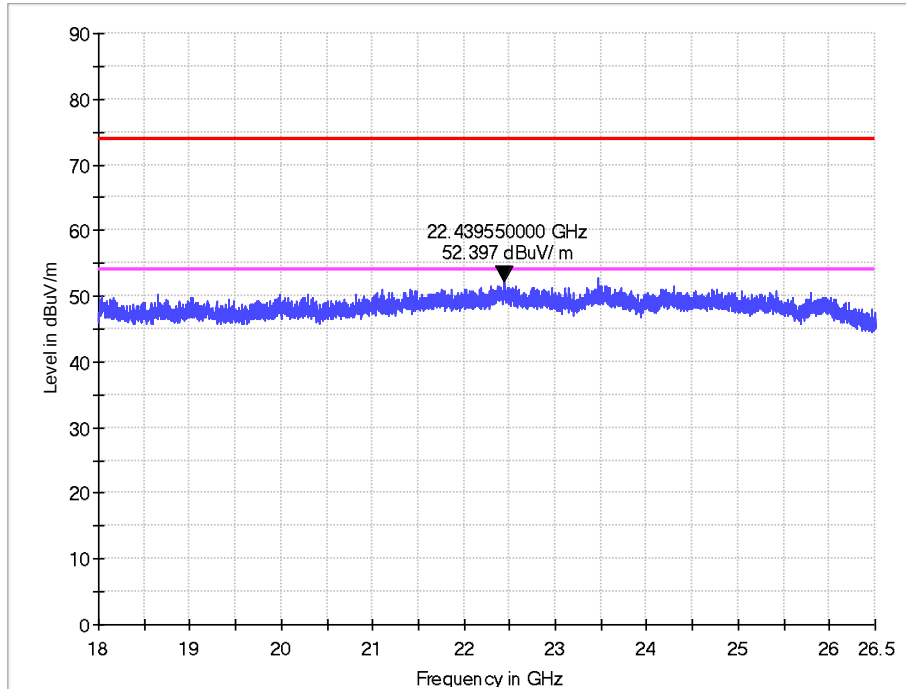



Vertical

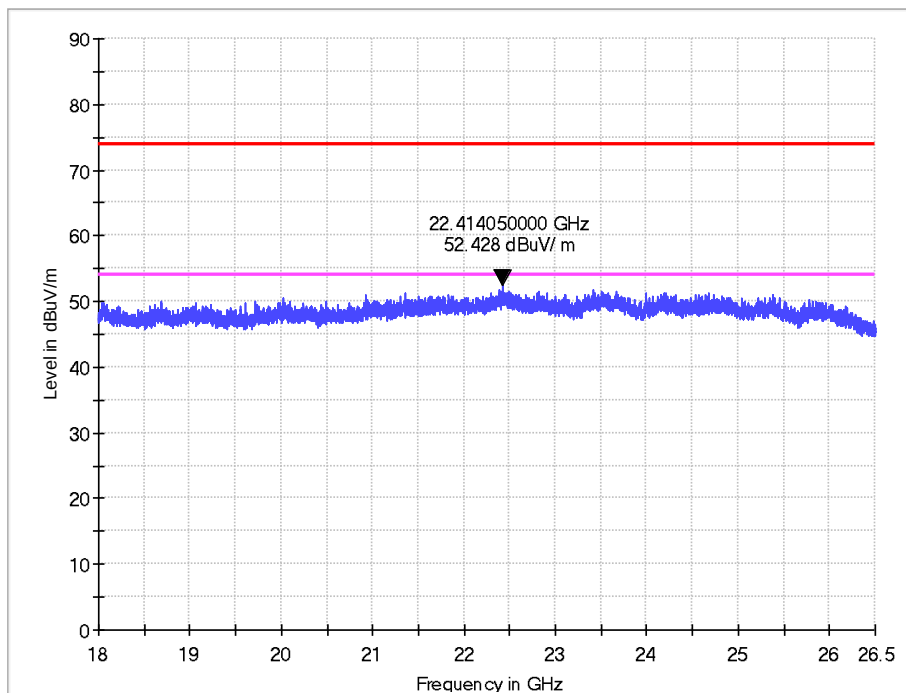



Band edge

11b
CH1

Horizontal

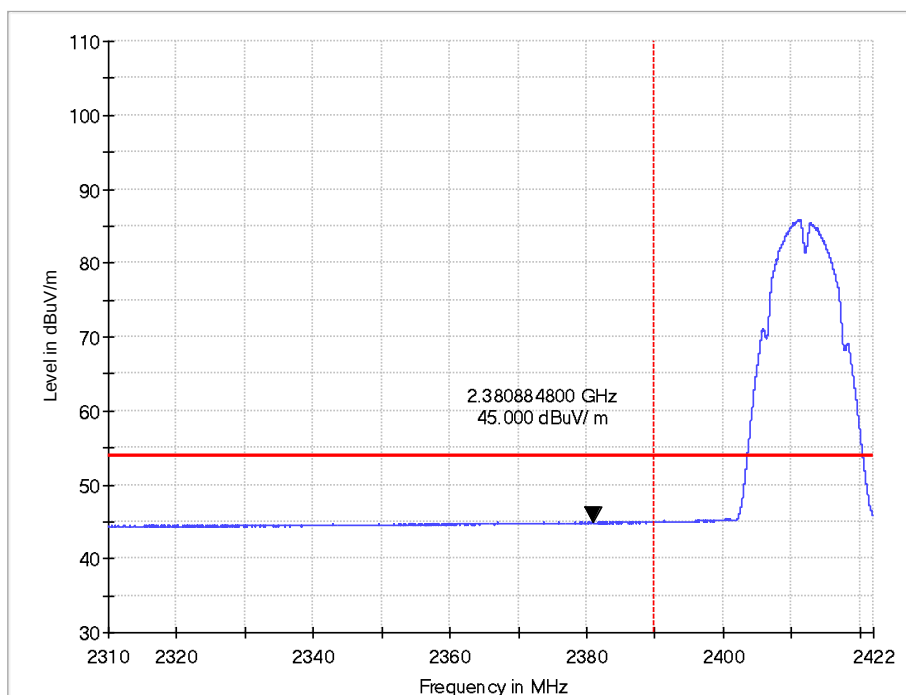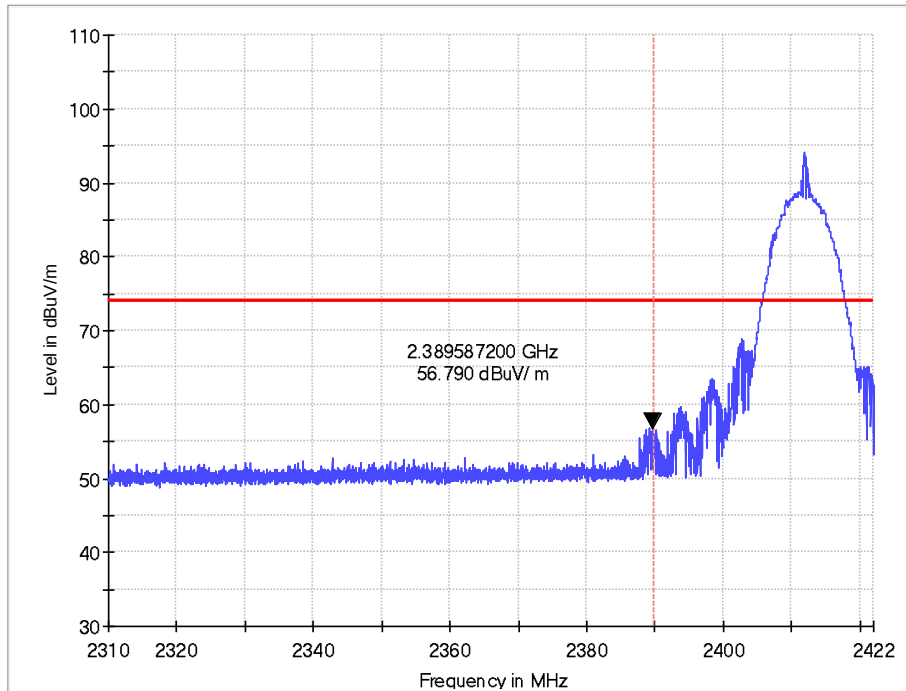



Vertical

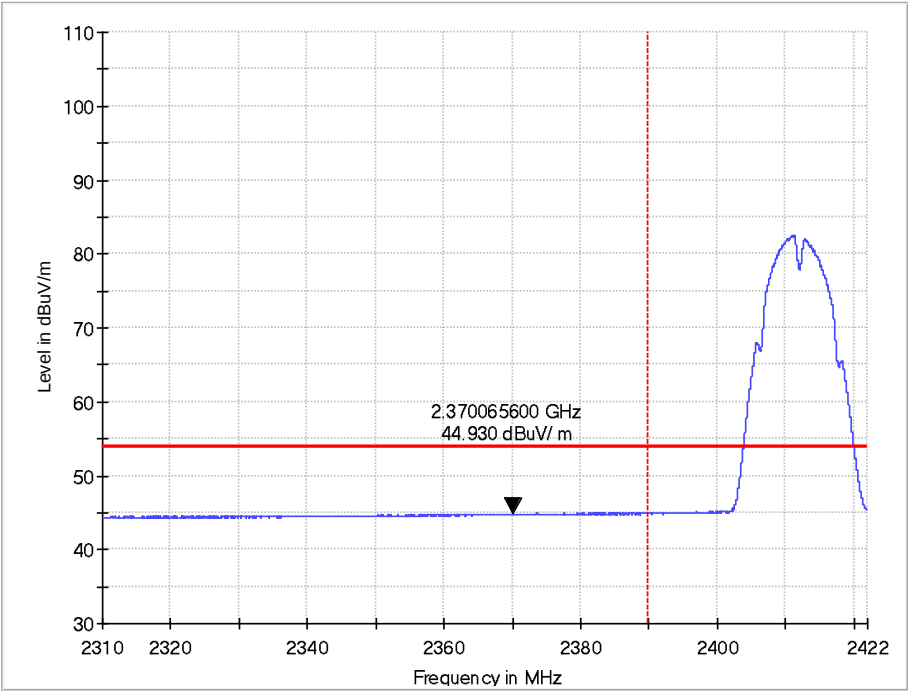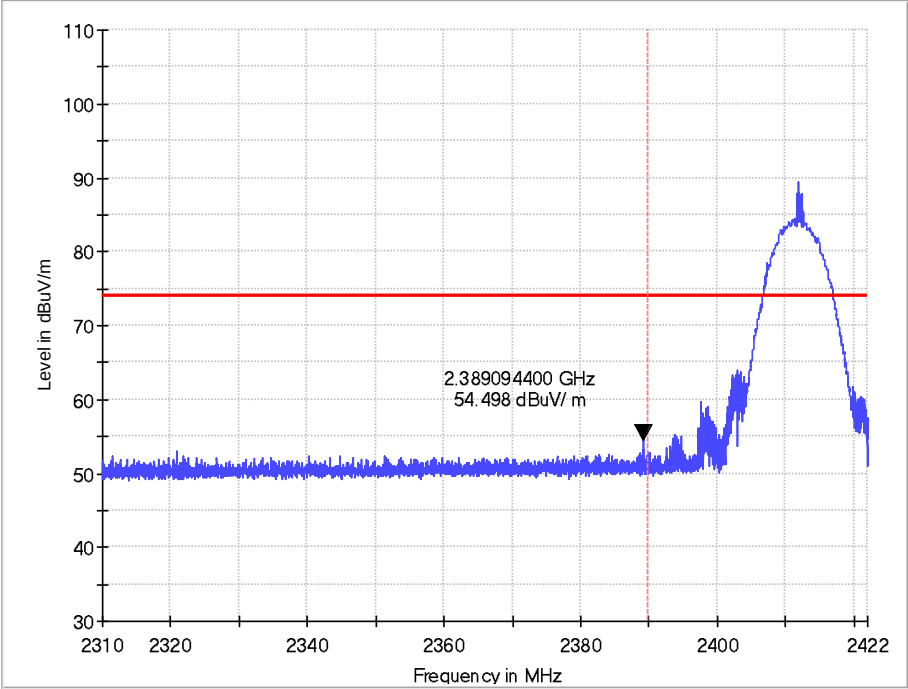



Band edge

11b
CH11

Horizontal

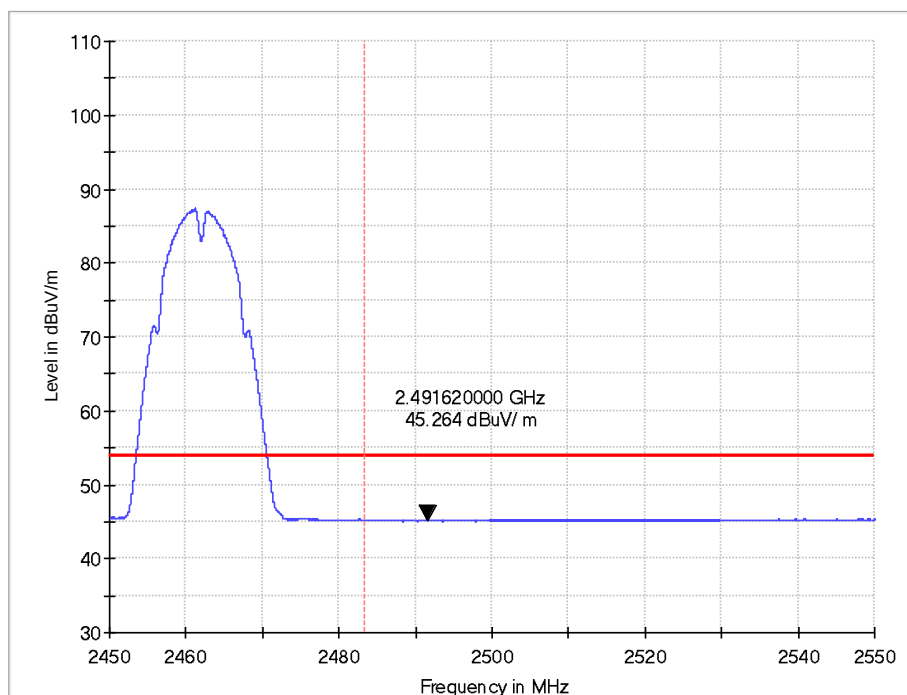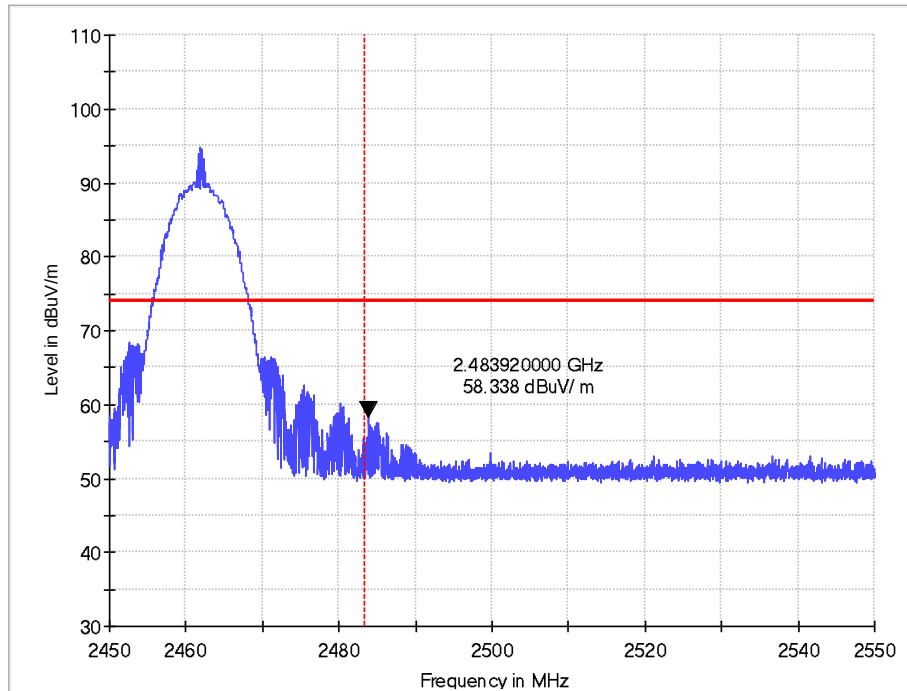



Vertical

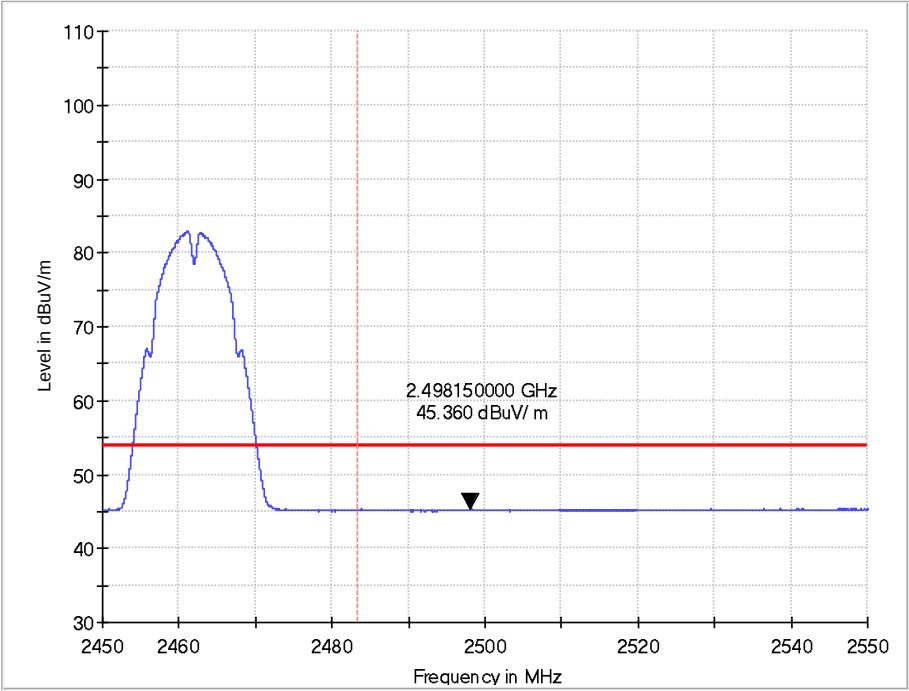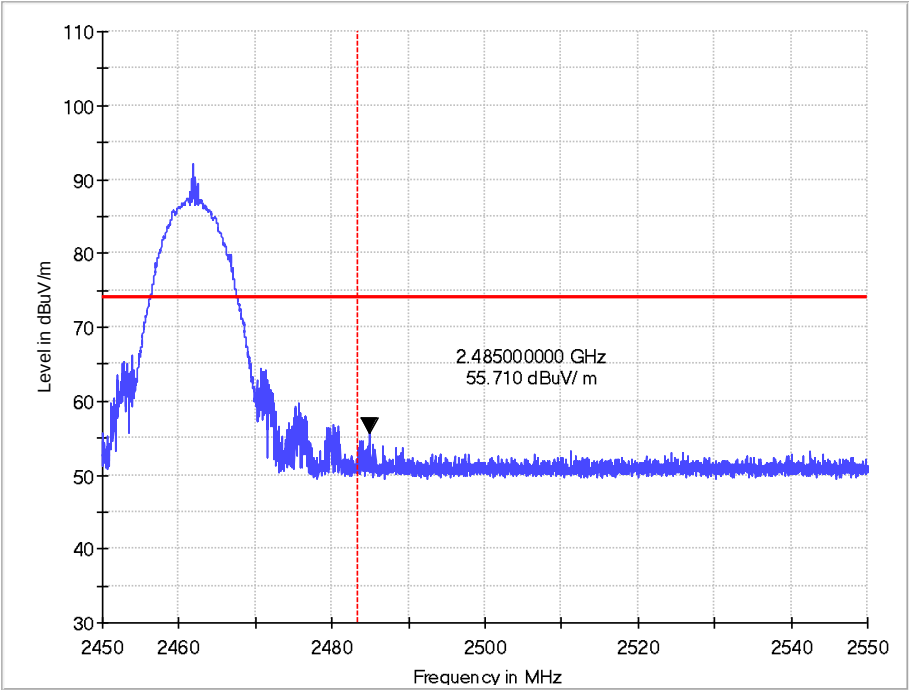



Band edge

11g
CH1

Horizontal

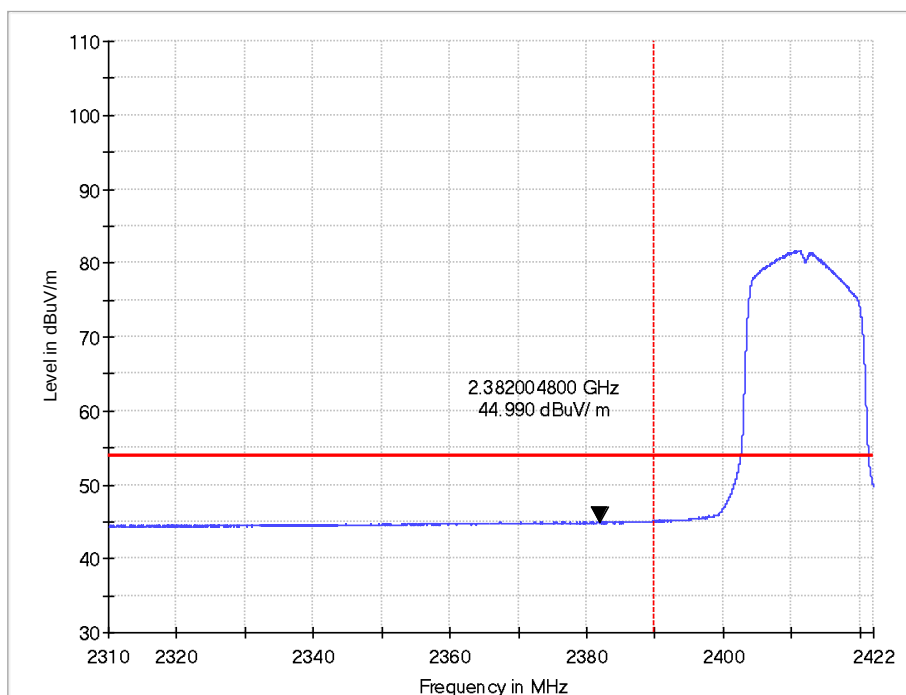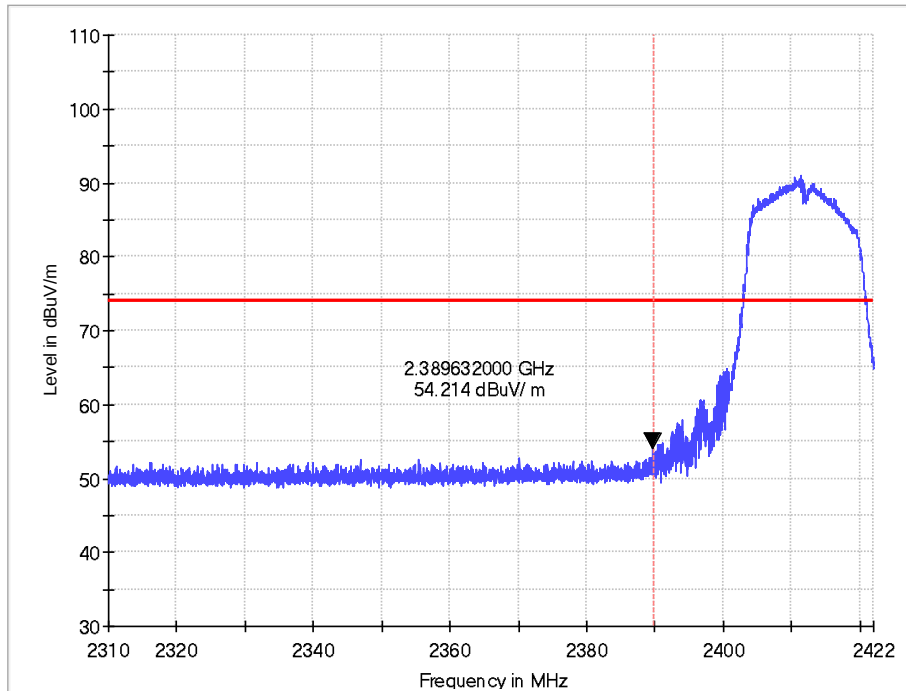



Vertical

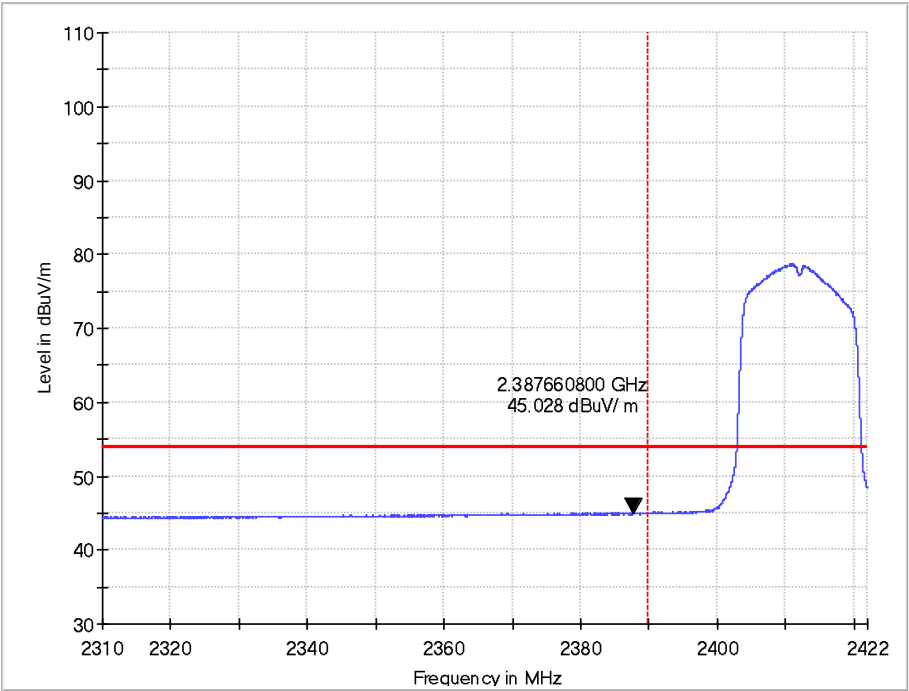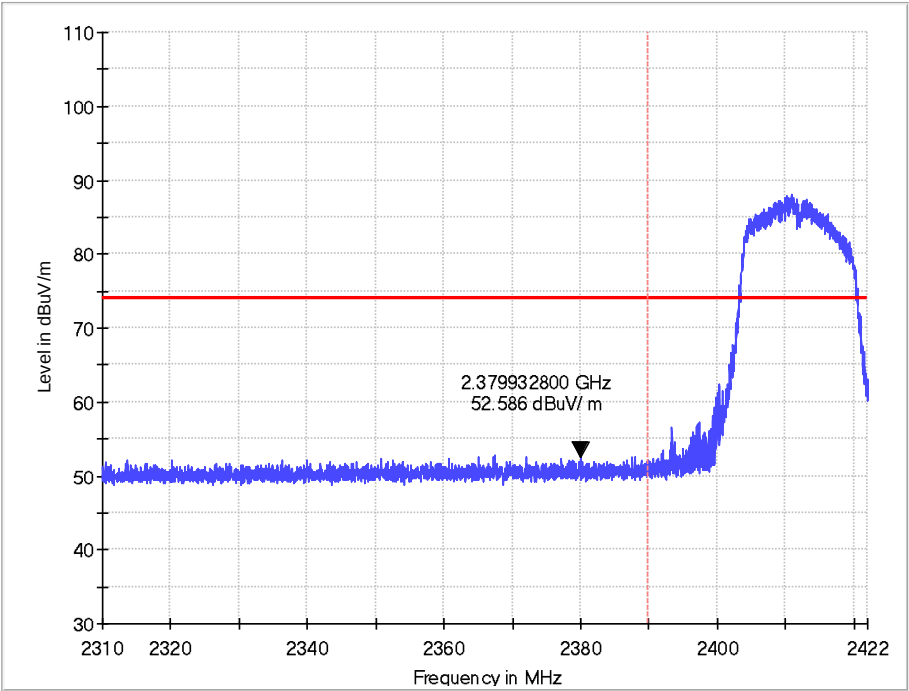



Band edge

11g
CH11

Horizontal

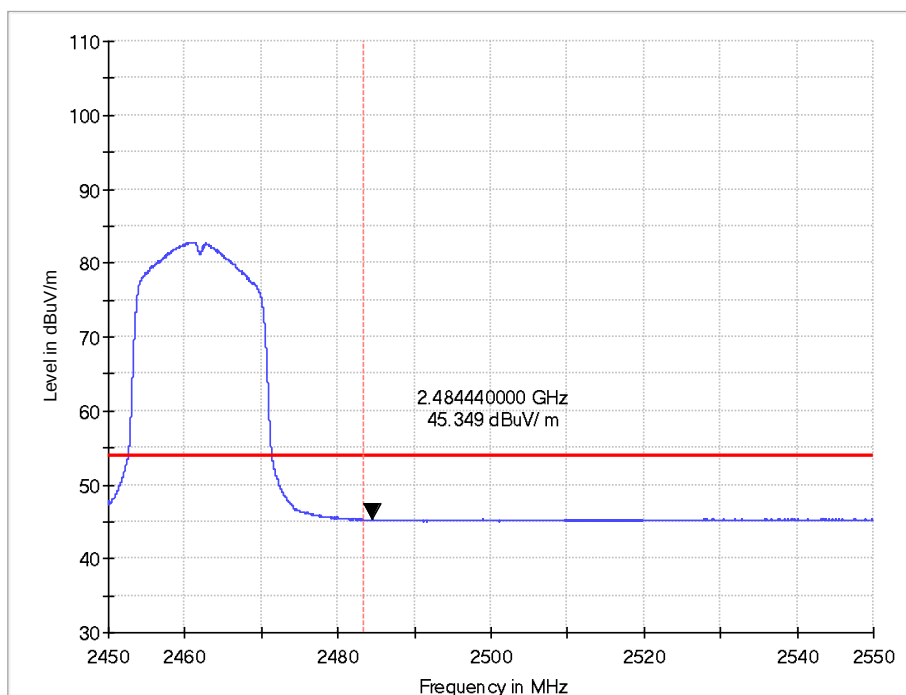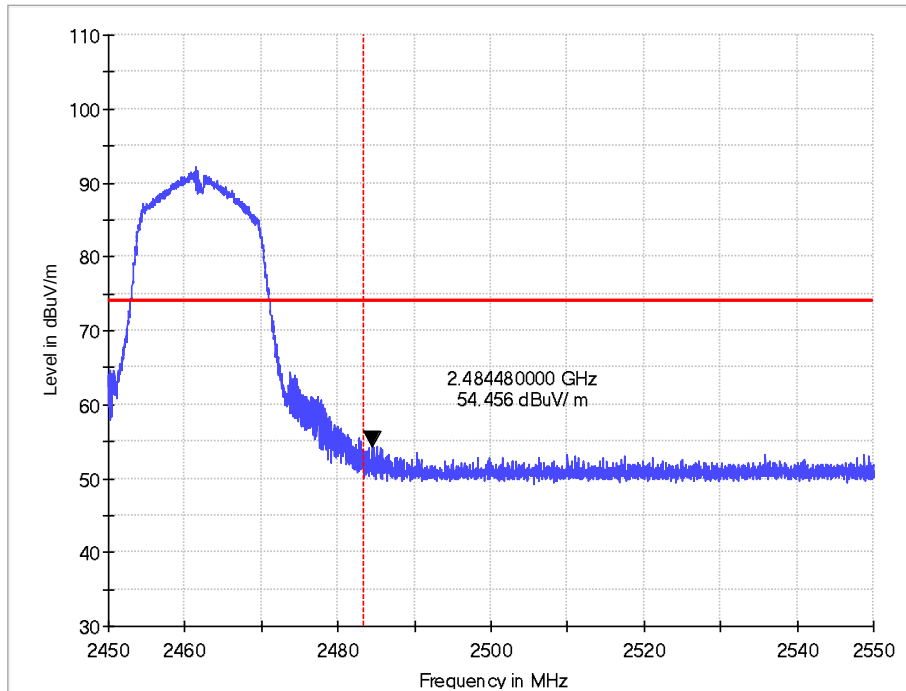



Vertical

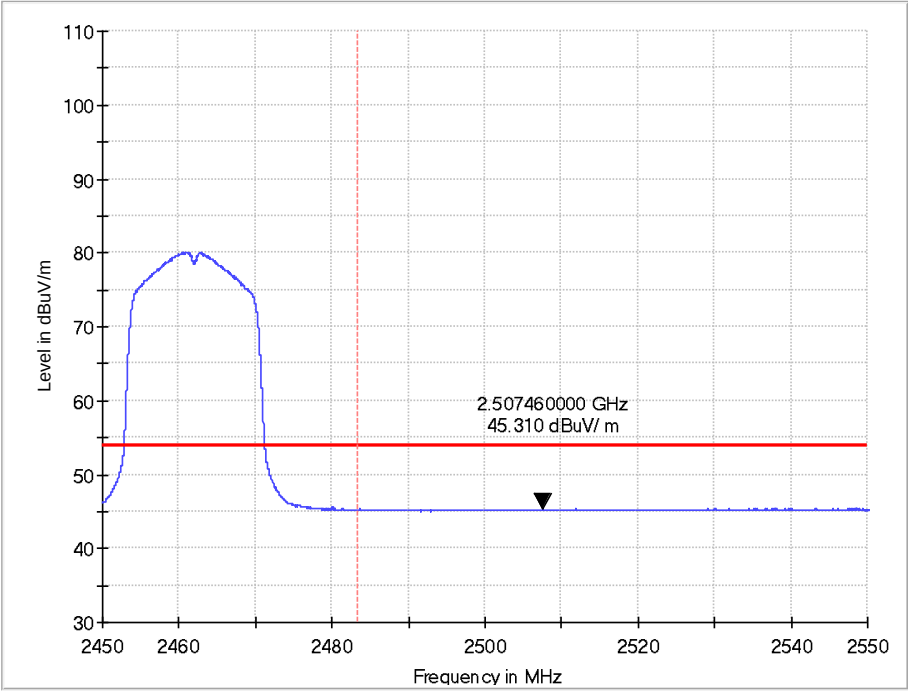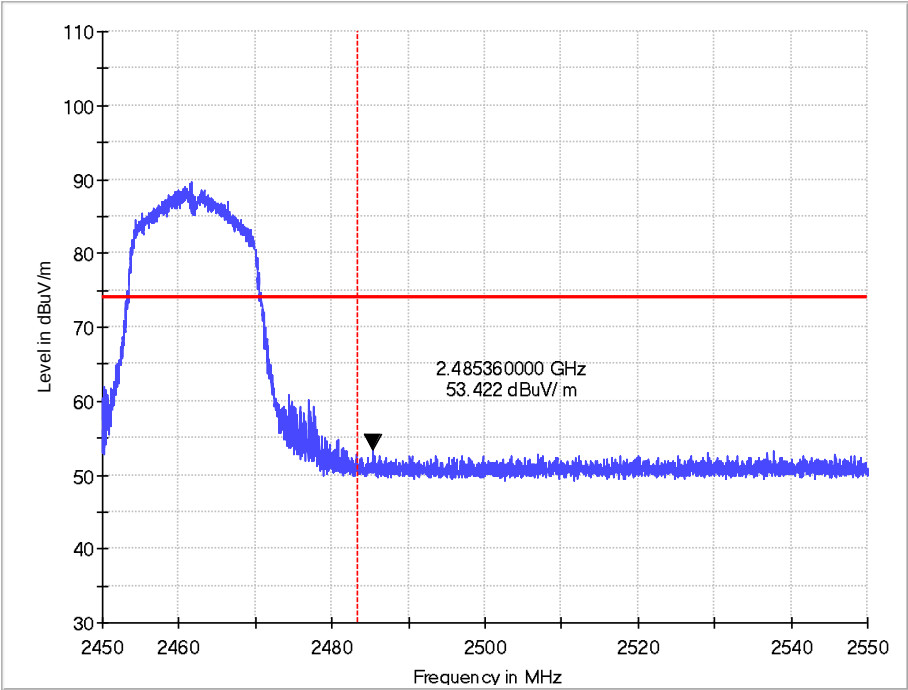



Band edge

11n-HT20
CH1

Horizontal

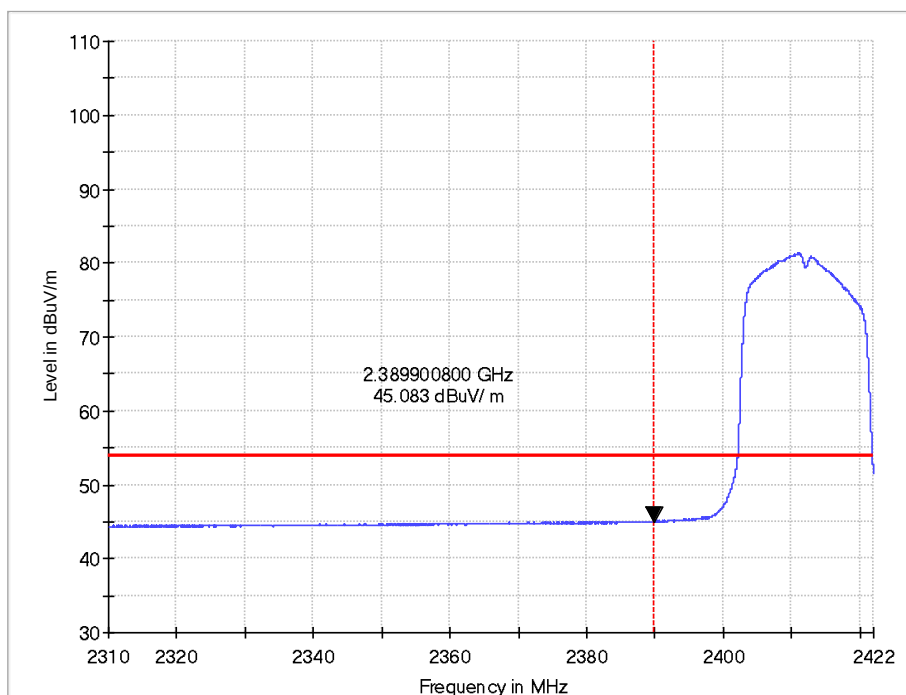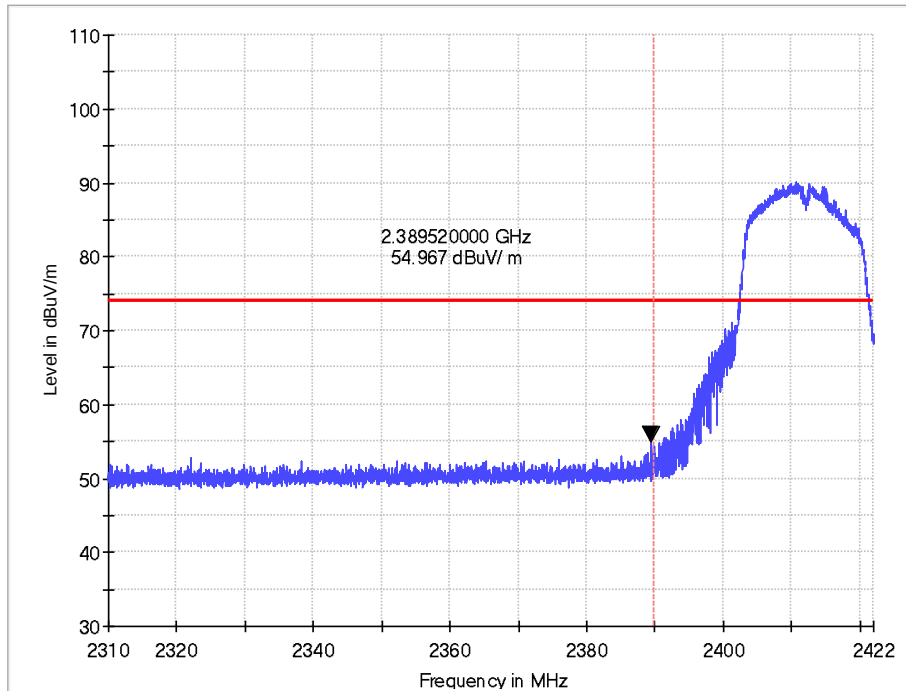



Vertical

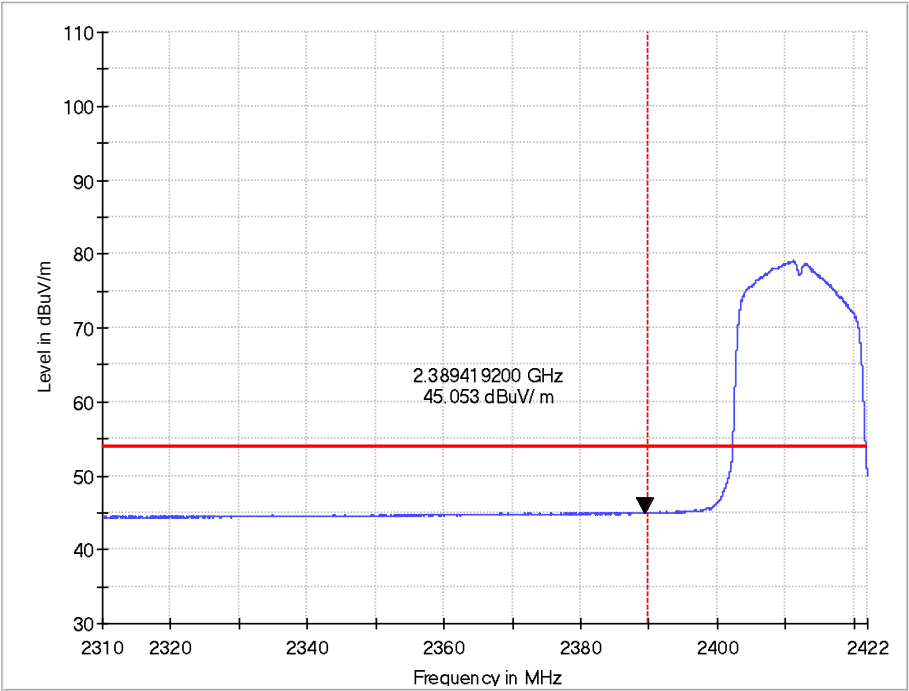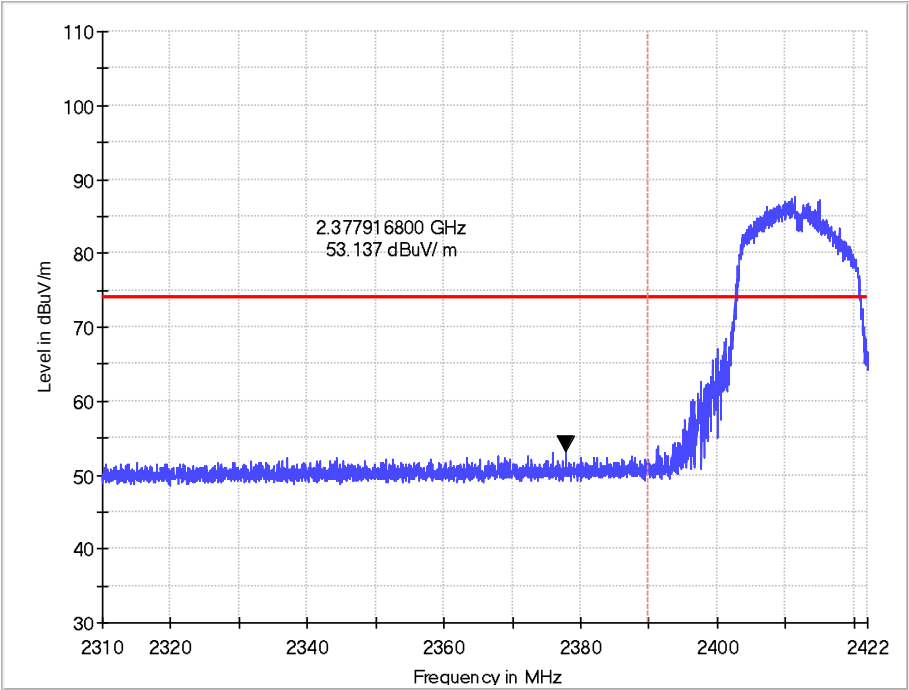



Band edge

11n-HT20
CH11

Horizontal

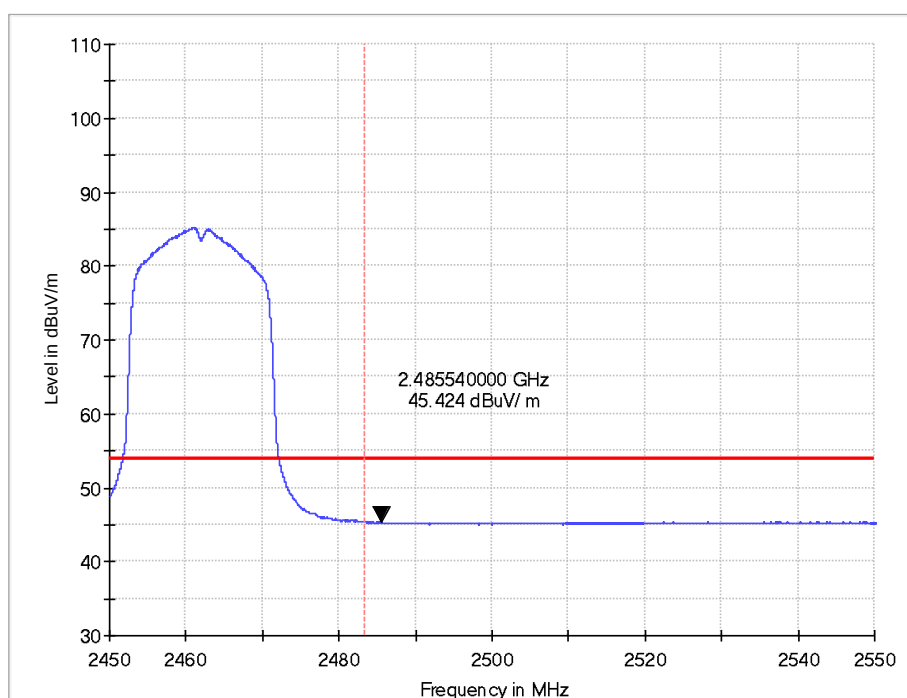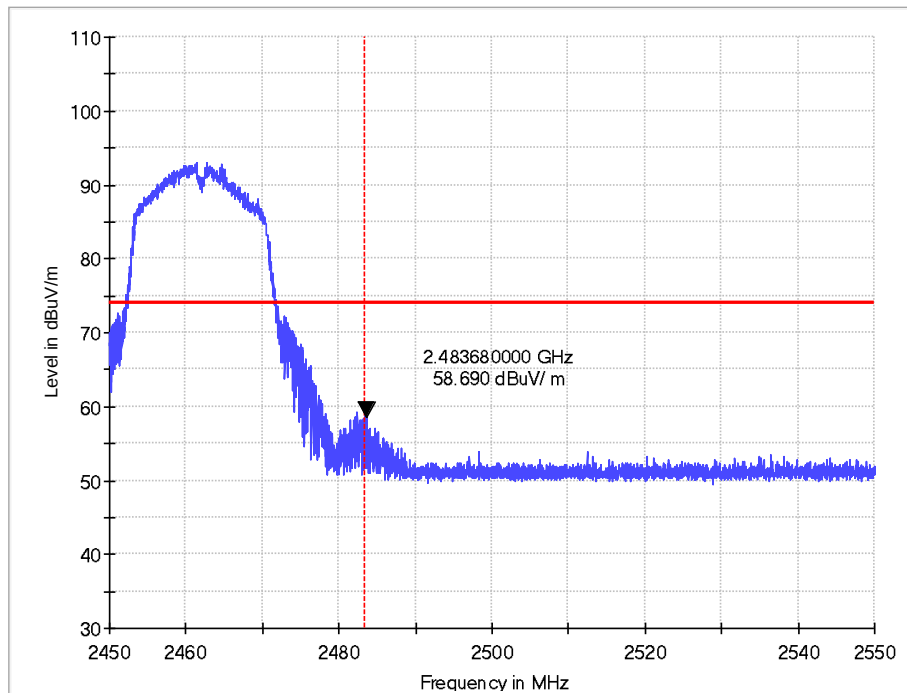

Vertical

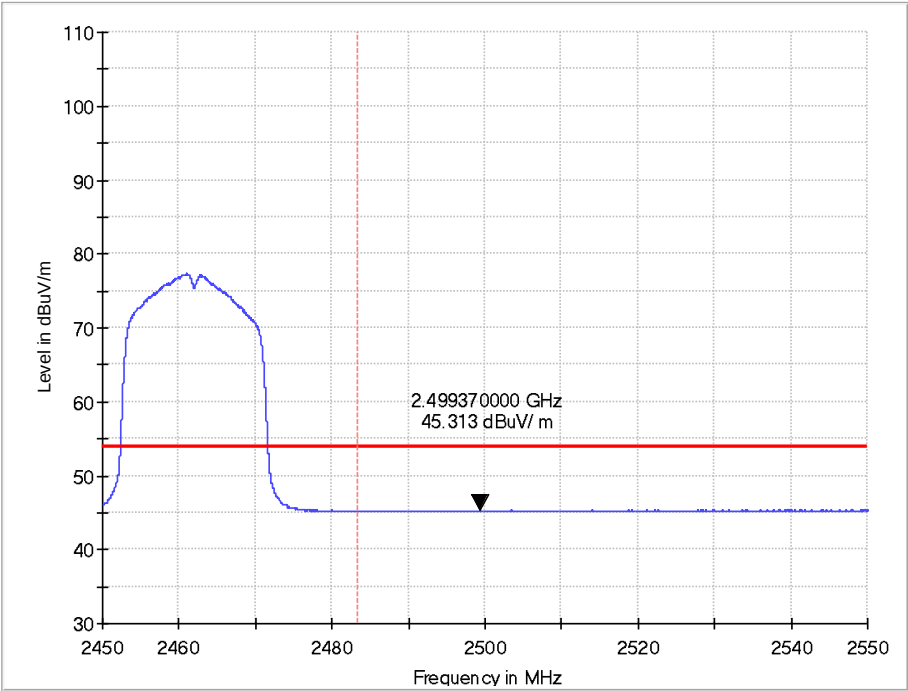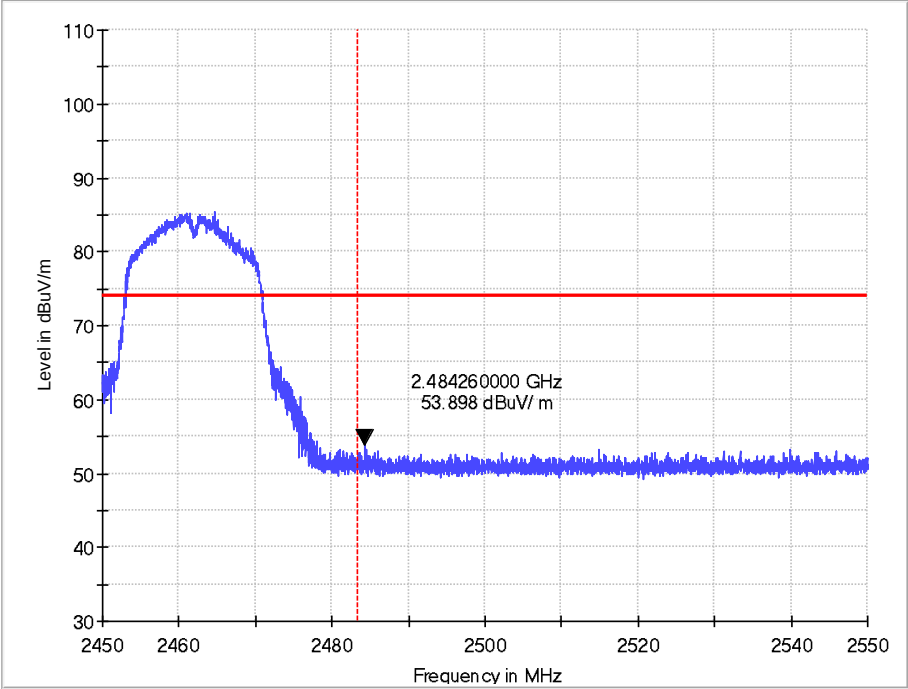

12. CONDUCTED EMISSION TEST FOR AC POWER PORT MEASUREMENT

12.1. Test Standard and Limit

12.1.1. Test Standard

FCC Part 15.207
IC RSS-Gen Clause 8.8

12.1.2. Test Limit

Table 18 Conducted Disturbance Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

* Decreasing linearly with logarithm of the frequency

* The lower limit shall apply at the transition frequency.

12.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver is used to test the emissions from both sides of AC line. According to the requirements of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

The bandwidth of EMI test receiver is set at 9 kHz.

12.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

12.4. Test Data


The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 19 Conducted Emission Test Data


Test mode: Charging and Transmitting								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)
Line	0.15	9.7	32.0	41.7	66	19.0	28.7	56
	0.204	9.7	24.7	34.4	63.4	12.4	22.1	53.4
	0.388	9.7	26.5	36.2	58.1	19.2	28.9	48.1
	0.838	9.8	12.0	21.8	56	7.0	16.8	46
	3.795	9.9	15.3	25.2	56	10.3	20.2	46
	11.838	9.9	21.7	31.6	60	18.8	28.7	50
Neutral	0.150	9.7	25.2	34.9	66	10.5	20.2	56
	0.195	9.7	23.1	32.8	63.8	11.4	21.1	53.8
	0.397	9.7	25.7	35.4	57.9	17.3	27.0	47.9
	0.793	9.8	11.0	20.8	56	4.8	14.6	46
	1.172	9.8	10.3	20.1	56	4.4	14.2	46
	4.200	9.9	14.3	24.2	56	7.9	17.8	46

REMARKS: 1. Emission level (dB μ V) = Read Value (dB μ V) + Correction Factor (dB)
 2. Correction Factor (dB) = LISN Factor (dB) + Cable Factor (dB) + Limiter Factor (dB)
 3. The other emission levels were very low against the limit.

Line

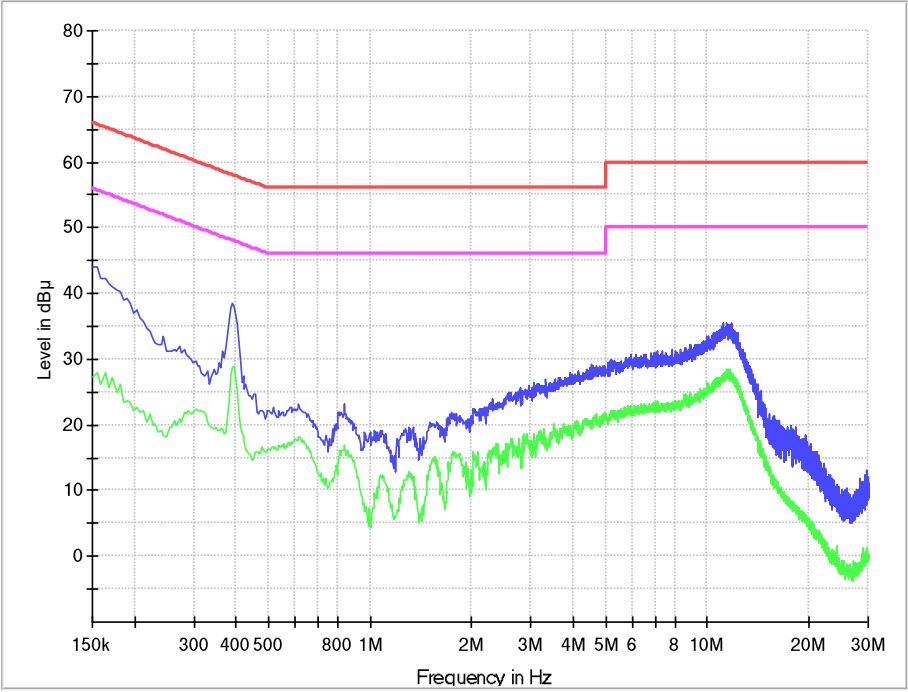

Neutral

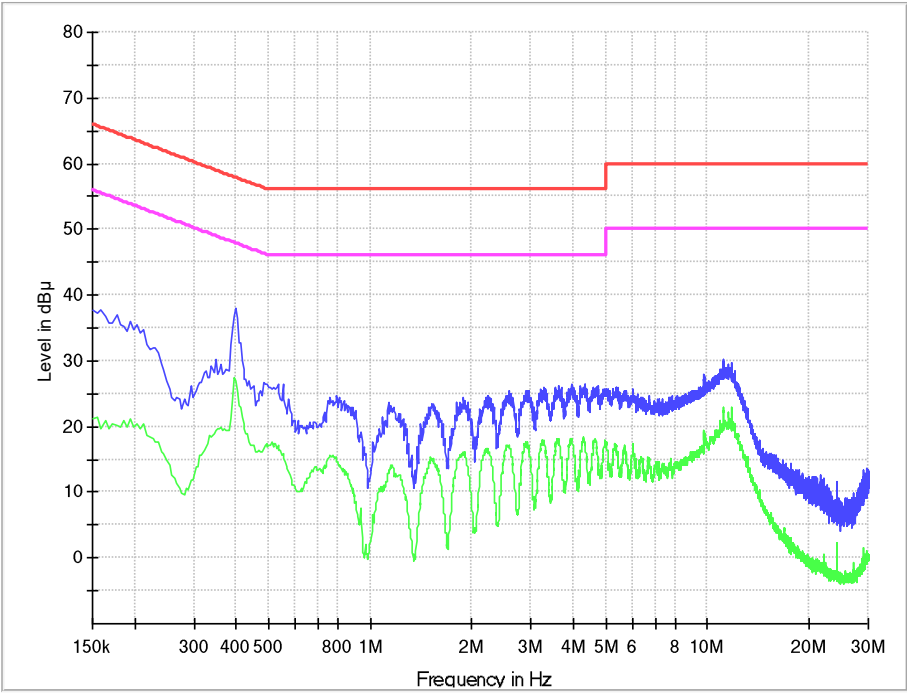

13. ANTENNA REQUIREMENTS

15.203 requirements:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirements:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-GEN Section 6.8, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

13.1. Antenna Connector

Antenna Connector is on the PCB within enclosure and not accessible to user.

13.2. Antenna Gain

The antenna gain of EUT is less than 6 dBi

END OF REPORT