

TEST REPORT

Applicant Name: Shenzhen Grand Time Technology Co.,Ltd
Address: 24B, Microsoft Comtech Tower, No.55 Gaoxin South 9th Road,
Nanshan District, Shenzhen 518057, P.R. China
Report Number: 2401Z105021E-RF-00D
FCC ID: 2AM6P-F2S

Test Standard (s)
FCC PART 15.407

Sample Description

Product Type: 4G Body worn camera
Model No.: F2S-A
Multiple Model(s) No.: F2S, F2S-B, F2S-C, F2S-D, F2S-E, F2S-F, F2S-G, F2S-P, F2S-S,
F2S-L, F2S-V, F2S-R, F2S-W, F2S-Q, F2S-Y, F2S-X, F2S-H,
F3S-A, F3S-B, F3S-C, F3S-D, F3S-S, F3S-P, F5S-A, F5S-B, F5S-C,
F5S-D, F5S-S, F5S-P
Trade Mark: Grand Time
Date Received: 2024-11-25
Issue Date: 2025-02-17

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Jim Cheng

Jim Cheng
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
REQUIREMENTS AND TEST PROCEDURES	14
CONDUCTED EMISSIONS	14
UNDESIRABLE EMISSION.....	16
26 dB & 6dB EMISSION BANDWIDTH	20
CONDUCTED TRANSMITTER OUTPUT POWER.....	22
POWER SPECTRAL DENSITY	23
DUTY CYCLE	24
ANTENNA REQUIREMENT	25
TEST DATA AND RESULTS	26
CONDUCTED EMISSIONS	26
UNDESIRABLE EMISSION.....	29
RF CONDUCTED DATA	237
EMISSION BANDWIDTH	237
99% OCCUPIED BANDWIDTH	247
MAXIMUM CONDUCTED OUTPUT POWER	257
POWER SPECTRAL DENSITY	260
DUTY CYCLE	270
RF EXPOSURE EVALUATION	272
EUT PHOTOGRAPHS	273
TEST SETUP PHOTOGRAPHS	274

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401Z105021E-RF-00D	Original Report	2025-02-17

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	4G Body worn camera
Tested Model	F2S-A
Multiple Model(s)	F2S, F2S-B, F2S-C, F2S-D, F2S-E, F2S-F, F2S-G, F2S-P, F2S-S, F2S-L, F2S-V, F2S-R, F2S-W, F2S-Q, F2S-Y, F2S-X, F2S-H, F3S-A, F3S-B, F3S-C, F3S-D, F3S-S, F3S-P, F5S-A, F5S-B, F5S-C, F5S-D, F5S-S, F5S-P
Frequency Range	5150-5250MHz; 5250-5350MHz; 5470-5725MHz; 5725-5850MHz
Mode	802.11 a/n20/n40/ac20/ac40/ac80
Maximum Conducted Average Output Power	5150-5250MHz: 9.96dBm; 5250-5350MHz: 9.71dBm; 5470-5725MHz: 11.55dBm; 5725-5850MHz: 11.80dBm
Modulation Technique	OFDM
Antenna Specification[#]	1.43dBi (provided by the applicant)
Voltage Range	DC 3.8V from battery or DC 5V from Adapter
Sample serial number	2UKG-2 for Conducted and Radiated Emissions Test 2UKG-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: QL010-0502000UU Input: AC 100-240V, 50/60Hz, 0.45A Output: DC 5.0V, 2.0A

Note: The Multiple models are electrically identical with the test model except for appearance, model name and sale channel. Please refer to the declaration letter[#] for more detail, which was provided by manufacturer.

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/ac20 mode: channel 36, 40, 48 were tested;

For 802.11ac40 mode: channel 38, 46 were tested;

For 802.11ac80 mode, channel 42 was tested.

For 5250-5350MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320
58	5290	/	/

For 802.11a/ac20 mode: channel 52, 56, 64 were tested;

For 802.11ac40 mode: channel 54, 62 were tested;

For 802.11ac80 mode, channel 58 was tested.

For 5470-5725MHz Band, 21 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	124	5620
102	5510	126	5630
104	5520	128	5640
106	5530	132	5660
108	5540	134	5670
110	5550	136	5680
112	5560	138	5690
116	5580	140	5700
118	5590	142	5710
120	5600	144	5720
122	5610	/	/

For 802.11a/ac20 mode: channel 100, 116, 140, 144 were tested;

For 802.11ac40 mode: channel 102, 110, 134, 142 were tested;

For 802.11ac80 mode, channel 106, 122, 138 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a/ac20 mode: channel 149, 157, 165 were tested;

For 802.11ac40 mode: channel 151, 159 were tested;

For 802.11ac80 mode, channel 155 was tested.

EUT Exercise Software

Exercise Software [#]	Engineering mode		
5150-5250 MHz Band			
Mode	Test Channels	Data rate	Power Level [#]
802.11a	Low	6Mbps	16
	Middle	6Mbps	16
	High	6Mbps	16
802.11ac-VHT20	Low	MCS0	16
	Middle	MCS0	16
	High	MCS0	16
802.11ac-VHT40	Low	MCS0	16
	High	MCS0	16
802.11ac-VHT80	Middle	MCS0	16
5250-5350 MHz Band			
Mode	Test Channels	Data rate	Power Level [#]
802.11a	Low	6Mbps	16
	Middle	6Mbps	16
	High	6Mbps	16
802.11ac-VHT20	Low	MCS0	16
	Middle	MCS0	16
	High	MCS0	16
802.11ac-VHT40	Low	MCS0	16
	High	MCS0	16
802.11ac-VHT80	Middle	MCS0	16

5470-5725 MHz Band			
Mode	Test Channels	Data rate	Power Level [#]
802.11a	Low	6Mbps	16
	Middle	6Mbps	16
	High	6Mbps	16
	Cross	MCS0	16
802.11ac-VHT20	Low	MCS0	16
	Middle	MCS0	16
	High	MCS0	16
	Cross	MCS0	16
802.11ac-VHT40	Low	MCS0	16
	Middle	MCS0	16
	High	MCS0	16
	Cross	MCS0	16
802.11ac-VHT80	Low	MCS0	16
	High	MCS0	16
	Cross	MCS0	16
5725-5850 MHz Band			
Mode	Test Channels	Data rate	Power Level [#]
802.11a	Low	6Mbps	16
	Middle	6Mbps	16
	High	6Mbps	16
802.11ac-VHT20	Low	MCS0	16
	Middle	MCS0	16
	High	MCS0	16
802.11ac-VHT40	Low	MCS0	16
	High	MCS0	16
802.11ac-VHT80	Middle	MCS0	16

Note:

1. The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, power and PSD across all data rates bandwidths, and modulations.
2. The n20/n40 mode was reduced test as identical parameter with ac20/ac40 mode.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Receptacle	Unknown	Unknown
Unknown	SD Card	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	0.8	EUT	Adapter
Shielded Un-detachable AC Cable	1.5	Receptacle	LISN/AC Mains

Block Diagram of Test Setup


For Conducted Emissions:

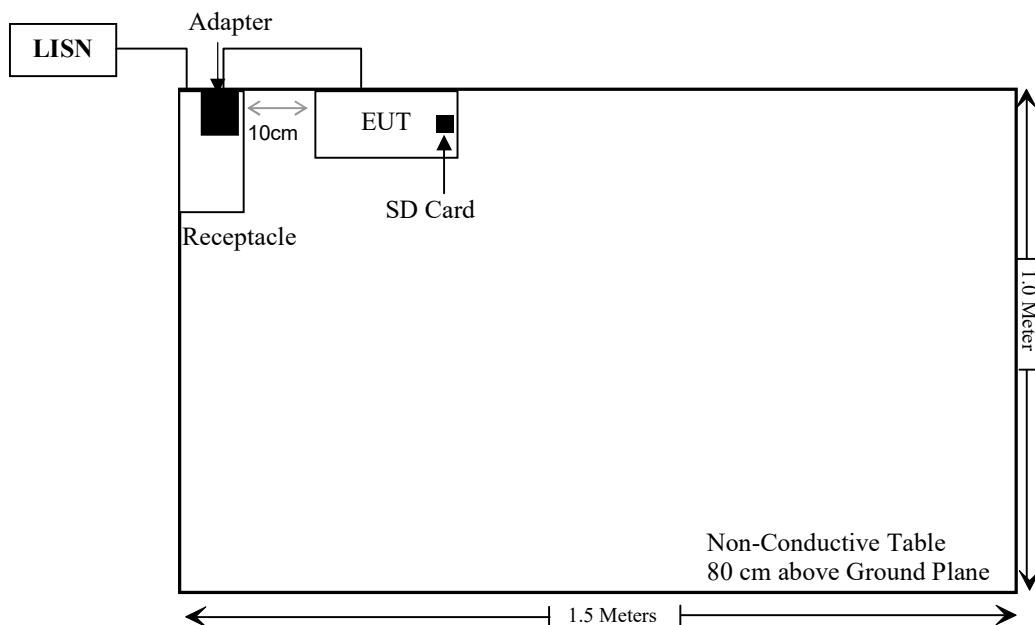

For Radiated Emissions below 1GHz:

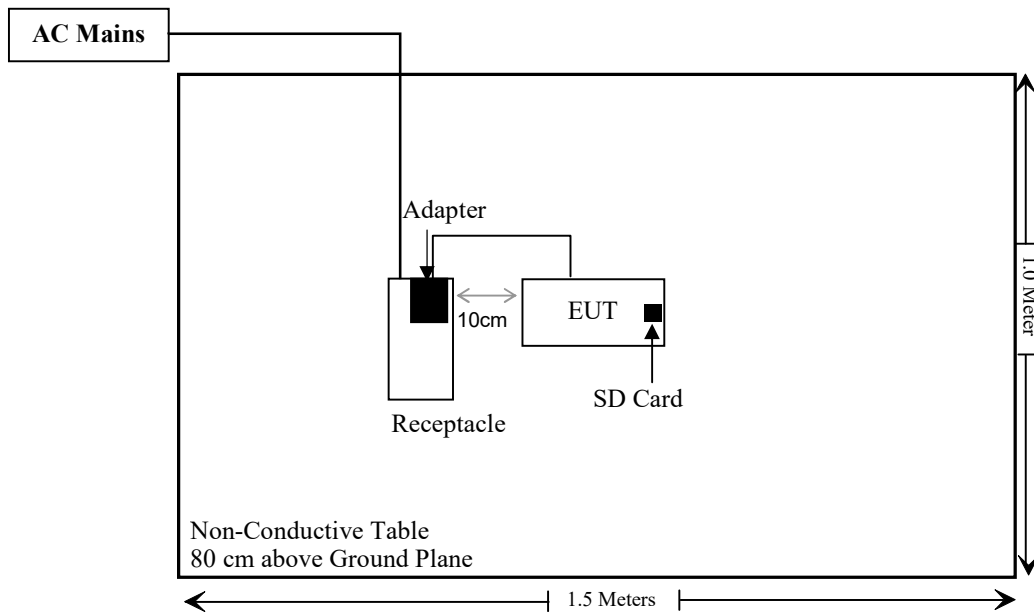

For Radiated Emissions above 1GHz:

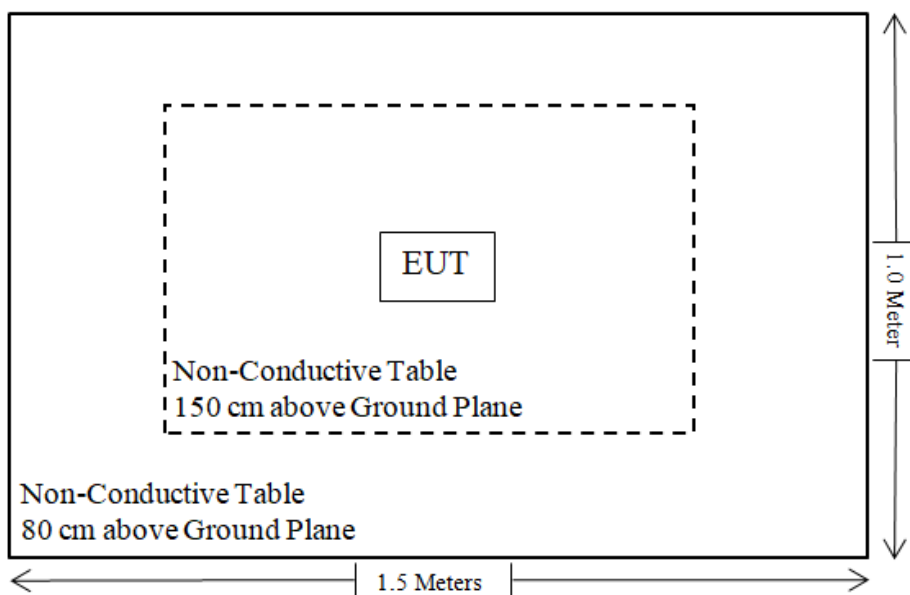

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.207(a)	Undesirable Emission& Restricted Bands	Compliant
FCC§15.407(a) (e)	Emission Bandwidth & 99% Occupied Bandwidth	Compliant
FCC§15.407 (a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
FCC§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
FCC§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant*
C63.10 §11.6	Duty Cycle	/
FCC §1.1307 & §2.1093	RF Exposure	Compliant

Compliant*: Please refer to the DFS report 2401Z105021E-RF-00F.

Not Applicable: For 5250-5350MHz/5470-5725MHz, the maximum EIRP is 12.98dBm< 27dBm (500mW)

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber Cable 1	F-03-EM236	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
A.H.System	Preamplifier	PAM-0118P	489	2024/11/15	2025/11/14
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2024/12/06	2025/12/05
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
Unknown	RF Cable	XH750A-N	J-10M	2024/12/06	2025/12/05
JD	Filter Switch Unit	DT7220FSU	DS79906	2024/09/09	2025/09/08
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2024/09/09	2025/09/08
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/12/18	2025/12/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
Rohde&Schwarz	Spectrum Analyzer	FSV40-N	102259	2024/12/04	2025/12/03
MARCONI	10dB Attenuator	6534/3	2942	2024/06/27	2025/06/26

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

Conducted Emissions

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

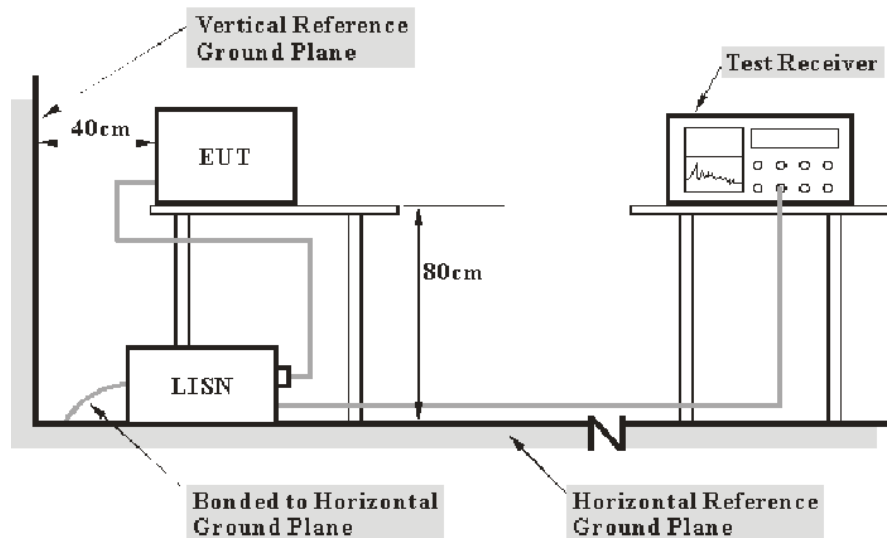

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Undesirable Emission

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

9 kHz-30MHz:

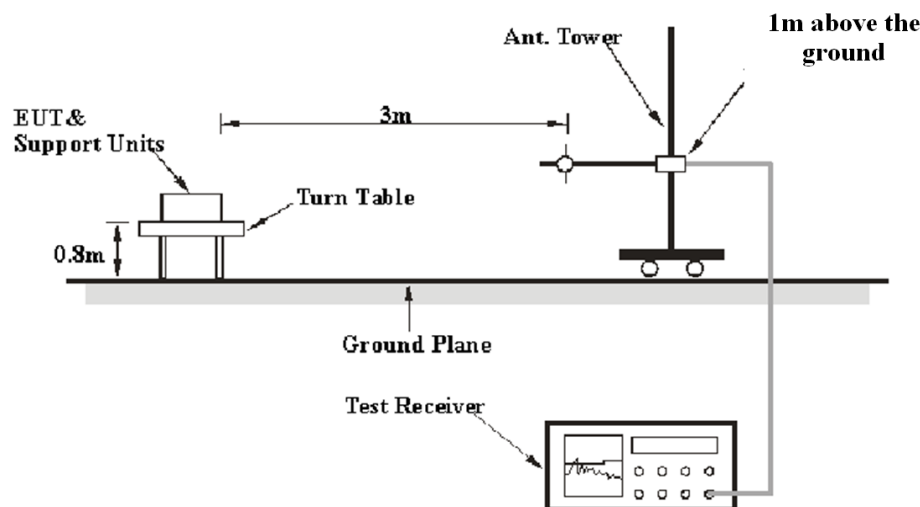

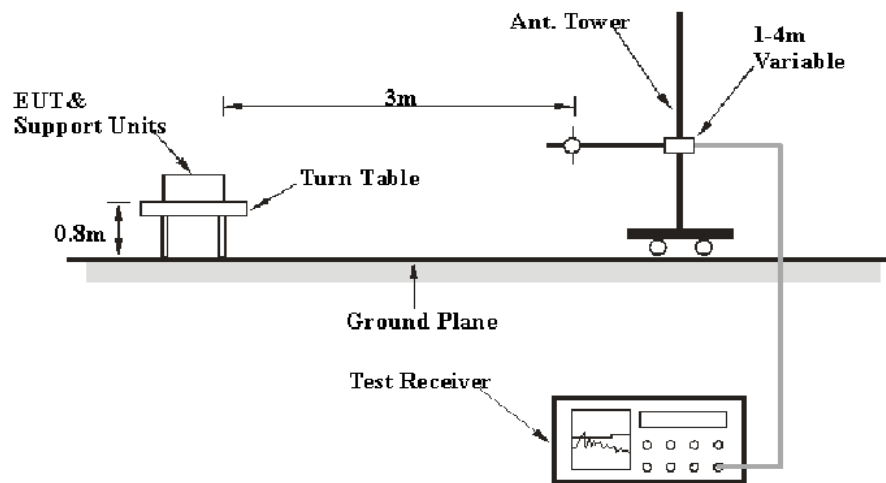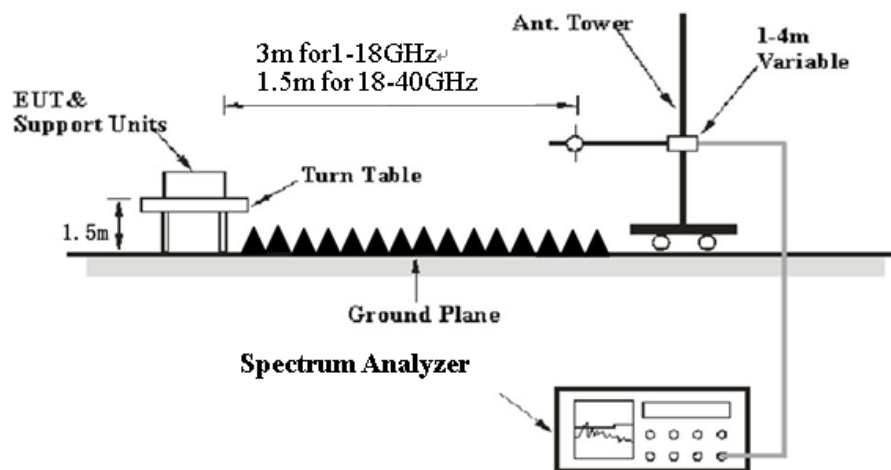30MHz-1GHz:**Above 1 GHz:**

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	1 kHz
	<98%	1MHz	≥1/Ton

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1.5/3) = -6\text{dB}$, for 18-40GHz range, the limit of 1.5m distance was added by 6dB from limit of 3m to compared with the result measurement at 1.5m distance..

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

26 dB & 6dB Emission Bandwidth

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

According to KDB789033 D02 section II.C and section II.D

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3. 99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.

- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

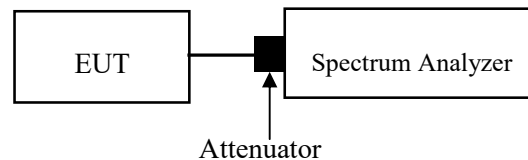

Conducted Transmitter Output Power

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method PM-G should be applied

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

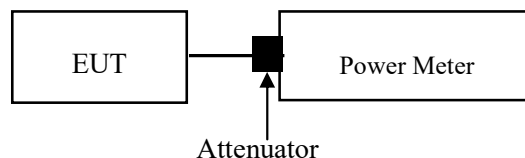

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Power Spectral Density

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

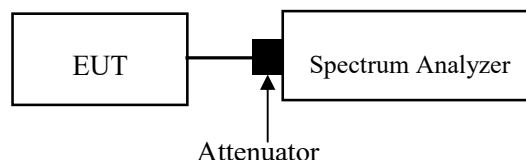

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss


Duty Cycle

Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

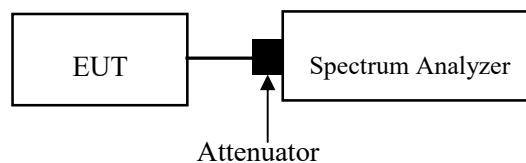

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached, the antenna gain[#] is 1.43dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

TEST DATA AND RESULTS

Conducted Emissions

Temperature (°C)	23	Relative Humidity (%)	35
ATM Pressure (kPa)	101.2	Test engineer	Macy Shi
Test date	2025/01/04		
EUT operation mode	Transmitting(Maximum output power mode, 802.11a Mode 5825MHz)		

AC 120V 60 Hz, Line

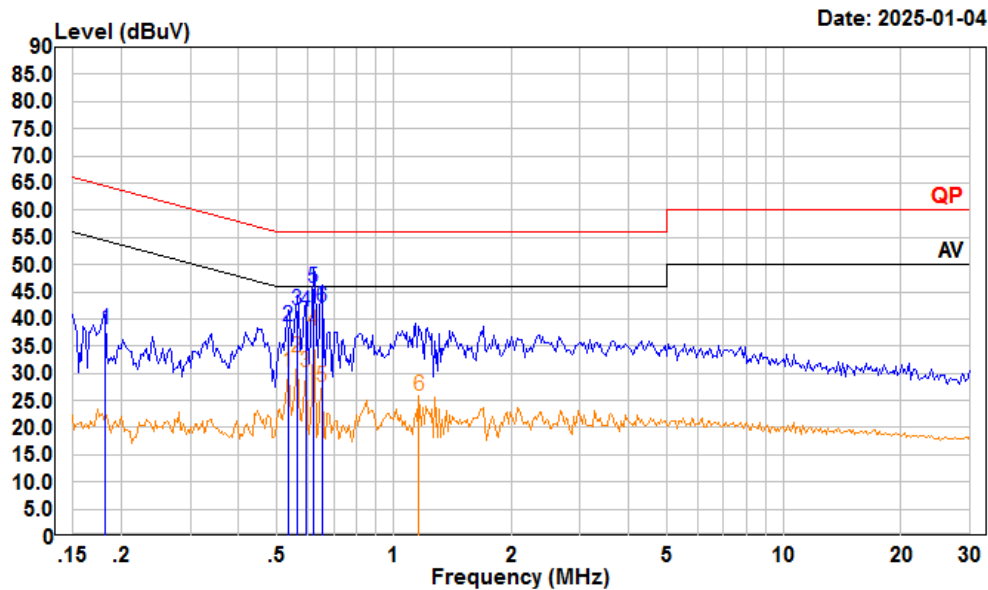

Trace: 1

Condition: Line


Project : 2401Z105021E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.182	17.20	38.13	10.83	10.10	64.42	-26.29	QP
2	0.535	18.10	38.73	10.50	10.13	56.00	-17.27	QP
3	0.564	21.00	41.63	10.50	10.13	56.00	-14.37	QP
4	0.595	20.80	41.42	10.50	10.12	56.00	-14.58	QP
5	0.621	25.00	45.63	10.50	10.13	56.00	-10.37	QP
6	0.654	21.60	42.24	10.50	10.14	56.00	-13.76	QP
	Freq	Read		LISN	Cable	Limit	Over	
		Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.535	9.68	30.31	10.50	10.13	46.00	-15.69	Average
2	0.564	12.36	32.99	10.50	10.13	46.00	-13.01	Average
3	0.595	9.51	30.13	10.50	10.12	46.00	-15.87	Average
4	0.621	17.21	37.84	10.50	10.13	46.00	-8.16	Average
5	0.654	6.81	27.45	10.50	10.14	46.00	-18.55	Average
6	1.160	5.20	25.77	10.44	10.13	46.00	-20.23	Average

AC 120V 60 Hz, Neutral

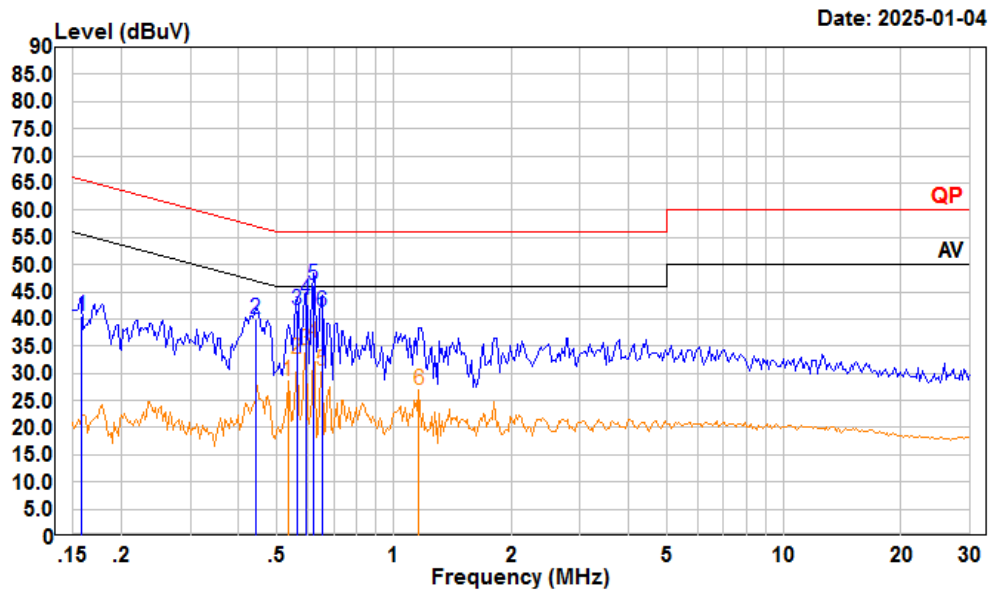

Trace: 1

Condition: Neutral

Project : 2401Z105021E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto


		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.158	19.90	40.58	10.56	10.12	65.56	-24.98	QP
2	0.442	19.20	39.98	10.66	10.12	57.02	-17.04	QP
3	0.564	20.80	41.63	10.70	10.13	56.00	-14.37	QP
4	0.595	22.70	43.52	10.70	10.12	56.00	-12.48	QP
5	0.621	25.40	46.23	10.70	10.13	56.00	-9.77	QP
6	0.654	20.60	41.44	10.70	10.14	56.00	-14.56	QP
	Freq	Read		LISN	Cable	Limit	Over	
		Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.535	7.75	28.58	10.70	10.13	46.00	-17.42	Average
2	0.564	11.82	32.65	10.70	10.13	46.00	-13.35	Average
3	0.595	13.55	34.37	10.70	10.12	46.00	-11.63	Average
4	0.621	14.69	35.52	10.70	10.13	46.00	-10.48	Average
5	0.654	9.64	30.48	10.70	10.14	46.00	-15.52	Average
6	1.160	6.13	27.05	10.79	10.13	46.00	-18.95	Average

Undesirable Emission

Temperature (°C)	24.4-25.3	Relative Humidity (%)	38-46
ATM Pressure (kPa):	101.3-101.5	Test engineer:	Jack Liu & Zenos Qiao& Dylan Yang
Test date:	2025/01/04-2025/01/08		
EUT operation mode:	Below 1GHz: Transmitting(Maximum output power mode, 802.11a Mode 5825MHz) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 30MHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3.After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded.		

Below 1GHz:


9kHz-150kHz

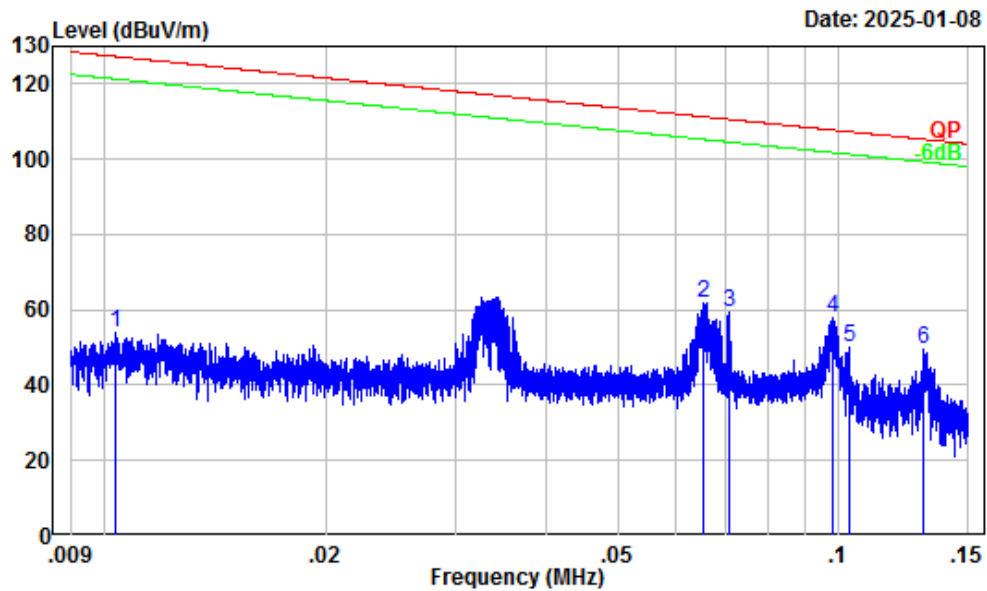

Site : Chamber A
Condition : 3m
Project Number: 2401Z105021E-RF
Test Mode : Transmitting
Setting PK RBW: 0.3KHz VBW:1KHz
Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	0.01	32.23	21.58	53.81	127.29	-73.48	Peak
2	0.07	24.85	37.09	61.94	111.29	-49.35	Peak
3	0.07	24.32	35.09	59.41	110.60	-51.19	Peak
4	0.10	22.15	35.51	57.66	107.79	-50.13	Peak
5	0.10	21.79	28.02	49.81	107.30	-57.49	Peak
6	0.13	20.19	29.49	49.68	105.28	-55.60	Peak


150kHz-30MHz

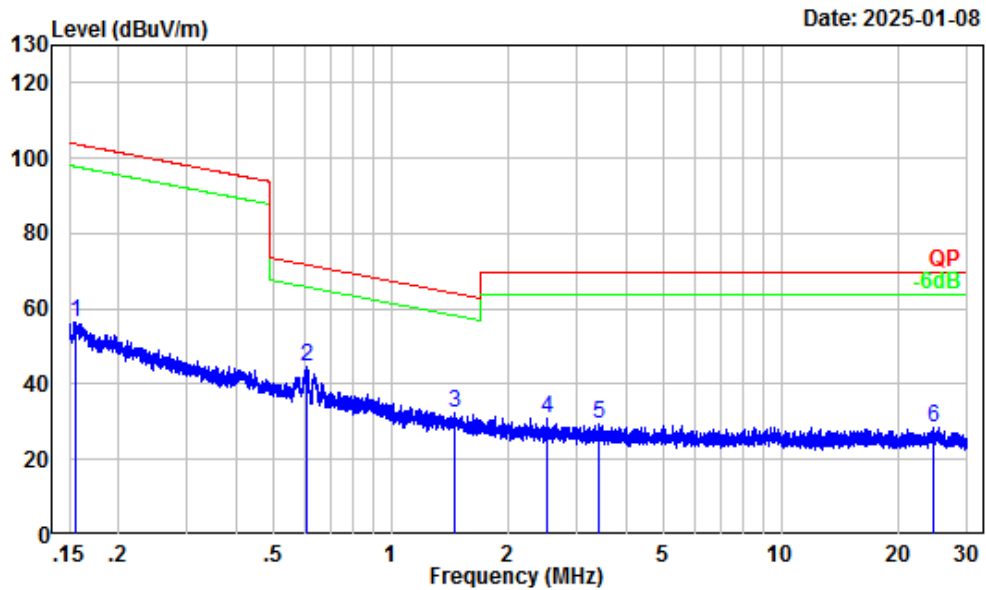

Site : Chamber A
Condition : 3m
Project Number: 2401Z105021E-RF
Test Mode : Transmitting
Setting PK RBW: 10KHz VBW:30KHz
Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.16	18.70	37.64	56.34	103.75	-47.41	Peak
2	0.61	5.03	39.65	44.68	71.85	-27.17	Peak
3	1.46	-0.08	32.35	32.27	64.14	-31.87	Peak
4	2.50	-1.88	32.61	30.73	69.54	-38.81	Peak
5	3.40	-2.37	31.81	29.44	69.54	-40.10	Peak
6	24.66	-3.17	31.70	28.53	69.54	-41.01	Peak


30MHz-1GHz_Horizontal

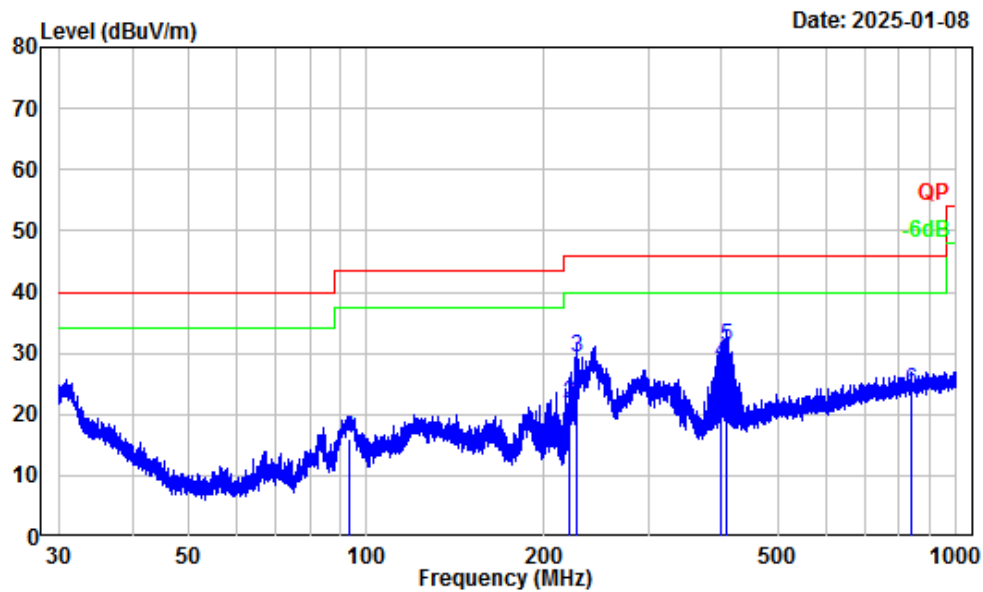

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Z105021E-RF
Test Mode : Transmitting
Setting QP RBW: 120KHz
Tester : Jack Liu

	Freq		Read		Limit	Over	Remark
	Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	93.73	-17.57	33.64	16.07	43.50	-27.43	QP
2	220.33	-14.18	35.85	21.67	46.00	-24.33	QP
3	227.89	-13.94	43.33	29.39	46.00	-16.61	QP
4	400.08	-8.41	36.90	28.49	46.00	-17.51	QP
5	407.51	-8.22	39.20	30.98	46.00	-15.02	QP
6	836.61	-1.83	25.78	23.95	46.00	-22.05	QP

30MHz-1GHz_Vertical

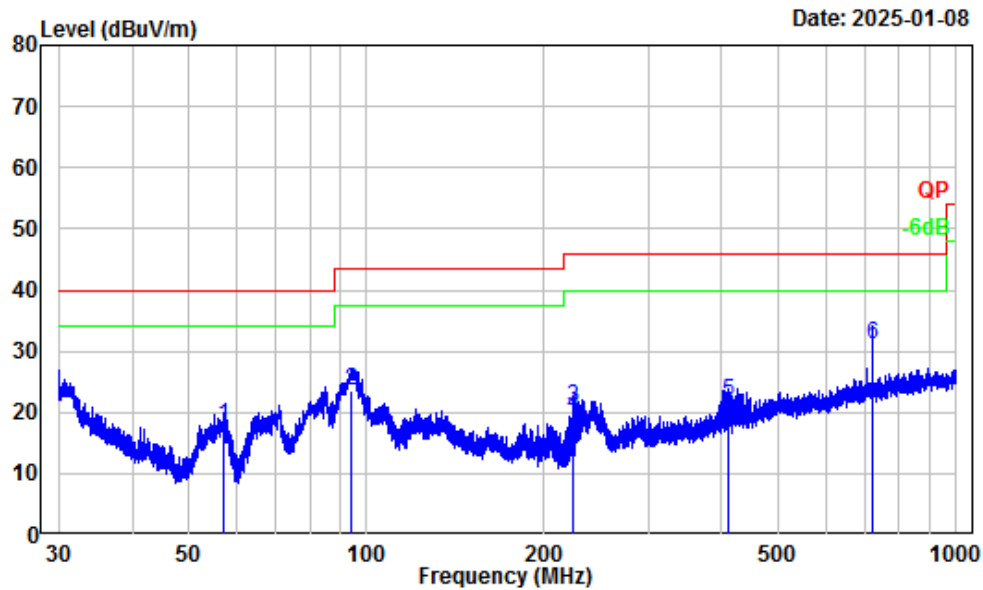

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Z105021E-RF
Test Mode : Transmitting
Setting QP RBW: 120KHz
Tester : Jack Liu

	Freq		Read		Limit	Over	Remark
	Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	57.02	-18.32	36.25	17.93	40.00	-22.07	QP
2	94.14	-17.50	40.99	23.49	43.50	-20.01	QP
3	223.93	-14.10	34.87	20.77	46.00	-25.23	QP
4	223.93	-14.10	33.81	19.71	46.00	-26.29	QP
5	410.56	-8.17	30.01	21.84	46.00	-24.16	QP
6	721.73	-3.20	34.33	31.13	46.00	-14.87	QP

Above 1GHz:**5150-5250 MHz**

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
10360.00	51.87	PK	H	2.53	54.4	68.2	-13.80
10360.00	51.83	PK	V	2.53	54.36	68.2	-13.84
Middle Channel							
10400.00	51.69	PK	H	2.55	54.24	68.2	-13.96
10400.00	51.86	PK	V	2.55	54.41	68.2	-13.79
High Channel							
10480.00	51.74	PK	H	2.25	53.99	68.2	-14.21
10480.00	52.29	PK	V	2.25	54.54	68.2	-13.66
802.11ac20							
Low Channel							
10360.00	52.04	PK	H	2.53	54.57	68.2	-13.63
10360.00	52.36	PK	V	2.53	54.89	68.2	-13.31
Middle Channel							
10400.00	51.62	PK	H	2.55	54.17	68.2	-14.03
10400.00	50.32	PK	V	2.55	52.87	68.2	-15.33
High Channel							
10480.00	51.79	PK	H	2.25	54.04	68.2	-14.16
10480.00	51.55	PK	V	2.25	53.8	68.2	-14.4
802.11ac40							
Low Channel							
10380.00	51.59	PK	H	2.54	54.13	68.2	-14.07
10380.00	51.74	PK	V	2.54	54.28	68.2	-13.92
High Channel							
10460.00	51.85	PK	H	2.32	54.17	68.2	-14.03
10460.00	51.73	PK	V	2.32	54.05	68.2	-14.15
802.11ac80							
Middle Channel							
10420.00	51.79	PK	H	2.48	54.27	68.2	-13.93
10420.00	51.85	PK	V	2.48	54.33	68.2	-13.87

5250-5350MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
10520.00	52.09	PK	H	2.18	54.27	68.2	-13.93
10520.00	52.32	PK	V	2.18	54.5	68.2	-13.7
Middle Channel							
10560.00	52.45	PK	H	2.18	54.63	68.2	-13.57
10560.00	52.81	PK	V	2.18	54.99	68.2	-13.21
High Channel							
10640.00	52.78	PK	H	2.59	55.37	74	-18.63
10640.00	39.41	AV	H	2.59	42	54	-12
10640.00	53.13	PK	V	2.59	55.72	74	-18.28
10640.00	39.55	AV	V	2.59	42.14	54	-11.86
802.11ac20							
Low Channel							
10520.00	52.21	PK	H	2.18	54.39	68.2	-13.81
10520.00	52.54	PK	V	2.18	54.72	68.2	-13.48
Middle Channel							
10560.00	52.56	PK	H	2.18	54.74	68.2	-13.46
10560.00	52.87	PK	V	2.18	55.05	68.2	-13.15
High Channel							
10640.00	52.89	PK	H	2.59	55.48	74	-18.52
10640.00	39.48	AV	H	2.59	42.07	54	-11.93
10640.00	53.27	PK	V	2.59	55.86	74	-18.14
10640.00	39.66	AV	V	2.59	42.25	54	-11.75
802.11ac40							
Low Channel							
10540.00	52.88	PK	H	2.18	55.06	68.2	-13.14
10540.00	53.15	PK	V	2.18	55.33	68.2	-12.87
High Channel							
10620.00	53.26	PK	H	2.37	55.63	74	-18.37
10620.00	40.01	AV	H	2.37	42.38	54	-11.62
10620.00	53.54	PK	V	2.37	55.91	74	-18.09
10620.00	40.19	AV	V	2.37	42.56	54	-11.44
802.11ac80							
Middle Channel							
10580.00	53.01	PK	H	2.18	55.19	68.2	-13.01
10580.00	53.34	PK	V	2.18	55.52	68.2	-12.68

5470-5725MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
11000.00	51.15	PK	H	4.29	55.44	74	-18.56
11000.00	37.52	AV	H	4.29	41.81	54	-12.19
11000.00	51.49	PK	V	4.29	55.78	74	-18.22
11000.00	37.68	AV	V	4.29	41.97	54	-12.03
Middle Channel							
11160.00	51.72	PK	H	3.5	55.22	74	-18.78
11160.00	38.37	AV	H	3.5	41.87	54	-12.13
11160.00	52.04	PK	V	3.5	55.54	74	-18.46
11160.00	38.53	AV	V	3.5	42.03	54	-11.97
High Channel							
11400.00	52.38	PK	H	3.32	55.7	74	-18.3
11400.00	39.41	AV	H	3.32	42.73	54	-11.27
11400.00	52.75	PK	V	3.32	56.07	74	-17.93
11400.00	39.59	AV	V	3.32	42.91	54	-11.09
Cross Channel							
11440.00	51.54	PK	H	3.32	54.86	74	-19.14
11440.00	38.15	AV	H	3.32	41.47	54	-12.53
11440.00	51.87	PK	V	3.32	55.19	74	-18.81
11440.00	38.39	AV	V	3.32	41.71	54	-12.29

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac20							
Low Channel							
11000.00	51.42	PK	H	4.29	55.71	74	-18.29
11000.00	37.63	AV	H	4.29	41.92	54	-12.08
11000.00	51.74	PK	V	4.29	56.03	74	-17.97
11000.00	37.81	AV	V	4.29	42.1	54	-11.9
Middle Channel							
11160.00	52.08	PK	H	3.5	55.58	74	-18.42
11160.00	38.46	AV	H	3.5	41.96	54	-12.04
11160.00	52.39	PK	V	3.5	55.89	74	-18.11
11160.00	38.64	AV	V	3.5	42.14	54	-11.86
High Channel							
11400.00	52.73	PK	H	3.32	56.05	74	-17.95
11400.00	39.59	AV	H	3.32	42.91	54	-11.09
11400.00	53.02	PK	V	3.32	56.34	74	-17.66
11400.00	39.8	AV	V	3.32	43.12	54	-10.88
Cross Channel							
11440.00	51.75	PK	H	3.32	55.07	74	-18.93
11440.00	38.21	AV	H	3.32	41.53	54	-12.47
11440.00	52.08	PK	V	3.32	55.4	74	-18.6
11440.00	38.47	AV	V	3.32	41.79	54	-12.21

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac40							
Low Channel							
11020.00	51.22	PK	H	4.1	55.32	74	-18.68
11020.00	38.41	AV	H	4.1	42.51	54	-11.49
11020.00	51.53	PK	V	4.1	55.63	74	-18.37
11020.00	38.58	AV	V	4.1	42.68	54	-11.32
Middle Channel							
11100.00	51.86	PK	H	3.34	55.2	74	-18.8
11100.00	38.79	AV	H	3.34	42.13	54	-11.87
11100.00	52.13	PK	V	3.34	55.47	74	-18.53
11100.00	38.97	AV	V	3.34	42.31	54	-11.69
High Channel							
11340.00	52.57	PK	H	3.46	56.03	74	-17.97
11340.00	39.33	AV	H	3.46	42.79	54	-11.21
11340.00	52.85	PK	V	3.46	56.31	74	-17.69
11340.00	39.49	AV	V	3.46	42.95	54	-11.05
Cross Channel							
11420.00	51.64	PK	H	3.32	54.96	74	-19.04
11420.00	38.57	AV	H	3.32	41.89	54	-12.11
11420.00	51.98	PK	V	3.32	55.3	74	-18.7
11420.00	38.81	AV	V	3.32	42.13	54	-11.87
802.11ac80							
Low Channel							
11060.00	52.93	PK	H	3.71	56.64	74	-17.36
11060.00	40.38	AV	H	3.71	44.09	54	-9.91
11060.00	53.27	PK	V	3.71	56.98	74	-17.02
11060.00	40.56	AV	V	3.71	44.27	54	-9.73
High Channel							
11220.00	52.67	PK	H	3.6	56.27	74	-17.73
11220.00	40.21	AV	H	3.6	43.81	54	-10.19
11220.00	52.98	PK	V	3.6	56.58	74	-17.42
11220.00	40.39	AV	V	3.6	43.99	54	-10.01
Cross Channel							
11380.00	52.45	PK	H	3.46	55.91	74	-18.09
11380.00	40.14	AV	H	3.46	43.6	54	-10.4
11380.00	52.69	PK	V	3.46	56.15	74	-17.85
11380.00	40.28	AV	V	3.46	43.74	54	-10.26

5725-5850MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
11490.00	51.37	PK	H	3.54	54.91	74	-19.09
11490.00	36.94	AV	H	3.54	40.48	54	-13.52
11490.00	50.68	PK	V	3.54	54.22	74	-19.78
11490.00	36.51	AV	V	3.54	40.05	54	-13.95
Middle Channel							
11570.00	51.26	PK	H	3.3	54.56	74	-19.44
11570.00	38.06	AV	H	3.3	41.36	54	-12.64
11570.00	51.08	PK	V	3.3	54.38	74	-19.62
11570.00	37.73	AV	V	3.3	41.03	54	-12.97
High Channel							
11650.00	51.75	PK	H	3.42	55.17	74	-18.83
11650.00	38.56	AV	H	3.42	41.98	54	-12.02
11650.00	51.24	PK	V	3.42	54.66	74	-19.34
11650.00	38.43	AV	V	3.42	41.85	54	-12.15
802.11ac20							
Low Channel							
11490.00	51.75	PK	H	3.54	55.29	74	-18.71
11490.00	37.86	AV	H	3.54	41.4	54	-12.6
11490.00	50.89	PK	V	3.54	54.43	74	-19.57
11490.00	37.76	AV	V	3.54	41.3	54	-12.7
Middle Channel							
11570.00	51.28	PK	H	3.3	54.58	74	-19.42
11570.00	37.46	AV	H	3.3	40.76	54	-13.24
11570.00	51.45	PK	V	3.3	54.75	74	-19.25
11570.00	37.3	AV	V	3.3	40.6	54	-13.4
High Channel							
11650.00	51.99	PK	H	3.42	55.41	74	-18.59
11650.00	38.39	AV	H	3.42	41.81	54	-12.19
11650.00	51.84	PK	V	3.42	55.26	74	-18.74
11650.00	38.26	AV	V	3.42	41.68	54	-12.32

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac40							
Low Channel							
11510.00	51.79	PK	H	3.53	55.32	74	-18.68
11510.00	38.41	AV	H	3.53	41.94	54	-12.06
11510.00	51.58	PK	V	3.53	55.11	74	-18.89
11510.00	38.27	AV	V	3.53	41.8	54	-12.2
High Channel							
11590.00	51.71	PK	H	3.21	54.92	74	-19.08
11590.00	38.65	AV	H	3.21	41.86	54	-12.14
11590.00	51.42	PK	V	3.21	54.63	74	-19.37
11590.00	38.54	AV	V	3.21	41.75	54	-12.25
802.11ac80							
Middle Channel							
11550.00	51.77	PK	H	3.37	55.14	74	-18.86
11550.00	38.75	AV	H	3.37	42.12	54	-11.88
11550.00	51.42	PK	V	3.37	54.79	74	-19.21
11550.00	38.37	AV	V	3.37	41.74	54	-12.26

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Test plots:


Left Band edge_Horizontal_Peak_802.11a_5180MHz

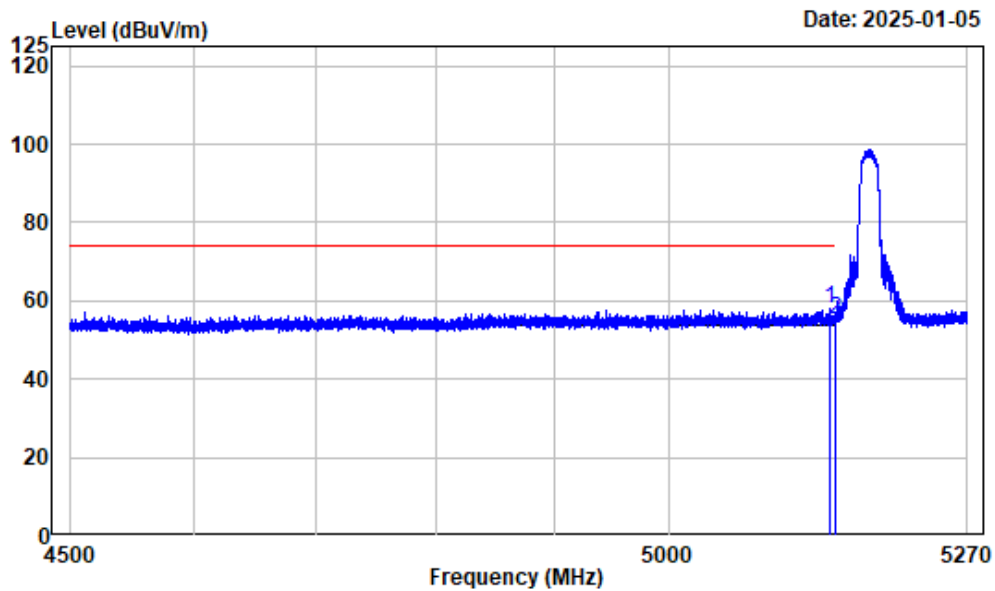

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_A_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5144.186	-7.46	65.44	57.98	74.00	-16.02	peak
2	5150.000	-7.46	62.80	55.34	74.00	-18.66	Peak


Left Band edge_Horizontal_Average_802.11a_5180MHz

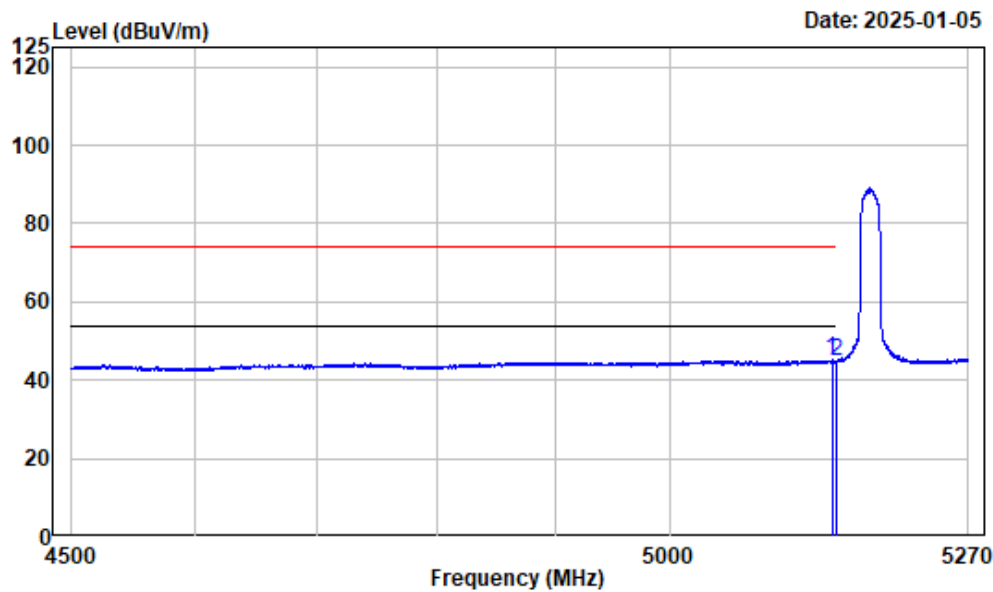

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_A_5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5145.052	-7.46	52.54	45.08	54.00	-8.92 Average
2	5150.000	-7.46	52.26	44.80	54.00	-9.20 Average


Left Band edge_Vertical_Peak_802.11a_5180MHz

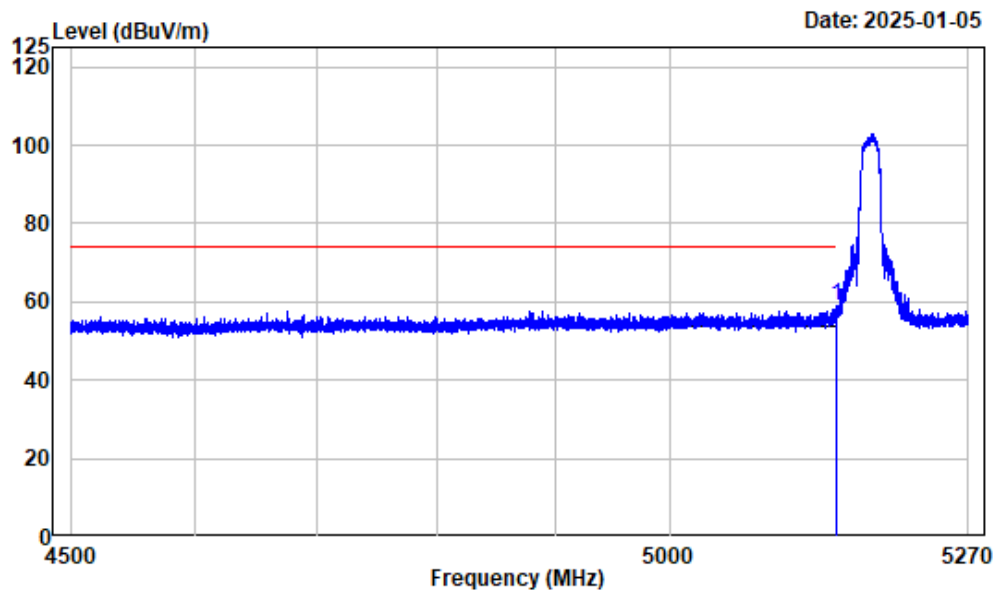

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_A_5180

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5150.000	-7.46	66.20	58.74	74.00	-15.26	peak


Left Band edge_Vertical_Average_802.11a_5180MHz

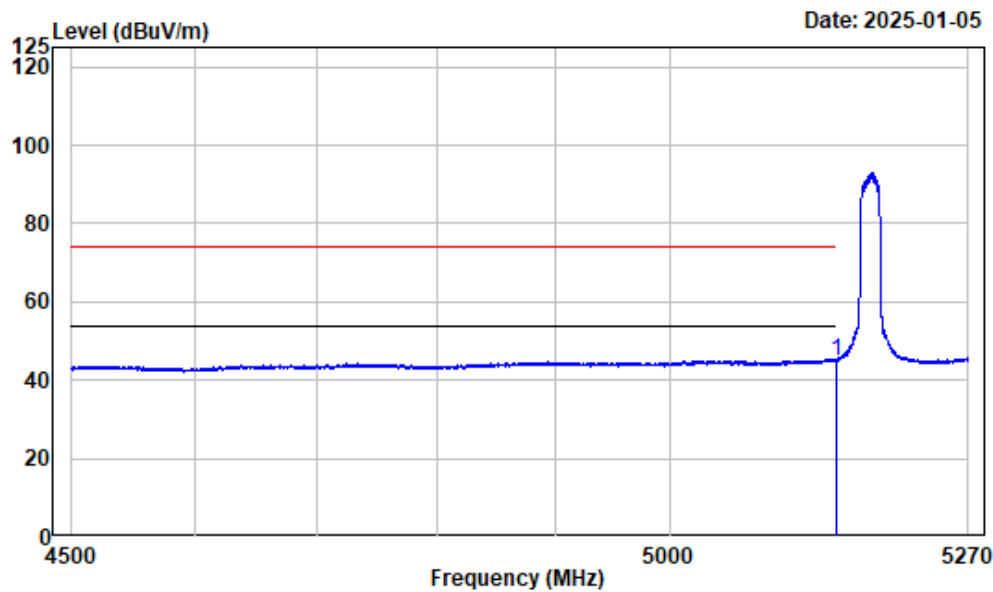

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_A_5180

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-7.46	52.47	45.01	54.00	-8.99	Average


Right Band edge_Horizontal_Peak_802.11a_5240MHz

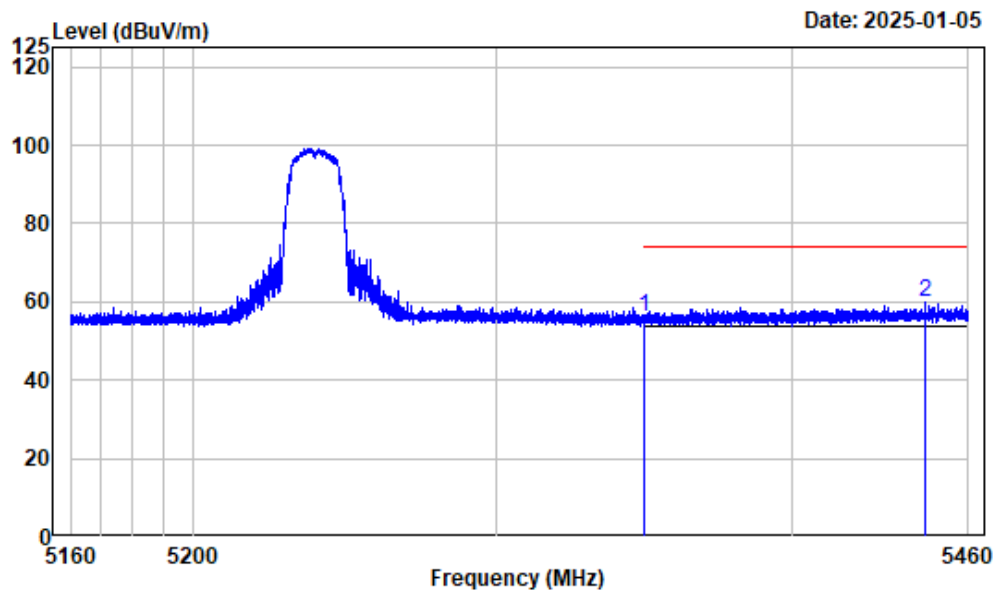

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_A_5240

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.84	56.10	74.00	-17.90	Peak
2 5444.960	-6.35	66.17	59.82	74.00	-14.18	peak


Right Band edge_Horizontal_Average_802.11a_5240MHz

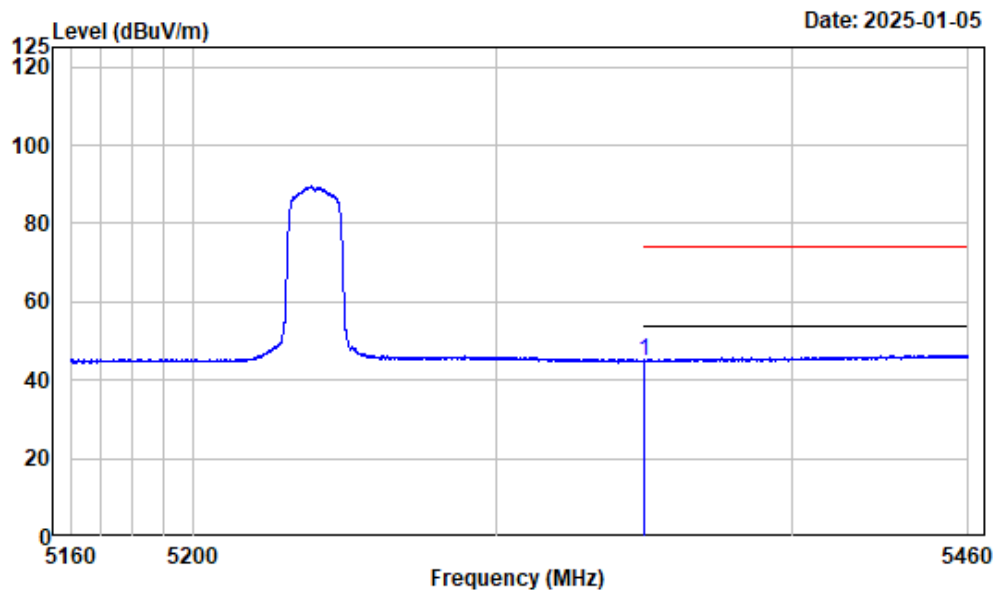

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_A_5240

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.54	44.80	54.00	-9.20	Average


Right Band edge_Vertical_Peak_802.11a_5240MHz

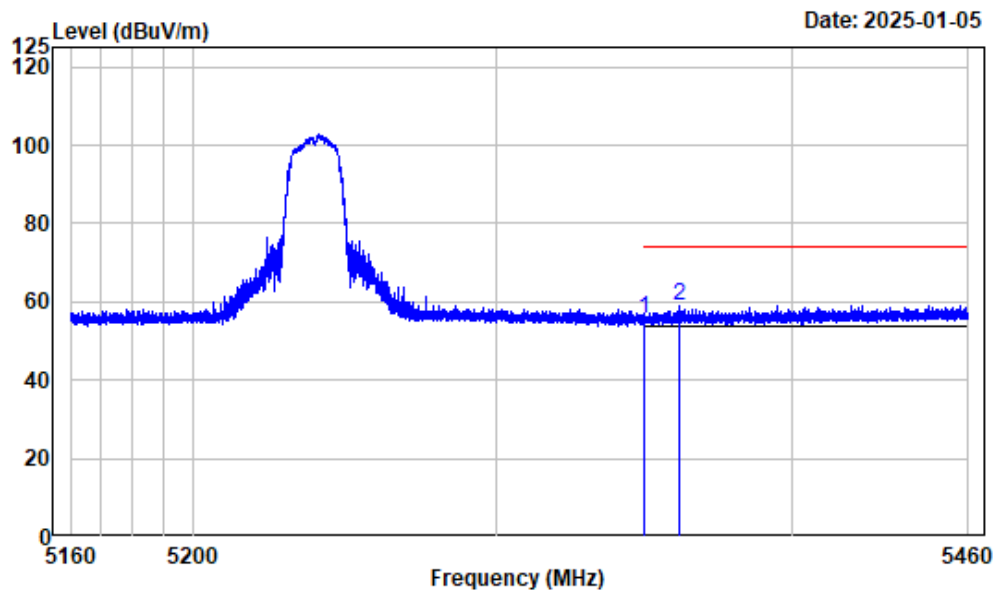

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_A_5240

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.42	55.68	74.00	-18.32	Peak
2 5361.813	-6.71	65.63	58.92	74.00	-15.08	peak


Right Band edge_Vertical_Average_802.11a_5240MHz

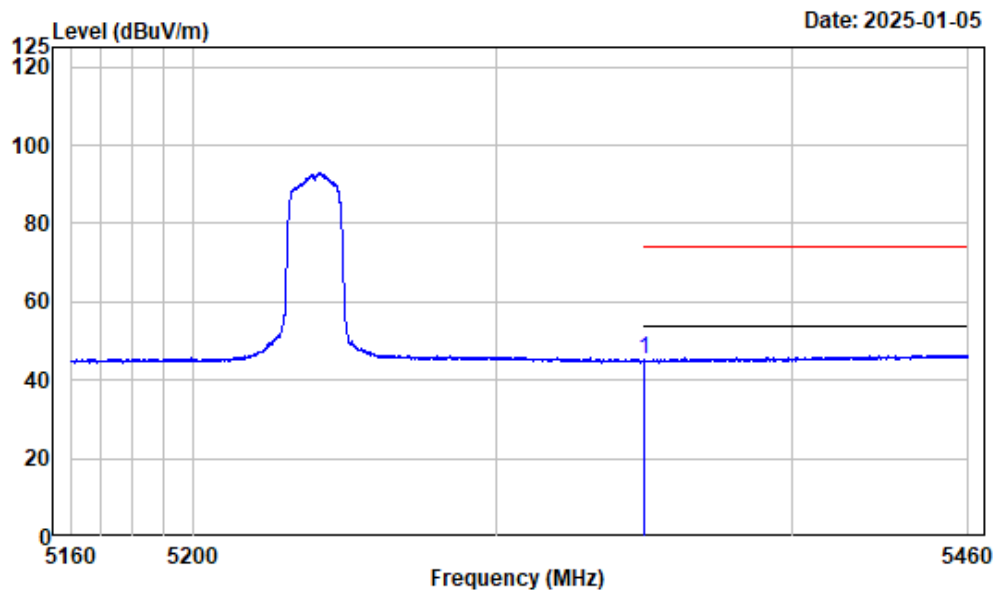

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_A_5240

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.80	45.06	54.00	-8.94	Average


Left Band edge_Horizontal_Peak_802.11ac-VHT20_5180MHz

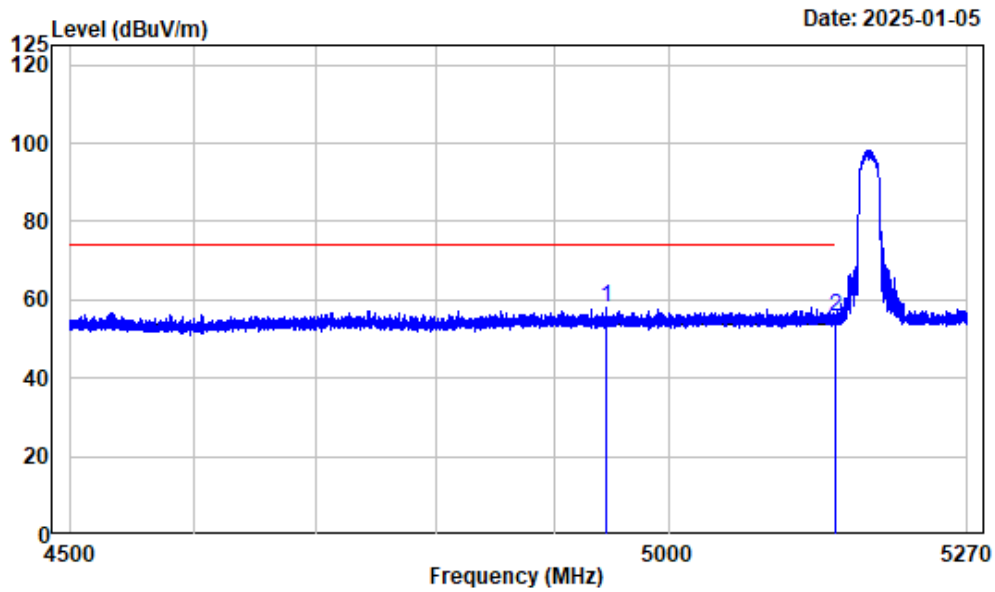

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC20_5180

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4945.500	-7.62	65.74	58.12	74.00	-15.88	peak
2	5150.000	-7.46	62.94	55.48	74.00	-18.52	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT20_5180MHz

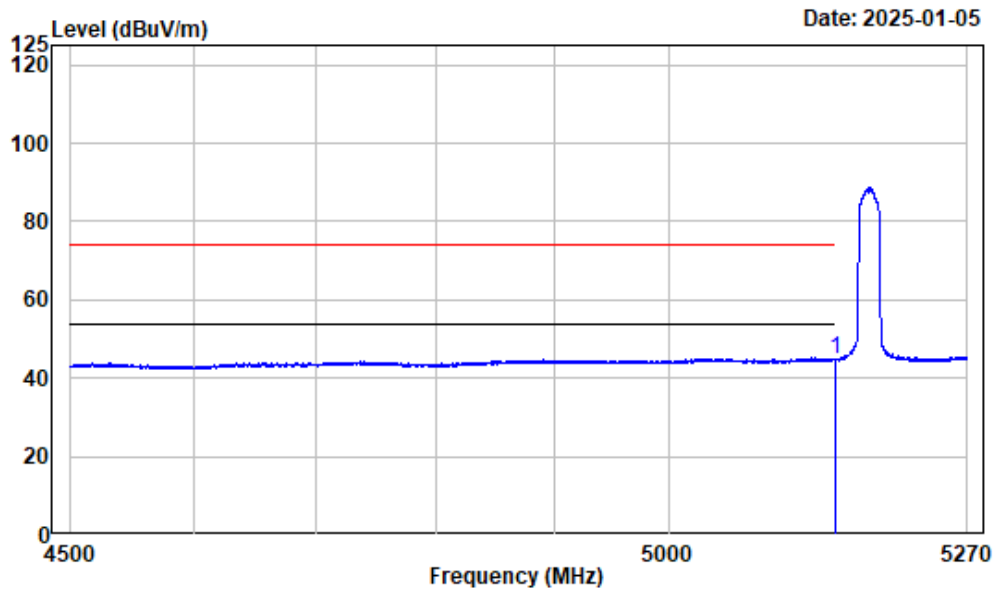

Condition : Horizontal
 Project No. : 2401Z105021E-RF
 Tester : Dylan Yang
 Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
 Note : 5G_B1_AC20_5180

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-7.46	52.35	44.89	54.00	-9.11	Average


Left Band edge_Vertical_Peak_802.11ac-VHT20_5180MHz

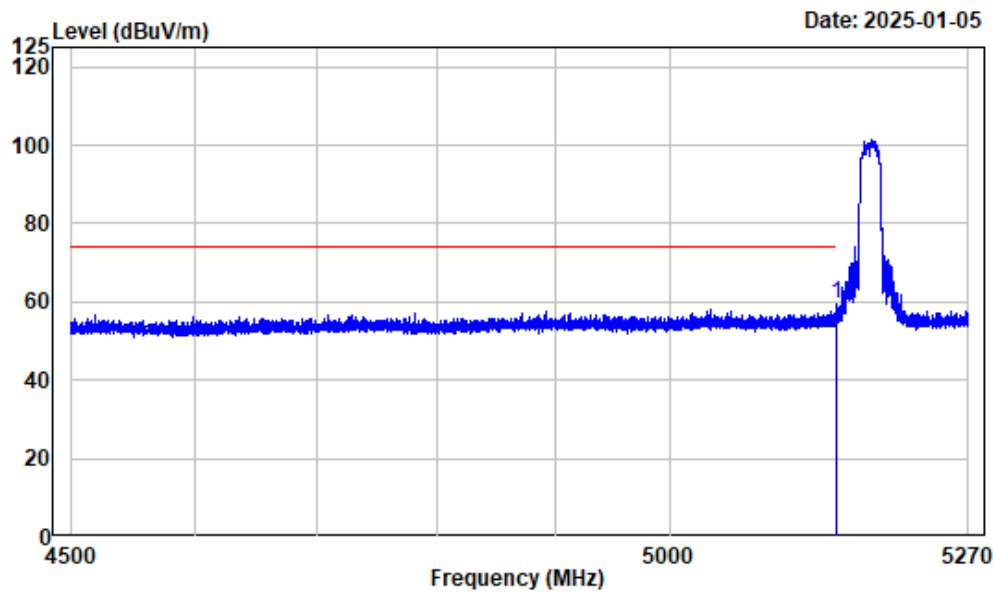

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC20_5180

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-7.46	66.86	59.40	74.00	-14.60	peak


Left Band edge_Vertical_Average_802.11ac-VHT20_5180MHz

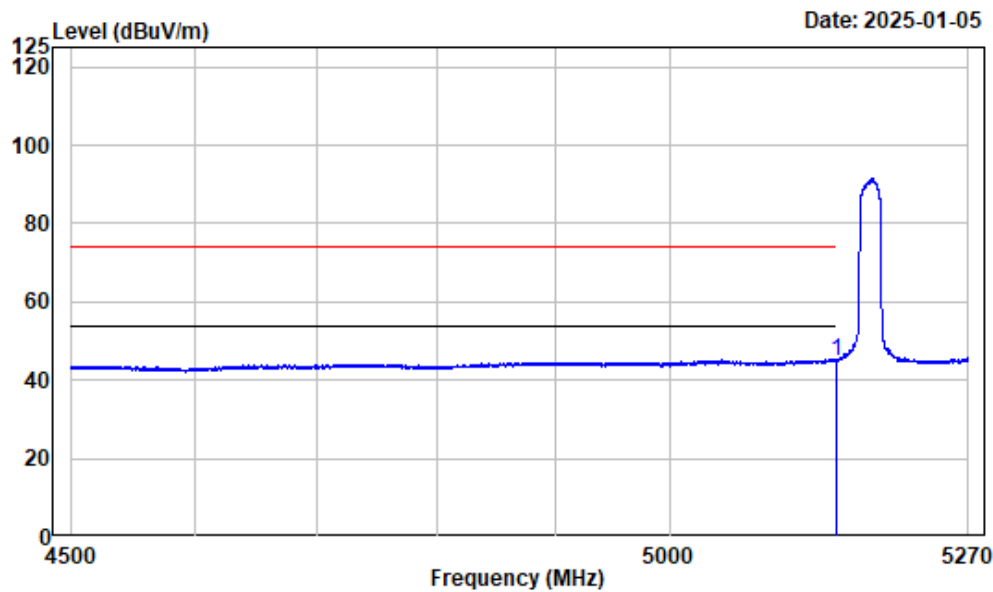

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_AC20_5180

Freq		Factor	Read Level		Limit	Over	Remark
			Level	Level	Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-7.46	52.43	44.97	54.00	-9.03	Average


Right Band edge_Horizontal_Peak_802.11ac-VHT20_5240MHz

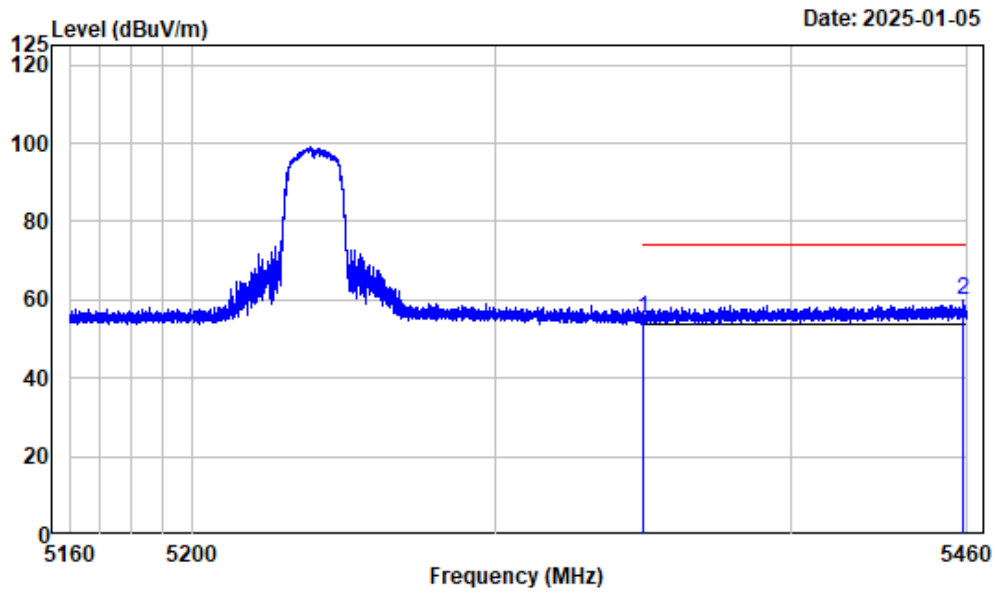

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC20_5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	61.95	55.21	74.00	-18.79	Peak
2 5458.800	-6.29	66.07	59.78	74.00	-14.22	peak


Right Band edge_Horizontal_Average_802.11ac-VHT20_5240MHz

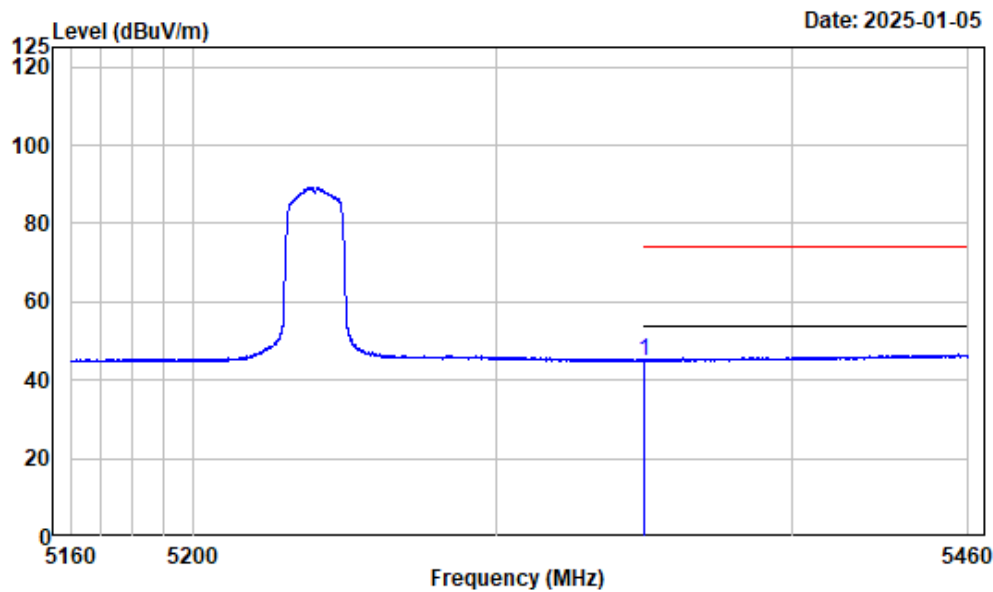

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_AC20_5240

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.73	44.99	54.00	-9.01	Average


Right Band edge_Vertical_Peak_802.11ac-VHT20_5240MHz

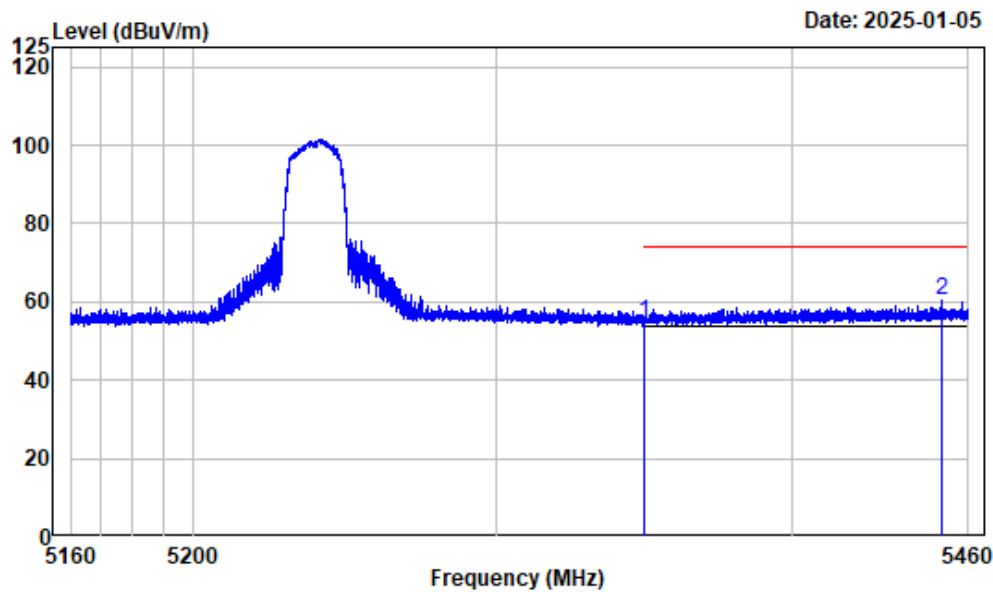

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC20_5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	61.41	54.67	74.00	-19.33	Peak
2 5450.736	-6.32	66.49	60.17	74.00	-13.83	peak


Right Band edge_Vertical_Average_802.11ac-VHT20_5240MHz

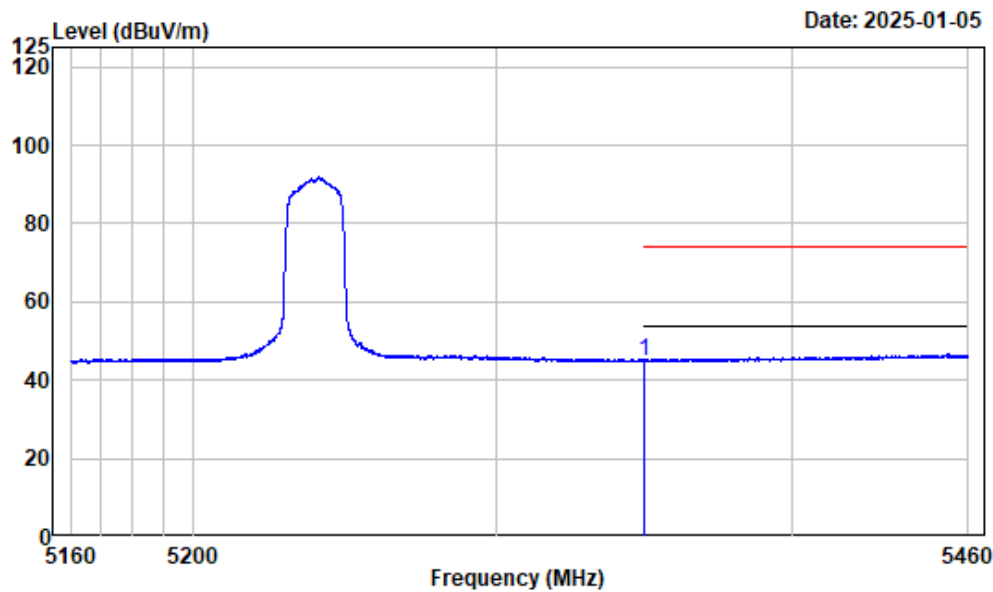

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_AC20_5240

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.55	44.81	54.00	-9.19	Average


Left Band edge_Horizontal_Peak_802.11ac-VHT40_5190MHz

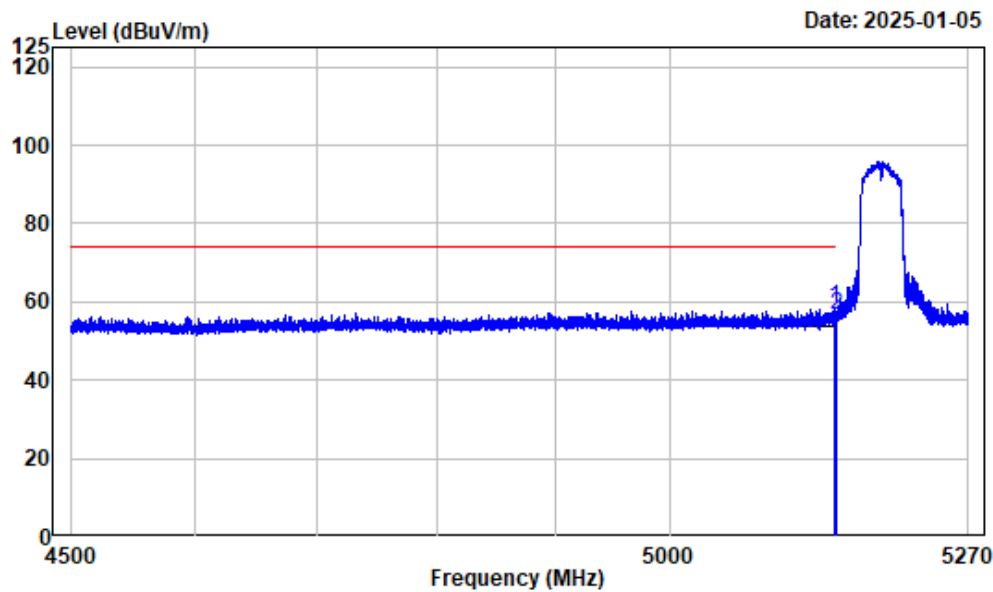

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC40_5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.325	-7.46	65.72	58.26	74.00	-15.74 peak
2	5150.000	-7.46	63.99	56.53	74.00	-17.47 Peak


Left Band edge_Horizontal_Average_802.11ac-VHT40_5190MHz

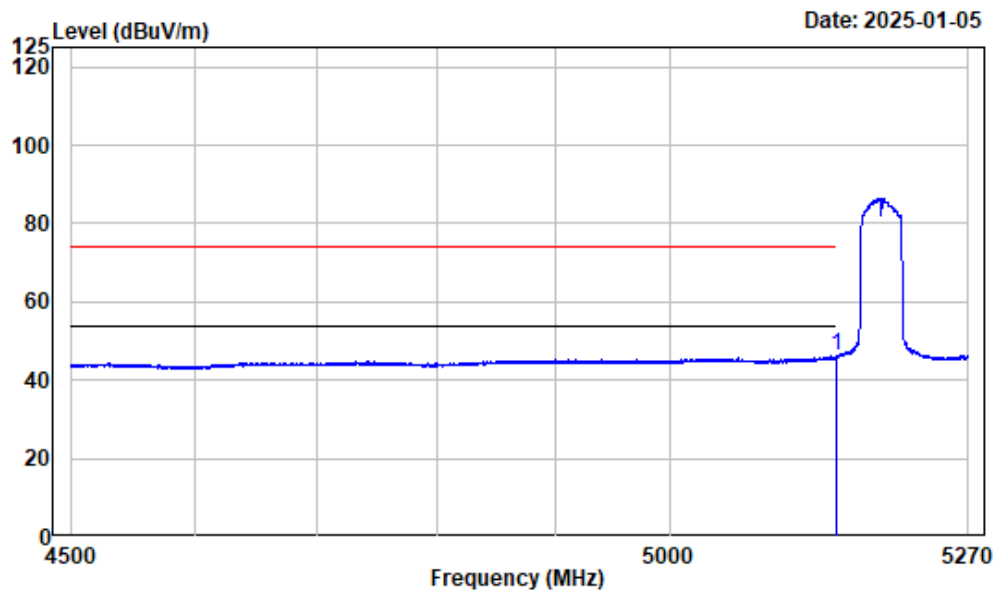

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:2kHz Detector:Peak
Note : 5G_B1_AC40_5190

Freq		Factor	Read Level		Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-7.46	53.46	46.00	54.00	-8.00	Average


Left Band edge_Vertical_Peak_802.11ac-VHT40_5190MHz

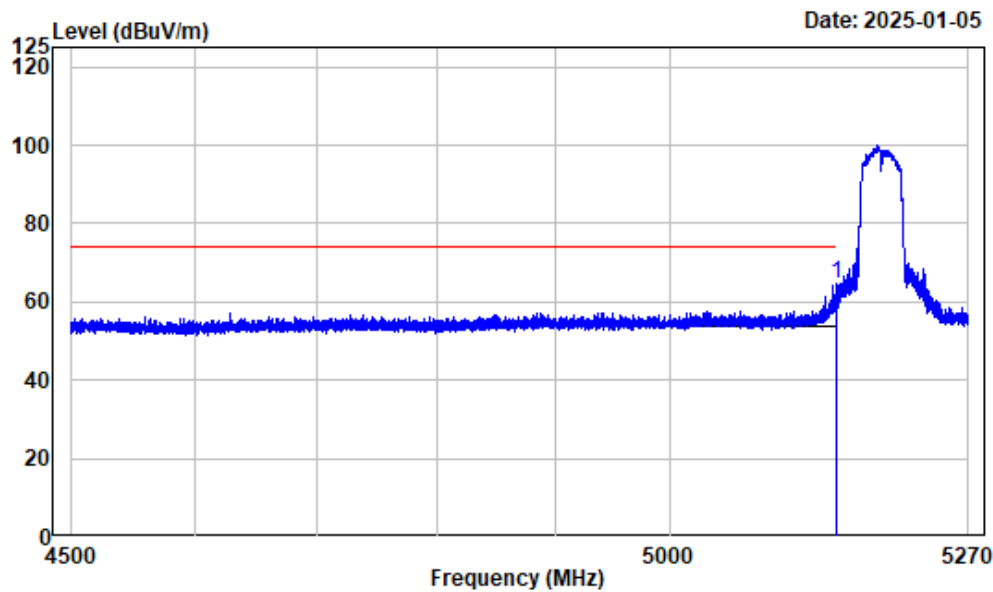

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC40_5190

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-7.46	72.00	64.54	74.00	-9.46	peak


Left Band edge_Vertical_Average_802.11ac-VHT40_5190MHz

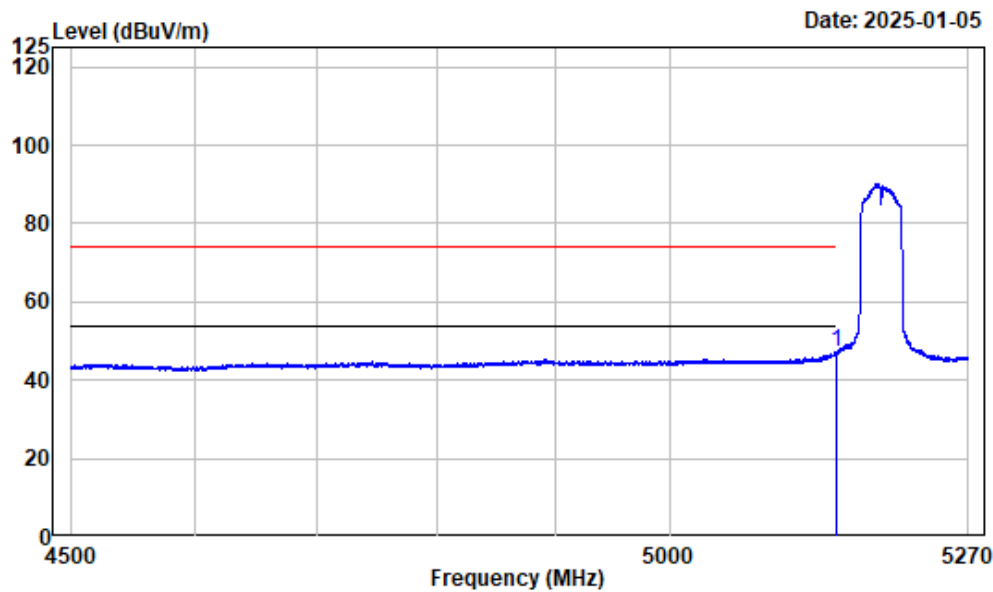

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:2kHz Detector:Peak
Note : 5G_B1_AC40_5190

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-7.46	54.79	47.33	54.00	-6.67 Average


Right Band edge_Horizontal_Peak_802.11ac-VHT40_5230MHz

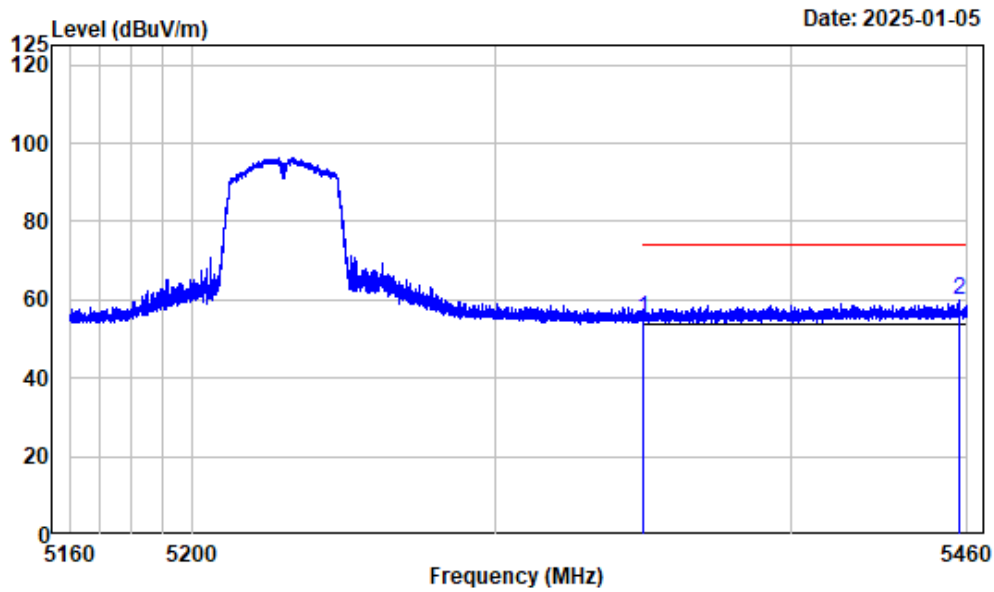

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC40_5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.06	55.32	74.00	-18.68	Peak
2 5457.337	-6.31	66.00	59.69	74.00	-14.31	peak


Right Band edge_Horizontal_Average_802.11ac-VHT40_5230MHz

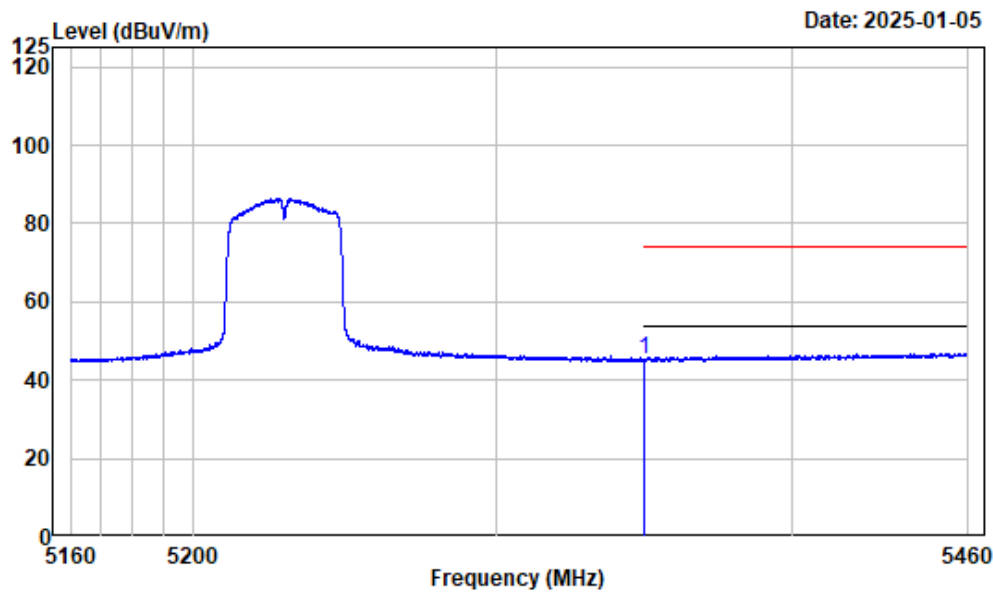

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:2kHz Detector:Peak
Note : 5G_B1_AC40_5230

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.88	45.14	54.00	-8.86	Average


Right Band edge_Vertical_Peak_802.11ac-VHT40_5230MHz

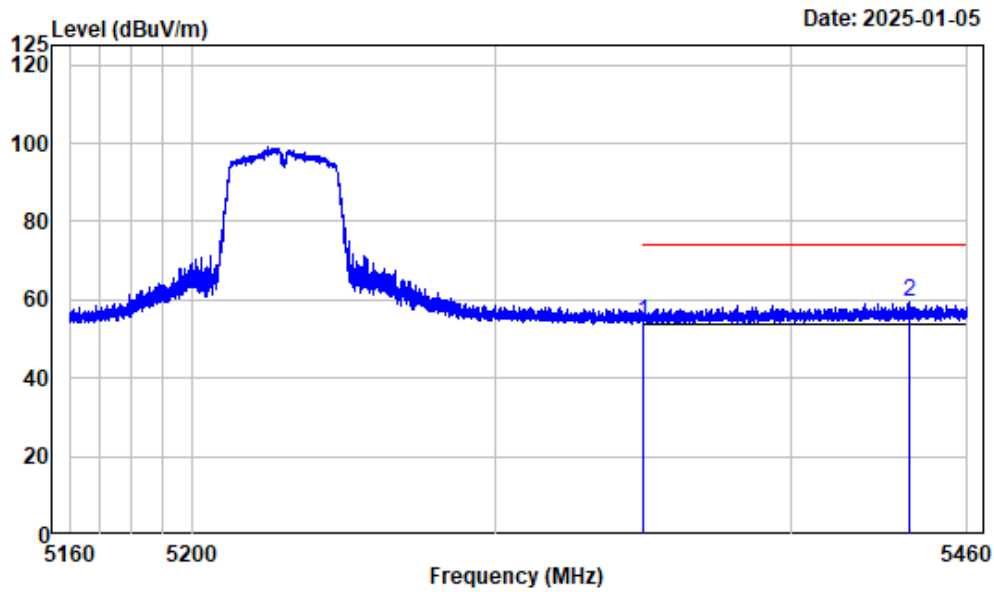

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC40_5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	60.88	54.14	74.00	-19.86	Peak
2 5440.235	-6.38	65.61	59.23	74.00	-14.77	peak


Right Band edge_Vertical_Average_802.11ac-VHT40_5230MHz

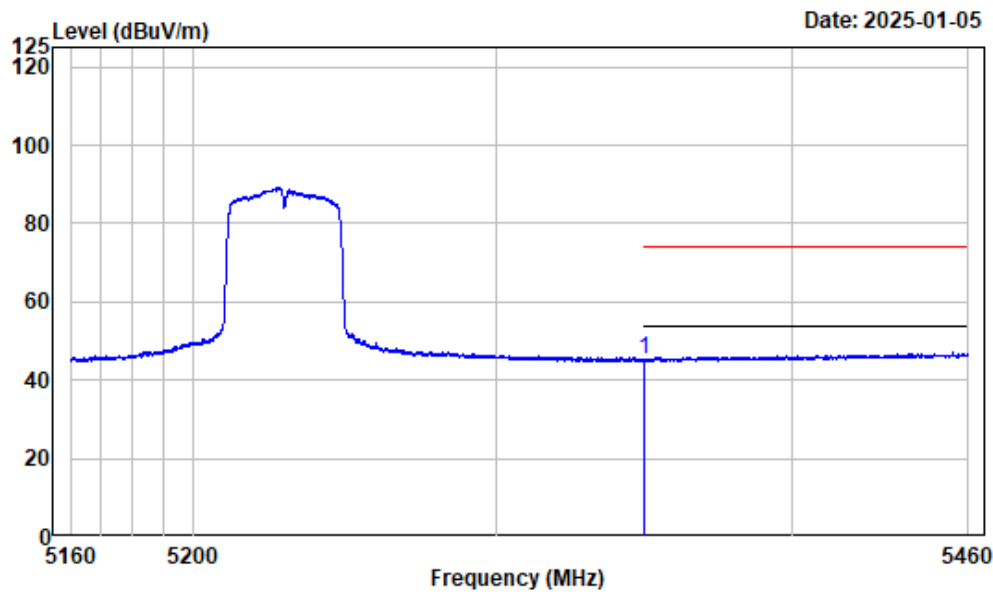

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:2kHz Detector:Peak
Note : 5G_B1_AC40_5230

Freq		Factor	Read Level	Level	Limit	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.79	45.05	54.00	-8.95	Average


Band edge_Horizontal_Peak_802.11ac-VHT80_5210MHz

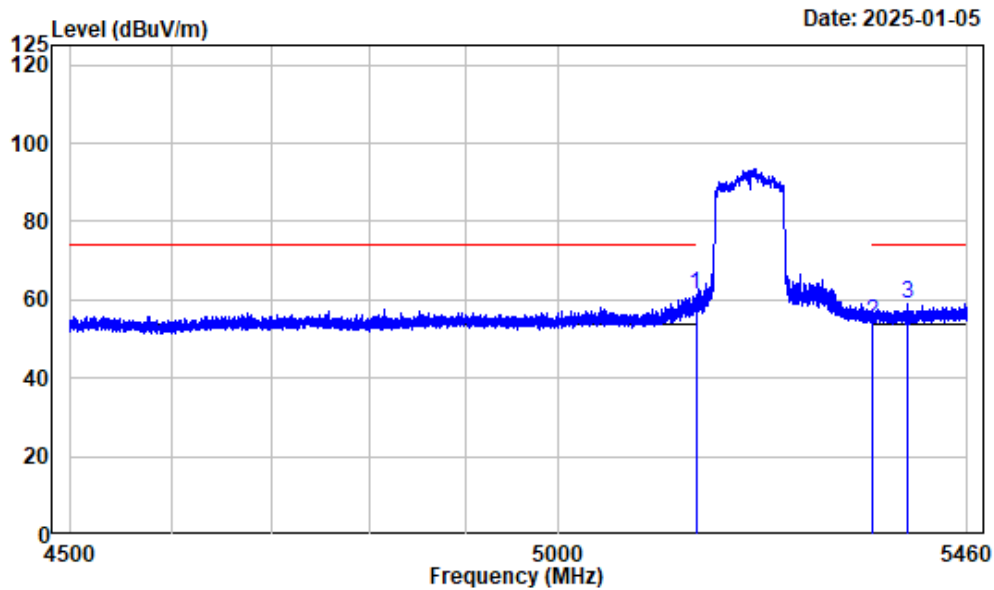

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC80_5210

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-7.46	68.82	61.36	74.00	-12.64	peak
2	5350.000	-6.74	61.13	54.39	74.00	-19.61	Peak
3	5389.671	-6.62	65.40	58.78	74.00	-15.22	peak


Band edge_Horizontal_Average_802.11ac-VHT80_5210MHz

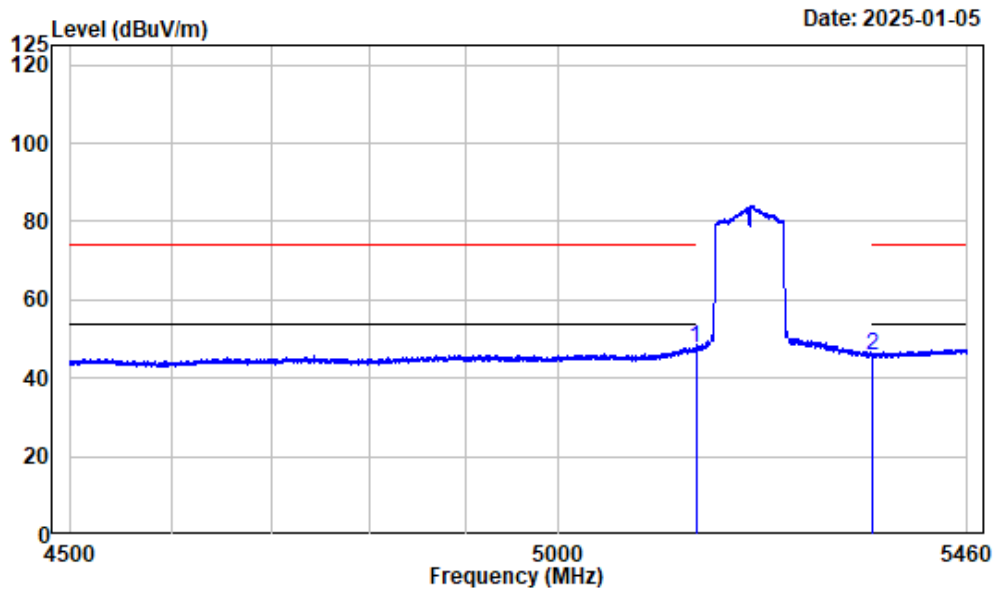

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:5kHz Detector:Peak
Note : 5G_B1_AC80_5210

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-7.46	55.20	47.74	54.00	-6.26	Average
2	5350.000	-6.74	52.72	45.98	54.00	-8.02	Average


Band edge_Vertical_Peak_802.11ac-VHT80_5210MHz

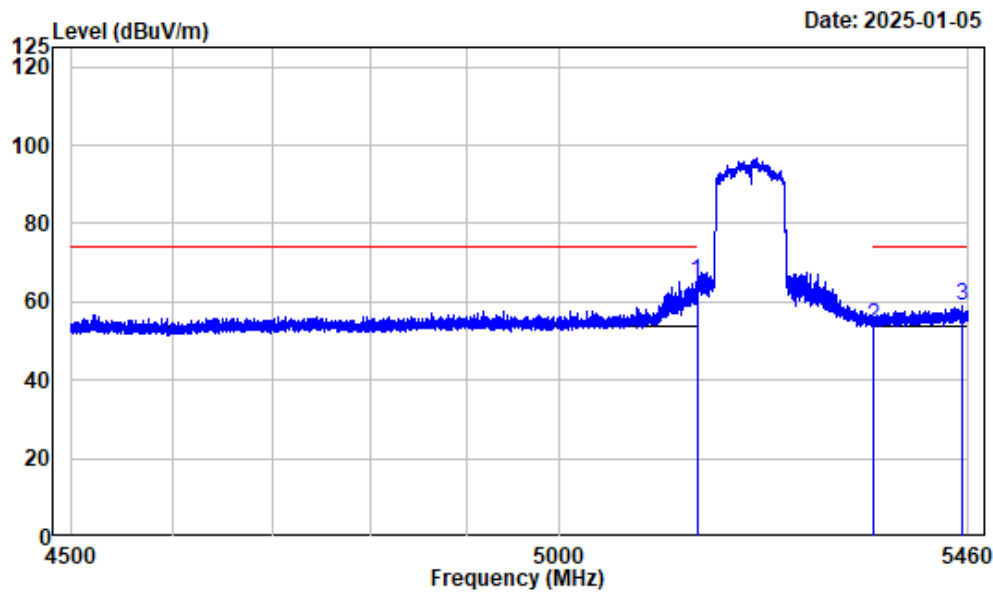

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC80_5210

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5150.000	-7.46	72.77	65.31	74.00	-8.69	peak
2 5350.000	-6.74	60.61	53.87	74.00	-20.13	Peak
3 5452.319	-6.32	65.13	58.81	74.00	-15.19	peak


Band edge_Vertical_Average_802.11ac-VHT80_5210MHz

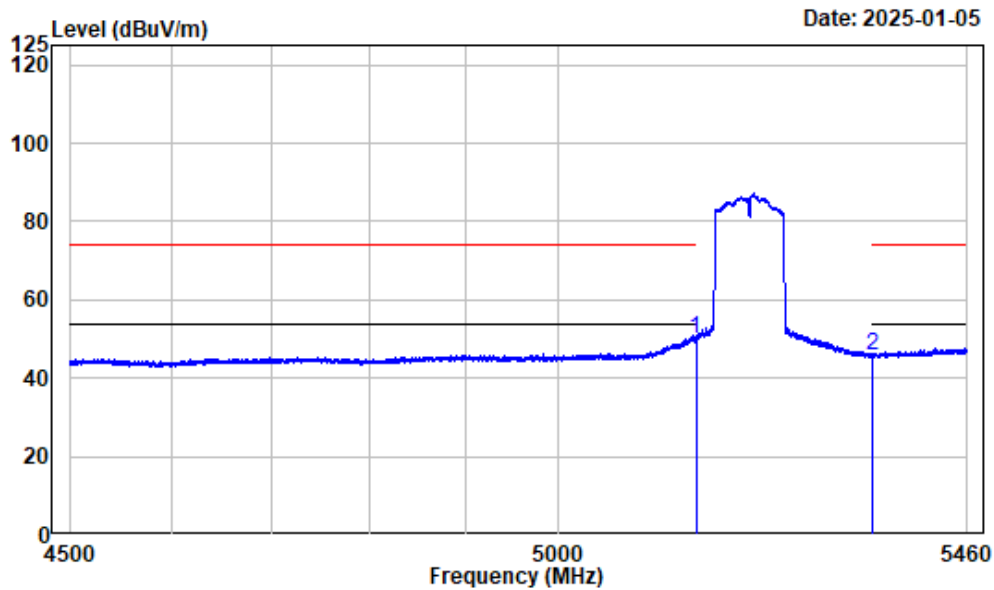

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:5kHz Detector:Peak
Note : 5G_B1_AC80_5210

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-7.46	57.49	50.03	54.00	-3.97	Average
2	5350.000	-6.74	52.42	45.68	54.00	-8.32	Average


Left Band edge_Horizontal_Peak_802.11a_5260MHz

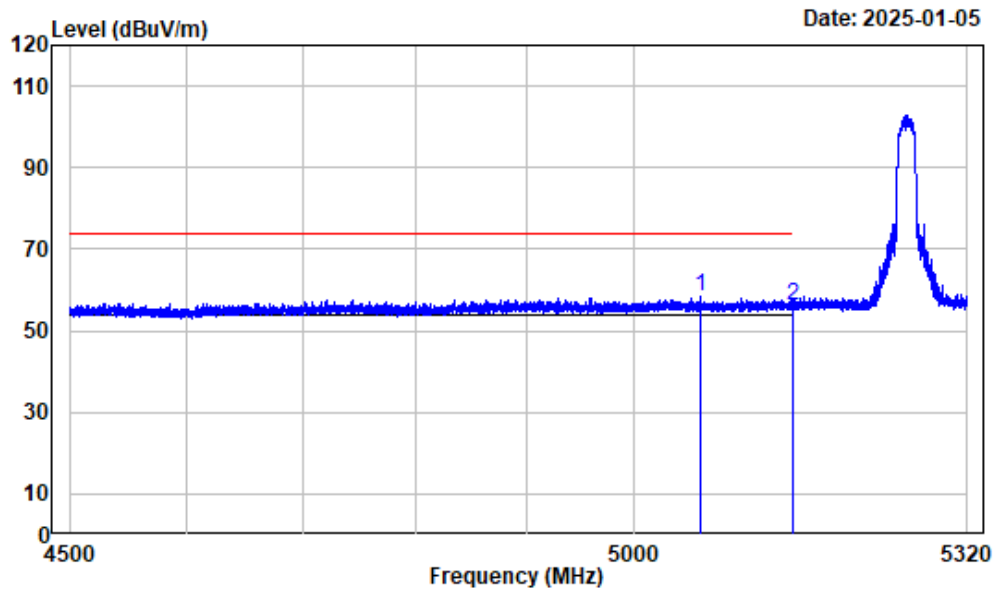

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5061.360	-7.35	65.58	58.23	74.00	-15.77	Peak
2 5150.000	-7.46	63.39	55.93	74.00	-18.07	Peak


Left Band edge_Horizontal_Average_802.11a_5260MHz

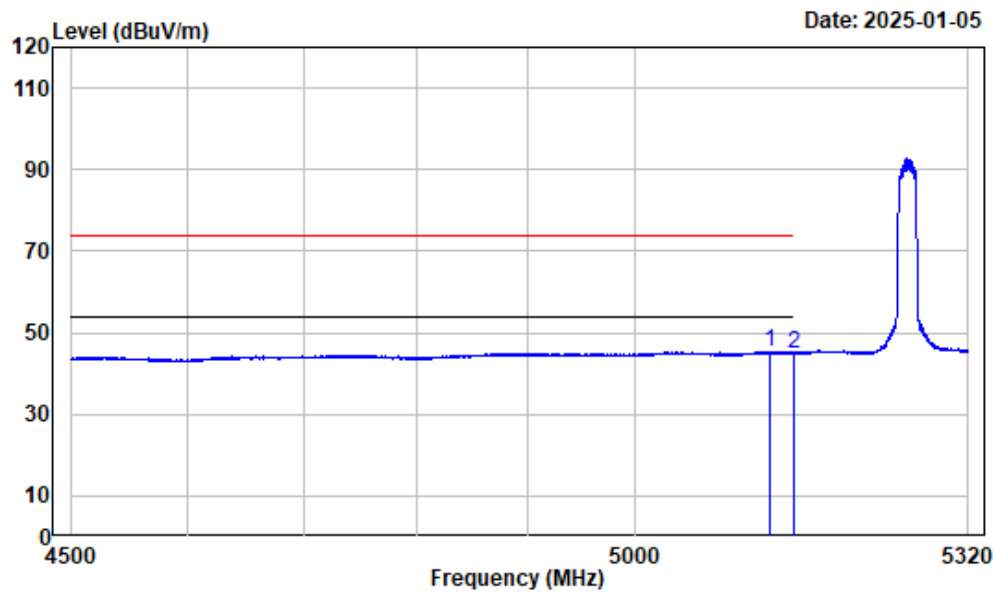

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5126.661	-7.47	52.92	45.45	54.00	-8.55 Average
2	5150.000	-7.46	52.43	44.97	54.00	-9.03 Average


Left Band edge_Vertical_Peak_802.11a_5260MHz

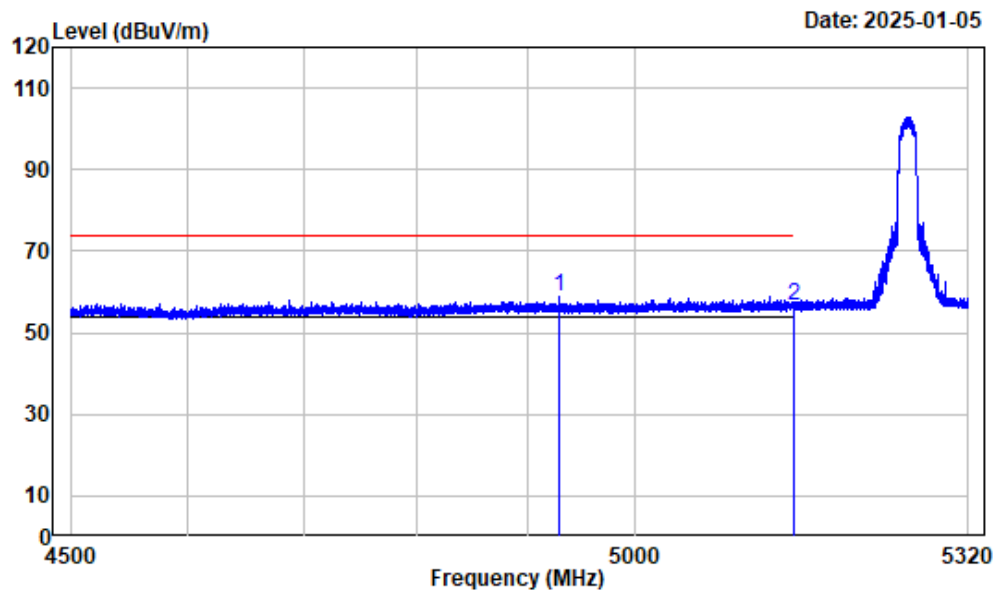

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4929.426	-7.59	66.50	58.91	74.00	-15.09	Peak
2	5150.000	-7.46	64.26	56.80	74.00	-17.20	Peak


Left Band edge_Vertical_Average_802.11a_5260MHz

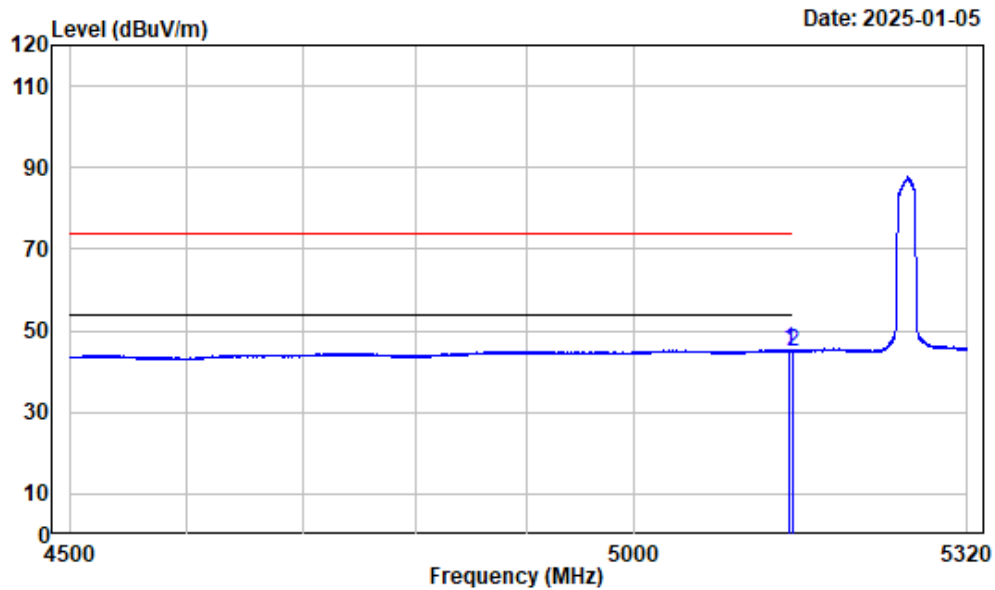

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5145.728	-7.46	52.79	45.33	54.00	-8.67	Average
2 5150.000	-7.46	52.23	44.77	54.00	-9.23	Average


Right Band edge_Horizontal_Peak_802.11a_5320MHz

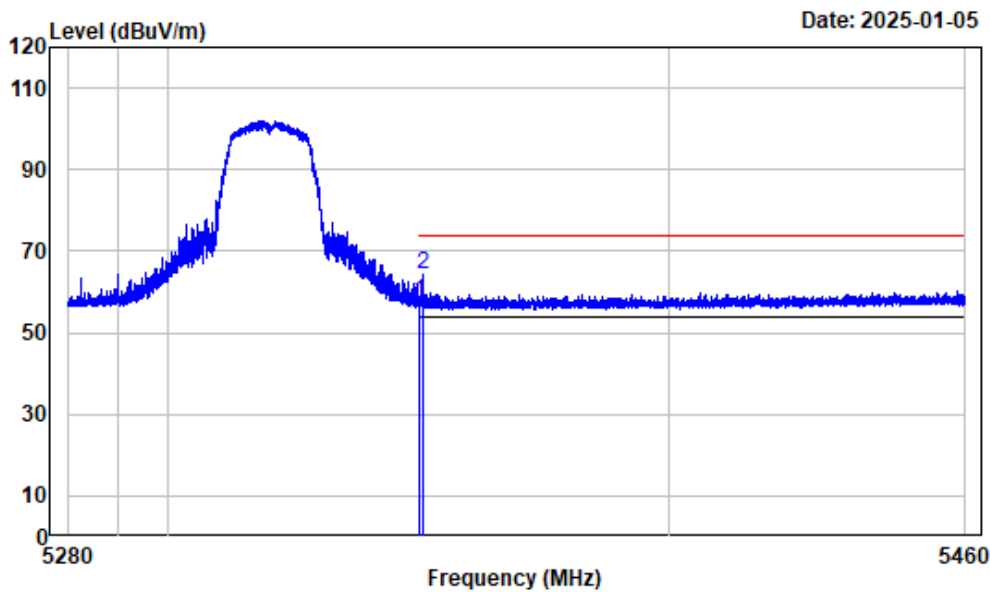

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	64.04	57.30	74.00	-16.70 Peak
2	5350.434	-6.74	71.17	64.43	74.00	-9.57 Peak


Right Band edge_Horizontal_Average_802.11a_5320MHz

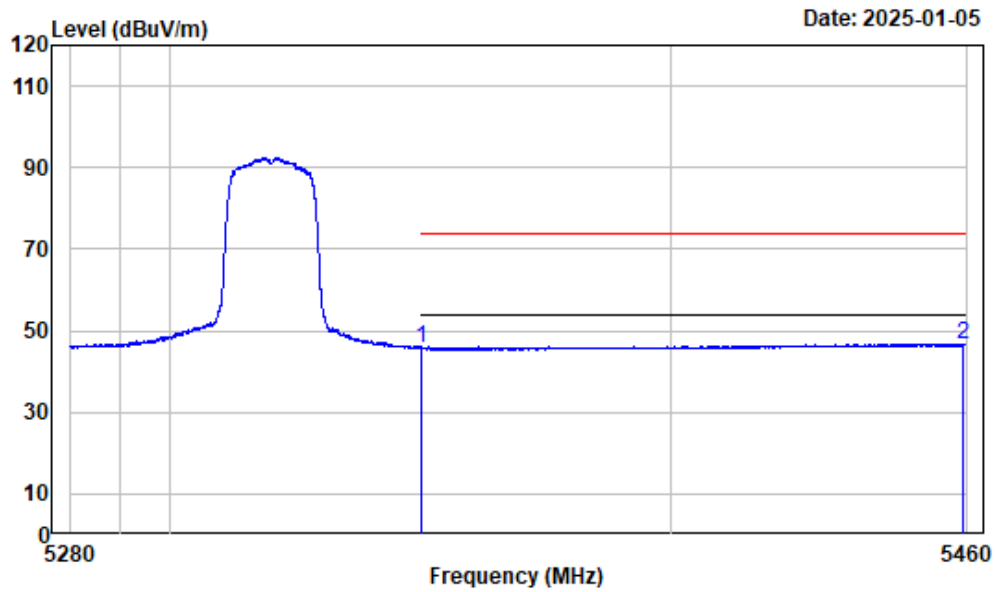

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.59	45.85	54.00	-8.15	Average
2 5459.145	-6.29	53.07	46.78	54.00	-7.22	Average


Right Band edge_Vertical_Peak_802.11a_5320MHz

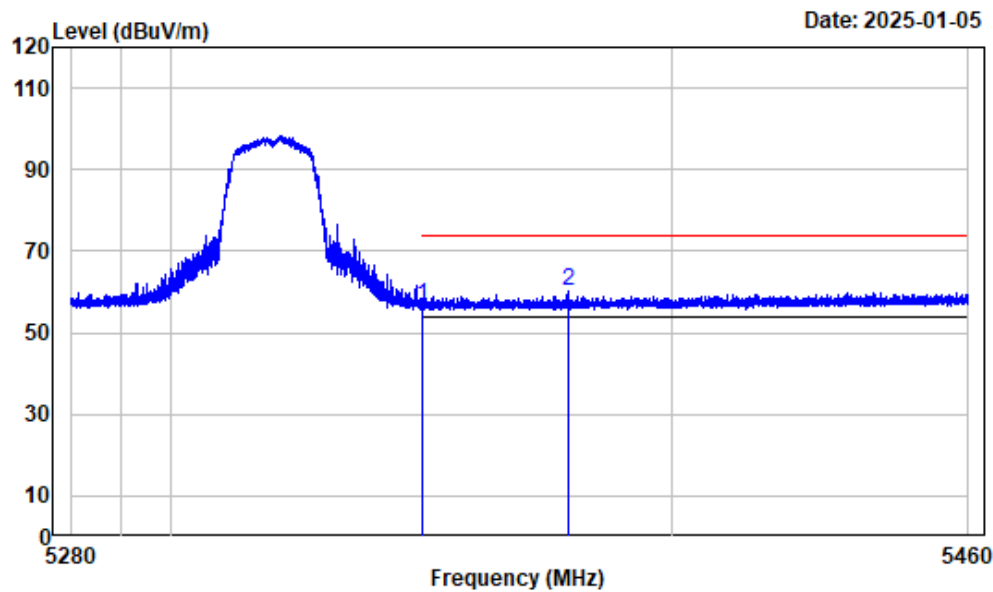

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.32	56.58	74.00	-17.42	Peak
2 5378.922	-6.65	66.73	60.08	74.00	-13.92	Peak


Right Band edge_Vertical_Average_802.11a_5320MHz

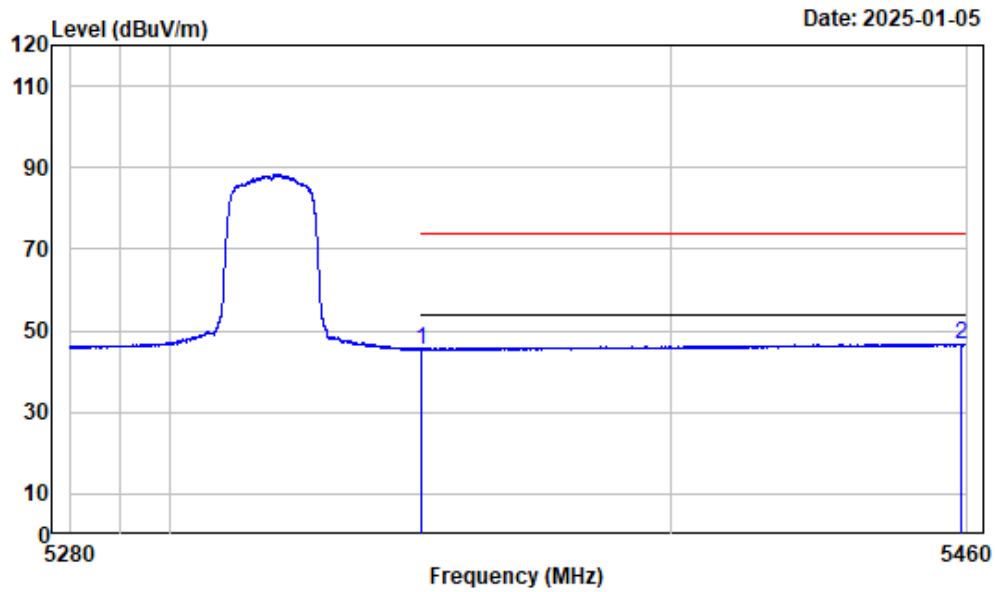

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	52.23	45.49	54.00	-8.51	Average
2	5458.605	-6.29	53.12	46.83	54.00	-7.17	Average


Left Band edge_Horizontal_Peak_802.11ac-VHT20_5260MHz

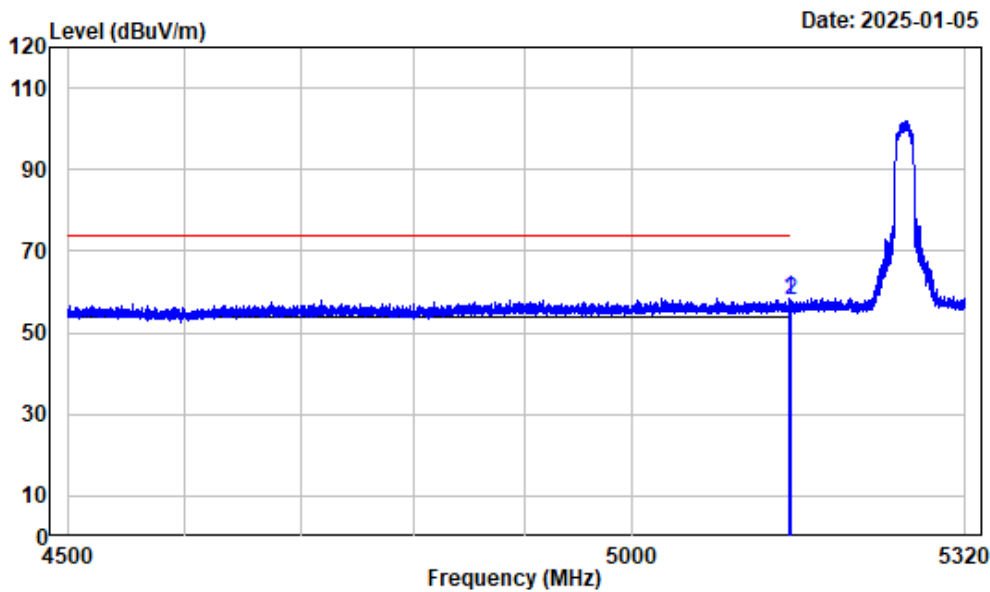

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.701	-7.46	65.91	58.45	74.00	-15.55 Peak
2	5150.000	-7.46	65.25	57.79	74.00	-16.21 Peak


Left Band edge_Horizontal_Average_802.11ac-VHT20_5260MHz

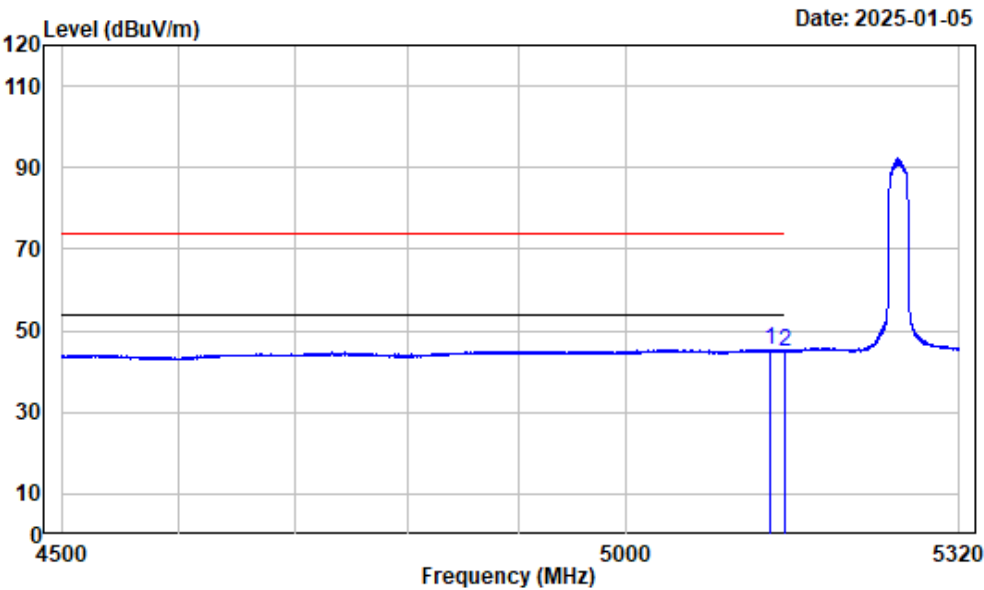

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5135.169	-7.46	52.78	45.32	54.00	-8.68 Average
2	5150.000	-7.46	52.50	45.04	54.00	-8.96 Average


Left Band edge_Vertical_Peak_802.11ac-VHT20_5260MHz

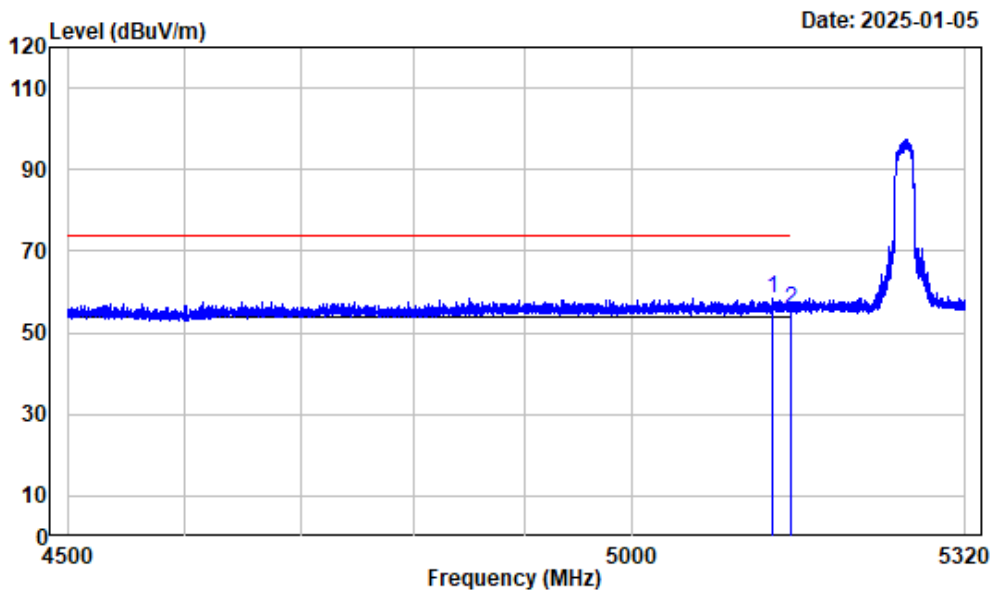

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5132.812	-7.47	65.89	58.42	74.00	-15.58	Peak
2	5150.000	-7.46	63.32	55.86	74.00	-18.14	Peak


Left Band edge_Vertical_Average_802.11ac-VHT20_5260MHz

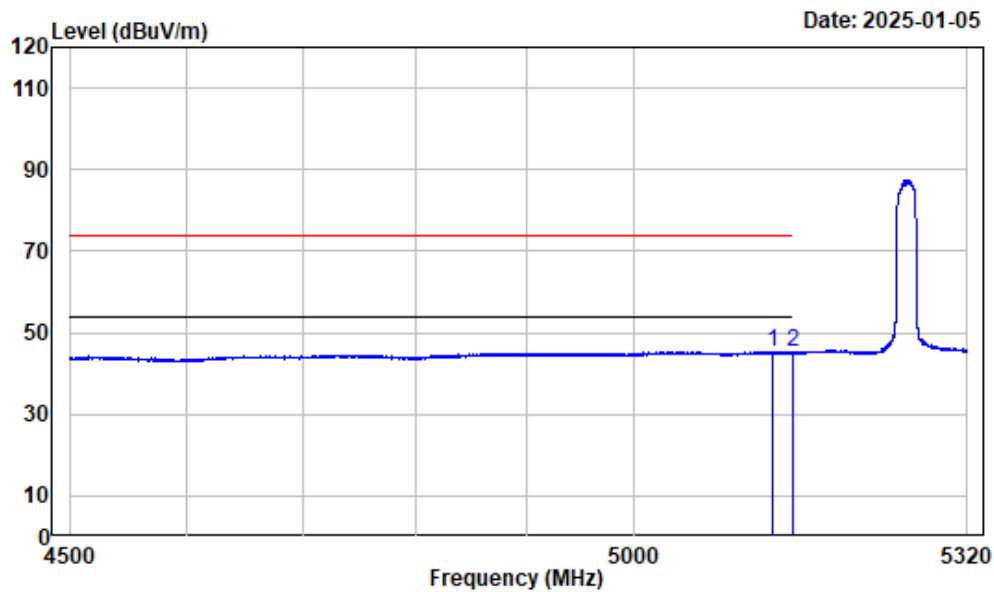

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5130.659	-7.47	52.92	45.45	54.00	-8.55	Average
2	5150.000	-7.46	52.69	45.23	54.00	-8.77	Average


Right Band edge_Horizontal_Peak_802.11ac-VHT20_5320MHz

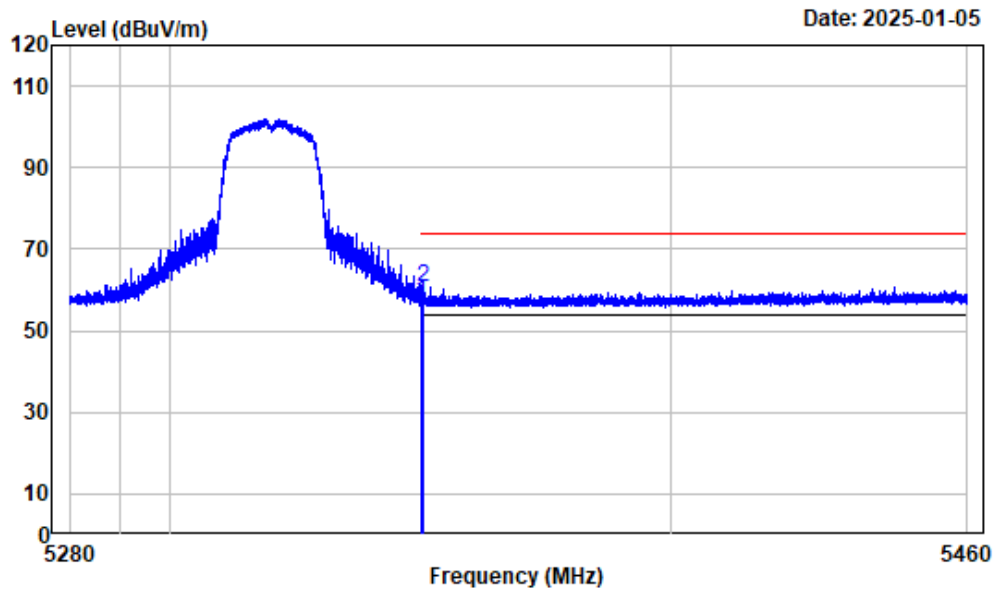

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	63.98	57.24	74.00	-16.76	Peak
2	5350.254	-6.74	67.64	60.90	74.00	-13.10	Peak


Right Band edge_Horizontal_Average_802.11ac-VHT20_5320MHz

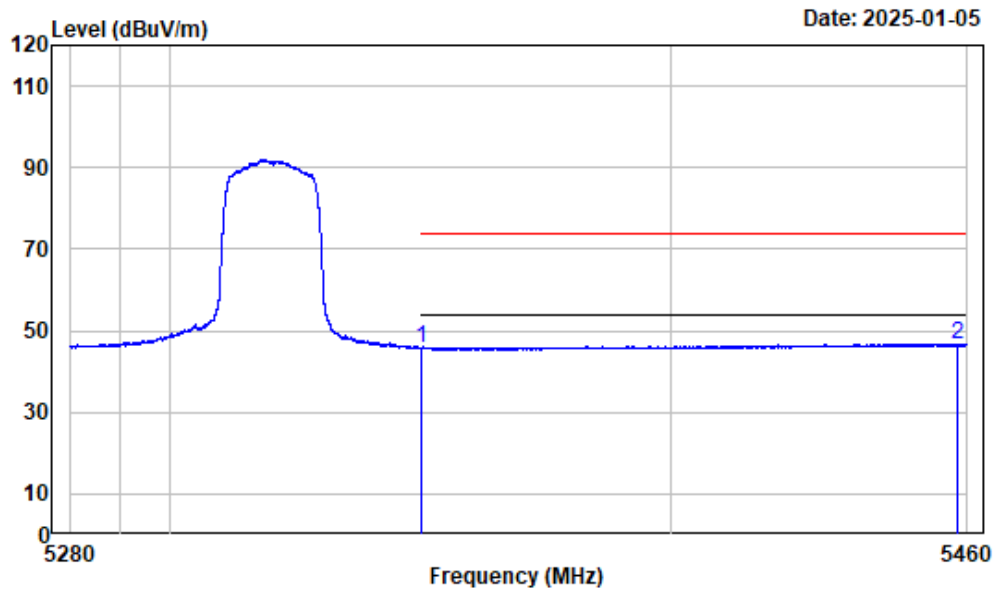

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	52.35	45.61	54.00	-8.39	Average
2	5457.975	-6.29	53.03	46.74	54.00	-7.26	Average


Right Band edge_Vertical_Peak_802.11ac-VHT20_5320MHz

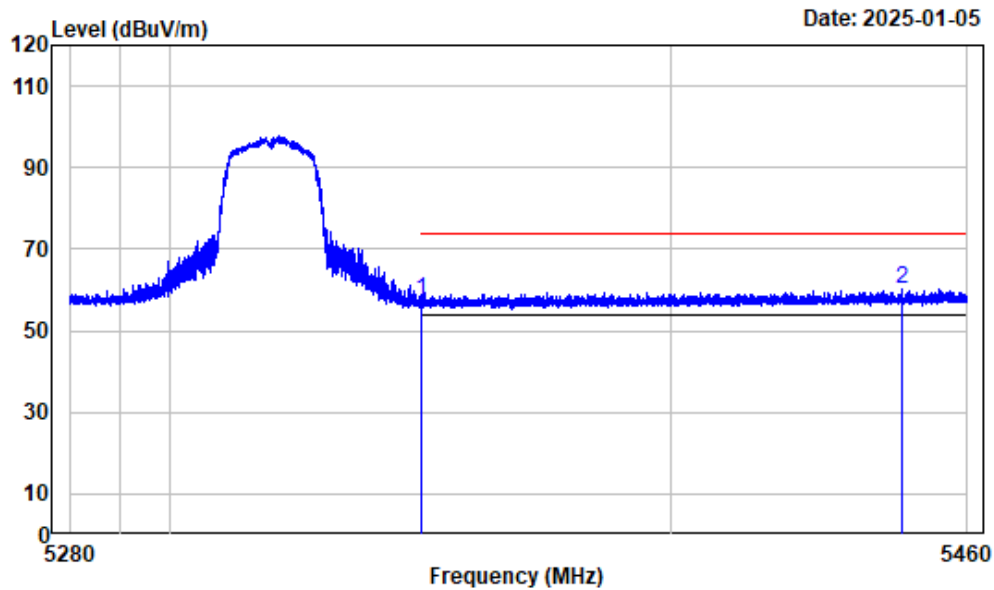

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	64.26	57.52	74.00	-16.48 Peak
2	5446.836	-6.35	66.72	60.37	74.00	-13.63 Peak


Right Band edge_Vertical_Average_802.11ac-VHT20_5320MHz

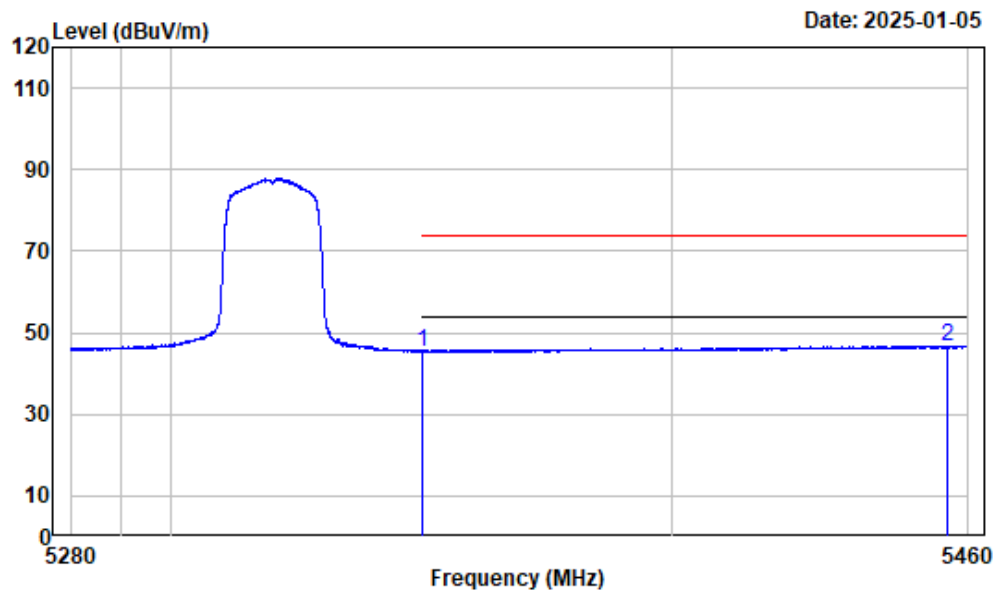

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.17	45.43	54.00	-8.57	Average
2 5455.792	-6.31	53.16	46.85	54.00	-7.15	Average


Left Band edge_Horizontal_Peak_802.11ac-VHT40_5270MHz

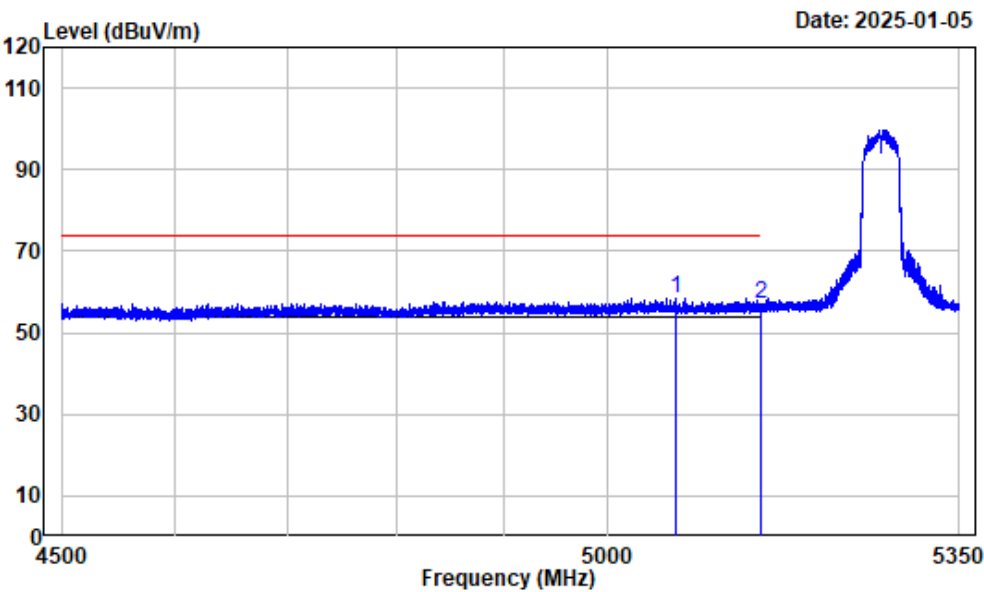

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5066.383	-7.37	65.71	58.34	74.00	-15.66	Peak
2	5150.000	-7.46	64.42	56.96	74.00	-17.04	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT40_5270MHz

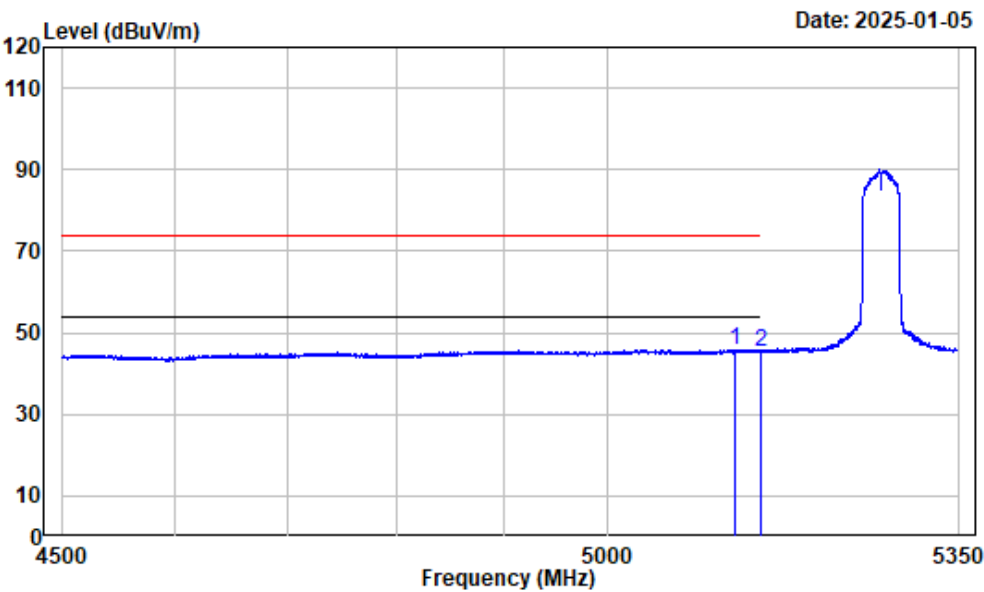

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5123.021	-7.47	53.33	45.86	54.00	-8.14 Average
2	5150.000	-7.46	52.79	45.33	54.00	-8.67 Average


Left Band edge_Vertical_Peak_802.11ac-VHT40_5270MHz

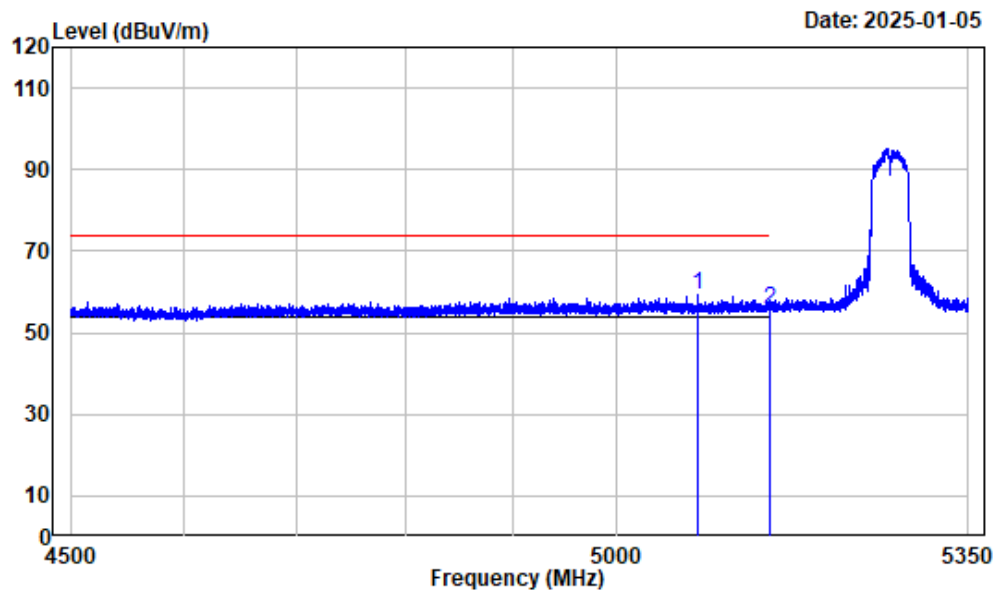

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5078.179	-7.40	66.50	59.10	74.00	-14.90	Peak
2 5150.000	-7.46	63.16	55.70	74.00	-18.30	Peak


Left Band edge_Vertical_Average_802.11ac-VHT40_5270MHz

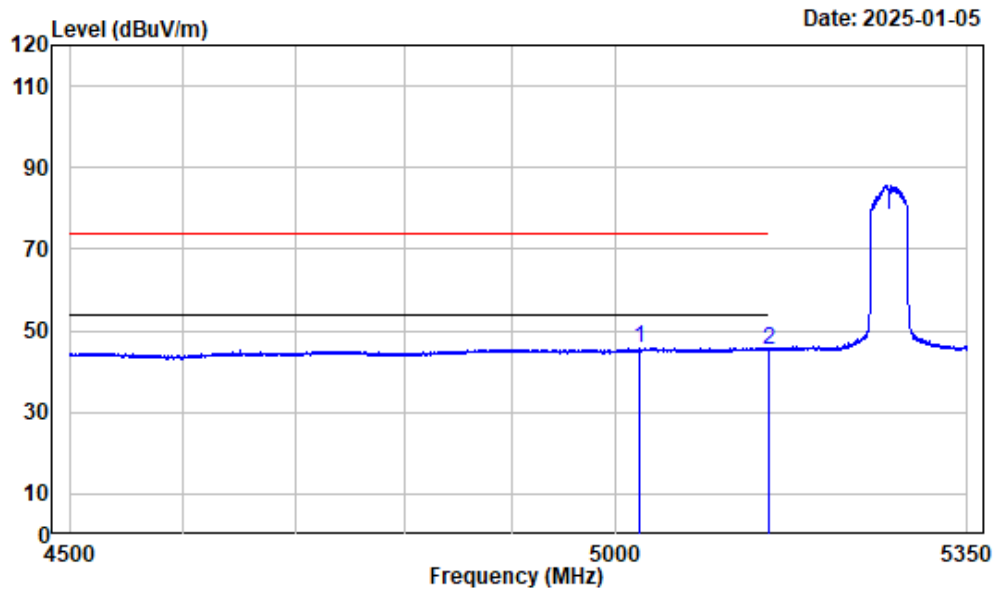

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5023.347	-7.33	53.26	45.93	54.00	-8.07	Average
2	5150.000	-7.46	52.73	45.27	54.00	-8.73	Average


Right Band edge_Horizontal_Peak_802.11ac-VHT40_5310MHz

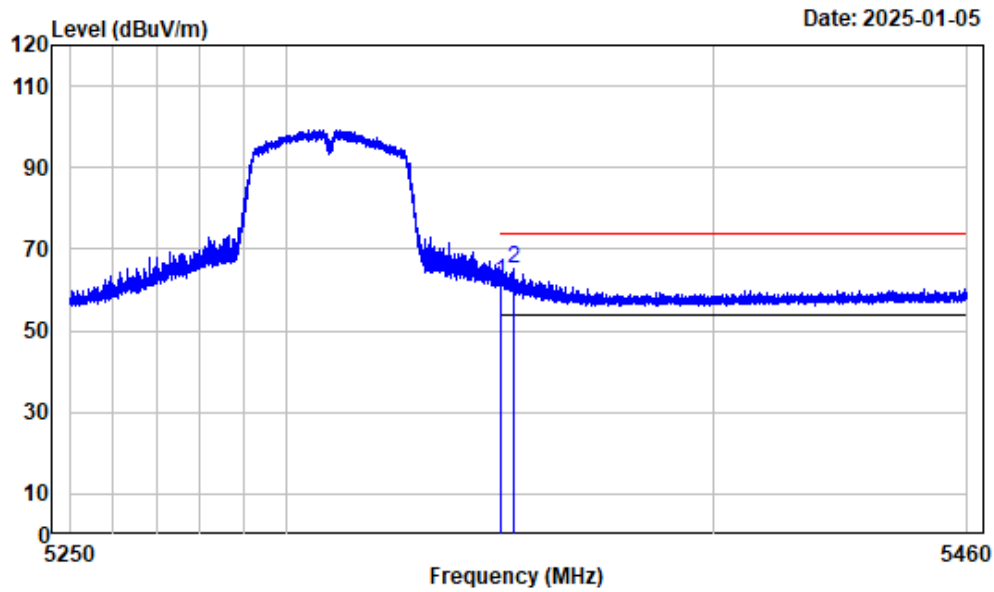

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	68.60	61.86	74.00	-12.14	Peak
2	5353.018	-6.73	71.87	65.14	74.00	-8.86	Peak


Right Band edge_Horizontal_Average_802.11ac-VHT40_5310MHz

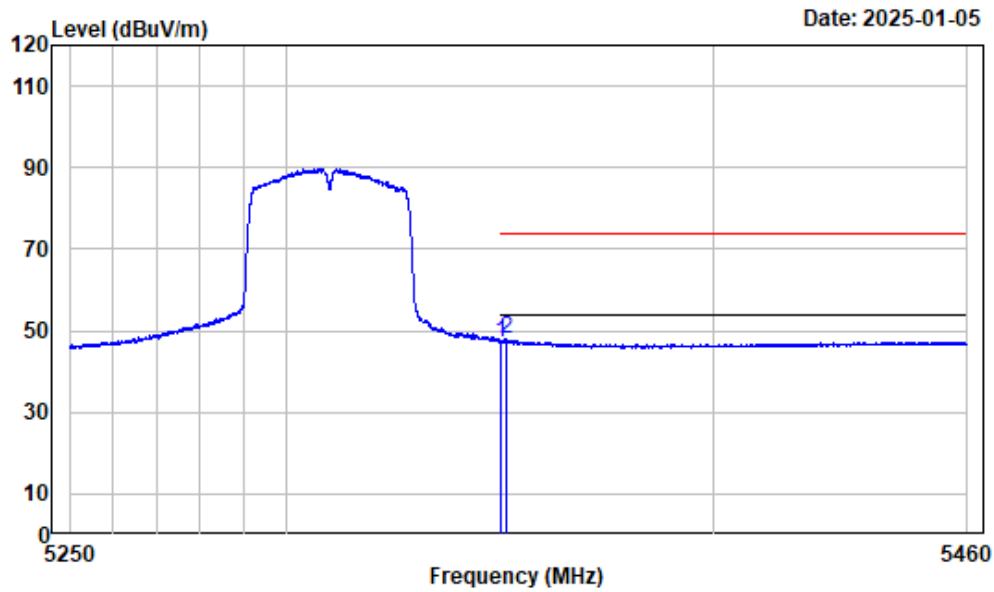

Condition : Horizontal
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
 Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	53.97	47.23	54.00	-6.77	Average
2	5350.997	-6.74	54.85	48.11	54.00	-5.89	Average


Right Band edge_Vertical_Peak_802.11ac-VHT40_5310MHz

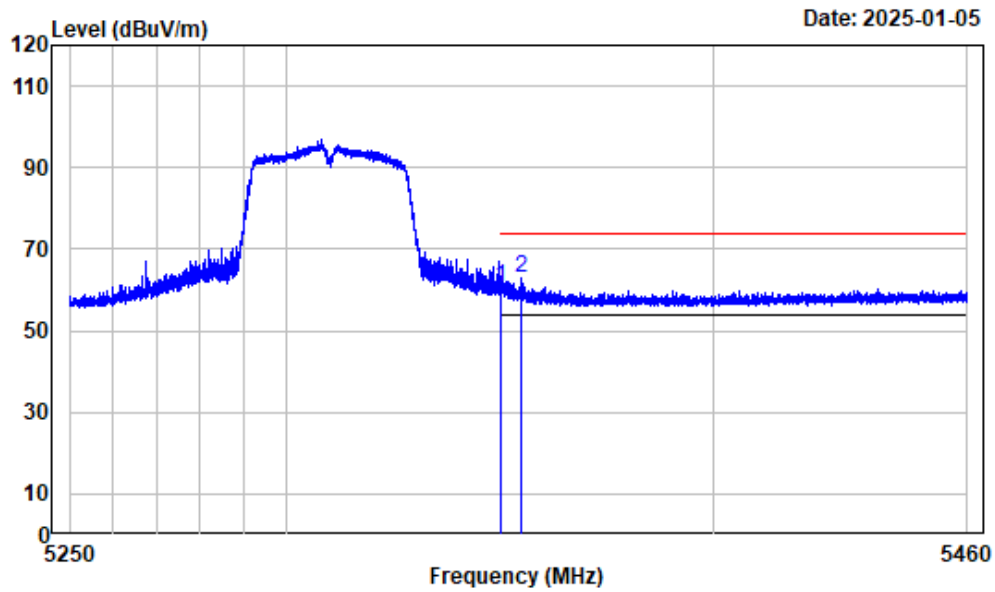

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	67.38	60.64	74.00	-13.36	Peak
2	5354.619	-6.73	69.54	62.81	74.00	-11.19	Peak


Right Band edge_Vertical_Average_802.11ac-VHT40_5310MHz

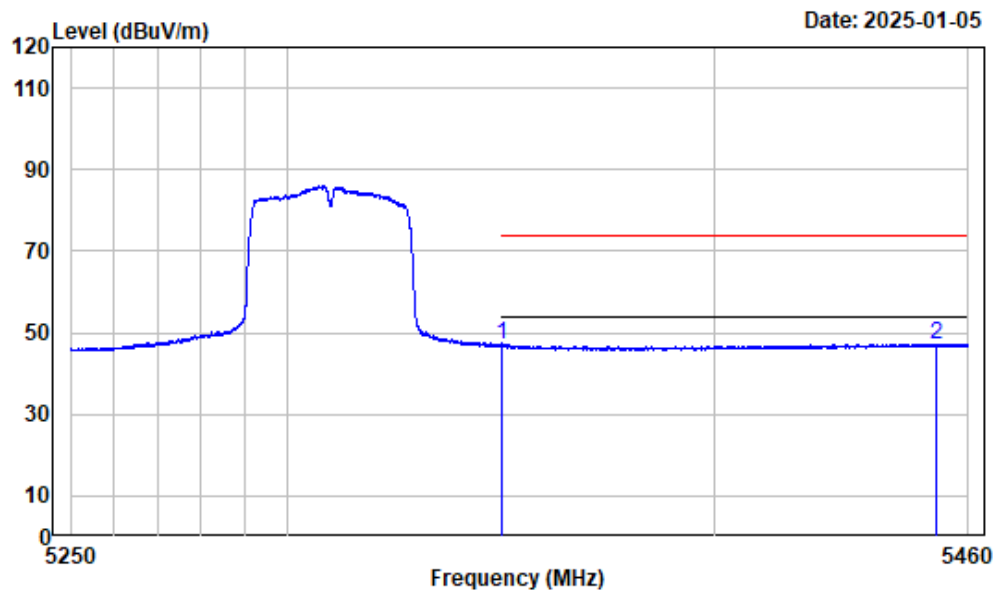

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	53.93	47.19	54.00	-6.81	Average
2 5452.544	-6.31	53.60	47.29	54.00	-6.71	Average


Left Band edge_Horizontal_Peak_802.11ac-VHT80_5290MHz

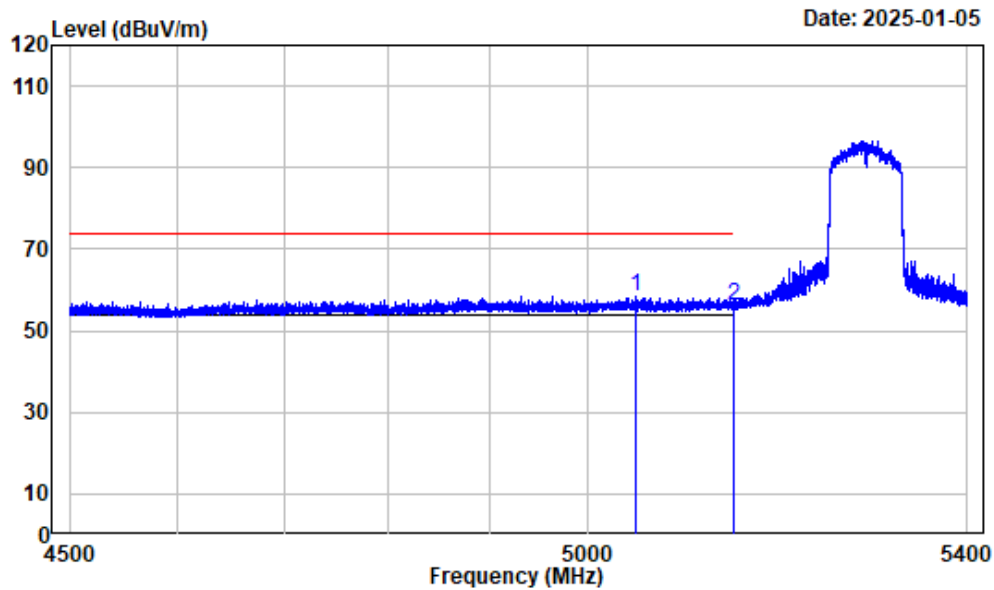

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5049.181	-7.31	65.95	58.64	74.00	-15.36	Peak
2 5150.000	-7.46	63.74	56.28	74.00	-17.72	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT80_5290MHz

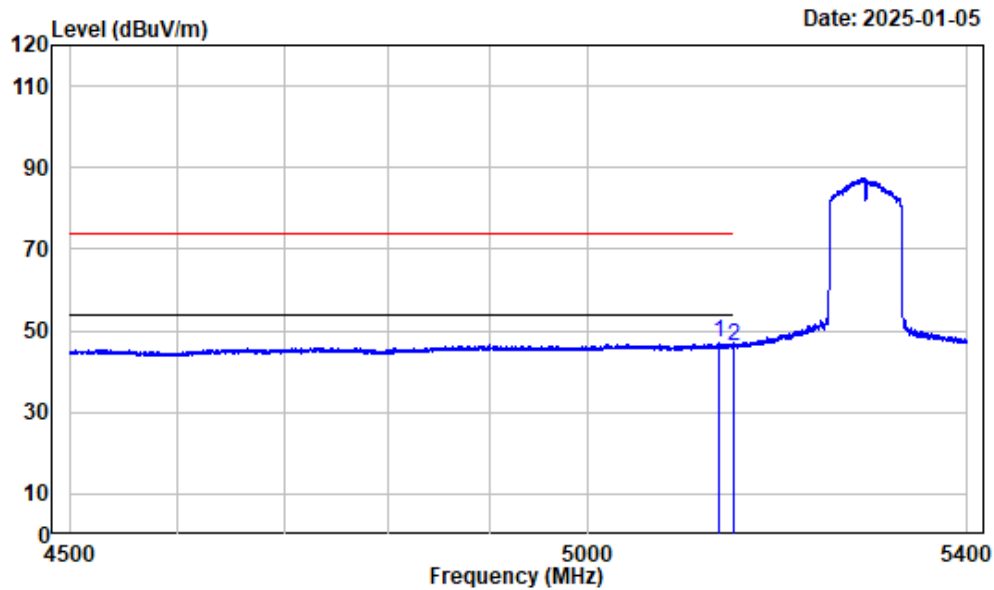

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5134.354	-7.47	54.34	46.87	54.00	-7.13	Average
2 5150.000	-7.46	53.60	46.14	54.00	-7.86	Average


Left Band edge_Vertical_Peak_802.11ac-VHT80_5290MHz

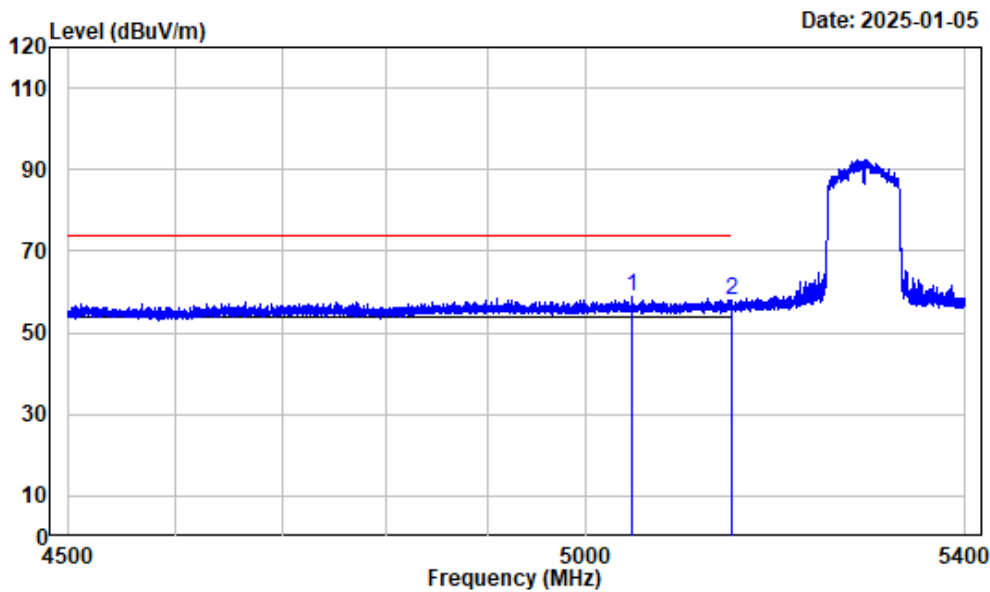

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5046.931	-7.31	66.01	58.70	74.00	-15.30	Peak
2	5150.000	-7.46	65.23	57.77	74.00	-16.23	Peak


Left Band edge_Vertical_Average_802.11ac-VHT80_5290MHz

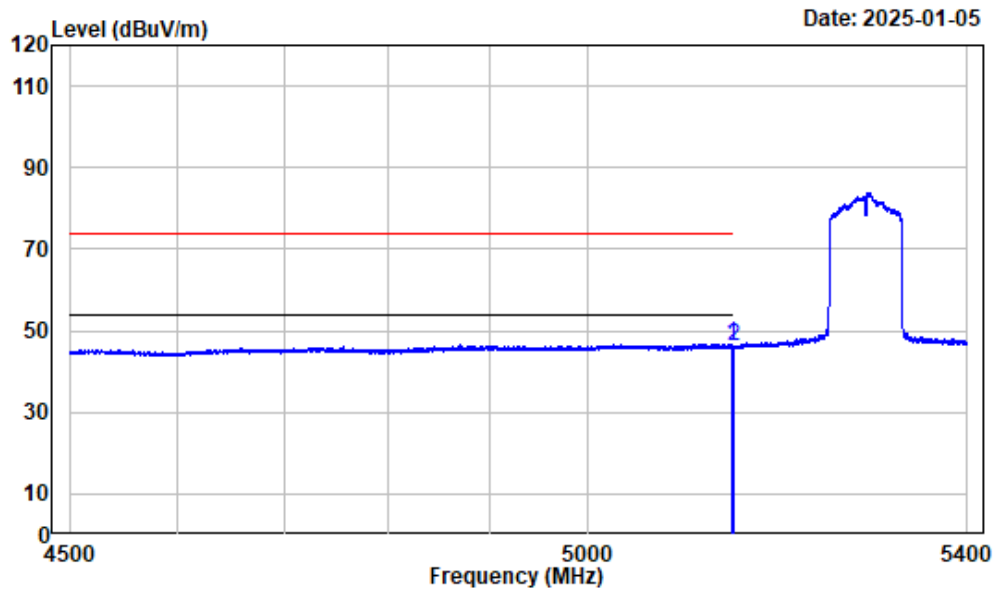

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5147.293	-7.46	54.23	46.77	54.00	-7.23	Average
2 5150.000	-7.46	53.65	46.19	54.00	-7.81	Average


Right Band edge_Horizontal_Peak_802.11ac-VHT80_5290MHz

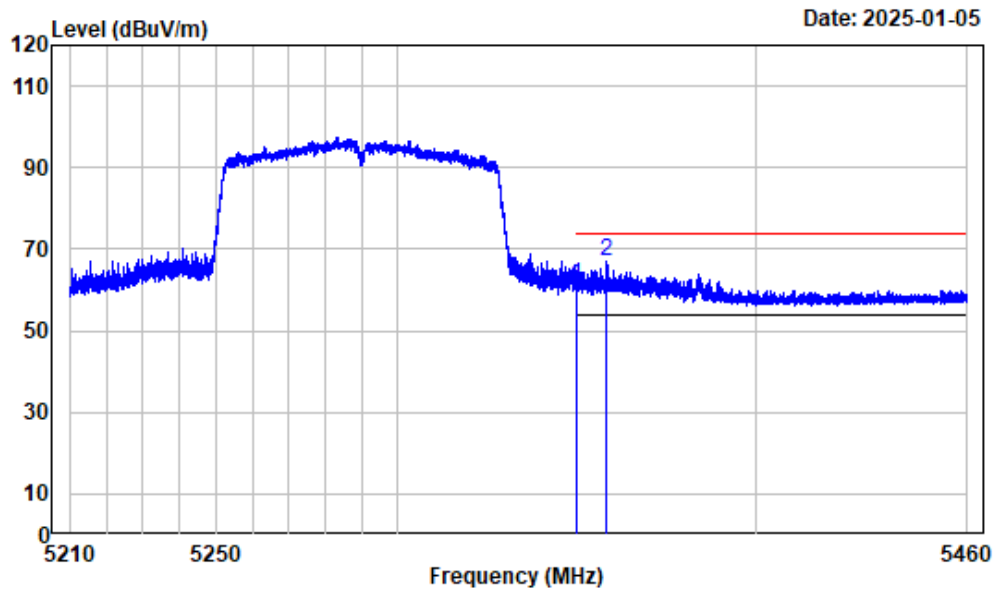

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	67.90	61.16	74.00	-12.84	Peak
2	5357.862	-6.71	73.92	67.21	74.00	-6.79	Peak


Right Band edge_Horizontal_Average_802.11ac-VHT80_5290MHz

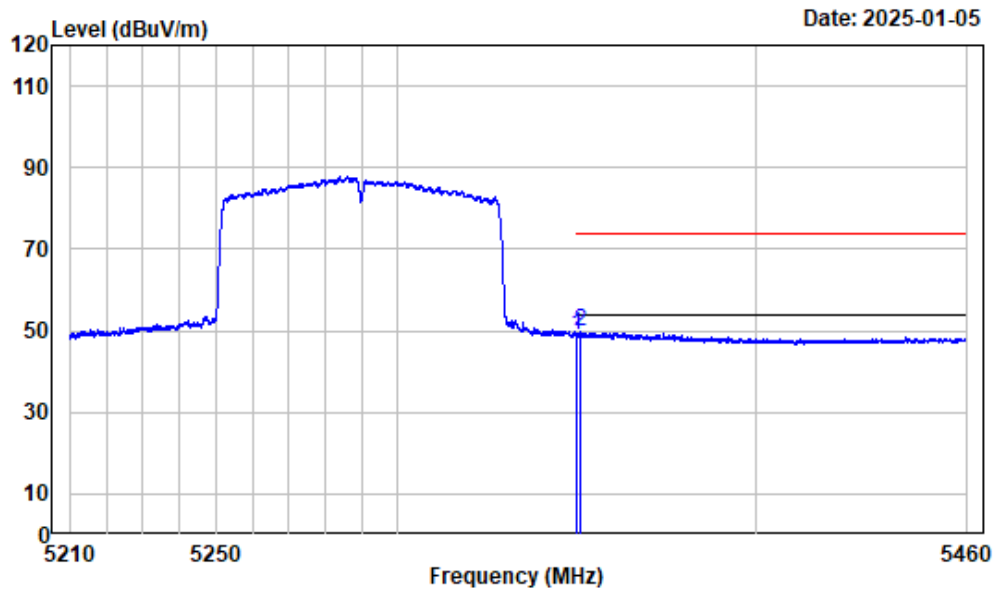

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	55.86	49.12	54.00	-4.88	Average
2 5350.861	-6.74	56.52	49.78	54.00	-4.22	Average


Right Band edge_Vertical_Peak_802.11ac-VHT80_5290MHz

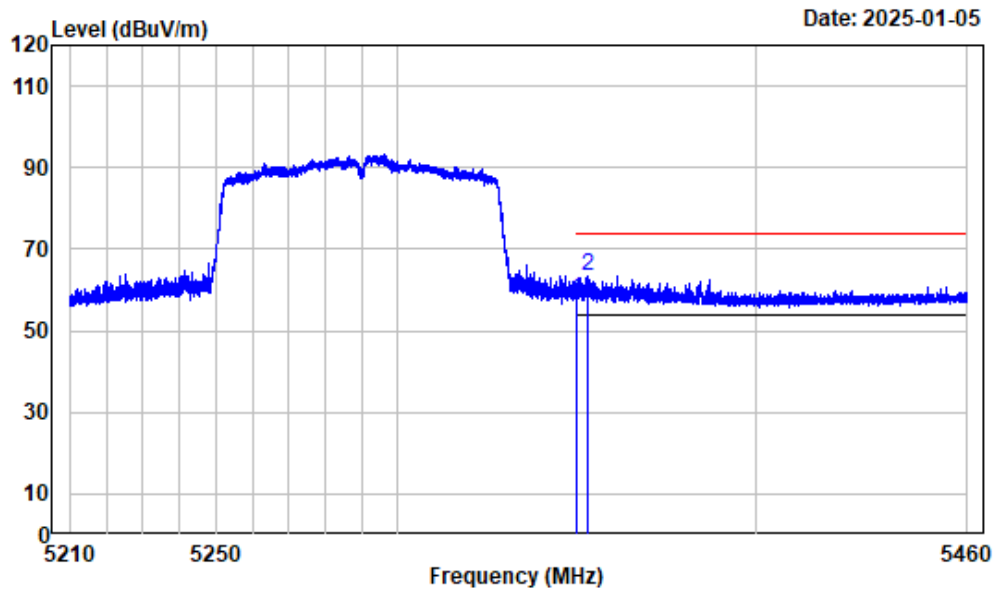

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	64.07	57.33	74.00	-16.67	Peak
2	5353.081	-6.73	69.98	63.25	74.00	-10.75	Peak


Right Band edge_Vertical_Average_802.11ac-VHT80_5290MHz

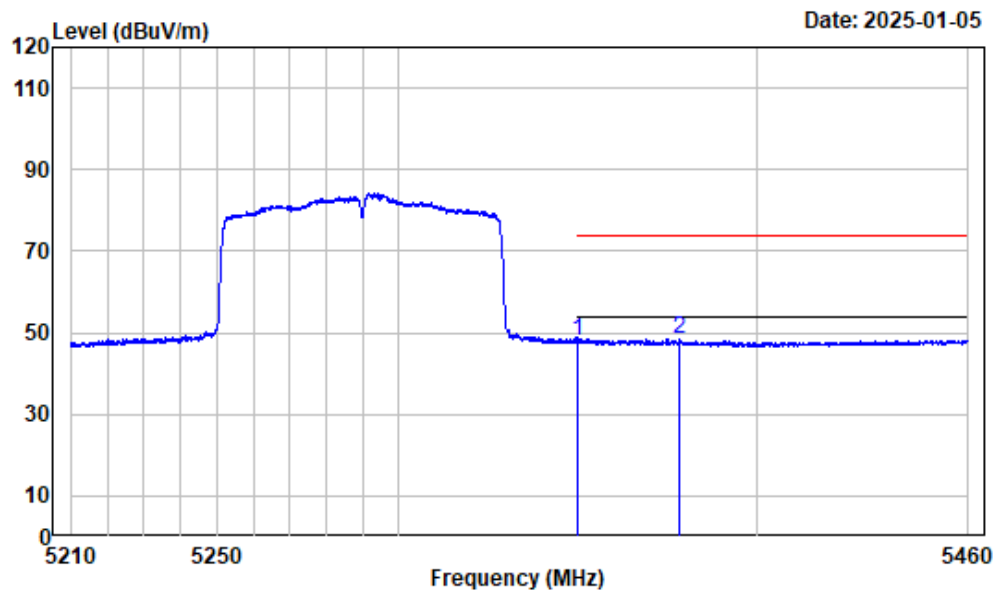

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	54.80	48.06	54.00	-5.94	Average
2 5378.365	-6.65	55.14	48.49	54.00	-5.51	Average


Left Band edge_Horizontal_Peak_802.11a_5500MHz

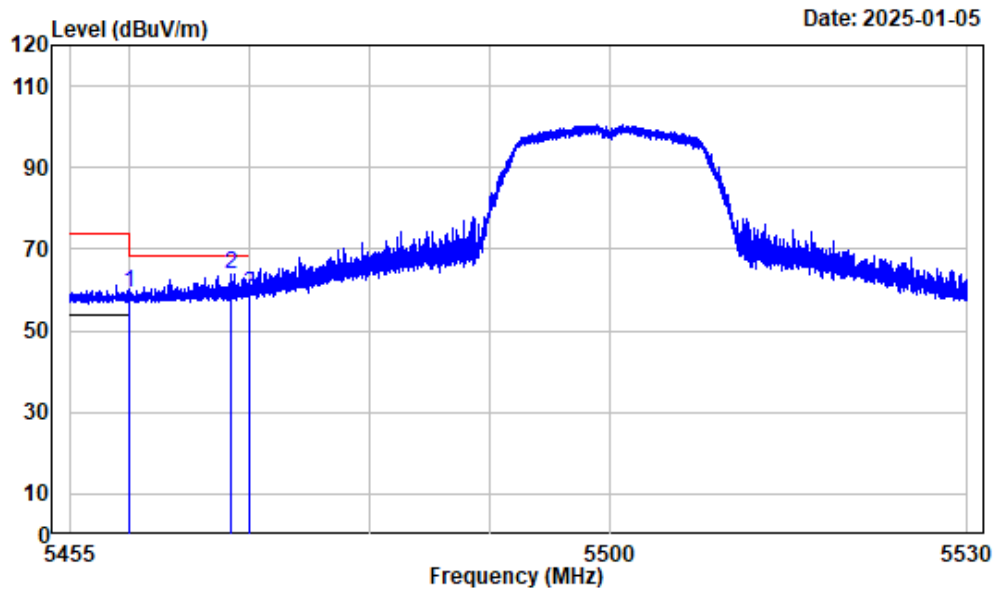

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	65.61	59.32	74.00	-14.68	Peak
2	5468.361	-6.26	70.00	63.74	68.20	-4.46	Peak
3	5470.000	-6.26	65.16	58.90	68.20	-9.30	Peak


Left Band edge_Horizontal_Average_802.11a_5500MHz

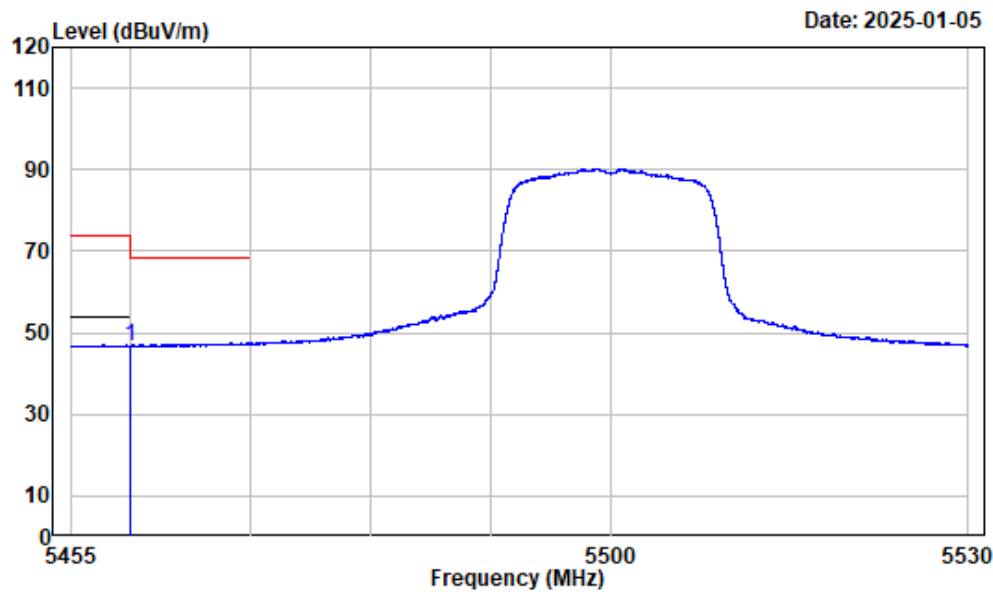

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	53.06	46.77	54.00	-7.23	Average


Left Band edge_Vertical_Peak_802.11a_5500MHz

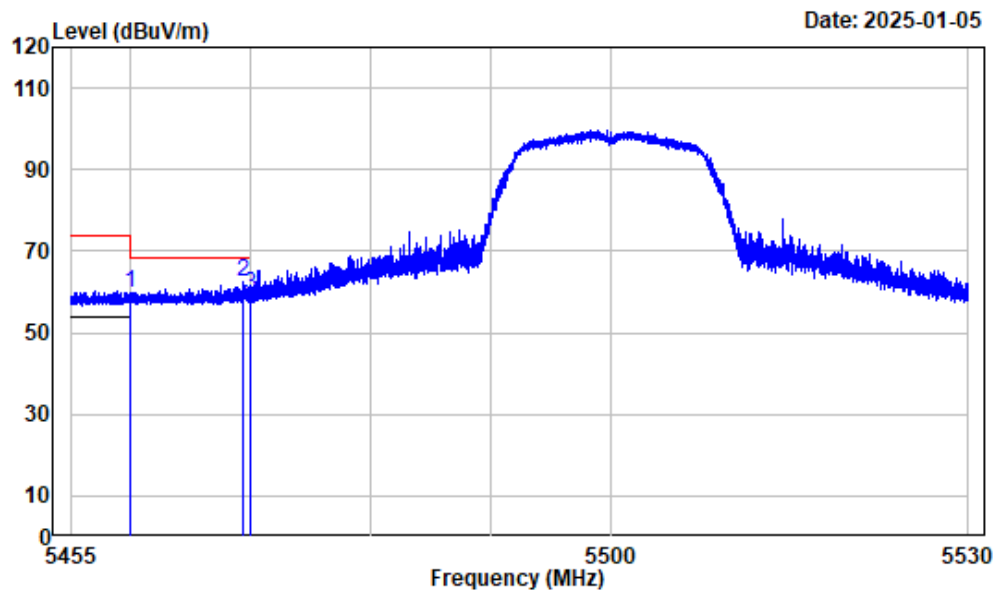

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	65.89	59.60	74.00	-14.40	Peak
2	5469.299	-6.26	68.59	62.33	68.20	-5.87	Peak
3	5470.000	-6.26	65.79	59.53	68.20	-8.67	Peak


Left Band edge_Vertical_Average_802.11a_5500MHz

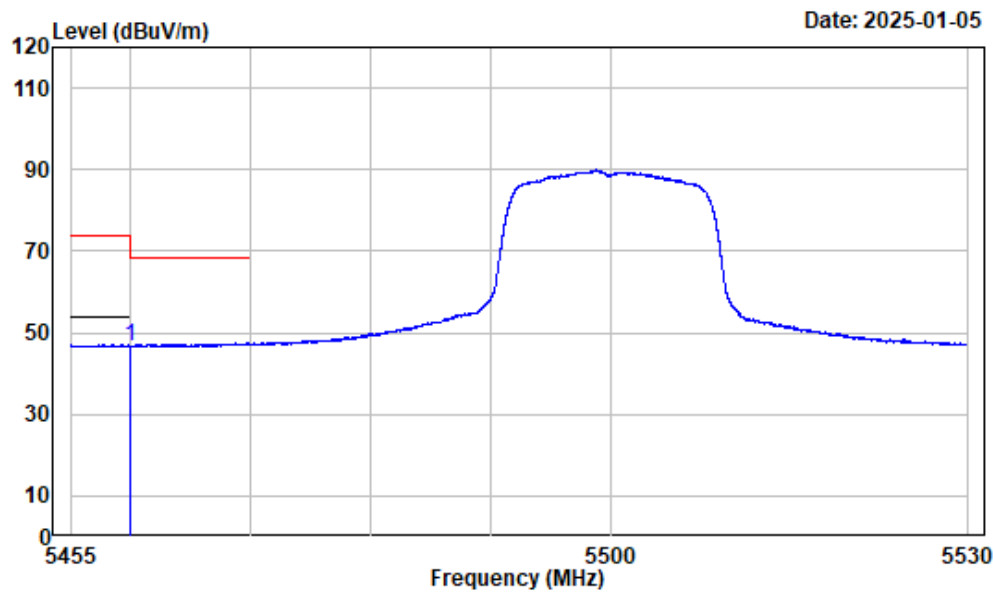

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	53.05	46.76	54.00	-7.24	Average


Right Band edge_Horizontal_802.11a_5700MHz

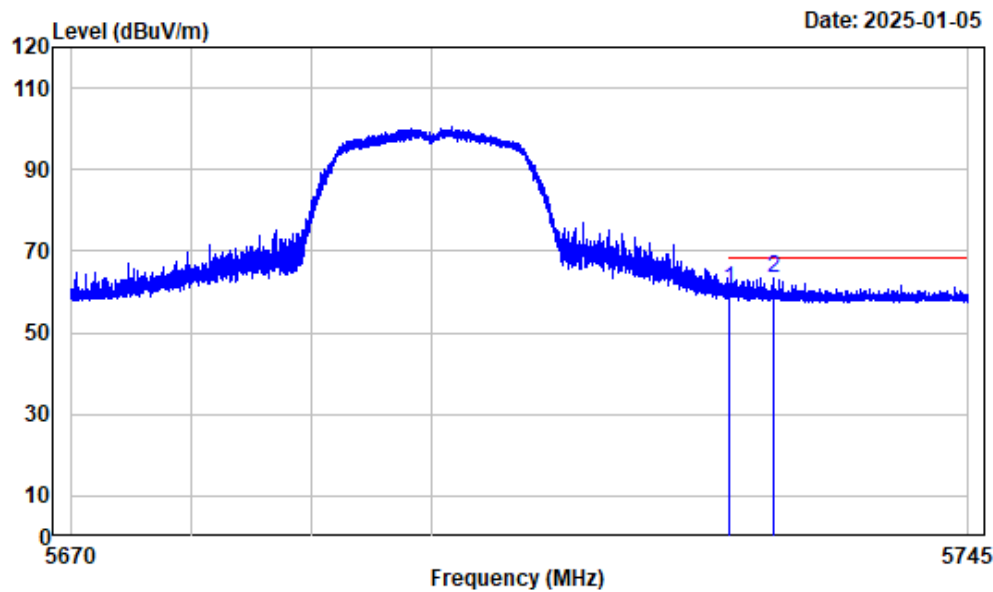

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.48	66.29	60.81	68.20	-7.39	Peak
2	5728.686	-5.44	68.94	63.50	68.20	-4.70	Peak


Right Band edge_Vertical_802.11a_5700MHz

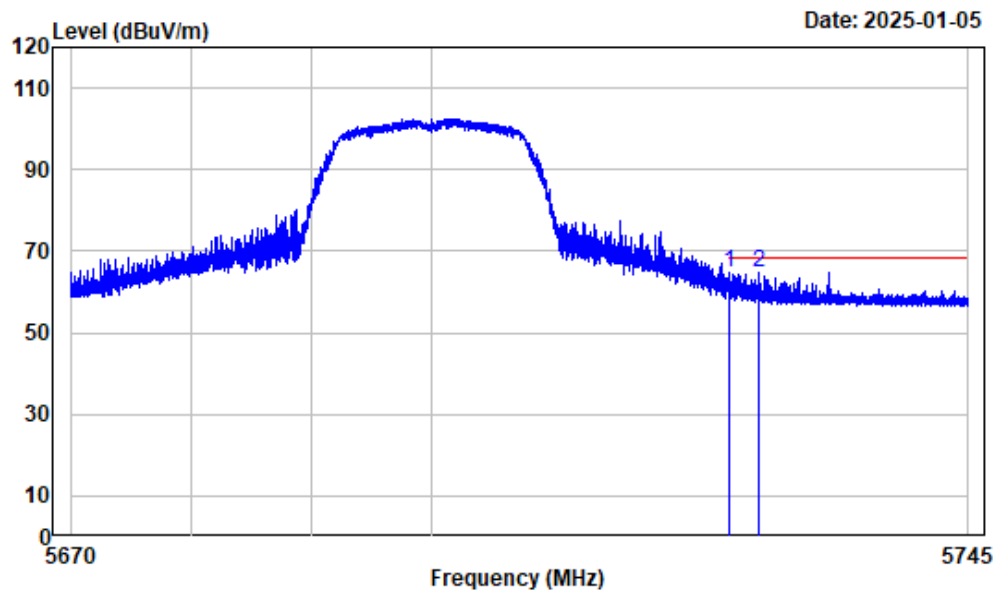

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	70.13	64.65	68.20	-3.55	Peak
2 5727.419	-5.47	70.41	64.94	68.20	-3.26	Peak


Left Band edge_Horizontal_Peak_802.11ac-VHT20_5500MHz

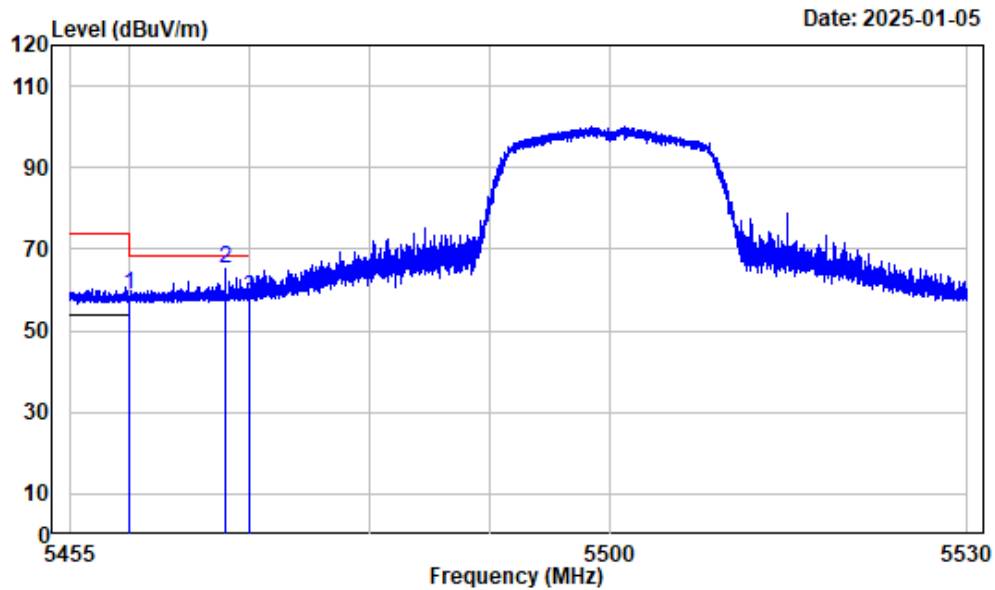

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	65.31	59.02	74.00	-14.98	Peak
2	5467.949	-6.26	71.36	65.10	68.20	-3.10	Peak
3	5470.000	-6.26	64.42	58.16	68.20	-10.04	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT20_5500MHz

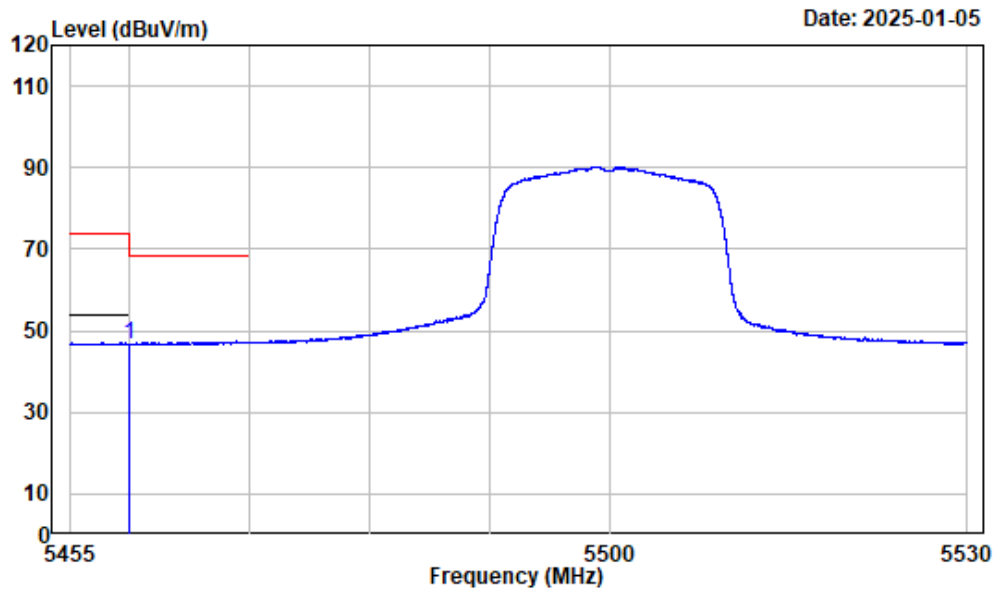

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	52.97	46.68	54.00	-7.32	Average


Left Band edge_Vertical_Peak_802.11ac-VHT20_5500MHz

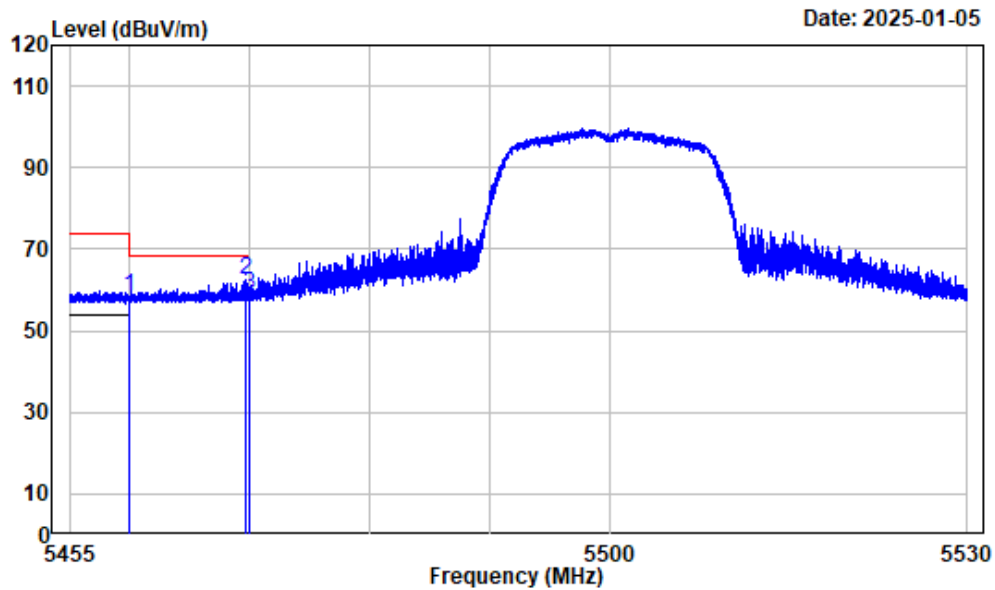

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	64.65	58.36	74.00	-15.64	Peak
2	5469.580	-6.26	68.74	62.48	68.20	-5.72	Peak
3	5470.000	-6.26	65.10	58.84	68.20	-9.36	Peak


Left Band edge_Vertical_Average_802.11ac-VHT20_5500MHz

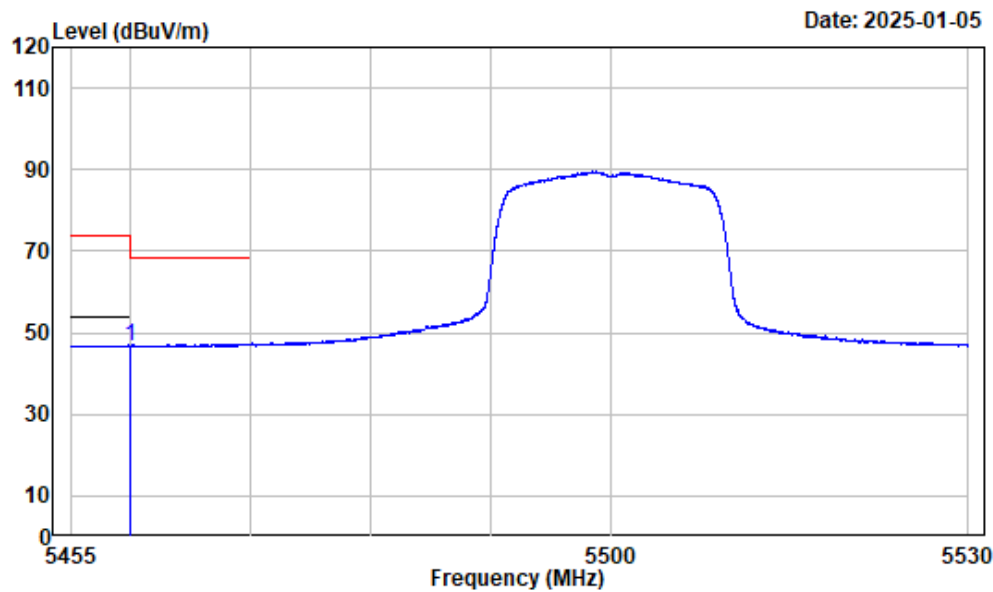

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	52.91	46.62	54.00	-7.38	Average


Right Band edge_Horizontal_802.11ac-VHT20_5700MHz

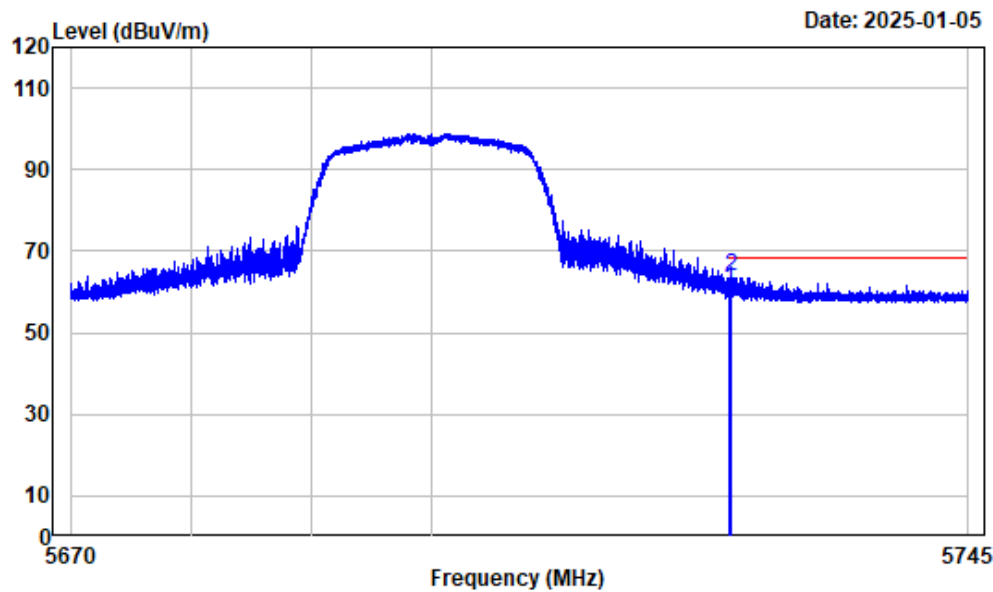

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.48	66.04	60.56	68.20	-7.64 Peak
2	5725.085	-5.48	69.44	63.96	68.20	-4.24 Peak


Right Band edge_Vertical_802.11ac-VHT20_5700MHz

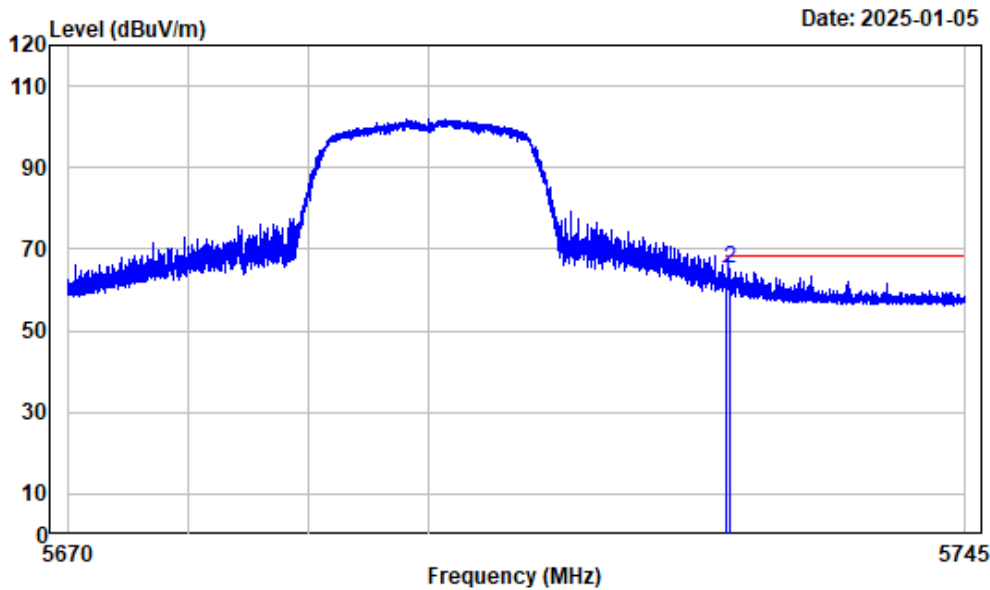

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	68.19	62.71	68.20	-5.49	Peak
2 5725.216	-5.48	70.58	65.10	68.20	-3.10	Peak


Left Band edge_Horizontal_Peak_802.11ac-VHT40_5510MHz

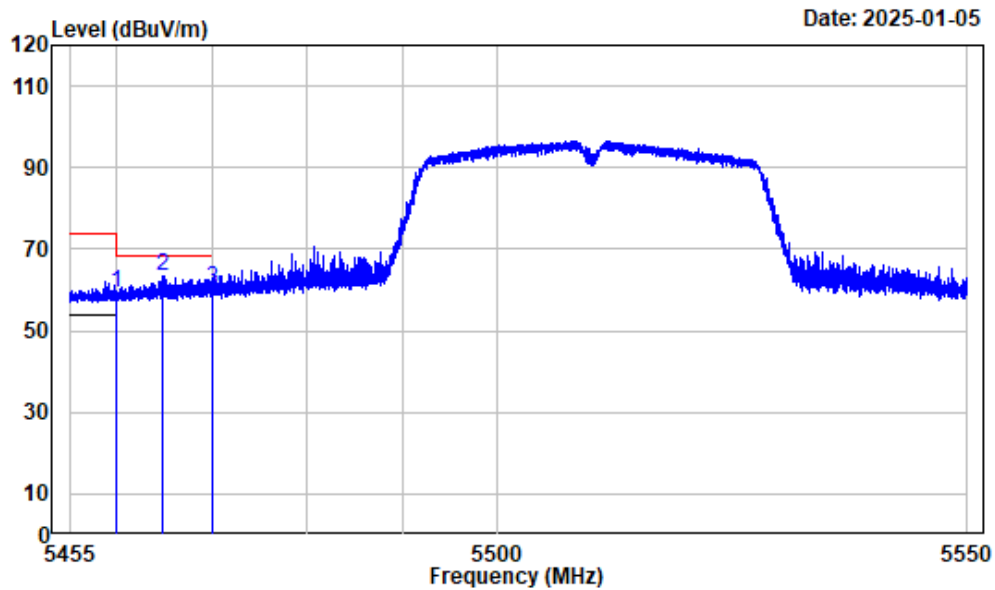

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	65.52	59.23	74.00	-14.77	Peak
2	5464.739	-6.28	69.76	63.48	68.20	-4.72	Peak
3	5470.000	-6.26	66.39	60.13	68.20	-8.07	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT40_5510MHz

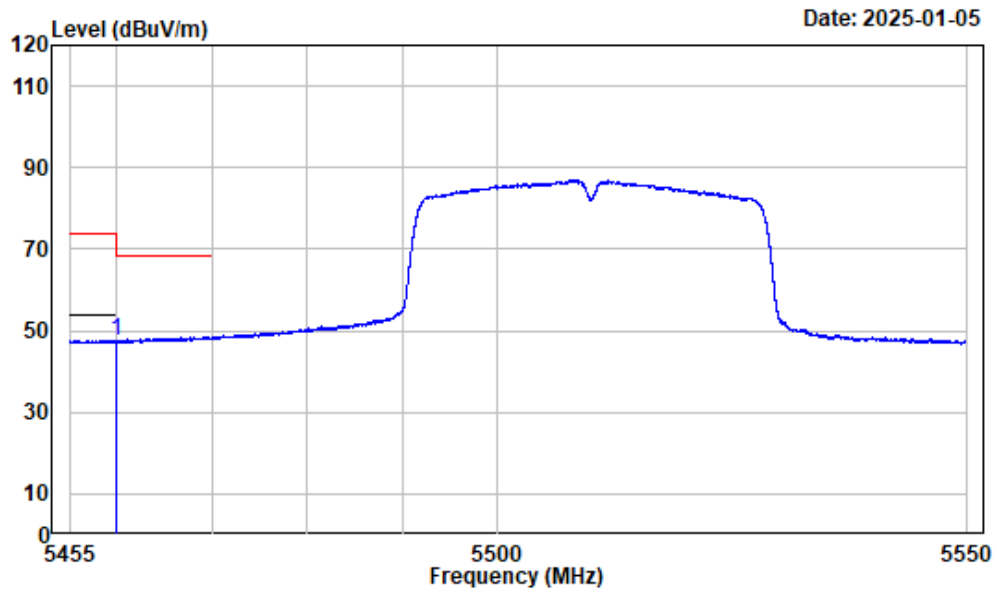

Condition : Horizontal
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
 Note : 5GWiFi-Band3-AC40-5510

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	53.68	47.39	54.00	-6.61	Average


Left Band edge_Vertical_Peak_802.11ac-VHT40_5510MHz

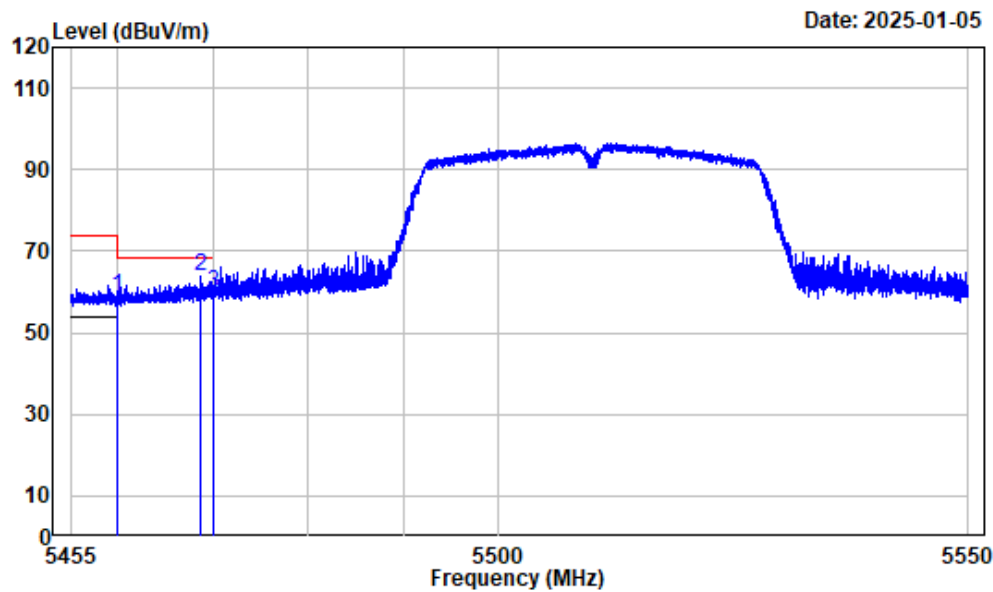

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	64.98	58.69	74.00	-15.31	Peak
2 5468.599	-6.26	70.05	63.79	68.20	-4.41	Peak
3 5470.000	-6.26	65.98	59.72	68.20	-8.48	Peak


Left Band edge_Vertical_Average_802.11ac-VHT40_5510MHz

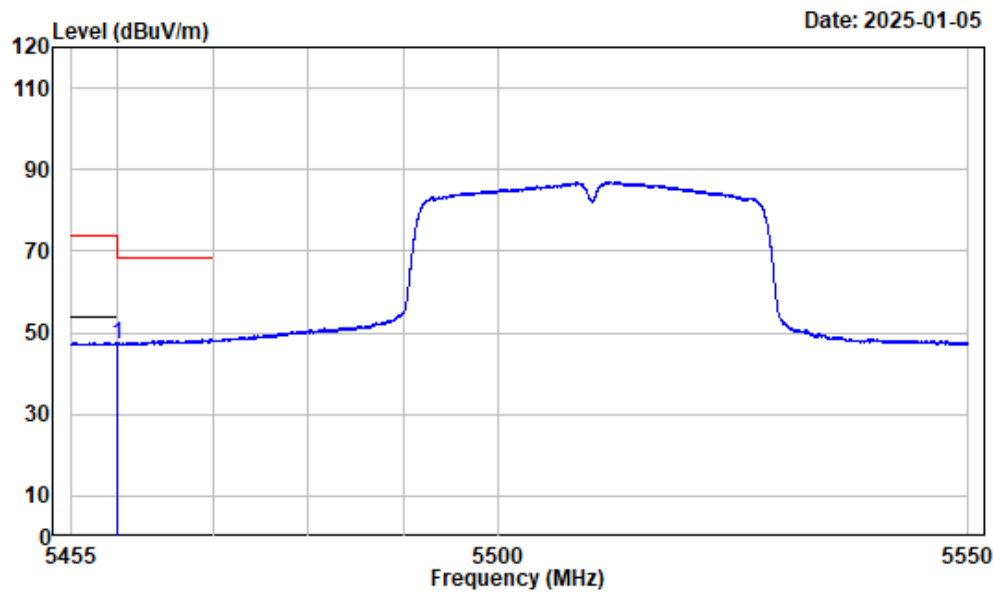

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	53.60	47.31	54.00	-6.69	Average


Right Band edge_Horizontal_802.11ac-VHT40_5670MHz

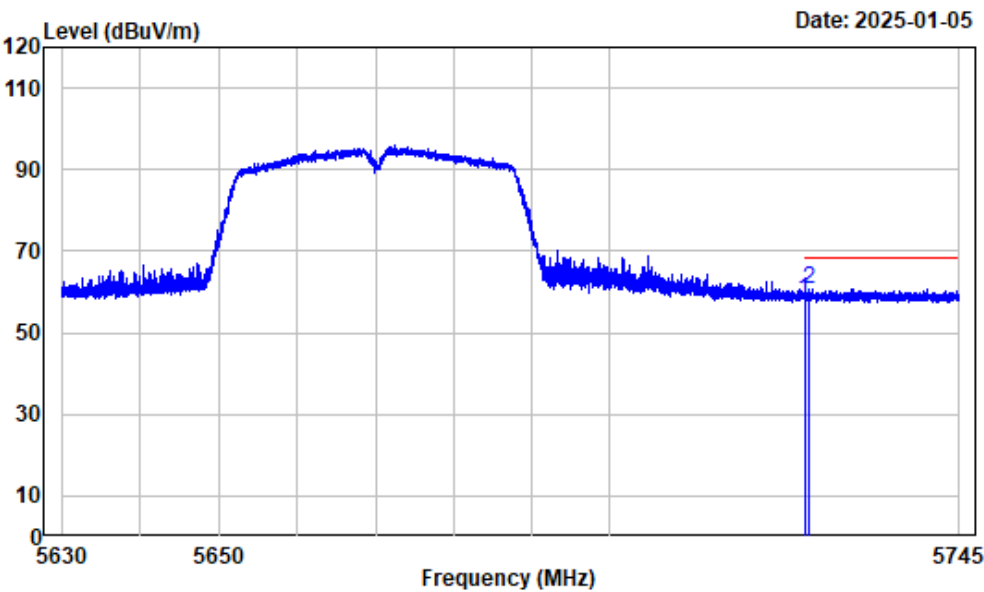

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	63.42	57.94	68.20	-10.26	Peak
2 5725.520	-5.48	66.00	60.52	68.20	-7.68	Peak


Right Band edge_Vertical_802.11ac-VHT40_5670MHz

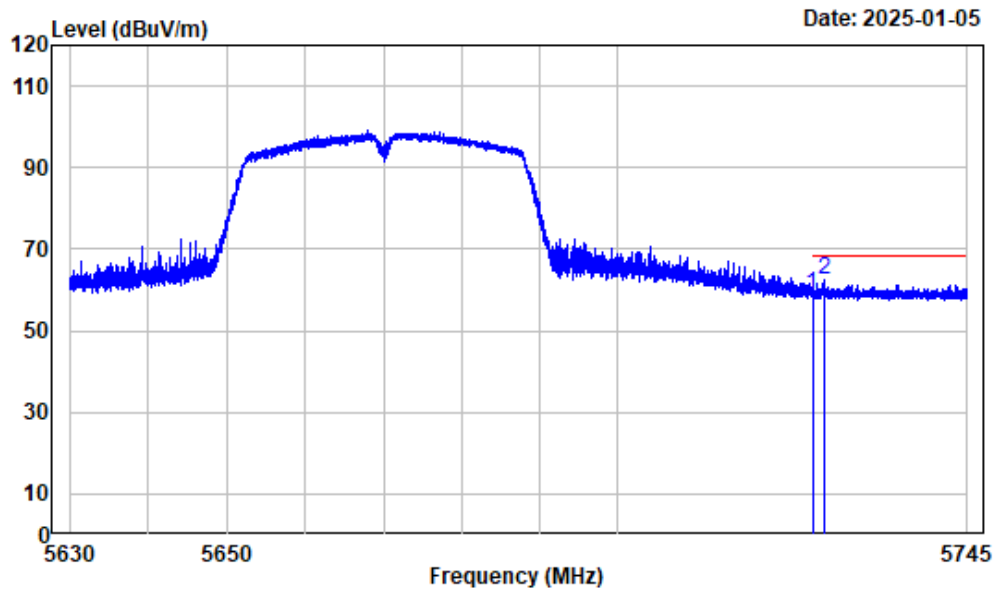

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	64.17	58.69	68.20	-9.51	Peak
2 5726.439	-5.48	67.95	62.47	68.20	-5.73	Peak


Left Band edge_Horizontal_Peak_802.11ac-VHT80_5530MHz

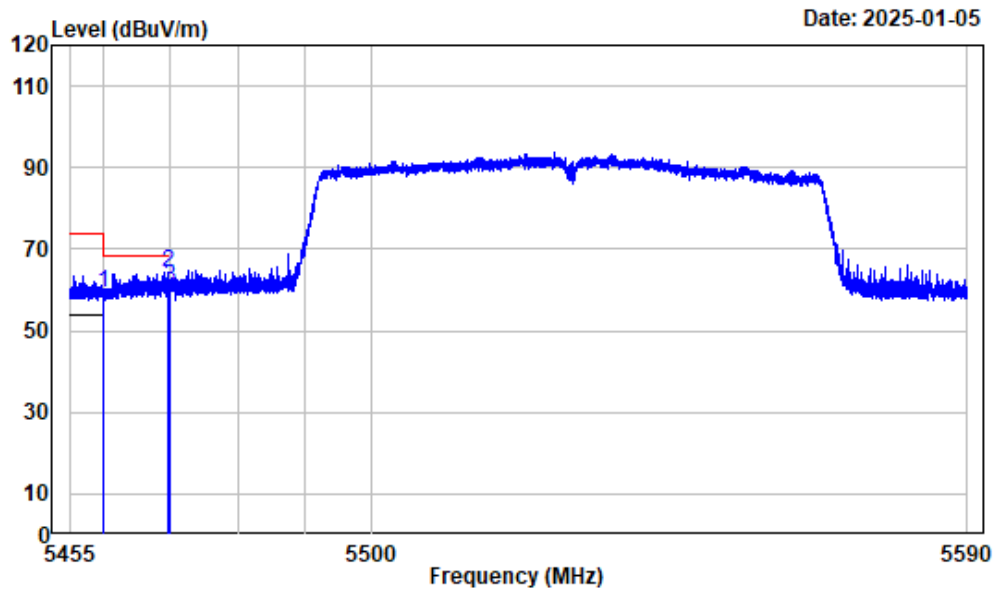

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	65.74	59.45	74.00	-14.55	Peak
2	5469.750	-6.26	70.46	64.20	68.20	-4.00	Peak
3	5470.000	-6.26	66.97	60.71	68.20	-7.49	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT80_5530MHz

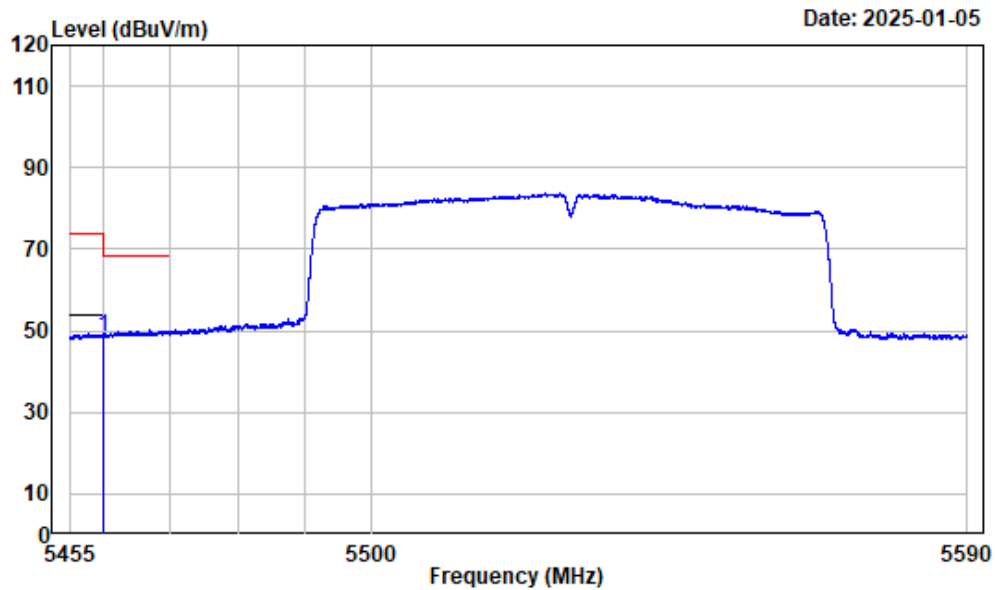

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	54.83	48.54	54.00	-5.46	Average


Left Band edge_Vertical_Peak_802.11ac-VHT80_5530MHz

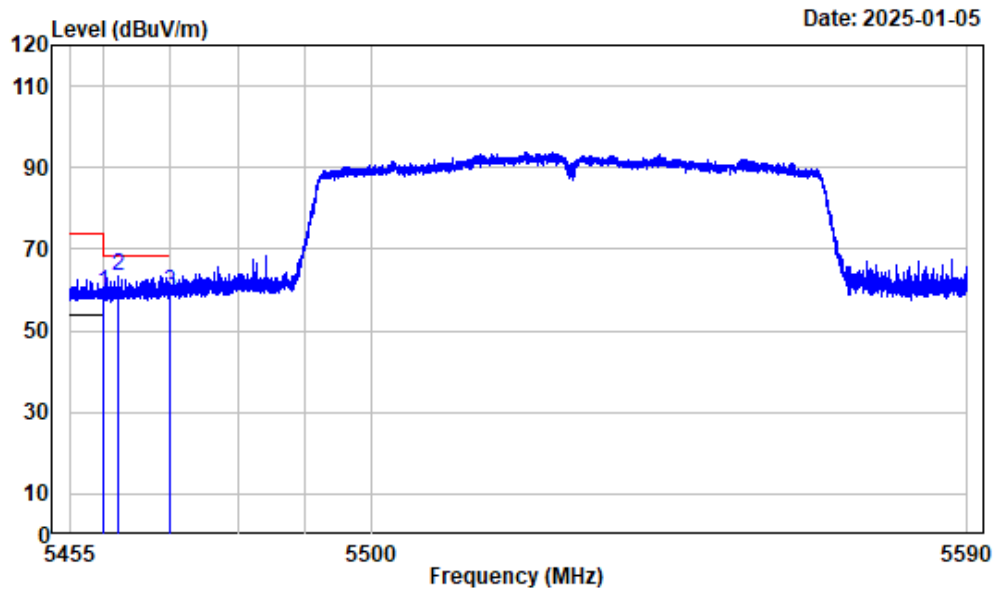

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	65.41	59.12	74.00	-14.88	Peak
2	5462.105	-6.29	69.90	63.61	68.20	-4.59	Peak
3	5470.000	-6.26	65.78	59.52	68.20	-8.68	Peak


Left Band edge_Vertical_Average_802.11ac-VHT80_5530MHz

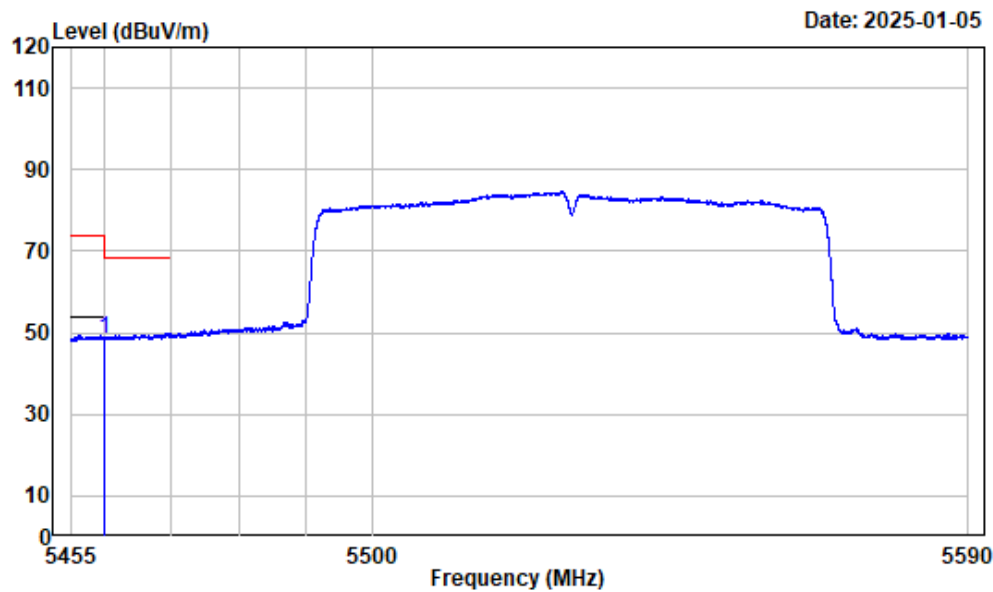

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	54.70	48.41	54.00	-5.59	Average


Right Band edge_Horizontal_802.11ac-VHT80_5610MHz

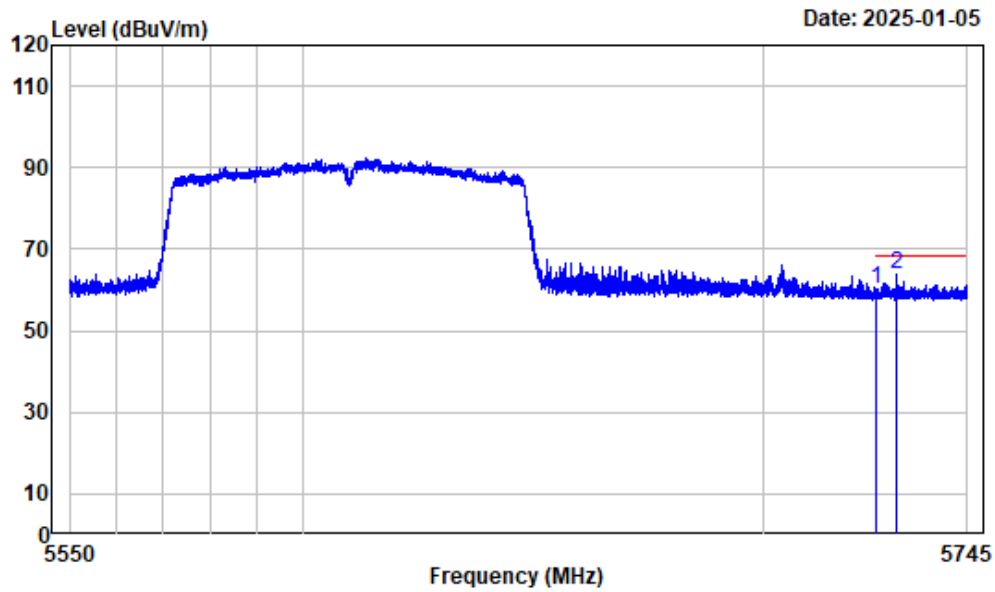

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5610

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	65.77	60.29	68.20	-7.91	Peak
2 5729.544	-5.44	69.29	63.85	68.20	-4.35	Peak


Right Band edge_Vertical_802.11ac-VHT80_5610MHz

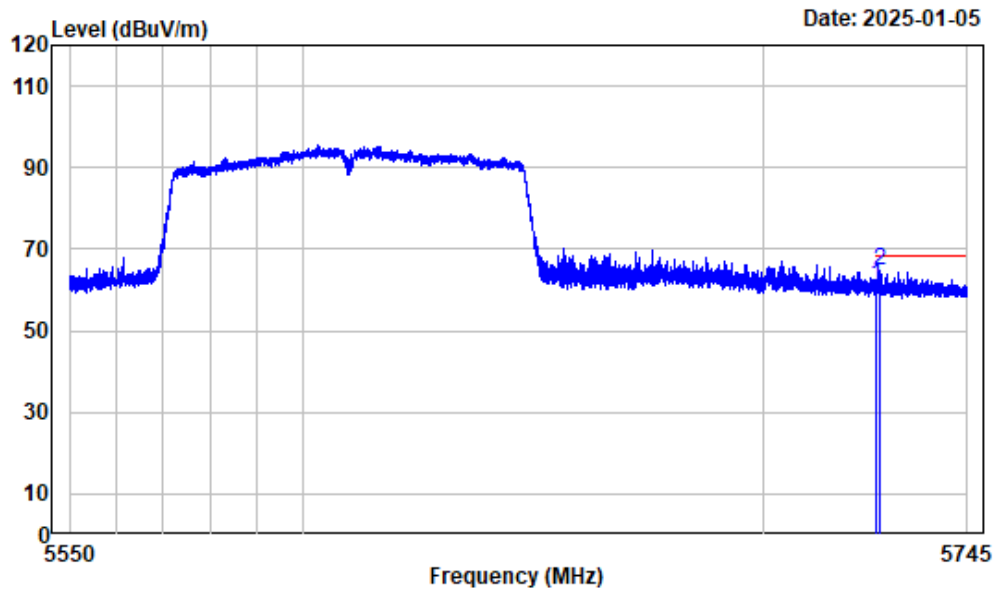

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5610

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.48	66.70	61.22	68.20	-6.98 Peak
2	5725.912	-5.48	70.36	64.88	68.20	-3.32 Peak


Left Band edge_Horizontal_802.11a_5745MHz

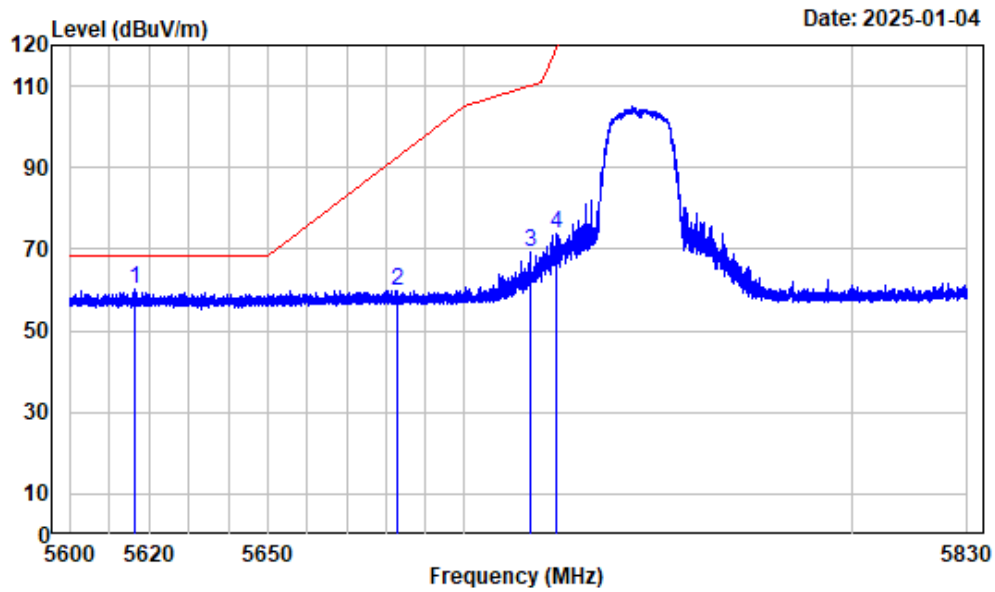

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_A_5745

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5616.447	-6.10	66.11	60.01	68.20	-8.19	peak
2	5682.753	-5.77	65.71	59.94	92.47	-32.53	peak
3	5716.970	-5.56	74.96	69.40	109.95	-40.55	peak
4	5723.353	-5.49	79.41	73.92	118.45	-44.53	peak


Left Band edge_Vertical_802.11a_5745MHz

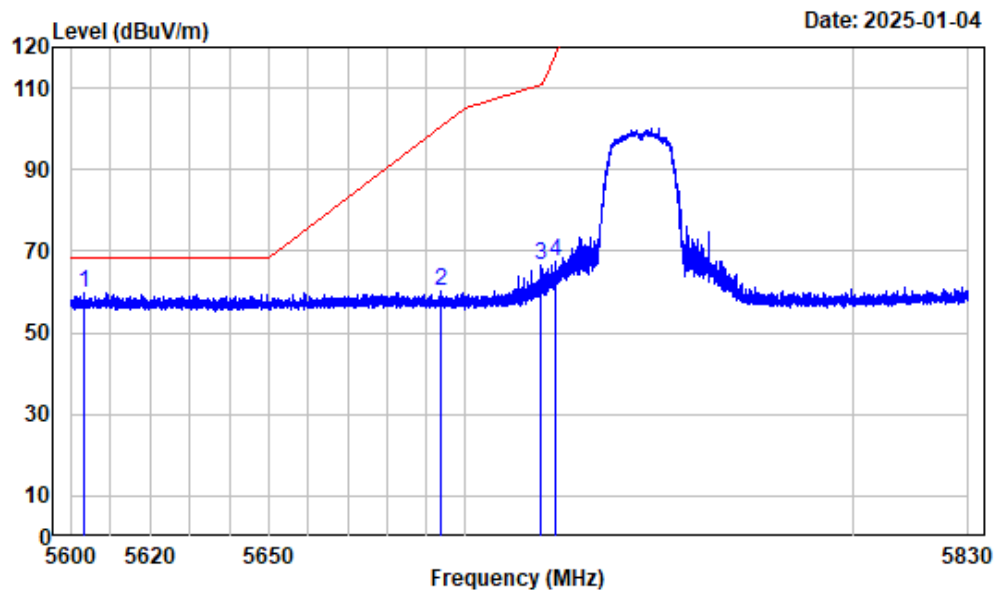

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_A_5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5603.565	-6.19	65.94	59.75	68.20	-8.45	peak
2	5693.880	-5.73	65.84	60.11	100.69	-40.58	peak
3	5719.184	-5.54	71.93	66.39	110.57	-44.18	peak
4	5723.037	-5.50	72.75	67.25	117.72	-50.47	peak


Right Band edge_Horizontal_802.11a_5825MHz

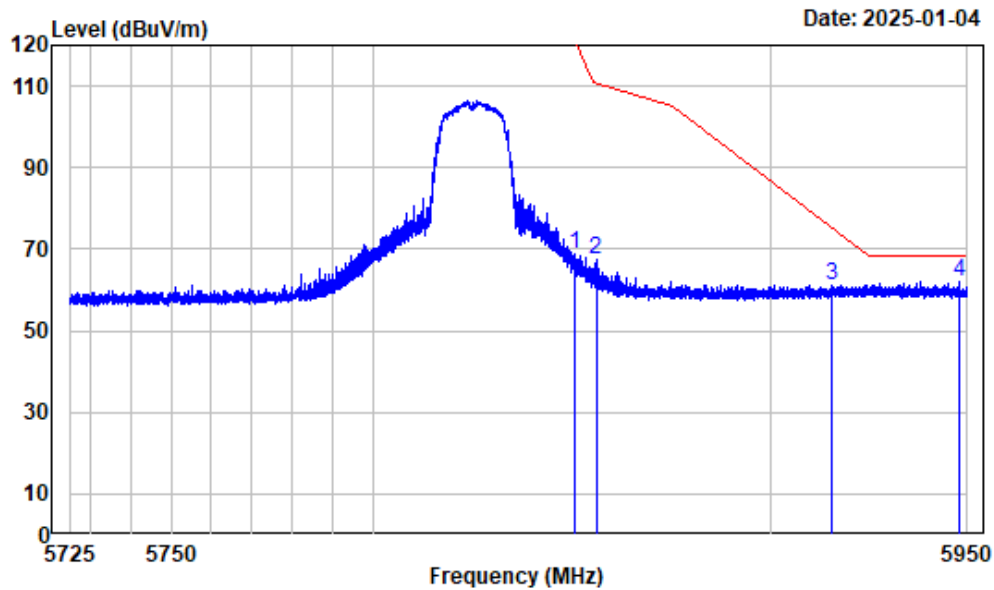

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_A_5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.650	-4.68	73.43	68.75	120.72	-51.97	peak
2	5855.910	-4.66	71.92	67.26	110.54	-43.28	peak
3	5915.711	-4.46	65.67	61.21	75.05	-13.84	peak
4	5947.975	-4.45	66.41	61.96	68.20	-6.24	peak


Right Band edge_Vertical_802.11a_5825MHz

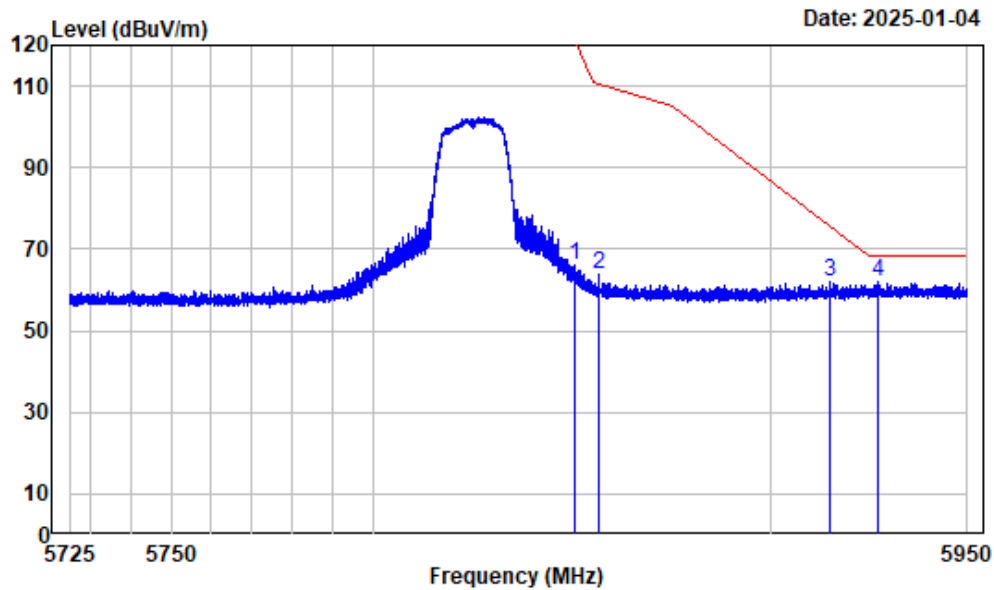

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_A_5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.425	-4.68	70.75	66.07	121.23	-55.16	peak
2	5856.669	-4.65	68.39	63.74	110.33	-46.59	peak
3	5915.233	-4.46	66.29	61.83	75.40	-13.57	peak
4	5927.272	-4.45	66.62	62.17	68.20	-6.03	peak


Left Band edge_Horizontal_802.11ac-VHT20_5745MHz

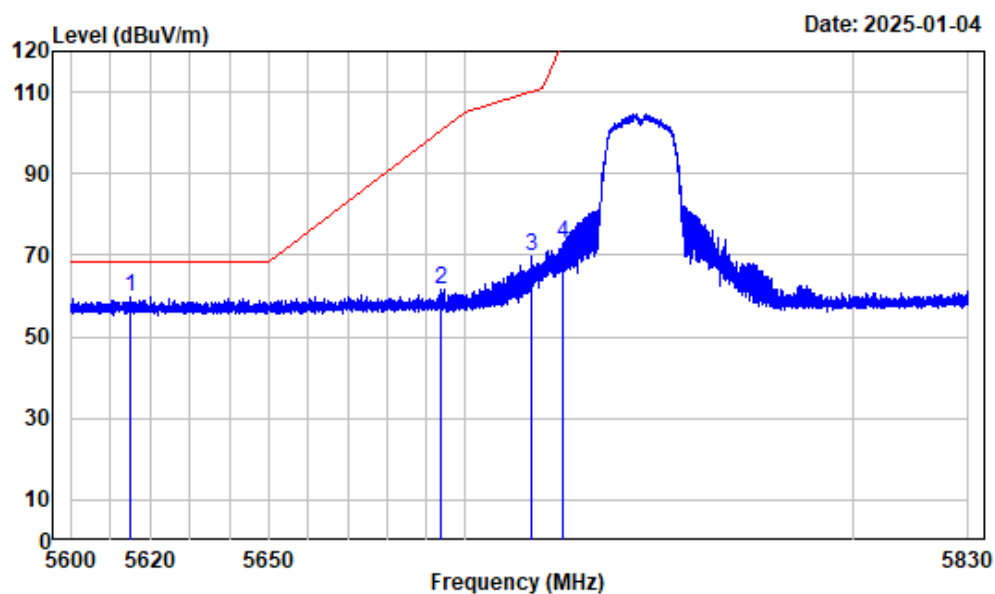

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_AC20_5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5614.923	-6.11	66.07	59.96	68.20	-8.24	peak
2	5693.536	-5.73	67.33	61.60	100.43	-38.83	peak
3	5716.999	-5.56	75.44	69.88	109.96	-40.08	peak
4	5724.877	-5.49	78.19	72.70	121.92	-49.22	peak


Left Band edge_Vertical_802.11ac-VHT20_5745MHz

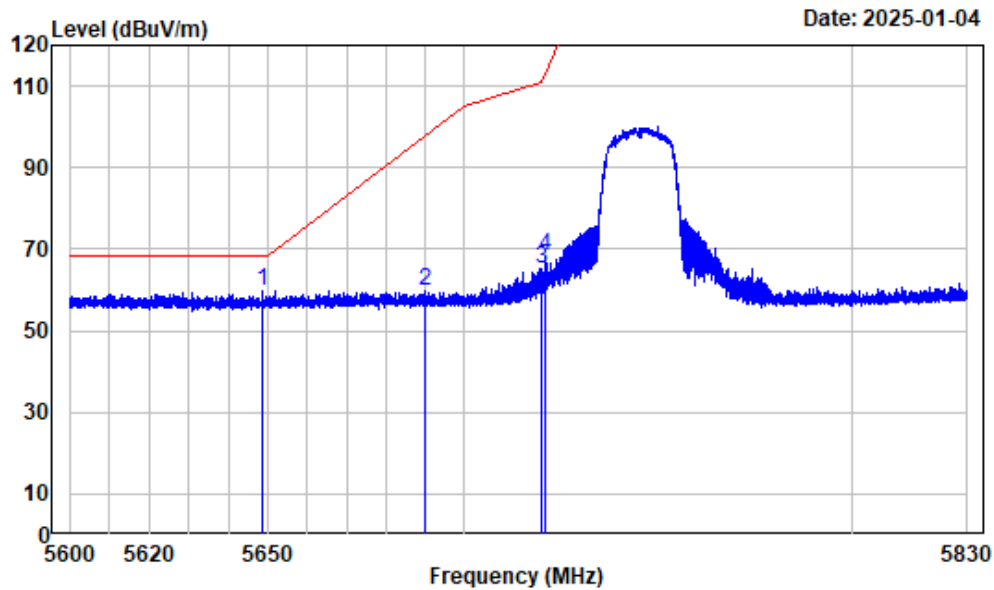

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_AC20_5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5648.421	-5.88	65.65	59.77	68.20	-8.43	peak
2	5690.056	-5.75	65.42	59.67	97.87	-38.20	peak
3	5719.931	-5.53	70.92	65.39	110.78	-45.39	peak
4	5720.564	-5.53	73.88	68.35	112.09	-43.74	peak


Right Band edge_Horizontal_802.11ac-VHT20_5825MHz

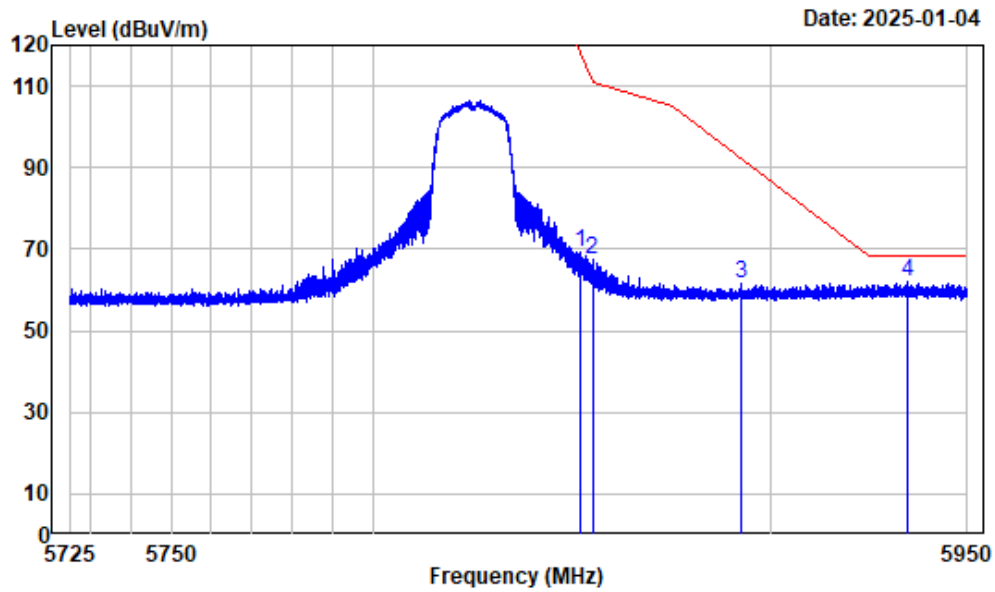

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_AC20_5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.803	-4.66	73.90	69.24	118.09	-48.85	peak
2	5854.982	-4.65	71.98	67.33	110.84	-43.51	peak
3	5892.309	-4.49	66.03	61.54	92.36	-30.82	peak
4	5934.558	-4.45	66.52	62.07	68.20	-6.13	peak


Right Band edge_Vertical_802.11ac-VHT20_5825MHz

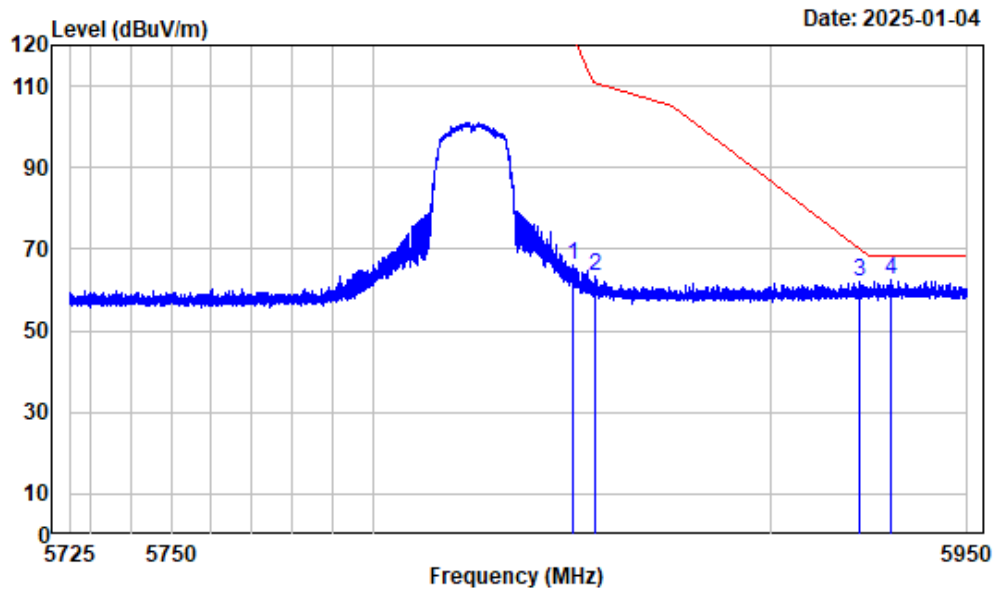

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_AC20_5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.172	-4.68	70.65	65.97	121.81	-55.84	peak
2	5855.770	-4.66	67.91	63.25	110.58	-47.33	peak
3	5922.687	-4.46	66.38	61.92	69.90	-7.98	peak
4	5930.507	-4.45	67.06	62.61	68.20	-5.59	peak


Left Band edge_Horizontal_802.11ac-VHT40_5755MHz

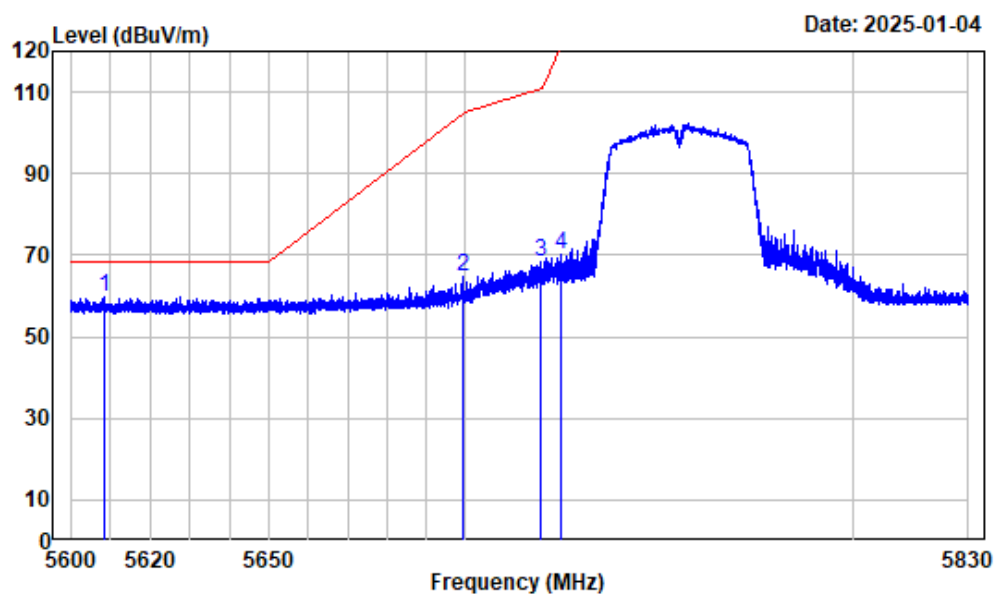

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_AC40_5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5608.367	-6.15	65.94	59.79	68.20	-8.41	peak
2	5699.574	-5.71	70.46	64.75	104.89	-40.14	peak
3	5719.126	-5.54	73.91	68.37	110.56	-42.19	peak
4	5724.676	-5.49	75.72	70.23	121.46	-51.23	peak


Left Band edge_Vertical_802.11ac-VHT40_5755MHz

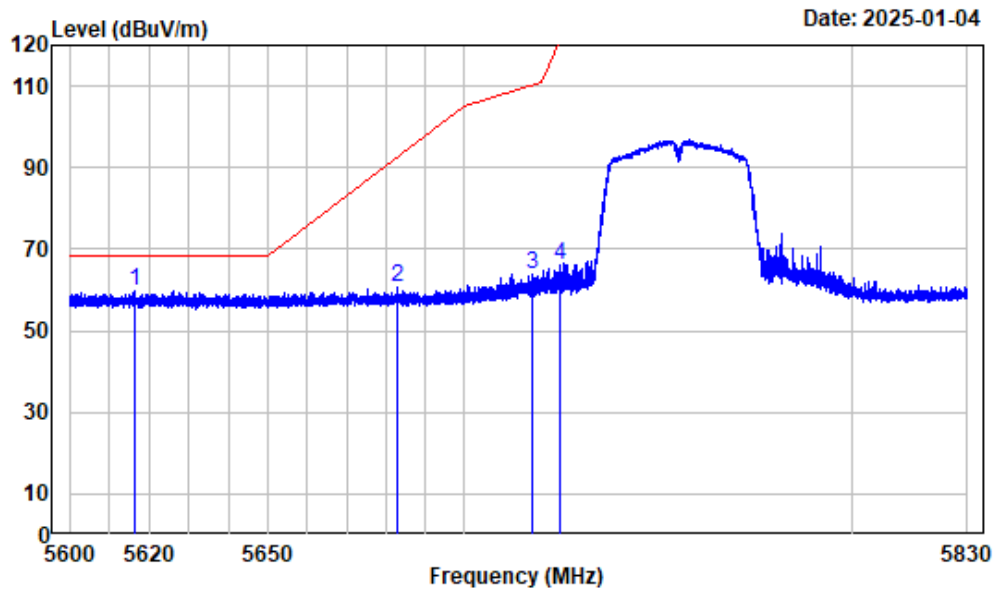

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_AC40_5755

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5616.217	-6.10	65.70	59.60	68.20	-8.60 peak
2	5682.782	-5.77	66.62	60.85	92.50	-31.65 peak
3	5717.372	-5.56	69.43	63.87	110.07	-46.20 peak
4	5724.561	-5.49	71.38	65.89	121.20	-55.31 peak


Right Band edge_Horizontal_802.11ac-VHT40_5795MHz

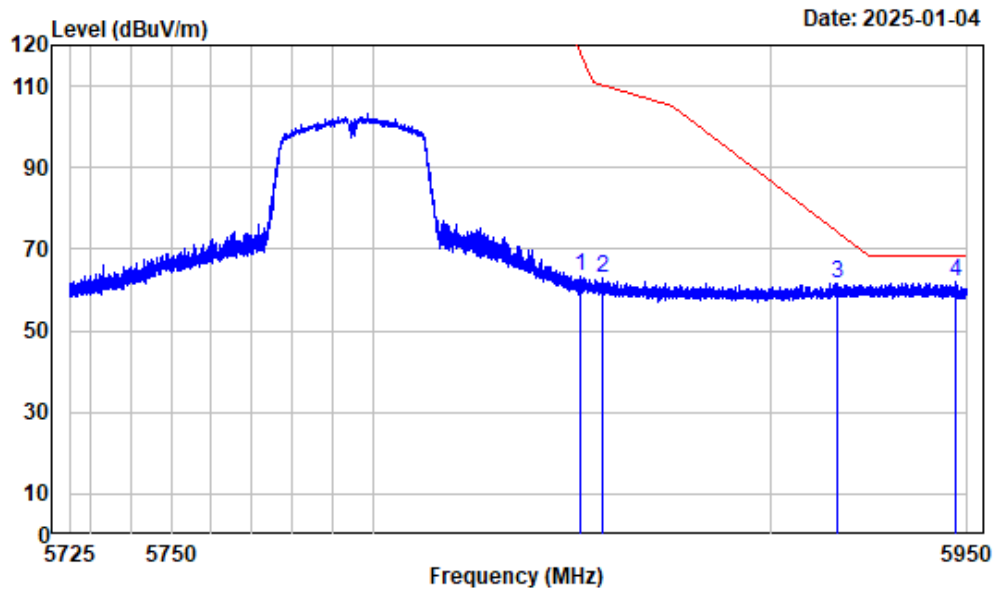

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_AC40_5795

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.916	-4.66	67.83	63.17	117.83	-54.66	peak
2	5857.682	-4.65	67.54	62.89	110.05	-47.16	peak
3	5916.780	-4.44	66.15	61.71	74.26	-12.55	peak
4	5947.103	-4.44	66.68	62.24	68.20	-5.96	peak


Right Band edge_Vertical_802.11ac-VHT40_5795MHz

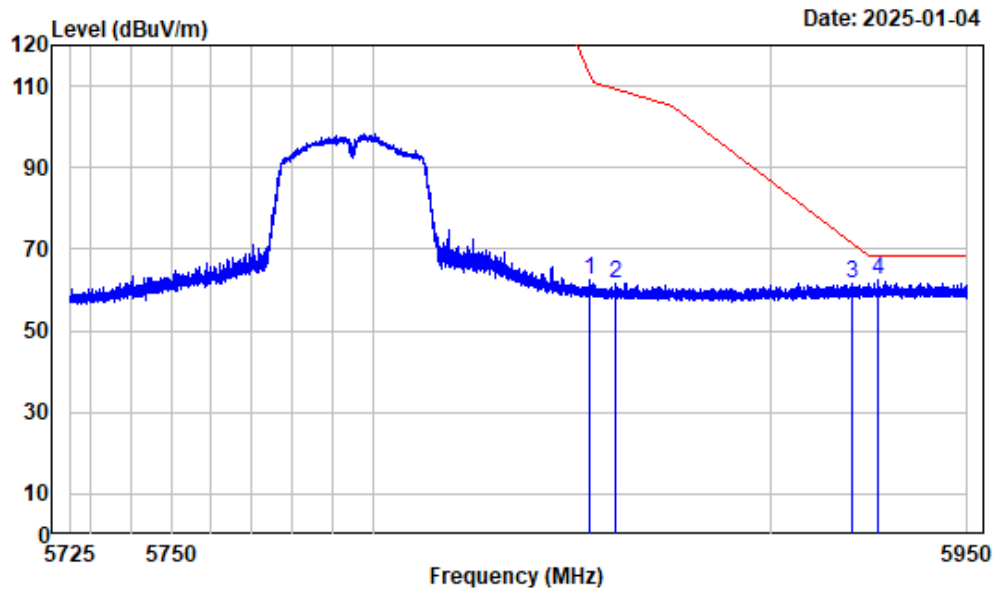

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_AC40_5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5854.307	-4.65	67.27	62.62	112.38	-49.76	peak
2	5860.889	-4.63	66.29	61.66	109.15	-47.49	peak
3	5920.521	-4.45	66.01	61.56	71.50	-9.94	peak
4	5927.300	-4.45	66.74	62.29	68.20	-5.91	peak


Band edge_Horizontal_802.11ac-VHT80_5755MHz

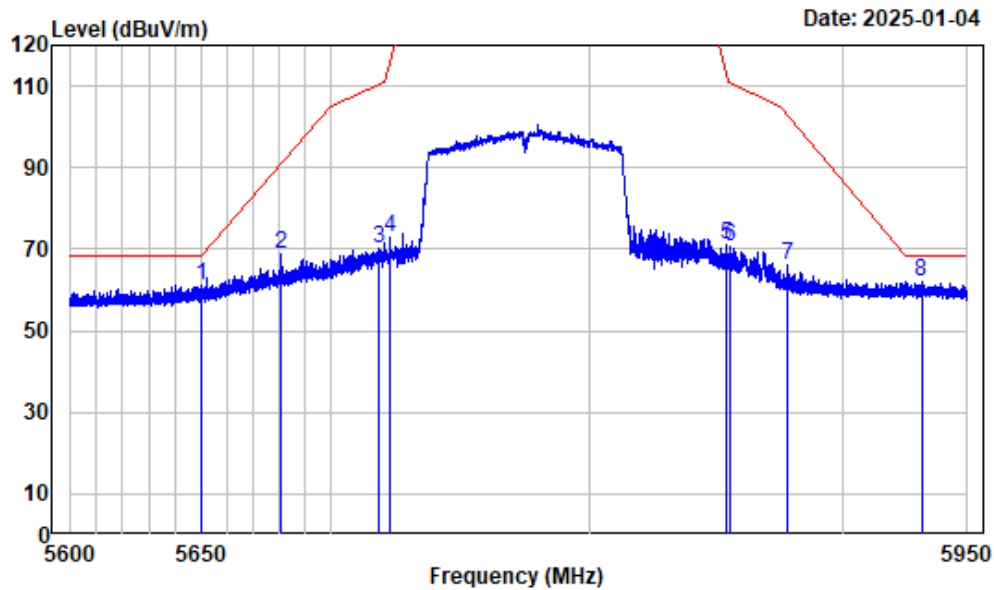

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_AC80_5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5649.794	-5.86	67.21	61.35	68.20	-6.85	peak
2	5680.685	-5.77	74.54	68.77	90.95	-22.18	peak
3	5718.534	-5.54	75.65	70.11	110.39	-40.28	peak
4	5722.778	-5.50	78.30	72.80	117.13	-44.33	peak
5	5853.957	-4.65	75.75	71.10	113.18	-42.08	peak
6	5855.576	-4.66	75.16	70.50	110.64	-40.14	peak
7	5878.153	-4.56	70.87	66.31	102.86	-36.55	peak
8	5931.623	-4.44	66.54	62.10	68.20	-6.10	peak

Band edge_Vertical_802.11ac-VHT80_5755MHz

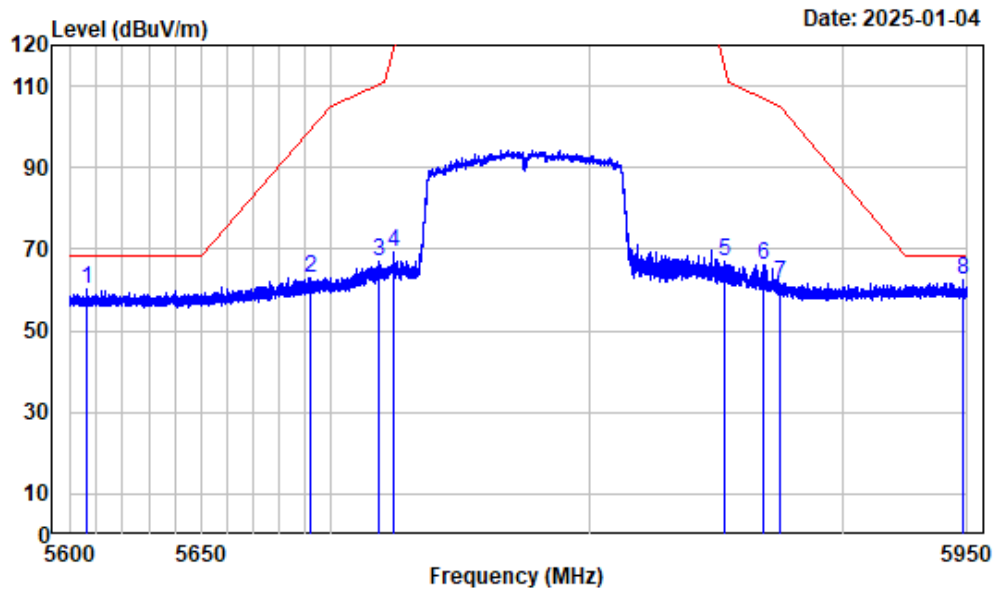


Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B4_AC80_5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5606.782	-6.17	66.47	60.30	68.20	-7.90	peak
2	5692.193	-5.73	68.67	62.94	99.44	-36.50	peak
3	5717.877	-5.55	72.56	67.01	110.21	-43.20	peak
4	5724.178	-5.49	74.83	69.34	120.33	-50.99	peak
5	5852.994	-4.66	71.84	67.18	115.37	-48.19	peak
6	5868.877	-4.59	70.76	66.17	106.91	-40.74	peak
7	5875.572	-4.57	66.20	61.63	104.78	-43.15	peak
8	5948.293	-4.45	66.88	62.43	68.20	-5.77	peak

1-18GHz (Listed with the worst harmonic margin test plot)


1-7GHz_Horizontal_802.11a_5240MHz

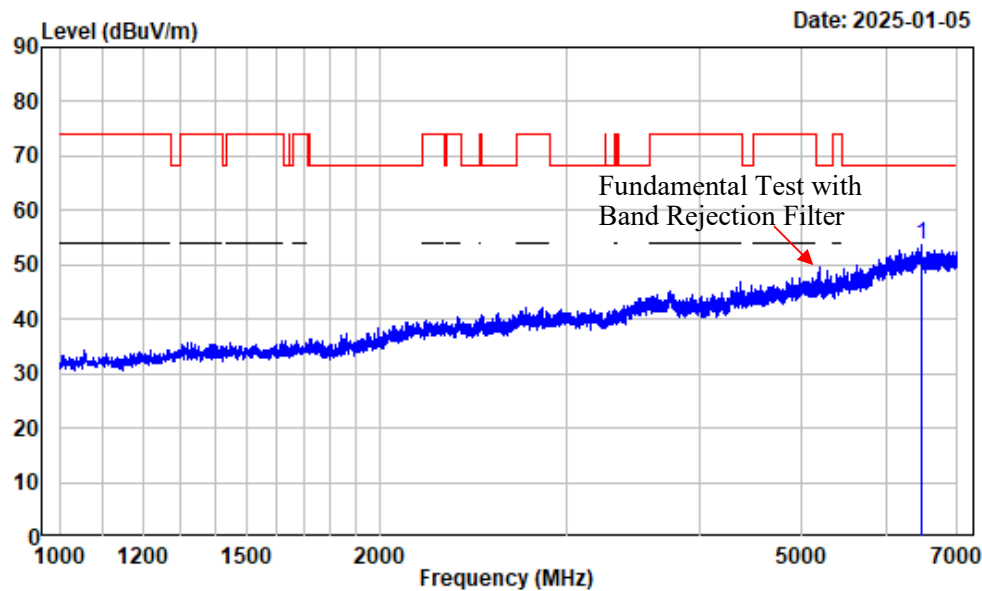

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_A_5240

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6474.184	-2.91	56.52	53.61	68.20	-14.59 Peak


1-7GHz_Vertical_802.11a_5240MHz

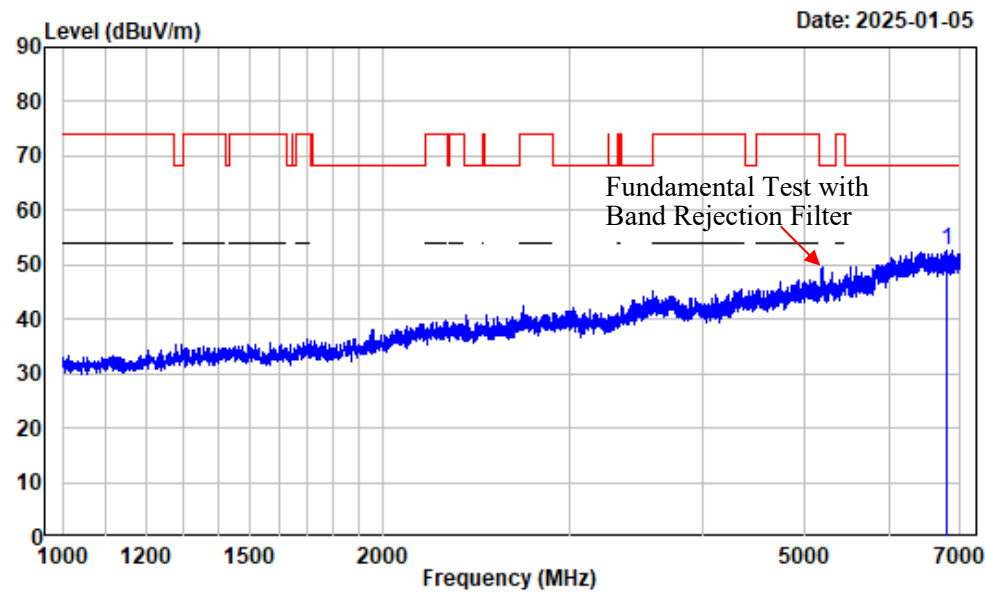

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_A_5240

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6786.973	-3.32	55.85	52.53	68.20	-15.67	Peak


7-18GHz_Horizontal_Peak_802.11a_5240MHz

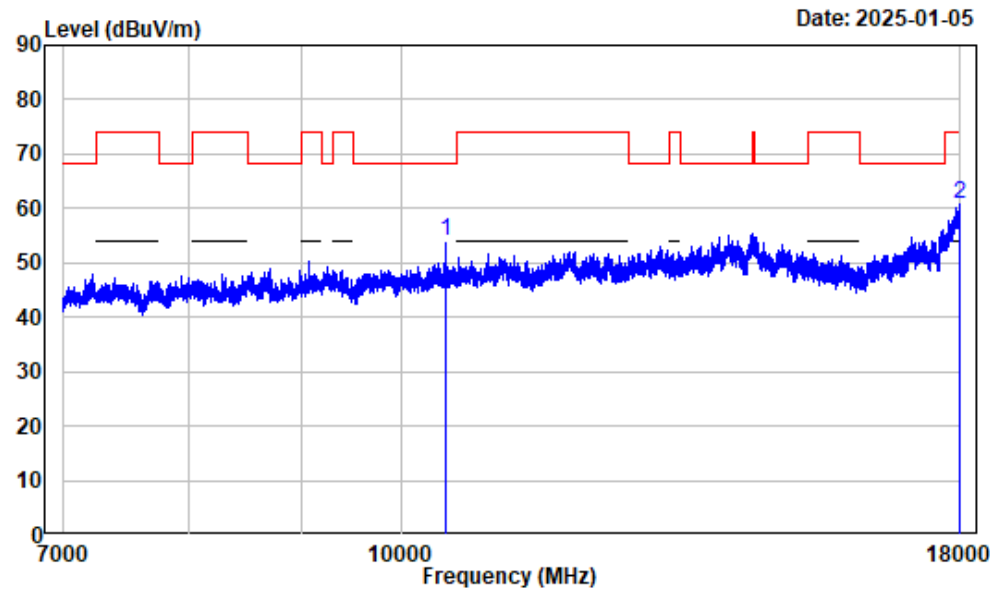

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_A_5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	2.25	51.74	53.99	68.20	-14.21	Peak
2 17979.370	13.10	47.57	60.67	74.00	-13.33	Peak


7-18GHz_Horizontal_Average_802.11a_5240MHz

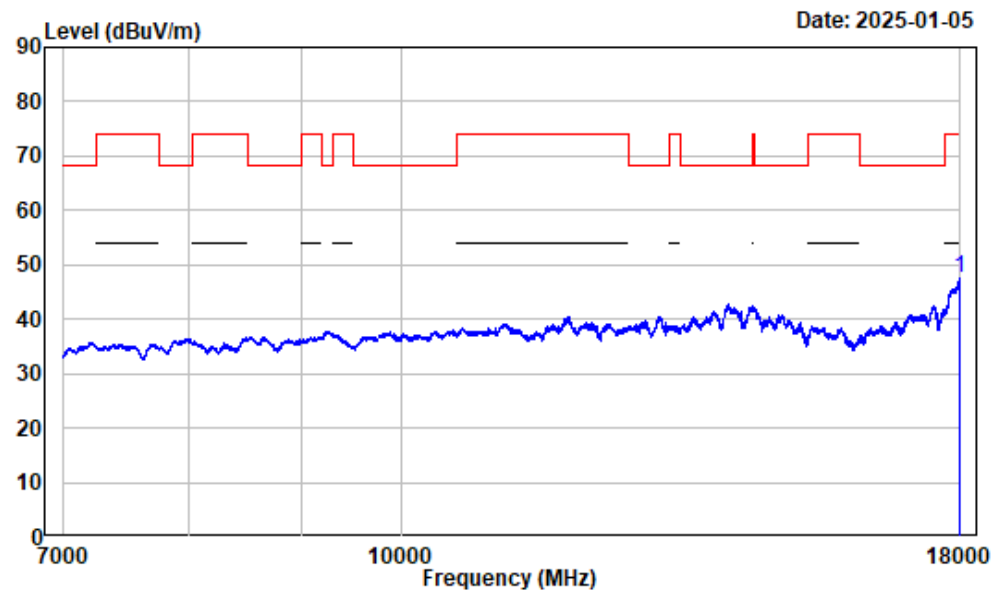

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_A_5240

Freq		Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.630		13.19	34.38	47.57	54.00	-6.43	Average


7-18GHz_Vertical_Peak_802.11a_5240MHz

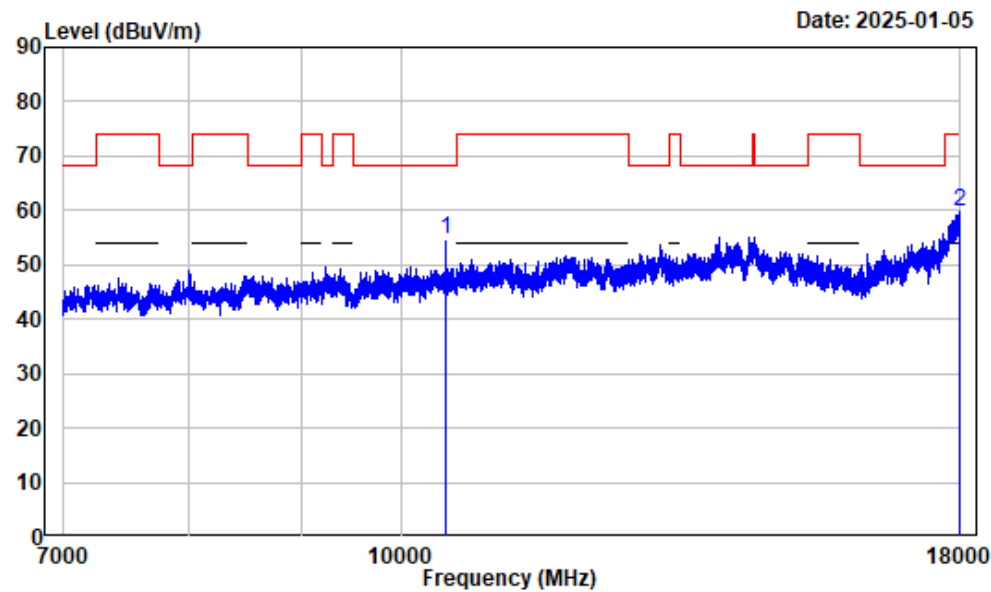

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_A_5240

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	2.25	52.29	54.54	68.20	-13.66	Peak
2	17995.880	13.18	46.65	59.83	74.00	-14.17	Peak


7-18GHz_Vertical_Average_802.11a_5240MHz

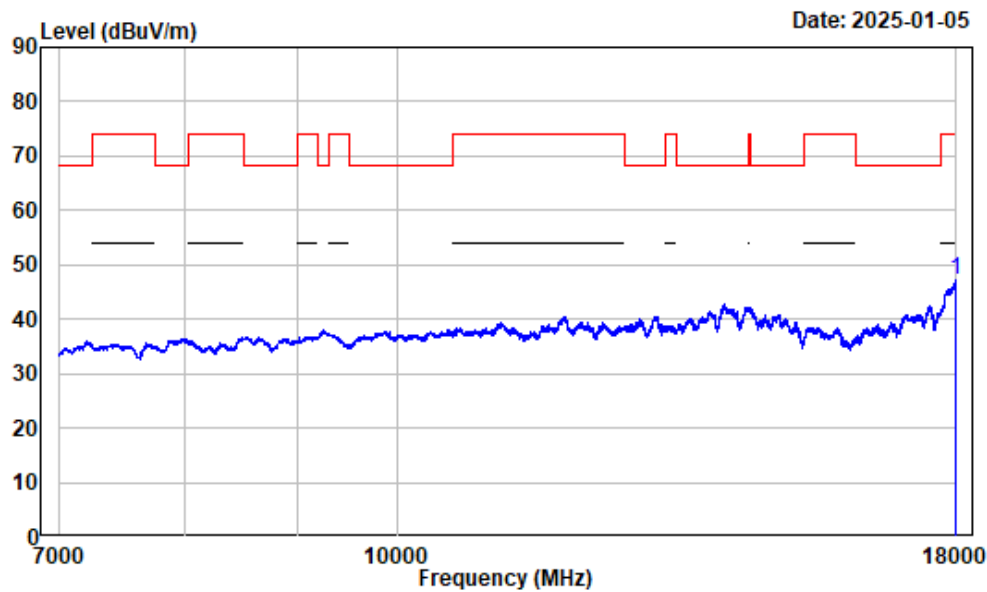

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_A_5240

Freq		Factor	Read Level		Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17993.130	13.17	34.09	47.26	54.00	-6.74	Average


1-7GHz_Horizontal_802.11ac-VHT20_5180MHz

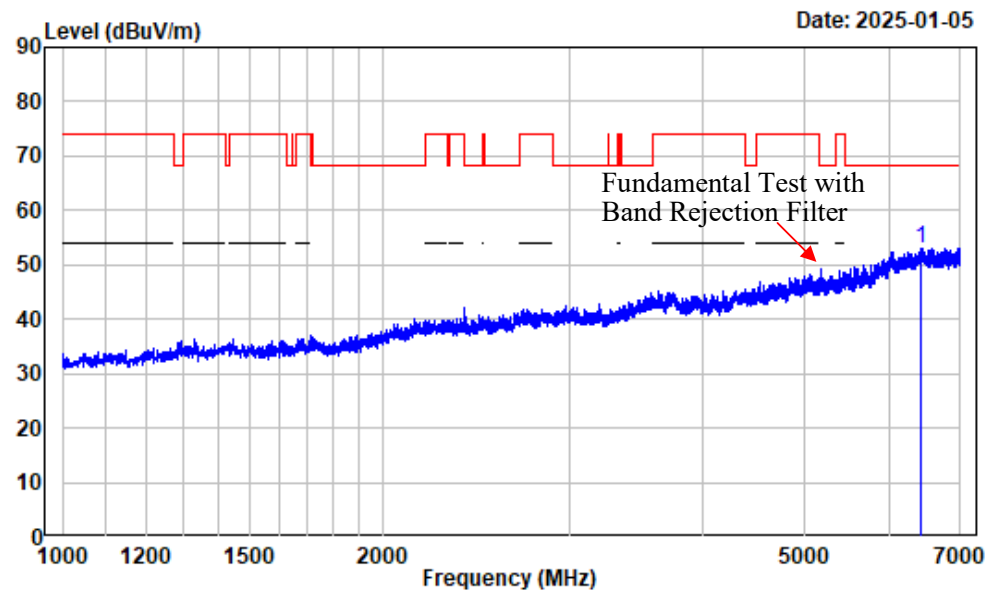

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC20_5180

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6434.429	-2.88	55.99	53.11	68.20	-15.09	Peak


1-7GHz_Vertical_802.11ac-VHT20_5180MHz

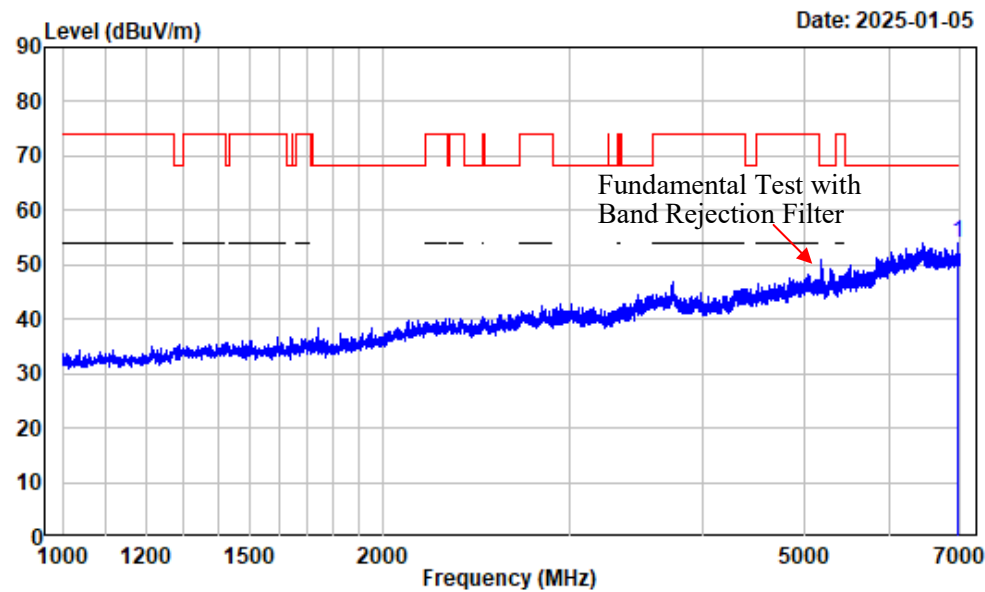

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC20_5180

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6971.497	-2.80	56.79	53.99	68.20	-14.21	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT20_5180MHz

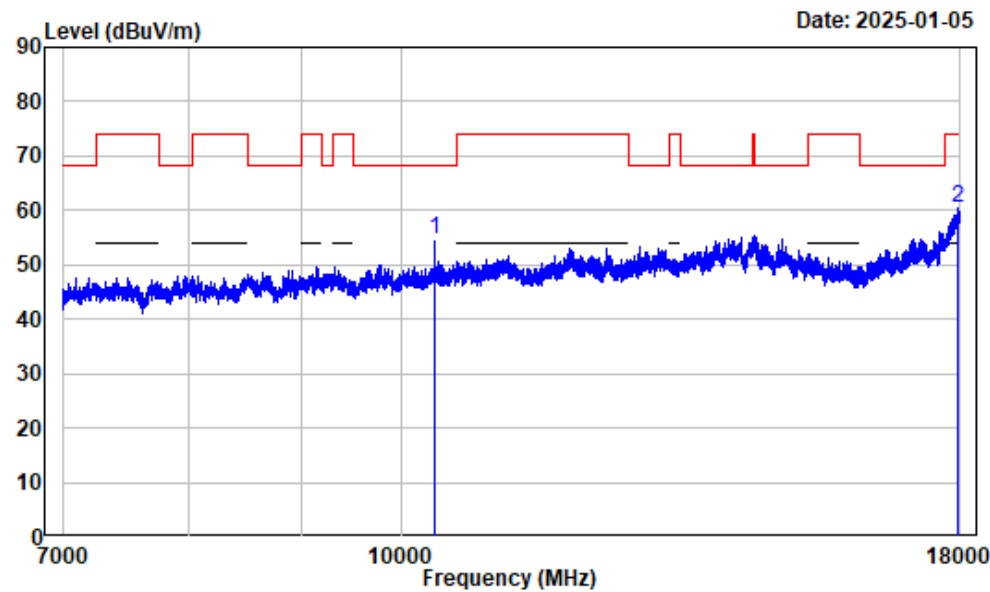

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC20_5180

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	2.53	52.04	54.57	68.20	-13.63	Peak
2	17958.740	12.99	47.55	60.54	74.00	-13.46	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT20_5180MHz

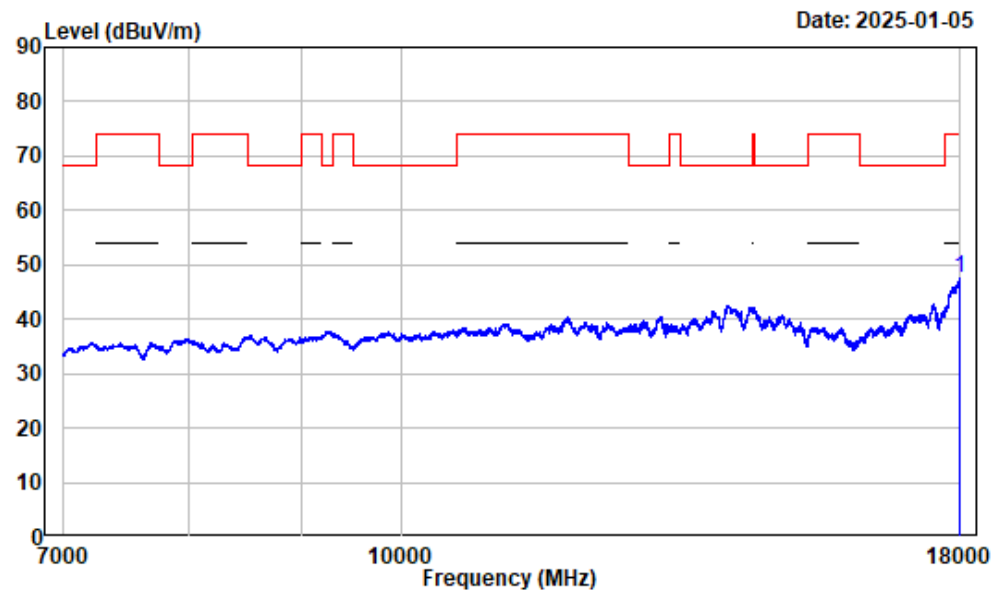

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_AC20_5180

Freq		Factor	Read Level		Limit	Over	Remark
			Level	Level	Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17995.880		13.18	34.32	47.50	54.00	-6.50	Average


7-18GHz_Vertical_Peak_802.11ac-VHT20_5180MHz

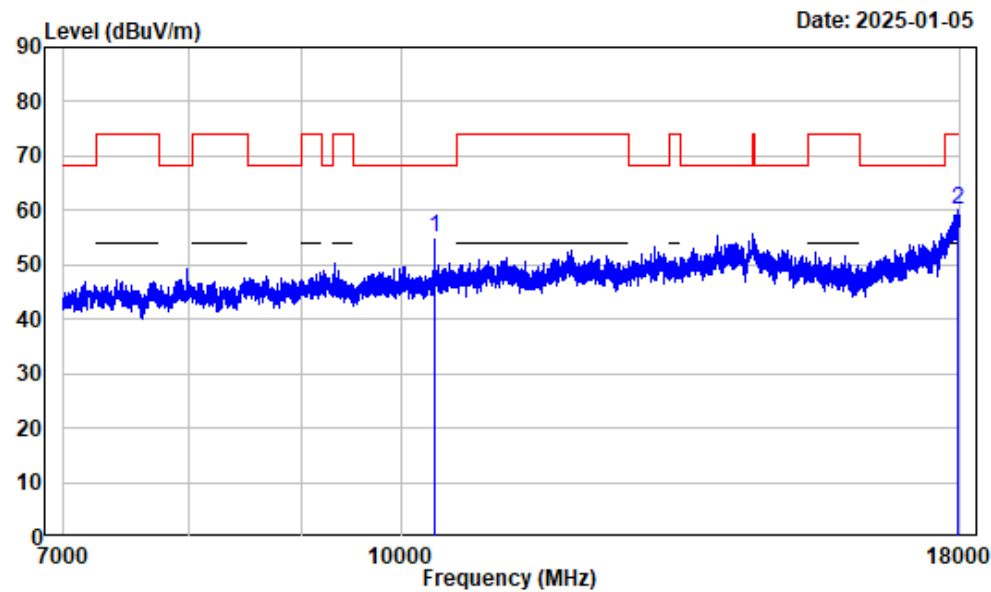

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC20_5180

Freq		Factor	Read Level	Level	Limit	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	2.53	52.36	54.89	68.20	-13.31	Peak
2	17949.120	12.95	47.01	59.96	74.00	-14.04	Peak


7-18GHz_Vertical_Average_802.11ac-VHT20_5180MHz

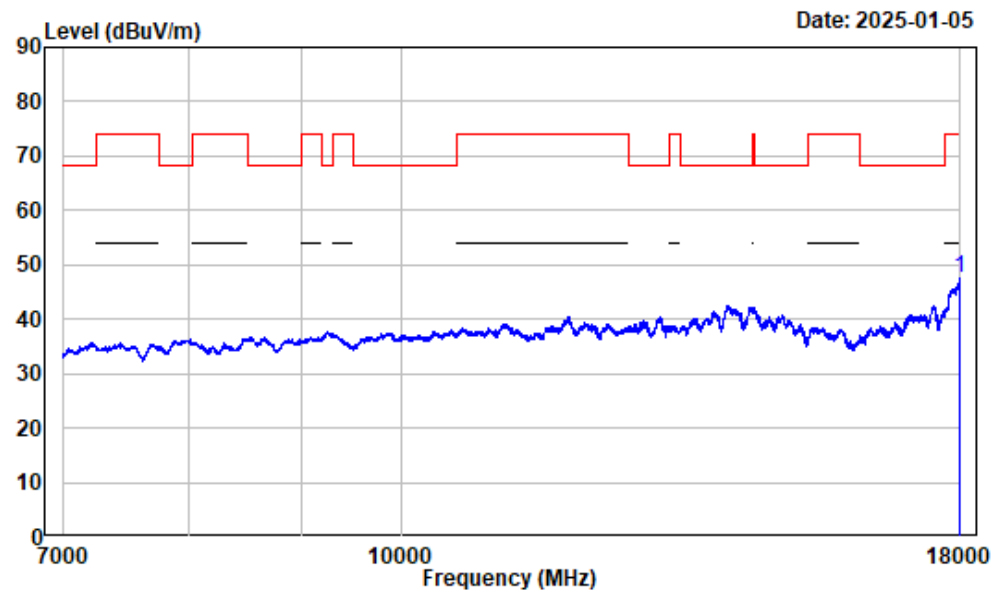

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5G_B1_AC20_5180

Freq		Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.630		13.19	34.28	47.47	54.00	-6.53	Average


1-7GHz_Horizontal_802.11ac-VHT40_5190MHz

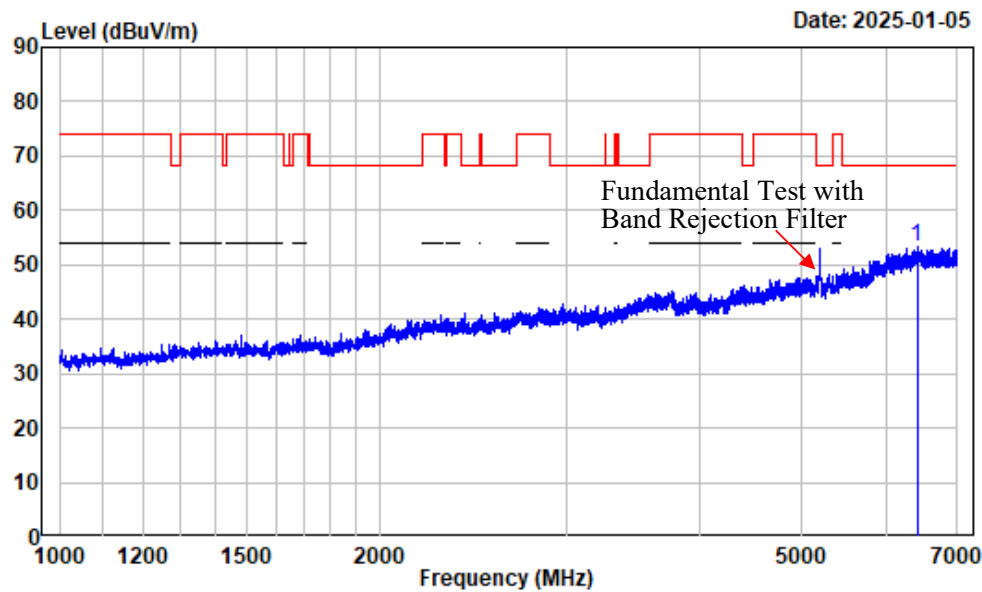

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC40_5190

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6414.927	-2.89	56.19	53.30	68.20	-14.90	Peak


1-7GHz_Vertical_802.11ac-VHT40_5190MHz

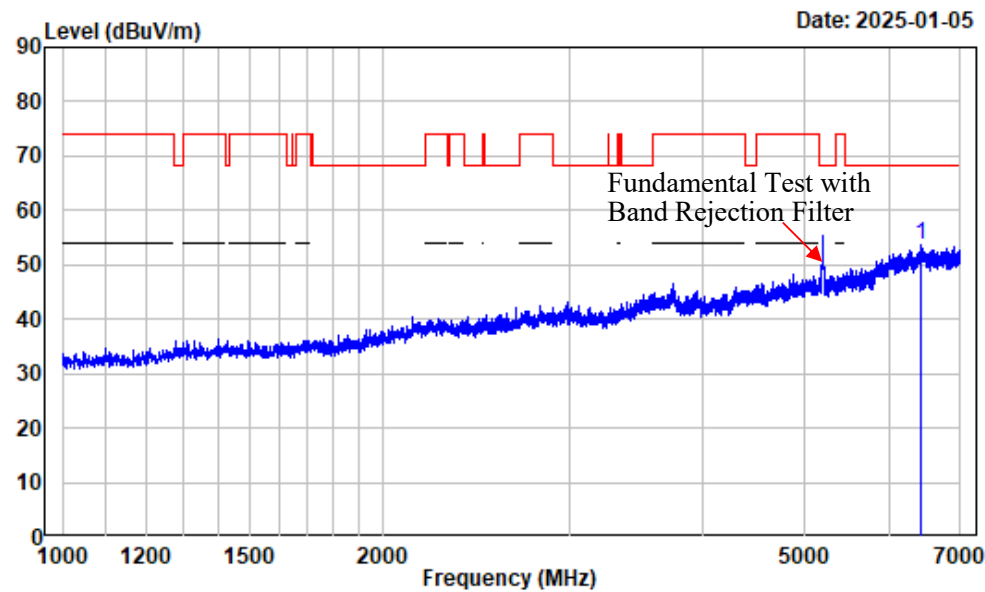

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC40_5190

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6429.179	-2.89	56.42	53.53	68.20	-14.67	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT40_5190MHz

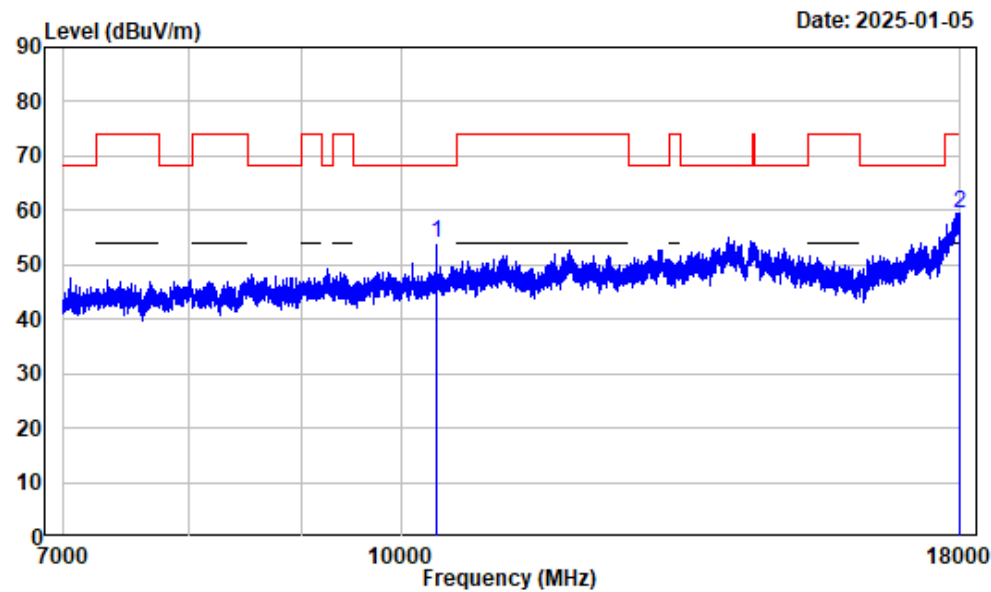

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC40_5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.000	2.54	51.59	54.13	68.20	-14.07	Peak
2 17978.000	13.10	46.47	59.57	74.00	-14.43	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT40_5190MHz

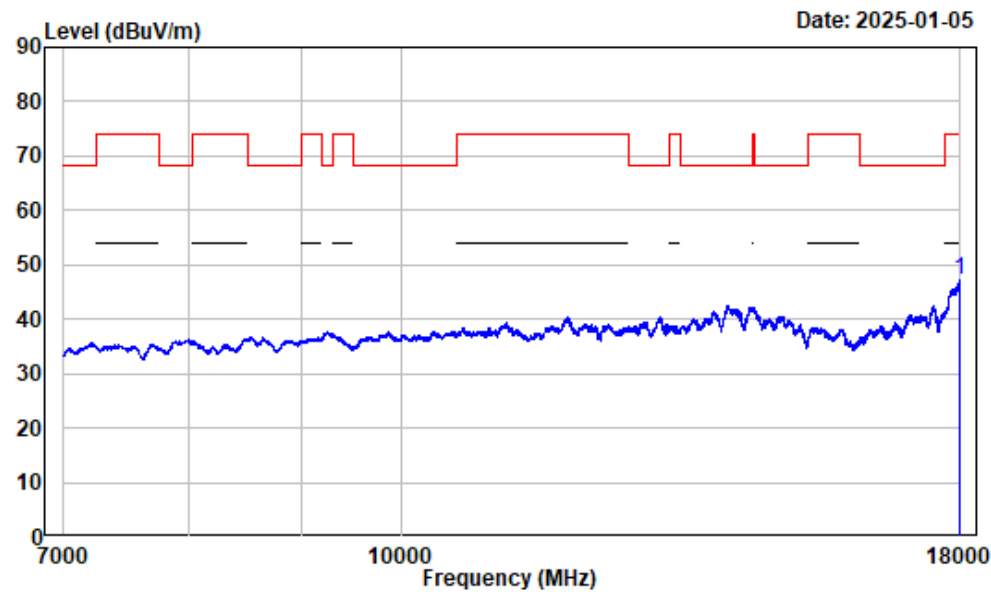

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:2kHz Detector:Peak
Note : 5G_B1_AC40_5190

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17991.750	13.16	34.07	47.23	54.00	-6.77	Average


7-18GHz_Vertical_Peak_802.11ac-VHT40_5190MHz

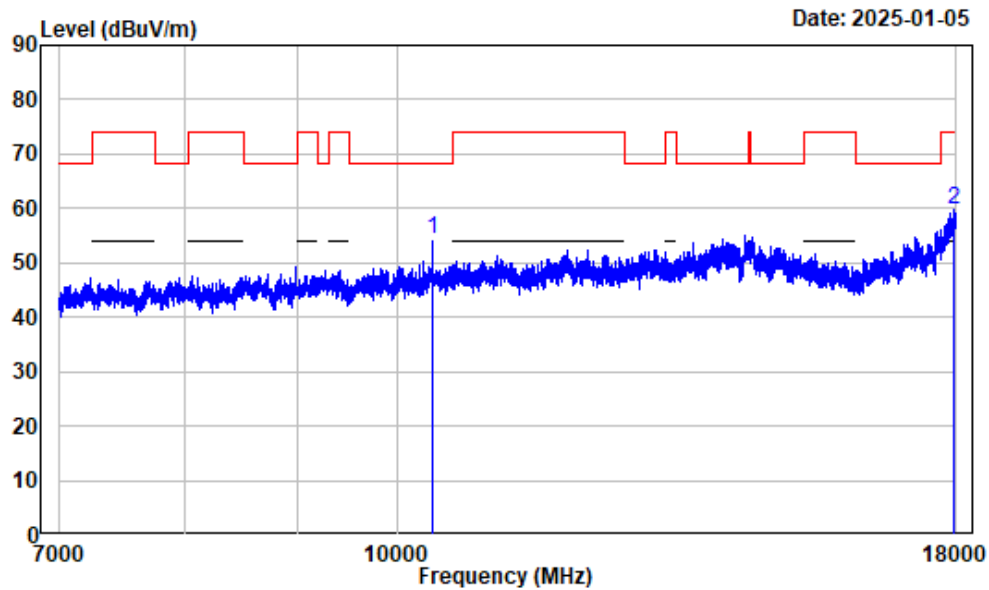

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC40_5190

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	2.54	51.74	54.28	68.20	-13.92	Peak
2	17960.120	13.00	46.71	59.71	74.00	-14.29	Peak


7-18GHz_Vertical_Average_802.11ac-VHT40_5190MHz

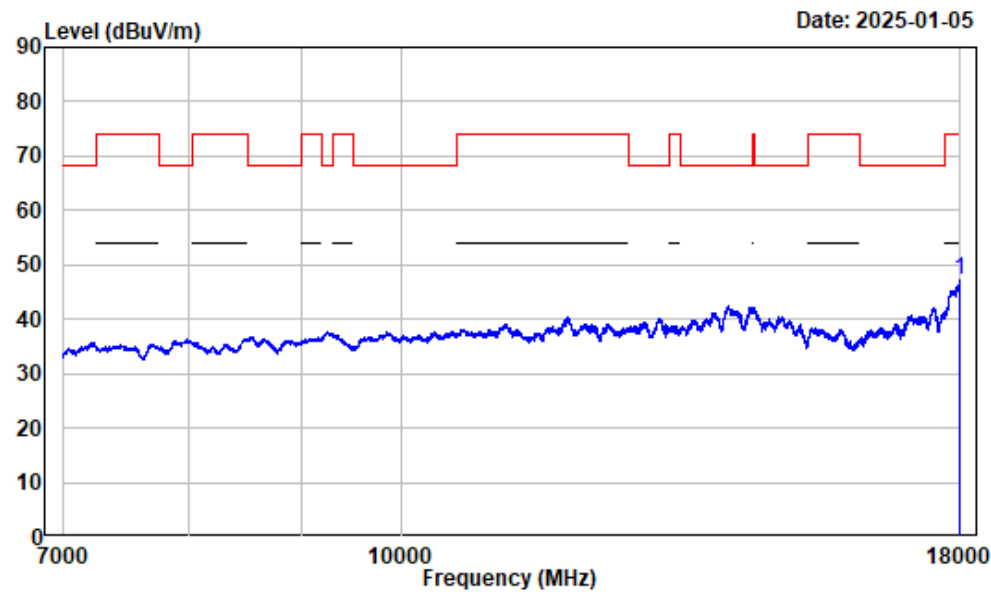

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:2kHz Detector:Peak
Note : 5G_B1_AC40_5190

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17991.750		13.16	33.96	47.12	54.00	-6.88	Average


1-7GHz_Horizontal_802.11ac-VHT80_5210MHz

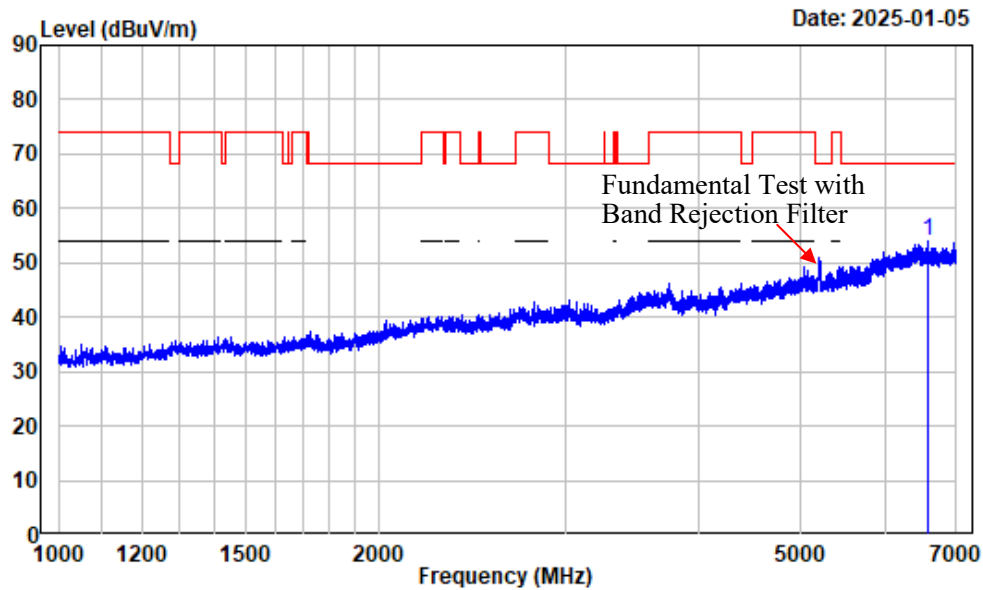

Condition : Horizontal
 Project No. : 2401Z105021E-RF
 Tester : Dylan Yang
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5G_B1_AC80_5210

Freq Factor		Read Level	Limit Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6578.447	-3.08	57.13	54.05	68.20	-14.15	Peak


1-7GHz_Vertical_802.11ac-VHT80_5210MHz

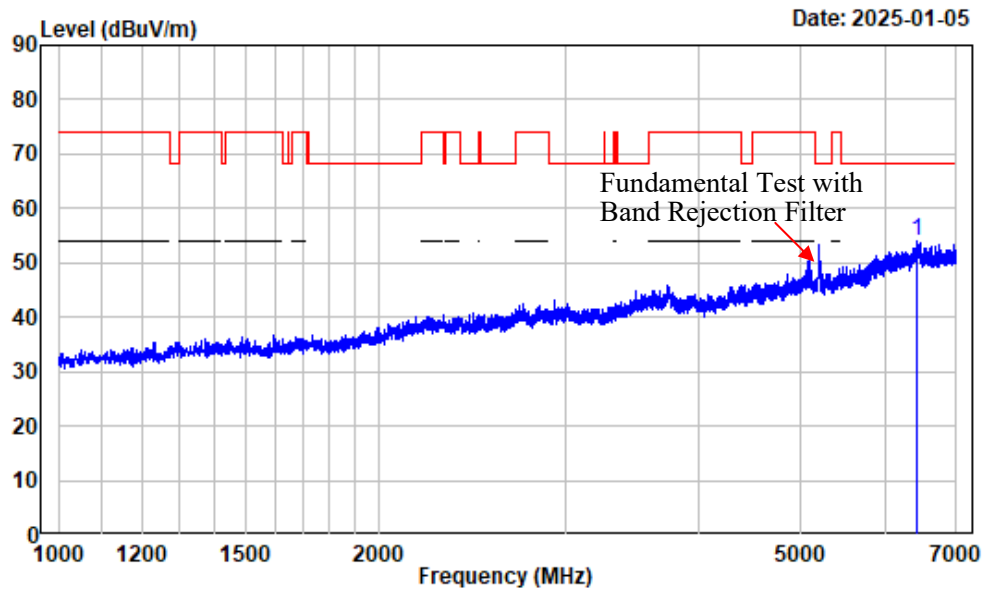

Condition : Vertical
 Project No. : 2401Z105021E-RF
 Tester : Dylan Yang
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5G_B1_AC80_5210

	Freq		Read		Limit	Over	Remark
	Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6436.680	-2.87	56.70	53.83	68.20	-14.37	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT80_5210MHz

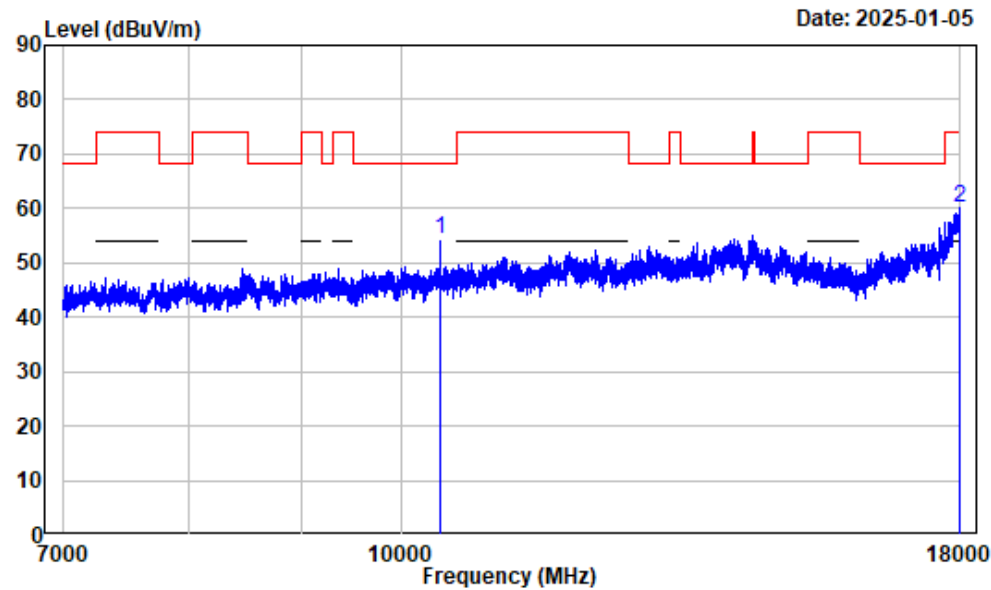

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC80_5210

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	2.48	51.79	54.27	68.20	-13.93	Peak
2	17987.620	13.13	46.85	59.98	74.00	-14.02	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT80_5210MHz

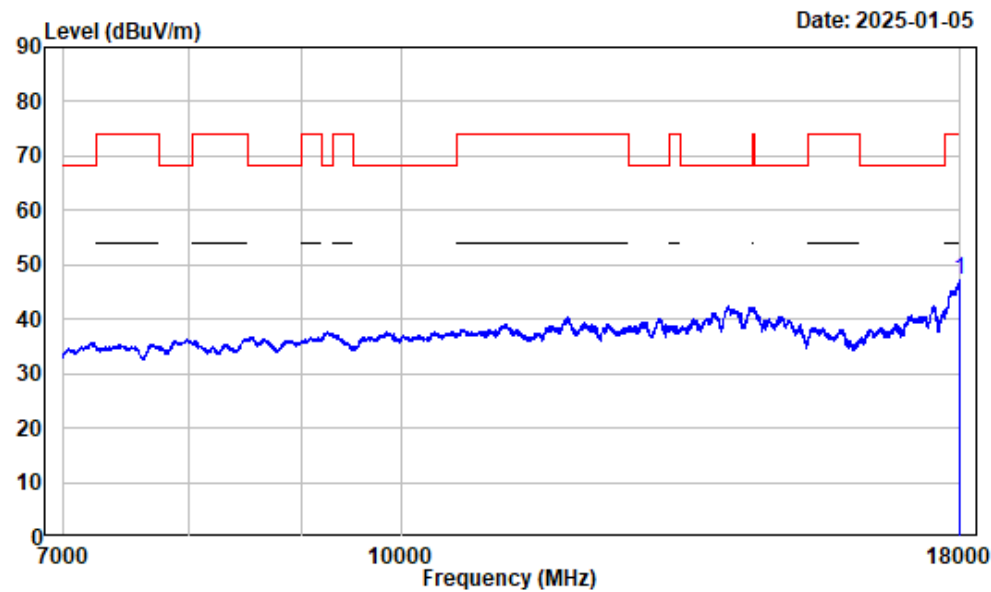

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:5kHz Detector:Peak
Note : 5G_B1_AC80_5210

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17986.250	13.12	34.17	47.29	54.00	-6.71	Average


7-18GHz_Vertical_Peak_802.11ac-VHT80_5210MHz

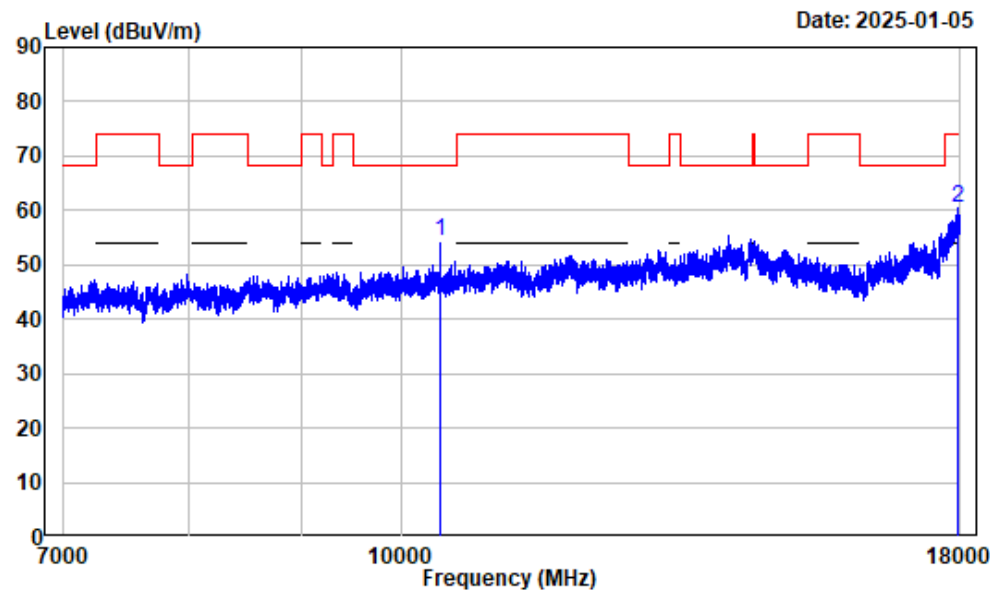

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5G_B1_AC80_5210

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10420.000	2.48	51.85	54.33	68.20	-13.87	Peak
2 17971.120	13.06	47.38	60.44	74.00	-13.56	Peak


7-18GHz_Vertical_Average_802.11ac-VHT80_5210MHz

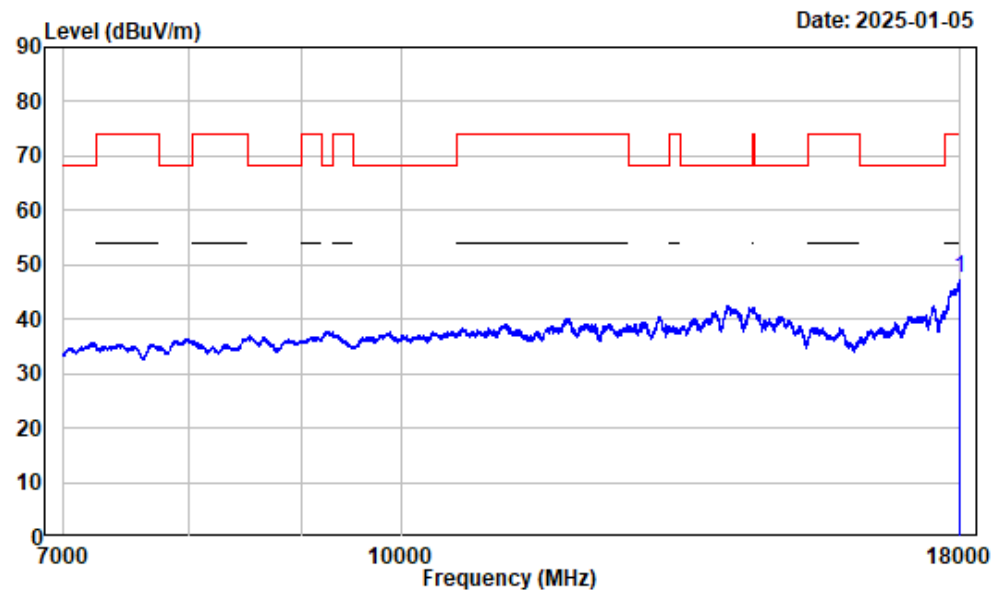

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Dylan Yang
Spectrum setting: Average reading: RBW:1MHz VBW:5kHz Detector:Peak
Note : 5G_B1_AC80_5210

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17998.630	13.19	34.33	47.52	54.00	-6.48	Average


1-7GHz_Horizontal_802.11a_5320MHz

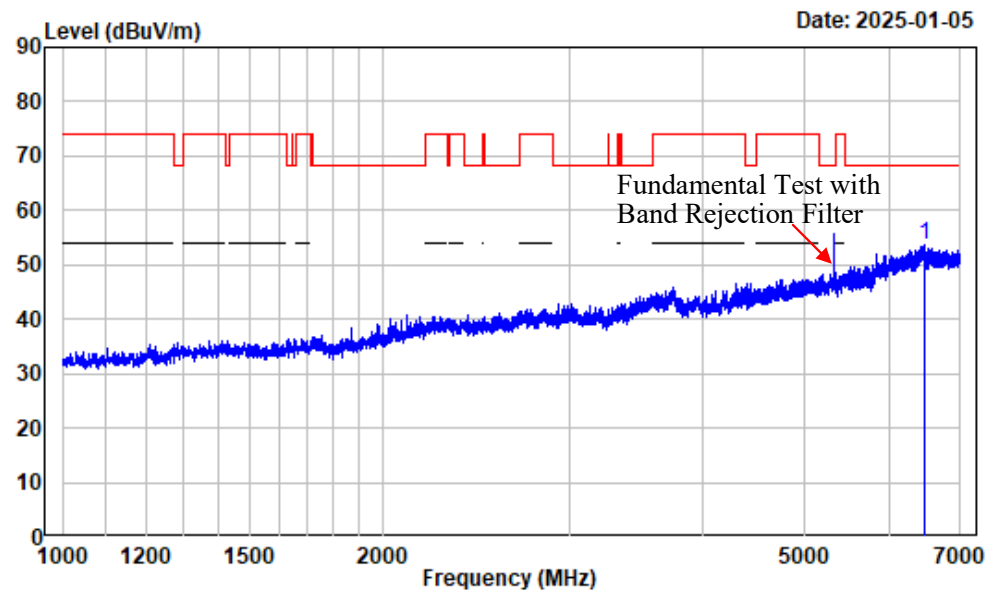

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6468.934	-2.91	56.53	53.62	68.20	-14.58	Peak


1-7GHz_Vertical_802.11a_5320MHz

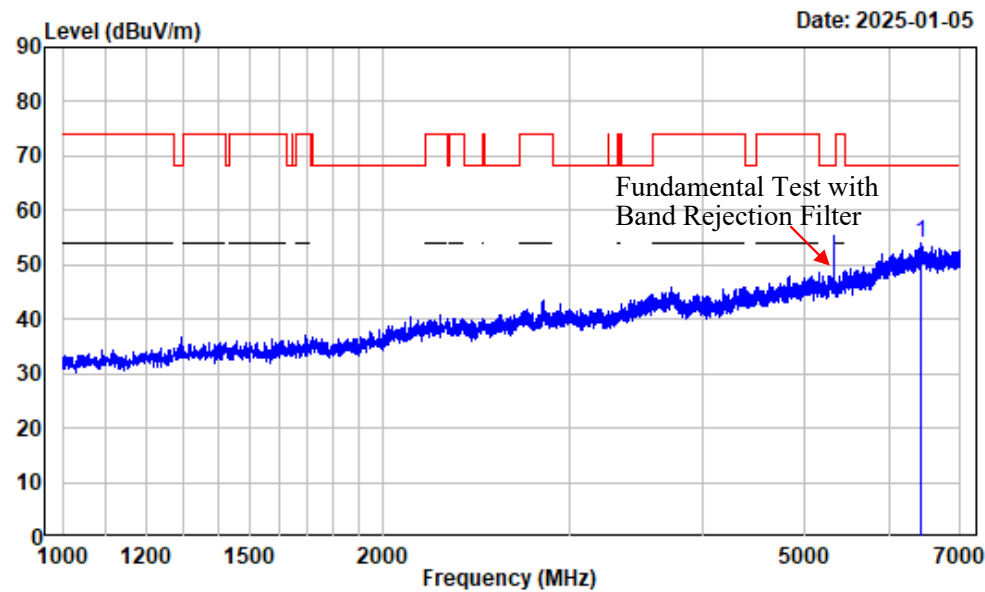

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6434.429	-2.88	56.98	54.10	68.20	-14.10	Peak


7-18GHz_Horizontal_Peak_802.11a_5320MHz

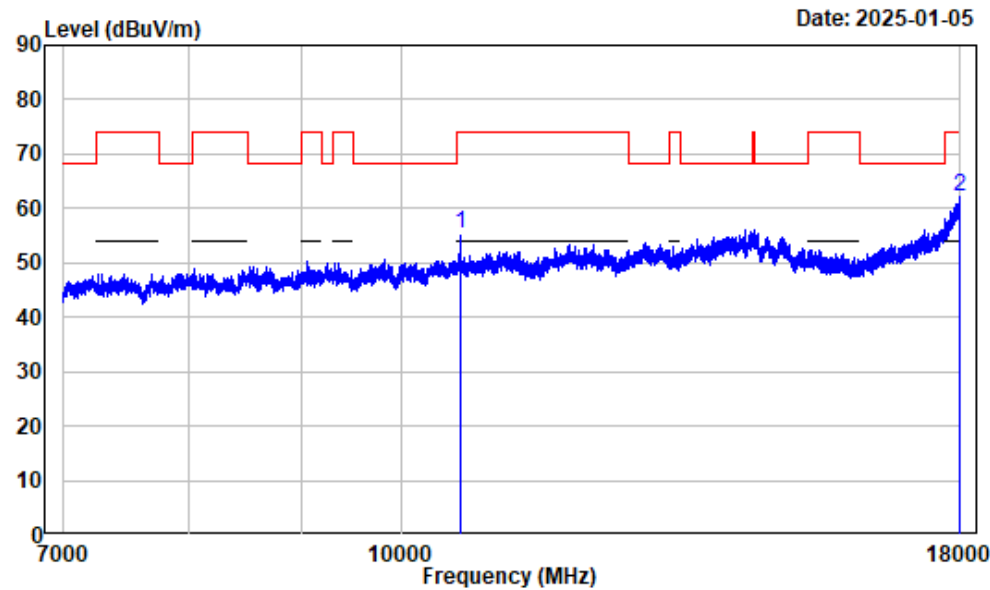

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	2.59	52.78	55.37	74.00	-18.63	Peak
2	17991.750	13.16	48.89	62.05	74.00	-11.95	Peak


7-18GHz_Horizontal_Average_802.11a_5320MHz

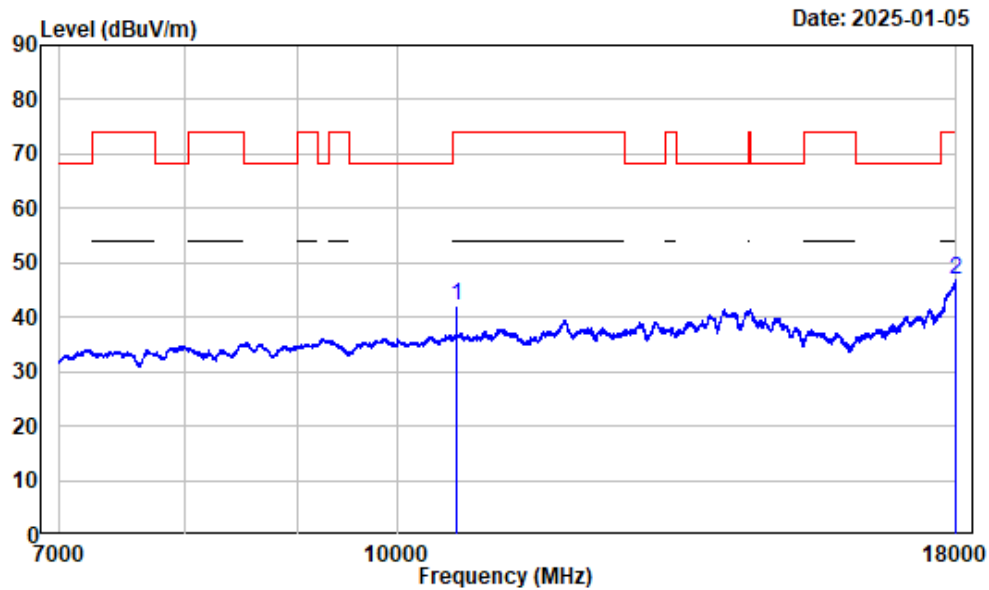

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	39.41	42.00	54.00	-12.00	Average
2 17995.880	13.18	33.54	46.72	54.00	-7.28	Average


7-18GHz_Vertical_Peak_802.11a_5320MHz

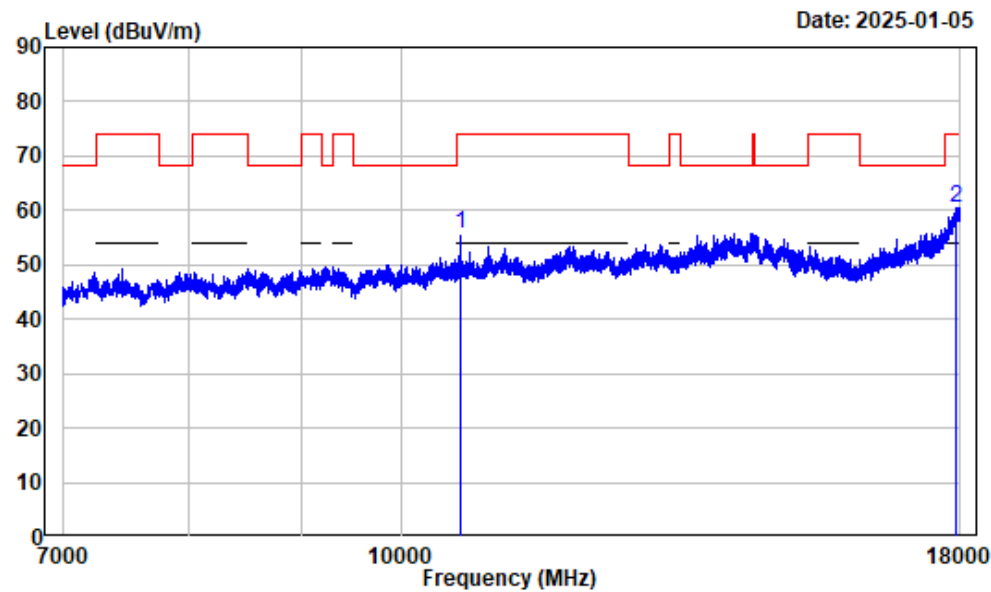

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq		Factor	Read Level	Level	Limit	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	2.59	53.13	55.72	74.00	-18.28	Peak
2	17921.620	12.81	47.78	60.59	74.00	-13.41	Peak


7-18GHz_Vertical_Average_802.11a_5320MHz

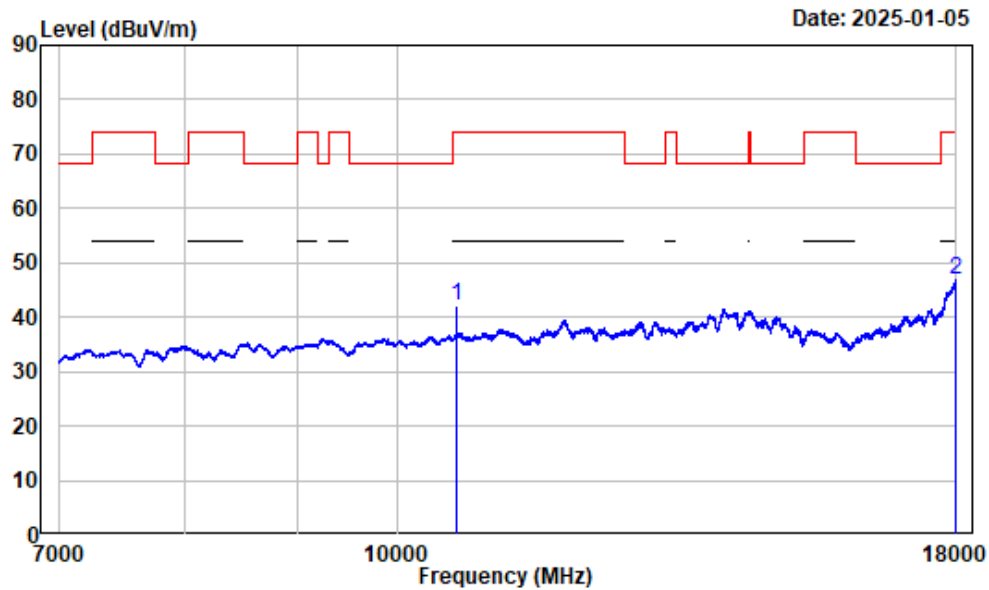

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	39.55	42.14	54.00	-11.86	Average
2 17986.250	13.12	33.80	46.92	54.00	-7.08	Average


1-7GHz_Horizontal_802.11ac-VHT20_5320MHz

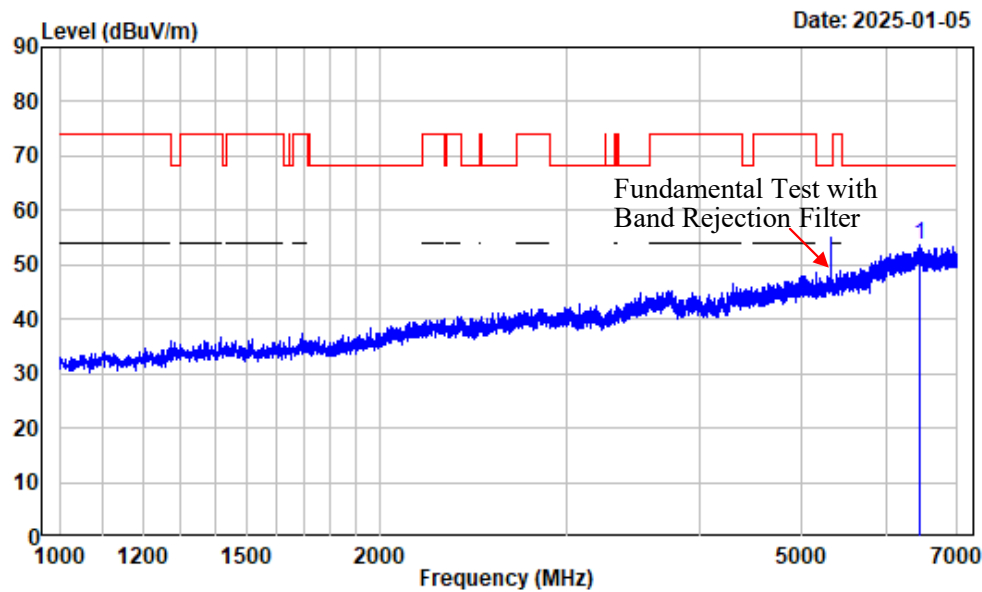

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6447.181	-2.87	56.39	53.52	68.20	-14.68	Peak


1-7GHz_Vertical_802.11ac-VHT20_5320MHz

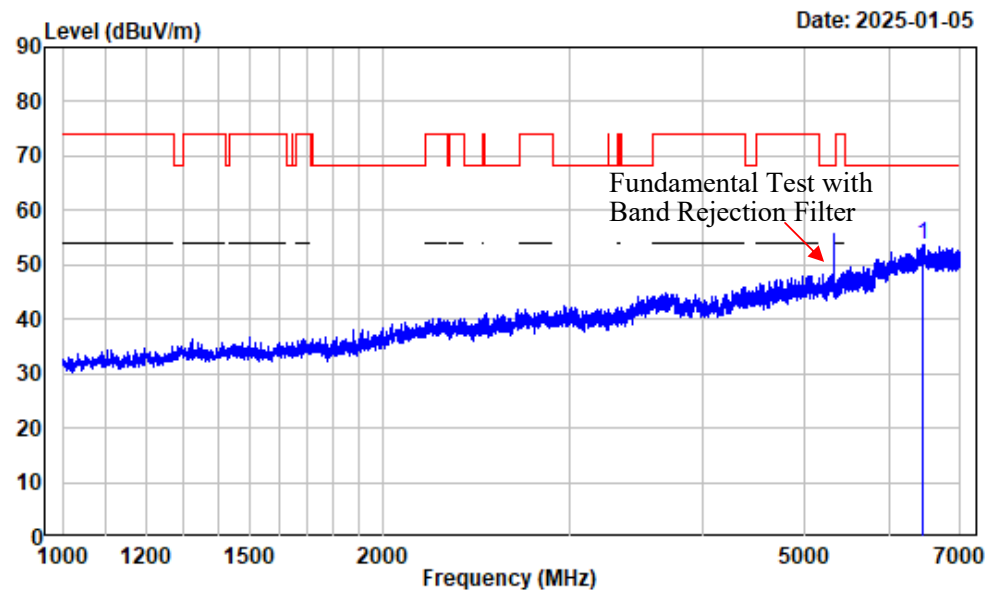

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6449.431	-2.88	56.62	53.74	68.20	-14.46	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT20_5320MHz

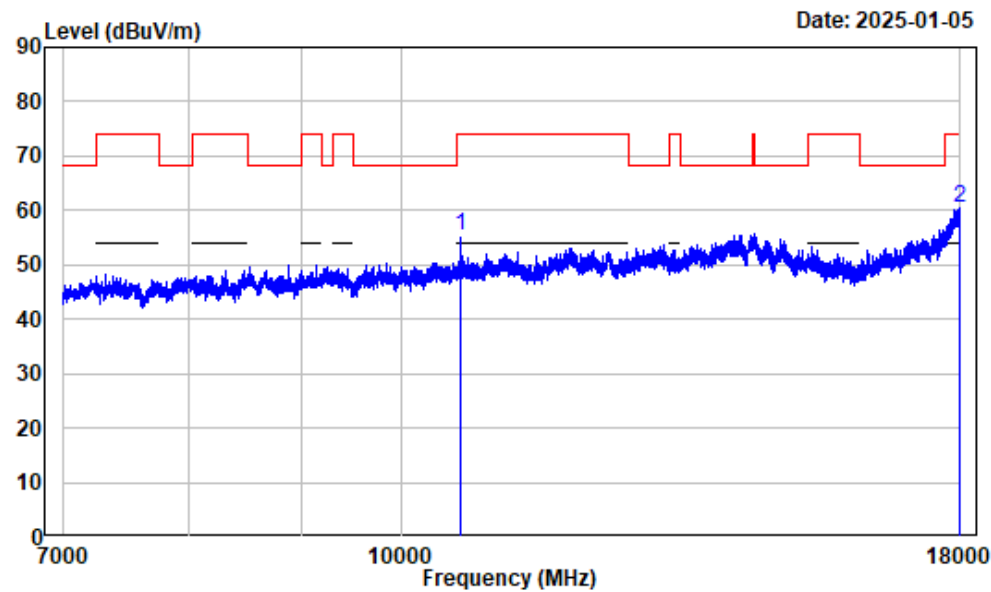

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq		Factor	Read Level	Level	Limit	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	2.59	52.89	55.48	74.00	-18.52	Peak
2	17997.250	13.19	47.38	60.57	74.00	-13.43	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT20_5320MHz

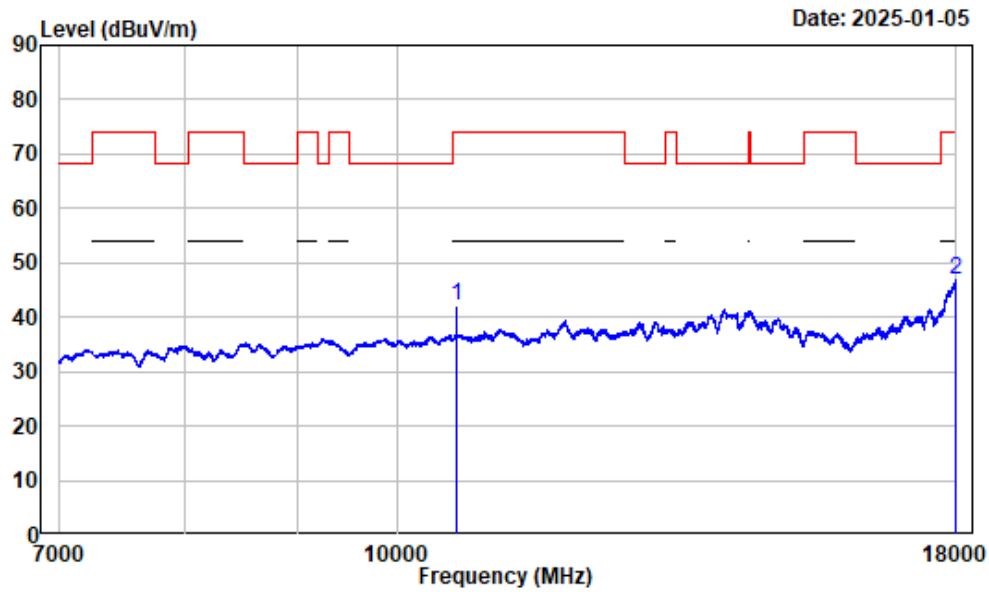

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	2.59	39.48	42.07	54.00	-11.93	Average
2	17991.750	13.16	33.65	46.81	54.00	-7.19	Average


7-18GHz_Vertical_Peak_802.11ac-VHT20_5320MHz

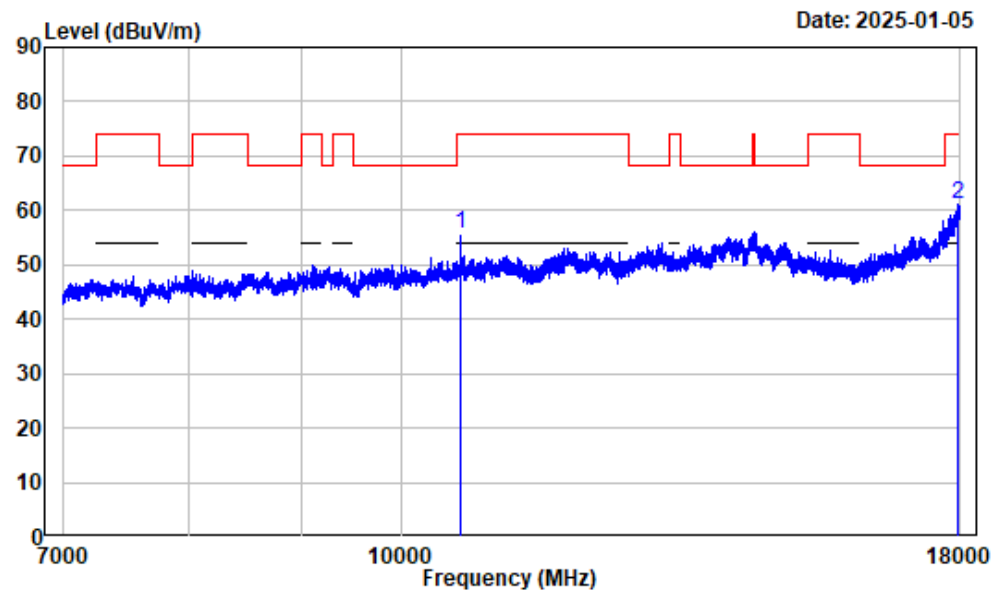

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq		Factor	Read Level	Level	Limit	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	2.59	53.27	55.86	74.00	-18.14	Peak
2	17950.490	12.95	48.23	61.18	74.00	-12.82	Peak


7-18GHz_Vertical_Average_802.11ac-VHT20_5320MHz

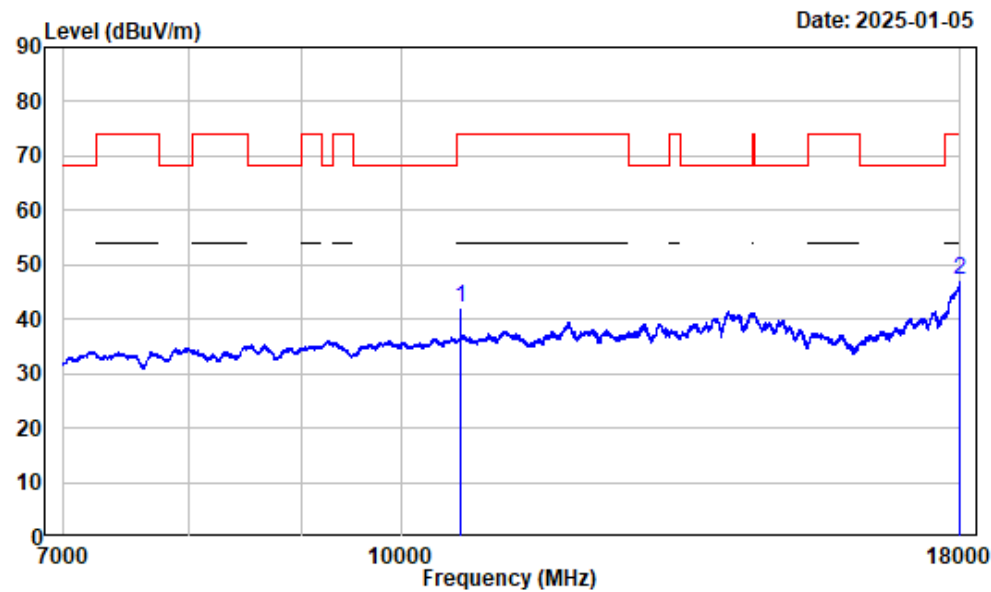

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	2.59	39.66	42.25	54.00	-11.75	Average
2	17998.630	13.19	33.88	47.07	54.00	-6.93	Average


1-7GHz_Horizontal_802.11ac-VHT40_5310MHz

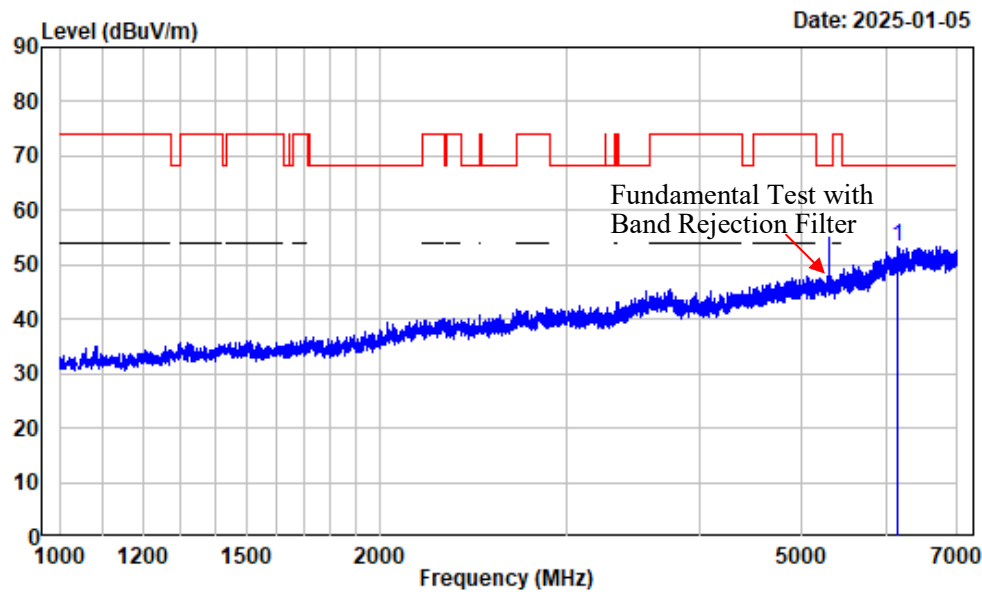

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6153.144	-3.99	57.39	53.40	68.20	-14.80	Peak


1-7GHz_Vertical_802.11ac-VHT40_5310MHz

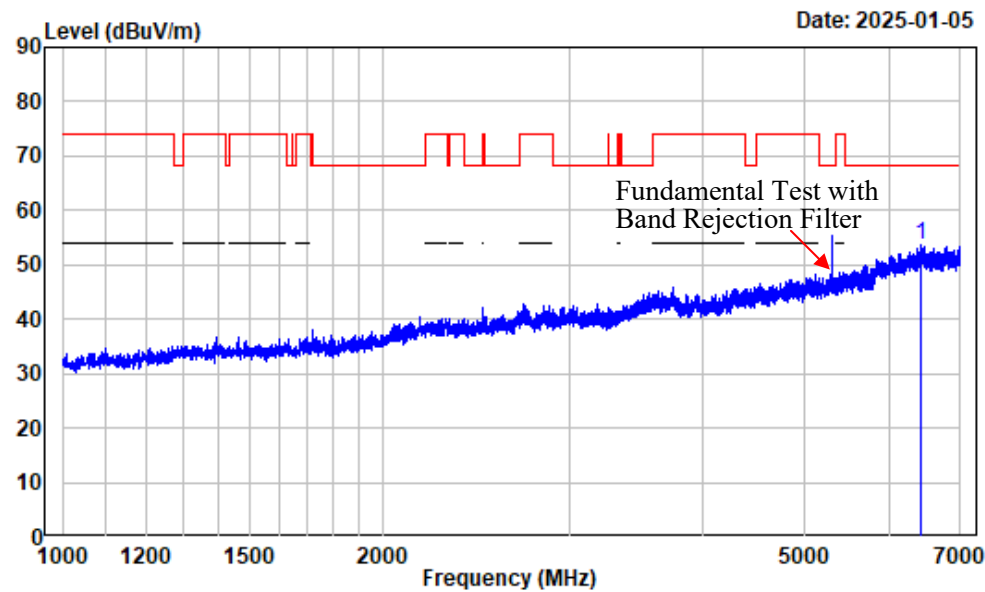

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6432.929	-2.88	56.50	53.62	68.20	-14.58	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT40_5310MHz

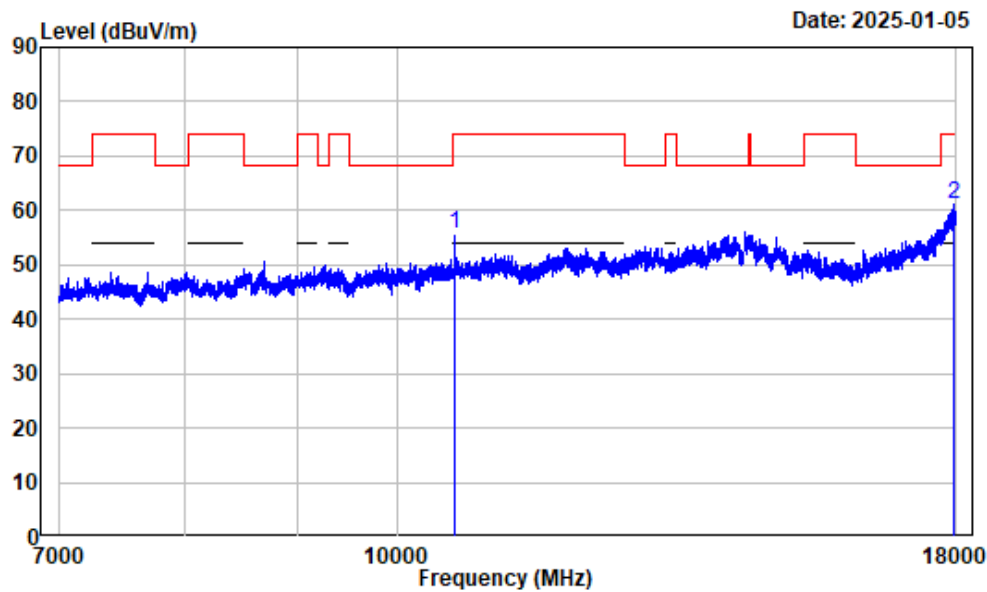

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	2.37	53.26	55.63	74.00	-18.37	Peak
2 17961.500	13.01	48.14	61.15	74.00	-12.85	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT40_5310MHz

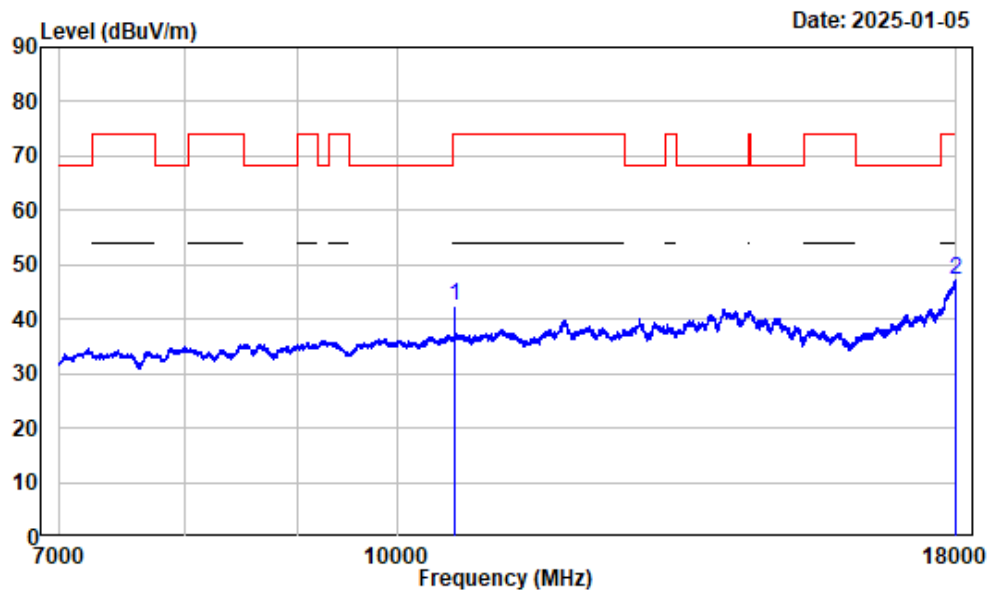

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	2.37	40.01	42.38	54.00	-11.62	Average
2 17991.750	13.16	34.18	47.34	54.00	-6.66	Average


7-18GHz_Vertical_Peak_802.11ac-VHT40_5310MHz

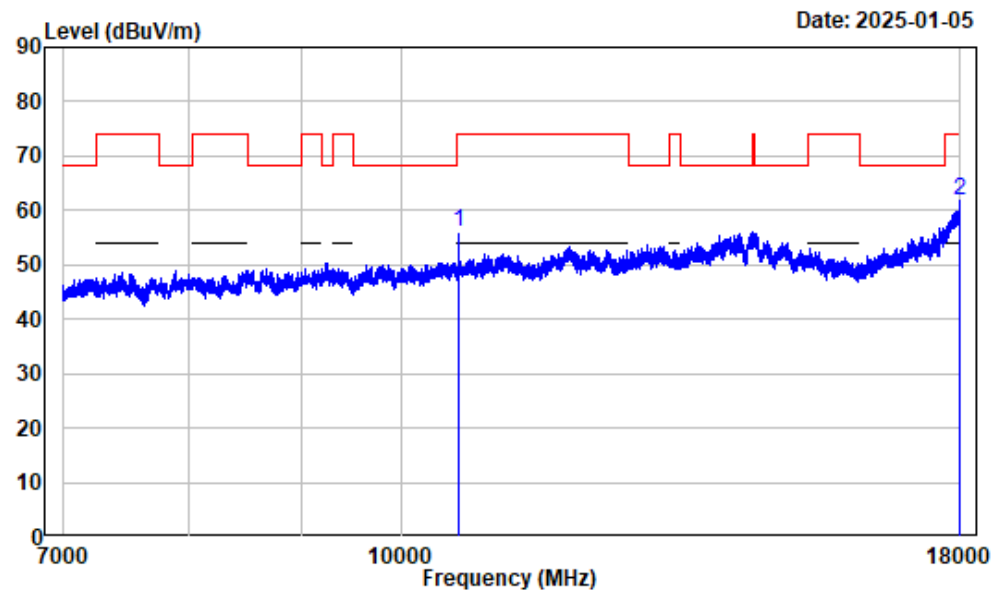

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	2.37	53.54	55.91	74.00	-18.09	Peak
2 17978.000	13.10	48.68	61.78	74.00	-12.22	Peak


7-18GHz_Vertical_Average_802.11ac-VHT40_5310MHz

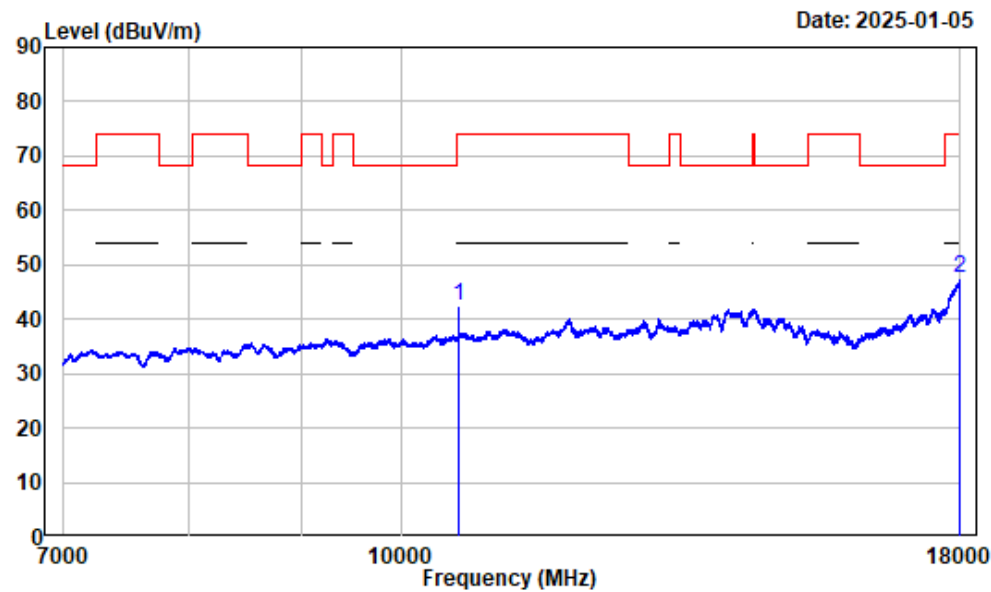

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	2.37	40.19	42.56	54.00	-11.44	Average
2 17991.750	13.16	34.25	47.41	54.00	-6.59	Average


1-7GHz_Horizontal_802.11ac-VHT80_5290MHz

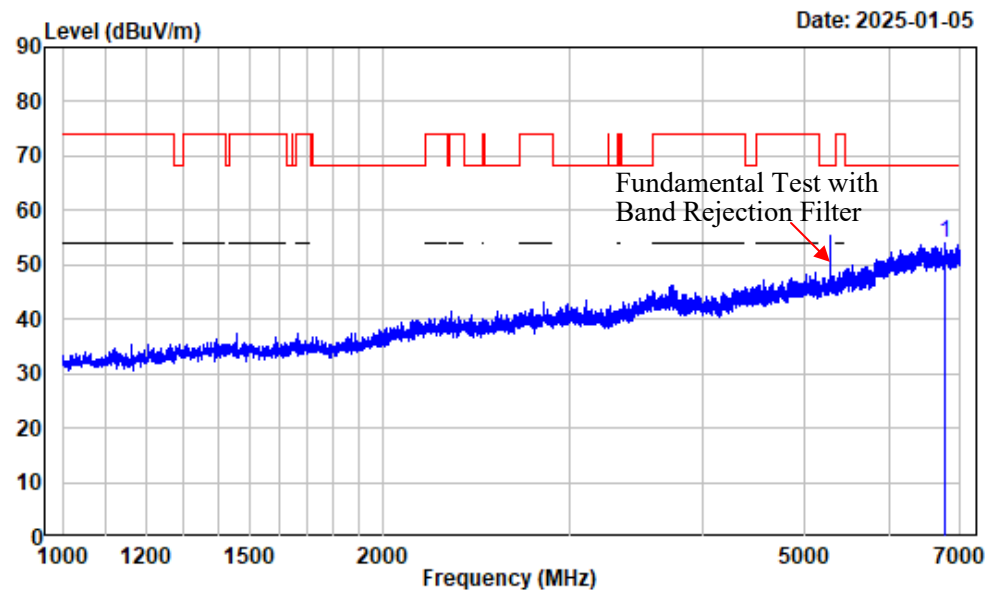

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6783.973	-3.31	57.37	54.06	68.20	-14.14	Peak


1-7GHz_Vertical_802.11ac-VHT80_5290MHz

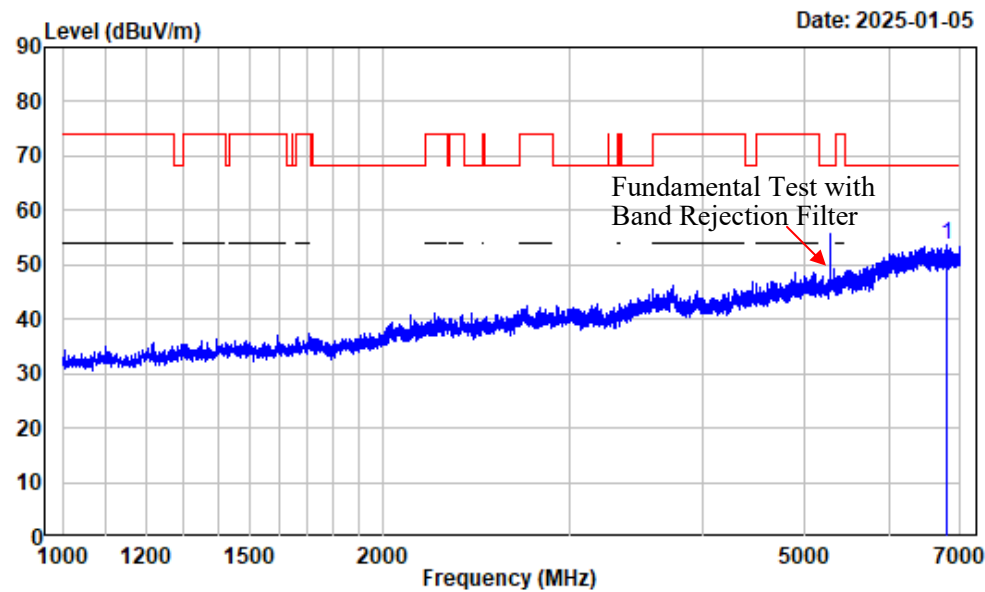

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6800.475	-3.36	56.93	53.57	68.20	-14.63	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT80_5290MHz

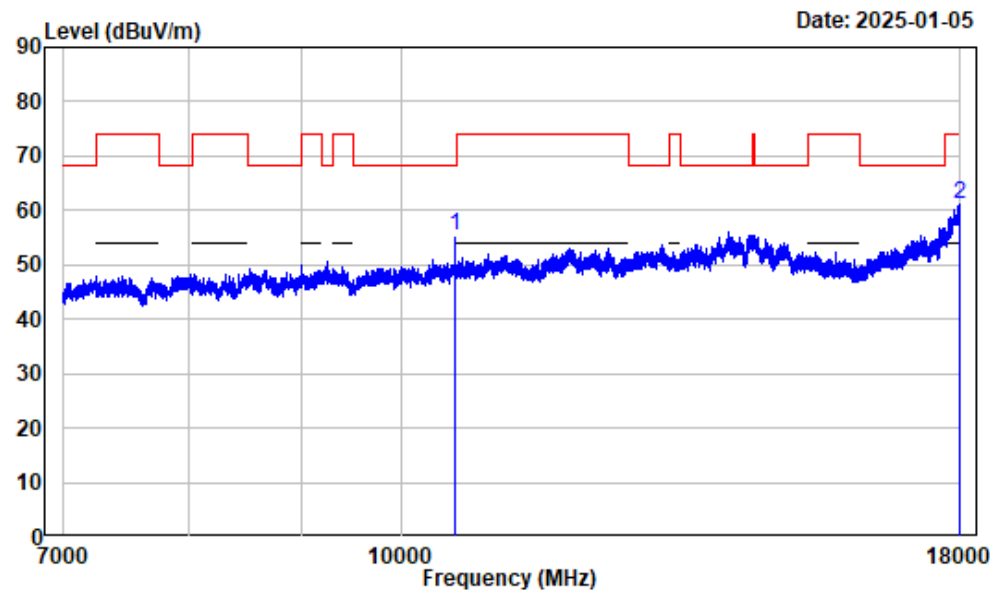

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10580.000	2.18	53.01	55.19	68.20	-13.01	Peak
2	17998.630	13.19	47.82	61.01	74.00	-12.99	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT80_5290MHz

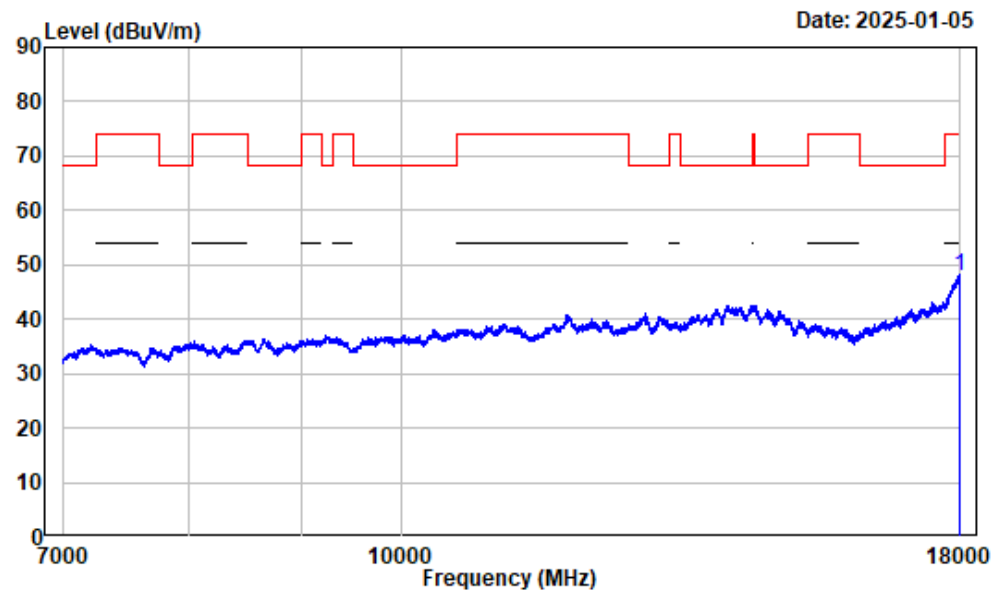

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17991.750	13.16	34.73	47.89	54.00	-6.11	Average


7-18GHz_Vertical_Peak_802.11ac-VHT80_5290MHz

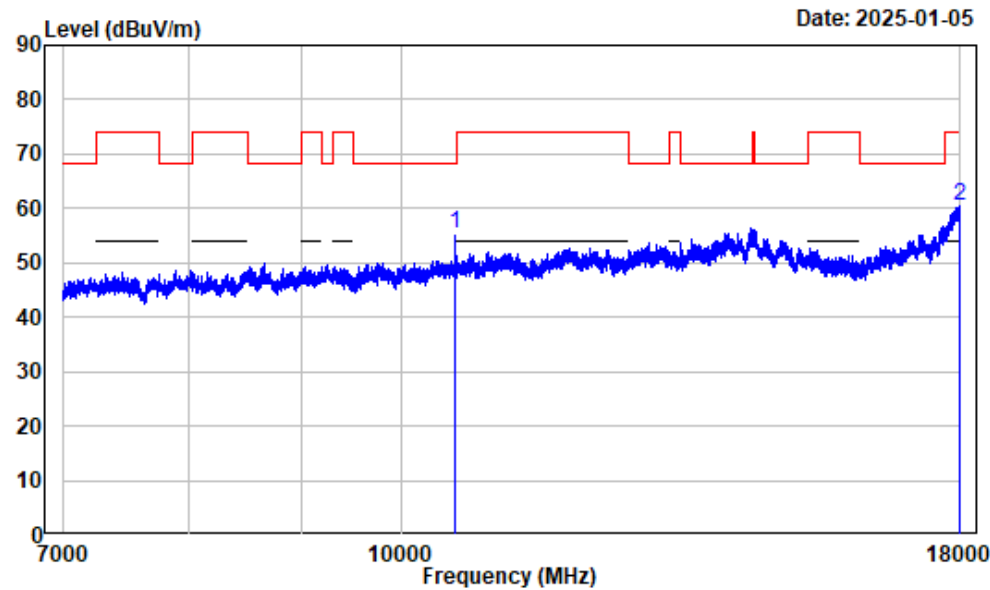

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq		Factor	Read Level	Level	Limit	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10580.000	2.18	53.34	55.52	68.20	-12.68	Peak
2	17994.500	13.17	47.17	60.34	74.00	-13.66	Peak


7-18GHz_Vertical_Average_802.11ac-VHT80_5290MHz

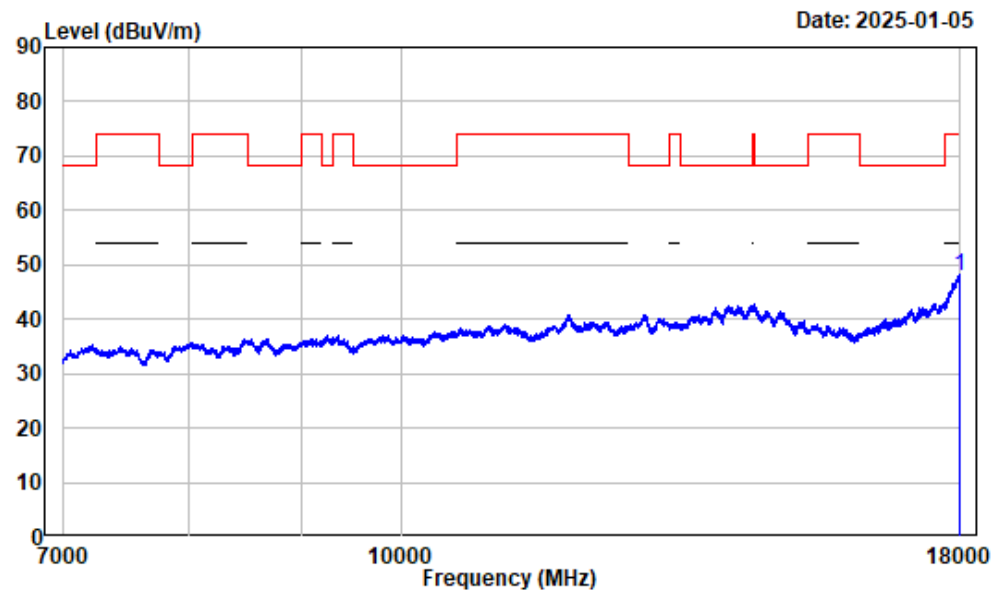

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq		Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17990.370		13.15	34.62	47.77	54.00	-6.23	Average


1-7GHz_Horizontal_802.11a_5700MHz

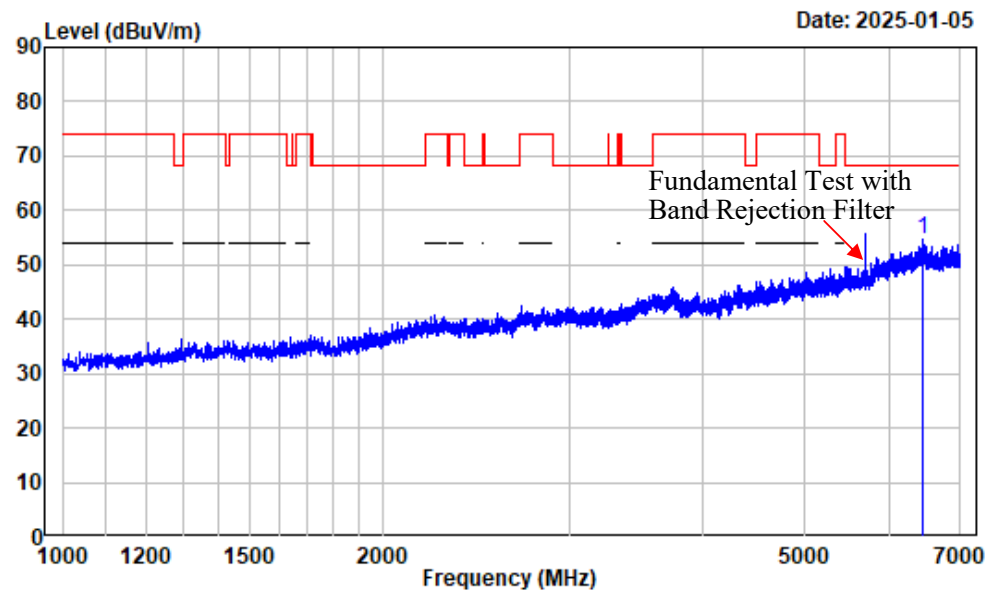

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6465.933	-2.89	57.67	54.78	68.20	-13.42	Peak


1-7GHz_Vertical_802.11a_5700MHz

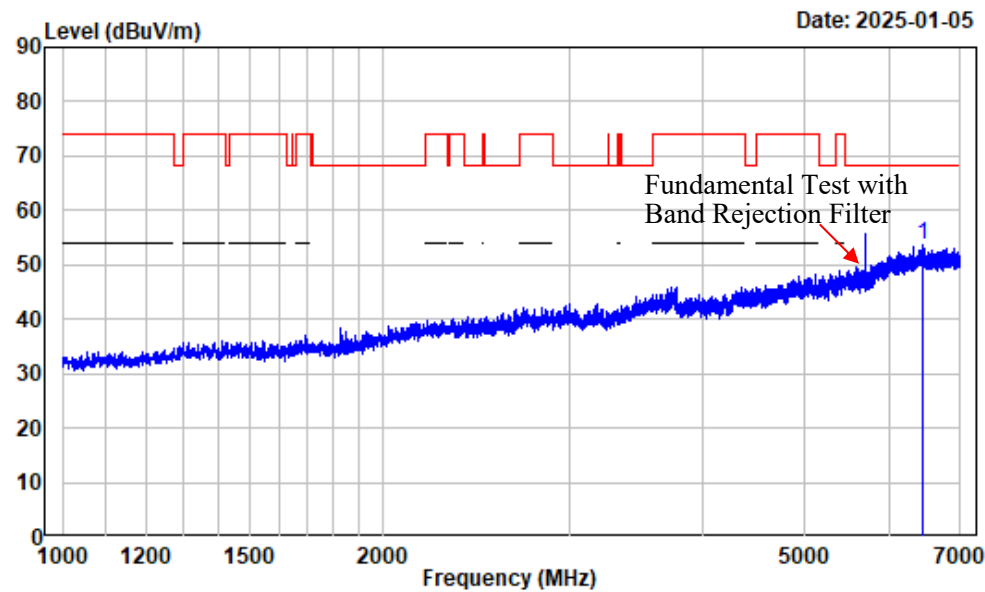

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6447.931	-2.88	56.51	53.63	68.20	-14.57	Peak


7-18GHz_Horizontal_Peak_802.11a_5700MHz

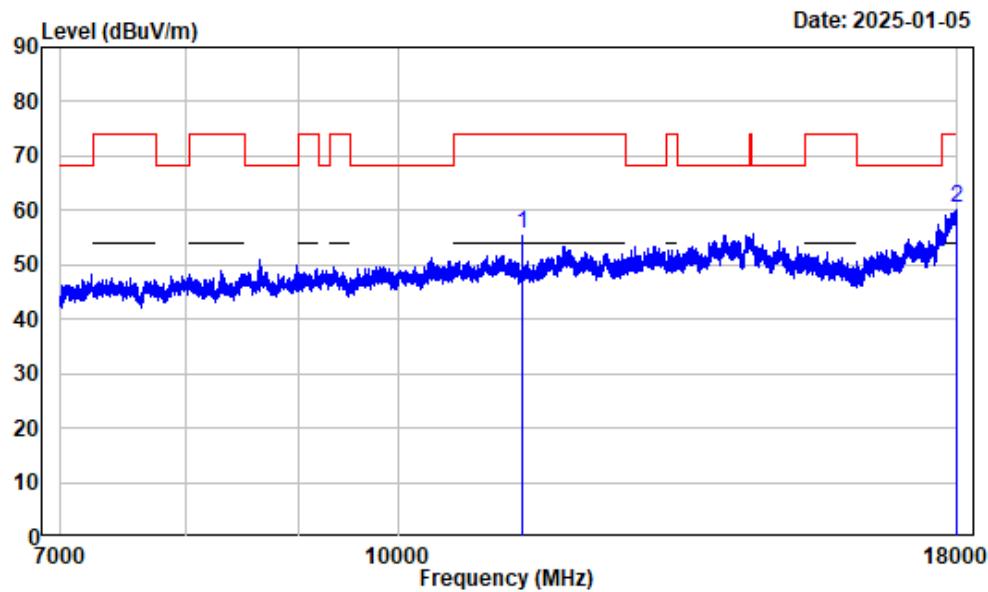

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	52.38	55.70	74.00	-18.30	Peak
2	17998.630	13.20	47.33	60.53	74.00	-13.47	Peak


7-18GHz_Horizontal_Average_802.11a_5700MHz

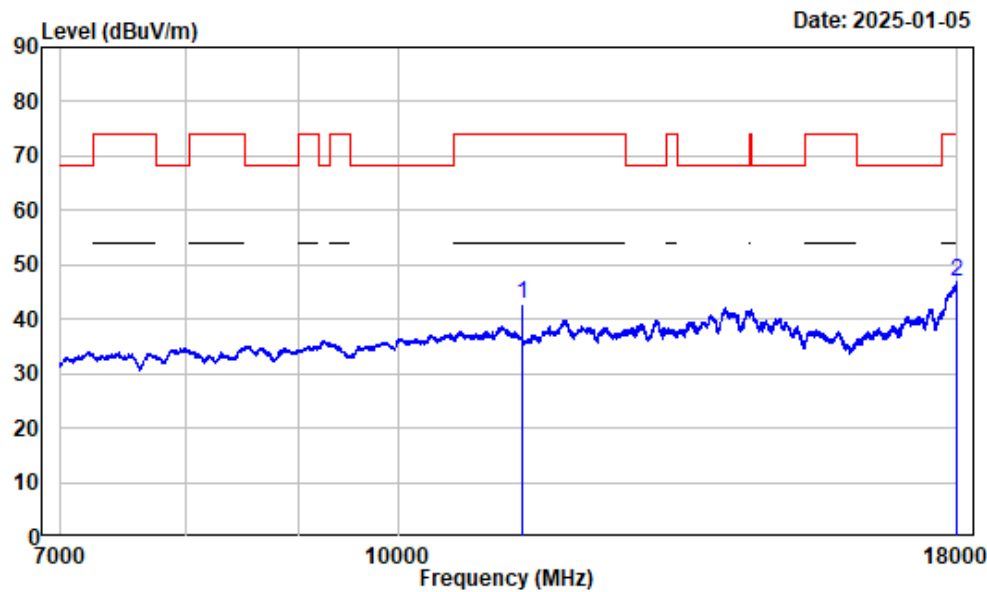

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	39.41	42.73	54.00	-11.27	Average
2	17983.500	13.11	33.65	46.76	54.00	-7.24	Average


7-18GHz_Vertical_Peak_802.11a_5700MHz

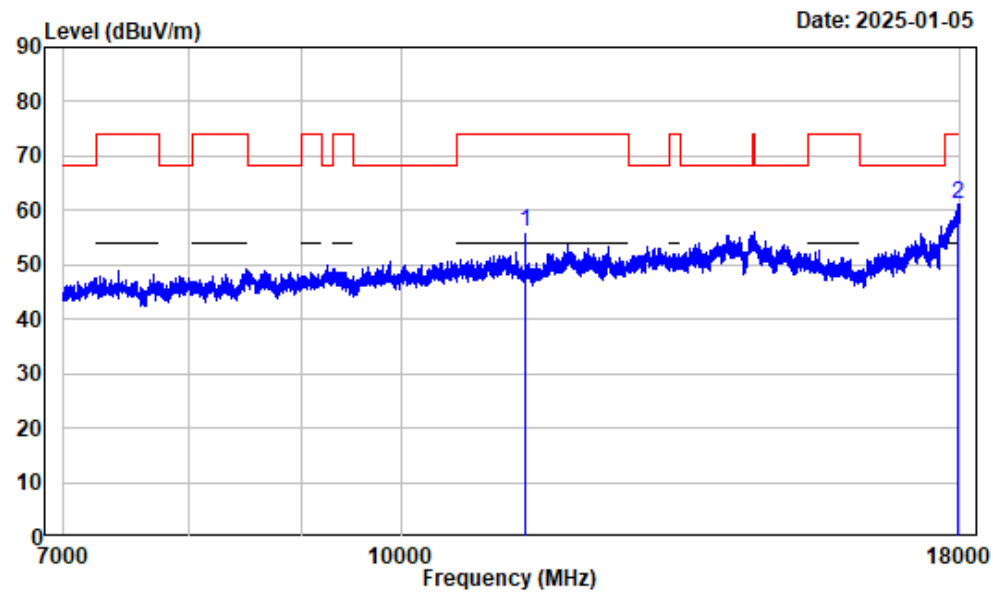

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	52.75	56.07	74.00	-17.93	Peak
2	17961.500	13.01	48.03	61.04	74.00	-12.96	Peak


7-18GHz_Vertical_Average_802.11a_5700MHz

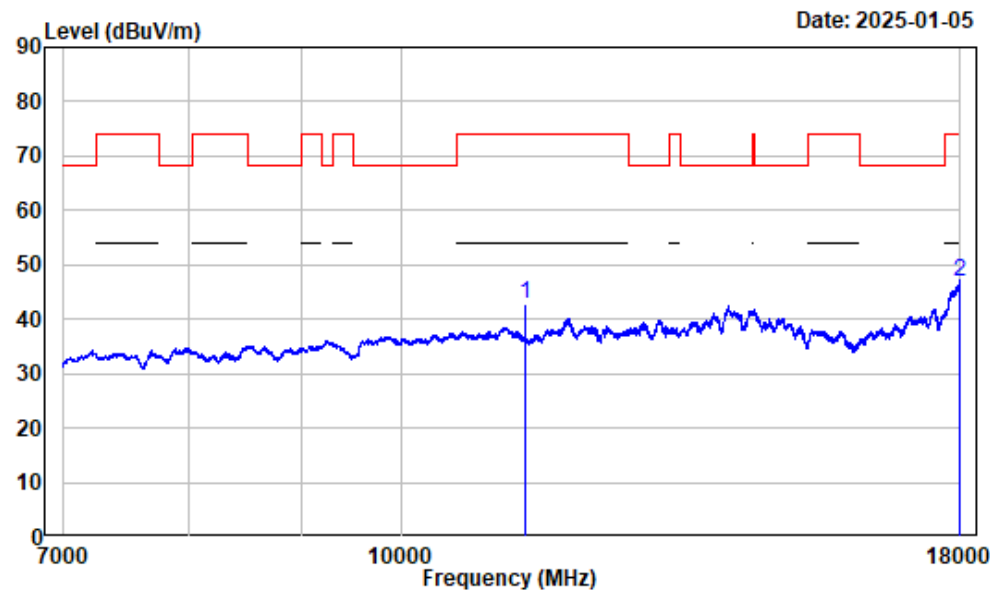

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	39.59	42.91	54.00	-11.09	Average
2	17995.880	13.18	33.78	46.96	54.00	-7.04	Average


1-7GHz_Horizontal_802.11ac-VHT20_5700MHz

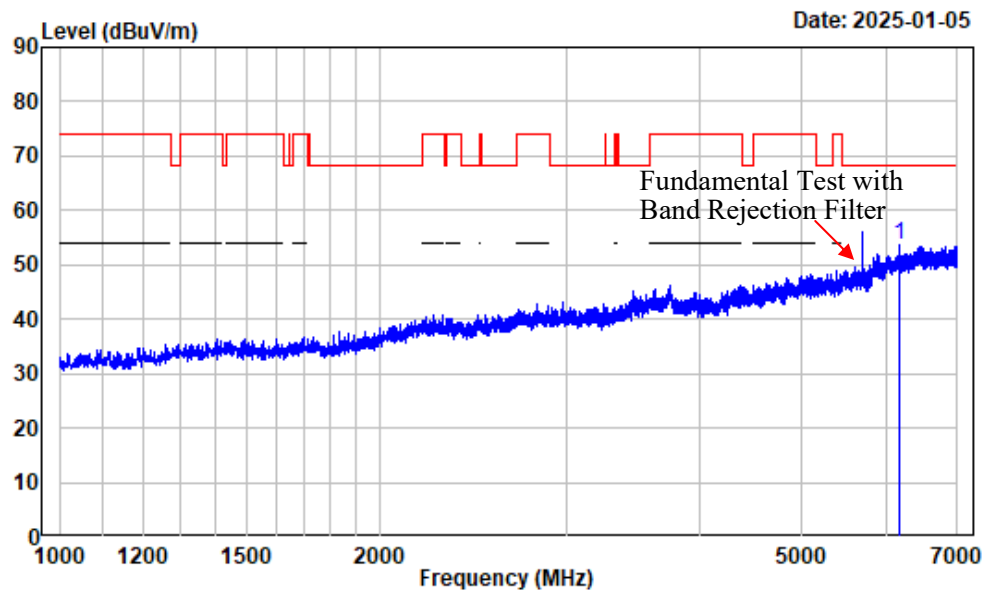

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6180.147	-4.16	57.80	53.64	68.20	-14.56	Peak


1-7GHz_Vertical_802.11ac-VHT20_5700MHz

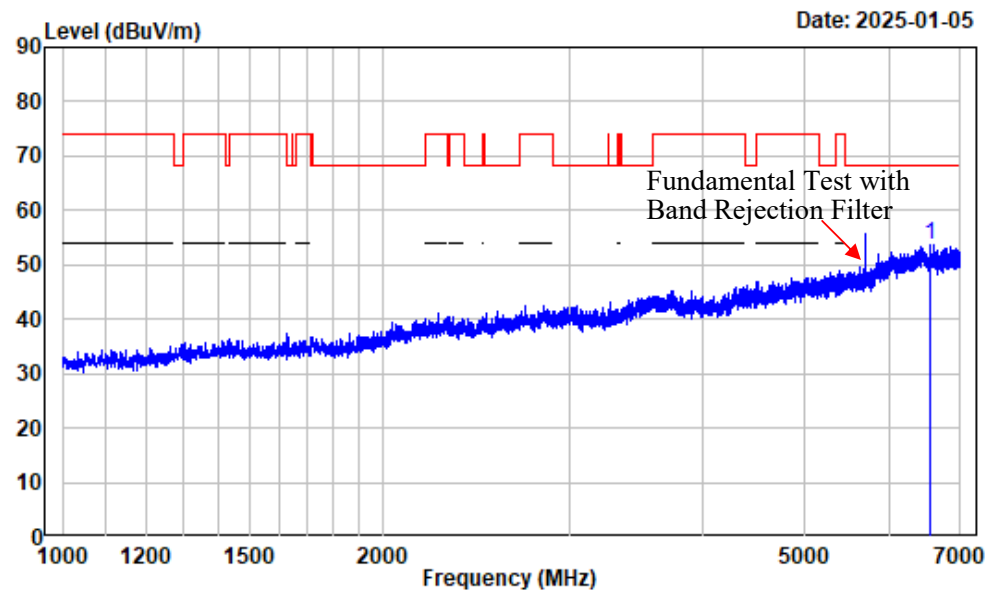

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6561.195	-3.06	56.78	53.72	68.20	-14.48	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT20_5700MHz

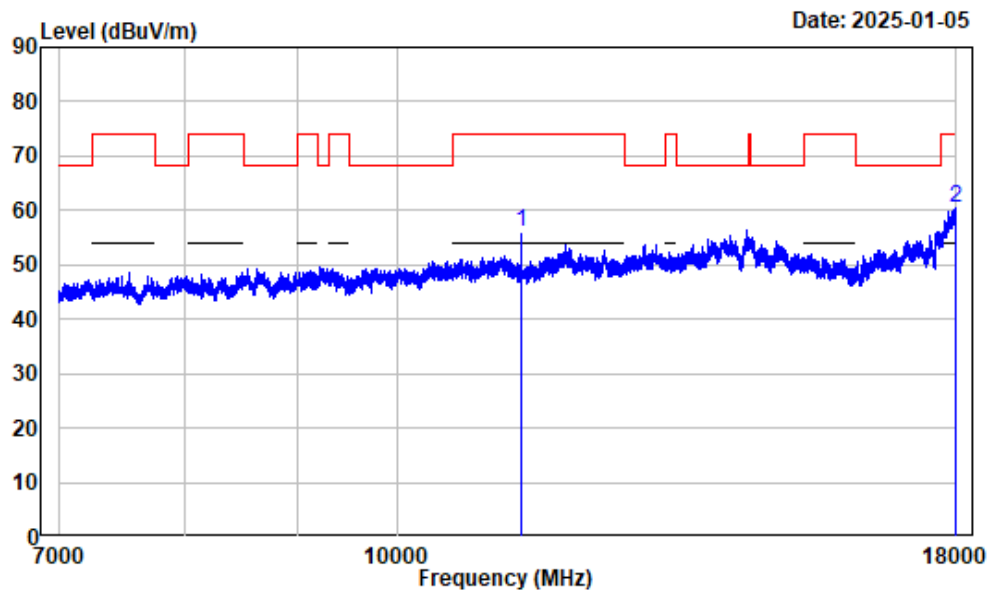

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	52.73	56.05	74.00	-17.95	Peak
2	17984.870	13.12	47.28	60.40	74.00	-13.60	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT20_5700MHz

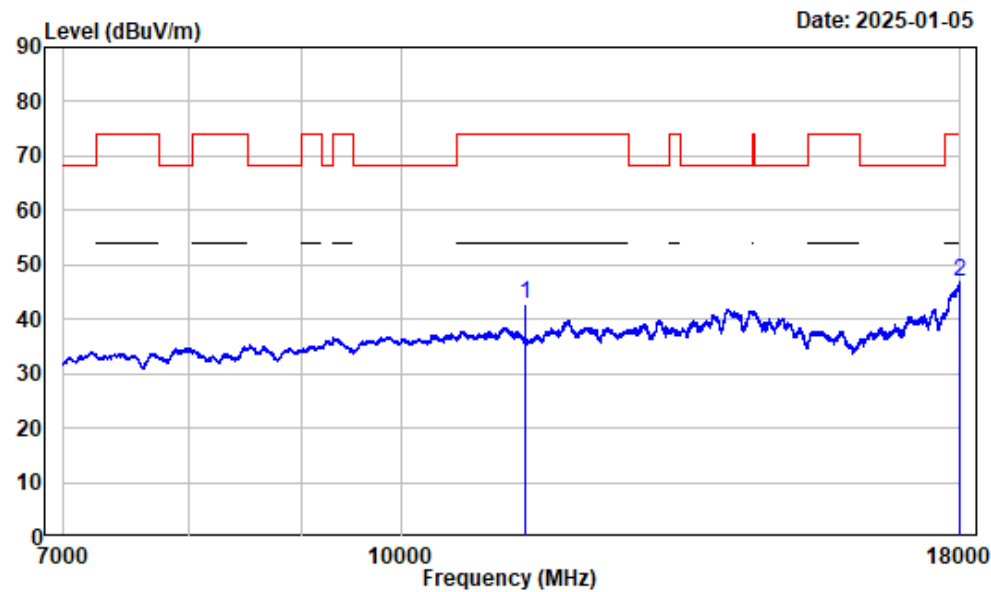

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
			dB/m	dBuV	dBuV/m	dBuV/m	dB
1	11400.000	3.32	39.59	42.91	54.00	-11.09	Average
2	17991.750	13.16	33.61	46.77	54.00	-7.23	Average


7-18GHz_Vertical_Peak_802.11ac-VHT20_5700MHz

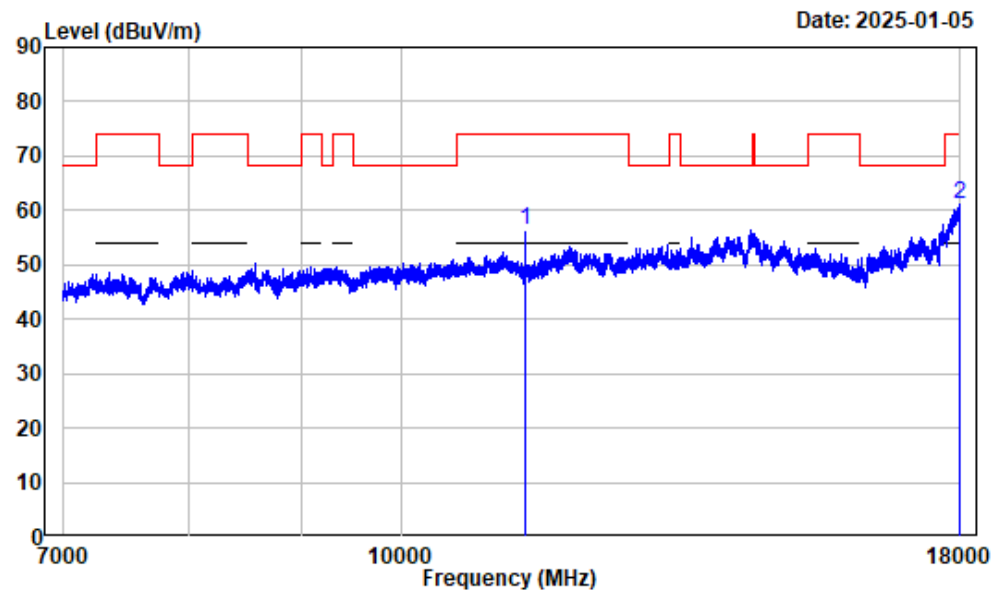

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	53.02	56.34	74.00	-17.66	Peak
2 17993.130	13.17	47.91	61.08	74.00	-12.92	Peak


7-18GHz_Vertical_Average_802.11ac-VHT20_5700MHz

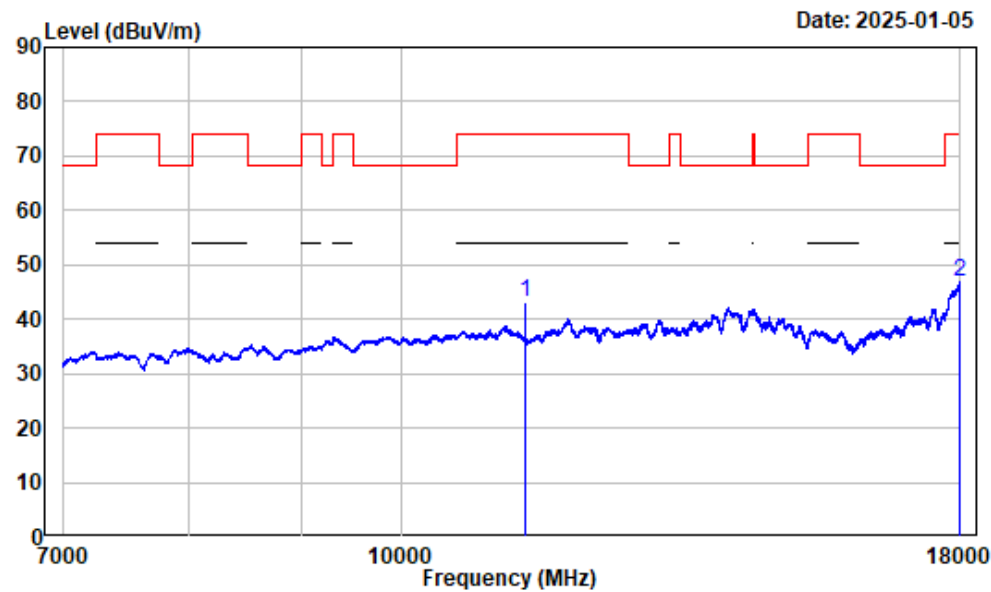

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	39.80	43.12	54.00	-10.88	Average
2	17995.880	13.18	33.70	46.88	54.00	-7.12	Average


1-7GHz_Horizontal_802.11ac-VHT40_5670MHz

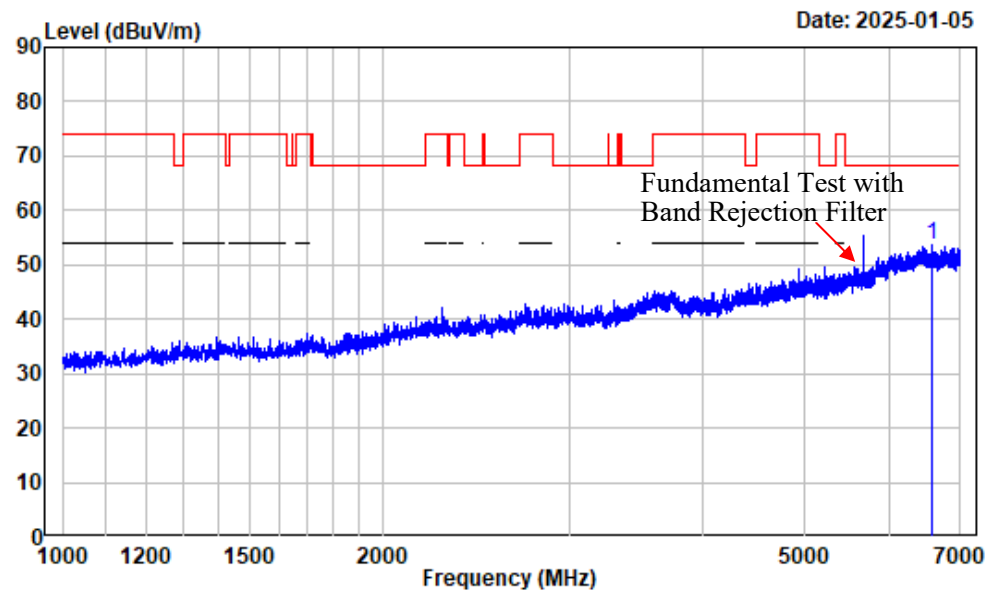

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

Freq Factor		Read Level	Limit Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6591.949	-3.12	56.62	53.50	68.20	-14.70 Peak


1-7GHz_Vertical_802.11ac-VHT40_5670MHz

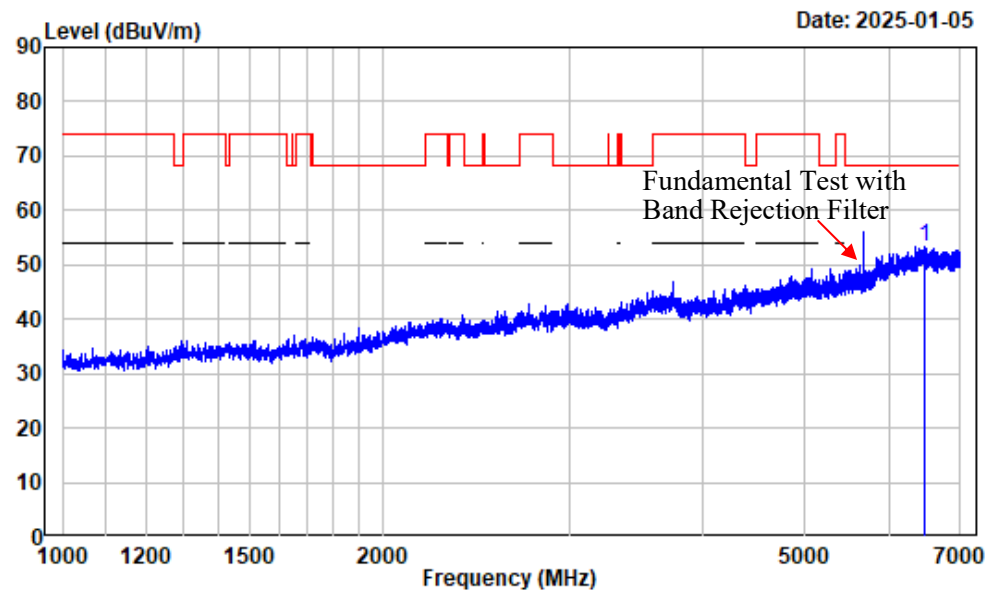

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6471.184	-2.90	56.25	53.35	68.20	-14.85	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT40_5670MHz

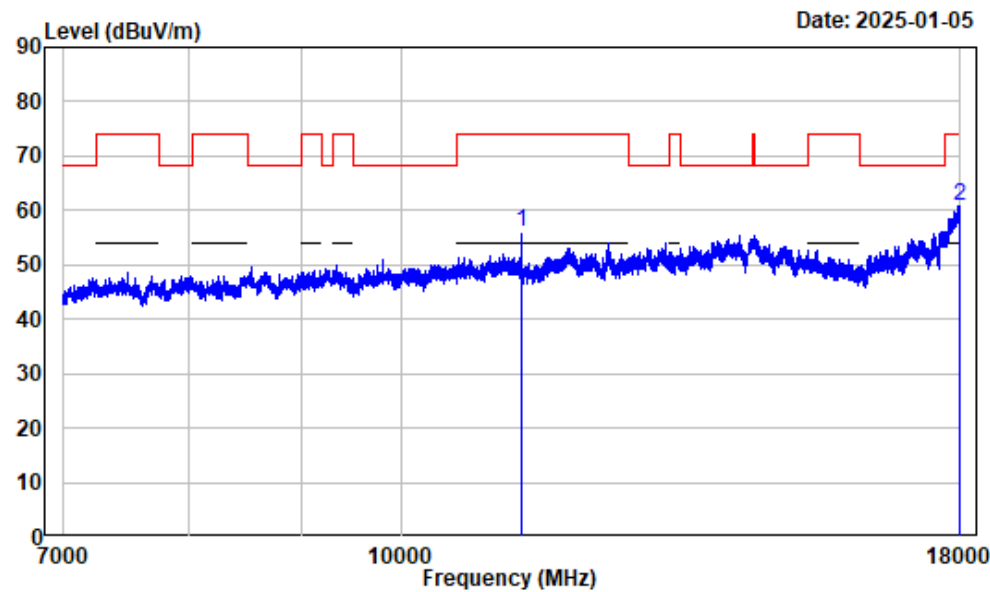

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	3.46	52.57	56.03	74.00	-17.97	Peak
2	17982.120	13.10	47.67	60.77	74.00	-13.23	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT40_5670MHz

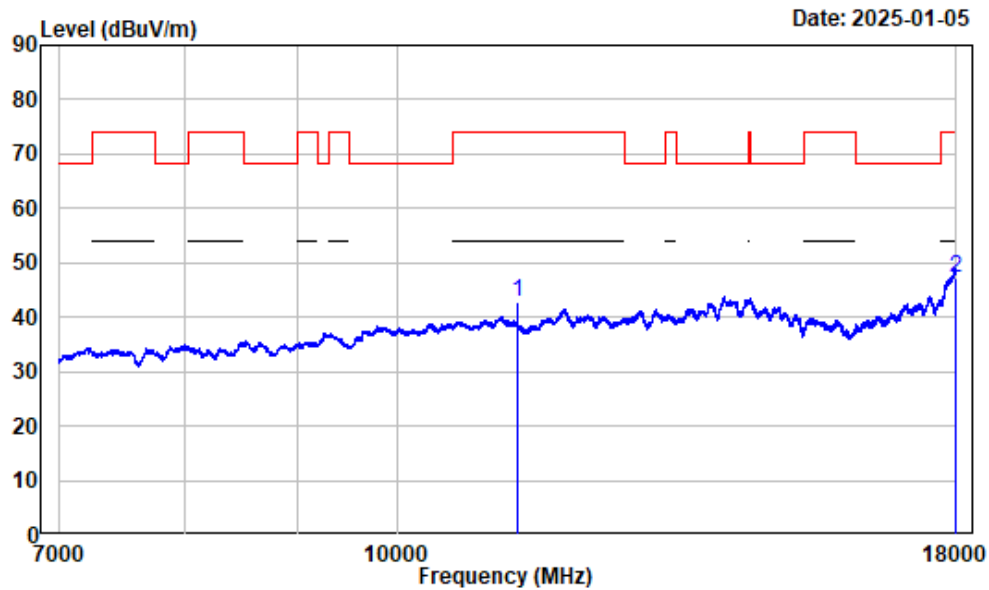

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	3.46	39.33	42.79	54.00	-11.21	Average
2	17997.780	13.20	33.89	47.09	54.00	-6.91	Average


7-18GHz_Vertical_Peak_802.11ac-VHT40_5670MHz

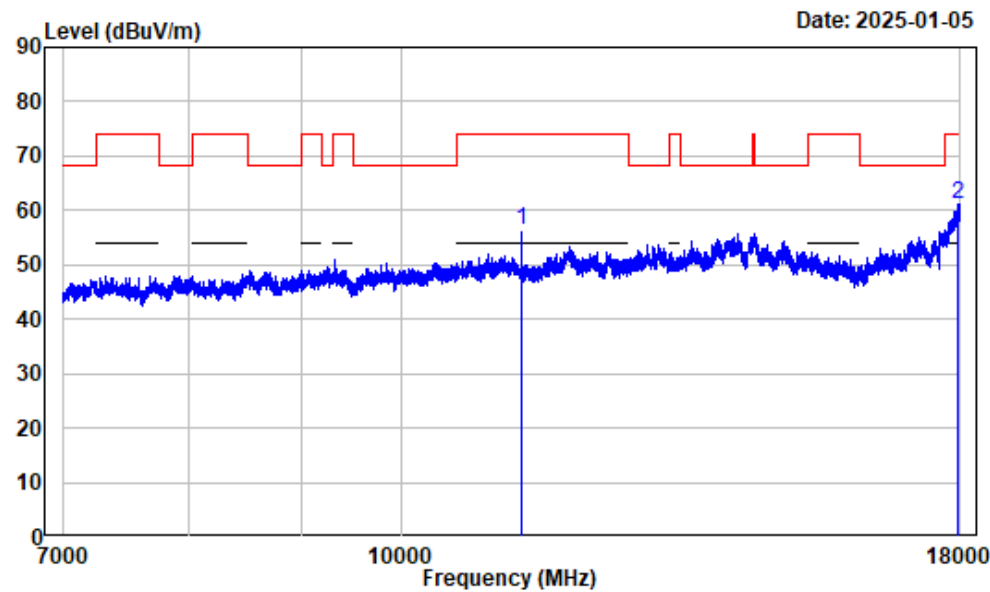

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

Freq		Factor	Read Level	Level	Limit	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	3.46	52.85	56.31	74.00	-17.69	Peak
2	17951.870	12.96	48.24	61.20	74.00	-12.80	Peak


7-18GHz_Vertical_Average_802.11ac-VHT40_5670MHz

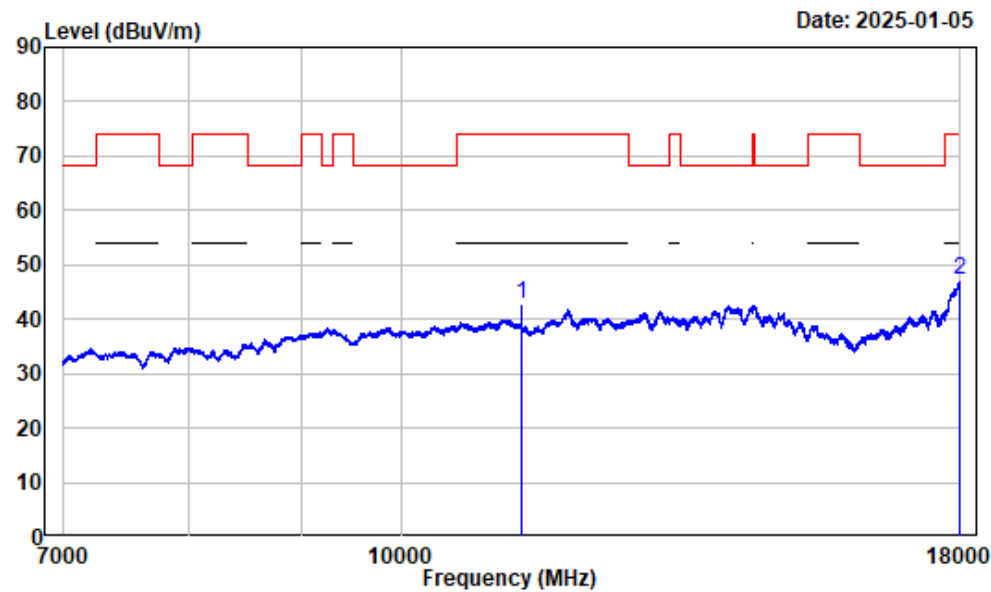

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	3.46	39.49	42.95	54.00	-11.05	Average
2	17993.130	13.17	34.06	47.23	54.00	-6.77	Average


1-7GHz_Horizontal_802.11ac-VHT80_5530MHz

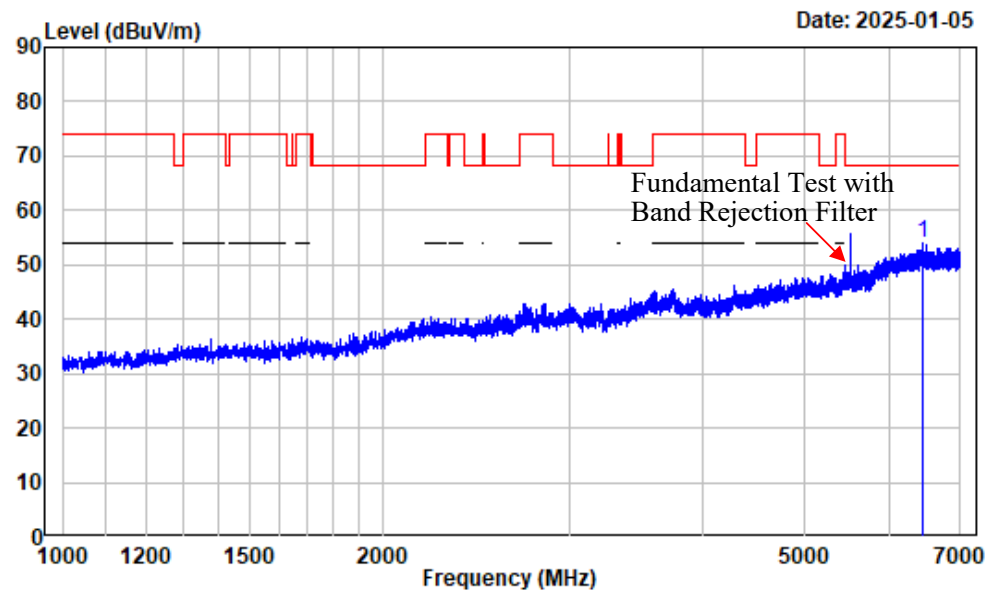

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6462.183	-2.89	56.81	53.92	68.20	-14.28	Peak


1-7GHz_Vertical_802.11ac-VHT80_5530MHz

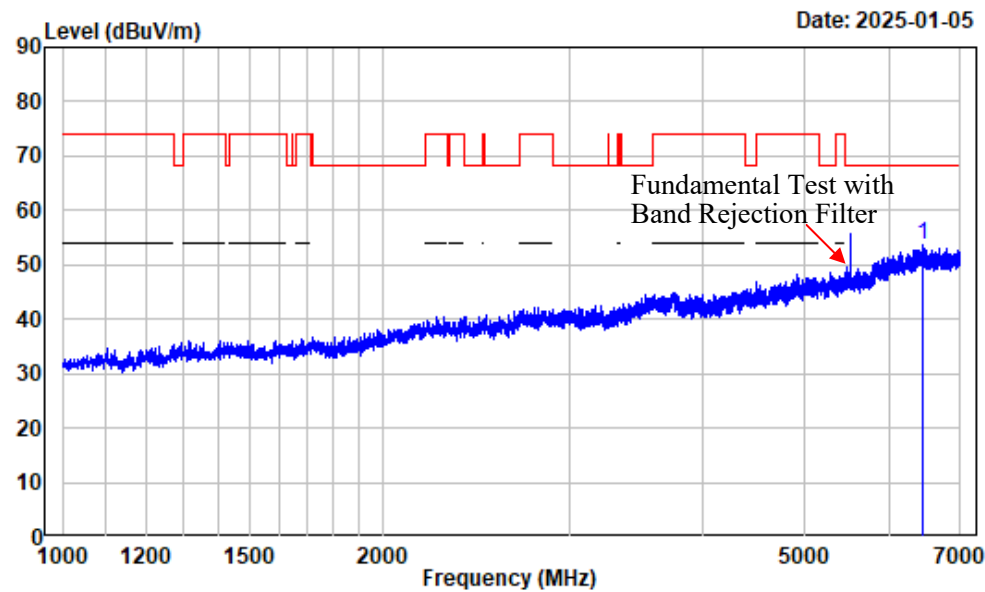

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6456.182	-2.88	56.45	53.57	68.20	-14.63	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT80_5530MHz

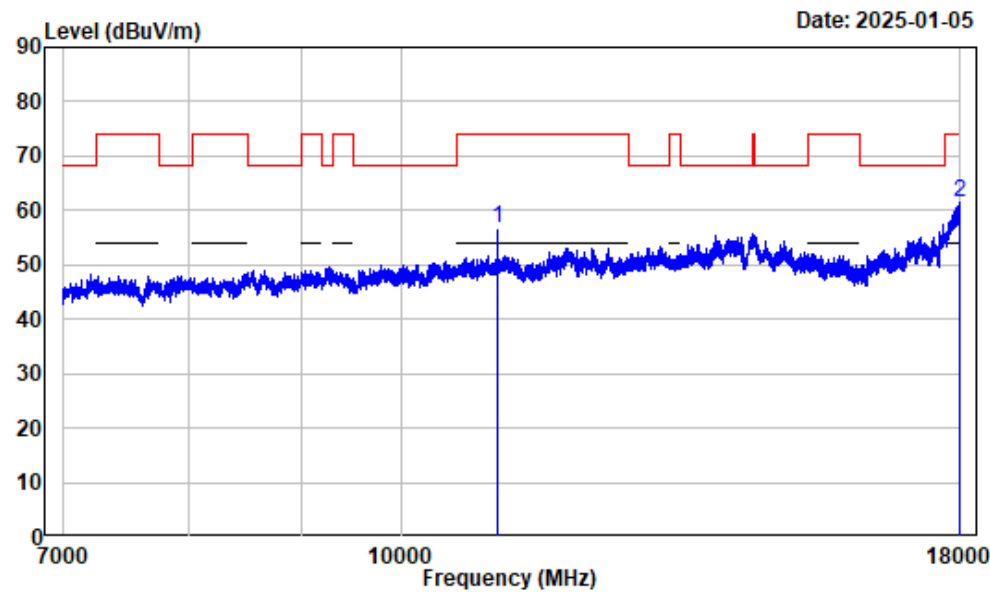

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.71	52.93	56.64	74.00	-17.36	Peak
2	17997.250	13.19	48.12	61.31	74.00	-12.69	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT80_5530MHz

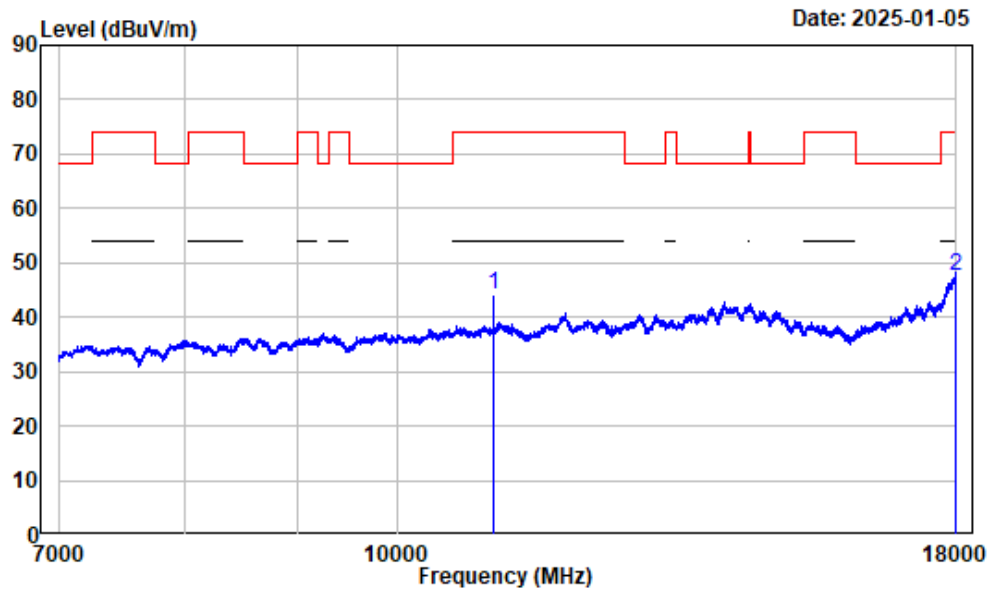

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.71	40.38	44.09	54.00	-9.91	Average
2	17998.630	13.19	34.25	47.44	54.00	-6.56	Average


7-18GHz_Vertical_Peak_802.11ac-VHT80_5530MHz

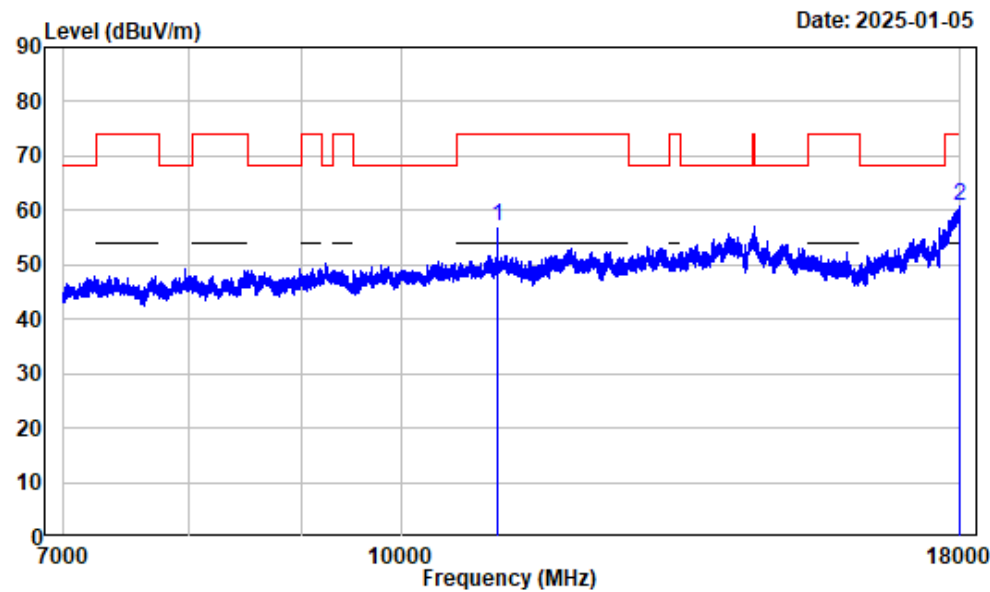

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.71	53.27	56.98	74.00	-17.02	Peak
2	17991.750	13.16	47.69	60.85	74.00	-13.15	Peak


7-18GHz_Vertical_Average_802.11ac-VHT80_5530MHz

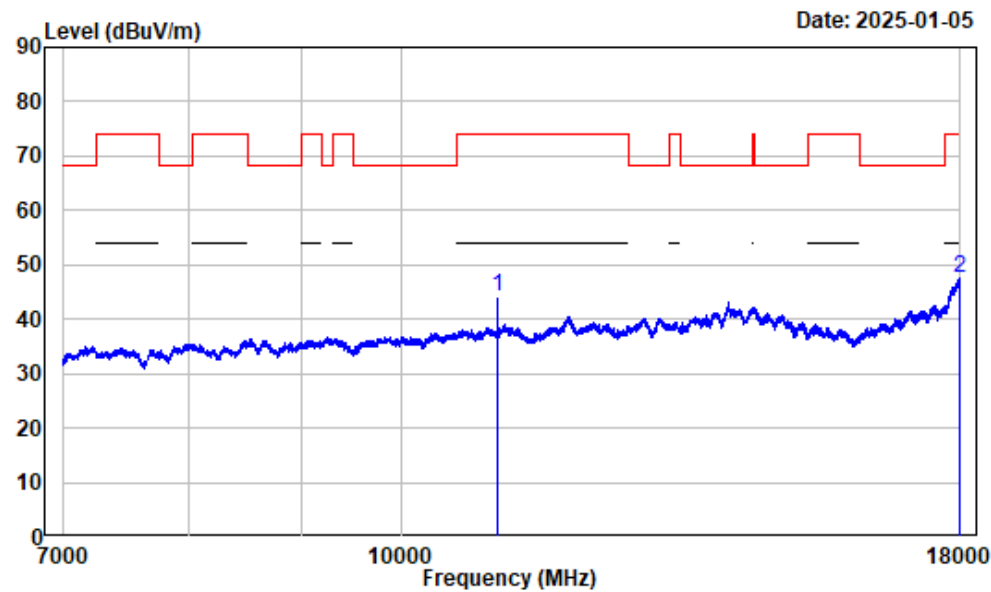

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq		Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.71	40.56	44.27	54.00	-9.73	Average
2	17994.500	13.17	34.54	47.71	54.00	-6.29	Average


1-7GHz_Horizontal_802.11a_5825MHz

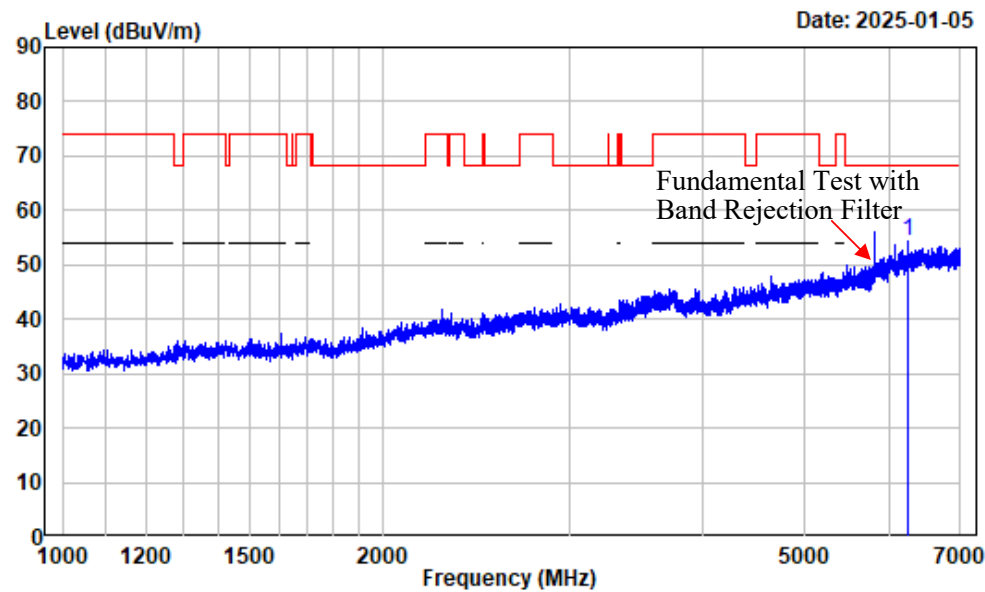

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6258.907	-3.81	58.10	54.29	68.20	-13.91	Peak


1-7GHz_Vertical_802.11a_5825MHz

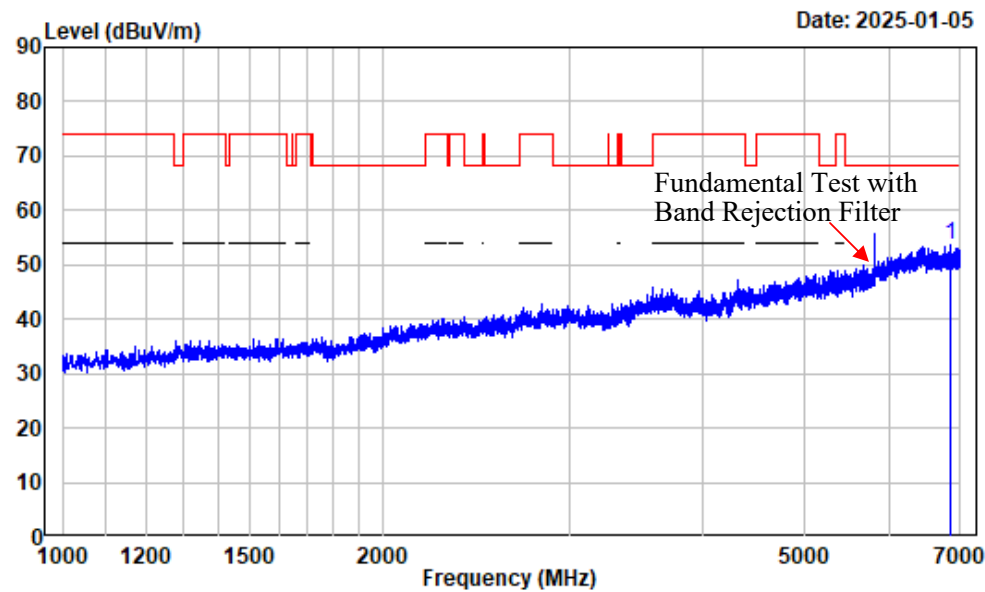

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6856.732	-3.11	56.77	53.66	68.20	-14.54	Peak


7-18GHz_Horizontal_Peak_802.11a_5825MHz

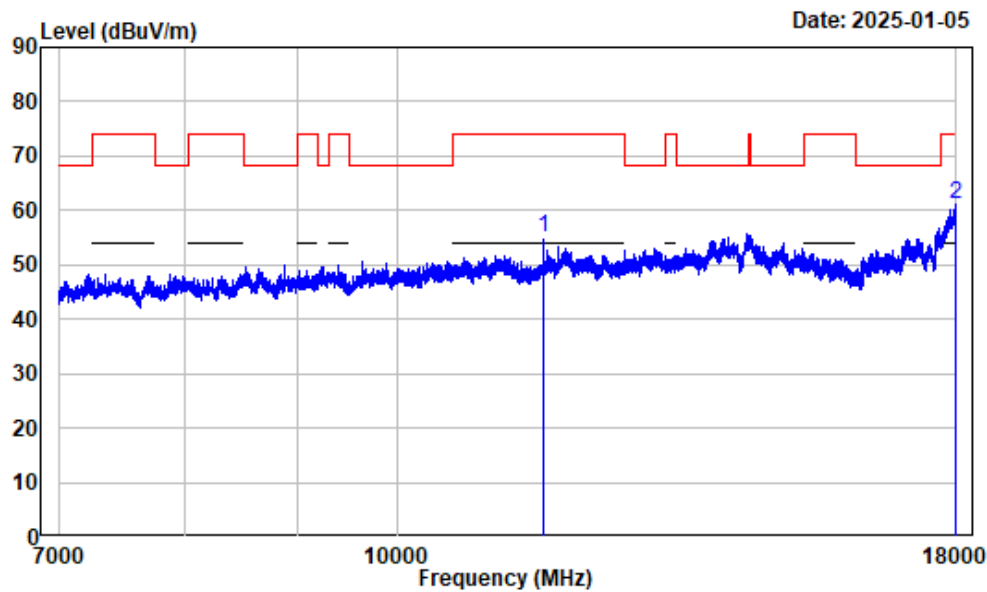

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	51.75	55.17	74.00	-18.83	Peak
2	17984.870	13.12	47.97	61.09	74.00	-12.91	Peak


7-18GHz_Horizontal_Average_802.11a_5825MHz

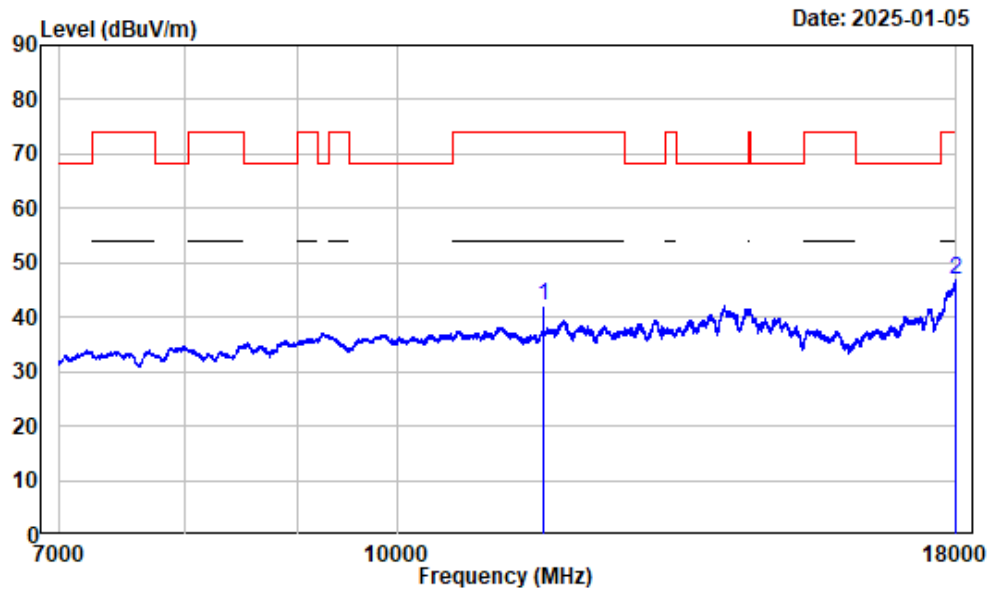

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	38.56	41.98	54.00	-12.02	Average
2	17993.130	13.17	33.80	46.97	54.00	-7.03	Average


7-18GHz_Vertical_Peak_802.11a_5825MHz

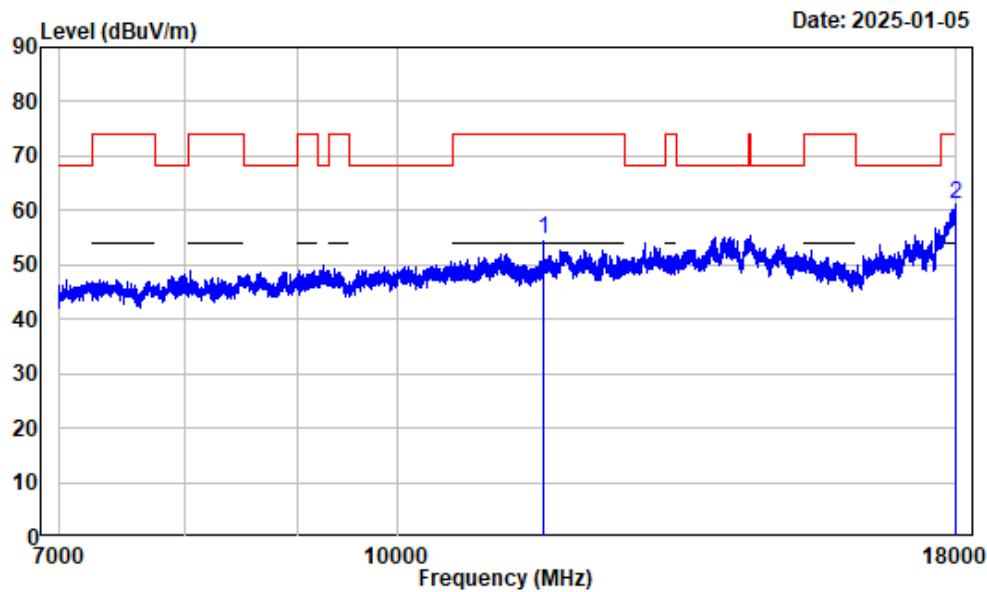

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	51.24	54.66	74.00	-19.34	Peak
2	17993.130	13.17	47.98	61.15	74.00	-12.85	Peak


7-18GHz_Vertical_Average_802.11a_5825MHz

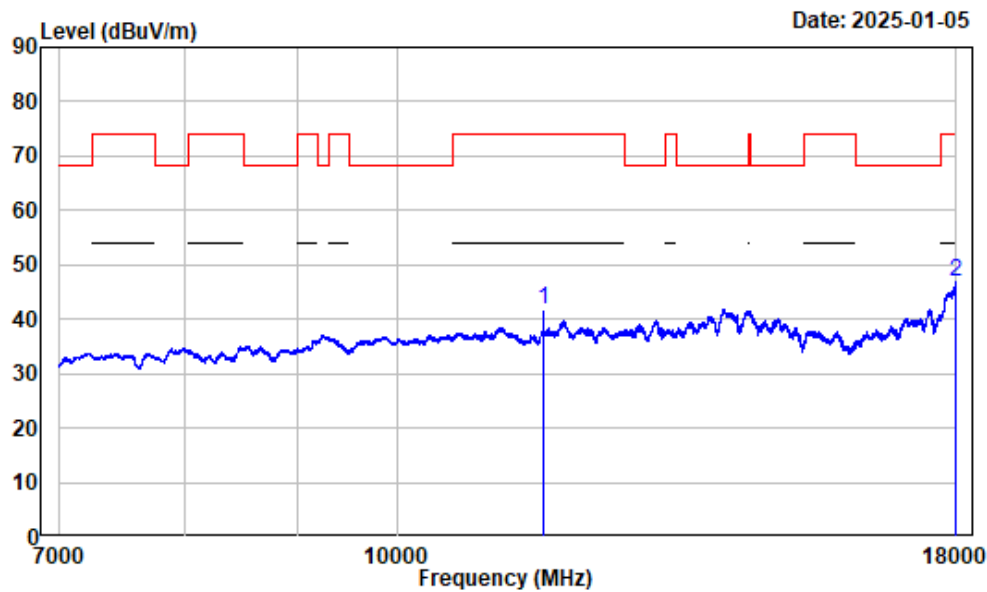

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	38.43	41.85	54.00	-12.15	Average
2 17986.250	13.12	33.70	46.82	54.00	-7.18	Average


1-7GHz_Horizontal_802.11ac-VHT20_5825MHz

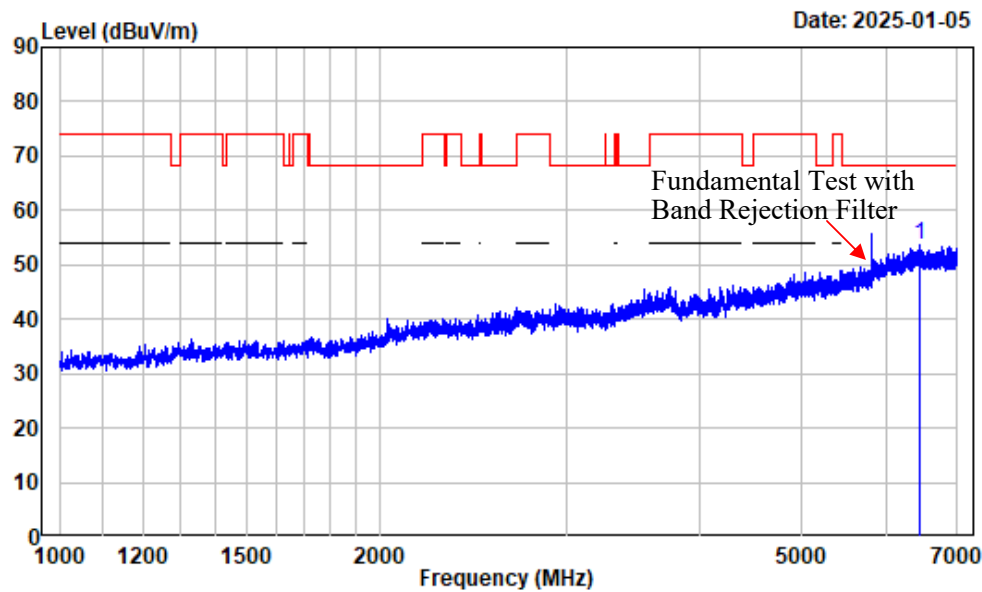

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6462.183	-2.89	56.41	53.52	68.20	-14.68	Peak


1-7GHz_Vertical_802.11ac-VHT20_5825MHz

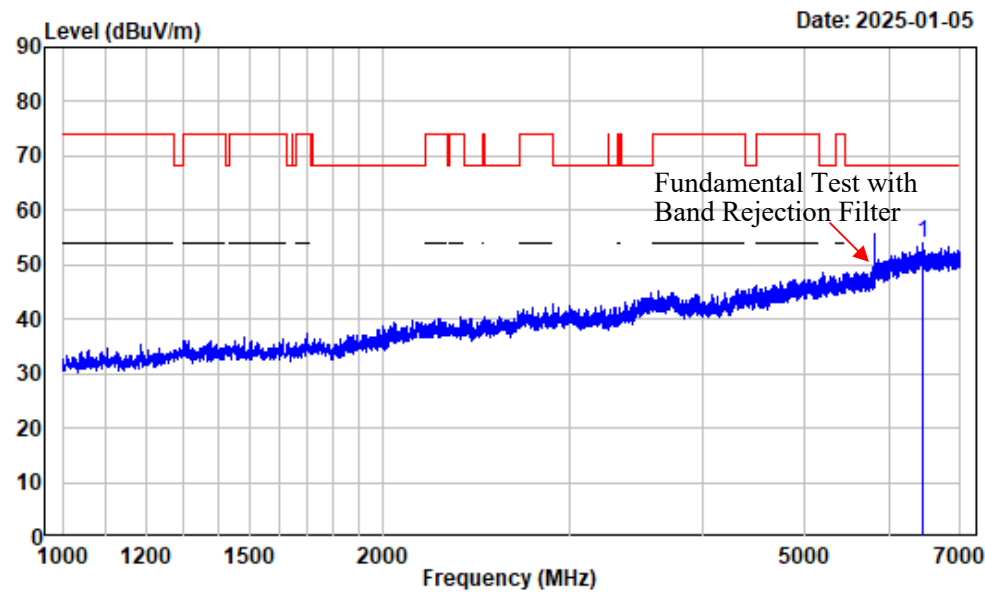

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6447.181	-2.87	56.94	54.07	68.20	-14.13	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT20_5825MHz

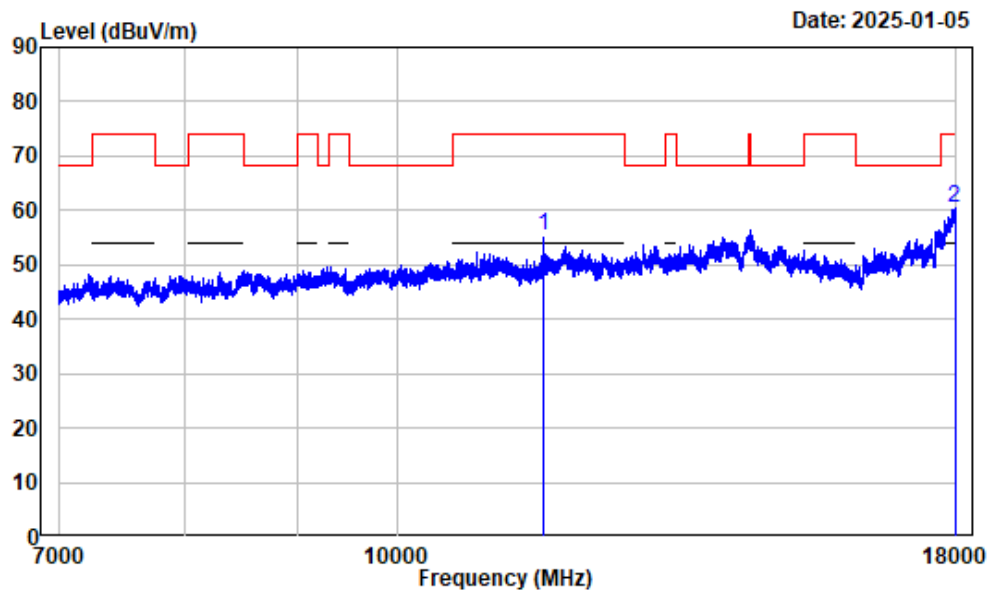

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	51.99	55.41	74.00	-18.59	Peak
2	17972.500	13.07	47.29	60.36	74.00	-13.64	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT20_5825MHz

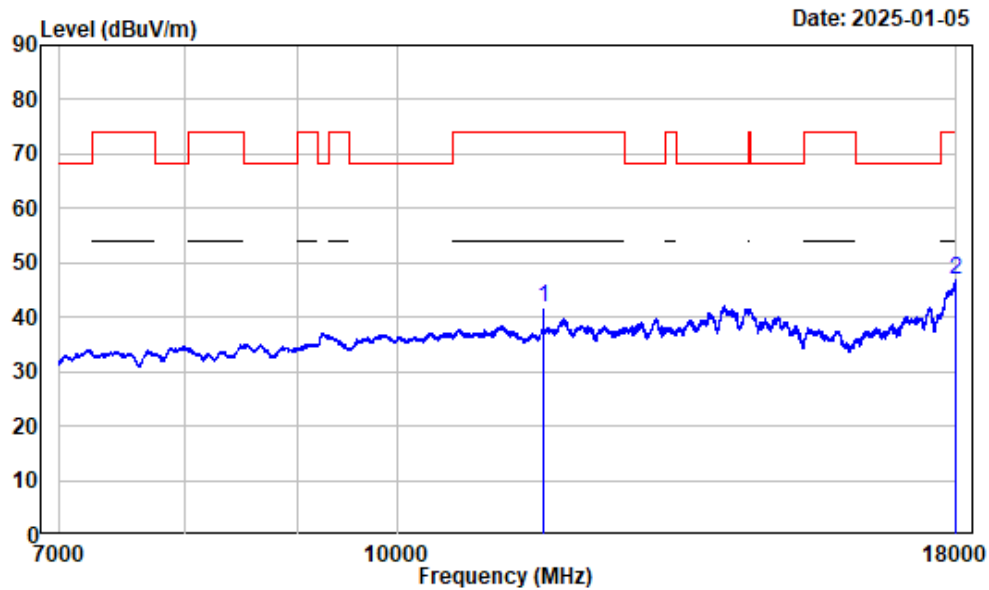

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	38.39	41.81	54.00	-12.19	Average
2	17995.880	13.18	33.75	46.93	54.00	-7.07	Average


7-18GHz_Vertical_Peak_802.11ac-VHT20_5825MHz

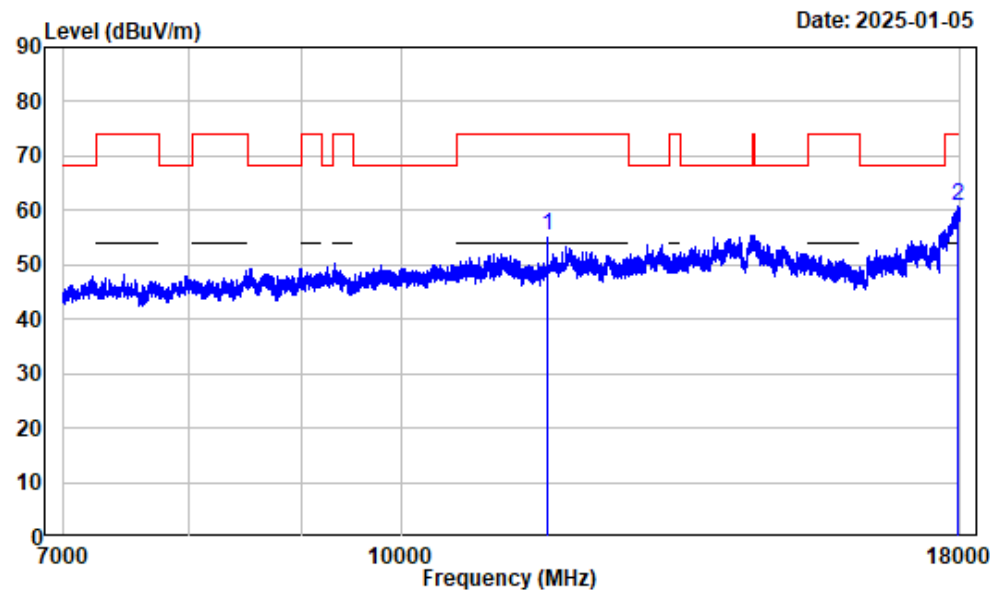

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	51.84	55.26	74.00	-18.74	Peak
2	17967.000	13.03	47.75	60.78	74.00	-13.22	Peak


7-18GHz_Vertical_Average_802.11ac-VHT20_5825MHz

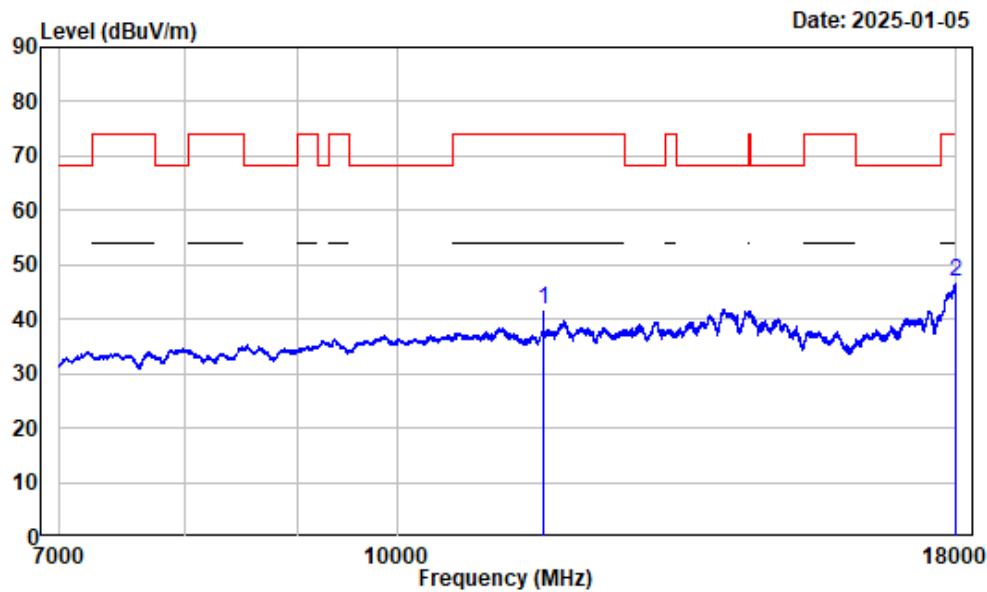

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	38.26	41.68	54.00	-12.32	Average
2 17998.630	13.19	33.60	46.79	54.00	-7.21	Average


1-7GHz_Horizontal_802.11ac-VHT40_5755MHz

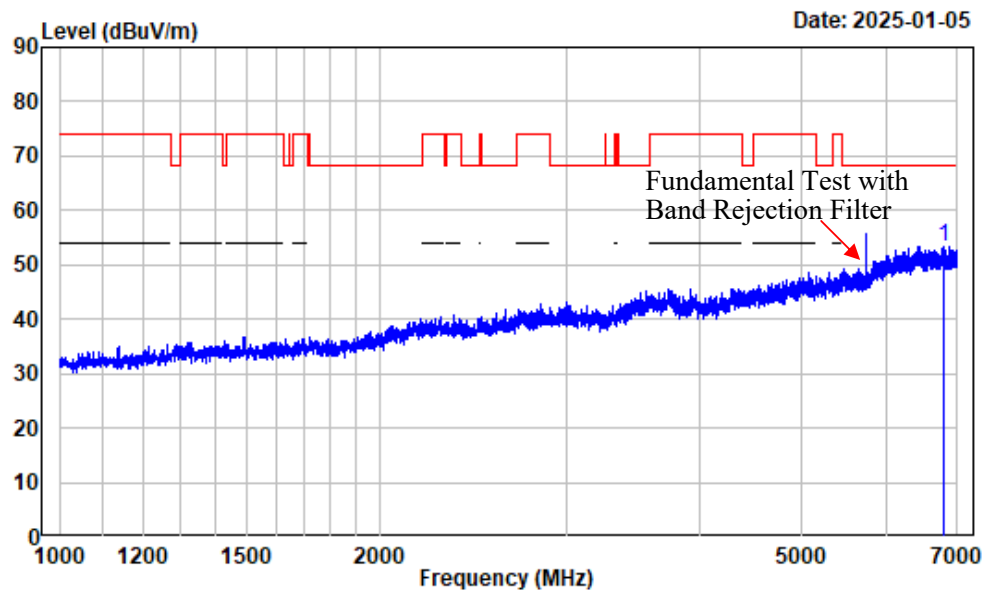

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6811.727	-3.31	56.78	53.47	68.20	-14.73	Peak


1-7GHz_Vertical_802.11ac-VHT40_5755MHz

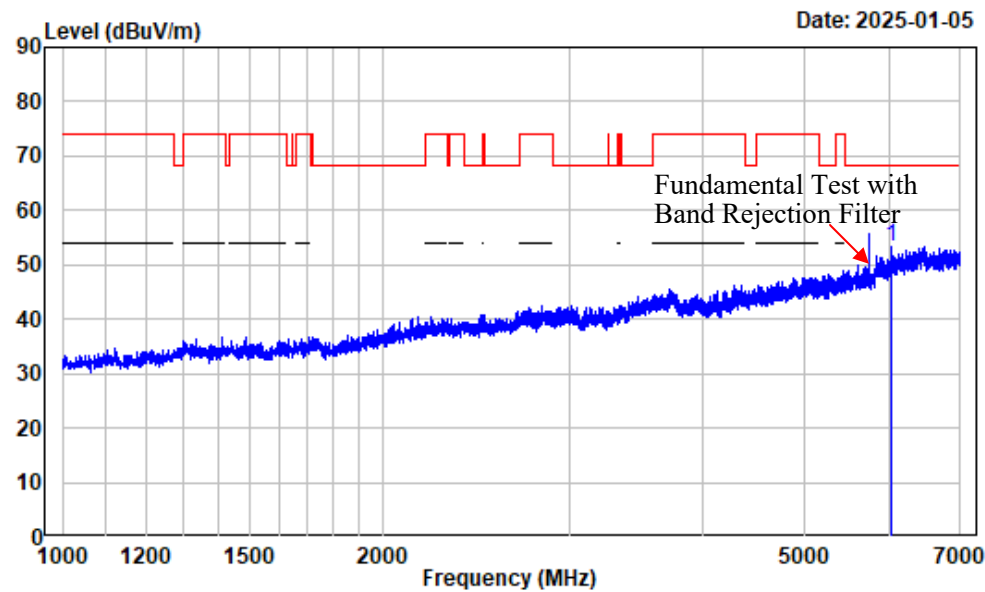

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6029.379	-4.40	57.75	53.35	68.20	-14.85	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT40_5755MHz

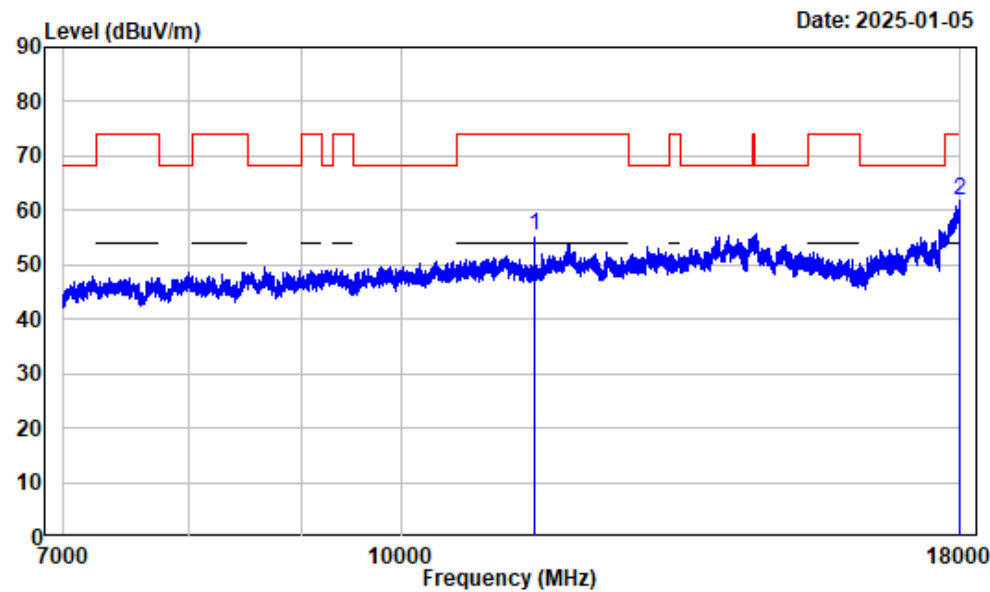

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	3.53	51.79	55.32	74.00	-18.68	Peak
2	17976.620	13.09	48.72	61.81	74.00	-12.19	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT40_5755MHz

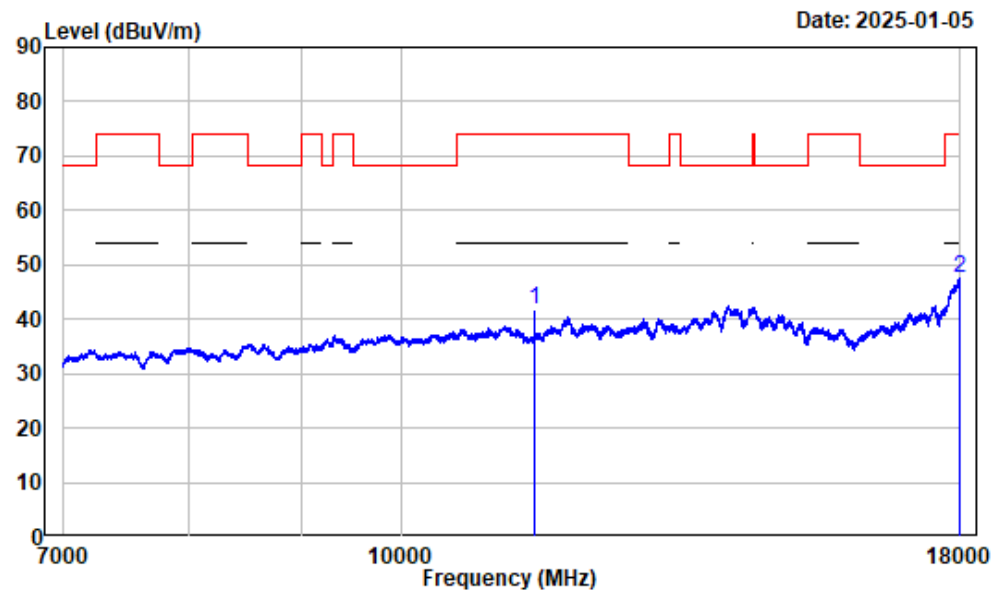

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	3.53	38.41	41.94	54.00	-12.06	Average
2	17993.130	13.17	34.41	47.58	54.00	-6.42	Average


7-18GHz_Vertical_Peak_802.11ac-VHT40_5755MHz

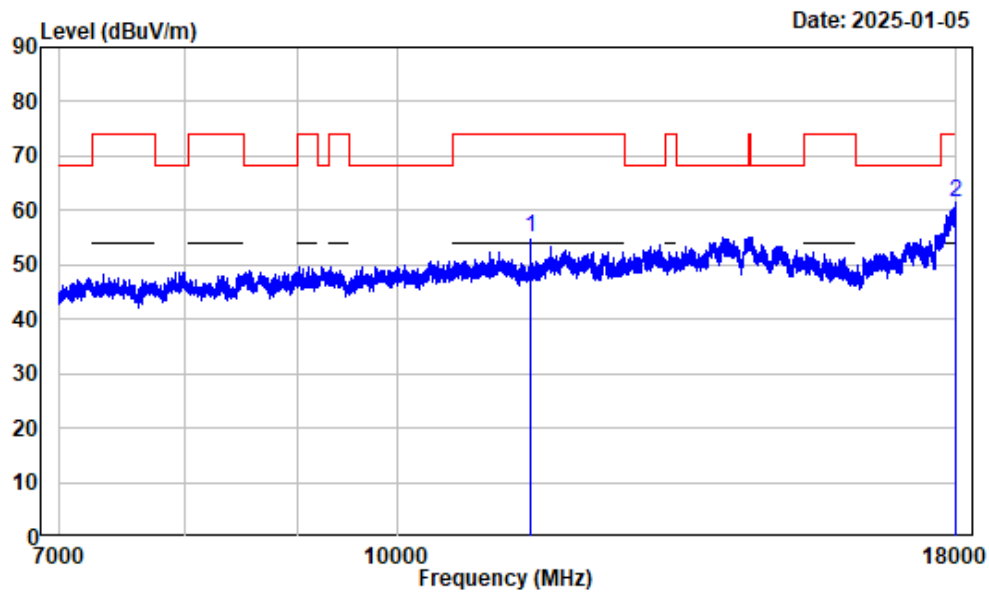

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	3.53	51.58	55.11	74.00	-18.89	Peak
2	17979.370	13.10	48.50	61.60	74.00	-12.40	Peak


7-18GHz_Vertical_Average_802.11ac-VHT40_5755MHz

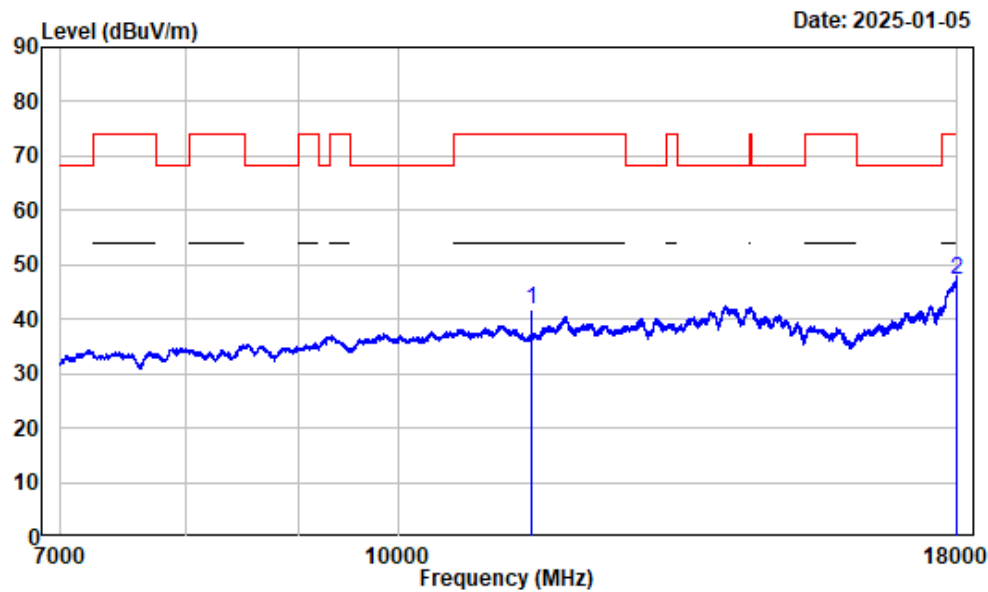

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11510.000	3.53	38.27	41.80	54.00	-12.20	Average
2 17994.500	13.17	34.20	47.37	54.00	-6.63	Average


1-7GHz_Horizontal_802.11ac-VHT80_5775MHz

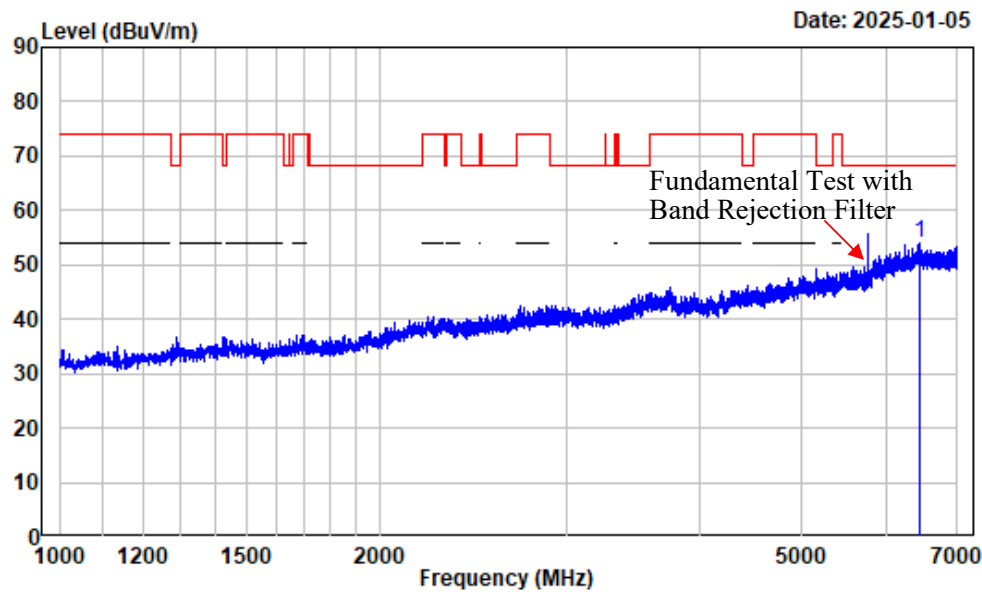

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6454.682	-2.88	56.76	53.88	68.20	-14.32	Peak


1-7GHz_Vertical_802.11ac-VHT80_5775MHz

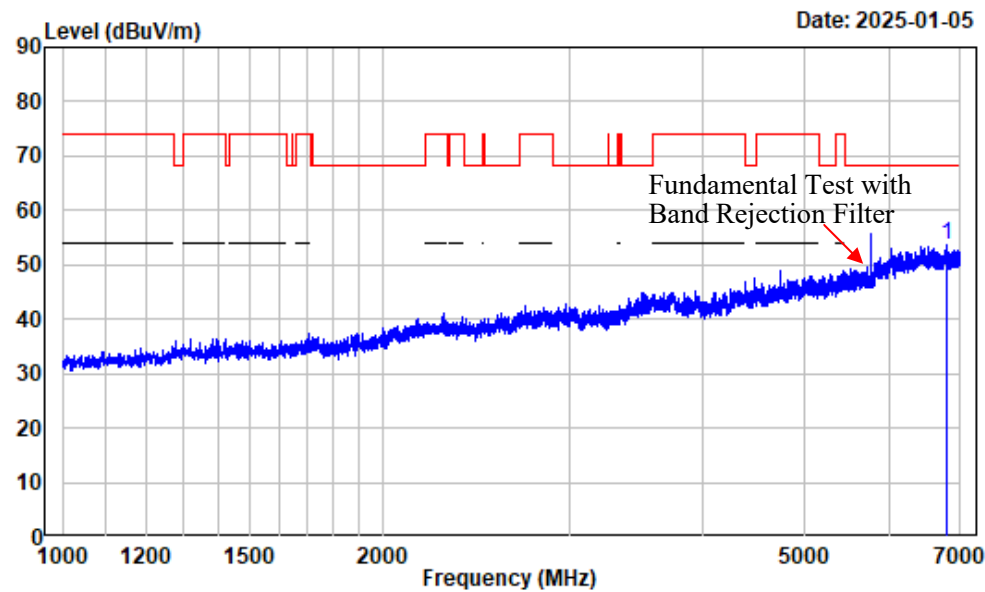

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6798.225	-3.35	56.94	53.59	68.20	-14.61	Peak


7-18GHz_Horizontal_Peak_802.11ac-VHT80_5775MHz

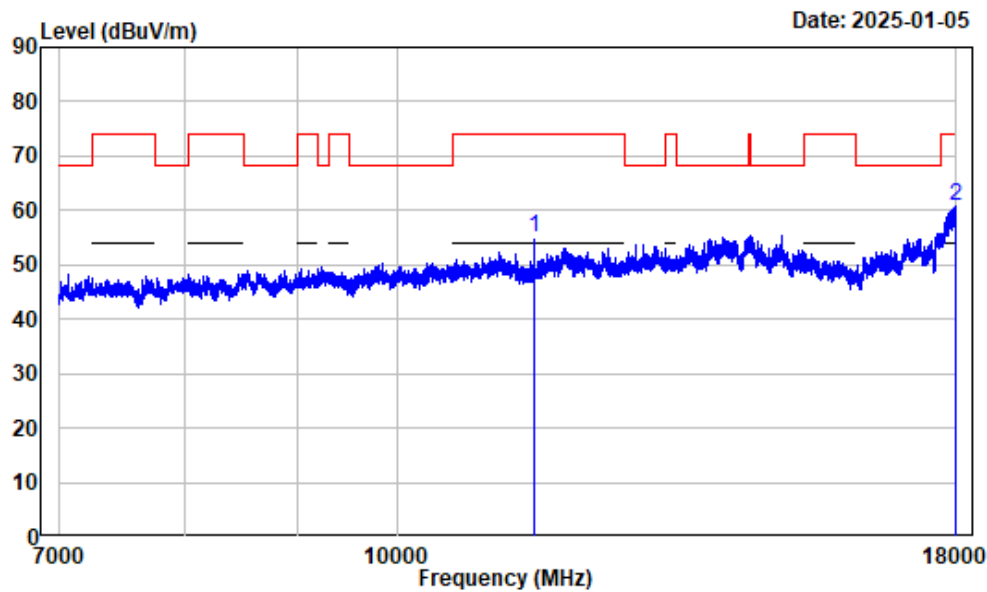

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	3.37	51.77	55.14	74.00	-18.86	Peak
2	17986.250	13.12	47.73	60.85	74.00	-13.15	Peak


7-18GHz_Horizontal_Average_802.11ac-VHT80_5775MHz

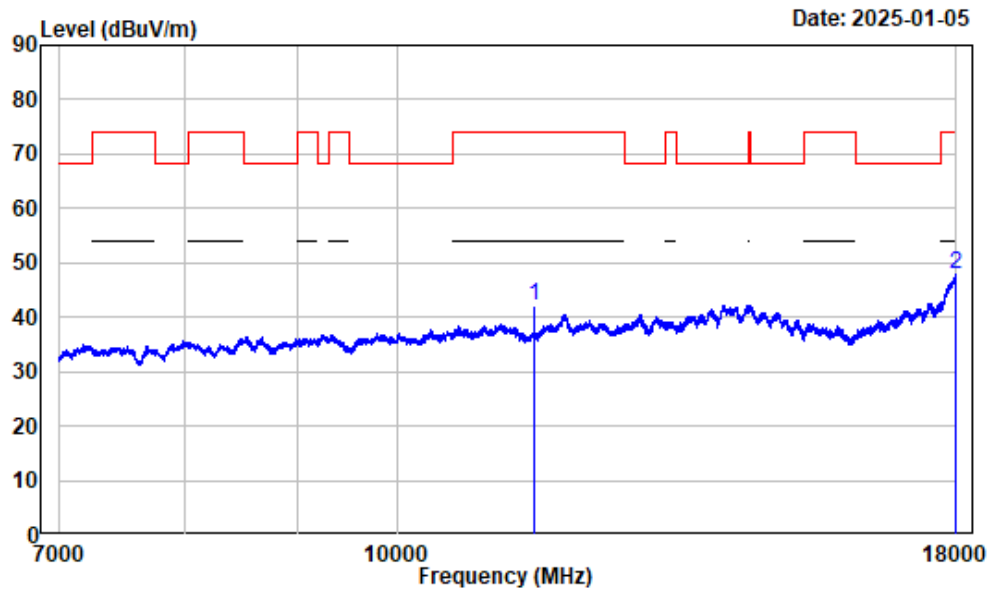

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	3.37	38.75	42.12	54.00	-11.88	Average
2	17998.630	13.19	34.72	47.91	54.00	-6.09	Average


7-18GHz_Vertical_Peak_802.11ac-VHT80_5775MHz

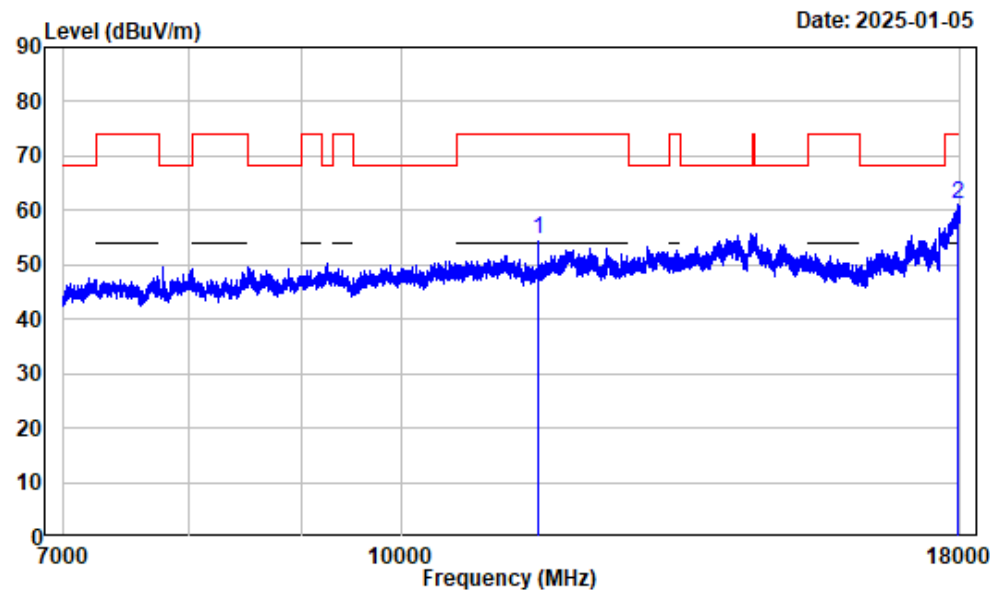

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	3.37	51.42	54.79	74.00	-19.21	Peak
2	17946.370	12.93	48.17	61.10	74.00	-12.90	Peak

7-18GHz_Vertical_Average_802.11ac-VHT80_5775MHz

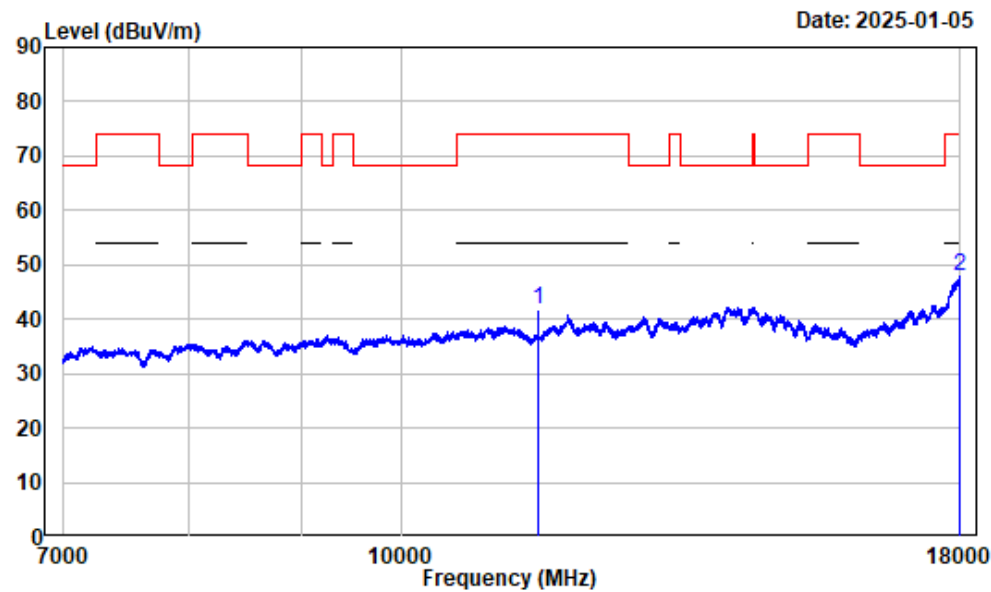


Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11550.000	3.37	38.37	41.74	54.00	-12.26	Average
2 17995.880	13.18	34.57	47.75	54.00	-6.25	Average

18-40GHz (Only with worst case margin mode plot):


18-40GHz_Horizontal_802.11ac80_5530MHz

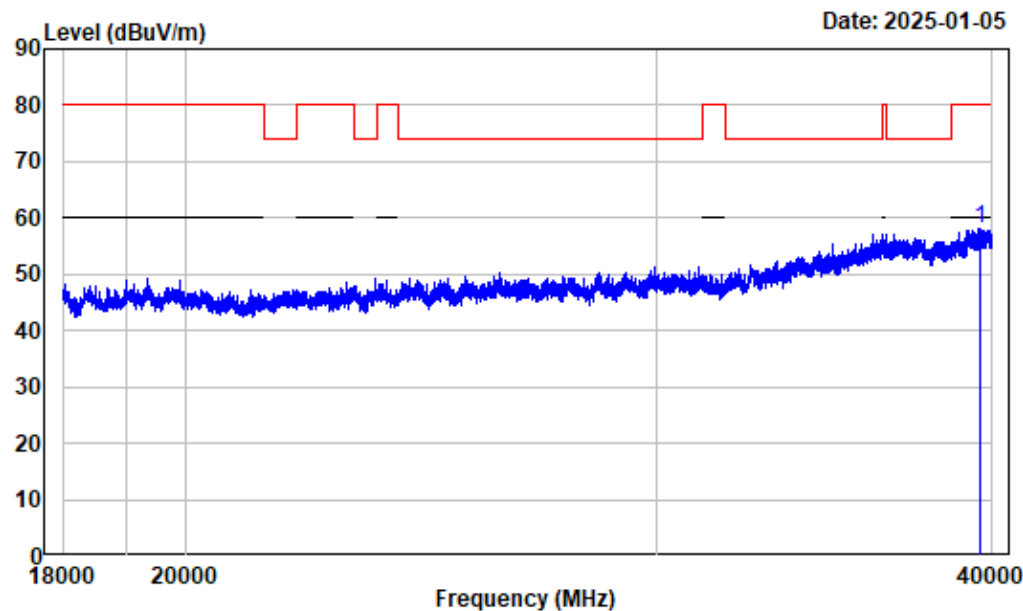

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39559.950	22.73	35.49	58.22	80.00	-21.78	Peak

18-40GHz_Vertical_802.11ac80_5530MHz

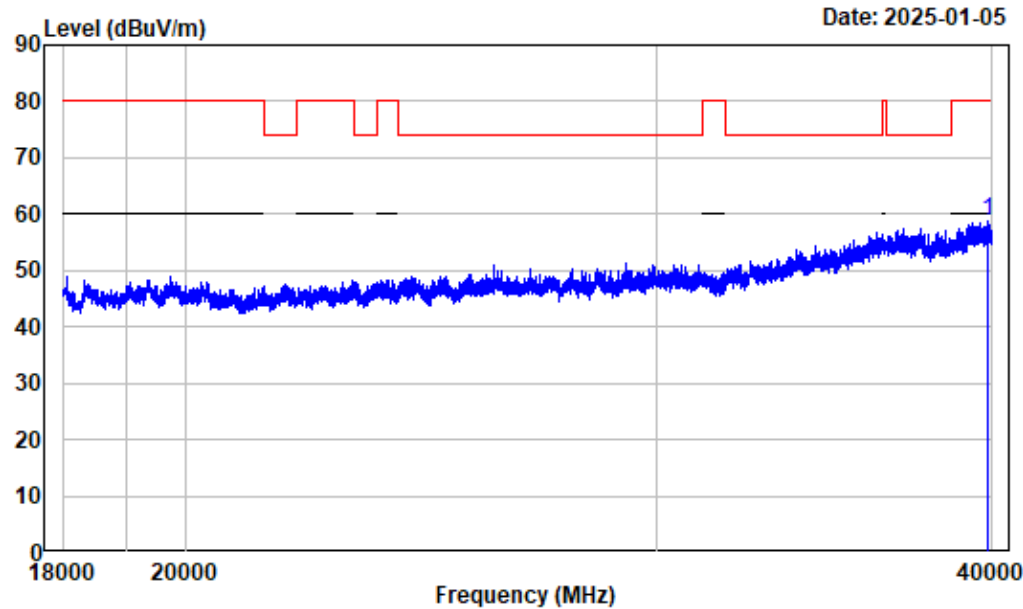

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39870.730	22.53	36.07	58.60	80.00	-21.40	Peak

RF Conducted data

Emission Bandwidth

Test Information:

Sample No.:	2UKG-1	Test Date:	2024/12/19~2025/01/07
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.5~26.8	Relative Humidity: (%)	48~53	ATM Pressure: (kPa)	101.1~101.4
-----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Data:**26dB Emission Bandwidth****5150-5250MHz**

Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5180	19.920
	5200	20.090
	5240	19.970
802.11ac20	5180	20.543
	5200	20.594
	5240	20.696
802.11ac40	5190	40.641
	5230	41.341
802.11ac80	5210	82.082

5250-5350MHz

Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5260	19.970
	5280	20.234
	5320	19.870
802.11ac20	5260	20.543
	5280	20.594
	5320	20.544
802.11ac40	5270	40.941
	5310	40.440
802.11ac80	5290	81.682

5470-5725MHz


Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5500	19.920
	5580	19.970
	5700	20.191
	5720	20.291
802.11ac20	5500	20.594
	5580	20.645
	5700	20.645
	5720	20.440
802.11ac40	5510	41.141
	5550	40.941
	5670	41.441
	5710	41.041
802.11ac80	5530	81.281
	5610	81.682
	5690	81.481

6dB Emission Bandwidth**5725-5850MHz**

Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11a	5745	15.566	0.5	Pass
	5785	15.115	0.5	Pass
	5825	15.265	0.5	Pass
802.11ac20	5745	15.215	0.5	Pass
	5785	15.365	0.5	Pass
	5825	15.215	0.5	Pass
802.11ac40	5755	35.235	0.5	Pass
	5795	35.235	0.5	Pass
802.11ac80	5775	75.475	0.5	Pass


5150-5250MHz

802.11a_5180MHz

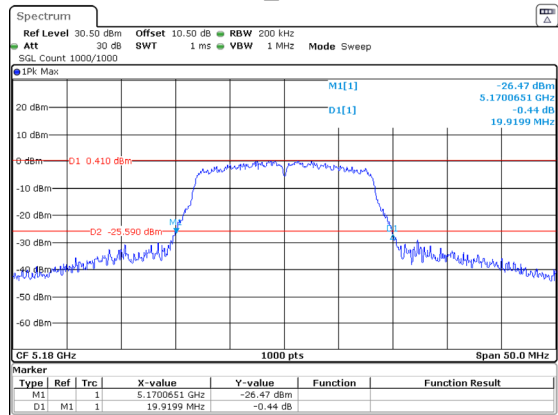


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 20:51:04

802.11a_5200MHz

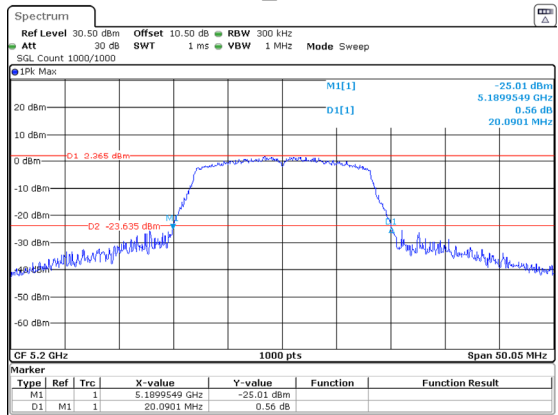


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 20:52:06

802.11a_5240MHz

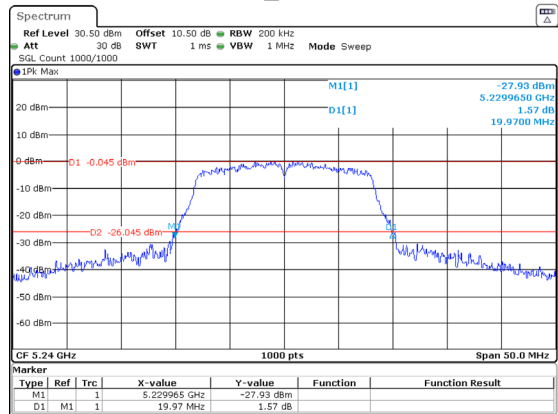


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 20:52:59

802.11ac20_5180MHz

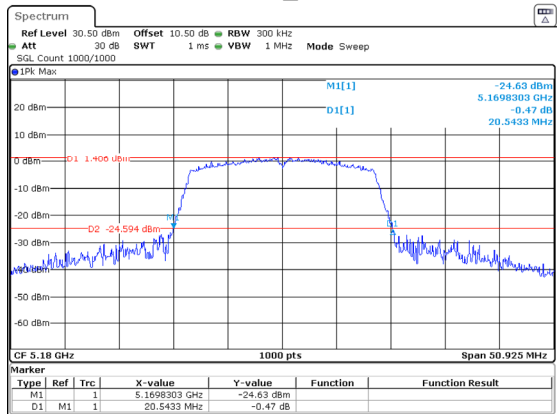


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 20:54:28

802.11ac20_5200MHz

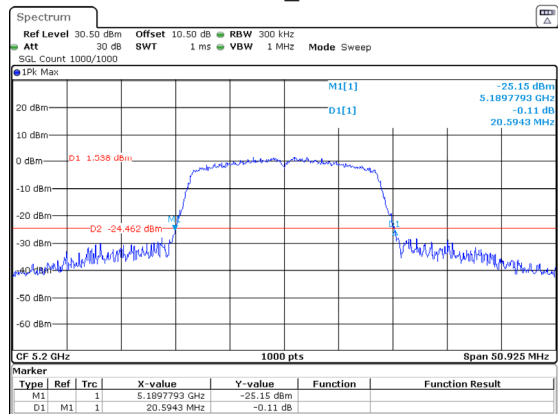


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 20:55:30

802.11ac20_5240MHz

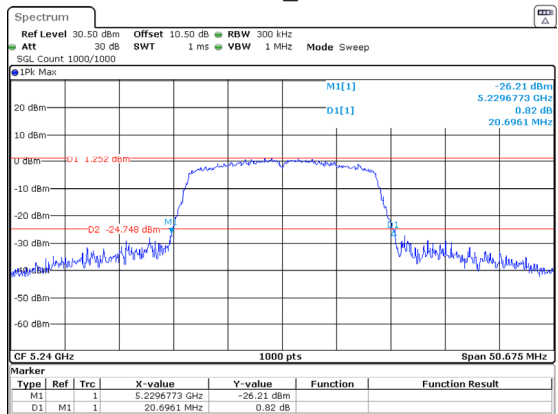


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 20:56:50

802.11ac40_5190MHz

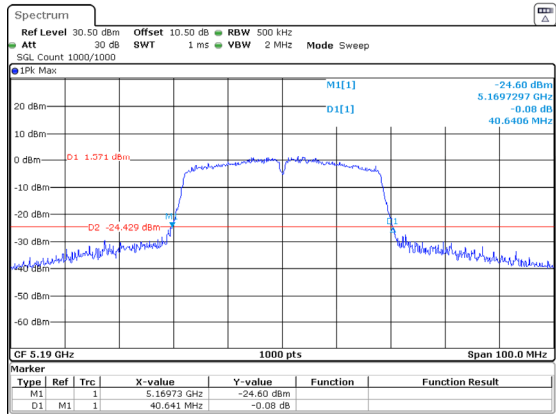

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 20:57:51


802.11ac40_5230MHz

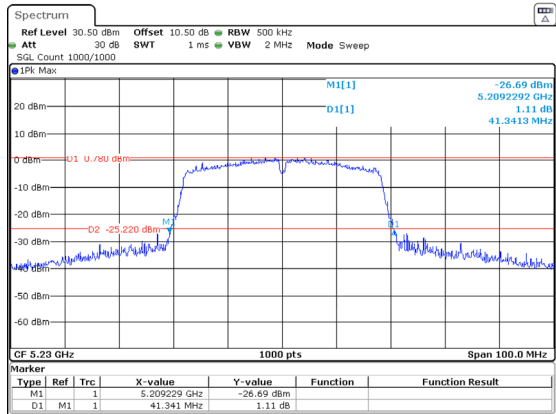

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 20:59:09


5250-5350MHz

802.11ac80_5210MHz

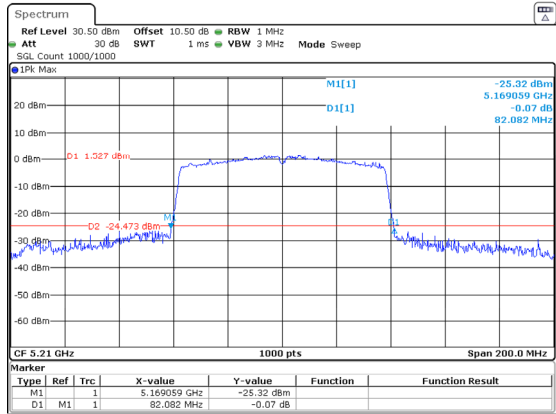


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 20:59:52

802.11a_5260MHz

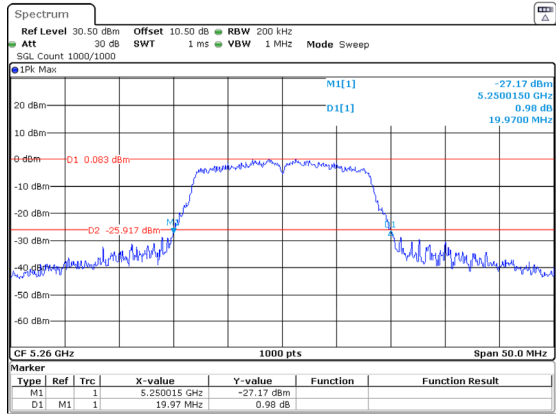


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 21:17:03

802.11a_5280MHz

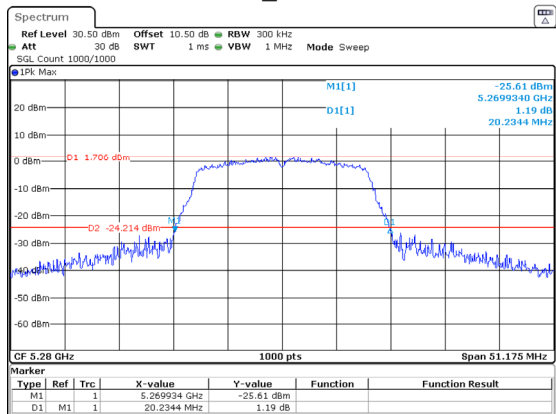


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 21:19:10

802.11a_5320MHz

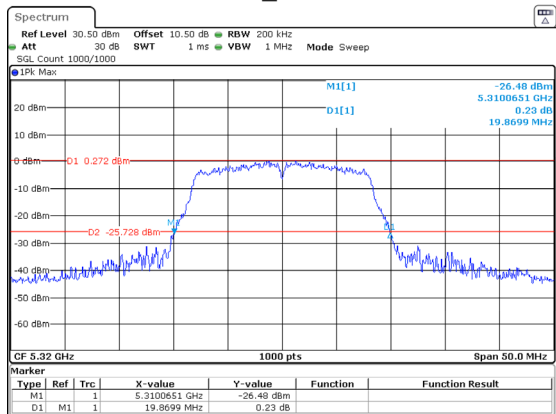


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 21:19:59

802.11ac20_5260MHz

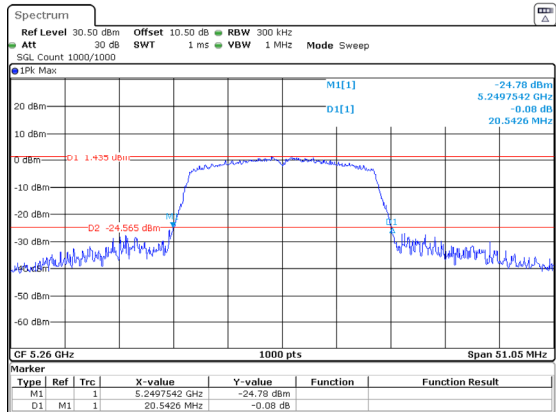


ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 21:21:15

802.11ac20_5280MHz

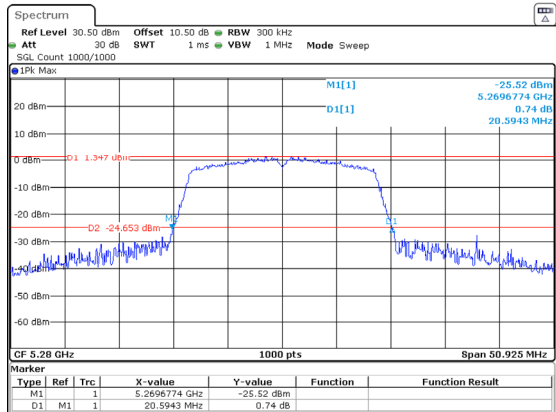


ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 21:22:19

802.11ac20_5320MHz

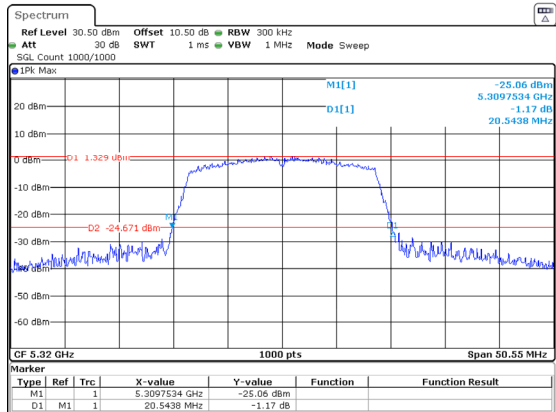


ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 21:23:24

802.11ac40_5270MHz

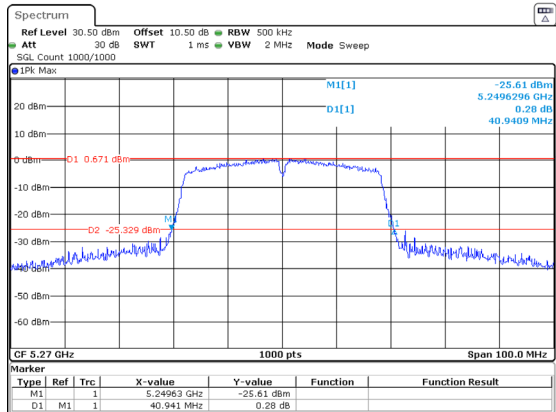


ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 21:24:05

802.11ac40_5310MHz

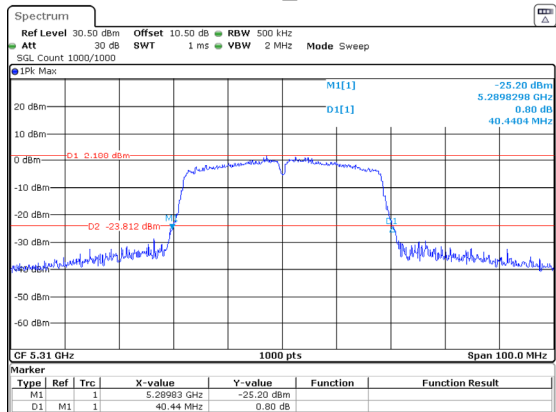

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 21:24:53


802.11ac80_5290MHz

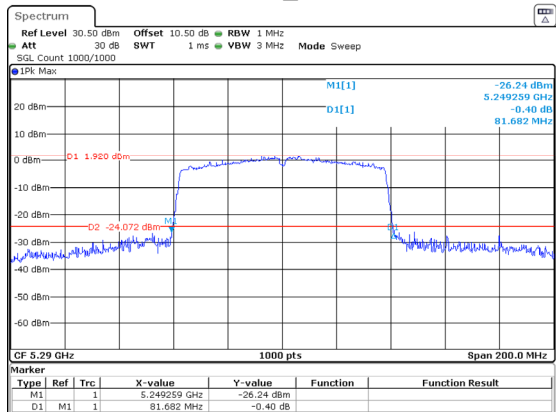

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 21:25:40


5470-5725MHz

802.11a_5500MHz

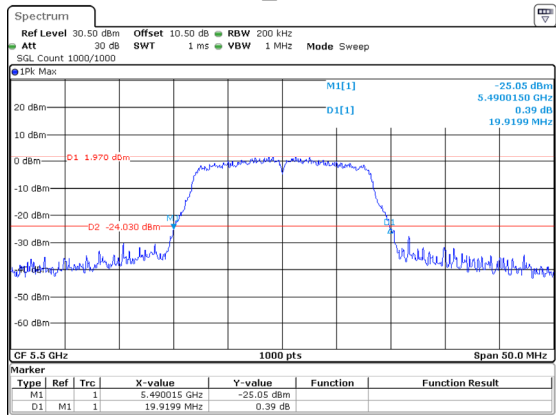


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 17:58:48

802.11a_5580MHz

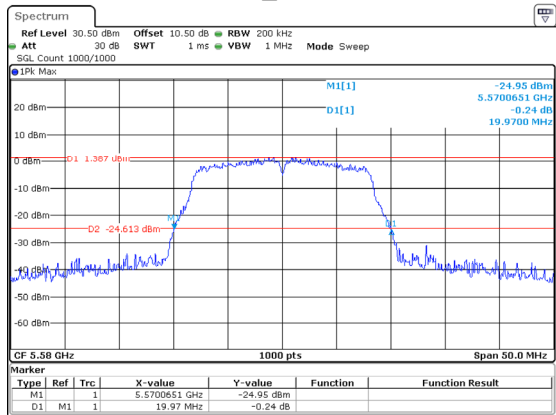


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 18:01:02

802.11a_5700MHz

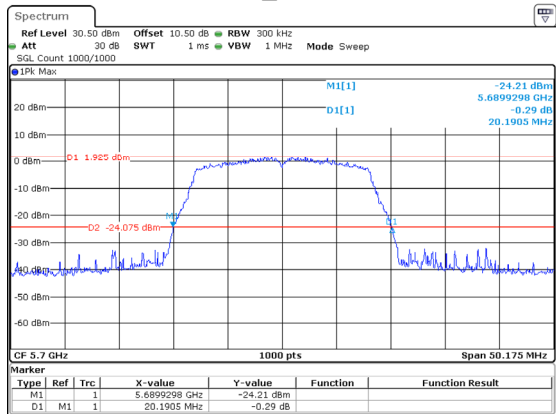


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 18:09:05

802.11a_5720MHz

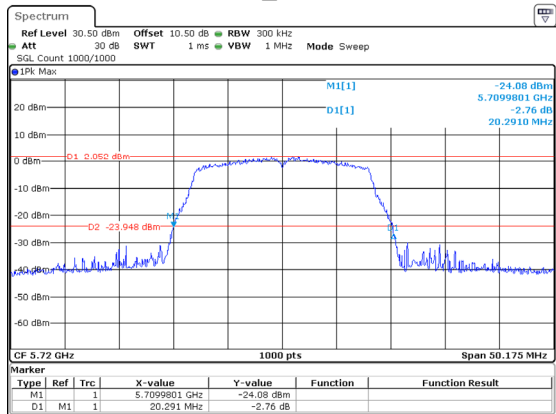


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 18:07:23

802.11ac20_5500MHz

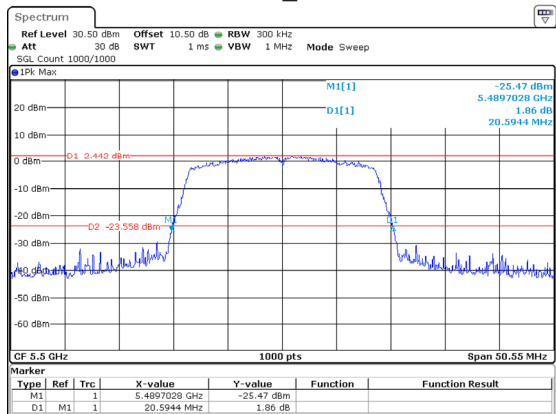


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 18:10:21

802.11ac20_5580MHz

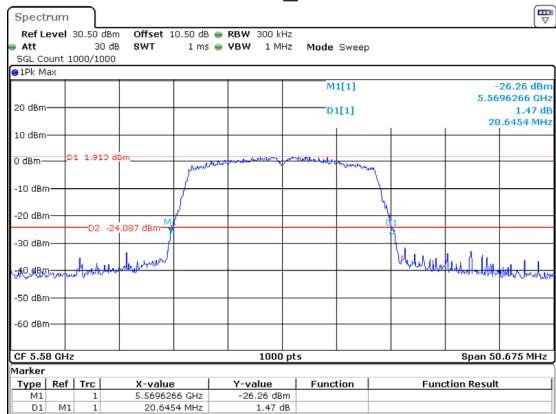


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 18:12:42

802.11ac20_5700MHz

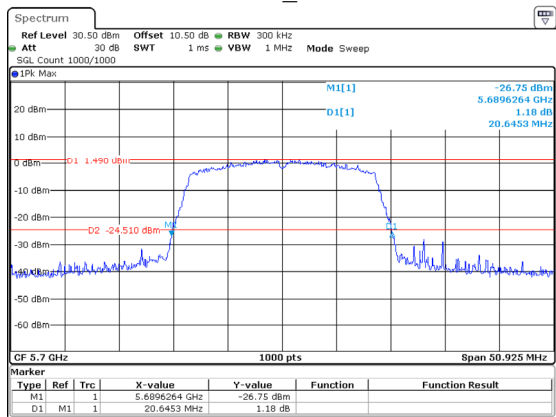


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
 Date: 7.JAN.2025 18:15:17

802.11ac20_5720MHz

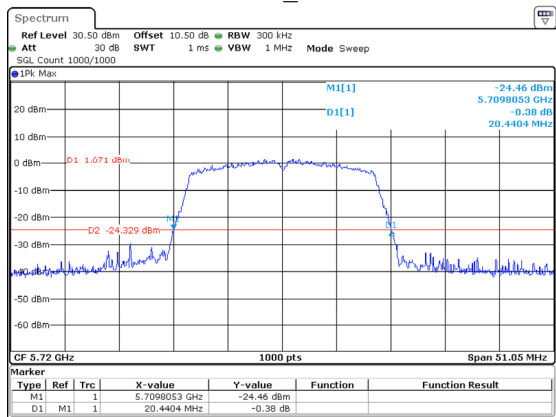


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
 Date: 7.JAN.2025 18:17:45

802.11ac40_5510MHz

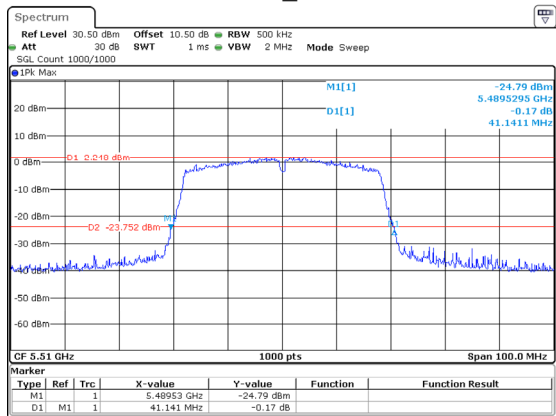


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
 Date: 7.JAN.2025 18:19:37

802.11ac40_5550MHz

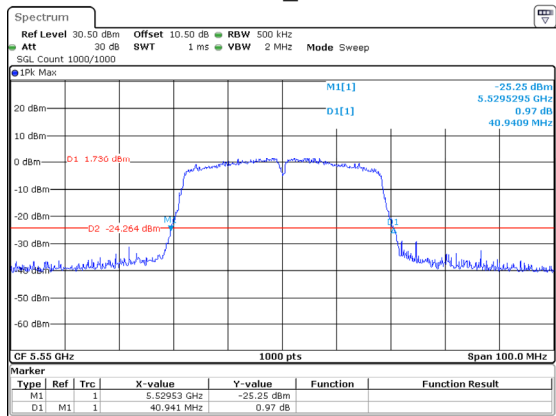


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
 Date: 7.JAN.2025 18:20:42

802.11ac40_5670MHz

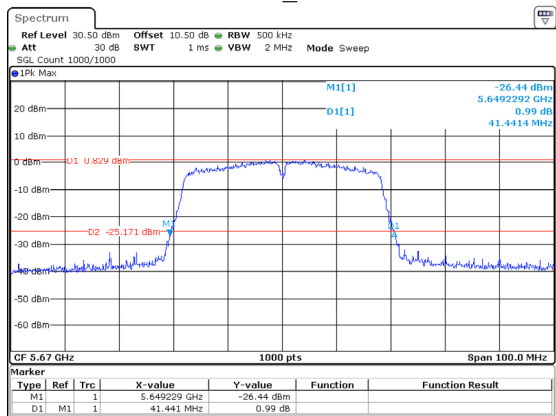


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
 Date: 7.JAN.2025 18:21:48

802.11ac40_5710MHz

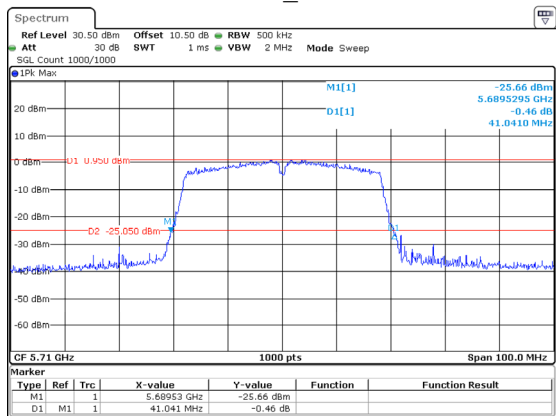


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
 Date: 7.JAN.2025 18:23:08

802.11ac80_5530MHz

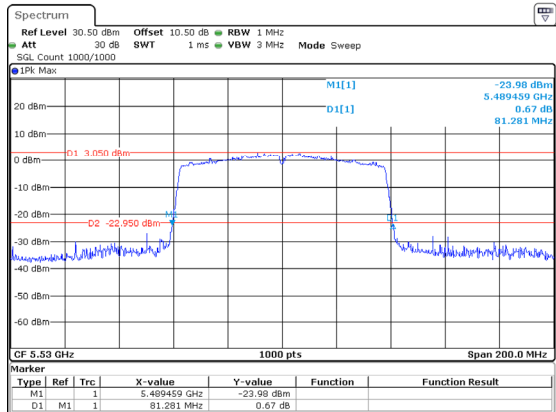

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 18:24:38


802.11ac80_5610MHz

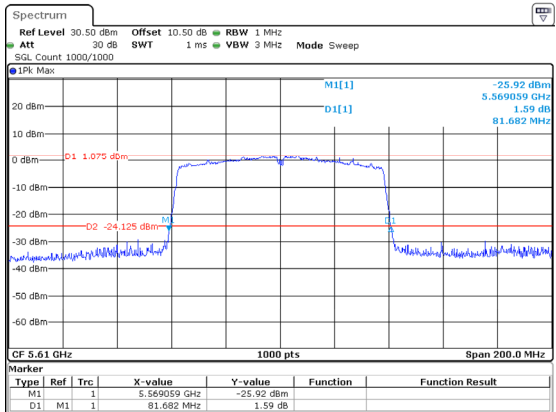

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 18:25:58


5725-5850MHz

802.11ac80_5690MHz

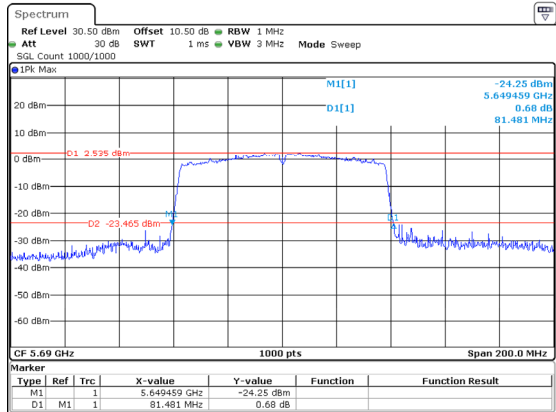


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 18:27:06

802.11a_5745MHz

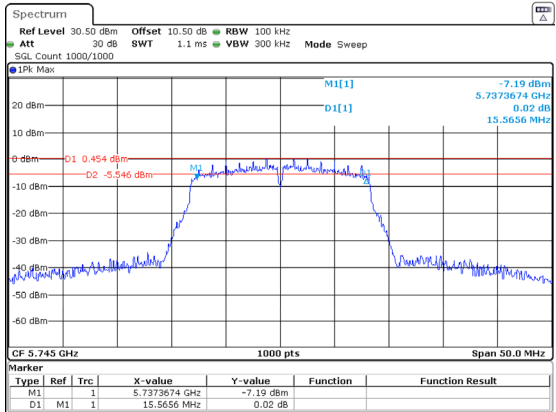


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 21:46:30

802.11a_5785MHz

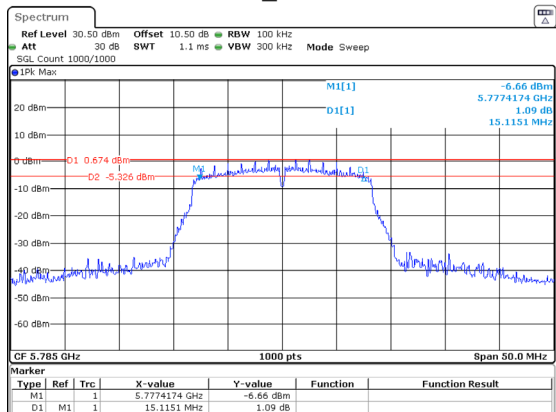


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 21:47:42

802.11a_5825MHz

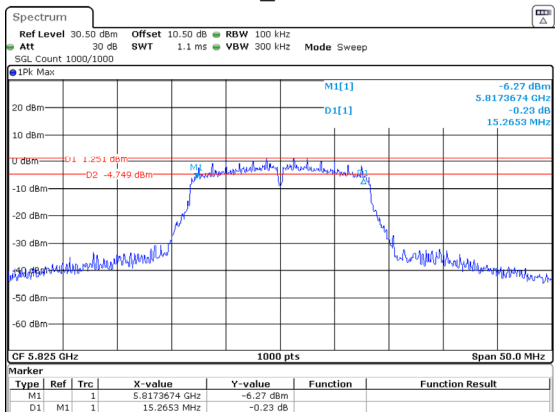


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 21:48:46

802.11ac20_5745MHz

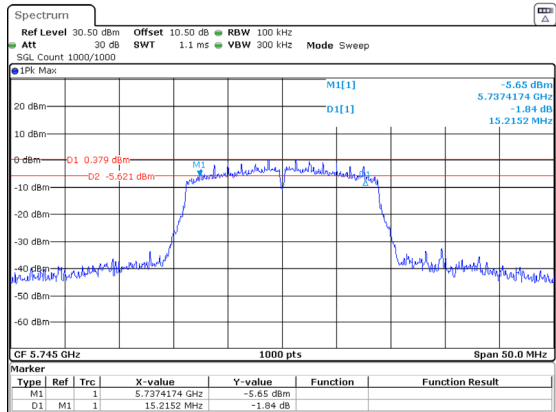


ProjectNo.:2401Z105021E-RF Tester:Kungfumanter Liang
Date: 19.DEC.2024 21:49:53

802.11ac20_5785MHz

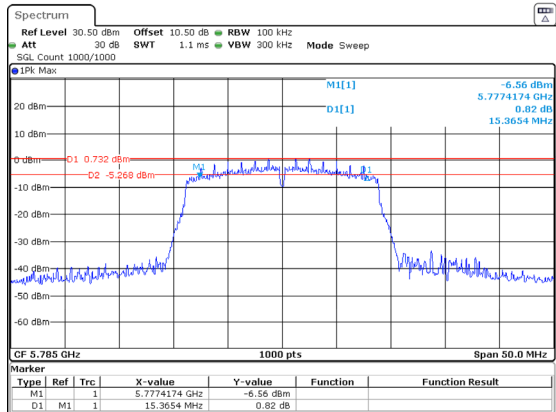


ProjectNo.:2401Z105021E-RF Tester:Kungfumanter Liang
Date: 19.DEC.2024 21:50:59

802.11ac20_5825MHz

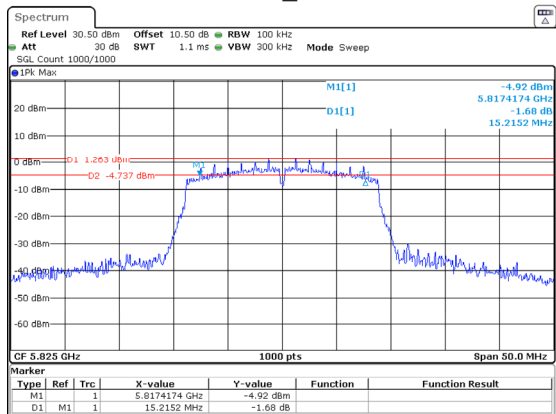


ProjectNo.:2401Z105021E-RF Tester:Kungfumanter Liang
Date: 19.DEC.2024 21:51:50

802.11ac40_5755MHz

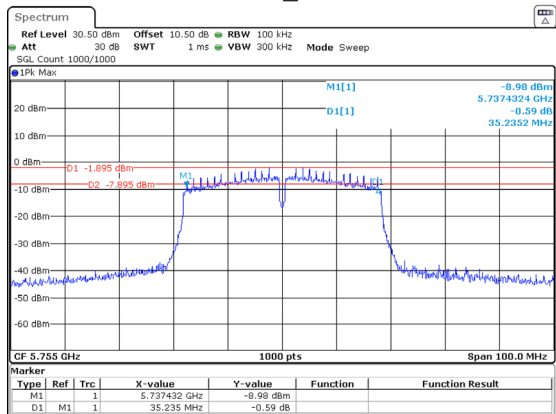


ProjectNo.:2401Z105021E-RF Tester:Kungfumanter Liang
Date: 19.DEC.2024 21:51:02

802.11ac40_5795MHz

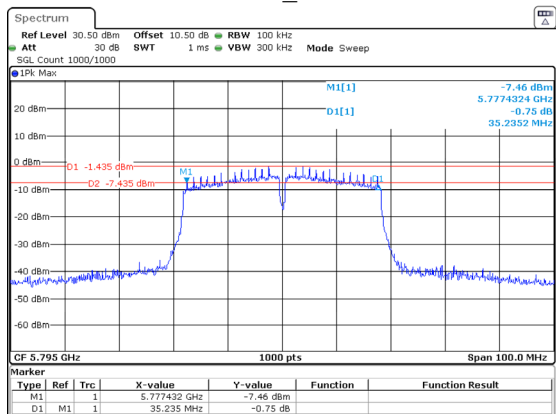

ProjectNo.:2401Z105021E-RF Tester:Kungfumanter Liang
Date: 19.DEC.2024 21:54:22

802.11ac80_5775MHz

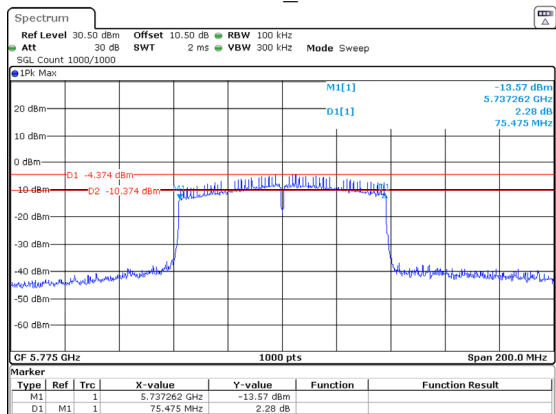

ProjectNo.:2401Z105021E-RF Tester:Kungfumanter Liang
Date: 19.DEC.2024 21:55:05

99% Occupied Bandwidth**Test Information:**

Sample No.:	2UKG-1	Test Date:	2025/01/07
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	N/A

Environmental Conditions:

Temperature: (°C):	25.5~26.8	Relative Humidity: (%)	48~53	ATM Pressure: (kPa)	101.1~101.4
-------------------------------	-----------	---------------------------------------	-------	--------------------------------	-------------

Test Data:**5150-5250MHz**

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5180	16.500
	5200	16.500
	5240	16.450
802.11ac20	5180	17.550
	5200	17.550
	5240	17.600
802.11ac40	5190	36.200
	5230	36.200
802.11ac80	5210	75.200

Note:

The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5250-5350MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5260	16.500
	5280	16.450
	5320	16.450
802.11ac20	5260	17.600
	5280	17.550
	5320	17.600
802.11ac40	5270	36.100
	5310	36.100
802.11ac80	5290	75.400

5470-5725MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5500	16.500
	5580	16.500
	5700	16.450
	5720	16.450
802.11ac20	5500	17.550
	5580	17.550
	5700	17.600
	5720	17.600
802.11ac40	5510	36.100
	5550	36.100
	5670	36.200
	5710	36.200
802.11ac80	5530	75.200
	5610	75.200
	5690	75.200

5725-5850MHz


Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5745	16.450
	5785	16.500
	5825	16.450
802.11ac20	5745	17.600
	5785	17.550
	5825	17.600
802.11ac40	5755	36.100
	5795	36.100
802.11ac80	5775	75.200

Note:

The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.


5150-5250MHz

802.11a_5180MHz

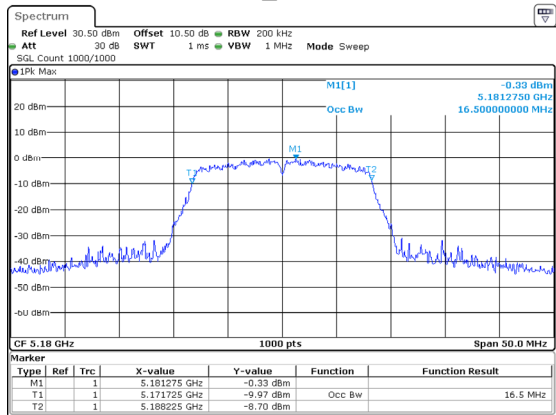


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 17:08:21

802.11a_5200MHz

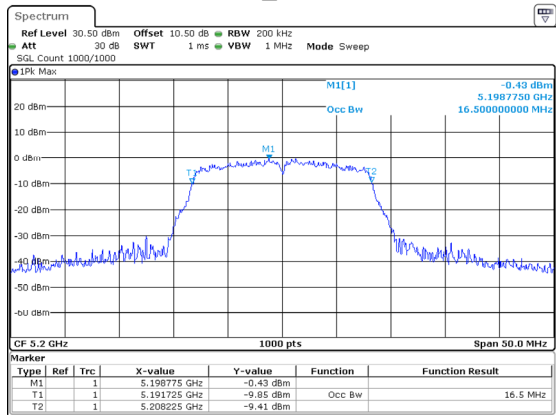


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 17:09:21

802.11a_5240MHz

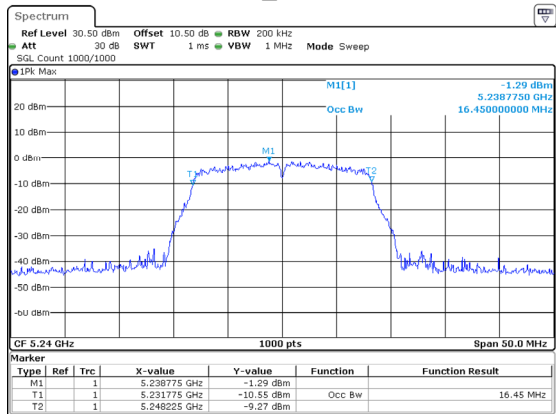


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 17:13:05

802.11ac20_5180MHz

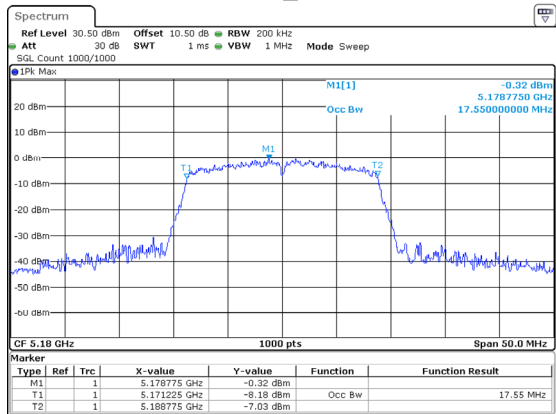


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 17:14:35

802.11ac20_5200MHz

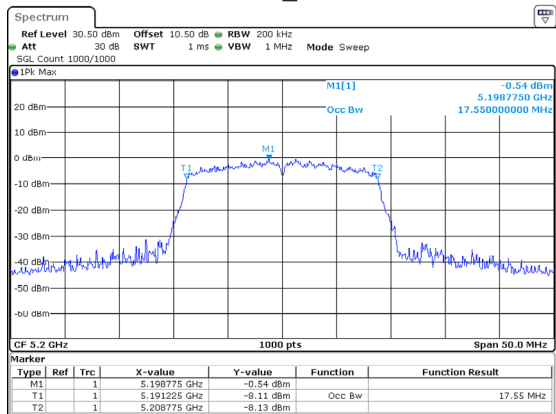

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 17:15:32

802.11ac20_5240MHz

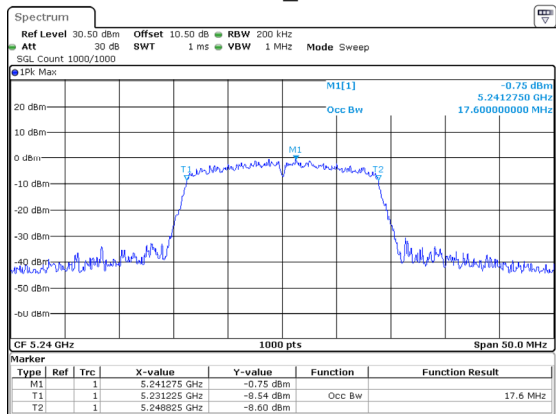

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 7.JAN.2025 17:20:02