

TCC

Company Confidential

Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-60

Test Report #: WR477.001

February 21, 2005



Accredited Laboratory
Certificate Number: 1819-01

1 (40)

Ver 1.0

CFR 47 Part 2, 22, and 24 Test Report

Test Report Number: WR477.001

Terminal device: FCC ID: QMNRM-60 Model: 6235i Type: RM-60 HW: B2.0 SW: 25_01
(Detailed information is listed in section 4).

Originator: Mark Severson
Function: TCC - Dallas – EMC
Version/Status: 1.0 Approved
Location: TCC Directories
Date: February 21, 2005

Change History:

Version	Date	Status	Handled By	Comments
0.1	2/19/05	Draft	Mark Severson	
0.2	2/21/05	Proposal	Mark Severson	
0.3	2/21/05	Reviewed	Mark Severson	
1.0	2/21/05	Approved	Nerina Walton	

Testing laboratory: Test & Certification Center (TCC) Dallas
Nokia Inc
6021 Connection Drive
Irving, Texas 75039
U.S.A.


Tel. 972-894-5000

Client: Nokia Inc.
San Diego
12278 Scripps Summit Dr.
San Diego
CA 92131
USA
Tel. +1858 831 5000
Fax. +1 858 831 6500

Date and signatures:

February 21, 2005

For the contents:



Mark Severson
Technical Review

Nerina Walton
Manager Review

TABLE OF CONTENTS

1. GENERAL	4
1.1 QUALITY SYSTEM	4
1.2 LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION	4
1.3 OBJECTIVE	7
1.4 TEST SUMMARY	7
2. STANDARDS BASIS	8
3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS	9
3.1 ABBREVIATIONS	9
3.2 ACRONYMS	9
3.3 TERMS	9
4. EQUIPMENT-UNDER-TEST (EUT)	10
4.1 DESCRIPTION OF TESTED DEVICE(S)	10
4.2 PHOTOGRAPH OF TESTED DEVICE(S)	10
5. TEST EQUIPMENT LIST	11
6. RF POWER OUTPUT (CONDUCTED)	12
6.1 SETUP	12
6.2 PASS/FAIL CRITERIA	12
6.3 DETAILED TEST RESULTS	12
7. RF POWER OUTPUT (RADIATED)	13
7.1 SETUP	13
7.2 PASS/FAIL CRITERIA	13
7.3 DETAILED TEST RESULTS	14
7.4 MEASUREMENT UNCERTAINTY	14
8. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)	15
8.1 SETUP	15
8.2 PASS/FAIL CRITERIA	15
8.3 DETAILED TEST RESULTS	16
8.4 MEASUREMENT UNCERTAINTY	24
9. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	25
9.1 SETUP	25
9.2 PASS/FAIL CRITERIA	25
9.3 DETAILED TEST RESULTS	25
9.4 MEASUREMENT UNCERTAINTY	34
10. FIELD STRENGTH OF SPURIOUS RADIATION	35
10.1 SETUP	35
10.2 PASS/FAIL CRITERIA	35
10.3 DETAILED TEST RESULTS	36
10.4 MEASUREMENT UNCERTAINTY	38
11. FREQUENCY STABILITY (TEMPERATURE VARIATION)	39
11.1 SETUP	39
11.2 PASS/FAIL CRITERIA	39



Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-60
Test Report #: WR477.001
February 21, 2005

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

11.3	DETAILED TEST RESULTS	39
12.	FREQUENCY STABILITY (VOLTAGE VARIATION).....	40
12.1	SETUP.....	40
12.2	PASS/FAIL CRITERIA	40
12.3	DETAILED TEST RESULTS	40

1. GENERAL

1.1 Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). TCC - Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661.

1.2 List of General Information Required for Certification

This list is in accordance with FCC Rules and Regulations, CFR 47, Part 2, and to 22H, 24E, Confidentiality.

1.2.1 Sub-part 2.1033(c)(1)

Name and Address of Applicant:

Nokia Inc.
San Diego
12278 Scripps Summit Dr.
San Diego
CA 92131
USA
Tel. +1858 831 5000
Fax. +1 858 831 6500

Manufacturer:

Nokia Inc.
San Diego
12278 Scripps Summit Dr.
San Diego
CA 92131
USA
Tel. +1858 831 5000
Fax. +1 858 831 6500

1.2.2 Sub-part 2.1033(c)(2)

FCC ID: QMNRM-60

Model No: 6235i



1.2.3 Sub-part 2.1033(c)(3)

Instruction Manual(s): Refer to attached EXHIBITS

1.2.4 Sub-part 2.1033(c)(4)

Type of Emission: 40K0F1D, 40K0F8W, 1M25F9W

1.2.5 Sub-part 2.1033(c)(5)

Frequency Range, MHz: 824.04-848.97MHz

1851.25-1908.75 MHz

1.2.6 Sub-part 2.1033(c)(6)

Power Rating, Watts: 0.282W Cellular

0.288W PCS

☐ Switchable ☒ Variable ☐ N/A

FCC Grant Note: BC- The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed.



1.2.7 Sub-part 2.1033(c)(7)

Maximum Power Rating, Watts: 0.288W

1.2.8 Sub-part 2.1033(c)(8)

Voltages & Currents in all elements in final R.F. Stage, including final transistor or solid-state device:

Collector Current, A = 0.76
Collector Voltage, Vdc = 3.7
Supply Voltage, Vdc = 3.7

1.2.9 Sub-part 2.1033(c)(9)

Tune-up Procedure: Refer to attached EXHIBITS

1.2.10 Sub-part 2.1033(c)(10)

Circuit Diagram/Circuit Description:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.
Refer to attached EXHIBITS

1.2.11 Sub-part 2.1033(c)(11)

Label Information: Refer to attached EXHIBITS

1.2.12 Sub-part 2.1033(c)(12)

Photographs: Refer to attached EXHIBITS

1.2.13 Sub-part 2.1033(c)(13)

Digital Modulation Description: N/A

1.2.14 Sub-part 2.1033(c)(14)

Test and Measurement Data: FOLLOWS

1.3 Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, Part 22, and Part 24.

1.4 Test Summary

Test Results: *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

Test Performed	Reference	Section of Report	Complies / Does not comply / Not Tested
RF Power Output (Conducted)	FCC Part 2.1046(a) / 22.913(a) / 24.232(b)(c)	6	Complies
RF Power Output (Radiated)	FCC Part 22.913(a) / 24.232(b)	7	Complies
Occupied Bandwidth: Transmitter Conducted Measurements	FCC Part 2.1049(c)(1), 24.238(a)(b)	8	Complies
Spurious Emissions at Antenna Terminals	FCC Part 2.1051	10	Complies
Field Strength of Spurious Radiation	FCC Part 2.1053	11	Complies
Frequency Stability (Temperature Variation)	FCC Part 2.1055(a)(1)(b), 24.235	12	Complies
Frequency Stability (Voltage Variation)	FCC Part 2.1055(d)(1)(2), 24.235	13	Complies



2. STANDARDS BASIS

Testing has been carried out in accordance with:

REF.	Code of the standard	Name of the standard
1	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.
2	FCC: CFR 47 Part 2	Code of Federal Regulations (CFR) Title 47, Part 2 – Frequency Allocations and Radio Treaty Matters; General Rules and Regulations: Subpart J – Equipment Authorization Procedures
3	FCC: CFR 47 Part 22	Code of Federal Regulations (CFR) Title 47, Part 22 – Public Mobile Services: Subpart H – Cellular Radiotelephone Service
4	FCC: CFR 47 Part 24	Code of Federal Regulations (CFR) Title 47, Part 24 – Personal Communications Services: Subpart E – Broadband PCS
5	RSS-132	800 MHz Cellular Telephones Employing New Technologies
6	RSS-133	2 GHz Personal Communications Services, Industry Canada
7	RSS-212	Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)
8	RSP-100	Radio Equipment Certification Procedure

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

Deviations:

Not Applicable.

3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

3.1 Abbreviations

- dB - decibel
- dBc - decibels from carrier
- dBm - decibels per milliwatt (absolute measurement)
- GHz - gigahertz or 1000000000 hertz
- kHz - kilohertz or 1000 hertz
- MHz - megahertz or 1000000 hertz

3.2 Acronyms

- AMPS - Advanced Mobile Phone System
- BSS - Base Station Simulator
- CDMA - Code Division Multiple Access
- EDRP - Effective Dipole Radiated Power
- EIRP - Effective Isotropic Radiated Power
- EMC - Electromagnetic Compatibility
- EMI - Electromagnetic Interference
- ERP - Effective Radiated Power
- EUT - Equipment under Test
- GSM - Global System for Mobile communications
- PCS - Personal Communications Services
- RF - Radio Frequency
- TDMA - Time Division Multiple Access

3.3 Terms

Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, TDMA, and CDMA.

Cellular - refers to a frequency in the 800MHz band.

PCS - refers to a frequency in the 1900MHz band.

4. EQUIPMENT-UNDER-TEST (EUT)

The results in this report relate only to the items listed below:

4.1 Description of Tested Device(s):

Test Performed	Mode of Operation	Date of Receipt	Condition of Sample	Item	Identifying Information
FCC Parts 22.913(a) / 24.232(b), 2.1053	AMPS, CDMA Cellular; CDMA PCS	1/21/2005	Operational	Handset	Model: 6235i Type: RM-60 SW: S100_04w21_25_01 HWID: B2.0 ESN: 044/08943889 Code: 05202511122F7
FCC Parts 2.1046(a), 22.913(a) / 24.232(b), 2.1049(c)(1), 24.238(a)(b), 2.1051, 2.1055(d)(1)(2), 24.235	AMPS, CDMA Cellular; CDMA PCS	1/21/2005	Operational	Handset	Model: 6235i Type: RM-60 SW: S100_04w21_25_01 HWID: B2.0 ESN: 044/08943891 Code: 0520251LL22EZ
N/A	N/A	1/21/2005	Operational	Battery	Type: BL-6C Other: 3.7 vdc

4.2 Photograph of Tested Device(s):

Refer to attached EXHIBITS

5. TEST EQUIPMENT LIST

The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

Section of Report	NMP#	Test Equipment	Mfr. #	Model #	Calibration Due Date	Calibration Interval
8	02663 02661	EMI Receiver	Agilent	85460A	3/23/2005	12mos
6, 8, 9, 10, 12	02625	Base Station	Rhode & Schwarz	CMU200	6/30/2005	12mos
10	02679	EMI Analyzer	Agilent	E7405A	3/13/2005	12mos
7, 10	01472	Biconilog Antenna	EMC Test Systems	3142B	4/08/2005	12mos
7, 10	02846	Turntable and Tower Controller	Sunol	FM2022 & 2846	N/A	N/A
7, 10	00065	Horn Antenna	EMCO	3115	7/16/2005	12mos
7, 10	02664	EMI Receiver	Agilent	8546A / 85460A	2/23/2005	12mos
7, 10	02665	EMI Receiver	Agilent	8546A / 85460A	2/23/2005	12mos
7, 10	02679	EMI Analyzer	Agilent	E7405	3/13/2005	12mos
10	02680	EMI Analyzer	Agilent	E7405	12/29/2005	12mos
12, 12	00837	Environmental Chamber	Tenney	TUJR	1/30/2006	12mos
6	02549	Power Meter	Agilent	E4418B	10/06/2005	12mos
6	02672	Power Sensor	Agilent	E9304A	9/21/2005	12mos

6. RF POWER OUTPUT (CONDUCTED)

Specification: FCC Part 2.1046(a), 22.913(a), 24.232(b)(c)

6.1 Setup

Testing was performed with the EUT connected to a 6dB splitter and then to the RF Power Meter to measure the conducted RF power output. The base station simulator was connected to the other port of the splitter to establish a call.

6.2 Pass/Fail Criteria

Not Applicable

6.3 Detailed Test Results

Test Technician / Engineer	Cindy Trinh
Date of Measurement	January 20, 2004
Temperature	21-23°C
Humidity	29-49%RH
Test Result	Was operated at max power and tested in accordance with FCC Part 2.1046(a), 22.913(a), 24.232(b)(c).

AMPS

Channel	Freq Max (MHz)	ESN 3889 Max (mW)	ESN 3889 Max (dBm)
991	824.04 MHz	354.8	25.5
384	836.52 MHz	354.8	25.5
799	848.97 MHz	354.8	25.5

CDMA 800

Channel	Freq Max (MHz)	ESN 3889 Max (mW)	ESN 3889 Max (dBm)
1013	824.70 MHz	331.1	25.2
384	836.52 MHz	331.1	25.2
777	848.31 MHz	331.1	25.2



CDMA 1900

Channel	Freq Max (MHz)	ESN 3889 Max (mW)	ESN 3889 Max (dBm)
25	1851.25 MHz	204.2	23.1
600	1880.00 MHz	204.2	23.1
1175	1908.75 MHz	204.2	23.1

7. RF POWER OUTPUT (RADIATED)

Specification: FCC Part 22.913(a), 24.232(b)(c)

7.1 Setup

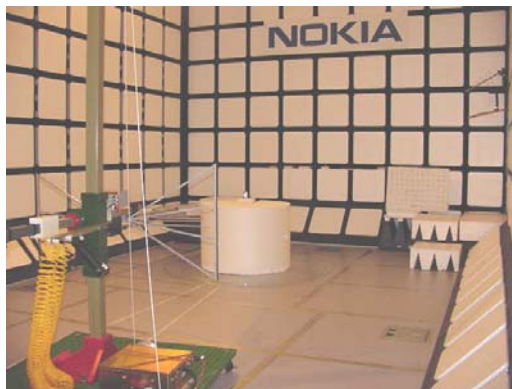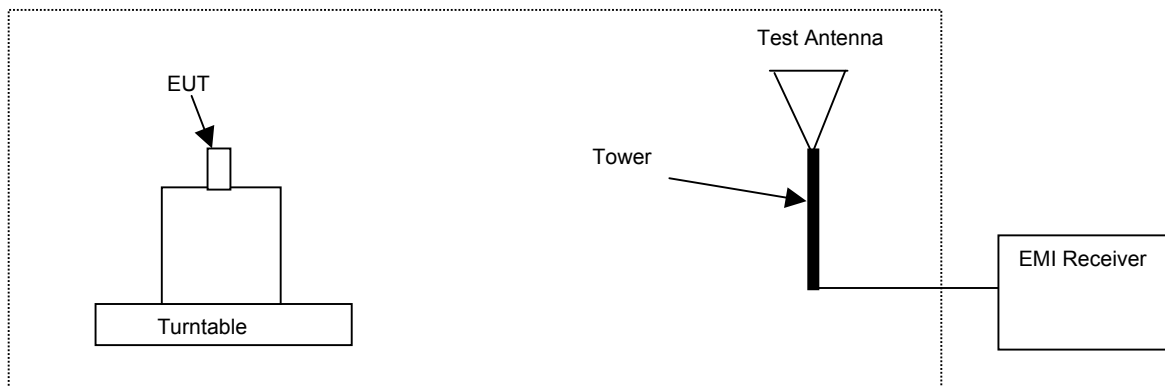

7.2 Pass/Fail Criteria

Band	FCC Limit (dBm)
Cellular	38.5 (EDRP)
PCS	33.0 (EIRP)

7.3 Detailed Test Results

Test Technician / Engineer	Bob alexander
Date of Measurement	7 FEB 05
Temperature	24 °C
Humidity	29 %RH
Test Result	Complies with FCC Part 22.913(a) and FCC Part 24.232(b)

Note: measurements were performed with 1MHz RBW/VBW for AMPS and 3MHz RBW/VBW for CDMA.

AMPS

Channel	Freq Max (MHz)	EDRP EMI (mW)	EDRP EMI (dBm)	Pol.
991	824.04 MHz	234	23.7	V
384	836.52 MHz	275	24.4	V
799	848.97 MHz	282	24.5	V

CDMA 800

Channel	Freq Max (MHz)	EDRP EMI (mW)	EDRP EMI (dBm)	Pol.
1013	824.70 MHz	182	22.6	V
384	836.52 MHz	219	23.4	V
777	848.31 MHz	229	23.6	V

CDMA 1900

Channel	Freq Max (MHz)	EIRP EMI (mW)	EIRP EMI (dBm)	Pol.
25	1851.25 MHz	282	24.5	V
600	1880.00 MHz	245	23.9	V
1175	1908.75 MHz	288	24.6	V

7.4 Measurement Uncertainty


The measurement uncertainty for this test is +/- 2.4dB for 800 to 2000 MHz.

8. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)

Specification: FCC Part 2.1049(c)(1), 24.238(a)(b)

8.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call.

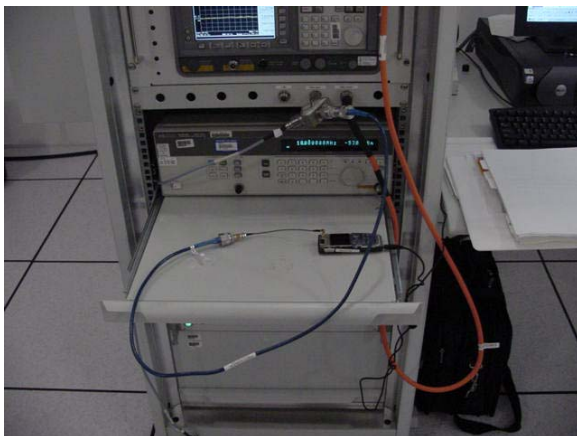

8.2 Pass/Fail Criteria

Occupied Bandwidth, Out of Band

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular 800, Low Channel	< 824	-13
Cellular 800, High Channel	> 849	-13
PCS 1900, Low Channel	< 1850	-13
PCS 1900, High Channel	> 1910	-13

Occupied Bandwidth, In Band


No pass/fail, these plots are used to determine the emission designators.

8.3 Detailed Test Results

Test Technician / Engineer	Darreyl Roberts
Date of Measurement	February 21, 2005
Temperature	22.0°C
Humidity	35.0%RH
Test Result	Complies with FCC Part 2.1049(c)(1), 24.238(a)(b)


AMPS Channel 991

300Hz RBW, 300Hz VBW, 100ms Sweep Time

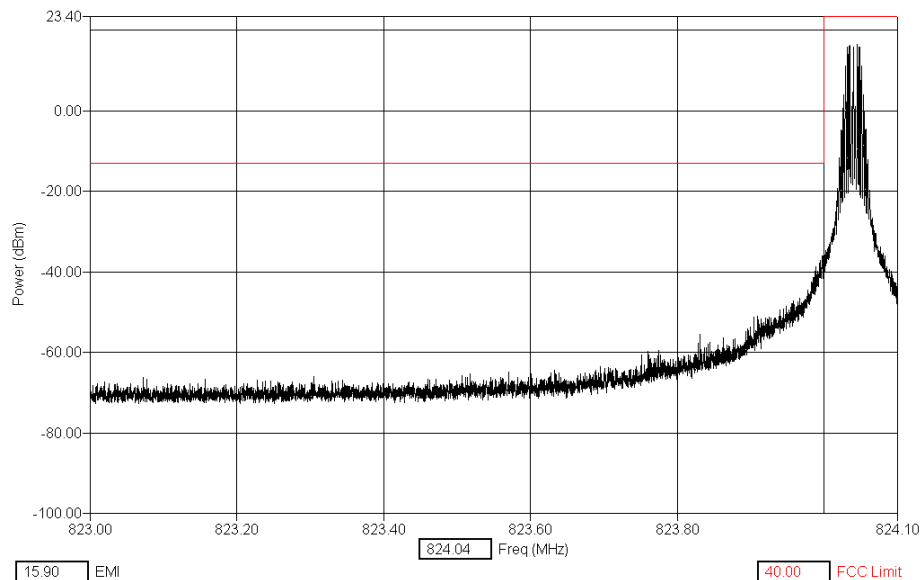


AMPS Channel 799

300Hz RBW, 300Hz VBW, 100ms Sweep Time

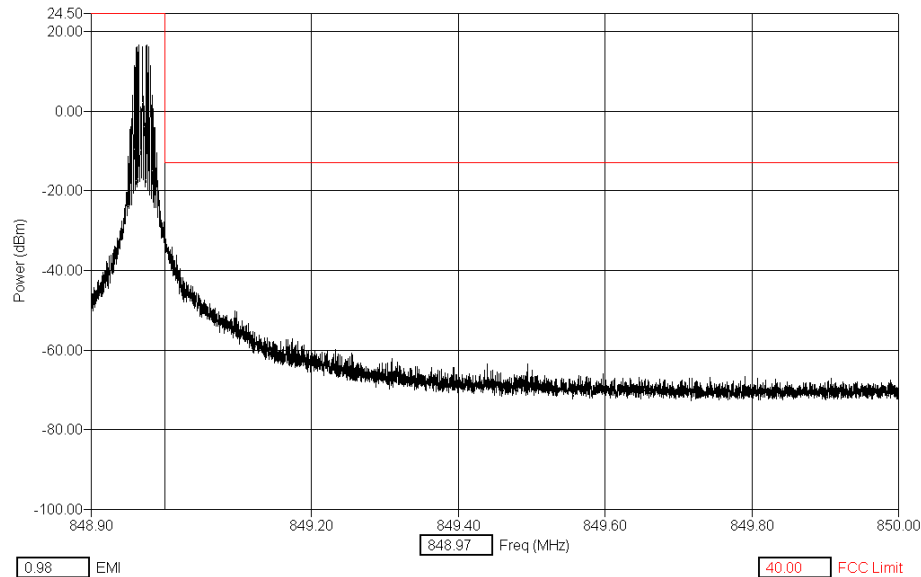

Cellular Band, CDMA 800, Channel 1013


12.5 kHz RBW, 30 kHz VBW, 2.6s Sweep Time

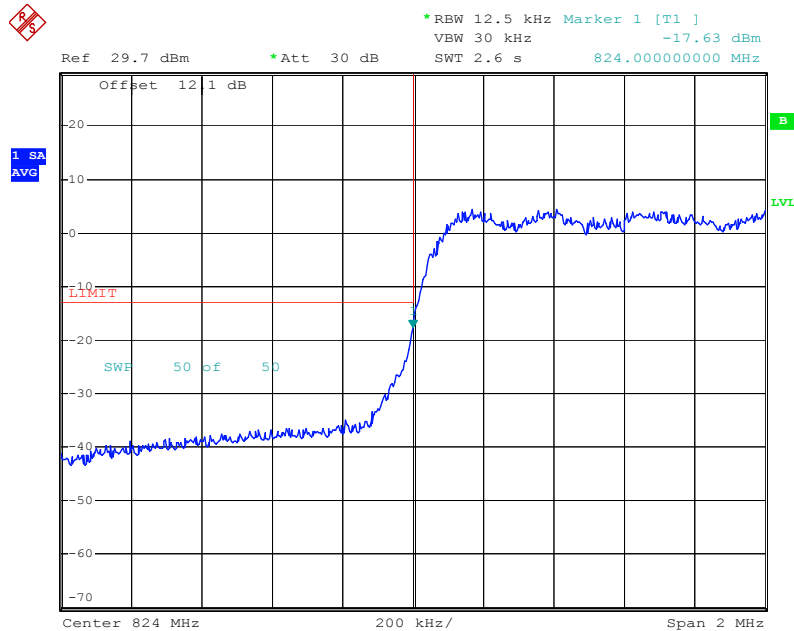

Date: 21.FEB.2005 11:10:24

Cellular Band, CDMA, Channel 777


12.5 kHz RBW, 30kHz VBW, 2.6s Sweep Time

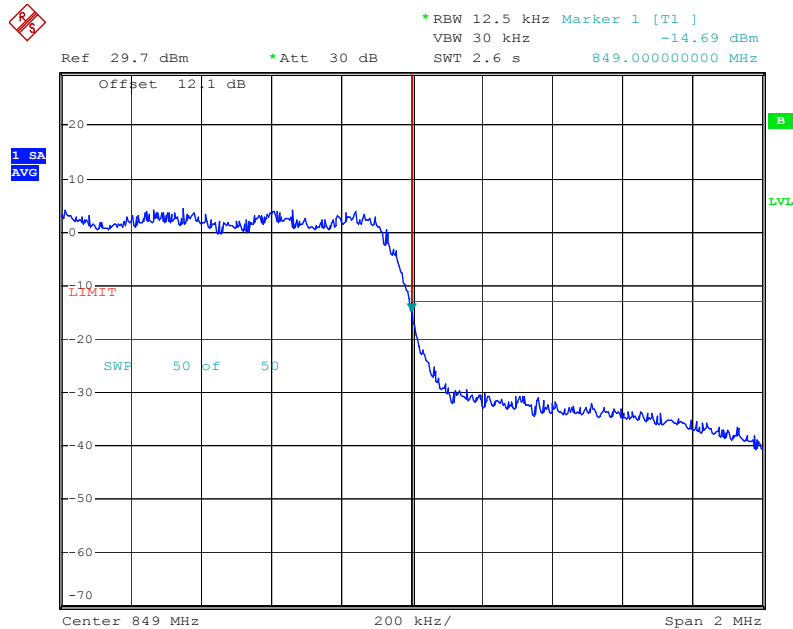

Date: 21.FEB.2005 11:15:02


PCS Band, CDMA1900 Low ch25

30 kHz RBW/VBW, 100ms Sweep Time

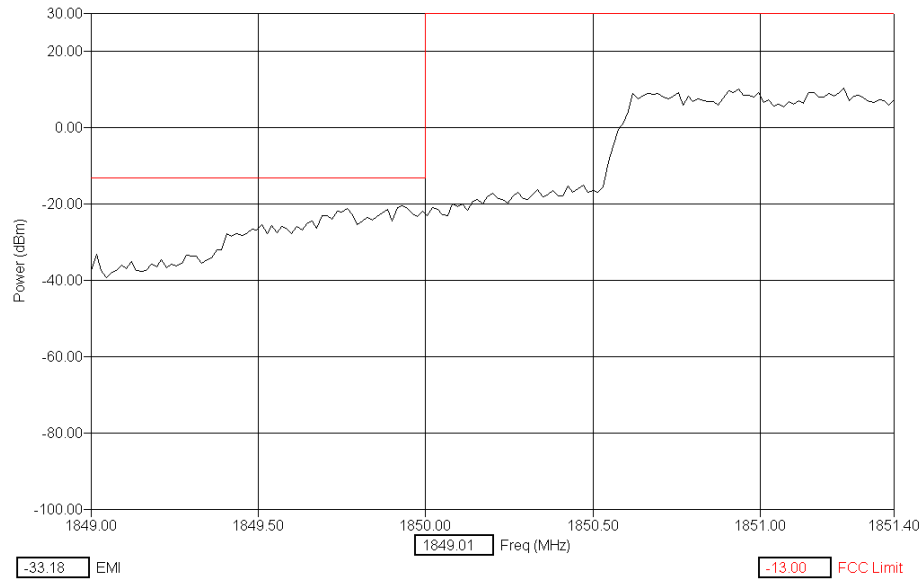


PCS Band. CDMA 1900, Channel 1175

30 kHz RBW/VBW, 100ms Sweep Time

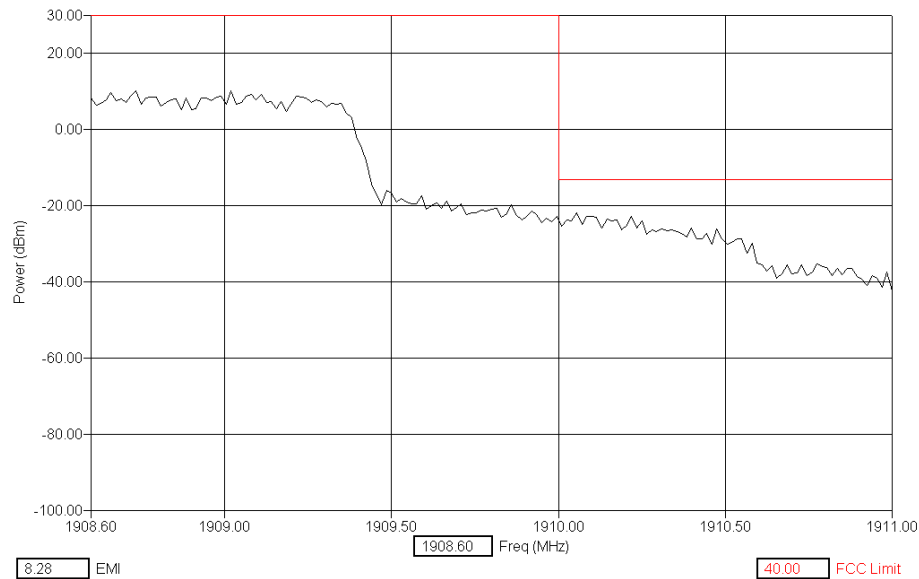


Occupied Bandwidth, In Band; Cellular, AMPS, Channel 384

300Hz RBW, 300Hz VBW, 100ms Sweep Time

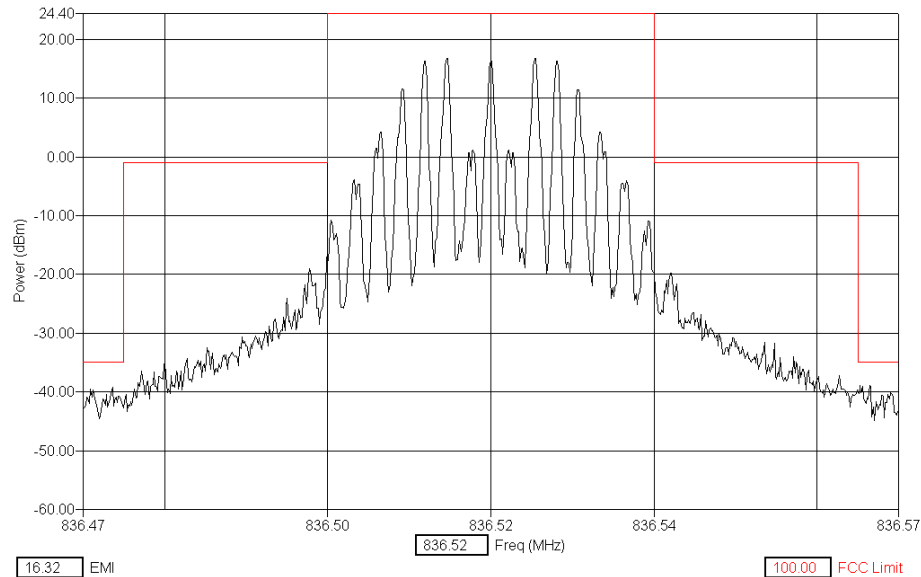


Occupied Bandwidth, In Band; Cellular, CDMA 800, Channel 384

3 kHz RBW/VBW, 100ms Sweep Time

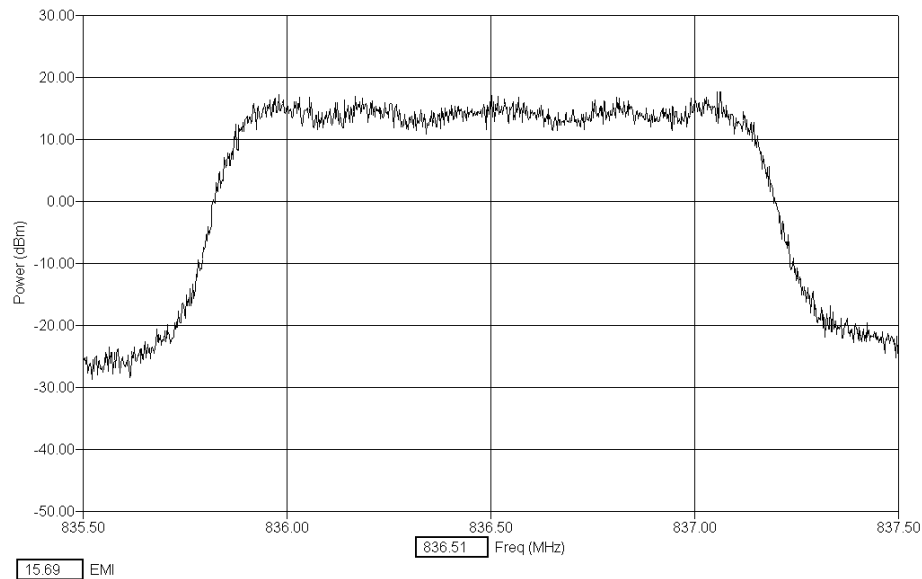

Occupied Bandwidth, In Band; PCS, CDMA 1900, Channel 600

3 kHz RBW/VBW, 100ms Sweep Time

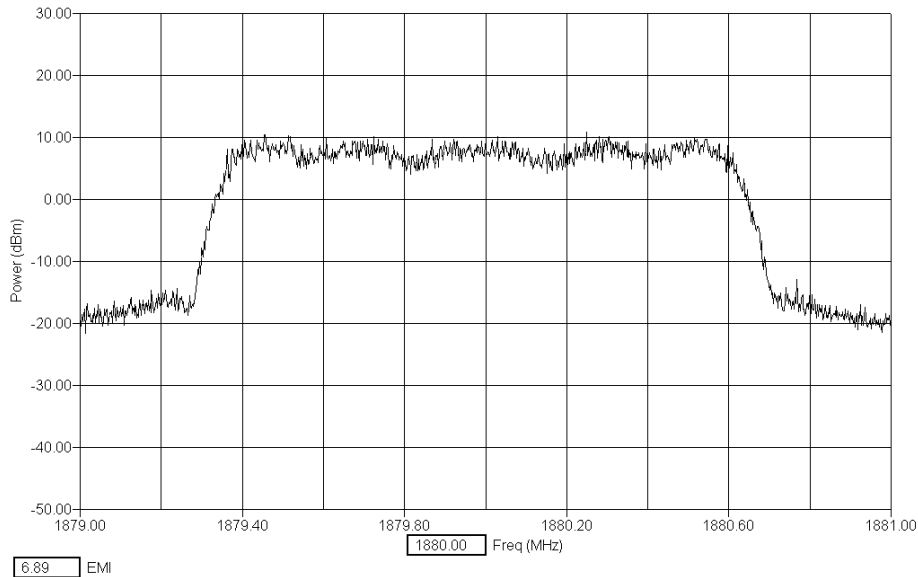

8.4 Measurement Uncertainty


The measurement uncertainty for this test is +/- 3.7dB for 100kHz - 1000MHz and +/- 5.3dB for 1 - 20GHz.

9. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Specification: FCC Part 2.1051

9.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call. Filters were introduced to reduce or eliminate spurious emission, which could be generated internally in the EMI receiver.

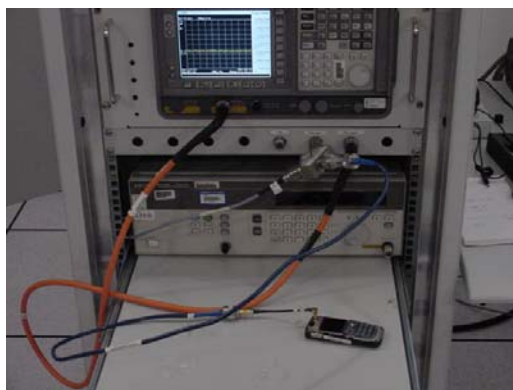

9.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular / PCS	30 – 20000 *	-13

* Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

9.3 Detailed Test Results

Test Technician / Engineer	Darreyl Roberts
Date of Measurement	February 08-09, 2005
Temperature	21.0°C
Humidity	43.0%RH
Test Result	Complies with FCC Part 2.1051

Note 1: EMI (dBm) = trace (dBuV) + cable loss (dB) + filter loss (dB).

Note 2: measurements were performed with 3MHz RBW/VBW.

AMPS Low Ch991

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
1648.08	-45.9	-13
2472.12	-40.3	-13
3296.16	-49.8	-13
4120.20	-50.7	-13
4944.24	-47.9	-13
5768.28	-51.0	-13
6592.32	-48.7	-13
7416.36	-47.6	-13
8240.40	-48.6	-13

AMPS Mid Ch384

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
1673.04	-42.8	-13
2509.56	-39.1	-13
3346.08	-50.5	-13
4182.60	-51.0	-13
5019.12	-51.6	-13
5855.64	-49.6	-13
6692.16	-48.3	-13
7528.68	-48.3	-13
8365.20	-49.5	-13

AMPS High Ch799

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
1697.94	-49.4	-13
2546.91	-48.8	-13
3395.88	-50.3	-13
4244.85	-48.9	-13
5093.82	-49.9	-13
5942.79	-49.8	-13
6791.76	-48.6	-13
7640.73	-48.3	-13
8489.70	-48.5	-13

CDMA 800 Low Ch1013

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
1649.4	-46.6	-13
2474.1	-40.9	-13
3298.8	-49.7	-13
4123.5	-50.1	-13
4948.2	-49.9	-13
5772.9	-50.4	-13
6597.6	-47.8	-13
7422.3	-46.3	-13
8247.0	-47.4	-13



CDMA 800 Mid Ch384

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
1673.04	-43.6	-13
2509.56	-36.7	-13
3346.08	-49.4	-13
4182.60	-49.0	-13
5019.12	-48.3	-13
5855.64	-49.2	-13
6692.16	-47.8	-13
7528.68	-47.6	-13
8365.20	-47.8	-13



CDMA 800 High Ch777

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
1696.62	-44.4	-13
2544.93	-34.9	-13
3393.24	-49.0	-13
4241.55	-50.6	-13
5089.86	-49.6	-13
5938.17	-49.0	-13
6786.48	-48.2	-13
7634.79	-45.9	-13
8483.1	-46.4	-13

**CDMA 1900 Low Ch25**

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
3702.5	-49.9	-13
5553.75	-48.7	-13
7405	-46.7	-13
9256.25	-47.0	-13
11107.5	-48.4	-13
12958.75	-47.8	-13
14810	-44.9	-13
16661.25	-45.9	-13
18512.5	-46.2	-13

CDMA 1900 Mid Ch600

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
3760	-50.2	-13
5640	-48.9	-13
7520	-47.6	-13
9400	-48.4	-13
11280	-48.32	-13
13160	-45.1	-13
15040	-45.3	-13
16920	-46.5	-13
18800	-46.5	-13

CDMA 1900 High Ch1175

Freq Max (MHz)	(Pk) EMI (dBm)	FCC Limit (dBm)
3817.5	-40.02	-13
5726.25	-50.06	-13
7635	-45.5	-13
9543.75	-47.69	-13
11452.5	-47.36	-13
13361.25	-43.9	-13
15270	-44.73	-13
17178.75	-46.33	-13
19087.5	-47.34	-13

9.4 Measurement Uncertainty


The measurement uncertainty for this test is +/- 3.7dB for 100kHz - 1000MHz and +/- 5.3dB for 1 - 20GHz.

10. FIELD STRENGTH OF SPURIOUS RADIATION

Specification: FCC Part 2.1053

10.1 Setup

Test equipment set-up.

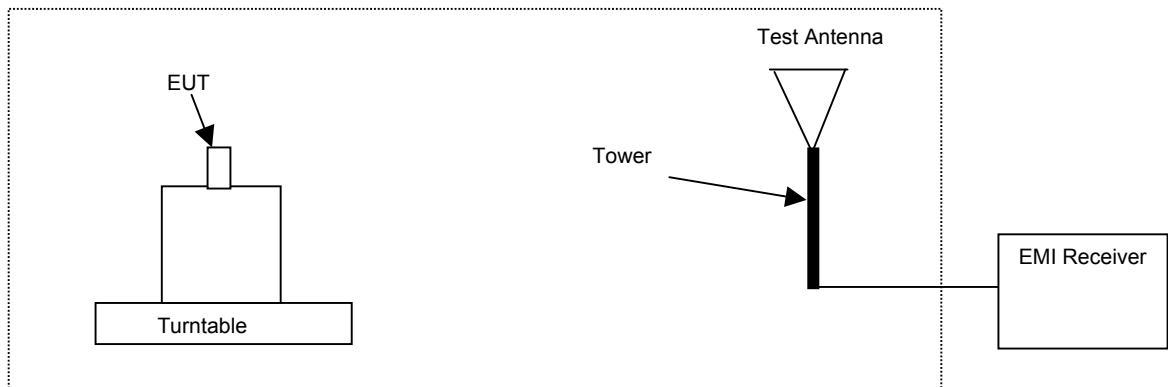

10.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limit (dBm)
Cellular / PCS	30 – 20000*	-13

- Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

Substitution method according to ANSI/TIA/EIA 603-1 was used for final measurements.

10.3 Detailed Test Results

Test Technician / Engineer	Bob Alexander	
Date of Measurement	February 09, 2005	
Temperature / Humidity	24 °C	29 %RH
Test Result	Complies with FCC Part 2.1053	

Note: Measurements were performed with 1MHz RBW/VBW.

AMPS, Channel

EDRP for Channel 384:

24.4 dBm

Freq Max (MHz)	(PK) EMI (dBm)	dBc	FCC Limit (dBm)	Pol.
1673.0	NF		-13.0	H
1673.0	NF		-13.0	V
2509.6	NF		-13.0	H
2509.6	NF		-13.0	V
3346.1	-46.8	-71.2	-13.0	H
3346.1	-49.0	-73.4	-13.0	V
4182.6	-45.6	-70.0	-13.0	H
4182.6	-46.8	-71.2	-13.0	V
5019.1	-48.6	-73.0	-13.0	H
5019.1	-46.1	-70.5	-13.0	V
5855.6	NF		-13.0	H
5855.6	NF		-13.0	V
6692.2	NF		-13.0	H
6692.2	NF		-13.0	V
7528.7	NF		-13.0	H
7528.7	NF		-13.0	V
8365.2	NF		-13.0	H
8365.2	NF		-13.0	V

CDMA Cellular, Channel 384

EDRP for Channel 384:

23.4 dBm

Freq Max (MHz)	(PK) EMI (dBm)	dBc	FCC Limit (dBm)	Pol.
1673.0	NF		-13.0	H
1673.0	NF		-13.0	V
2509.6	NF		-13.0	H
2509.6	NF		-13.0	V
3346.1	-46.5	-69.9	-13.0	H
3346.1	-48.9	-72.3	-13.0	V
4182.6	-43.7	-67.1	-13.0	H
4182.6	-43.4	-66.8	-13.0	V
5019.1	-45.8	-69.2	-13.0	H
5019.1	-37.0	-60.4	-13.0	V
5855.6	NF		-13.0	H
5855.6	NF		-13.0	V
6692.2	-46.3	-69.7	-13.0	H
6692.2	-47.3	-70.7	-13.0	V
7528.7	NF		-13.0	H
7528.7	NF		-13.0	V
8365.2	NF		-13.0	H
8365.2	NF		-13.0	V

CDMA PCS, Channel 600

EIRP for Channel 600:

23.9 dBm

Freq Max (MHz)	(PK) EMI (dBm)	dBc	FCC Limit (dBm)	Pol.
3760.0	-49.8	-73.7	-13.0	H
3760.0	-48.3	-72.2	-13.0	V
5640.0	-52.7	-76.6	-13.0	H
5640.0	-54.0	-77.9	-13.0	V
7520.0	-35.2	-59.1	-13.0	H
7520.0	-34.1	-58.0	-13.0	V
9400.0	-47.7	-71.6	-13.0	H
9400.0	-46.8	-70.7	-13.0	V
11280.0	NF		-13.0	H
11280.0	NF		-13.0	V
13160.0	NF		-13.0	H
13160.0	NF		-13.0	V
15040.0	-43.7	-67.6	-13.0	H
15040.0	-42.5	-66.4	-13.0	V
16920.0	NF		-13.0	H
16920.0	NF		-13.0	V

10.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 5.2dB for 30-300MHz; +/- 5.2dB for 300-1000MHz, +/- 5.6dB for 1-6GHz and +/-6.8 for 6-18GHz.

11. FREQUENCY STABILITY (TEMPERATURE VARIATION)

Specification: FCC Part 2.1055(a)(1)(b), 24.235

11.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

11.2 Pass/Fail Criteria

Not Applicable

11.3 Detailed Test Results

Test Technician / Engineer	Darreyl Roberts	
Date of Measurement	February 11, 2005	
Temperature / Humidity	23 °C	29 %RH
Test Result	Tested in accordance with 2.1055(a)(1)(b), 24.235 at maximum power setting.	

Temp. (°C)	AMPS, Channel 384	CDMA 800, Channel 384	CDMA 1900, Channel 600
	Change (Hz)	Change (Hz)	Change (Hz)
-30	222	22	35
-20	230	19	39
-10	228	13	36
0	229	15	38
10	232	16	33
20	222	17	38
30	220	17	33
40	210	15	34
50	222	18	45

12. FREQUENCY STABILITY (VOLTAGE VARIATION)

Specification: FCC Part 2.1055(d)(1)(2), 24.235

12.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

12.2 Pass/Fail Criteria

Not Applicable

12.3 Detailed Test Results

Test Technician / Engineer	Darreyl Roberts	
Date of Measurement	February 10, 2005	
Temperature / Humidity	23 °C	29 %RH
Test Result	Tested in accordance with 2.1055(d)(1)(2), 24.235 at maximum power setting.	

AMPS, Call Mode, Channel 384

% of STV	Voltage	Change (Hz)
85	3.14	N/A
100 (Nominal)	3.7	219
115	4.3	243
Battery End Point	3.2	240

CDMA 800, Call Mode, Channel 384

% of STV	Voltage	Change (Hz)
85	3.14	N/A
100 (Nominal)	3.7	16
115	4.3	19
Battery End Point	3.2	15

CDMA 1900, Call Mode, Channel 600

% of STV	Voltage	Change (Hz)
85	3.14	N/A
100 (Nominal)	3.7	34
115	4.3	35
Battery End Point	3.2	38