

承认书

SPECIFICATION FOR APPROVEAL

客户名称(CUSTOMER): ZLGD-A1-0240

客户料号(PART NO.): ZLGD-Y15X38. 5-18-FR

品 名(DESCRIPTION): 线圈+磁片 Coil + diskette

规格(SPECIFICATION): Silk-covered wire with 30mm magnetic edge
15x38.5,0.08x105P丝包线, 磁边起30MM

日 期 DATE: 20230821

本司确认 (TRX APPROVAL)		
制作	审核	承认日期
曾小仙	邱志辉	20230821
客户确认 (CUSTOMER APPROVAL)		
工程	批准	承认日期
确认结果(Result): ☐ 合格 ☐ 不合格 ☐ 其它		

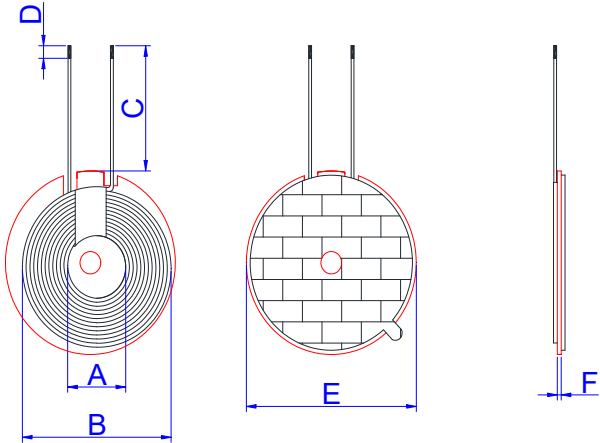
东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

东莞市石碣镇新风西路107号

电话: 0769-86016320 传真: 0769-86372427

东莞市德弗力五金电子材料有限公司
Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION					
产品型号: DESC	ZLGD-Y15X38. 5-30-FR	版本 Rev:A	Customer:	ZLGD-A1-0240	
			Description:	Coil + diskette	
			Date:	20230821	
一、尺寸DIMENSION:(mm) 			A	15.0±1.0	
			B	38.5±1.5	
			C	18.0±2.0	
			D	3.0±2.0	
			E	44.0±1.0	
			F	0.8±0.2	
			G		
			H		
			I		
			J		
			K		
			L		
			M		
			N		
			O		
			P		
			1.The coil is attached with G44*0.8 hard magnetic 2.Wrap 8mm of high-temperature tape around the cable outlet position 3.Attach double-sided tape with ear on the back of the magnetic disc 4.The coil is crooked 5.Do not loosen the coil		
二、					
天线增益 Antenna gain:					
Operation frequency:		113kHz-205kHz			
Antenna Type:		Loop coil Antenna			
Antenna gain:		0dBi			
三、绕线参数(WindingSpecification:)					
序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction	
1		0.08×105P silk-covered wire	12TS	anticlockwise	
四、电气特性 ELECTRICAL CHARACTERISTICS:					
温度 TEMPERATURE:25±10℃,湿度 RELATIVE HUMIDITY:65±20%					
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.		6.8uH±0.3Magnetized sheet	100KHz/1.0V	SHDA 1062
2	IND.				
3	Q值				
4	DCR				
拟制/日期PREPARED BY/DATE		审核/日期CHECKED BY/DATE		客户/日期CUSTOMEU/DATE	