

FCC RF Test Report

(LTE)

Report No.: JYTSZ-R12-2401466

Applicant: ITEL MOBILE LIMITED

Address of Applicant: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: S686LN

Trade Mark: itel

FCC ID: 2AJMN-S686LN

Applicable Standards: FCC CFR Title 47 Part 2, 22H, 24E, 27L & H & M, 90S

Date of Sample Receipt: 28 Nov., 2024

Date of Test: 29 Nov., 2024 to 03 Jan., 2025

Date of Report Issued: 07 Jan., 2025

Test Result: PASS

Tested by:

Jian Yan
Project Engineer

Date:

07 Jan., 2025

Reviewed by:

Yan Yan
Senior Engineer

Date:

07 Jan., 2025

Approved by:

Jian Yan
Manager

Date:

07 Jan., 2025

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	07 Jan., 2025	Original

2 Contents

	Page
Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode and Environment	6
3.4 Description of Test Auxiliary Equipment	6
3.5 Measurement Uncertainty	6
3.6 Additions to, Deviations, or Exclusions from the Method	6
3.7 Laboratory Facility	7
3.8 Laboratory Location.....	7
3.9 Test Instruments List	7
4 Measurement Setup and Procedure	9
4.1 Test Channel	9
4.2 Test Setup	14
4.3 Test Procedure	15
5 Test Results.....	16
5.1 Summary	16
5.1.1 Clause and Data Summary.....	16
5.1.2 Test Limit.....	17
5.2 Field Strength of Spurious Radiation Measurement	19

3 General Information

3.1 Client Information

Applicant:	ITEL MOBILE LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	ITEL MOBILE LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

3.2 General Description of E.U.T.

Product Name:	Mobile Phone		
Model No.:	S686LN		
Operation Frequency Range:	LTE band 2:	Tx: 1850 MHz - 1910 MHz	Rx: 1930 MHz - 1990 MHz
	LTE band 4:	Tx: 1710 MHz - 1755 MHz	Rx: 2110 MHz - 2155 MHz
	LTE band 5:	Tx: 824 MHz - 849 MHz	Rx: 869 MHz - 894 MHz
	LTE band 7:	Tx: 2500 MHz - 2570 MHz	Rx: 2620 MHz - 2690 MHz
	LTE band 12:	Tx: 699 MHz - 716 MHz	Rx: 729 MHz - 746 MHz
	LTE band 17:	Tx: 704 MHz - 716 MHz	Rx: 734 MHz - 746 MHz
	LTE band 26:	Tx: 814 MHz - 849 MHz	Rx: 859 MHz - 894 MHz
	LTE band 38:	Tx: 2570 MHz - 2620 MHz	Rx: 2570 MHz - 2620 MHz
	LTE band 41:	Tx: 2535 MHz - 2655 MHz	Rx: 2535 MHz - 2655 MHz
	LTE band 66:	Tx: 1710 MHz - 1780 MHz	Rx: 2110 MHz - 2200 MHz
	LTE CA(UL):	CA_5B, CA_7C, CA_38C, CA_41C	
Modulation Type:	☒ QPSK ☒ 16QAM ☒ 64QAM		
Antenna Type:	Internal Antenna		
Antenna Gain:	LTE band 2:	ANT0: -2.8 dBi (declare by Applicant)	
		ANT2: -8.3 dBi (declare by Applicant)	
	LTE band 4:	ANT0: -2.7 dBi (declare by Applicant)	
		ANT2: -8.2 dBi (declare by Applicant)	
	LTE band 5:	ANT0: -6.89 dBi (declare by Applicant)	
		ANT1: -5.89 dBi (declare by Applicant)	
	LTE band 7:	ANT0: -0.88 dBi (declare by Applicant)	
		ANT2: -8.18 dBi (declare by Applicant)	
	LTE band 12:	ANT0: -7.95 dBi (declare by Applicant)	
		ANT1: -6.55 dBi (declare by Applicant)	
	LTE band 17:	ANT0: -7.95 dBi (declare by Applicant)	
		ANT1: -6.55 dBi (declare by Applicant)	
	LTE band 26:	ANT0: -6.89 dBi (declare by Applicant)	
		ANT1: -5.89 dBi (declare by Applicant)	
	LTE band 38:	ANT0: -0.88 dBi (declare by Applicant)	
		ANT2: -8.18 dBi (declare by Applicant)	
	LTE band 41:	ANT0: -0.88 dBi (declare by Applicant)	
		ANT2: -8.18 dBi (declare by Applicant)	
	LTE band 66:	ANT0: -2.7 dBi (declare by Applicant)	
		ANT2: -8.2 dBi (declare by Applicant)	

Power Supply:	Rechargeable Li-ion Polymer Battery DC3.85V, 4900mAh
AC Adapter:	Model: U180ISA Input: AC100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 2.4A or 7.5V, 2.4A 18.0W Max
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

3.3 Test Mode and Environment

Test Mode:	
QPSK mode:	Keep the EUT communication with simulated station in QPSK mode
16QAM mode:	Keep the EUT communication with simulated station in 16QAM mode
64QAM mode:	Keep the EUT communication with simulated station in 64QAM mode
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.	
Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.85Vdc, Extreme: Low 3.45Vdc, High 4.40Vdc
Test Engineer:	Lao Lu (Conducted measurement) Real Chen(Radiated measurement)

3.4 Description of Test Auxiliary Equipment

Test Equipment	Manufacturer	Model No.	Serial No.
Simulated Station	Anritsu	MT8820C	6201026545

3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m FAR)	4.95 dB
Radiated Emission (6GHz ~ 18GHz) (3m FAR)	5.23 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.32 dB
Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.	

3.6 Additions to, Deviations, or Exclusions from the Method

No

3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.9 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	01-05-2024	01-04-2025
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-09-2024	01-08-2025
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-27-2023	12-26-2024
				12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-27-2023	12-26-2024
				12-16-2024	12-15-2025
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-17-2024	01-16-2025
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Radiated Emission(3m FAR):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	07-01-2024	06-30-2025
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-01-2024	06-30-2027
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	06-16-2024	06-15-2025
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	12-28-2023	12-27-2024
				12-25-2024	12-24-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-28-2023	12-27-2024
				12-25-2024	12-24-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	12-28-2023	12-27-2024
				12-25-2024	12-24-2025
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	04-24-2024	04-23-2025
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	04-24-2024	04-23-2025
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-28-2023	12-27-2024
				12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	12-27-2023	12-26-2024
				12-16-2024	12-15-2025
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-27-2023	12-26-2024
				12-16-2024	12-15-2025
Spectrum Analyzer	KEYSIGHT	N9020B	WXJ081-1	06-11-2024	06-10-2025
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	07-30-2024	07-29-2025
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	07-30-2024	07-29-2025
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	07-30-2024	07-29-2025
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9020A	WXJ094	09-09-2024	09-08-2025
Simulated Station	Rohde & Schwarz	CMW500	WXJ081	07-18-2024	07-17-2025
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	01-09-2023	01-08-2025
DC Power Supply	Keysight	E3642A	WXJ025-2	N/A	
RF Control Unit	Tonscend	JS0806-1	WXG010	N/A	
Band Reject Filter Group	Tonscend	JS0806-F	WXG010-1	N/A	
Test Software	Tonscend	TS+	Version: 2.6.9.0526		

4 Measurement Setup and Procedure

4.1 Test Channel

According to ANSI C63.26-2015 chapter 5.1.2.1 Table 2 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

LTE band 2					
Channels		Frequency (MHz)	Channels		Frequency (MHz)
1.4 MHz			3 MHz		
Lowest channel	18607	1850.7	Lowest channel	18915	1851.5
Middle channel	18900	1880.0	Middle channel	18900	1880.0
Highest channel	19193	1909.3	Highest channel	19185	1908.5
5 MHz			10 MHz		
Lowest channel	18625	1852.5	Lowest channel	18650	1855.0
Middle channel	18900	1880.0	Middle channel	18900	1880.0
Highest channel	19175	1907.5	Highest channel	19150	1905.0
15 MHz			20 MHz		
Lowest channel	18675	1857.5	Lowest channel	18700	1860.0
Middle channel	18900	1880.0	Middle channel	18900	1880.0
Highest channel	19125	1902.5	Highest channel	19100	1900.0
LTE band 4					
Channels		Frequency (MHz)	Channels		Frequency (MHz)
1.4 MHz			3 MHz		
Lowest channel	19957	1710.7	Lowest channel	19965	1711.5
Middle channel	20175	1732.5	Middle channel	20175	1732.5
Highest channel	20393	1754.3	Highest channel	20385	1753.5
5 MHz			10 MHz		
Lowest channel	19975	1712.5	Lowest channel	20000	1715.0
Middle channel	20175	1732.5	Middle channel	20175	1732.5
Highest channel	20375	1752.5	Highest channel	20350	1750.0
15 MHz			20 MHz		
Lowest channel	20025	1717.5	Lowest channel	20050	1720.0
Middle channel	20175	1732.5	Middle channel	20175	1732.5
Highest channel	20325	1747.5	Highest channel	20300	1745.0
LTE band 5					
Channels		Frequency (MHz)	Channels		Frequency (MHz)
1.4 MHz			3 MHz		
Lowest channel	20407	824.7	Lowest channel	20415	825.5
Middle channel	20525	836.5	Middle channel	20525	836.5
Highest channel	20643	848.3	Highest channel	20635	847.5
5 MHz			10 MHz		
Lowest channel	20425	826.5	Lowest channel	20450	829.0
Middle channel	20525	836.5	Middle channel	20525	836.5
Highest channel	20625	846.5	Highest channel	20600	844.0

LTE band 7					
Channels		Frequency (MHz)	Channels		Frequency (MHz)
5 MHz			10 MHz		
Lowest channel	20775	2502.5	Lowest channel	20800	2505.0
Middle channel	21100	2535.0	Middle channel	21100	2535.0
Highest channel	21425	2567.5	Highest channel	21400	2565.0
15 MHz			20 MHz		
Lowest channel	20825	2507.5	Lowest channel	20850	2510.0
Middle channel	21100	2535.0	Middle channel	21100	2535.0
Highest channel	21375	2562.5	Highest channel	21350	2560.0
LTE band 12					
Channels		Frequency (MHz)	Channels		Frequency (MHz)
1.4 MHz			3 MHz		
Lowest channel	23017	699.70	Lowest channel	23025	700.50
Middle channel	23095	707.50	Middle channel	23095	707.50
Highest channel	23173	715.30	Highest channel	23165	714.50
5 MHz			10 MHz		
Lowest channel	23035	701.50	Lowest channel	23060	704.00
Middle channel	23095	707.50	Middle channel	23095	707.50
Highest channel	23155	713.50	Highest channel	23130	711.00
LTE band 17					
5 MHz			10 MHz		
Lowest channel	23755	706.50	Lowest channel	23780	709.00
Middle channel	23790	710.00	Middle channel	23790	710.00
Highest channel	23825	713.50	Highest channel	23800	711.00
LTE band 26 For Part 22					
Channels		Frequency (MHz)	Channels		Frequency (MHz)
1.4 MHz			3 MHz		
Lowest channel	26797	824.7	Lowest channel	26805	825.5
Middle channel	26915	836.5	Middle channel	26915	836.5
Highest channel	27033	848.3	Highest channel	27025	847.5
5 MHz			10 MHz		
Lowest channel	26815	826.5	Lowest channel	26840	829.0
Middle channel	26915	836.5	Middle channel	26915	836.5
Highest channel	27015	846.5	Highest channel	26990	844.0
15 MHz					
Lowest channel	26865	831.5			
Middle channel	26915	836.5			
Highest channel	26965	841.5			

LTE band 26 For Part 90					
Channels		Frequency (MHz)	Channels		Frequency (MHz)
1.4 MHz			3 MHz		
Lowest channel	26697	814.7	Lowest channel	26705	815.5
Middle channel	26740	819.0	Middle channel	26740	819.0
Highest channel	26783	823.3	Highest channel	26775	822.5
5 MHz			10 MHz		
Lowest channel	26715	816.5	Lowest channel	/	/
Middle channel	26740	819.0	Middle channel	26740	819.0
Highest channel	26765	821.5	Highest channel	/	/
LTE band 38					
Channels		Frequency (MHz)	Channels		Frequency (MHz)
5 MHz			10 MHz		
Lowest channel	37775	2572.5	Lowest channel	37800	2575.0
Middle channel	38000	2595.0	Middle channel	38000	2595.0
Highest channel	38225	2617.5	Highest channel	38200	2615.0
15 MHz			20 MHz		
Lowest channel	37825	2577.5	Lowest channel	37850	2580.0
Middle channel	38000	2595.0	Middle channel	38000	2595.0
Highest channel	38175	2612.5	Highest channel	38150	2610.0
LTE band 41					
Channels		Frequency (MHz)	Channels		Frequency (MHz)
5 MHz			10 MHz		
Lowest channel	40065	2537.50	Lowest channel	40090	2540.00
Middle channel	40640	2595.00	Middle channel	40640	2595.00
Highest channel	41215	2652.50	Highest channel	41190	2650.00
15 MHz			20 MHz		
Lowest channel	40115	2542.50	Lowest channel	40140	2545.00
Middle channel	40640	2595.00	Middle channel	40640	2595.00
Highest channel	41165	2647.50	Highest channel	41140	2645.00
LTE band 66					
Channels		Frequency (MHz)	Channels		Frequency (MHz)
1.4 MHz			3 MHz		
Lowest channel	131979	1710.7	Lowest channel	131987	1711.5
Middle channel	132322	1745.0	Middle channel	132322	1745.0
Highest channel	132665	1779.3	Highest channel	132657	1778.5
5 MHz			10 MHz		
Lowest channel	131997	1712.5	Lowest channel	132022	1715.0
Middle channel	132322	1745.5	Middle channel	132322	1745.0
Highest channel	132647	1777.5	Highest channel	132622	1775.0
15 MHz			20 MHz		
Lowest channel	132047	1717.5	Lowest channel	132072	1720.0
Middle channel	132322	1745.0	Middle channel	132322	1745.0
Highest channel	132597	1772.5	Highest channel	132572	1770.0

LTE CA_5B

Table 4.3.1.1.5A-1: Test frequencies for CA_5B

Range	CC-Combo / N _{RB,agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	15+25	15	20416	825.6	2416	870.6	25	20455	829.5	2455	874.5
		25	20425	826.5	2425	871.5	15	20464	830.4	2464	875.4
	25+50	25	20428	826.8	2428	871.8	50	20500	834	2500	879
	50+25	50	20450	829	2450	874	25	20522	836.2	2522	881.2
	50+50	50	20450	829	2450	874	50	20549	838.9	2549	883.9
Mid	15+25	15	20501	834.1	2501	879.1	25	20540	838.0	2540	883.0
		25	20510	835.0	2510	880.0	15	20549	838.9	2549	883.9
	25+50	25	20478	831.8	2478	876.8	50	20550	839	2550	884
	50+25	50	20500	834	2500	879	25	20572	841.2	2572	886.2
	50+50	50	20478	831.8	2478	876.8	50	20575	841.5	2575	886.5
High	15+25	15	20586	842.6	2586	887.6	25	20625	846.5	2625	891.5
		25	20595	843.5	2595	888.5	15	20634	847.4	2634	892.4
	25+50	25	20528	836.8	2528	881.8	50	20600	844	2600	889
	50+25	50	20550	839	2550	884	25	20622	846.2	2622	891.2
	50+50	50	20501	834.1	2501	879.1	50	20600	844	2600	889

Note 1: Carriers in increasing frequency order.

LTE CA_7C

Table 4.3.1.1.7A-1: Test frequencies for CA_7C

Range	CC-Combo / N _{RB,agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+50	75	20825	2507.5	2825	2627.5	50	20945	2519.5	2945	2639.5
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8	
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+50	75	21051	2530.1	3051	2650.1	50	21171	2542.1	3171	2662.1
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9	
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+50	75	21277	2552.7	3277	2672.7	50	21397	2564.7	3397	2684.7
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680	
Note 1: Carriers in increasing frequency order											

Note 1: Carriers in increasing frequency order.

LTE CA_38C

Table 4.3.1.2.6A-1: Test frequencies for CA_38C

Range	CC-Combo / N _{RB,agg} [RB]	CC1 Note1			CC2 Note1		
		BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]	BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]
Low	75+75	75	37825	2577.5	75	37975	2592.5
	100+100	100	37850	2580	100	38048	2599.8
Mid	75+75	75	37925	2587.5	75	38075	2602.5
	100+100	100	37901	2585.1	100	38099	2604.9
High	75+75	75	38025	2597.5	75	38175	2612.5
	100+100	100	37952	2590.2	100	38150	2610

Note 1: Carriers in increasing frequency order.

LTE CA_41C

Table 4.3.1.2.9A-1: Test frequencies for CA_41C

Range	CC-Combo / N _{RB,agg} [RB]	CC1 Note1			CC2 Note1		
		BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]	BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]
Low	25+100	25	39683	2499.3	100	39800	2511
		100	39750	2506	25	39867	2517.7
	50+75	50	39703	2501.3	75	39823	2513.3
		75	39725	2503.5	50	39845	2515.5
	50+100	50	39705	2501.5	100	39849	2515.9
		100	39750	2506	50	39894	2520.4
	75+75	75	39725	2503.5	75	39875	2518.5
		75	39728	2503.8	100	39899	2520.9
	75+100	75	39750	2506	75	39921	2523.1
		100	39750	2506	100	39948	2525.8
Mid	25+100	25	40528	2583.8	100	40645	2595.5
		100	40595	2590.5	25	40712	2602.2
	50+75	50	40549	2585.9	75	40669	2597.9
		75	40571	2588.1	50	40691	2600.1
	50+100	50	40526	2583.6	100	40670	2598.0
		100	40571	2588.1	50	40715	2602.5
	75+75	75	40545	2585.5	75	40695	2600.5
		75	40523	2583.3	100	40694	2600.4
	75+100	75	40546	2585.6	75	40717	2602.7
		100	40521	2583.1	100	40719	2602.9
High	25+100	25	41373	2668.3	100	41490	2680
		100	41440	2675	25	41557	2686.7
	50+75	50	41395	2670.5	75	41515	2682.5
		75	41417	2672.7	50	41537	2684.7
	50+100	50	41346	2665.6	100	41490	2680
		100	41391	2670.1	50	41535	2684.5
	75+75	75	41365	2667.5	75	41515	2682.5
		75	41319	2662.9	100	41490	2680
	75+100	75	41341	2665.1	75	41512	2682.2
		100	41292	2660.2	100	41490	2680


Note 1: Carriers in increasing frequency order.

Note 2: This test frequency is applicable only for intra-band contiguous CA which requires channel spacing to be less than nominal channel spacing.


4.2 Test Setup

1) Radiated emission measurement:


Below 1GHz (3m SAC)

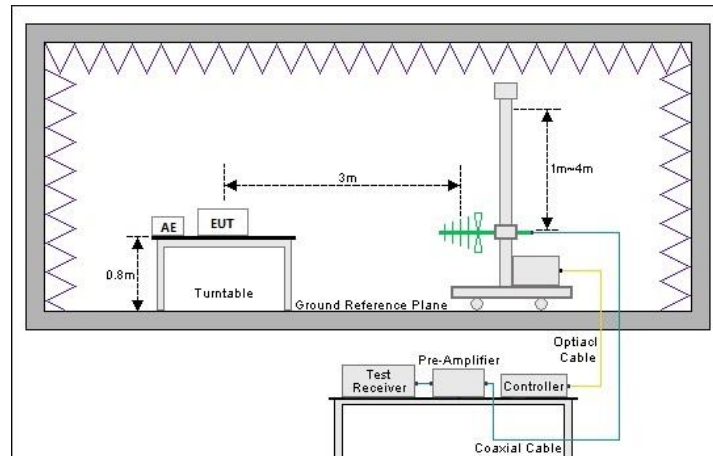

Above 1GHz (3m FAR)

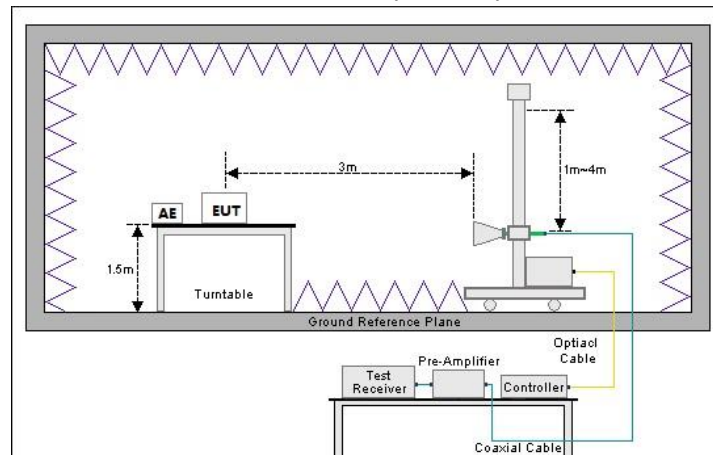

2) Conducted test method

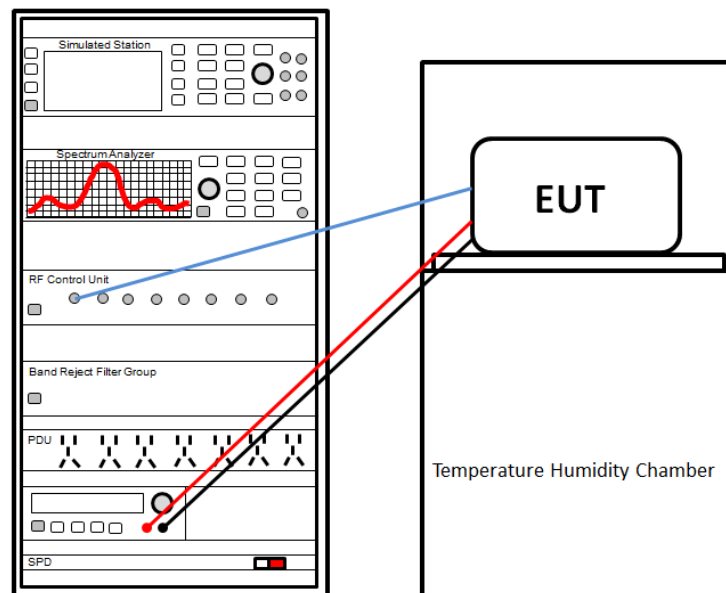

4.3 Test Procedure

Test method	Test step
Radiated emission	For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	1. The LTE antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

5 Test Results

5.1 Summary

5.1.1 Clause and Data Summary

Test items	Standard clause	Test data	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	See SAR Report	Pass
RF Output Power	Part 2.1046 Part 22.913 (a)(5) Part 24.232 (c) Part 27.50 (c)(10) Part 27.50 (d)(4) Part 27.50 (h)(2) Part 90.635 (b)	Appendix – LTE ANT0 Appendix – LTE ANT1& ANT2 Appendix – LTE CA	Pass
Peak-to-Average Power Ratio	Part 24.232 (d) Part 27.50 (d)(5)	Appendix – LTE ANT0 Appendix – LTE ANT1& ANT2 Appendix – LTE CA	Pass
Modulation Characteristics	Part 2.1047	Appendix – LTE ANT0 Appendix – LTE ANT1& ANT2 Appendix – LTE CA	Pass
26dB Emission Bandwidth 99% Occupied Bandwidth	Part 2.1049	Appendix – LTE ANT0 Appendix – LTE ANT1& ANT2 Appendix – LTE CA	Pass
Out of Band Emission at Antenna Terminals	Part 2.1051 Part 22.917 (a) Part 24.238 (a) Part 27.53 (g) Part 27.53 (h) Part 27.53 (m)(4) Part 90.691 (a)	Appendix – LTE ANT0 Appendix – LTE ANT1& ANT2 Appendix – LTE CA	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a) Part 27.53 (g) Part 27.53 (h) Part 27.53 (m)(4) Part 90.691 (a)	See Section 5.2	Pass
Frequency Stability vs. Temperature	Part 2.1055 (a)(1)(b) Part 22.355 Part 24.235 Part 27.54 Part 90.213 (a)	Appendix – LTE ANT0 Appendix – LTE ANT1& ANT2 Appendix – LTE CA	Pass
Frequency Stability vs. Voltage	Part 2.1055 (d)(2) Part 22.355 Part 24.235 Part 27.54 Part 90.213 (a)	Appendix – LTE ANT0 Appendix – LTE ANT1& ANT2 Appendix – LTE CA	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (Fundamental Frequency below 1GHz)/1.0dB (Fundamental Frequency above 1GHz) (provided by the customer).			
Test Method:	ANSI/TIA-603-E-2016 ANSI C63.26-2015		

5.1.2 Test Limit

Test items	Limit
RF Output Power	LTE band 2/7/38/41: 2W EIRP LTE band 4/66: 1W EIRP LTE band 5/26(Part 22): 7W ERP LTE band 12/17: 3W ERP LTE band 26(Part 90): 100W EIRP
Peak-to-Average Power Ratio	LTE band 2/4/26: The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB Other bands: N/A report only
Modulation Characteristics	N/A
26dB Emission Bandwidth 99% Occupied Bandwidth	N/A
Out of Band Emission at Antenna Terminals Field Strength of Spurious Radiation	LTE band 2, 4, 5, 12, 17, 26(Part 22), 66: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. LTE band 7, 38, 41: For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. LTE band 26(Part 90): (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

LTE band 2:

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

LTE band 4, 7, 12, 17, 38, 41, 66:

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

LTE band 5, 26(Part 22):

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

TABLE C-1—FREQUENCY TOLERANCE FOR TRANSMITTERS IN THE PUBLIC MOBILE SERVICES

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

Frequency Stability vs. Temperature

Frequency Stability vs. Voltage

LTE band 26(Part 90):

Part 90.213(a): Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1 2 3} 100	100	200
25-50	20	20	50
72-76	5		50
150-174	^{5 11} 5	^{6 5}	^{4 6} 50
216-220	1.0		1.0
220-222 ¹²	0.1	1.5	1.5
421-512	^{7 11 14} 2.5	^{8 5}	^{8 5}
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 ¹³	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	⁹ 300	300	300
Above 2450 ¹⁰			

5.2 Field Strength of Spurious Radiation Measurement

Note: All bandwidths, modulation types and RB configurations were pretested, and it was found that minimum bandwidths, QPSK modulation and 1RB0 were the worst modes, and only the worst modes were reflected in the report.

LTE band 2 – 1.4 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3701.40	-50.11	-0.36	-50.47	-13.00	37.47	Vertical
5552.10	-50.21	4.16	-46.05	-13.00	33.05	Vertical
7402.00	-63.49	6.10	-57.39	-13.00	44.39	Vertical
3701.40	-47.59	-0.17	-47.76	-13.00	34.76	Horizontal
5552.10	-46.40	4.07	-42.33	-13.00	29.33	Horizontal
7402.00	-64.59	5.78	-58.81	-13.00	45.81	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.00	-50.14	-1.01	-51.15	-13.00	38.15	Vertical
5640.00	-50.58	3.96	-46.62	-13.00	33.62	Vertical
7520.00	-63.18	5.55	-57.63	-13.00	44.63	Vertical
3760.00	-47.35	-0.56	-47.91	-13.00	34.91	Horizontal
5640.00	-46.56	4.14	-42.42	-13.00	29.42	Horizontal
7520.00	-64.11	5.56	-58.55	-13.00	45.55	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3816.60	-50.21	-0.59	-50.80	-13.00	37.80	Vertical
5724.90	-50.19	3.42	-46.77	-13.00	33.77	Vertical
7633.20	-63.17	6.40	-56.77	-13.00	43.77	Vertical
3816.60	-46.92	-0.10	-47.02	-13.00	34.02	Horizontal
5724.90	-46.18	3.80	-42.38	-13.00	29.38	Horizontal
7633.20	-64.46	6.24	-58.22	-13.00	45.22	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 4 – 1.4 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3421.40	-50.76	-2.15	-52.91	-13.00	39.91	Vertical
5132.10	-58.48	3.80	-54.68	-13.00	41.68	Vertical
6842.80	-64.38	5.86	-58.52	-13.00	45.52	Vertical
3421.40	-49.07	-2.22	-51.29	-13.00	38.29	Horizontal
5132.10	-54.29	3.86	-50.43	-13.00	37.43	Horizontal
6842.80	-63.37	6.07	-57.30	-13.00	44.30	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.00	-50.88	-2.54	-53.42	-13.00	40.42	Vertical
5197.50	-58.36	3.25	-55.11	-13.00	42.11	Vertical
6930.00	-64.45	5.20	-59.25	-13.00	46.25	Vertical
3465.00	-48.98	-2.54	-51.52	-13.00	38.52	Horizontal
5197.50	-53.81	3.17	-50.64	-13.00	37.64	Horizontal
6930.00	-63.38	5.17	-58.21	-13.00	45.21	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3508.60	-50.88	-3.13	-54.01	-13.00	41.01	Vertical
5262.90	-58.74	3.11	-55.63	-13.00	42.63	Vertical
7017.20	-63.96	5.74	-58.22	-13.00	45.22	Vertical
3508.60	-49.05	-2.96	-52.01	-13.00	39.01	Horizontal
5262.90	-53.72	3.46	-50.26	-13.00	37.26	Horizontal
7017.20	-63.00	5.80	-57.20	-13.00	44.20	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 5 – 1.4 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.40	-50.79	-11.51	-62.30	-13.00	49.30	Vertical
2474.10	-60.87	-8.67	-69.54	-13.00	56.54	Vertical
3298.80	-56.52	-3.89	-60.41	-13.00	47.41	Vertical
1649.40	-46.11	-10.85	-56.96	-13.00	43.96	Horizontal
2474.10	-60.62	-9.13	-69.75	-13.00	56.75	Horizontal
3298.80	-58.39	-3.96	-62.35	-13.00	49.35	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.30	-51.09	-10.70	-61.79	-13.00	48.79	Vertical
2509.50	-60.82	-8.66	-69.48	-13.00	56.48	Vertical
3346.00	-56.89	-3.33	-60.22	-13.00	47.22	Vertical
1673.30	-46.04	-10.28	-56.32	-13.00	43.32	Horizontal
2509.50	-60.77	-8.73	-69.50	-13.00	56.50	Horizontal
3346.00	-58.17	-3.42	-61.59	-13.00	48.59	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.60	-51.38	-9.90	-61.28	-13.00	48.28	Vertical
2544.90	-61.11	-8.45	-69.56	-13.00	56.56	Vertical
3393.20	-56.82	-2.59	-59.41	-13.00	46.41	Vertical
1696.60	-45.86	-9.70	-55.56	-13.00	42.56	Horizontal
2544.90	-60.65	-8.21	-68.86	-13.00	55.86	Horizontal
3393.20	-58.62	-2.65	-61.27	-13.00	48.27	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 7 – 5 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5005.00	-58.85	3.69	-55.16	-25.00	30.16	Vertical
7507.50	-65.12	5.56	-59.56	-25.00	34.56	Vertical
10010.00	-64.50	10.09	-54.41	-25.00	29.41	Vertical
5005.00	-55.49	4.02	-51.47	-25.00	26.47	Horizontal
7507.50	-62.29	5.56	-56.73	-25.00	31.73	Horizontal
10010.00	-63.60	9.47	-54.13	-25.00	29.13	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-58.93	4.23	-54.70	-25.00	29.70	Vertical
7605.00	-64.68	6.06	-58.62	-25.00	33.62	Vertical
10140.00	-64.84	10.48	-54.36	-25.00	29.36	Vertical
5070.00	-55.22	3.51	-51.71	-25.00	26.71	Horizontal
7605.00	-62.16	5.95	-56.21	-25.00	31.21	Horizontal
10140.00	-63.51	10.21	-53.30	-25.00	28.30	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5135.00	-58.36	3.78	-54.58	-25.00	29.58	Vertical
7702.50	-65.16	6.22	-58.94	-25.00	33.94	Vertical
10270.00	-64.06	11.48	-52.58	-25.00	27.58	Vertical
5135.00	-55.99	3.83	-52.16	-25.00	27.16	Horizontal
7702.50	-62.58	5.97	-56.61	-25.00	31.61	Horizontal
10270.00	-63.32	11.00	-52.32	-25.00	27.32	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 12 – 1.4 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1399.40	-58.62	-11.68	-70.30	-13.00	57.30	Vertical
2099.10	-58.24	-9.89	-68.13	-13.00	55.13	Vertical
2798.80	-60.18	-7.09	-67.27	-13.00	54.27	Vertical
1399.40	-51.72	-11.43	-63.15	-13.00	50.15	Horizontal
2099.10	-58.29	-9.44	-67.73	-13.00	54.73	Horizontal
2798.80	-61.32	-6.71	-68.03	-13.00	55.03	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.00	-58.20	-11.77	-69.97	-13.00	56.97	Vertical
2122.50	-58.32	-9.58	-67.90	-13.00	54.90	Vertical
2830.00	-60.35	-6.50	-66.85	-13.00	53.85	Vertical
1415.00	-52.20	-11.45	-63.65	-13.00	50.65	Horizontal
2122.50	-58.76	-8.86	-67.62	-13.00	54.62	Horizontal
2830.00	-61.19	-5.97	-67.16	-13.00	54.16	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1430.60	-58.58	-11.92	-70.50	-13.00	57.50	Vertical
2145.90	-58.29	-9.51	-67.80	-13.00	54.80	Vertical
2861.20	-60.09	-5.55	-65.64	-13.00	52.64	Vertical
1430.60	-52.57	-11.66	-64.23	-13.00	51.23	Horizontal
2145.90	-58.89	-9.15	-68.04	-13.00	55.04	Horizontal
2861.20	-60.95	-5.44	-66.39	-13.00	53.39	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 17 – 5 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1413.00	-58.01	-12.29	-70.30	-13.00	57.30	Vertical
2119.50	-59.29	-9.97	-69.26	-13.00	56.26	Vertical
2826.00	-61.74	-7.59	-69.33	-13.00	56.33	Vertical
1413.00	-55.62	-11.98	-67.60	-13.00	54.60	Horizontal
2119.50	-59.98	-9.21	-69.19	-13.00	56.19	Horizontal
2826.00	-61.85	-7.02	-68.87	-13.00	55.87	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1420.00	-58.44	-12.41	-70.85	-13.00	57.85	Vertical
2130.00	-59.65	-9.81	-69.46	-13.00	56.46	Vertical
2840.00	-61.62	-6.98	-68.60	-13.00	55.60	Vertical
1420.00	-55.48	-12.07	-67.55	-13.00	54.55	Horizontal
2130.00	-59.86	-9.20	-69.06	-13.00	56.06	Horizontal
2840.00	-61.74	-6.59	-68.33	-13.00	55.33	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1427.00	-58.32	-12.46	-70.78	-13.00	57.78	Vertical
2140.50	-58.94	-9.69	-68.63	-13.00	55.63	Vertical
2854.00	-61.63	-7.47	-69.10	-13.00	56.10	Vertical
1427.00	-56.04	-12.16	-68.20	-13.00	55.20	Horizontal
2140.50	-60.04	-9.24	-69.28	-13.00	56.28	Horizontal
2854.00	-61.64	-7.27	-68.91	-13.00	55.91	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 26(Part 22) – 1.4 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.40	-54.94	-11.51	-66.45	-13.00	53.45	Vertical
2474.10	-60.46	-8.67	-69.13	-13.00	56.13	Vertical
3298.80	-62.82	-3.89	-66.71	-13.00	53.71	Vertical
1649.40	-52.47	-10.85	-63.32	-13.00	50.32	Horizontal
2474.10	-60.05	-9.13	-69.18	-13.00	56.18	Horizontal
3298.80	-62.91	-3.96	-66.87	-13.00	53.87	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.00	-54.51	-10.70	-65.21	-13.00	52.21	Vertical
2509.50	-60.63	-8.66	-69.29	-13.00	56.29	Vertical
3346.00	-62.84	-3.33	-66.17	-13.00	53.17	Vertical
1673.00	-52.48	-10.28	-62.76	-13.00	49.76	Horizontal
2509.50	-60.34	-8.73	-69.07	-13.00	56.07	Horizontal
3346.00	-62.82	-3.42	-66.24	-13.00	53.24	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.60	-54.22	-9.90	-64.12	-13.00	51.12	Vertical
2544.90	-61.08	-8.45	-69.53	-13.00	56.53	Vertical
3393.20	-62.76	-2.59	-65.35	-13.00	52.35	Vertical
1696.60	-52.93	-9.70	-62.63	-13.00	49.63	Horizontal
2544.90	-60.23	-8.21	-68.44	-13.00	55.44	Horizontal
3393.20	-62.72	-2.65	-65.37	-13.00	52.37	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 26(Part 90) – 1.4 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1629.40	-55.97	-12.21	-68.18	-13.00	55.18	Vertical
2444.10	-60.58	-8.84	-69.42	-13.00	56.42	Vertical
3258.80	-61.00	-3.57	-64.57	-13.00	51.57	Vertical
1629.40	-54.58	-11.35	-65.93	-13.00	52.93	Horizontal
2444.10	-59.63	-9.23	-68.86	-13.00	55.86	Horizontal
3258.80	-61.00	-3.42	-64.42	-13.00	51.42	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1638.00	-56.08	-11.90	-67.98	-13.00	54.98	Vertical
2457.00	-60.14	-8.75	-68.89	-13.00	55.89	Vertical
3276.00	-60.99	-3.71	-64.70	-13.00	51.70	Vertical
1638.00	-55.03	-11.13	-66.16	-13.00	53.16	Horizontal
2457.00	-59.53	-9.20	-68.73	-13.00	55.73	Horizontal
3276.00	-60.51	-3.65	-64.16	-13.00	51.16	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1646.60	-56.26	-11.60	-67.86	-13.00	54.86	Vertical
2469.90	-60.24	-8.67	-68.91	-13.00	55.91	Vertical
3293.20	-60.54	-3.85	-64.39	-13.00	51.39	Vertical
1646.60	-55.18	-10.92	-66.10	-13.00	53.10	Horizontal
2469.90	-59.65	-9.18	-68.83	-13.00	55.83	Horizontal
3293.20	-60.43	-3.88	-64.31	-13.00	51.31	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 38 – 5 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5145.00	-55.64	3.70	-51.94	-25.00	26.94	Vertical
7717.50	-64.13	6.36	-57.77	-25.00	32.77	Vertical
10290.00	-63.48	11.95	-51.53	-25.00	26.53	Vertical
5145.00	-51.13	3.73	-47.40	-25.00	22.40	Horizontal
7717.50	-62.35	6.10	-56.25	-25.00	31.25	Horizontal
10290.00	-59.72	11.52	-48.20	-25.00	23.20	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-55.62	3.33	-52.29	-25.00	27.29	Vertical
7785.00	-63.66	8.39	-55.27	-25.00	30.27	Vertical
10380.00	-63.50	10.75	-52.75	-25.00	27.75	Vertical
5190.00	-50.79	3.26	-47.53	-25.00	22.53	Horizontal
7785.00	-62.03	8.24	-53.79	-25.00	28.79	Horizontal
10380.00	-59.56	10.21	-49.35	-25.00	24.35	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5235.00	-55.27	3.17	-52.10	-25.00	27.10	Vertical
7852.50	-63.30	8.52	-54.78	-25.00	29.78	Vertical
10470.00	-63.09	11.86	-51.23	-25.00	26.23	Vertical
5235.00	-50.43	3.32	-47.11	-25.00	22.11	Horizontal
7852.50	-61.85	8.28	-53.57	-25.00	28.57	Horizontal
10470.00	-59.46	11.27	-48.19	-25.00	23.19	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 41 – 5 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5075.00	-55.80	4.18	-51.62	-25.00	26.62	Vertical
7612.50	-64.09	6.15	-57.94	-25.00	32.94	Vertical
10150.00	-63.63	10.32	-53.31	-25.00	28.31	Vertical
5075.00	-50.52	3.52	-47.00	-25.00	22.00	Horizontal
7612.50	-62.06	6.03	-56.03	-25.00	31.03	Horizontal
10150.00	-59.97	10.16	-49.81	-25.00	24.81	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-55.62	3.33	-52.29	-25.00	27.29	Vertical
7785.00	-63.66	8.39	-55.27	-25.00	30.27	Vertical
10380.00	-63.50	10.75	-52.75	-25.00	27.75	Vertical
5190.00	-50.79	3.26	-47.53	-25.00	22.53	Horizontal
7785.00	-62.03	8.24	-53.79	-25.00	28.79	Horizontal
10380.00	-59.56	10.21	-49.35	-25.00	24.35	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5305.00	-55.23	3.67	-51.56	-25.00	26.56	Vertical
7957.50	-63.87	8.36	-55.51	-25.00	30.51	Vertical
10610.00	-63.25	12.12	-51.13	-25.00	26.13	Vertical
5305.00	-50.48	3.85	-46.63	-25.00	21.63	Horizontal
7957.50	-61.66	8.12	-53.54	-25.00	28.54	Horizontal
10610.00	-59.18	11.70	-47.48	-25.00	22.48	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 66 – 1.4 MHz bandwidth – ANT0						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3421.40	-50.10	-2.15	-52.25	-13.00	39.25	Vertical
5132.10	-60.30	3.80	-56.50	-13.00	43.50	Vertical
6842.80	-63.37	5.86	-57.51	-13.00	44.51	Vertical
3421.40	-46.84	-2.22	-49.06	-13.00	36.06	Horizontal
5132.10	-57.39	3.86	-53.53	-13.00	40.53	Horizontal
6842.80	-64.78	6.07	-58.71	-13.00	45.71	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3490.00	-49.84	-3.02	-52.86	-13.00	39.86	Vertical
5235.00	-60.75	3.17	-57.58	-13.00	44.58	Vertical
6980.00	-63.59	5.49	-58.10	-13.00	45.10	Vertical
3490.00	-46.92	-2.92	-49.84	-13.00	36.84	Horizontal
5235.00	-56.92	3.32	-53.60	-13.00	40.60	Horizontal
6980.00	-64.39	5.46	-58.93	-13.00	45.93	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3558.60	-49.70	-2.25	-51.95	-13.00	38.95	Vertical
5337.90	-60.53	4.23	-56.30	-13.00	43.30	Vertical
7117.20	-63.31	5.53	-57.78	-13.00	44.78	Vertical
3558.60	-46.60	-2.22	-48.82	-13.00	35.82	Horizontal
5337.90	-56.90	4.19	-52.71	-13.00	39.71	Horizontal
7117.20	-64.15	5.32	-58.83	-13.00	45.83	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 2 – 1.4 MHz bandwidth – ANT2						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3701.40	-50.25	-0.36	-50.61	-13.00	37.61	Vertical
5552.10	-63.40	4.16	-59.24	-13.00	46.24	Vertical
7402.00	-48.04	6.10	-41.94	-13.00	28.94	Vertical
3701.40	-45.98	-0.17	-46.15	-13.00	33.15	Horizontal
5552.10	-65.03	4.07	-60.96	-13.00	47.96	Horizontal
7402.00	-64.80	5.78	-59.02	-13.00	46.02	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.00	-50.64	-1.01	-51.65	-13.00	38.65	Vertical
5640.00	-48.78	3.96	-44.82	-13.00	31.82	Vertical
7520.00	-64.74	5.55	-59.19	-13.00	46.19	Vertical
3760.00	-54.68	-0.56	-55.24	-13.00	42.24	Horizontal
5640.00	-55.01	4.14	-50.87	-13.00	37.87	Horizontal
7520.00	-65.87	5.56	-60.31	-13.00	47.31	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3816.60	-50.29	-0.59	-50.88	-13.00	37.88	Vertical
5724.90	-50.61	3.42	-47.19	-13.00	34.19	Vertical
7633.20	-63.12	6.40	-56.72	-13.00	43.72	Vertical
3816.60	-46.93	-0.10	-47.03	-13.00	34.03	Horizontal
5724.90	-46.28	3.80	-42.48	-13.00	29.48	Horizontal
7633.20	-64.82	6.24	-58.58	-13.00	45.58	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 4 – 1.4 MHz bandwidth – ANT2						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3421.40	-55.64	-2.15	-57.79	-13.00	44.79	Vertical
5132.10	-56.31	3.80	-52.51	-13.00	39.51	Vertical
6842.80	-64.75	5.86	-58.89	-13.00	45.89	Vertical
3421.40	-53.57	-2.22	-55.79	-13.00	42.79	Horizontal
5132.10	-60.33	3.86	-56.47	-13.00	43.47	Horizontal
6842.80	-65.03	6.07	-58.96	-13.00	45.96	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.00	-55.38	-2.54	-57.92	-13.00	44.92	Vertical
5197.50	-56.24	3.25	-52.99	-13.00	39.99	Vertical
6930.00	-64.47	5.20	-59.27	-13.00	46.27	Vertical
3465.00	-53.22	-2.54	-55.76	-13.00	42.76	Horizontal
5197.50	-60.44	3.17	-57.27	-13.00	44.27	Horizontal
6930.00	-64.91	5.17	-59.74	-13.00	46.74	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3508.60	-55.55	-3.13	-58.68	-13.00	45.68	Vertical
5262.90	-55.85	3.11	-52.74	-13.00	39.74	Vertical
7017.20	-64.52	5.74	-58.78	-13.00	45.78	Vertical
3508.60	-53.54	-2.96	-56.50	-13.00	43.50	Horizontal
5262.90	-59.87	3.46	-56.41	-13.00	43.41	Horizontal
7017.20	-64.92	5.80	-59.12	-13.00	46.12	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 5 – 1.4 MHz bandwidth – ANT1						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.40	-53.67	-11.51	-65.18	-13.00	52.18	Vertical
2474.10	-56.84	-8.67	-65.51	-13.00	52.51	Vertical
3298.80	-57.30	-3.89	-61.19	-13.00	48.19	Vertical
1649.40	-49.82	-10.85	-60.67	-13.00	47.67	Horizontal
2474.10	-54.32	-9.13	-63.45	-13.00	50.45	Horizontal
3298.80	-54.63	-3.96	-58.59	-13.00	45.59	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.30	-54.06	-10.70	-64.76	-13.00	51.76	Vertical
2509.50	-57.20	-8.66	-65.86	-13.00	52.86	Vertical
3346.00	-57.50	-3.33	-60.83	-13.00	47.83	Vertical
1673.30	-50.26	-10.28	-60.54	-13.00	47.54	Horizontal
2509.50	-54.31	-8.73	-63.04	-13.00	50.04	Horizontal
3346.00	-54.17	-3.42	-57.59	-13.00	44.59	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.60	-53.59	-9.90	-63.49	-13.00	50.49	Vertical
2544.90	-57.22	-8.45	-65.67	-13.00	52.67	Vertical
3393.20	-57.01	-2.59	-59.60	-13.00	46.60	Vertical
1696.60	-49.74	-9.70	-59.44	-13.00	46.44	Horizontal
2544.90	-54.43	-8.21	-62.64	-13.00	49.64	Horizontal
3393.20	-54.25	-2.65	-56.90	-13.00	43.90	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 7 – 5 MHz bandwidth – ANT2						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5005.00	-56.11	3.69	-52.42	-25.00	27.42	Vertical
7507.50	-64.48	5.56	-58.92	-25.00	33.92	Vertical
10010.00	-61.25	10.09	-51.16	-25.00	26.16	Vertical
5005.00	-57.23	4.02	-53.21	-25.00	28.21	Horizontal
7507.50	-64.73	5.56	-59.17	-25.00	34.17	Horizontal
10010.00	-64.69	9.47	-55.22	-25.00	30.22	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-56.07	4.23	-51.84	-25.00	26.84	Vertical
7605.00	-64.97	6.06	-58.91	-25.00	33.91	Vertical
10140.00	-61.73	10.48	-51.25	-25.00	26.25	Vertical
5070.00	-57.18	3.51	-53.67	-25.00	28.67	Horizontal
7605.00	-64.30	5.95	-58.35	-25.00	33.35	Horizontal
10140.00	-64.36	10.21	-54.15	-25.00	29.15	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5135.00	-55.96	3.78	-52.18	-25.00	27.18	Vertical
7702.50	-64.60	6.22	-58.38	-25.00	33.38	Vertical
10270.00	-61.12	11.48	-49.64	-25.00	24.64	Vertical
5135.00	-56.79	3.83	-52.96	-25.00	27.96	Horizontal
7702.50	-65.17	5.97	-59.20	-25.00	34.20	Horizontal
10270.00	-64.28	11.00	-53.28	-25.00	28.28	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 12 – 1.4 MHz bandwidth – ANT1						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1399.40	-59.04	-11.68	-70.72	-13.00	57.72	Vertical
2099.10	-57.49	-9.89	-67.38	-13.00	54.38	Vertical
2798.80	-59.44	-7.09	-66.53	-13.00	53.53	Vertical
1399.40	-56.58	-11.43	-68.01	-13.00	55.01	Horizontal
2099.10	-58.14	-9.44	-67.58	-13.00	54.58	Horizontal
2798.80	-57.12	-6.71	-63.83	-13.00	50.83	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.00	-58.70	-11.77	-70.47	-13.00	57.47	Vertical
2122.50	-57.16	-9.58	-66.74	-13.00	53.74	Vertical
2830.00	-59.69	-6.50	-66.19	-13.00	53.19	Vertical
1415.00	-56.70	-11.45	-68.15	-13.00	55.15	Horizontal
2122.50	-58.35	-8.86	-67.21	-13.00	54.21	Horizontal
2830.00	-57.14	-5.97	-63.11	-13.00	50.11	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1430.60	-58.96	-11.92	-70.88	-13.00	57.88	Vertical
2145.90	-57.39	-9.51	-66.90	-13.00	53.90	Vertical
2861.20	-59.87	-5.55	-65.42	-13.00	52.42	Vertical
1430.60	-56.76	-11.66	-68.42	-13.00	55.42	Horizontal
2145.90	-58.56	-9.15	-67.71	-13.00	54.71	Horizontal
2861.20	-56.73	-5.44	-62.17	-13.00	49.17	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 17 – 5 MHz bandwidth – ANT1						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1413.00	-58.68	-12.29	-70.97	-13.00	57.97	Vertical
2119.50	-59.41	-9.97	-69.38	-13.00	56.38	Vertical
2826.00	-61.54	-7.59	-69.13	-13.00	56.13	Vertical
1413.00	-58.45	-11.98	-70.43	-13.00	57.43	Horizontal
2119.50	-59.85	-9.21	-69.06	-13.00	56.06	Horizontal
2826.00	-59.85	-7.02	-66.87	-13.00	53.87	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1420.00	-58.66	-12.41	-71.07	-13.00	58.07	Vertical
2130.00	-59.90	-9.81	-69.71	-13.00	56.71	Vertical
2840.00	-61.89	-6.98	-68.87	-13.00	55.87	Vertical
1420.00	-57.99	-12.07	-70.06	-13.00	57.06	Horizontal
2130.00	-60.20	-9.20	-69.40	-13.00	56.40	Horizontal
2840.00	-60.29	-6.59	-66.88	-13.00	53.88	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1427.00	-58.53	-12.46	-70.99	-13.00	57.99	Vertical
2140.50	-59.01	-9.69	-68.70	-13.00	55.70	Vertical
2854.00	-61.94	-7.47	-69.41	-13.00	56.41	Vertical
1427.00	-58.1	-12.16	-70.26	-13.00	57.26	Horizontal
2140.50	-59.92	-9.24	-69.16	-13.00	56.16	Horizontal
2854.00	-59.45	-7.27	-66.72	-13.00	53.72	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 26(Part 22) – 1.4 MHz bandwidth – ANT1						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.40	-54.00	-11.51	-65.51	-13.00	52.51	Vertical
2474.10	-61.16	-8.67	-69.83	-13.00	56.83	Vertical
3298.80	-62.48	-3.89	-66.37	-13.00	53.37	Vertical
1649.40	-51.76	-10.85	-62.61	-13.00	49.61	Horizontal
2474.10	-60.95	-9.13	-70.08	-13.00	57.08	Horizontal
3298.80	-62.51	-3.96	-66.47	-13.00	53.47	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.00	-53.91	-10.70	-64.61	-13.00	51.61	Vertical
2509.50	-60.78	-8.66	-69.44	-13.00	56.44	Vertical
3346.00	-62.48	-3.33	-65.81	-13.00	52.81	Vertical
1673.00	-51.91	-10.28	-62.19	-13.00	49.19	Horizontal
2509.50	-60.51	-8.73	-69.24	-13.00	56.24	Horizontal
3346.00	-62.15	-3.42	-65.57	-13.00	52.57	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.60	-54.37	-9.90	-64.27	-13.00	51.27	Vertical
2544.90	-60.32	-8.45	-68.77	-13.00	55.77	Vertical
3393.20	-62.75	-2.59	-65.34	-13.00	52.34	Vertical
1696.60	-51.99	-9.70	-61.69	-13.00	48.69	Horizontal
2544.90	-60.72	-8.21	-68.93	-13.00	55.93	Horizontal
3393.20	-62.27	-2.65	-64.92	-13.00	51.92	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 26(Part 90) – 1.4 MHz bandwidth – ANT1						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1629.40	-56.37	-12.21	-68.58	-13.00	55.58	Vertical
2444.10	-60.04	-8.84	-68.88	-13.00	55.88	Vertical
3258.80	-61.43	-3.57	-65.00	-13.00	52.00	Vertical
1629.40	-54.83	-11.35	-66.18	-13.00	53.18	Horizontal
2444.10	-59.60	-9.23	-68.83	-13.00	55.83	Horizontal
3258.80	-60.66	-3.42	-64.08	-13.00	51.08	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1638.00	-56.48	-11.90	-68.38	-13.00	55.38	Vertical
2457.00	-59.89	-8.75	-68.64	-13.00	55.64	Vertical
3276.00	-61.06	-3.71	-64.77	-13.00	51.77	Vertical
1638.00	-54.63	-11.13	-65.76	-13.00	52.76	Horizontal
2457.00	-59.92	-9.20	-69.12	-13.00	56.12	Horizontal
3276.00	-60.21	-3.65	-63.86	-13.00	50.86	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1646.60	-59.55	-11.60	-71.15	-13.00	58.15	Vertical
2469.90	-59.55	-8.67	-68.22	-13.00	55.22	Vertical
3293.20	-61.07	-3.85	-64.92	-13.00	51.92	Vertical
1646.60	-54.29	-10.92	-65.21	-13.00	52.21	Horizontal
2469.90	-59.85	-9.18	-69.03	-13.00	56.03	Horizontal
3293.20	-60.07	-3.88	-63.95	-13.00	50.95	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 38 – 5 MHz bandwidth – ANT2						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5145.00	-50.38	3.70	-46.68	-25.00	21.68	Vertical
7717.50	-59.52	6.36	-53.16	-25.00	28.16	Vertical
10290.00	-61.18	11.95	-49.23	-25.00	24.23	Vertical
5145.00	-55.75	3.73	-52.02	-25.00	27.02	Horizontal
7717.50	-60.96	6.10	-54.86	-25.00	29.86	Horizontal
10290.00	-62.25	11.52	-50.73	-25.00	25.73	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-50.60	3.33	-47.27	-25.00	22.27	Vertical
7785.00	-59.86	8.39	-51.47	-25.00	26.47	Vertical
10380.00	-60.91	10.75	-50.16	-25.00	25.16	Vertical
5190.00	-55.94	3.26	-52.68	-25.00	27.68	Horizontal
7785.00	-61.22	8.24	-52.98	-25.00	27.98	Horizontal
10380.00	-62.63	10.21	-52.42	-25.00	27.42	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5235.00	-50.18	3.17	-47.01	-25.00	22.01	Vertical
7852.50	-59.29	8.52	-50.77	-25.00	25.77	Vertical
10470.00	-60.82	11.86	-48.96	-25.00	23.96	Vertical
5235.00	-55.80	3.32	-52.48	-25.00	27.48	Horizontal
7852.50	-61.04	8.28	-52.76	-25.00	27.76	Horizontal
10470.00	-62.73	11.27	-51.46	-25.00	26.46	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 41 – 5 MHz bandwidth – ANT2						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5075.00	-50.87	4.18	-46.69	-25.00	21.69	Vertical
7612.50	-58.95	6.15	-52.80	-25.00	27.80	Vertical
10150.00	-61.45	10.32	-51.13	-25.00	26.13	Vertical
5075.00	-55.95	3.52	-52.43	-25.00	27.43	Horizontal
7612.50	-57.95	6.03	-51.92	-25.00	26.92	Horizontal
10150.00	-64.49	10.16	-54.33	-25.00	29.33	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-51.32	3.33	-47.99	-25.00	22.99	Vertical
7785.00	-59.39	8.39	-51.00	-25.00	26.00	Vertical
10380.00	-61.12	10.75	-50.37	-25.00	25.37	Vertical
5190.00	-55.96	3.26	-52.70	-25.00	27.70	Horizontal
7785.00	-57.95	8.24	-49.71	-25.00	24.71	Horizontal
10380.00	-64.09	10.21	-53.88	-25.00	28.88	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5305.00	-51.39	3.67	-47.72	-25.00	22.72	Vertical
7957.50	-59.29	8.36	-50.93	-25.00	25.93	Vertical
10610.00	-60.78	12.12	-48.66	-25.00	23.66	Vertical
5305.00	-56.29	3.85	-52.44	-25.00	27.44	Horizontal
7957.50	-58.00	8.12	-49.88	-25.00	24.88	Horizontal
10610.00	-64.45	11.70	-52.75	-25.00	27.75	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE band 66 – 1.4 MHz bandwidth – ANT2						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3421.40	-52.06	-2.15	-54.21	-13.00	41.21	Vertical
5132.10	-55.98	3.80	-52.18	-13.00	39.18	Vertical
6842.80	-64.36	5.86	-58.50	-13.00	45.50	Vertical
3421.40	-53.36	-2.22	-55.58	-13.00	42.58	Horizontal
5132.10	-61.56	3.86	-57.70	-13.00	44.70	Horizontal
6842.80	-64.86	6.07	-58.79	-13.00	45.79	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3490.00	-52.51	-3.02	-55.53	-13.00	42.53	Vertical
5235.00	-56.09	3.17	-52.92	-13.00	39.92	Vertical
6980.00	-64.60	5.49	-59.11	-13.00	46.11	Vertical
3490.00	-53.53	-2.92	-56.45	-13.00	43.45	Horizontal
5235.00	-61.43	3.32	-58.11	-13.00	45.11	Horizontal
6980.00	-64.62	5.46	-59.16	-13.00	46.16	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3558.60	-52.49	-2.25	-54.74	-13.00	41.74	Vertical
5337.90	-56.32	4.23	-52.09	-13.00	39.09	Vertical
7117.20	-64.83	5.53	-59.30	-13.00	46.30	Vertical
3558.60	-53.21	-2.22	-55.43	-13.00	42.43	Horizontal
5337.90	-61.09	4.19	-56.90	-13.00	43.90	Horizontal
7117.20	-64.47	5.32	-59.15	-13.00	46.15	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE CA:

LTE CA_5B						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1651.20	-53.52	-11.51	-65.03	-13.00	52.03	Vertical
2476.80	-57.24	-8.67	-65.91	-13.00	52.91	Vertical
3302.40	-57.40	-3.89	-61.29	-13.00	48.29	Vertical
1651.20	-49.72	-10.85	-60.57	-13.00	47.57	Horizontal
2476.80	-53.86	-9.13	-62.99	-13.00	49.99	Horizontal
3302.40	-55.07	-3.96	-59.03	-13.00	46.03	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1668.20	-53.44	-10.70	-64.14	-13.00	51.14	Vertical
2502.30	-57.69	-8.66	-66.35	-13.00	53.35	Vertical
3336.40	-56.92	-3.33	-60.25	-13.00	47.25	Vertical
1668.20	-49.23	-10.28	-59.51	-13.00	46.51	Horizontal
2502.30	-54.34	-8.73	-63.07	-13.00	50.07	Horizontal
3336.40	-55.28	-3.42	-58.70	-13.00	45.70	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1685.20	-53.46	-9.90	-63.36	-13.00	50.36	Vertical
2527.80	-57.74	-8.45	-66.19	-13.00	53.19	Vertical
3370.40	-56.45	-2.59	-59.04	-13.00	46.04	Vertical
1685.20	-49.41	-9.70	-59.11	-13.00	46.11	Horizontal
2527.80	-54.14	-8.21	-62.35	-13.00	49.35	Horizontal
3370.40	-55.48	-2.65	-58.13	-13.00	45.13	Horizontal
Remark: 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE CA_7C						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5011.00	-58.76	3.69	-55.07	-25.00	30.07	Vertical
7516.50	-65.36	5.56	-59.80	-25.00	34.80	Vertical
10022.00	-64.96	10.09	-54.87	-25.00	29.87	Vertical
5011.00	-55.09	4.02	-51.07	-25.00	26.07	Horizontal
7516.50	-62.34	5.56	-56.78	-25.00	31.78	Horizontal
10022.00	-63.61	9.47	-54.14	-25.00	29.14	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5051.20	-59.40	4.23	-55.17	-25.00	30.17	Vertical
7576.80	-64.30	6.06	-58.24	-25.00	33.24	Vertical
10102.40	-64.61	10.48	-54.13	-25.00	29.13	Vertical
5051.20	-55.48	3.51	-51.97	-25.00	26.97	Horizontal
7576.80	-62.16	5.95	-56.21	-25.00	31.21	Horizontal
10102.40	-63.57	10.21	-53.36	-25.00	28.36	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5091.20	-59.19	3.78	-55.41	-25.00	30.41	Vertical
7636.80	-65.26	6.22	-59.04	-25.00	34.04	Vertical
10182.40	-63.58	11.48	-52.10	-25.00	27.10	Vertical
5091.20	-55.57	3.83	-51.74	-25.00	26.74	Horizontal
7636.80	-62.81	5.97	-56.84	-25.00	31.84	Horizontal
10182.40	-63.80	11.00	-52.80	-25.00	27.80	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE CA_38C						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5155.00	-55.91	3.70	-52.21	-25.00	27.21	Vertical
7732.50	-63.75	6.36	-57.39	-25.00	32.39	Vertical
10310.00	-63.10	11.95	-51.15	-25.00	26.15	Vertical
5145.00	-51.63	3.73	-47.90	-25.00	22.90	Horizontal
7717.50	-62.58	6.10	-56.48	-25.00	31.48	Horizontal
10290.00	-59.86	11.52	-48.34	-25.00	23.34	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5157.00	-55.14	3.33	-51.81	-25.00	26.81	Vertical
7735.50	-64.00	8.39	-55.61	-25.00	30.61	Vertical
10314.00	-63.44	10.75	-52.69	-25.00	27.69	Vertical
5190.00	-51.27	3.26	-48.01	-25.00	23.01	Horizontal
7785.00	-62.47	8.24	-54.23	-25.00	29.23	Horizontal
10380.00	-59.26	10.21	-49.05	-25.00	24.05	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5195.00	-54.95	3.17	-51.78	-25.00	26.78	Vertical
7792.50	-62.86	8.52	-54.34	-25.00	29.34	Vertical
10390.00	-63.22	11.86	-51.36	-25.00	26.36	Vertical
5195.00	-50.03	3.32	-46.71	-25.00	21.71	Horizontal
7792.50	-61.60	8.28	-53.32	-25.00	28.32	Horizontal
10390.00	-59.60	11.27	-48.33	-25.00	23.33	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

LTE CA_41C						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5135.80	-55.92	4.18	-51.74	-25.00	26.74	Vertical
7703.70	-64.29	6.15	-58.14	-25.00	33.14	Vertical
10271.60	-64.04	10.32	-53.72	-25.00	28.72	Vertical
5135.80	-50.80	3.52	-47.28	-25.00	22.28	Horizontal
7703.70	-62.53	6.03	-56.50	-25.00	31.50	Horizontal
10271.60	-60.09	10.16	-49.93	-25.00	24.93	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5285.80	-55.62	3.33	-52.29	-25.00	27.29	Vertical
7928.70	-63.89	8.39	-55.50	-25.00	30.50	Vertical
10571.60	-63.79	10.75	-53.04	-25.00	28.04	Vertical
5285.80	-50.34	3.26	-47.08	-25.00	22.08	Horizontal
7928.70	-61.67	8.24	-53.43	-25.00	28.43	Horizontal
10571.60	-59.53	10.21	-49.32	-25.00	24.32	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5285.80	-54.91	3.67	-51.24	-25.00	26.24	Vertical
7928.70	-64.12	8.36	-55.76	-25.00	30.76	Vertical
10571.60	-63.06	12.12	-50.94	-25.00	25.94	Vertical
5285.80	-50.32	3.85	-46.47	-25.00	21.47	Horizontal
7928.70	-62.11	8.12	-53.99	-25.00	28.99	Horizontal
10571.60	-59.62	11.70	-47.92	-25.00	22.92	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

-----End of report-----