

Test report

Customer:

KINEXON Inc.

25 Broadway, Floor 9
New York, NY 10004

RF test report

190123-AU01+W02



KINEXON Sports & Media GmbH

Tag

KNX-T4.1-1.2-2:C

EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: info@emv-testhaus.com

Accreditation:



Deutsche
Akkreditierungsstelle
D-PL-12155-01-00

Test Firm Type "accredited": Valid until 2019-06-05
MRA US-EU, FCC designation number: DE0010
BnetzA-CAB-02/21-02/5 Valid until 2023-11-26

Recognized on March 14th, 2019 by the
Department of Innovation, Science and Economic Development (ISED) Canada
as a wireless testing laboratory
CAB identifier: DE0011

Location of Testing:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing

The technical accuracy is guaranteed through the quality management of the
EMV **TESTHAUS** GmbH.

Table of contents

1	Summary of test results	4
2	Referenced publications	6
3	Equipment under test (EUT)	7
3.1	General remark.....	7
3.2	General information	7
3.3	Radio specifications.....	8
3.4	Photo documentation.....	8
4	Test configuration and mode of operation.....	9
4.1	Test configuration	9
4.2	Mode of operation.....	10
5	Test procedures.....	10
5.1	General specifications	10
5.2	AC power-line conducted emissions	11
5.3	Radiated emissions below 30 MHz	13
5.4	Radiated emissions from 30 MHz to 1 GHz	15
5.5	Radiated emissions above 1 GHz.....	17
5.6	UWB Bandwidth measurement.....	18
6	Test results.....	19
6.1	Antenna requirement	20
6.2	Frequency error	21
6.3	UWB bandwidth.....	23
6.4	Radiated emissions in GPS bands.....	26
6.5	Peak emissions in a 50 MHz bandwidth.....	30
6.6	Radiated emissions 9 kHz to 40 GHz.....	33
7	Equipment calibration status.....	45
8	Measurement uncertainties	46
9	Revision history	47

List of figures

Figure 1: Setup for AC power-line conducted emissions test from 150 kHz to 30 MHz	12
Figure 2: Setup for radiated emissions test below 30 MHz	15
Figure 3: Setup for radiated emissions test from 30 MHz to 1 GHz	17
Figure 4: Chart of UWB bandwidth on channel 5	24
Figure 5: Chart of measurement 1164 MHz to 1240 MHz on channel 5	28
Figure 6: Chart of measurement 1559 MHz to 1610 MHz on channel 5	29
Figure 7: Chart of Peak emission measurement on channel 5	32
Figure 8: Chart of emissions test below 30 MHz on channel 5 in position X	35
Figure 9: Chart of emissions test from 30 MHz to 1 GHz on channel 5 in position X measurement antenna vertical	38
Figure 10: Chart of emissions test from 960 MHz to 10.6 GHz on channel 5	42
Figure 11: Chart of emissions test from 10.6 GHz to 17 GHz on channel 5	43
List of tables	
Table 1: Devices used for testing	9
Table 2: Ports of EUT and appropriate cables	9
Table 3: Bandwidth and detector type for AC power-line conducted emissions test	11
Table 4: Recalculation factors for extrapolation	13
Table 5: Bandwidth and detector type for radiated emissions test below 30 MHz	14
Table 6: Bandwidth and detector type for radiated emissions test from 30 MHz to 1 GHz	15
Table 7: Bandwidth and trace settings for exploratory radiated emissions test above 1 GHz	18
Table 8: Results of UWB bandwidth measurement	25
Table 9: Results of UWB bandwidth with calculated frequency error	25
Table 10: General radiated emission limits up to 30 MHz	34
Table 11: General radiated emission limits \geq 30 MHz to 960 MHz	37
Table 12: Radiated emission limits above 960 MHz to 40 GHz	40
Table 13: Chart of emissions test from 17 GHz to 40 GHz on channel 5, pre-measurement at measurement distance 15 cm	44

1 Summary of test results

System type: UWB device


47 CFR part and section	Test	Page	Result	Note(s)
15.207a)	AC power line conducted emissions 150 kHz to 30 MHz	---	Not applicable	1,2
15.203	Antenna requirement	20	Passed	---
15.250(a)	Frequency error	21	Passed	---
15.250(a)/(b)	UWB bandwidth	23	Passed	---
15.250(d)(2)	Radiated emissions in GPS bands	26	Passed	---

47 CFR part and section	Test	Page	Result	Note(s)
15.250(d)(3)	Peak emissions in a 50 MHz bandwidth	30	Passed	---
15.209 15.250(d)(1,4)	Radiated emissions 9 kHz to 40 GHz	33		---
	Emissions below 30 MHz	33	Passed	---
	Emissions from 30 MHz to 960 MHz	36	Passed	---
	Emissions from 960 MHz to 40 GHz	39	Passed	---

Notes (for information about EUT see clause 3):

- 1 Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.
- 2 EUT is battery-powered.

Straubing, September 4, 2019



Konrad Graßl
Head of radio department
EMV **TESTHAUS** GmbH



Christian Kiermeier
Technical executive
EMV **TESTHAUS** GmbH

2

Referenced publications

<i>Publication</i>	<i>Title</i>
CFR 47 Part 2 October 2018	Code of Federal Regulations, Title 47 (Telecommunication), Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
CFR 47 Part 15 October 2018	Code of Federal Regulations, Title 47 (Telecommunication), Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
ANSI C63.10 June 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3 Equipment under test (EUT)

All Information in this clause is declared by customer.

3.1 General remark

The EUT has a passive NFC tag and UWB integrated. In this test report only UWB is in consideration.

3.2 General information

Product type: Tag
Model name: KNX-T4.1-1.2-2:C
Serial number(s): 40776
Applicant: KINEXON Inc.
Manufacturer: KINEXON Sports & Media GmbH
Version: Hardware: TATS-01-04B
Software: TATS-01-04B
Additional modifications: None
FCC ID: 2ALC5-KNX-ATO1
Power supply: DC supply
Nominal voltage: 3 V
Device type: ☒ Portable ☐ Mobile ☐ Fixed

3.3 Radio specifications

System type	UWB device		
Application frequency band:	5925 MHz – 7250 MHz		
Number of channels:	1		
Modulation:	BPM/BPSK (Burst Position Modulation/Binary Phase Shift Keying)		
Operating frequency:	6490 MHz (channel 5)		
Emission designator:	500MM0DWT		
Short description:	The Kinexon System is a Real-Time Location System (RTLS) based on Ultra-Wideband (UWB) technology. Its primary use is for the tracking of people or objects. The system operates using active Tags, a network of Receivers, and a Kinexon Sensor Network Application. The Tag is a small, transceiving device with an integrated antenna. It senses different data (e.g., accelerations, temperature) and transmits the data to the Receivers.		
Antenna:	Type:	Dielectric chip antenna ACS5200HFAUWB	
	Gain:	Peak 4.16 dBi at 6200 MHz	
	Connector:	<input type="checkbox"/> external	<input type="checkbox"/> internal
		<input type="checkbox"/> temporary	<input checked="" type="checkbox"/> none (integral antenna)

3.4 Photo documentation

For external photos of the EUT see annex B, for internal ones see annex C.
Photos taken during testing including EUT positions can be found in annex A.

4 Test configuration and mode of operation

4.1 Test configuration

<i>Device</i>	<i>Type designation</i>	<i>Serial or inventory no.</i>	<i>Manufacturer</i>
<i>EUT</i>			
UWB Tag CH 5	UWB tag	40777	Kinexon
<i>Support equipment</i>			
None			

Table 1: Devices used for testing

<i>Port</i>	<i>Classification (see note 1)</i>	<i>Cable type</i>	<i>Fixed</i>	<i>Cable length</i>		<i>Note</i>
				<i>used</i>	<i>maximum</i>	
None						

Table 2: Ports of EUT and appropriate cables¹

Notes:

- 1 Ports of EUT are classified as “AC power”, “DC power”, “DC power connected to dedicated AC/DC power supply”, “Signal/control” or “Wired network”.
- 2 The serial port is used for configuration.

¹ As specified by manufacturer.

4.2 Mode of operation

The EUT is working only on one channel (channel 5) on a fixed frequency without any frequency hop or step function. All tests were performed with the modulated signal with the exception of the "Frequency error" test, which was performed with a cw signal.

4.2.1 Test software used for emission tests

None

5 Test procedures

5.1 General specifications

5.1.1 Test setups

Tabletop devices are placed on a non-conductive table with a height of 0.8 m. In case of AC power-line conducted emissions test, the rear of the EUT is located 40 cm to the vertical wall of the RF-shielded (screened) room which is used as vertical conducting plane. For radiated emission measurements above 1 GHz, tabletop devices are placed at a height of 1.5 m above the floor using a support made of styrene placed on top of the non-conductive table.

Floor-standing devices are placed either directly on the reference ground-plane or on insulating material (see clause 6.3.3 of ANSI C63.4-2014 for more details).

All other surfaces of tabletop or floor-standing EUTs are at least 80 cm from any other grounded conducting surface. This includes the case or cases of one or more LISNs when performing an AC power-line conducted emissions test.

Radiated emission measurements of equipment that can be used in multiple orientations (e.g. portable or handheld devices) are performed with the EUT in each of three orthogonal axis positions.

5.2 AC power-line conducted emissions

AC power-line conducted emissions are measured according to clause 6.2 of ANSI C63.10 over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network. The tests are performed in a shielded room.

If the EUT normally receives power from another device that in turn connects to the public utility ac power lines, measurements are made on that device with the EUT in operation to demonstrate that the device continues to comply with the appropriate limits while providing the EUT with power. If the EUT is operated only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines (600 VAC or less) to operate the EUT (such as an adapter), then ac power-line conducted measurements are not required.

For direct current (dc) powered devices where the ac power adapter is not supplied with the device, an “off-the-shelf” unmodified ac power adapter is used. If the device is supposed to be installed in a host (e.g., the device is a module or PC card), then it is tested in a typical compliant host.

Frequency (<i>f</i>)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
150 kHz ≤ <i>f</i> < 30 MHz	9 kHz	≤ 4.5 kHz	Peak, Average	Quasi-peak, Average	Quasi-peak, Average

Table 3: Bandwidth and detector type for AC power-line conducted emissions test

The AC power-line conducted emissions test is performed in the following steps:

- The EUT is arranged as tabletop or floor-standing equipment, as applicable, and connected to a line impedance stabilization network (LISN) with 50 µH / 50 Ω. If required, a second LISN of the same type and terminated by 50 Ω is used for peripheral devices. The EUT is switched on.
- The measurement equipment is connected to the LISN for the EUT and set-up according to the specifications of the test (see table 3). At the LISN, the neutral line is selected to be tested.
- The prescan is performed with both detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescan, but not for final scan.
- When the prescan is completed, maximum levels with less margin than 10 dB or exceeding the limit are determined and collected in a list.
- With the first frequency of the list selected, a frequency zoom over a range of ten times of the measurement receiver bandwidth around this frequency is performed. If the EUT has no significant drift in frequency, the frequency zoom can be skipped.
- For final scan, the emission level is measured and the maximum is recorded.
- Steps e) to f) are repeated for all other frequencies in the list. At least the six highest EUT emissions relative to the limit have to be recorded.
- Steps c) to g) are repeated for all current-carrying conductors of all of the power cords of EUT, i.e. all phase and (if used) neutral line(s).

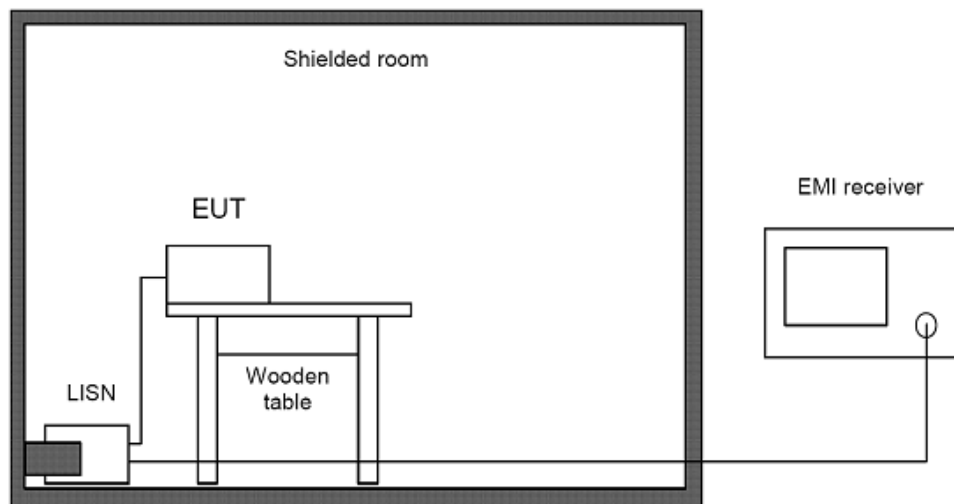


Figure 1: Setup for AC power-line conducted emissions test from 150 kHz to 30 MHz

5.3 Radiated emissions below 30 MHz

Radiated emissions below 30 MHz are measured according to clause 6.4 of ANSI C63.10 using an inductive shielded loop antenna. As this antenna measures the magnetic field only, its antenna factors are converted to electric field strength values assuming a free space impedance of 377 Ω as described in clause 4.3.1 of ANSI C63.10. This results in an additional correction of 51.53 dB.

According to clause 6.4.3 of ANSI C63.10, at frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements. In this case, the results are extrapolated to the specified distance by using a recalculation factor determined according to one of the methods described in clause 6.4.4 of ANSI C63.10, provided that the maximum dimension of the device is equal to or less than 0.625 times the wavelength at the frequency being measured. As the minimum wavelength is 10 meters corresponding to the maximum frequency of 30 MHz, this requirement is fulfilled if the maximum dimension of the device is equal to or less than 6.25 meters.

Unless otherwise stated, the recalculation factor is determined according to clause 6.4.4.2 "Extrapolation from the measurement of a single point" of ANSI C63.10:

$$\begin{aligned} d_{\text{near field}} &= 47.77 / f_{\text{MHz}}, \text{ or} \\ f_{\text{MHz}} &= 47.77 / d_{\text{near field}} \end{aligned}$$

The frequency f_{MHz} at which the near field distance is equal to the limit and/or test distance is important for selection of the right formula to determine the recalculation factor:

$$\begin{aligned} f_{\text{MHz}}(300 \text{ m}) &\approx 0.159 \text{ MHz} \\ f_{\text{MHz}}(30 \text{ m}) &\approx 1.592 \text{ MHz} \\ f_{\text{MHz}}(3 \text{ m}) &\approx 15.923 \text{ MHz} \end{aligned}$$

Based on the test distances for the general radiated emission limits as specified in §15.209 of 47 CFR Part 15, the following formulas are used to determine the recalculation factor:

Frequency (f)	d_{limit}	d_{measure}	Formula for recalculation factor
9 kHz \leq f \leq 159 kHz 490 kHz < f \leq 1.592 MHz	300 m 30 m	3 m	$-40 \log(d_{\text{limit}} / d_{\text{measure}})$
159 kHz < f \leq 490 kHz 1.592 MHz < f \leq 15.923 MHz	300 m 30 m	3 m	$-40 \log(d_{\text{near field}} / d_{\text{measure}}) - 20 \log(d_{\text{limit}} / d_{\text{near field}})$
f > 15.923 MHz	30 m	3 m	$-20 \log(d_{\text{limit}} / d_{\text{measure}})$

Table 4: Recalculation factors for extrapolation

Prescans for radiated measurements below 30 MHz are performed in a fully anechoic room (called "CDC"). The measurement distance is 3 meters. The emissions of the EUT are recorded with an EMI test receiver configured as described in table 5.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
$9 \text{ kHz} \leq f < 150 \text{ kHz}$	200 Hz	$\leq 100 \text{ Hz}$	Peak, Average	Peak Quasi-peak, Average	Peak Quasi-peak, Average
$150 \text{ kHz} \leq f < 30 \text{ MHz}$	9 kHz	$\leq 4.5 \text{ kHz}$	Peak, Average	Peak Quasi-peak, Average	Peak Quasi-peak, Average

Table 5: Bandwidth and detector type for radiated emissions test below 30 MHz

Sample calculation:

Frequency (MHz)	Reading value (dB μ V)	Antenna correction (dB/m)	Cable attenuation (dB)	Correction factor (Corr.) (dB/m)	Level (dB μ V/m)
10	20.00	19.59	0.33	19.92	39.92

Correction factor = Antenna correction + Cable attenuation

Level = Reading value + Correction factor = 20 dB μ V + 19.92 dB/m = 39.92 dB μ V/m

Prescans are performed with all detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans. If no limit is specified for certain detectors, final scan measurement with these detectors may be omitted.

The radiated emissions test below 30 MHz is performed in the following steps:

- The loop antenna is positioned with its plane perpendicular to the ground with the lowest height of the antenna 1 m above the ground.
- The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- The measurement equipment is connected to the loop antenna and set-up according to the specifications of the test (see table 5).
- The EUT is turned to a position likely to get the maximum and the test antenna is rotated to detect the maximum of the fundamental in this EUT position.
- Then the EUT is rotated in a horizontal plane through 360° in steps of 45°. Starting at 0°, at each table position the spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the current table position is noted as the maximum position.
- After the last prescan, the significant maximum emissions and their table positions are determined and collected in a list.
- With the test receiver set to the first frequency of the list, the EUT is rotated by $\pm 45^\circ$ around the table position found during prescans while measuring the emission level continuously. For final scan, the worst-case table position is set and the maximum emission level is recorded.
- Step g) is repeated for all other frequencies in the list.
- Finally, for frequencies with critical emissions the loop antenna is rotated again to find the maximum of emission. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to i) are repeated in two other orthogonal positions. If the EUT may be used in one position only, steps a) to i) are repeated in one orthogonal position.

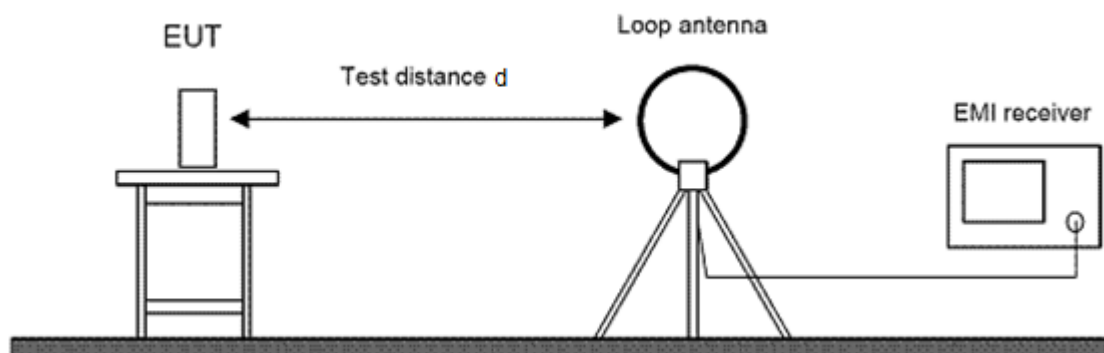


Figure 2: Setup for radiated emissions test below 30 MHz

5.4 Radiated emissions from 30 MHz to 1 GHz

Radiated emissions in the frequency range 30 MHz to 1 GHz are measured according to clause 6.5 of ANSI C63.10 using a semi-anechoic chamber (SAC) with a ground plane on the floor. The measurement distance is 3 meters. The emissions of the EUT are recorded with an EMI test receiver configured as described in table 6.

Frequency (<i>f</i>)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
30 MHz ≤ <i>f</i> ≤ 1 GHz	120 kHz	≤ 60 kHz	Peak	Quasi-peak	Quasi-peak

Table 6: Bandwidth and detector type for radiated emissions test from 30 MHz to 1 GHz

Sample calculation:

Frequency (MHz)	Reading value (dBμV)	Antenna correction (dB/m)	Cable attenuation (dB)	Correction factor (Corr.) (dB/m)	Level (dBμV/m)
100	30.00	11.71	1.06	12.77	42.77

Correction factor = Antenna correction + Cable attenuation

Level = Reading value + Correction factor = 30 dBμV + 12.77 dB/m = 42.77 dBμV/m

The measurement antenna is a combination of a biconical antenna and a logarithmic-periodic dipole array antenna. It is mounted on a support capable of allowing the antenna to be used in

either horizontal or vertical polarization and in a height between 1 m and 4 m above the ground plane.

If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans.

The radiated emissions test from 30 MHz to 1 GHz is performed in the following steps:

- a) The measurement antenna is oriented initially for vertical polarization.
- b) The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- c) The measurement equipment is connected to the measurement antenna and set-up according to the specifications of the test (see table 6).
- d) The table position is set to 0°.
- e) The antenna height is set to 1 m.
- f) The spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the polarization and height of the measurement antenna as well as the current table position are noted as the maximum position.
- g) The antenna height is increased to 4 m in steps of 50 cm. At each height, step f) is repeated.
- h) The polarization of the measurement antenna is changed to horizontal.
- i) The antenna height is decreased from 4 m to 1 m in steps of 50 cm. At each height, step f) is repeated.
- j) The EUT is rotated in a horizontal plane through 360° in steps of 60°. At each table position, steps e) to i) are repeated.
- k) After the last prescan, the significant maximum emissions with their polarizations and heights of the measurement antenna as well as their table positions are determined and collected in a list.
- l) With the test receiver set to the first frequency of the list, the measurement antenna is set to the polarization and height and the table is moved to the position as determined during prescans.
- m) The antenna is moved by ± 50 cm around this height and the EUT is rotated by $\pm 60^\circ$ around this table position while measuring the emission level continuously.
- n) For final scan, the worst-case positions of antenna and table are set and the maximum emission level is recorded.
- o) Steps l) to n) are repeated for all other frequencies in the list. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to o) are repeated in two other orthogonal positions.

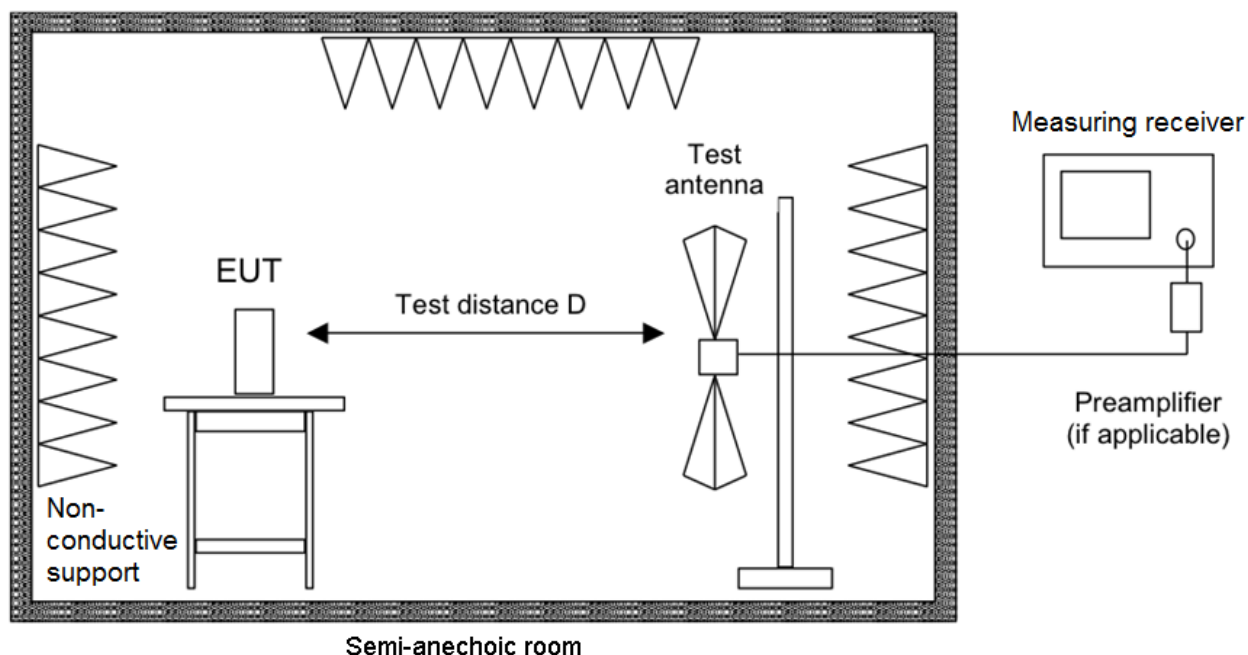


Figure 3: Setup for radiated emissions test from 30 MHz to 1 GHz

5.5 Radiated emissions above 1 GHz

Radiated emissions above 1 GHz are measured according to clause 6.6 of ANSI C63.10 by conducting exploratory and final radiated emission tests. According to clause 6.6.4.1 of ANSI C63.10, measurements may be performed at a distance closer than that specified in the requirements. However, an attempt shall be made to avoid making final measurements in the near field of both the measurement antenna and the EUT.

For measurement of radiated emissions above 1 GHz, horn antennas are used.

Sample calculation:

Frequency (MHz)	Reading value (dB μ V)	Antenna correction (dB/m)	Correction pre- amplifier (dB)	Cable attenuation (dB)	Correction factor (Corr.) (dB/m)	Level (dB μ V/m)
2400	50.00	27.76	-34.57	3.51	-3.30	46.70

Correction factor = Antenna correction + Correction pre-amplifier + Cable attenuation

Level = Reading value + Correction factor = 50.00 dB μ V - 3.30 dB/m = 46.70 dB μ V/m

5.5.1 Exploratory radiated emissions measurements

Exploratory radiated emissions above 1 GHz are measured in a semi-anechoic chamber with RF absorbing material on the floor or a fully anechoic room. They are performed by moving the receiving antenna over all sides of the EUT at a closer distance (e.g. 0.5 or 1 m) while observing the display of the test receiver to find the emissions to be re-tested during final radiated emission measurements.

According to clause 5.3.3 of ANSI C63.10, when performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade of distance (inverse of linear distance for field-strength measurements). To simplify testing and documentation, the limits are increased accordingly instead of decreasing the results.

The emissions of the EUT are displayed and recorded with an EMI test receiver operating in the spectrum analyzer mode using the settings as described in table 7.

<i>Frequency (f)</i>	<i>Resolution bandwidth</i>	<i>Video bandwidth</i>	<i>Sweep time</i>	<i>Trace detector(s)</i>	<i>Trace mode(s)</i>
$f \geq 1 \text{ GHz}$	1 MHz	3 MHz	AUTO	RMS	Max Hold

Table 7: Bandwidth and trace settings for exploratory radiated emissions test above 1 GHz

If during exploratory radiated emissions measurements no levels to be re-tested are found, the final radiated emissions measurement may be omitted. In this case, the chart of the exploratory radiated emissions measurements has to be reported.

5.5.2 Final radiated emissions measurements

Final radiated emissions above 1 GHz are measured in a semi-anechoic chamber (SAC) with RF absorbing material on the floor between measurement antenna and EUT. The measurement distance is shown in the appropriate tests. The emissions of the EUT are recorded with an EMI test receiver.

The horn antenna is mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization. For UWB the measurement procedure according clause 6.6.5 of ANSI C63.10-2013 is used, specified in clause 6.6.5.4 of ANSI C63.10-2013.

5.6 UWB Bandwidth measurement

The test is performed according the procedure described in clause 10.1 of ANSI C63.10.2013.

6 Test results

This clause gives details about the test results as collected in the summary of test results on page 4.

The climatic conditions are recorded during the tests. It is ensured that the climatic conditions are within the following ranges:

<i>Ambient temperature</i>	<i>Ambient humidity</i>	<i>Ambient pressure</i>
15°C to 35°C	30 % to 75 %	86 kPa to 106 kPa

6.1 Antenna requirement

Section(s) in 47 CFR Part 15: Requirement(s): 15.203
Reference(s):

Result: ☒ Test passed ☐ Test not passed

6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. Test procedure

6.1.2 Result

Performed by: Konrad Graßl Date(s) of test: April 17, 2019

The EUT has an integrated antenna, therefore the antenna cannot be changed by the user.

6.2 Frequency error

Section(s) in 47 CFR Part 15:

Requirement(s):

15.250(a)

Reference(s):

ANSI C63.10, clause 6.8

Result²:

☒ Test passed

☐ Test not passed

6.2.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Climatic chamber 990 I	VC4100	Vötsch Industrietechnik	C00014
<input checked="" type="checkbox"/> Climatic chamber 340 I	VC ³ 4034	Vötsch Industrietechnik	C00015
<input type="checkbox"/> EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00552
<input type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00001
<input type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input checked="" type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Field probe	RF-R 400-1	Langer EMV-Technik	E00270

6.2.2 Limits

According 15.250(a):

The -10 dB bandwidth of a device operating under the provisions of this section must be contained within the 5925-7250 MHz band under all conditions of operation including the effects from stepped frequency, frequency hopping or other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

6.2.3 Test procedure

The test is performed according the procedure described in clause 6.8 of ANSI C63.10.2013.

² For information about measurement uncertainties see page 76.

6.2.4 Test results

Performed by: Konrad Graßl Date(s) of test: May 14, 2019

Temperature (° C)	Voltage (V)	Center frequency (GHz)	Deviation (MHz)	Result
60	3	6.489615049	-0.384951	passed
50	3	6.489604013	-0.395987	passed
40	3	6.48960694	-0.39306	passed
30	3	6.48961974	-0.38026	passed
20	3	6.48963068	-0.36932	passed
20	2	6.489630546	-0.369454	passed
10	3	6.489651719	-0.348281	passed
0	3	6.489666475	-0.333525	passed
-10	3	6.489679364	-0.320636	passed
-20	3	6.489682622	-0.317378	passed
-30	3	6.489674663	-0.325337	passed

6.3 UWB bandwidth

Section(s) in 47 CFR Part 15: Requirement(s): 15.250(a)/(b)
Reference(s): ANSI C63.10, clause 10.1

Result³: ☒ Test passed ☐ Test not passed

6.3.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input checked="" type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	ALS05749	Aldetec	W01007
<input checked="" type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	BBV9718B	Schwarzbeck	W01325
<input checked="" type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input checked="" type="checkbox"/> Cable set FS-SAC	RF cable(s)	EMCO ELEKTRONIK Huber + Suhner	W00096 E01032

³ For information about measurement uncertainties see page 76.

6.3.2 Limits

According 15.250(a):

The -10 dB bandwidth of a device operating under the provisions of this section must be contained within the 5925-7250 MHz band under all conditions of operation including the effects from stepped frequency, frequency hopping or other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

According 15.250(b):


The -10 dB bandwidth of the fundamental emission shall be at least 50 MHz. For transmitters that employ frequency hopping, stepped frequency or similar modulation types, measurement of the -10 dB minimum bandwidth specified in this paragraph shall be made with the frequency hop or step function disabled and with the transmitter operating continuously at a fundamental frequency following the provisions of §15.31(m).

6.3.3 Test procedure

The UWB bandwidth is measured using the test procedure as described in clause 5.6

6.3.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	March 25, 2019
Test distance:	<input type="checkbox"/> 3 m	<input type="checkbox"/> 1.5 m	<input checked="" type="checkbox"/> 0.75 m

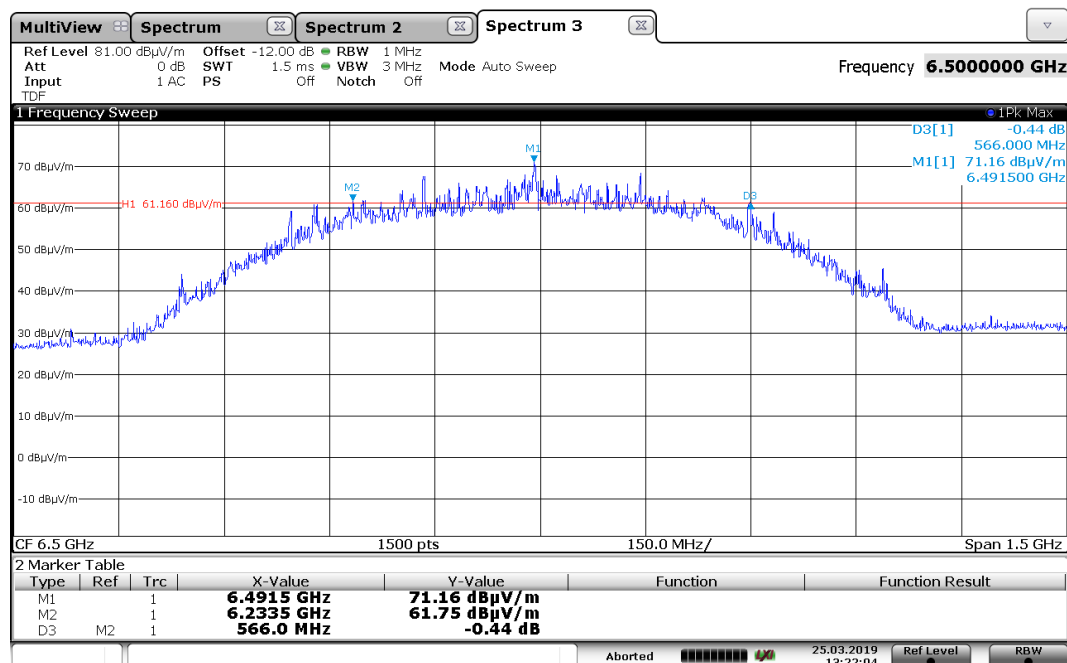

Channel	UWB bandwidth		f_L		f_H		Result
	Value (MHz)	Limit (MHz)	Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Limit (MHz)	
5	566.0	≥ 50	6233.50	>5925	6799.50	<7250	Passed

Table 8: Results of UWB bandwidth measurement

Channel	UWB bandwidth		f_L		f_H		Result
	Value (MHz)	Limit (MHz)	Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Limit (MHz)	
5	566.0	≥ 50	6233.896	>5925	6799.896	<7250	Passed

Table 9: Results of UWB bandwidth with calculated frequency error

Note: The frequency error is measured in clause 6.2.

6.4 Radiated emissions in GPS bands

Section(s) in 47 CFR Part 15: Requirement(s): 15.250(d)(2)
Reference(s):

Result⁴: ☒ Test passed ☐ Test not passed

6.4.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input checked="" type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	ALS05749	Aldetec	W01007
<input checked="" type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	BBV9718B	Schwarzbeck	W01325
<input checked="" type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input checked="" type="checkbox"/> Cable set FS-SAC	RF cable(s)	EMCO ELEKTRONIK Huber + Suhner	W00096 E01032

⁴ For information about measurement uncertainties see page 48.

6.4.2 Limits

According 15.250(d)(2):

In addition to the radiated emission limits specified in the table in paragraph (d)(1) of this section, transmitters operating under the provisions of this section shall not exceed the following RMS average limits when measured using a resolution bandwidth of no less than 1 kHz:

<i>Frequency (MHz)</i>	<i>EIRP (dBm)</i>	<i>calculated Fieldstrength at 3 m (dBμV/m)</i>
1164-1240	-85.3	10
1559-1610	-85.3	10

6.4.3 Test procedure

The radiated emissions in GPS bands are measured using the test procedure as described in clause 5.5.2.

6.4.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	March 25, 2019
Test distance:	<input type="checkbox"/> 3 m	<input type="checkbox"/> 1.5 m	<input checked="" type="checkbox"/> 0.75 m
EUT elevation:	See notes		

RBW 10 kHz
 Detector RMS
 Measurement distance 0.75 m

Note: With the reference level offset of -12 dB the measurement is referenced to the calculated limit at 3m.

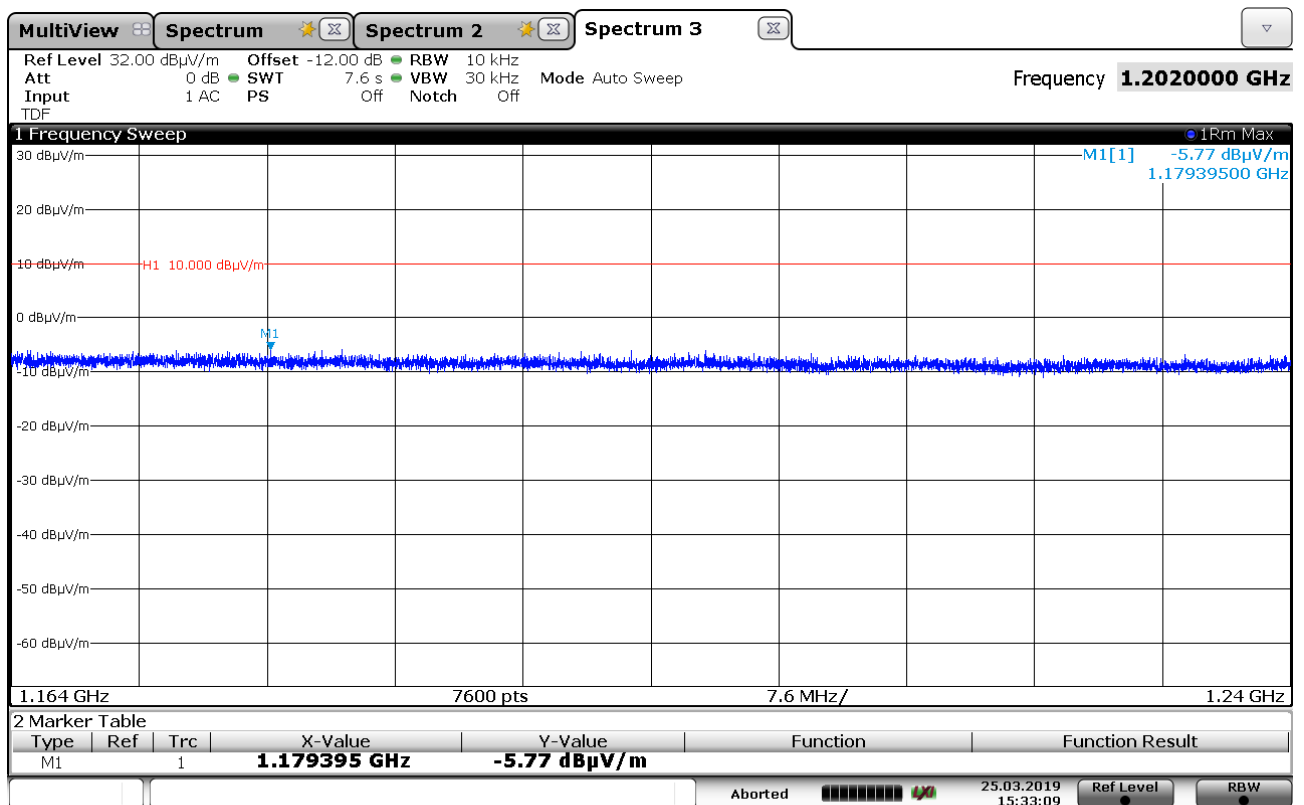


Figure 5: Chart of measurement 1164 MHz to 1240 MHz on channel 5

Note: Worst case elevation: 30 °, measurement antenna horizontal

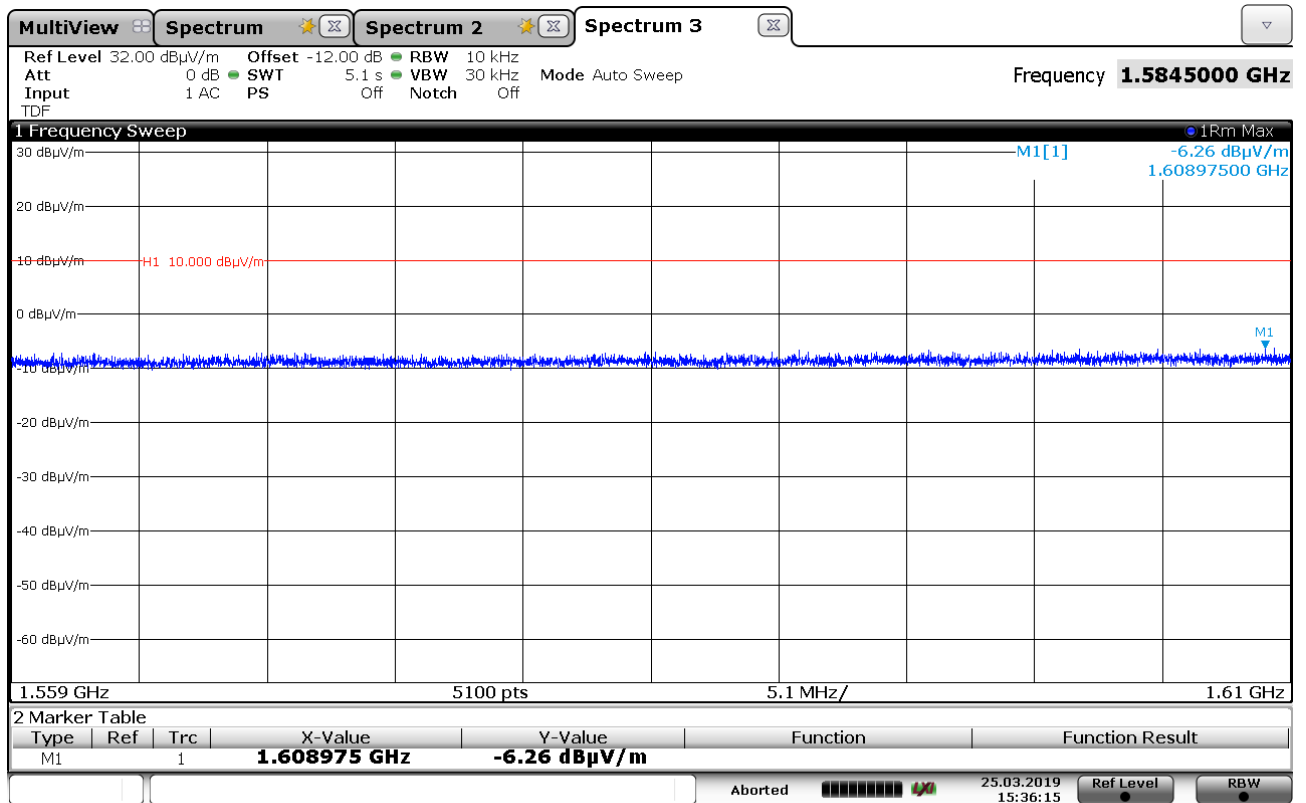


Figure 6: Chart of measurement 1559 MHz to 1610 MHz on channel 5

Note: Worst case elevation: 30 °, measurement antenna horizontal

6.5 Peak emissions in a 50 MHz bandwidth

Section(s) in 47 CFR Part 15: Requirement(s): 15.250(d)(3)
Reference(s):

Result⁵: ☒ Test passed ☐ Test not passed

6.5.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input checked="" type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	ALS05749	Aldetec	W01007
<input checked="" type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	BBV9718B	Schwarzbeck	W01325
<input checked="" type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input checked="" type="checkbox"/> Cable set FS-SAC	RF cable(s)	EMCO ELEKTRONIK Huber + Suhner	W00096 E01032

⁵ For information about measurement uncertainties see page 52.

6.5.2 Limits

According 15.250(d)(3):

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs and this 50 MHz bandwidth must be contained within the 5925-7250 MHz band. The peak EIRP limit is $20 \log (RBW/50)$ dBm where RBW is the resolution bandwidth in megahertz that is employed by the measurement instrument. RBW shall not be lower than 1 MHz or greater than 50 MHz. The video bandwidth of the measurement instrument shall not be less than RBW. If RBW is greater than 3 MHz, the application for certification filed with the Commission shall contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing.

<i>Frequency (MHz)</i>	<i>EIRP (within 50 MHz) (dBm)</i>	<i>calculated Fieldstrength at 3 m (dBμV/m)</i>
5925 - 7250	0	95.3

6.5.3 Test procedure


The Peak emissions measurements are performed using the test procedure for radiated measurements as described in clause 5.5.

6.5.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	September 4, 2019
Test distance:	<input type="checkbox"/> 3 m	<input type="checkbox"/> 1.5 m	<input checked="" type="checkbox"/> 0.75 m
EUT elevation:	See notes		

RBW 50 MHz
Detector Peak

Note: With the reference level offset of -12 dB the measurement is referenced to the calculated limit at 3m.

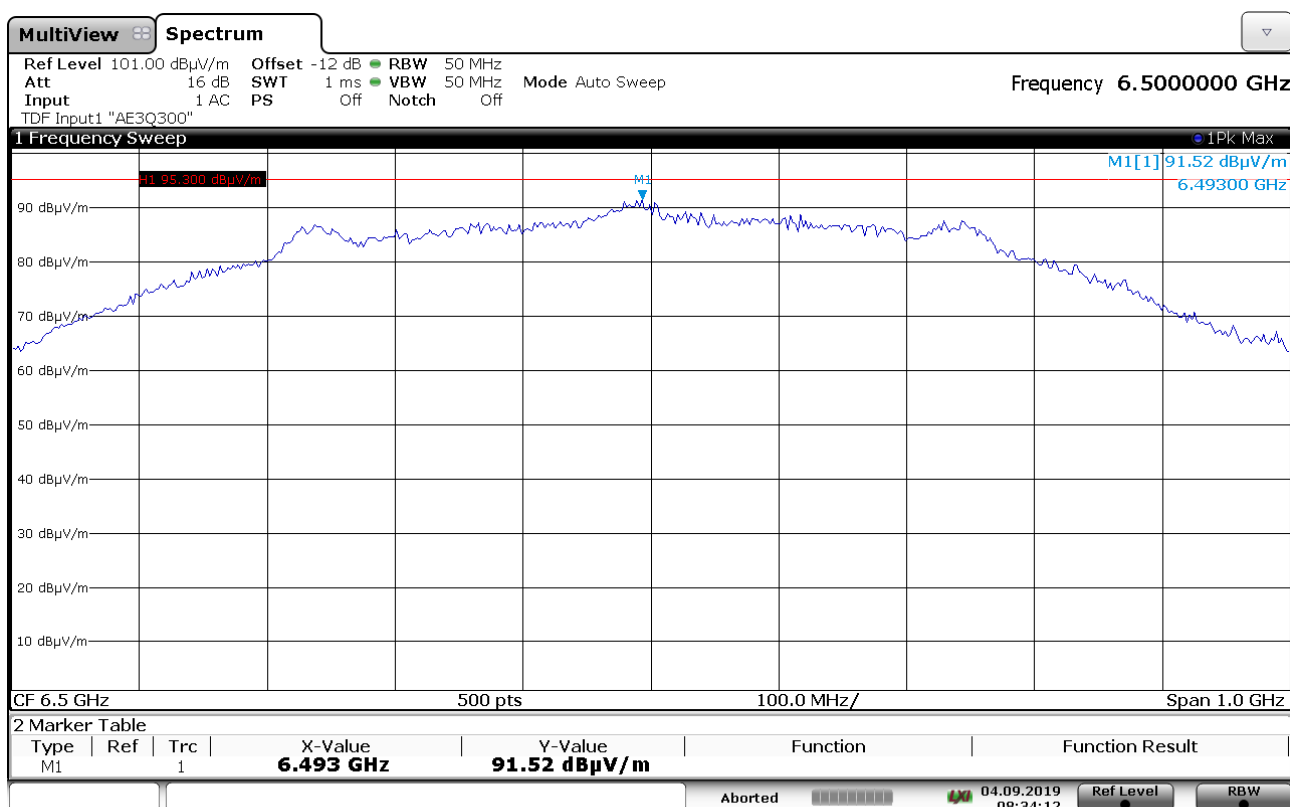

08:34:12 04.09.2019

Figure 7: Chart of Peak emission measurement on channel 5

Note: Worst case elevation: 30 °, measurement antenna horizontal

Channel	measured fieldstrength RBW 50 MHz (dBµV/m at 3 m)	Limit RBW 50 MHz (dBµV/m at 3 m)	Margin (dB)	Result
5	91.52	95.30	3.78	passed

6.6 Radiated emissions 9 kHz to 40 GHz

6.6.1 Emissions below 30 MHz

Section(s) in 47 CFR Part 15: Requirement(s): 15.209, 15.250(d)(4)
Reference(s):

Result⁶: ☒ Test passed ☐ Test not passed

6.6.1.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input checked="" type="checkbox"/> Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
<input type="checkbox"/> Open area test site (OATS)	---	EMV TESTHAUS	E00354
<input type="checkbox"/> EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00552
<input type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Field probe	RF-R 400-1	Langer EMV-Technik	E00270
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	Rohde & Schwarz	E00060
<input checked="" type="checkbox"/> Cable set CDC	RF cable(s)	Huber + Suhner AME HF-Technik AME HF-Technik Stabo	E00446 E00920 E00921 E01215
<input type="checkbox"/> Test software	EMC32-EB (V10.35)	Rohde & Schwarz	E00777
<input type="checkbox"/> Test software	EMC32-MEB (V10.35)	Rohde & Schwarz	E00778
<input type="checkbox"/> Test software	EMC32-MEB (V10.35)	Rohde & Schwarz	E01073

⁶ For information about measurement uncertainties see page 55.

6.6.1.2 Limits

According 15.250(d)(4):

Radiated emissions at or below 960 MHz shall not exceed the emission levels in §15.209.

<i>Frequency (MHz)</i>	<i>Field strength</i>		<i>Measurement distance (m)</i>
	<i>(μV/m)</i>	<i>(dBμV/m)</i>	
0.009 – 0.490	2400/F(kHz) (266.67 – 4.90)	48.52 – 13.80	300
0.490 – 1.705	24000/F(kHz) (48.98 – 14.08)	33.80 – 22.97	30
1.705 – 30	30	29.54	30

Table 10: General radiated emission limits up to 30 MHz

6.6.1.3 Test procedure

The emissions below 30 MHz are measured using the test procedure for radiated measurements as described in clause 5.3.

6.6.1.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	March 28, 2019
Test distance:	<input checked="" type="checkbox"/> 3 m	<input type="checkbox"/> 10 m	<input type="checkbox"/> m
Antenna alignment:	<input checked="" type="checkbox"/> in parallel	<input type="checkbox"/> in line	<input type="checkbox"/> angle °
EUT position:	<input checked="" type="checkbox"/> Position X	<input checked="" type="checkbox"/> Position Y	<input checked="" type="checkbox"/> Position Z

Frequency range	Step size	IF Bandwidth	Detector		Measurement Time		Preamplifier
			Prescan	Final scan	Prescan	Final scan	
9 kHz – 150 kHz	70.5 Hz	200 Hz	PK	PK,	2 s	1 s	Off
150 kHz – 30 MHz	7.462 kHz	9 kHz	PK	PK	2 s	1 s	Off

Note: Exploratory measurements are performed in all positions as indicated. However, the figures and result tables within this test report show only the worst case position.

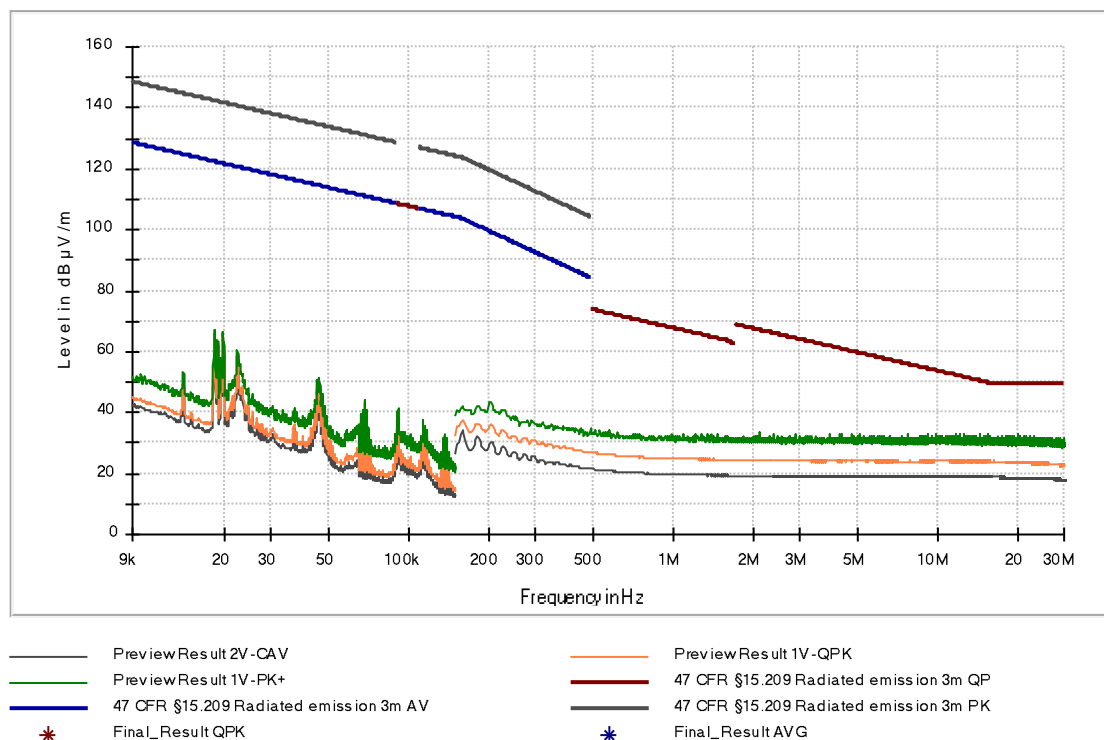


Figure 8: Chart of emissions test below 30 MHz on channel 5 in position X

Note: No assessable values could be detected.

6.6.2 Emissions from 30 MHz to 960 MHz

Section(s) in 47 CFR Part 15: Requirement(s): 15.209, 15.250(d)(4)
Reference(s):

Result⁷: ☒ Test passed ☐ Test not passed

6.6.2.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input checked="" type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00552
<input type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> TRILOG broadband antenna (CDC)	VULB 9160	Schwarzbeck	E00011
<input type="checkbox"/> TRILOG broadband antenna (OATS)	VULB 9163	Schwarzbeck	E00013
<input checked="" type="checkbox"/> TRILOG broadband antenna (SAC)	VULB 9162	Schwarzbeck	E00643
<input checked="" type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input type="checkbox"/> Cable set FS-SAC	RF cable(s)	Teledyne Reynolds Huber + Suhner Teledyne Reynolds	E00435 E00307 E00433
<input checked="" type="checkbox"/> Test software	EMC32-EB (V10.35)	Rohde & Schwarz	E00777
<input type="checkbox"/> Test software	EMC32-MEB (V10.35)	Rohde & Schwarz	E00778
<input type="checkbox"/> Test software	EMC32-MEB (V10.35)	Rohde & Schwarz	E01073

⁷ For information about measurement uncertainties see page 54.

6.6.2.2 Limits

According 15.250(d)(4):

Radiated emissions at or below 960 MHz shall not exceed the emission levels in §15.209.

<i>Frequency (MHz)</i>	<i>Field strength</i>		<i>Measurement distance (m)</i>
	<i>(μV/m)</i>	<i>(dBμV/m)</i>	
30 – 88	100	40.00	3
88 – 216	150	43.52	3
216 - 960	200	46.02	3

Table 11: General radiated emission limits \geq 30 MHz to 960 MHz

6.6.2.3 Test procedure

The emissions from 30 MHz to 1 GHz are measured using the test procedure for radiated measurements as described in clause 5.4.

6.6.2.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	March 29, 2019
Test distance:	<input checked="" type="checkbox"/> 3 m	<input type="checkbox"/> 10 m	<input type="checkbox"/> m
EUT position ⁸ :	<input checked="" type="checkbox"/> Position X	<input type="checkbox"/> Position Y	<input type="checkbox"/> Position Z

Frequency range	Step size	IF Bandwidth	Detector		Measurement Time		Preamplifier
			Prescan	Final scan	Prescan	Final scan	
30 MHz – 1 GHz	30 kHz	120 kHz	QP	QP	1 s	1 s	20 dB

Note: Exploratory measurements are performed in all positions as indicated. However, the figures and result tables within this test report show only the worst case position.

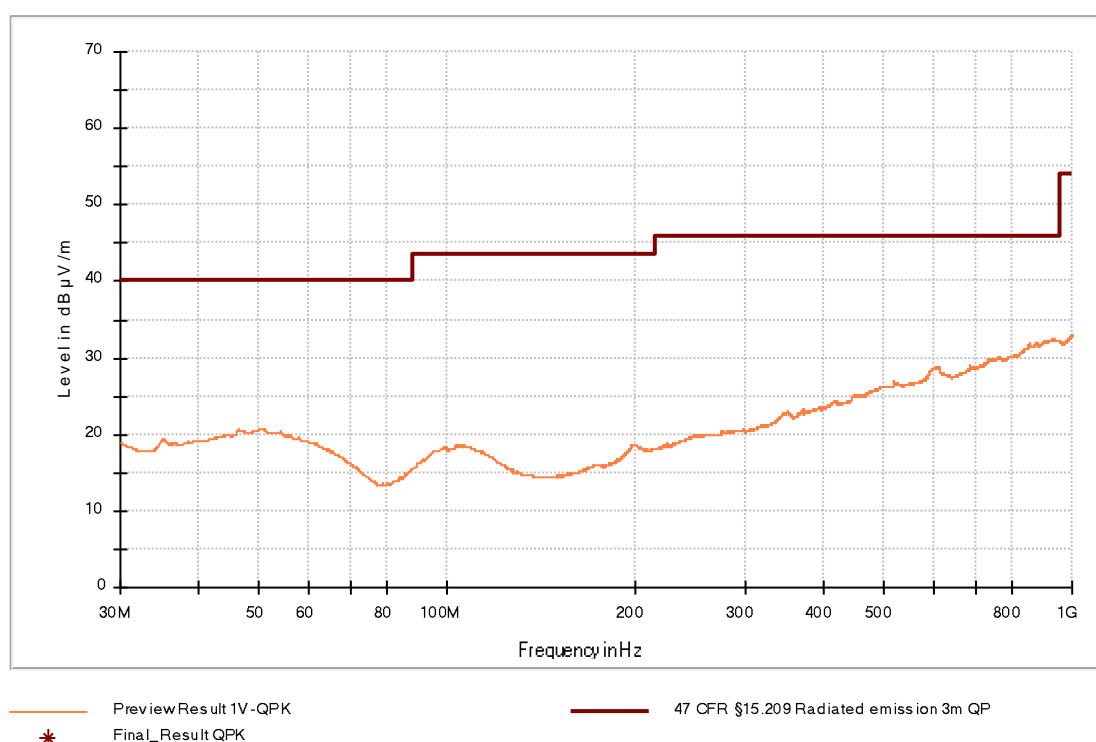


Figure 9: Chart of emissions test from 30 MHz to 1 GHz on channel 5 in position X measurement antenna vertical

Note: No assessable values could be detected.

⁸ Exploratory measurements are performed in all positions as indicated. However, the figures and result tables within this test report show the worst case position, only.

6.6.3 Emissions from 960 MHz to 40 GHz

Section(s) in 47 CFR Part 15: Requirement(s): 15.250(d)(1)
Reference(s):

Result⁹: ☒ Test passed ☐ Test not passed

6.6.3.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input checked="" type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input checked="" type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	ALS05749	Aldetec	W01007
<input checked="" type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	BBV9718B	Schwarzbeck	W01325
<input checked="" type="checkbox"/> Preamplifier (16 GHz - 40 GHz)	BBV9721	Schwarzbeck	W01350
<input checked="" type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input checked="" type="checkbox"/> Horn antenna	BBHA 9170	Schwarzbeck	W00054
<input type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input checked="" type="checkbox"/> Cable set FS-SAC	RF cable(s)	EMCO ELEKTRONIK Huber + Suhner	W00096 E01032

⁹ For information about measurement uncertainties see page 52.

6.6.3.2 Limits

According 15.250(d)(1):

The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following RMS average limits based on measurements using a 1 MHz resolution bandwidth:

<i>Frequency (MHz)</i>	<i>EIRP (dBm)</i>	<i>calculated Fieldstrength at 3 m (dBμV/m)</i>
960-1610	-75.3	20
1610-1990	-63.3	32
1990-3100	-61.3	34
3100-5925	-51.3	44
5925-7250	-41.3	54
7250-10600	-51.3	44
Above 10600	-61.3	34

Table 12: Radiated emission limits above 960 MHz to 40 GHz

6.6.3.3 Test procedure

The emissions from 30 MHz to 1 GHz are measured using the test procedure for radiated measurements as described in clause 5.5.

6.6.3.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	March 25, 2019
			April 8, 2019
Test distance:	960 MHz to 17 GHz:	<input type="checkbox"/> 1 m	<input checked="" type="checkbox"/> 0.75 m
	17 GHz to 40 GHz :	<input type="checkbox"/> 3 m	<input checked="" type="checkbox"/> 0.30 m
EUT elevation:	See notes		

Measurement 960 MHz to 17 GHz:

RBW 1 MHz
Detector RMS
Measurement distance 0.75 m

Note: With the reference level offset of -12 dB the measurement is referenced to the calculated limit at 3m.

Measurement 17 GHz to 40 GHz

RBW 1 MHz

Pre-measurement:


Detector Peak
Measurement distance 0.15 m

Note: With the reference level offset of -26 dB the measurement is referenced to the calculated limit at 3m.

Final measurement:

Detector RMS
Measurement distance 0.3 m

Note: With the reference level offset of -20 dB the measurement is referenced to the calculated limit at 3m.

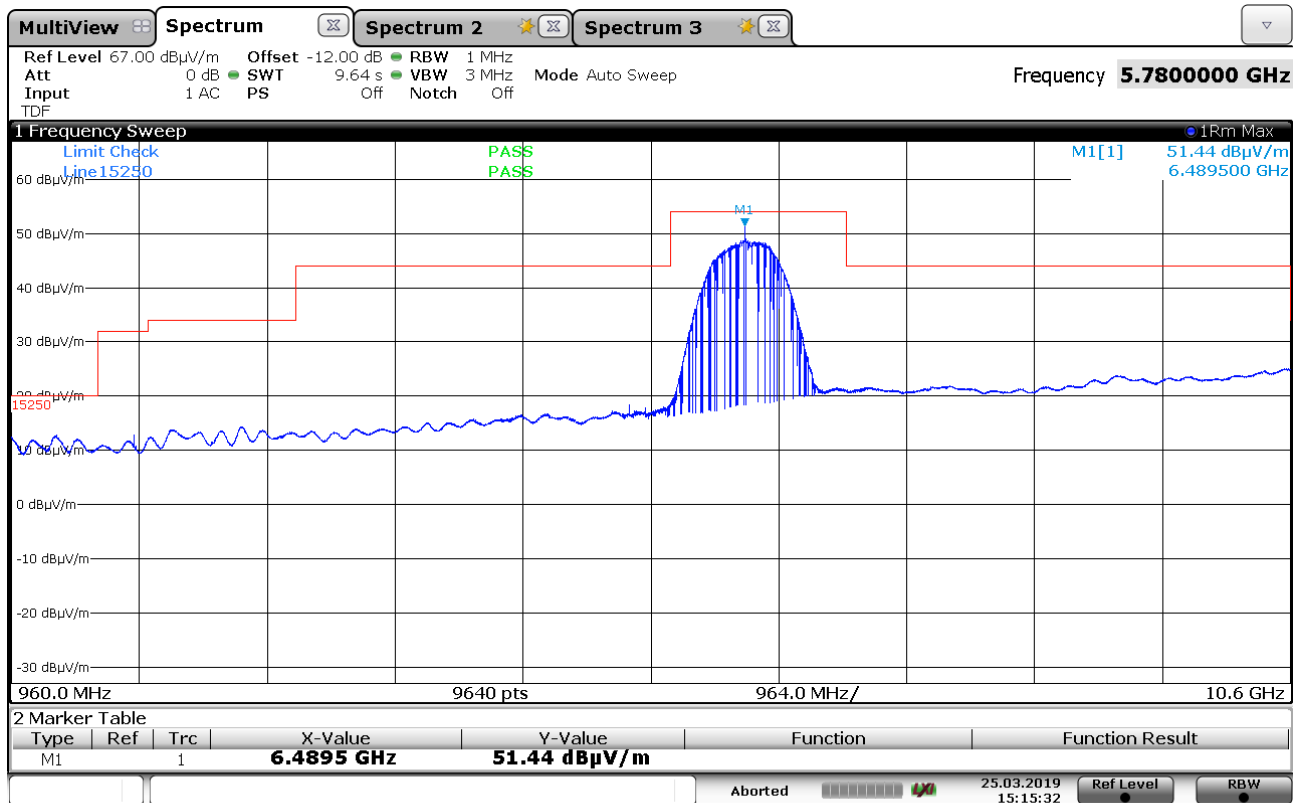

15:15:33 25.03.2019

Figure 10: Chart of emissions test from 960 MHz to 10.6 GHz on channel 5

Note: Worst case elevation: 30 °, measurement antenna horizontal.


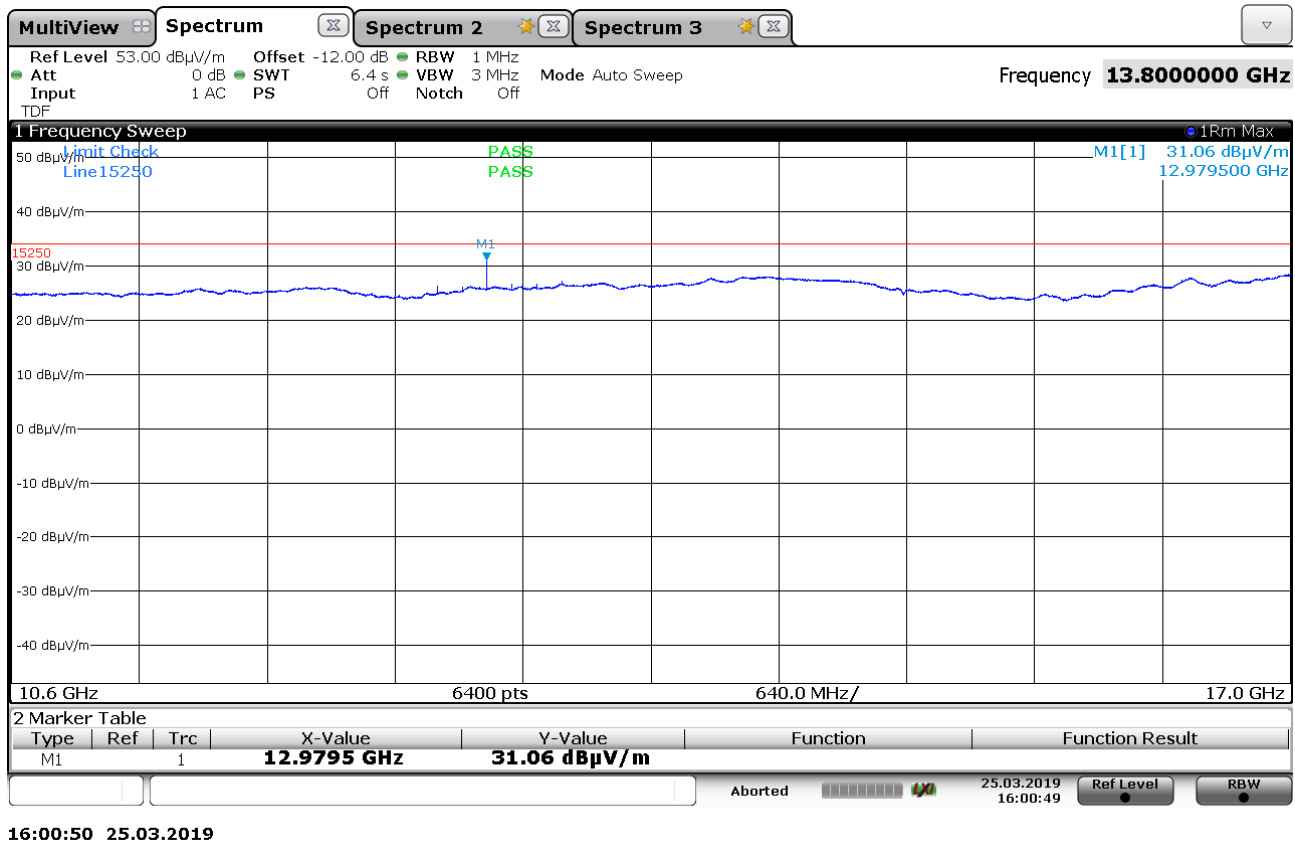


Figure 11: Chart of emissions test from 10.6 GHz to 17 GHz on channel 5

Note: Worst case elevation: 30 °, measurement antenna horizontal.

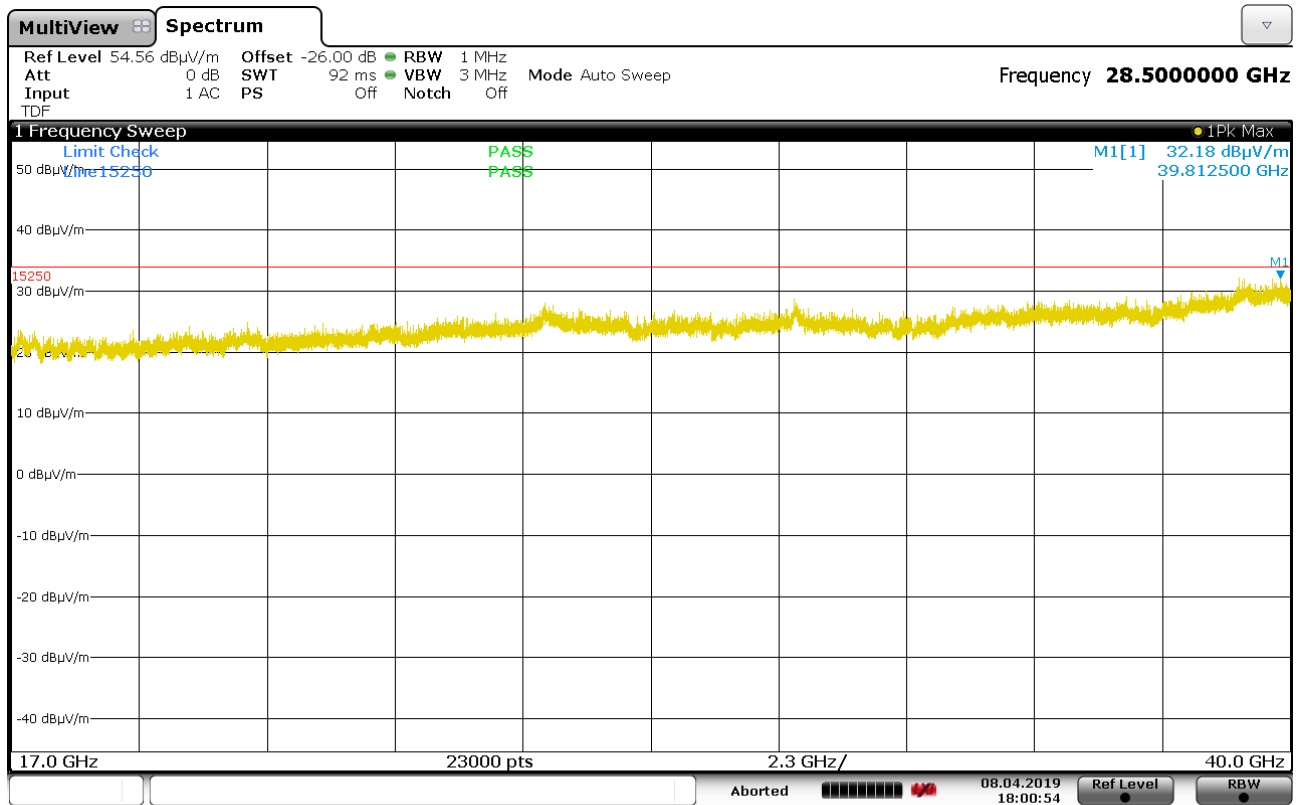

18:00:55 08.04.2019

Table 13: Chart of emissions test from 17 GHz to 40 GHz on channel 5, pre-measurement at measurement distance 15 cm

Note: Pre-measurements have shown that there is no assessable emission caused by the EUT in this frequency range. Representative the measurement with elevation 0 °, measurement antenna horizontal is shown.

7

Equipment calibration status

Description	Modell number	Serial number	Inventory number(s)	Last calibration	Next calibration
EMI test receiver	ESW44	101538	E00895	2019-07	2020-07
EMI test receiver	ESR7	101059	E00739	2018-05	2019-05
EMI test receiver	ESU26	100026	W00002	2018-06	2020-06
Preamplifier (1 GHz - 18 GHz)	ALS05749	001	W01007	2019-01	2020-01
Loop antenna	HFH2-Z2	871398/0050	E00060	2018-10	2020-10
TRILOG broadband antenna (SAC3)	VULB 9162	9162-041	E00643	2018-03	2021-03
Horn antenna	BBHA 9120D	9120D-592	W00052	2017-04	2020-04
Horn antenna	BBHA 9170	9170-332	W00054	2017-04	2020-04
Measuring antenna set	---	---	A00088	N/A ³	
Shielded room	P92007	B 83117 C 1109 T 211	E00107	N/A	
Compact diagnostic chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	N/A	
Semi-anechoic chamber (SAC) with floor absorbers	FS-SAC	---	E00100	2018-03	2021-03
Semi-anechoic chamber (SAC)	SAC3	C62128-A520-A643-x-0006	E00716	2018-03	2021-03
Cable set CDC	RG214/U	---	E00446	2018-04	2019-04
	LCF12-50J	---	E01215	2018-04	2019-04
	LMR400	1718020006	E00920	2019-01	2020-01
	RG214 Hiflex	171802007	E00921	2019-01	2020-01
Cable set anechoic chamber	262-0942-1500	005	E00435	2018-10	2019-10
	SF104EA/2x11PC 35-42/5m	11144/4EA	E00307	2018-12	2019-12
	262-0942-1500	003	E00433	2018-10	2019-10
Cable set of semi-anechoic chamber SAC3	SF104EA/11PC35/11PC35/10000MM	501347/4EA	E00755	2018-12	2019-12
	SF104E/11PC35/11PC35/2000MM	507410/4E	E01033	2018-12	2019-12
	SF104E/11PC35/11PC35/2000MM	507411/4E	E01034	2018-09	2019-09

Note 1: Industry Canada (test sites number 3472A-1 and 3472A-2): 2019-03

Note 2: Expiration date of test firm accreditation for SAC:
FCC test firm type "accredited": 2019-05

8 Measurement uncertainties

Description	Uncertainty	k=
AC power line conducted emission	± 4.1 dB	2
Carrier frequency separation Number of hopping frequencies Time of occupancy (dwell time)	± 5.0 %	2
Bandwidth tests	± 2.0 %	
Maximum conducted output power (conducted)	± 1.5 dB	
Power spectral density (conducted)	± 2.9 dB	
Conducted spurious emissions	± 2.9 dB	
Radiated emissions in semi-anechoic chamber		
9 kHz to 30 MHz	± 4.8 dB	2
30 MHz to 300 MHz	± 5.4 dB	2
300MHz to 1 GHz	± 4.7 dB	2
Radiated emissions in semi-anechoic chamber with RF absorbing material on the floor or fully anechoic room		
1 GHz to 40 GHz	± 4.5 dB	2

Comment: The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. For a confidence level of 95 % the coverage factor k is 2.

Test related measurement uncertainties have to be taken into consideration when evaluating the test results. All used test instrument as well as the test accessories are calibrated at regular intervals.

9

Revision history

<i>Revision</i>	<i>Date</i>	<i>Issued by</i>	<i>Description of modifications</i>
0	2019-09-04	Konrad Graßl	First edition