



BUREAU
VERITAS


Test Report No.: PSU-QSU2307030110R10

DC_5A-n78A(Part 270):

CHANNEL BANDWIDTH: 100MHz / QPSK


MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.500	-30.97	-13.00	17.97	22.94	H	61.7	1
3	2,496.500	-32.18	-13.00	19.18	24.44	H	122.6	1
5	7,403.712	-49.04	-13.00	36.04	28.84	H	1	2
6	11,106.000	-56.69	-13.00	43.69	20.48	H	1	2

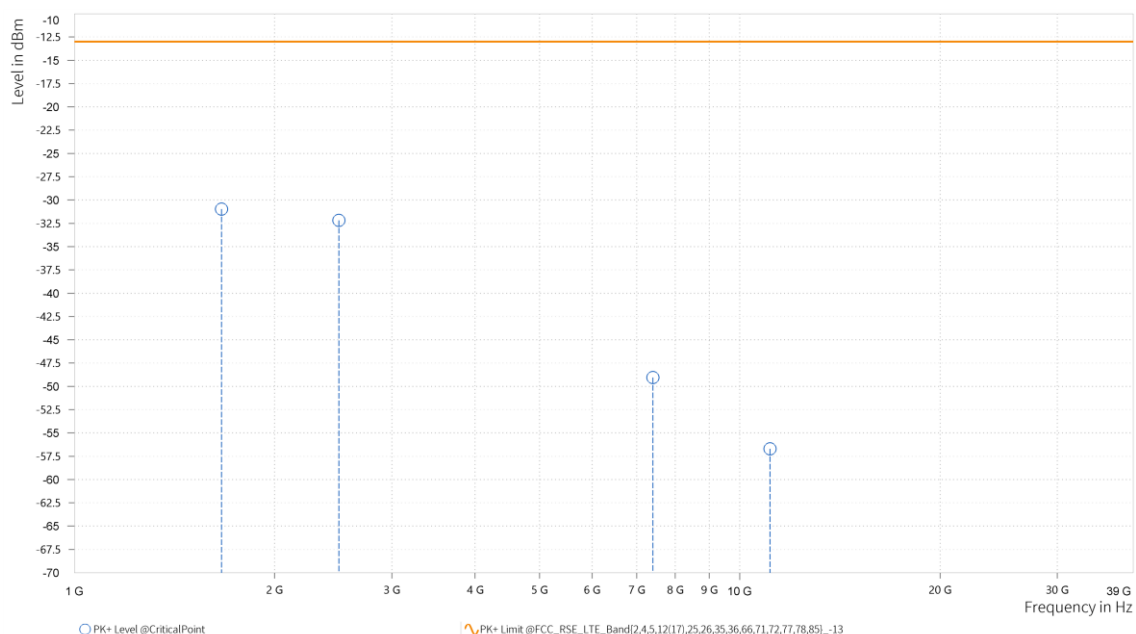

MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-35.82	-13.00	22.82	22.55	V	1	2
3	2,496.000	-31.25	-13.00	18.25	24.07	V	134.6	2
5	7,403.970	-49.06	-13.00	36.06	29.10	V	359	2
6	11,106.000	-55.83	-13.00	42.83	20.70	V	1	2

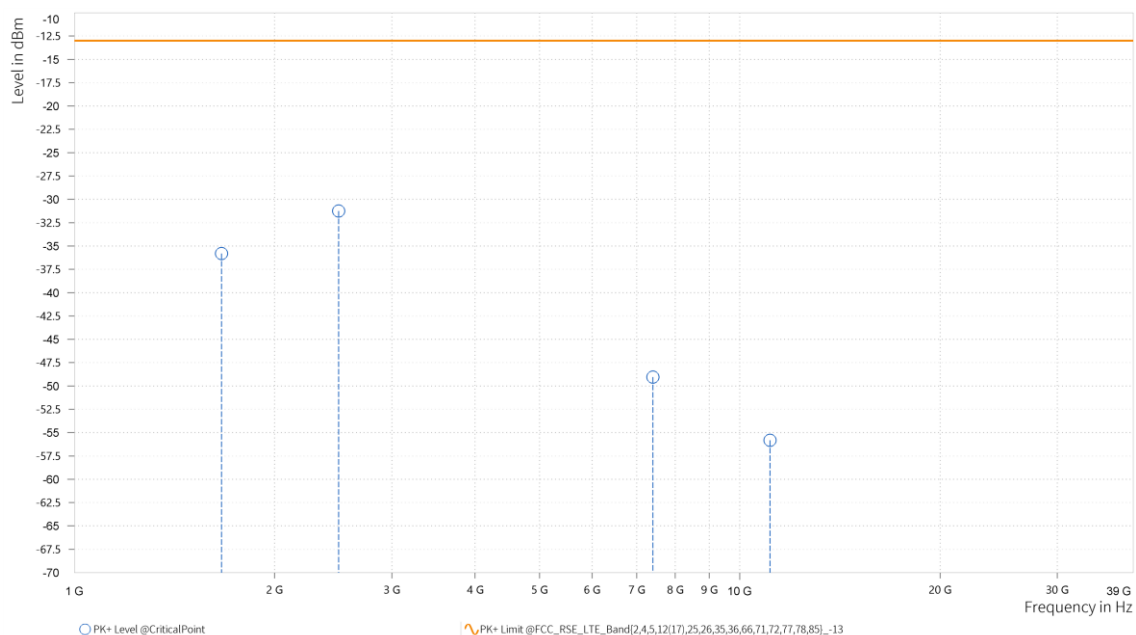


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

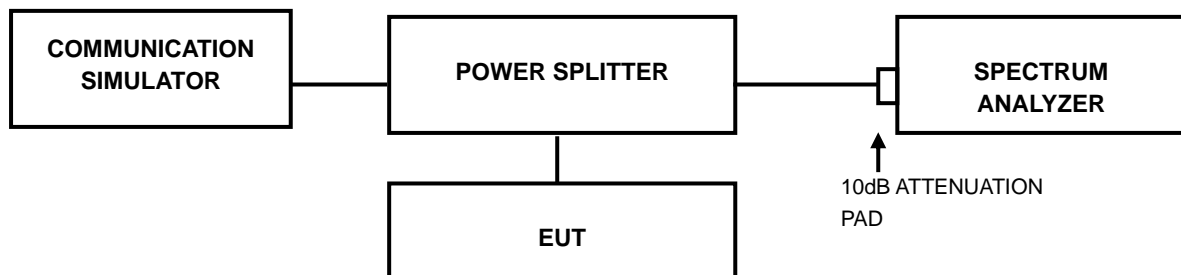

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: PSU-QSU2307030110R10

3.7.4 TEST RESULTS

Please Refer to the module report (Report No.: SEWA2205000015RG02, M Model name: AG550Q-NA, FCC ID: XMR2022AG550QNA).



Test Report No.: PSU-QSU2307030110R10

4 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Suzhou EMC/RF Lab:

Tel: +86 (0557) 368 1008



Test Report No.: PSU-QSU2307030110R10

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--END--