


FCC Test Report

FCC ID : SQG-SONAIF573
Equipment : Sona IF573 802.11ax Wi-Fi 6E Module with Bluetooth 5.4
Model No. : Sona IF573
Brand Name : Laird Connectivity
Applicant : Laird Connectivity LLC
Address : W66N220 Commerce Court, Cedarburg, WI 53012 United States Of America
Standard : 47 CFR FCC Part 15.247
Received Date : Jan. 17, 2023
Tested Date : Apr. 13 ~ May 18, 2023

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:


Along Chen / Assistant Manager



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	10
1.5	Test Standards	11
1.6	Reference Guidance	11
1.7	Deviation from Test Standard and Measurement Procedure.....	11
1.8	Measurement Uncertainty	12
2	TEST CONFIGURATION.....	13
2.1	Testing Facility	13
2.2	The Worst Test Modes and Channel Details	14
3	TRANSMITTER TEST RESULTS	15
3.1	Unwanted Emissions into Restricted Frequency Bands	15
3.2	Unwanted Emissions into Non-Restricted Frequency Bands	18
3.3	Conducted Output Power	19
3.4	Number of Hopping Frequency	20
3.5	20dB and Occupied Bandwidth.....	21
3.6	Channel Separation.....	22
3.7	Number of Dwell Time.....	23
3.8	AC Power Line Conducted Emissions	24
4	TEST LABORATORY INFORMATION	25

Appendix A. Unwanted Emissions into Restricted Frequency Bands

Appendix B. Unwanted Emissions into Non-Restricted Frequency Bands

Appendix C. Conducted Output Power

Appendix D. Number of Hopping Frequency

Appendix E. 20dB and Occupied Bandwidth

Appendix F. Channel Separation

Appendix G. Number of Dwell Time

Appendix H. AC Power Line Conducted Emissions

Release Record

Report No.	Version	Description	Issued Date
FR311701AD	Rev. 01	Initial issue	Jul. 28, 2023

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emission	[dBuV]: 0.500MHz 39.27 (Margin -6.73dB) - AV	Pass
15.247(d) 15.209	Unwanted Emissions	[dBuV/m at 3m]: 4000.00MHz 50.92 (Margin -3.08dB) - AV	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 8.35	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Product Details

The four configurations of the EUT are shown on the following:

Model Name	Part No.	Description
Sona IF573	453-00117	Module, Sona IF573, MIMO, MHF4
	453-00118	Module, Sona IF573, MIMO, Trace Pin
	453-00119	Module, Sona IF573, MIMO, M.2, Key E, SDIO, UART
	453-00120	Module, Sona IF573, MIMO, M.2, Key E, PCIe, UART

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps
Note 1: RF output power specifies that Maximum Peak Conducted Output Power. Note 2: Bluetooth BR uses a GFSK. Note 3: Bluetooth EDR uses a combination of $\pi/4$-DQPSK and 8DPSK.				

1.1.3 Antenna Details

Ant. No.	Manufacturer	Model	Part Number	Type	Connector	Gain (dBi)
1	JOYMAX	TWX-100BRSAX-2001	NA	Dipole	RP-SMA	2
2	Laird	FlexMIMO 6E	EFD2471A3S-10 MH4L	PIFA	MHF4L	2.2
3	Laird	Mini NanoBlade Flex 6 GHz	EMF2471A3S-10 MH4L	PCB Dipole	MHF4L	2.4
4	Laird	FlexPIFA 6E	EFB2471A3S-10 MH4L	PIFA	MHF4L	2.2

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host
-------------------	------------------

1.1.5 Accessories

N/A

1.1.6 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

1.1.7 Test Tool and Duty Cycle

Test Tool	Bluetooth Simulator, Brand: R&S, Model: CMW270	
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
DH5	78.23%	1.07
2DH5	78.23%	1.07
3DH5	78.14%	1.07


1.1.8 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	Default	Default	Default
$\pi/4$ -DQPSK /2Mbps	Default	Default	Default
8DPSK/3Mbps	Default	Default	Default


1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	DELL	Latitude 5400	DoC	---
2	Fixture	---	700-46370 REV B	---	Provided by applicant.
3	Fixture's adapter	---	EA1045CR	---	Provided by applicant. I/P: 100-240Vac,1.5A,50-60Hz O/P: 5.0V 3.0A
4	50Ω terminator	---	---	---	---


1.3 Test Setup Chart

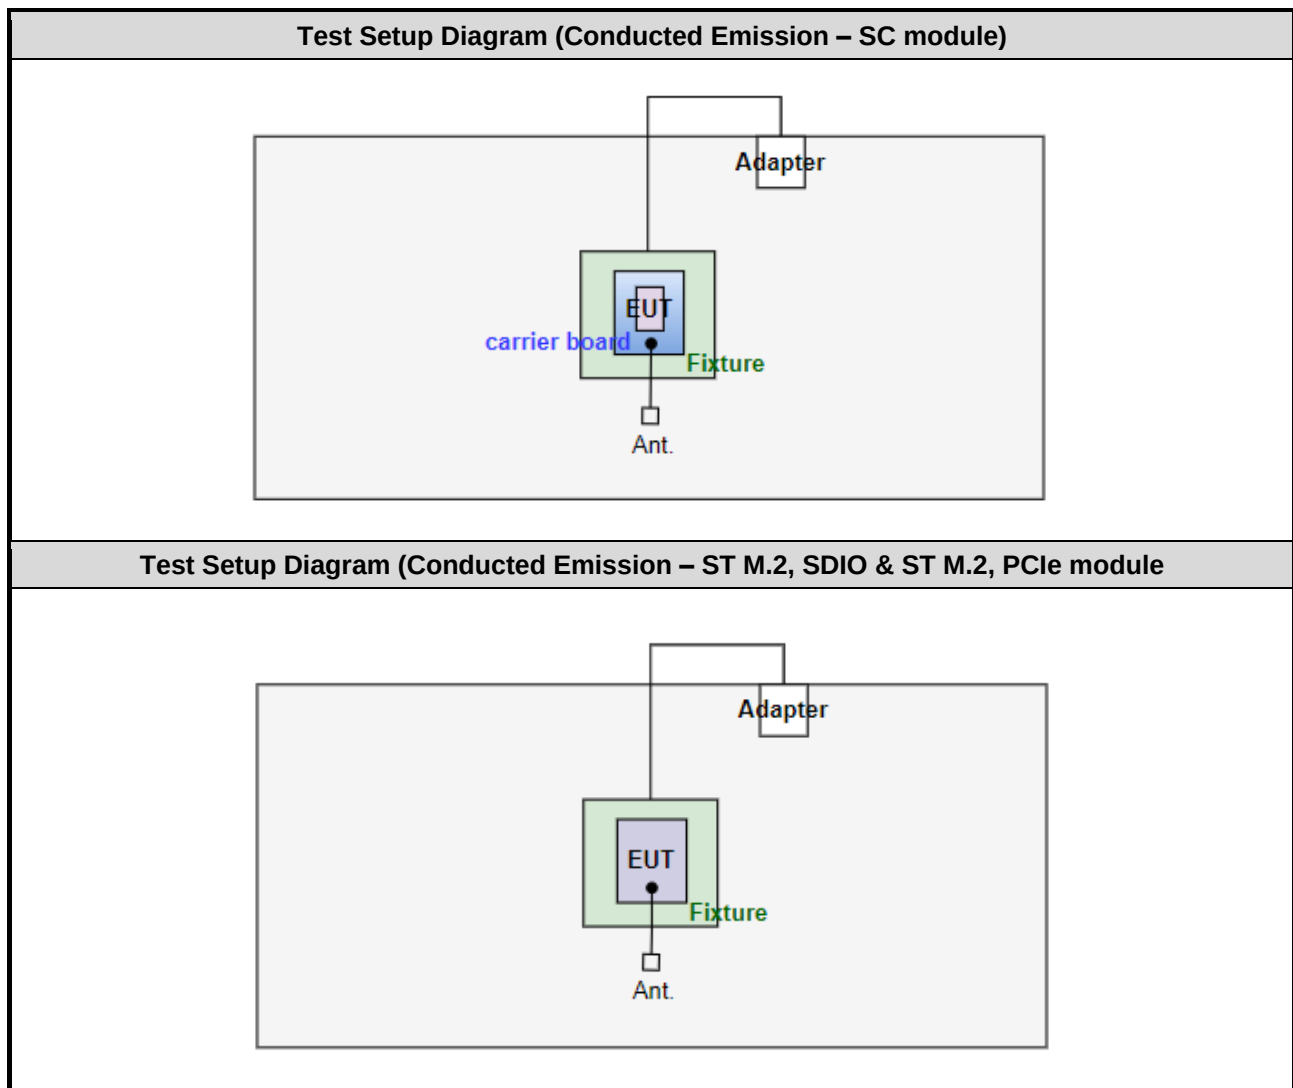

Test Setup Diagram (Radiated Emission – SC module)

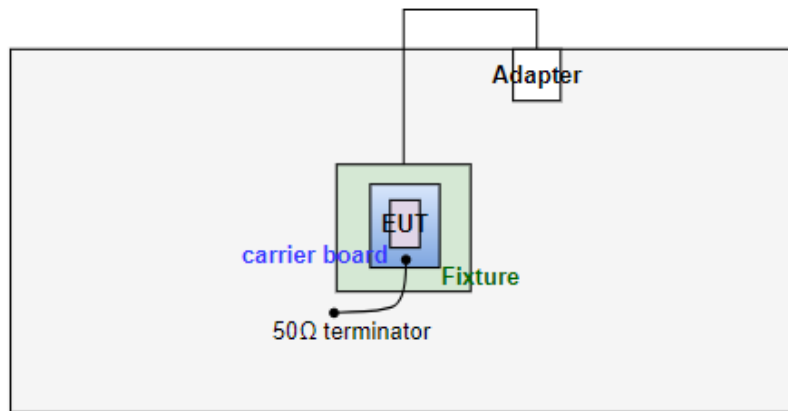

Test Setup Diagram (Radiated Emission – ST M.2, SDIO & ST M.2, PCIe module)

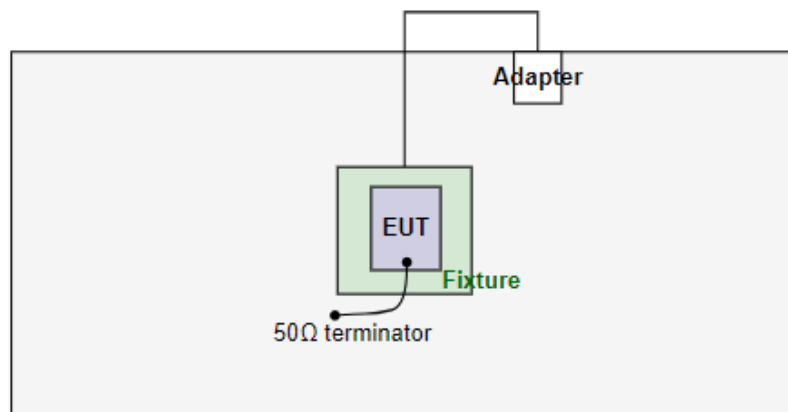

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	May 23, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 17, 2023	Feb. 16, 2024
LISN	R&S	ENV216	101295	Jan. 31, 2023	Jan. 30, 2024
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127667	Jan. 03, 2023	Jan. 02, 2024
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 17, 2022	Oct. 16, 2023
50 ohm terminal (Support Unit)	NA	50	03	Jun. 08, 2022	Jun. 07, 2023
Measurement S/W	AUDIX	e3	6.120210k	NA	NA
Measurement S/W	Sporton	SENSE-EMI	V5.10.8.7	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Apr. 13 ~ Apr. 27, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Wireless connectivity tester	R&S	CMW270	100856	Nov. 16, 2022	Nov. 15, 2023
Receiver	R&S	ESR3	101657	Mar. 03, 2023	Mar. 02, 2024
Spectrum Analyzer	R&S	FSV40	101498	Nov. 21, 2022	Nov. 20, 2023
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 01, 2022	Oct. 31, 2023
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 03, 2022	Aug. 02, 2023
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Nov. 25, 2022	Nov. 24, 2023
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 27, 2022	Oct. 26, 2023
Preamplifier	EMC	EMC02325	980225	Jun. 28, 2022	Jun. 27, 2023
Preamplifier	EMC	EMC118A45SE	980898	Jul. 16, 2022	Jul. 15, 2023
Preamplifier	EMC	EMC184045SE	980903	Jul. 16, 2022	Jul. 15, 2023
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 04, 2022	Oct. 03, 2023
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 04, 2022	Oct. 03, 2023
LF cable 11M	EMC	EMCCFD400-NW-NW-11000	200801	Oct. 04, 2022	Oct. 03, 2023
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	160502	Oct. 04, 2022	Oct. 03, 2023
RF Cable	EMC	EMC104-35M-35M-8000	210920	Oct. 04, 2022	Oct. 03, 2023
RF Cable	EMC	EMC104-35M-35M-3000	210922	Oct. 04, 2022	Oct. 03, 2023
HIGHPASS FILTER 3.1-18G	WHK	WHK3.1/18G-10SS	39	Oct. 06, 2022	Oct. 05, 2023
Attenuator	woken	PE7013-10	10-1	Oct. 14, 2022	Oct. 13, 2023
Measurement S/W	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Apr. 14 ~ May 18, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Wireless connectivity tester	R&S	CMW270	100856	Nov. 16, 2022	Nov. 15, 2023
Spectrum Analyzer	R&S	FSV40	101498	Nov. 21, 2022	Nov. 20, 2023
Power Meter	Anritsu	ML2495A	1241002	Nov. 23, 2022	Nov. 22, 2023
Power Sensor	Anritsu	MA2411B	1207366	Nov. 23, 2022	Nov. 22, 2023
HIGHPASS FILTER 3.1-18G	WHK	WHK3.1/18G-10SS	39	Oct. 06, 2022	Oct. 05, 2023
LOWPASS FILTER	WI	WLKS1100-12SS	2	Oct. 06, 2022	Oct. 05, 2023
Attenuator	woken	PE7013-10	10-1	Oct. 14, 2022	Oct. 13, 2023
Measurement S/W	Sporton	SENSE-15247_FS	V5.10.8	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Unwanted Emission ≤ 1 GHz	± 3.41 dB
Unwanted Emission > 1 GHz	± 4.59 dB
Time	$\pm 0.1\%$

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Test method	Mode	Test Configuration	Note
Conducted Emissions	8DPSK(3Mbps)	2480	Conducted	TX	1, 2, 3	-
Radiated Emissions $\leq$ 1GHz	8DPSK(3Mbps)	2480	Radiated	TX	1, 2, 3	Note 2
Radiated Emissions > 1GHz	GFSK(1Mbps) 8DPSK(3Mbps)	2402, 2441, 2480 2402, 2441, 2480	Radiated	TX	1	Note 2
	8DPSK(3Mbps)	2480	Radiated	TX	3	Note 2
Radiated Emissions $\leq$ 1GHz	GFSK(1Mbps)	2480	Conducted	TX	1	-
					3	-
Radiated Emissions > 1GHz	GFSK(1Mbps) 8DPSK(3Mbps)	2402, 2441, 2480 2402, 2441, 2480	Conducted	TX	1	-
	GFSK(1Mbps)	2480	Conducted	TX	3	-
Number of Hopping Channels	GFSK(1Mbps) π/4 DQPSK(2Mbps) 8DPSK(3Mbps)	2402~2480 2402~2480 2402~2480	Conducted	TX	1	-
Conducted Output Power	GFSK(1Mbps) π/4 DQPSK(2Mbps) 8DPSK(3Mbps)	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	Conducted	TX	1, 3	-
Hopping Channel Separation 20dB and Occupied bandwidth	GFSK(1Mbps) π/4 DQPSK(2Mbps) 8DPSK(3Mbps)	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	Conducted	TX	1	-
Dwell Time	GFSK(1Mbps) π/4 DQPSK(2Mbps) 8DPSK(3Mbps)	2402 2402 2402	Conducted	TX	1	-
NOTE: - The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Y-plane result was found as the worst case and was shown in this report. - The 50Ω terminator is connected to antenna port of EUT for radiated emission measurement. - Test configurations are listed as below: Configuration 1: Laird part number: 453-00117 (SC module) Configuration 2: Laird part number: 453-00119 (ST M.2, SDIO Module) Configuration 3: Laird part number: 453-00120 (ST M.2, PCIe Module)						

3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9~90 kHz, 110~490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. Radiated emission above 1GHz / Peak value
RBW=1MHz, VBW=3MHz and Peak detector
Radiated emission above 1GHz / Average value for harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:
3.
$$20\log (\text{Duty cycle}) = 20\log \frac{1\text{s} / 1600 * 5}{100 \text{ ms}} = -30.1\text{dB}$$
4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=1/T and Peak detector

3.1.3 Test Setup

Radiated Emissions below 1 GHz

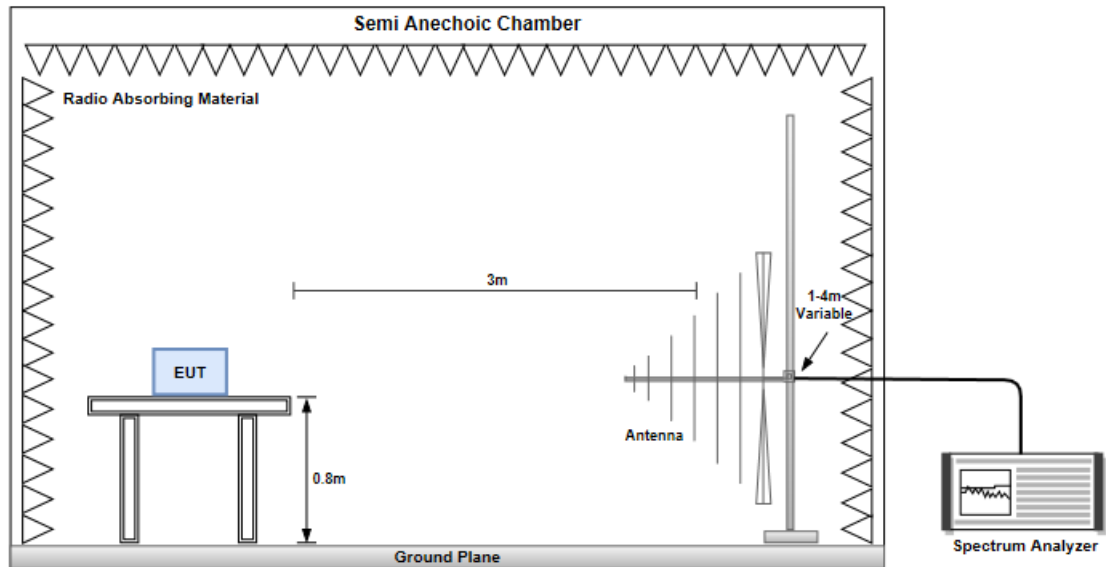

Radiated Emissions above 1 GHz

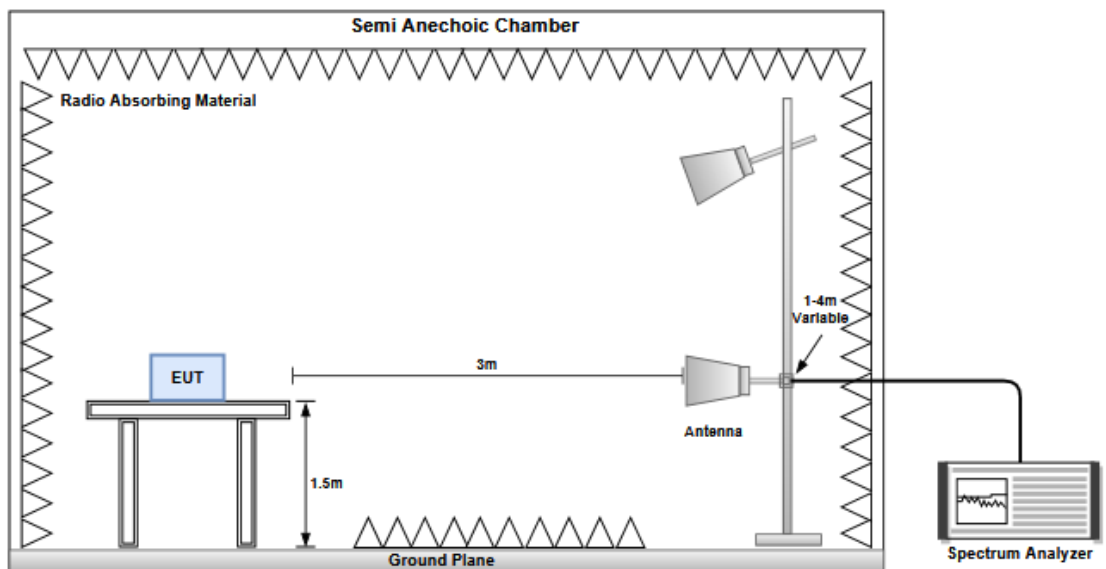

3.1.4 Test Results

Refer to Appendix A.

3.2 Unwanted Emissions into Non-Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.2.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.2.3 Test Setup



3.2.4 Test Results

Ambient Condition	25-26°C / 63-66%	Tested By	Akun Chung
-------------------	------------------	-----------	------------

Refer to Appendix B.

3.3 Conducted Output Power


3.3.1 Limit of Conducted Output Power

- ☐ 1 Watt
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- ☒ 0.125 Watt
For all other frequency hopping systems in the 2400–2483.5 MHz band.
- ☐ 0.125 Watt
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.3.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.3.3 Test Setup



3.3.4 Test Results

Ambient Condition	25-26°C / 63-66%	Tested By	Akun Chung
-------------------	------------------	-----------	------------

Refer to Appendix C.

3.4 Number of Hopping Frequency


3.4.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

3.4.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

3.4.3 Test Setup



3.4.4 Test Results

Ambient Condition	25-26°C / 63-66%	Tested By	Akun Chung
-------------------	------------------	-----------	------------

Refer to Appendix D.

3.5 20dB and Occupied Bandwidth

3.5.1 Test Procedures


20dB Bandwidth

1. Set RBW=20kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak , Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set RBW=20kHz, VBW=100kHz, Sweep time = Auto, Detector=Sample , Trace max hold
2. Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.5.2 Test Setup



3.5.3 Test Results

Ambient Condition	25-26°C / 63-66%	Tested By	Akun Chung
-------------------	------------------	-----------	------------

Refer to Appendix E.

3.6 Channel Separation


3.6.1 Limit of Channel Separation

- ☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- ☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.6.2 Test Procedures

1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.6.3 Test Setup



3.6.4 Test Results

Ambient Condition	25-26°C / 63-66%	Tested By	Akun Chung
-------------------	------------------	-----------	------------

Refer to Appendix F.

3.7 Number of Dwell Time


3.7.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.7.2 Test Procedures

1. Set RBW=300 kHz, VBW=1 MHz, Sweep time=8 ms, Detector=Peak, Span=0 Hz, Trace max hold.
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. Set RBW=300 kHz, VBW=1 MHz, Sweep time=5 s / 2 s, Detector=Peak, Span=0 Hz, Trace max hold.
4. Enable gating and trigger function of spectrum analyzer to measure burst on number of transmission.
5. Set RBW=300 kHz, VBW=1 MHz, Sweep time=31.6 s / 8 s, Detector=Peak, Span=0 Hz, Trace max hold.
6. Enable gating and trigger function of spectrum analyzer to measure burst on number of transmission of entire time cycle.

3.7.3 Test Setup



3.7.4 Test Results

Ambient Condition	25-26°C / 63-66%	Tested By	Akun Chung
-------------------	------------------	-----------	------------

Refer to Appendix G.

3.8 AC Power Line Conducted Emissions

3.8.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.8.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.8.3 Test Setup

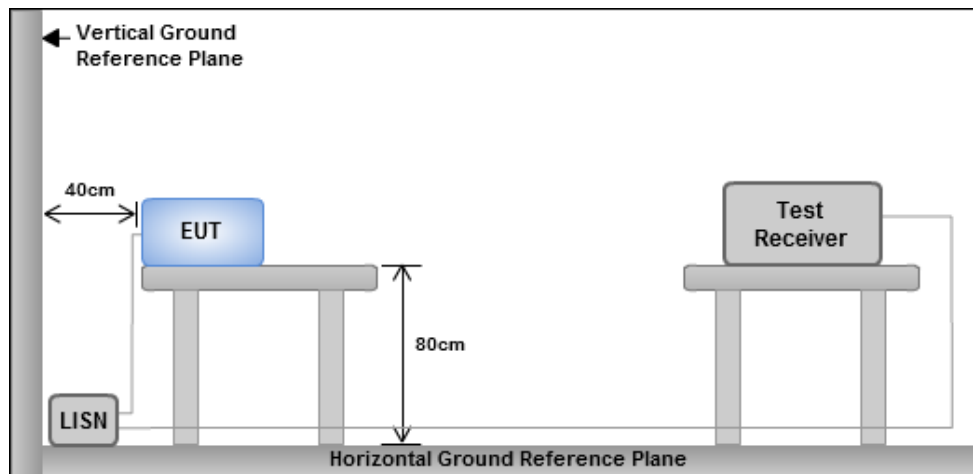

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.8.4 Test Results

Refer to Appendix H.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345


Email: ICC_Service@icertifi.com.tw

==END==

Restrict bands below 1G							
Transmitter Conducted Unwanted Emissions Results							
Modulation Mode	GFSK			Frequency	2480MHz		
Range (MHz)	Max Value (dBm)	DG (dBi)	GRF (dB)	EIRP (dBm)	E-Field (dBuV/m)	Min E-Field Limit (dBuV/m)	E-Field Margin (dB)
30~1000MHz	-75.87	2.40	4.70	-68.77	26.49	40.00	-13.51

DG=directional gain

GRF=ground reflection factor

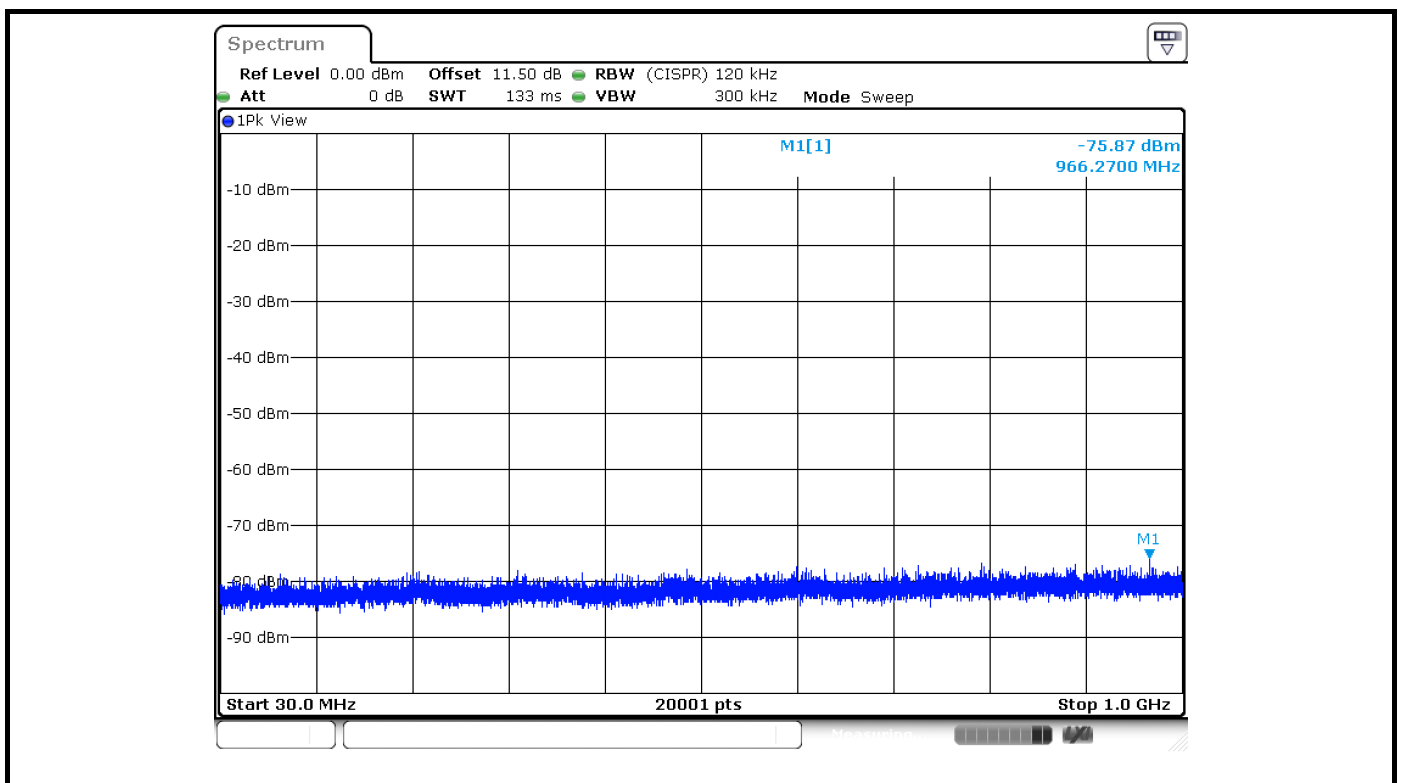

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	GFSK			Frequency	2402 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4003.33	PK	-52.82	2.40	-50.42	44.84	74.00	-29.16
4003.33	AV note1	-	2.40	-	-	54.00	-
4804.00	PK	-49.74	2.40	-47.34	47.92	74.00	-26.08
4804.00	AV note1	-	2.40	-	-	54.00	-

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	GFSK			Frequency	2441 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4068.33	PK	-54.19	2.40	-51.79	43.47	74.00	-30.53
4068.33	AV note1	-	2.40	-	-	54.00	-
4882.00	PK	-45.58	2.40	-43.18	52.08	74.00	-21.92
4882.00	AV note1	-	2.40	-	-	54.00	-

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	GFSK			Frequency	2480 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4133.33	PK	-55.98	2.40	-53.58	41.68	74.00	-32.32
4133.33	AV note1	-	2.40	-	-	54.00	-
4960.00	PK	-44.41	2.40	-42.01	53.25	74.00	-20.75
4960.00	AV note1	-	2.40	-	-	54.00	-


Note: If the PK margin greater than 20 dB, there is no need to get AVG reading.


Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	8DPSK			Frequency	2402 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4003.33	PK	-55.45	2.40	-53.05	42.21	74.00	-31.79
4003.33	AV note1	-	2.40	-	-	54.00	-
4804.00	PK	-57.25	2.40	-54.85	40.41	74.00	-33.59
4804.00	AV note1	-	2.40	-	-	54.00	-

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	8DPSK			Frequency	2441 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4068.33	PK	-56.12	2.40	-53.72	41.54	74.00	-32.46
4068.33	AV note1	-	2.40	-	-	54.00	-
4882.00	PK	-54.83	2.40	-52.43	42.83	74.00	-31.17
4882.00	AV note1	-	2.40	-	-	54.00	-



Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	8DPSK			Frequency	2480 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4133.33	PK	-57.56	2.40	-55.16	40.10	74.00	-33.90
4133.33	AV note1	-	2.40	-	-	54.00	-
4960.00	PK	-55.01	2.40	-52.61	42.65	74.00	-31.35
4960.00	AV note1	-	2.40	-	-	54.00	-

Note : If the PK margin greater than 20 dB, there is no need to get AVG reading.


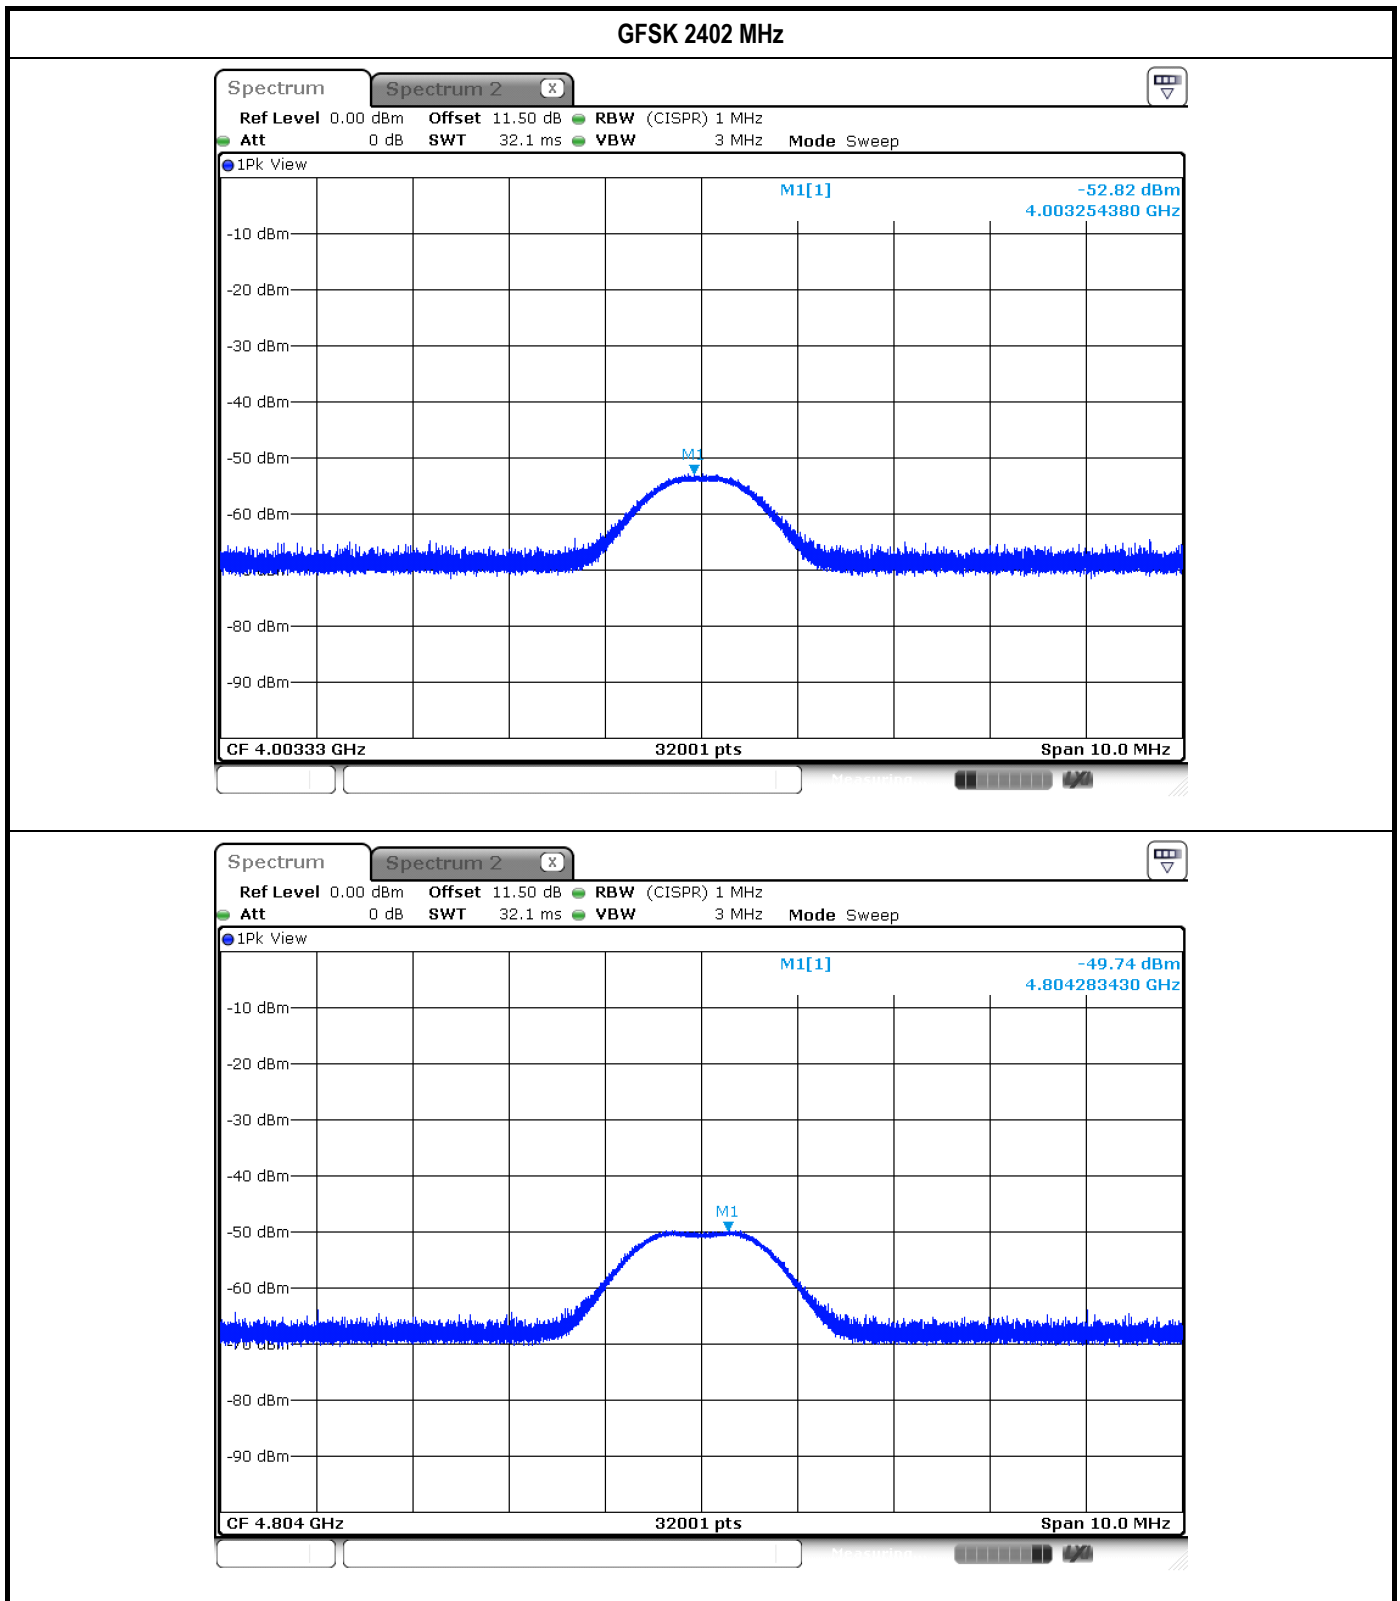


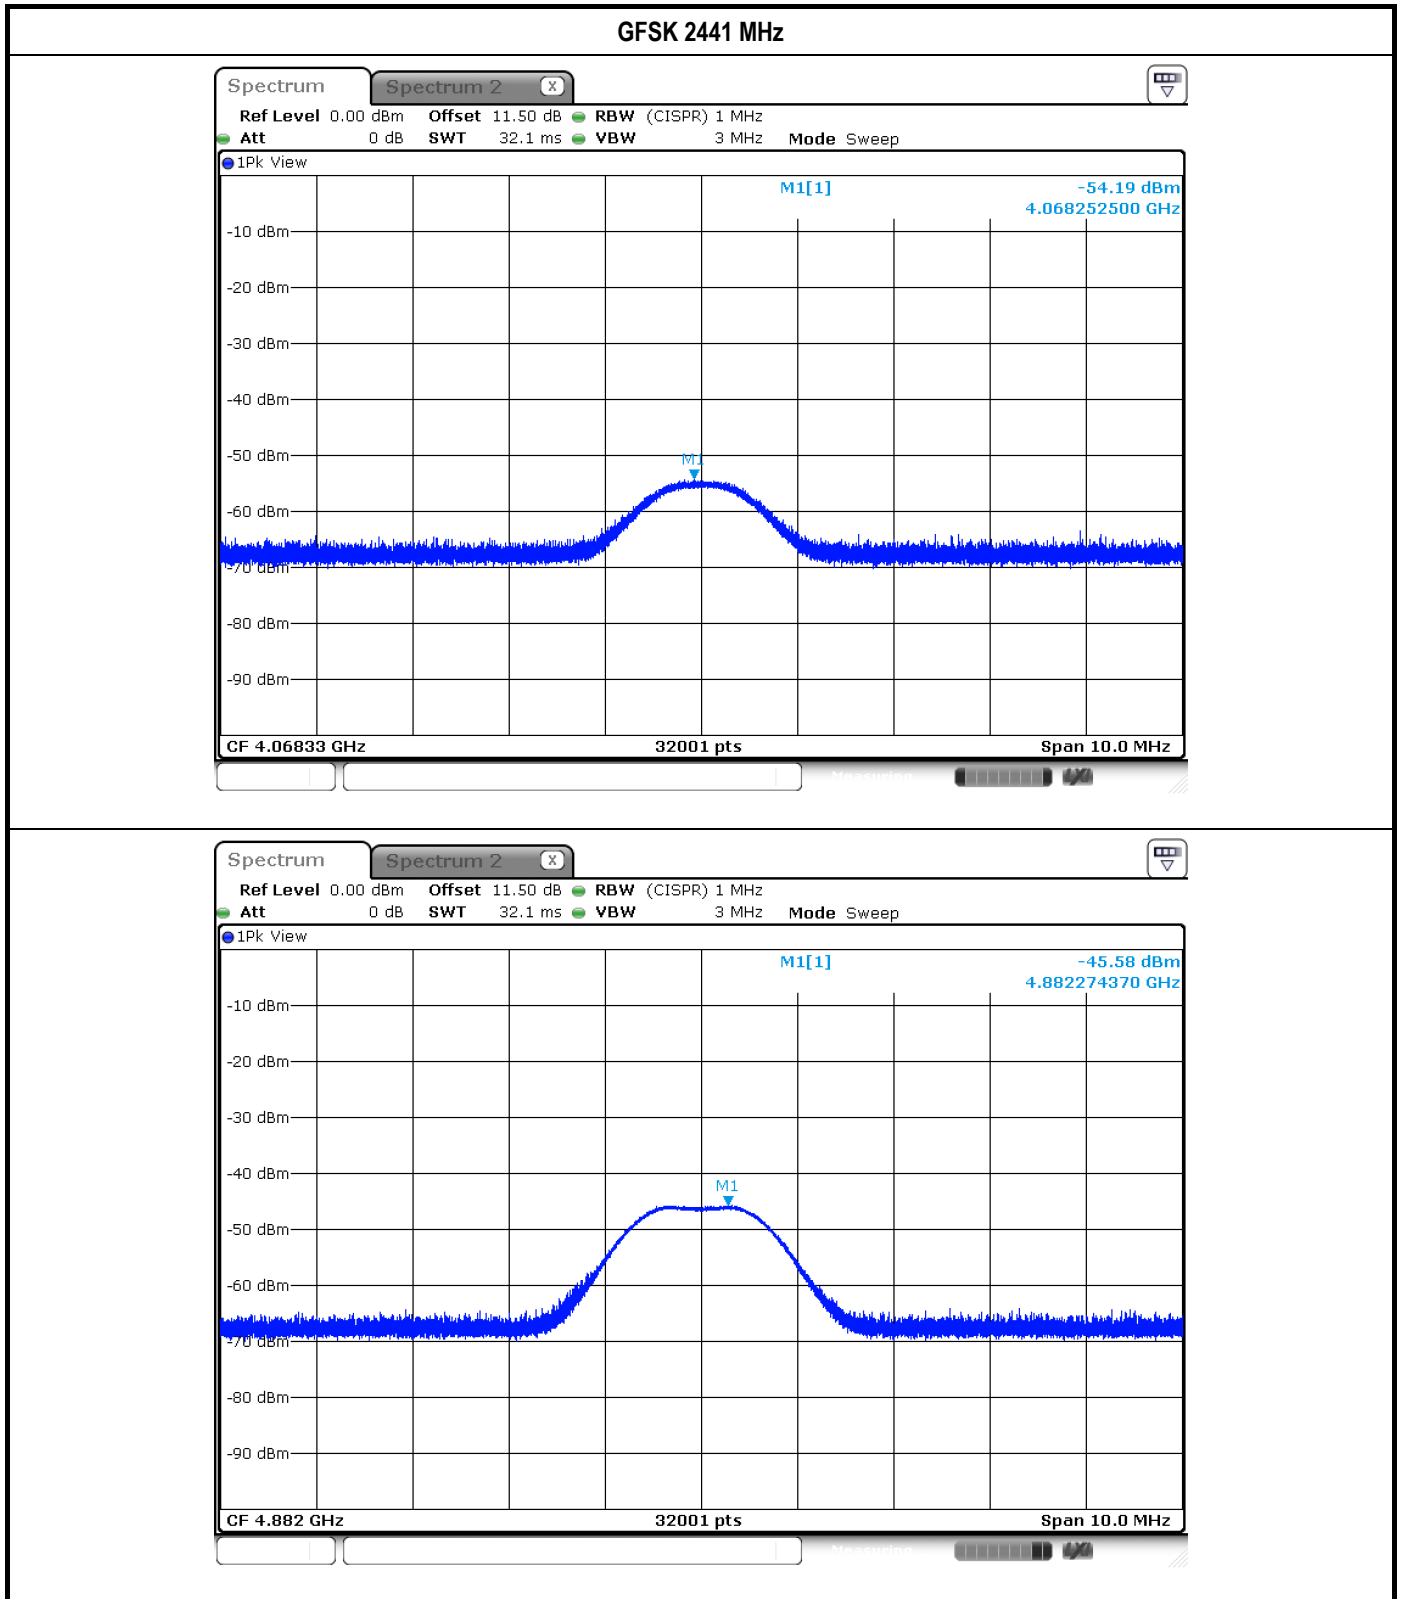



GFSK 2480 MHz

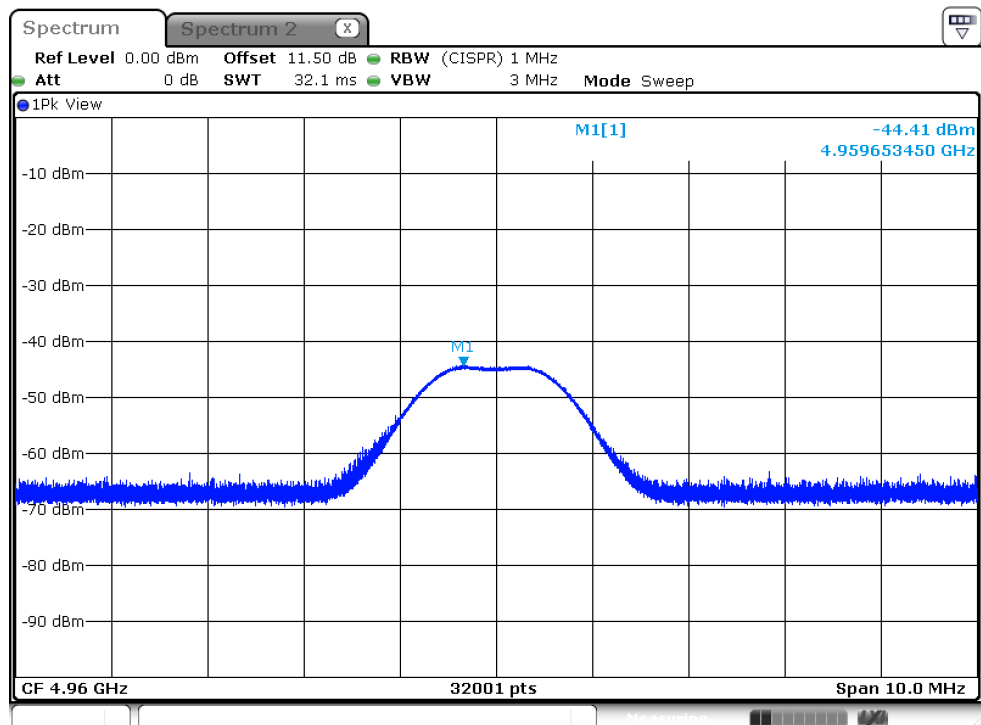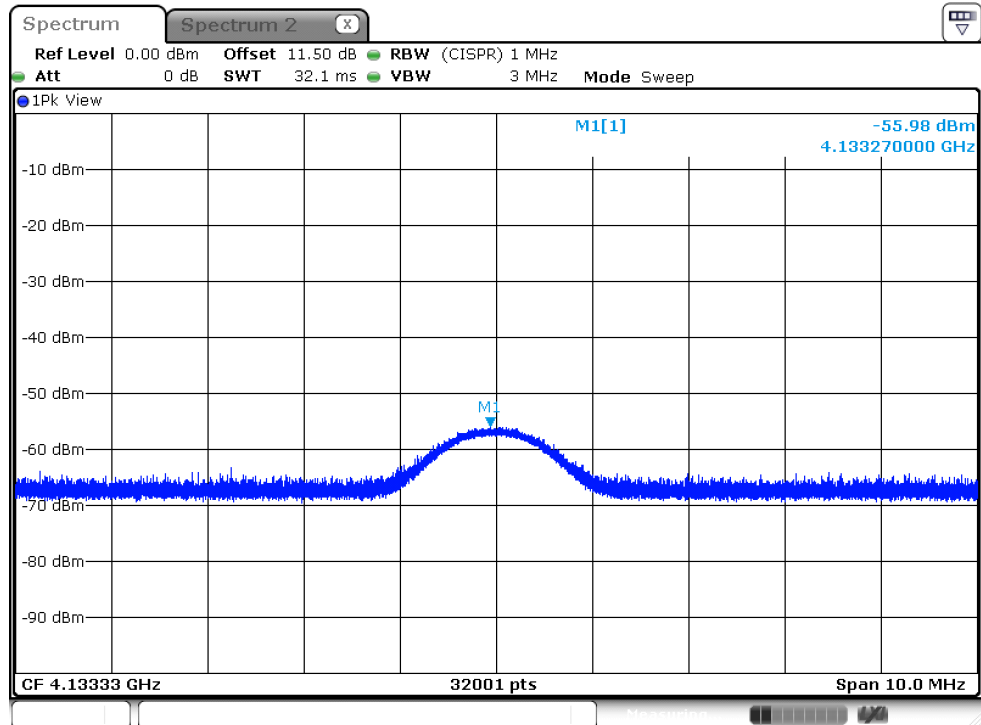



8DPSK 2402 MHz

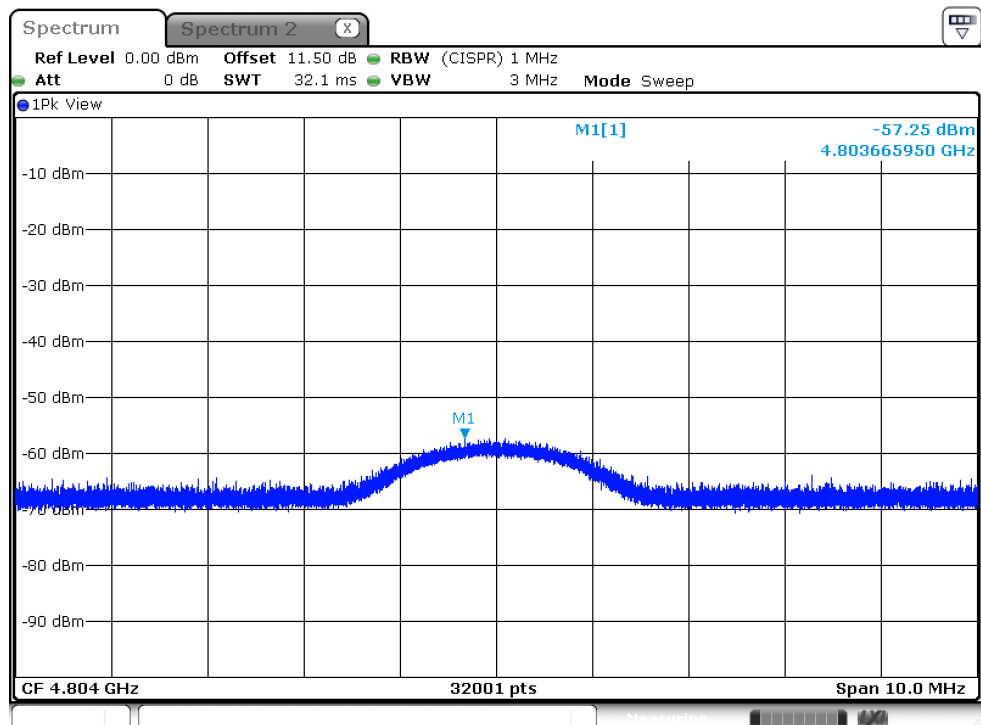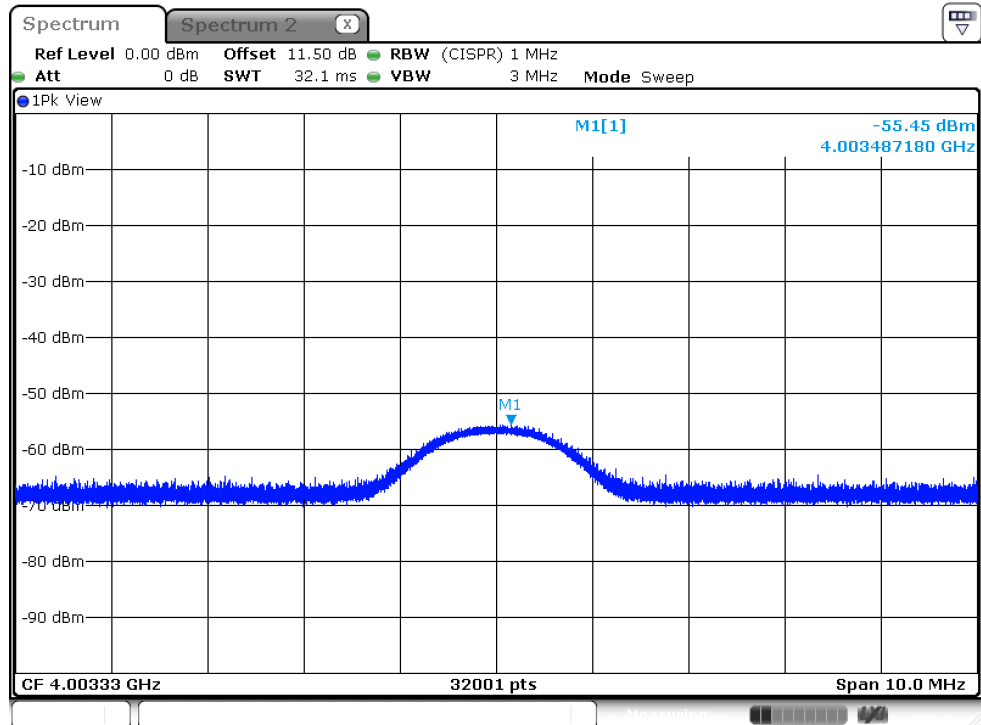

8DPSK 2441 MHz

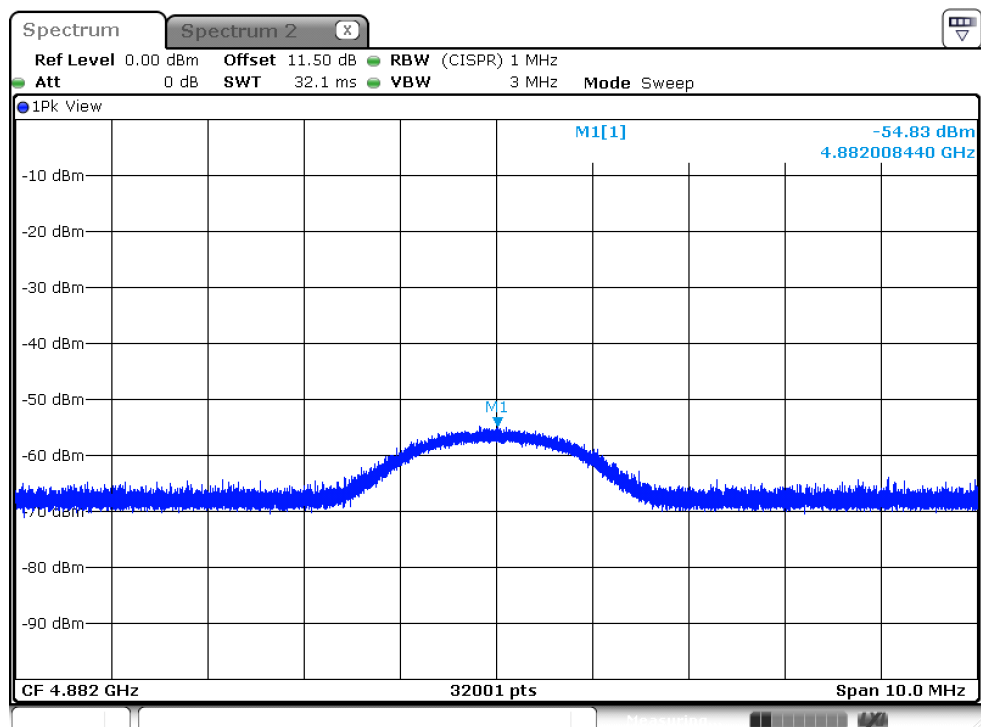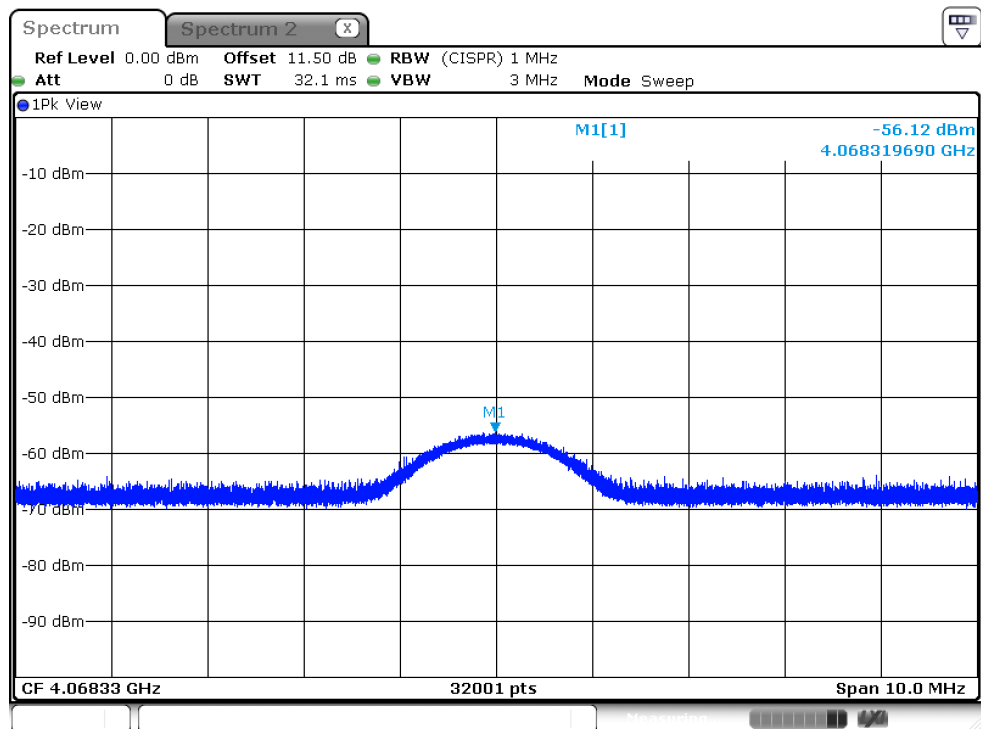



8DPSK 2480 MHz

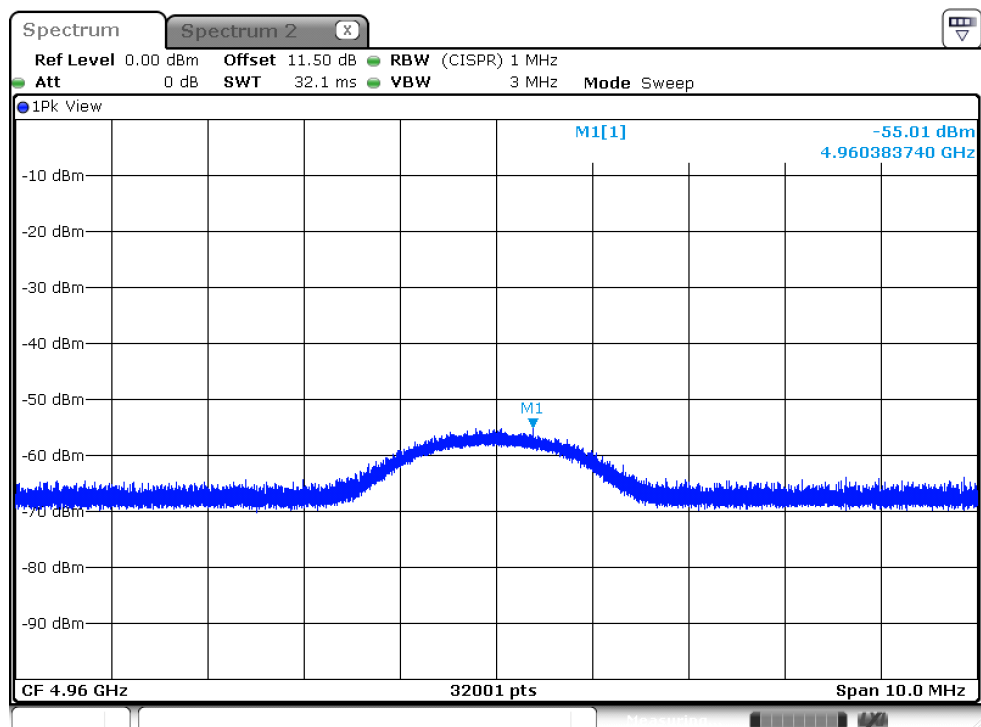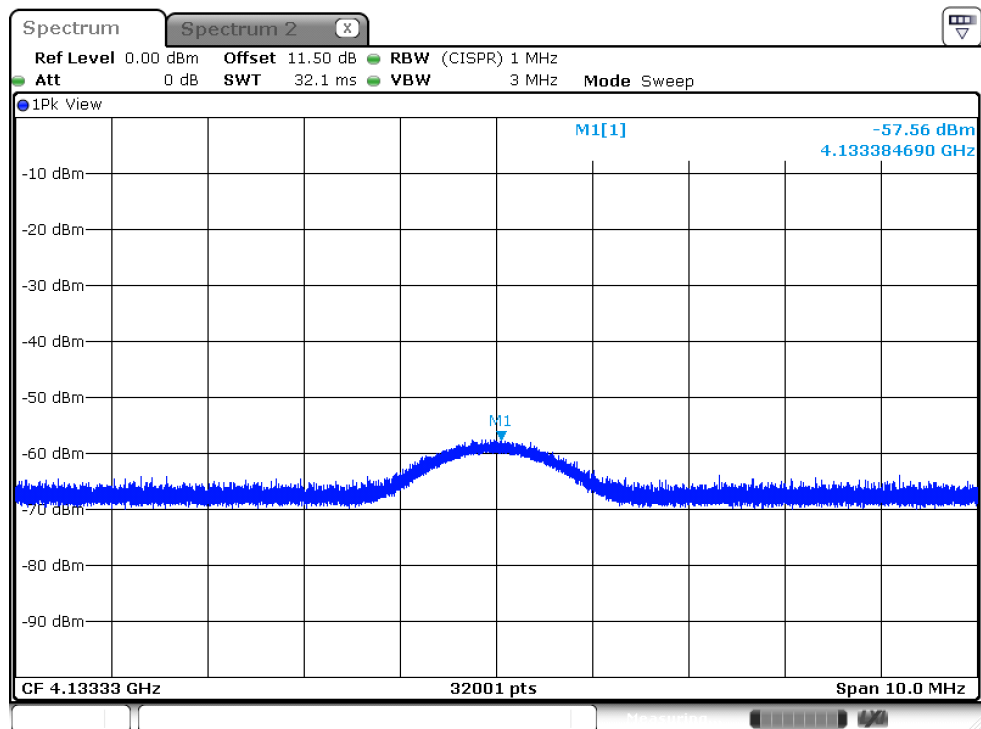



Restrict bands above 1G								
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band - Bandedge								
Modulation Mode	GFSK							
Test ch. Freq. (MHz)	Remark	Range (MHz)	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
2402	PK	2310~2390	-46.72	2.40	-44.32	50.94	74.00	-23.06
	AV	2310~2390	-59.88	2.40	-57.48	37.78	54.00	-16.22
	PK	2483.5~2500	-46.57	2.40	-44.17	51.09	74.00	-22.91
	AV	2483.5~2500	-60.09	2.40	-57.69	37.57	54.00	-16.43
2441	PK	2310~2390	-46.57	2.40	-44.17	51.09	74.00	-22.91
	AV	2310~2390	-60.01	2.40	-57.61	37.65	54.00	-16.35
	PK	2483.5~2500	-46.79	2.40	-44.39	50.87	74.00	-23.13
	AV	2483.5~2500	-59.92	2.40	-57.52	37.74	54.00	-16.26
2480	PK	2310~2390	-46.37	2.40	-43.97	51.29	74.00	-22.71
	AV	2310~2390	-58.44	2.40	-56.04	39.22	54.00	-14.78
	PK	2483.5~2500	-45.72	2.40	-43.32	51.94	74.00	-22.06
	AV	2483.5~2500	-57.38	2.40	-54.98	40.28	54.00	-13.72

Restrict bands above 1G								
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band - Bandedge								
Modulation Mode	8DPSK							
Test ch. Freq. (MHz)	Remark	Range (MHz)	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
2402	PK	2310~2390	-46.86	2.40	-44.46	50.80	74.00	-23.20
	AV	2310~2390	-60.50	2.40	-58.10	37.16	54.00	-16.84
	PK	2483.5~2500	-46.49	2.40	-44.09	51.17	74.00	-22.83
	AV	2483.5~2500	-60.09	2.40	-57.69	37.57	54.00	-16.43
2441	PK	2310~2390	-46.24	2.40	-43.84	51.42	74.00	-22.58
	AV	2310~2390	-60.05	2.40	-57.65	37.61	54.00	-16.39
	PK	2483.5~2500	-47.65	2.40	-45.25	50.01	74.00	-23.99
	AV	2483.5~2500	-60.19	2.40	-57.79	37.47	54.00	-16.53
2480	PK	2310~2390	-46.85	2.40	-44.45	50.81	74.00	-23.19
	AV	2310~2390	-59.65	2.40	-57.25	38.01	54.00	-15.99
	PK	2483.5~2500	-46.73	2.40	-44.33	50.93	74.00	-23.07
	AV	2483.5~2500	-59.84	2.40	-57.44	37.82	54.00	-16.18



GFSK 2402 MHz

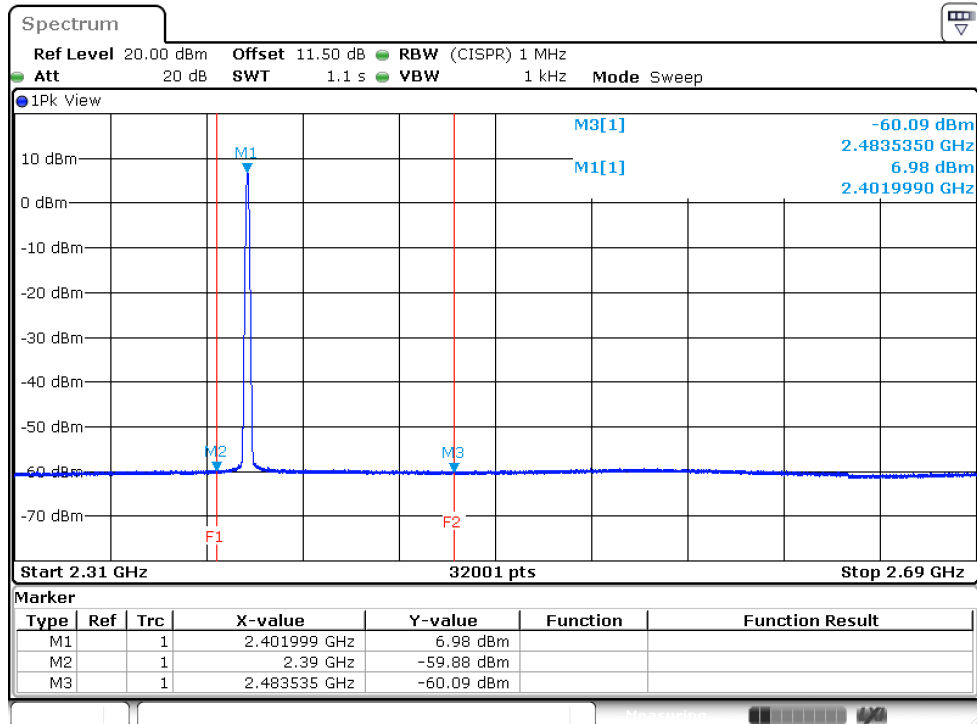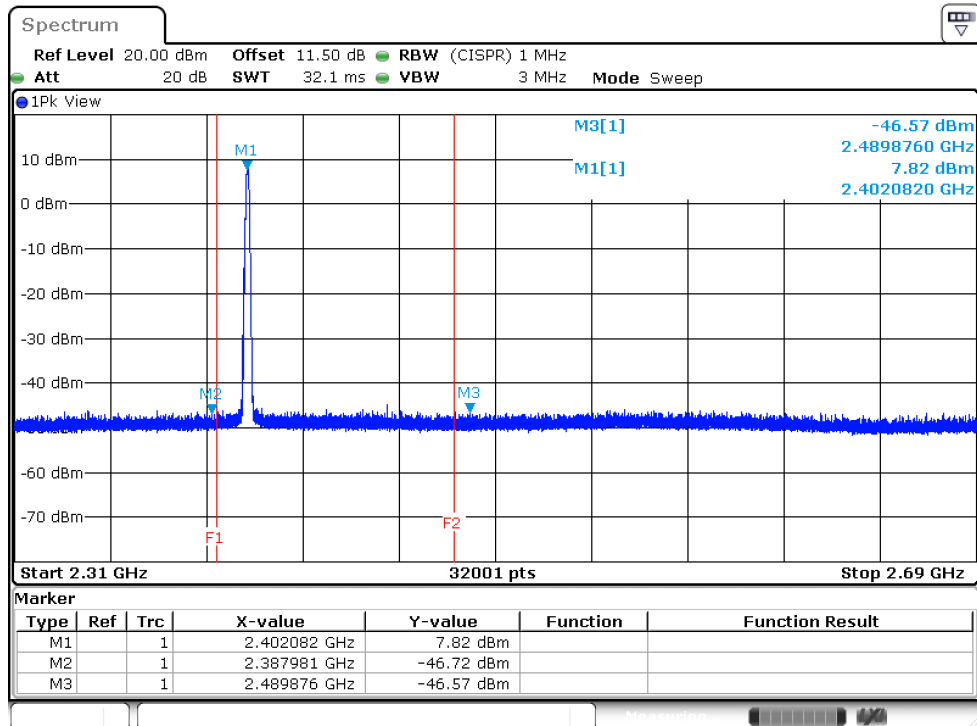



GFSK 2441 MHz

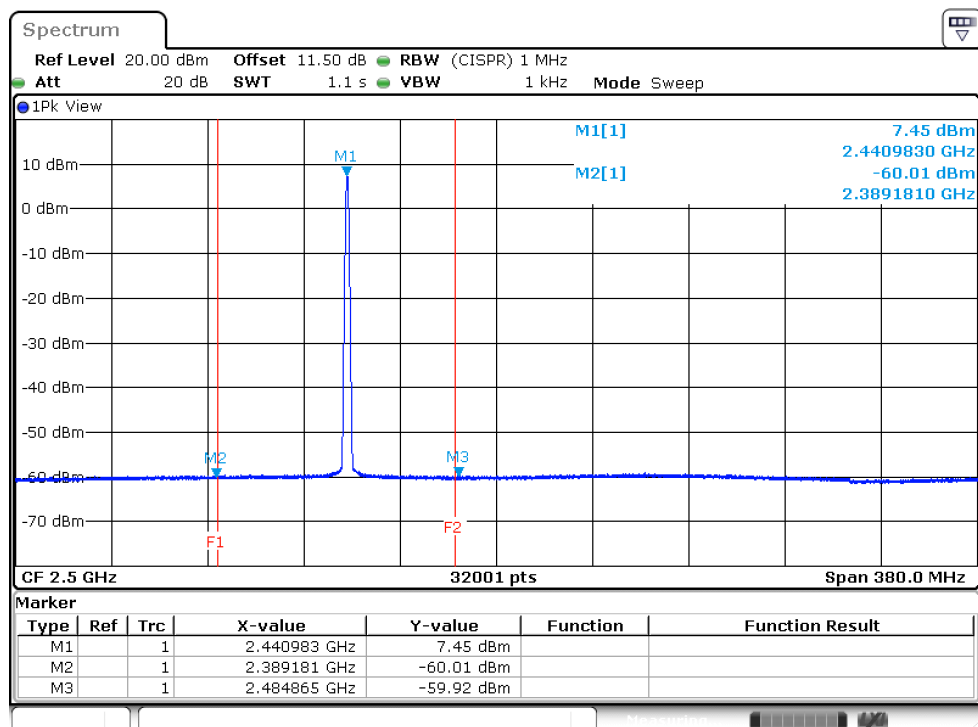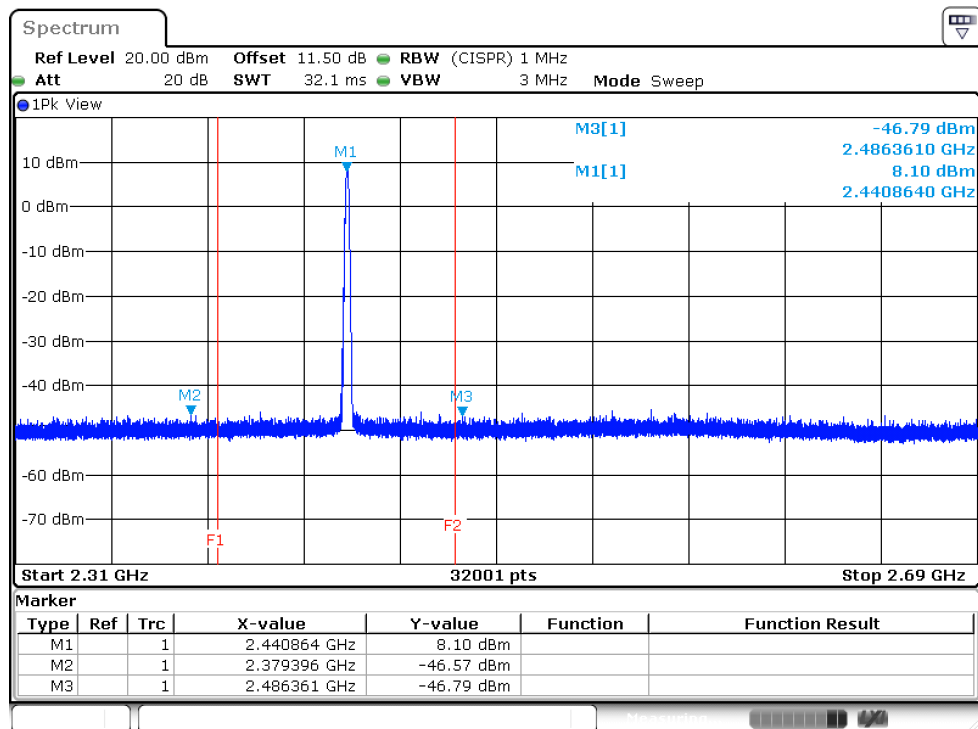



GFSK 2480 MHz

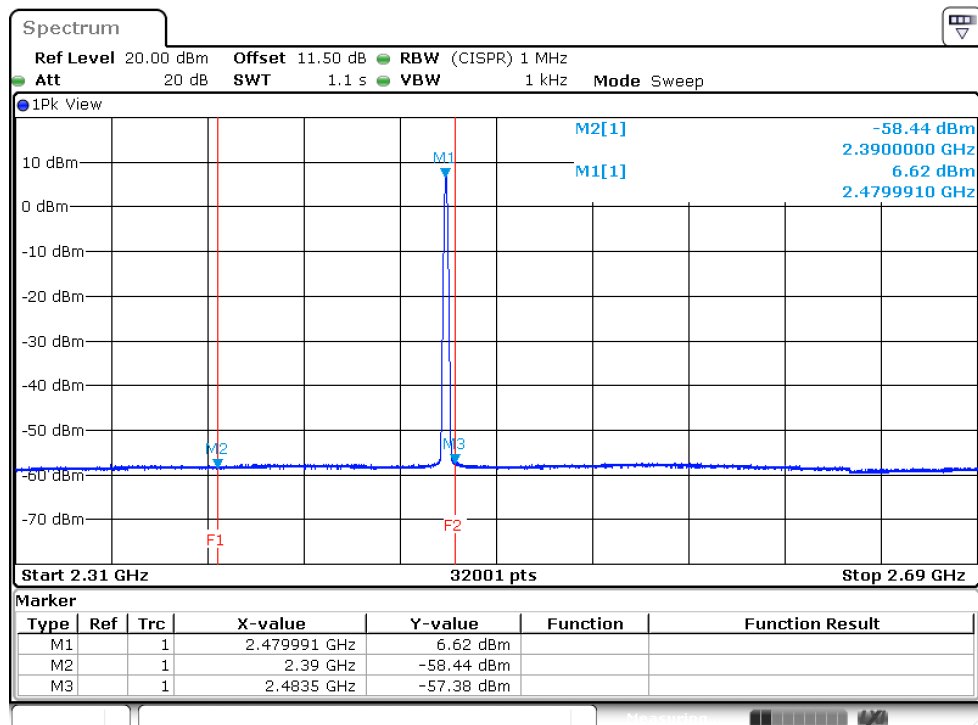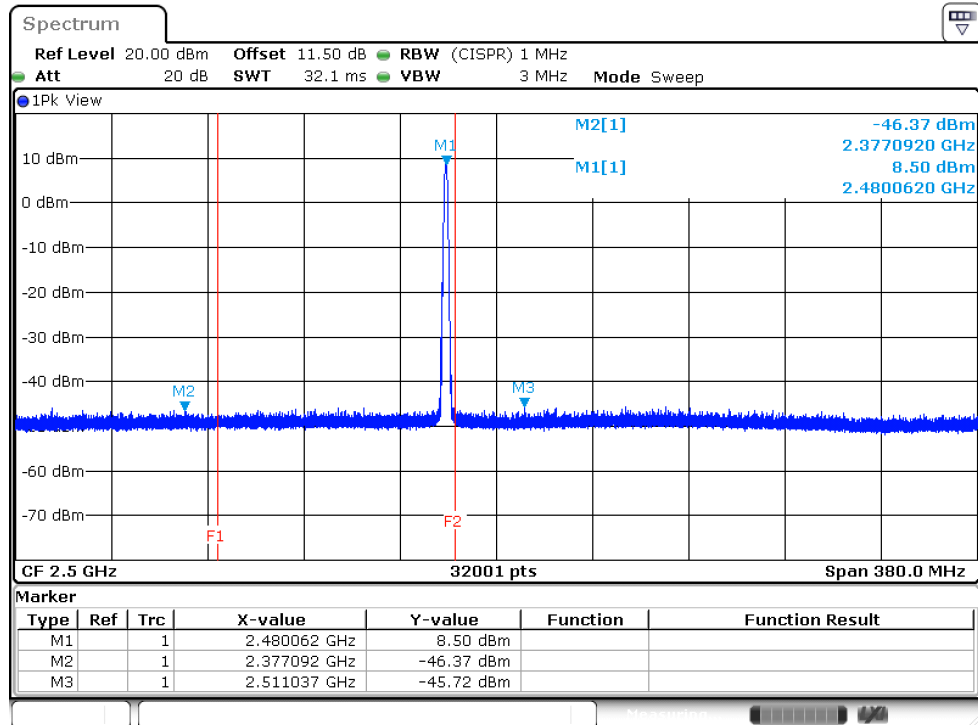



8DPSK 2402 MHz

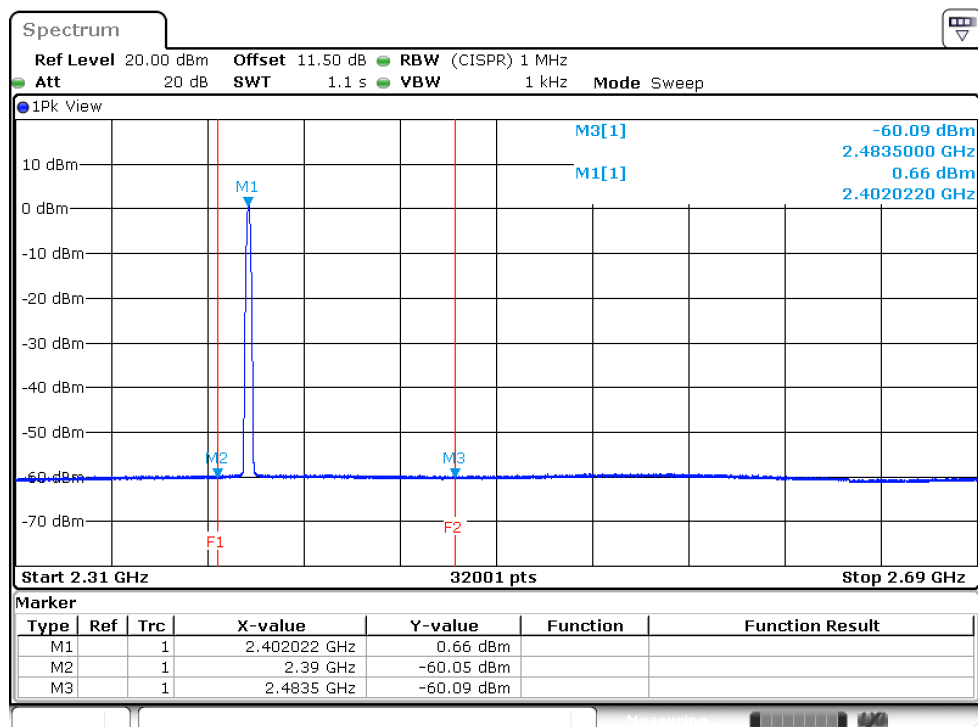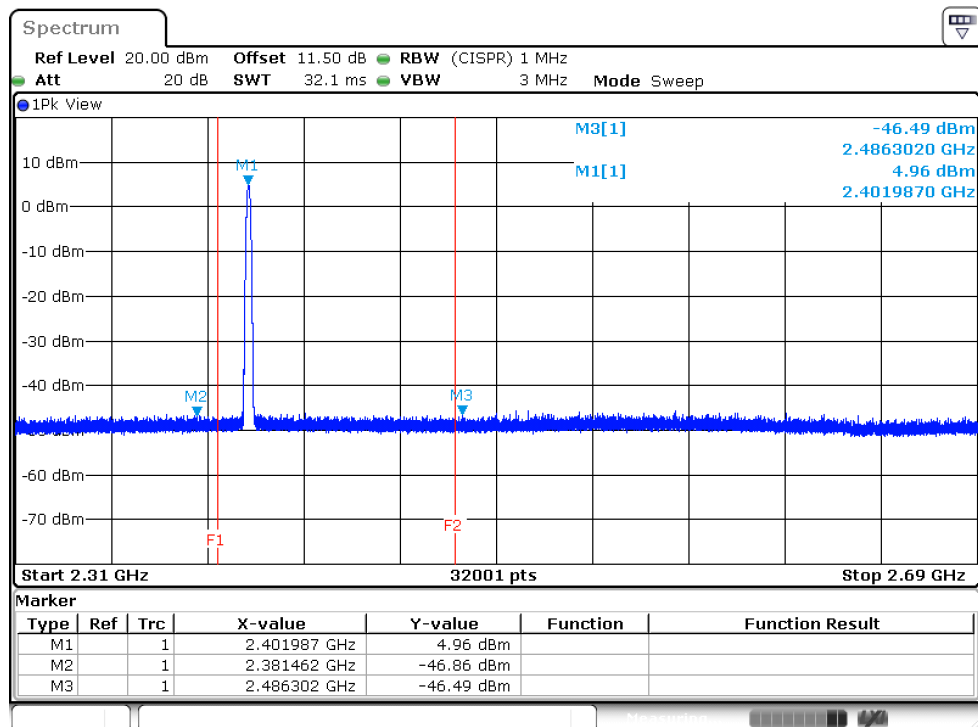

8DPSK 2441 MHz

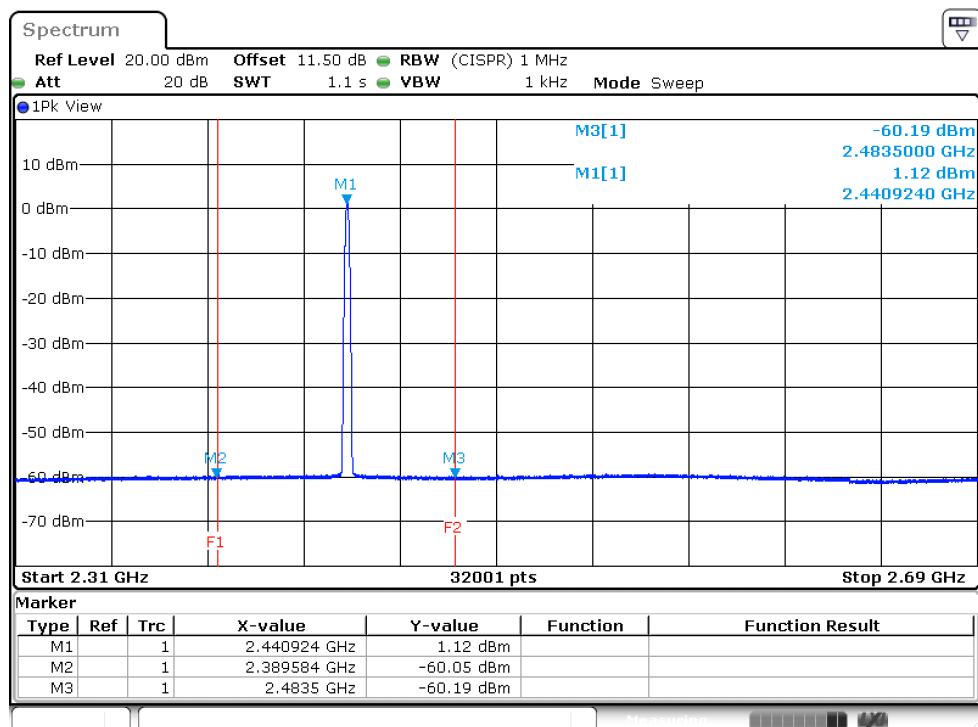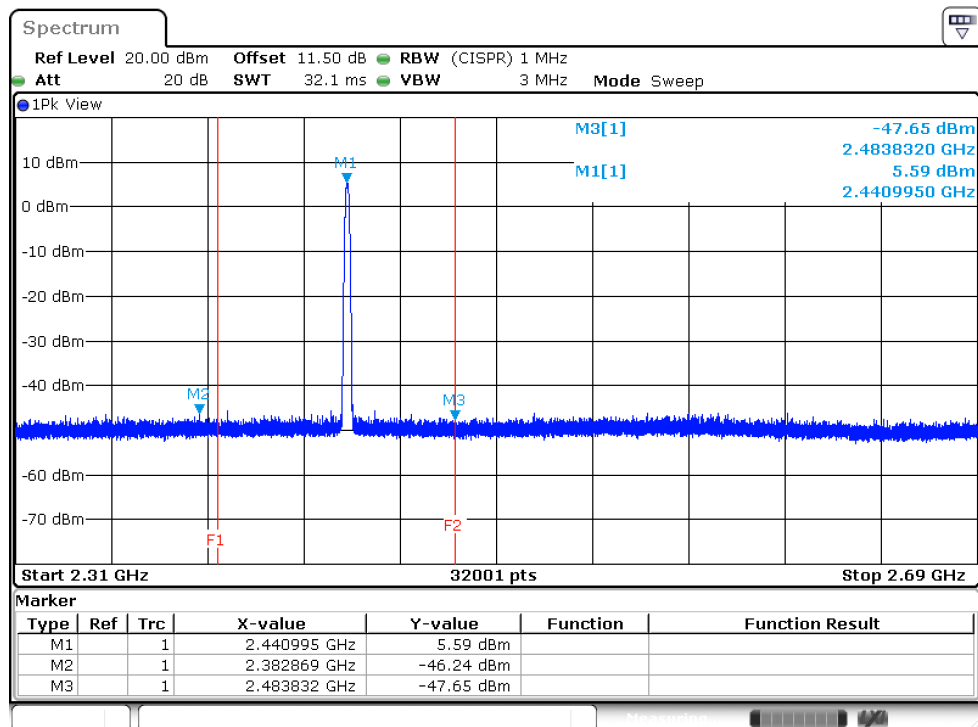

8DPSK 2480 MHz

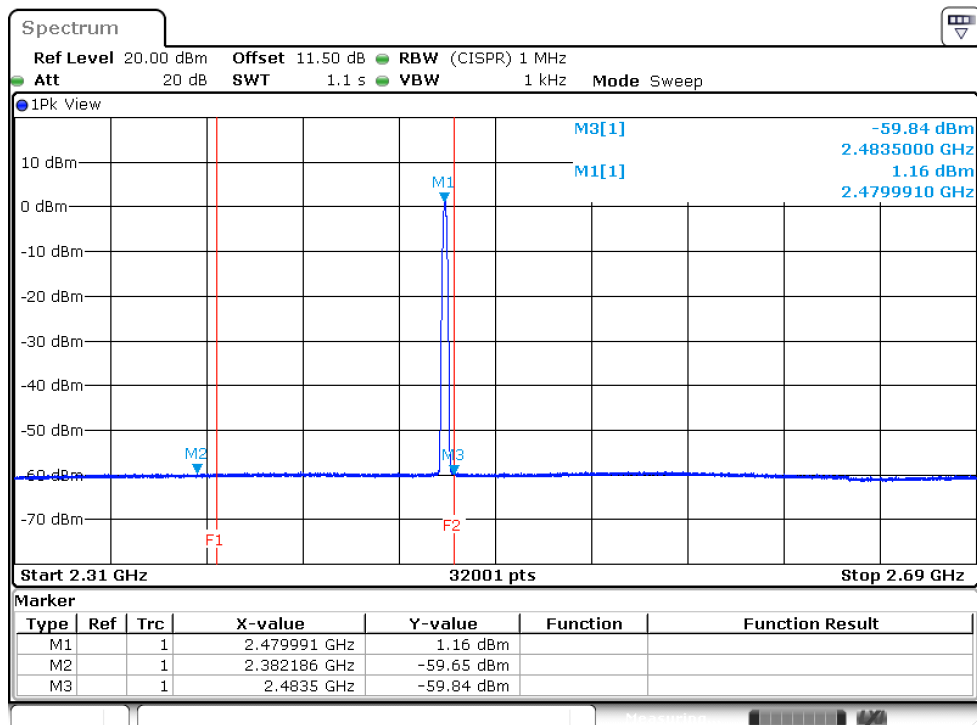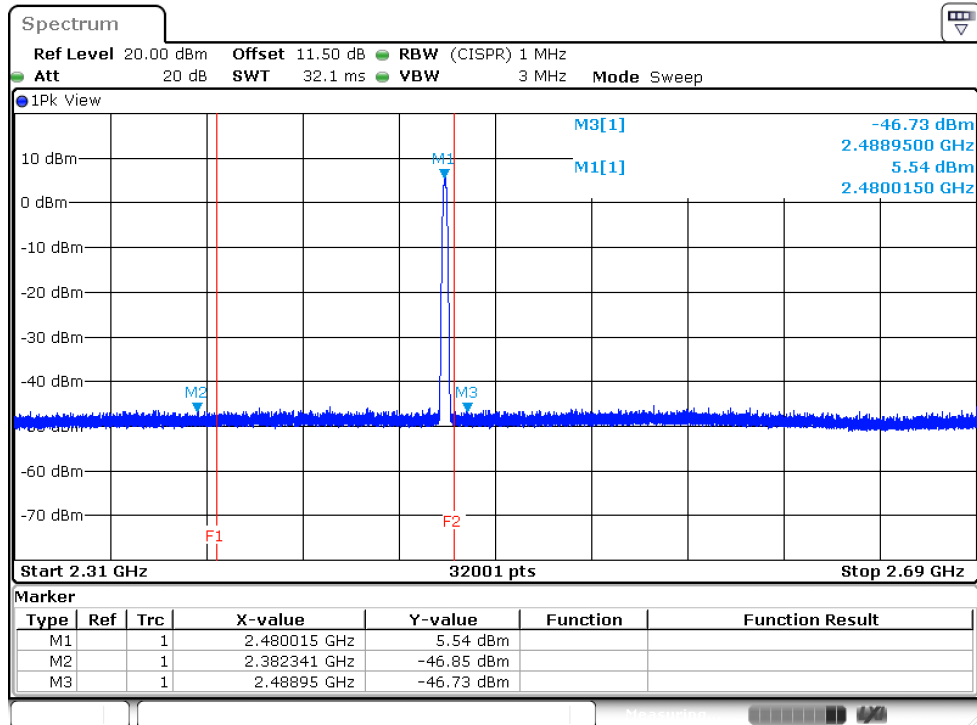

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	GFSK			Frequency	2402 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4003.33	PK	-52.82	2.40	-50.42	44.84	74.00	-29.16
4003.33	AV note1	-	2.40	-	-	54.00	-
4804.00	PK	-49.74	2.40	-47.34	47.92	74.00	-26.08
4804.00	AV note1	-	2.40	-	-	54.00	-

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	GFSK			Frequency	2441 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4068.33	PK	-54.19	2.40	-51.79	43.47	74.00	-30.53
4068.33	AV note1	-	2.40	-	-	54.00	-
4882.00	PK	-45.58	2.40	-43.18	52.08	74.00	-21.92
4882.00	AV note1	-	2.40	-	-	54.00	-

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	GFSK			Frequency	2480 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4133.33	PK	-55.98	2.40	-53.58	41.68	74.00	-32.32
4133.33	AV note1	-	2.40	-	-	54.00	-
4960.00	PK	-44.41	2.40	-42.01	53.25	74.00	-20.75
4960.00	AV note1	-	2.40	-	-	54.00	-


Note: If the PK margin greater than 20 dB, there is no need to get AVG reading.

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	8DPSK			Frequency	2402 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4003.33	PK	-55.45	2.40	-53.05	42.21	74.00	-31.79
4003.33	AV note1	-	2.40	-	-	54.00	-
4804.00	PK	-57.25	2.40	-54.85	40.41	74.00	-33.59
4804.00	AV note1	-	2.40	-	-	54.00	-



Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	8DPSK			Frequency	2441 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4068.33	PK	-56.12	2.40	-53.72	41.54	74.00	-32.46
4068.33	AV note1	-	2.40	-	-	54.00	-
4882.00	PK	-54.83	2.40	-52.43	42.83	74.00	-31.17
4882.00	AV note1	-	2.40	-	-	54.00	-

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	8DPSK			Frequency	2480 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4133.33	PK	-57.56	2.40	-55.16	40.10	74.00	-33.90
4133.33	AV note1	-	2.40	-	-	54.00	-
4960.00	PK	-55.01	2.40	-52.61	42.65	74.00	-31.35
4960.00	AV note1	-	2.40	-	-	54.00	-



Note: If the PK margin greater than 20 dB, there is no need to get AVG reading.:

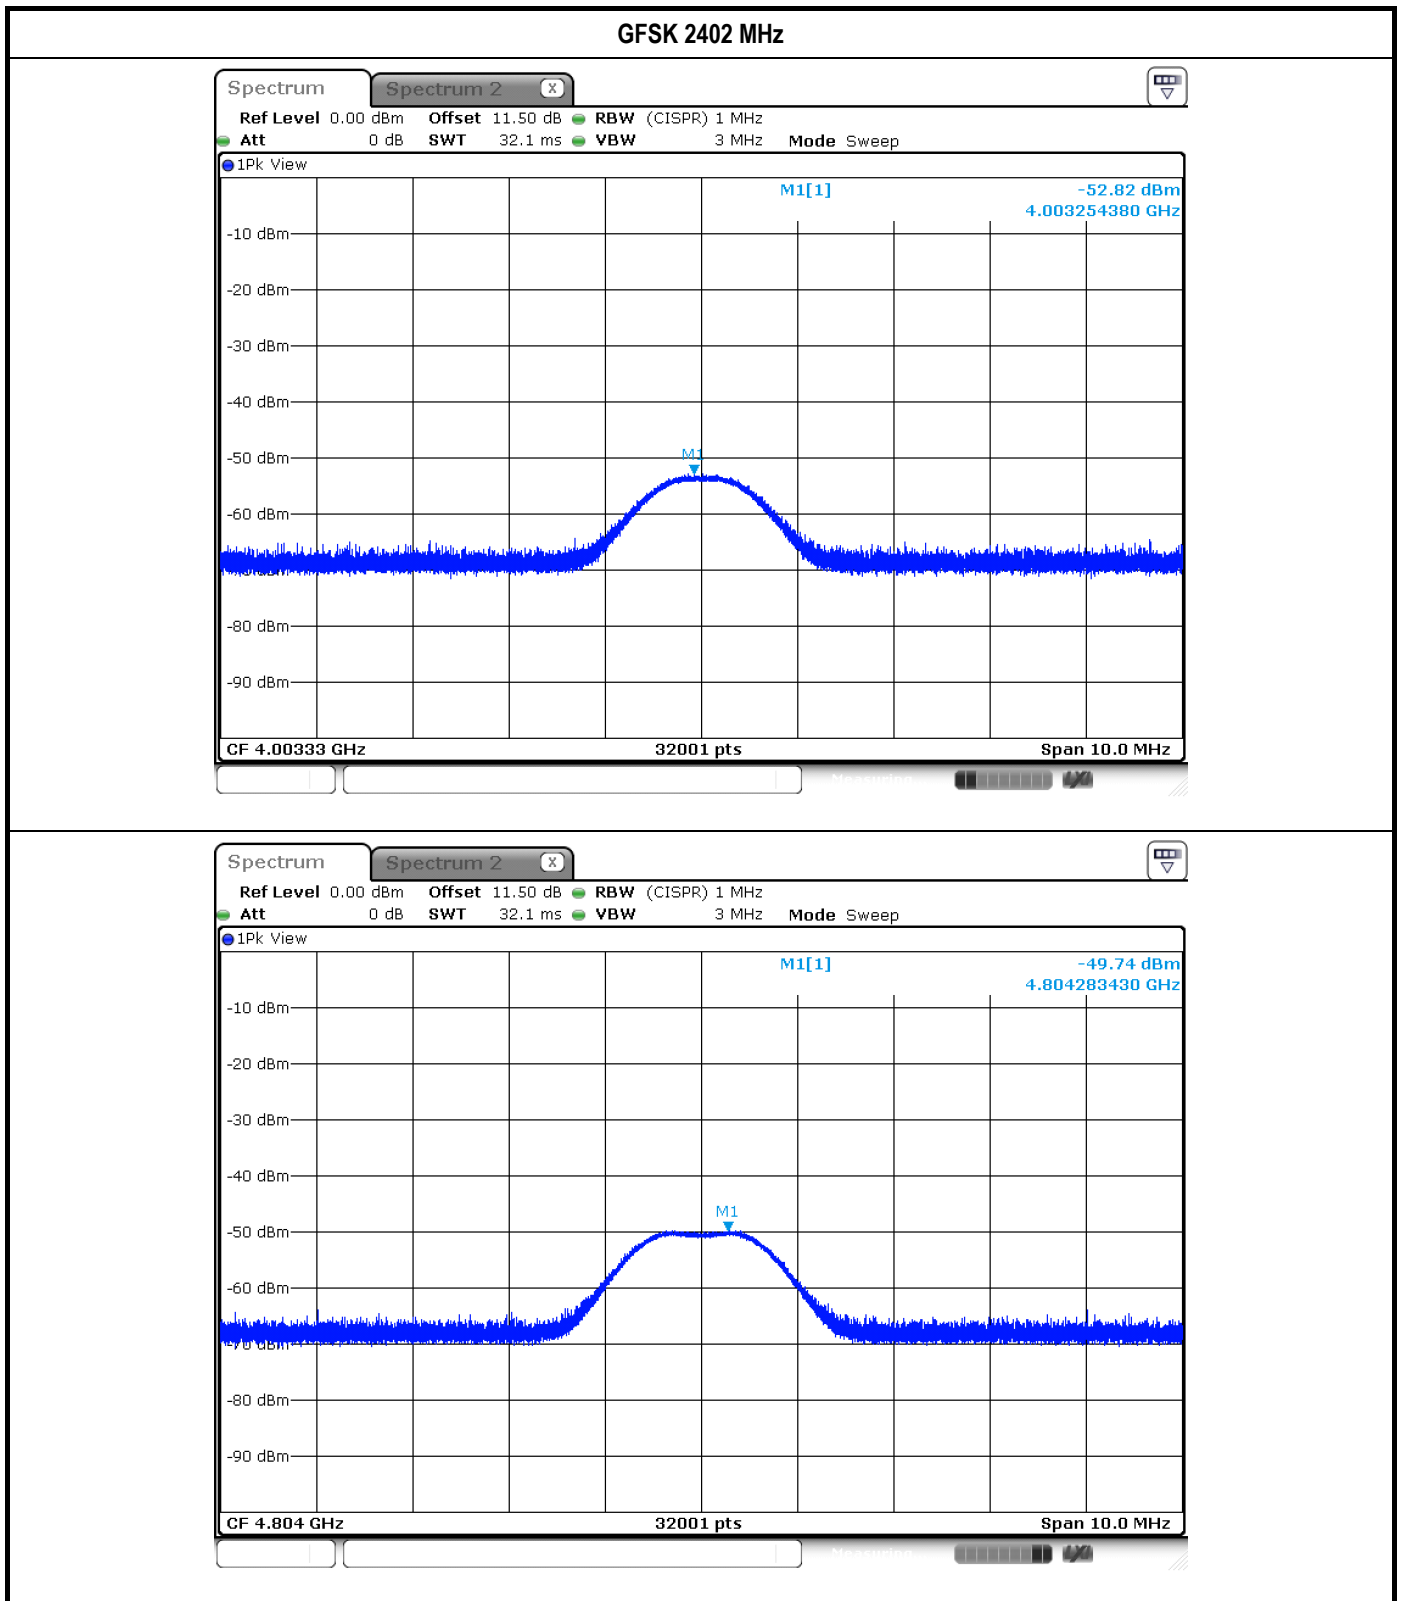



GFSK 2441 MHz

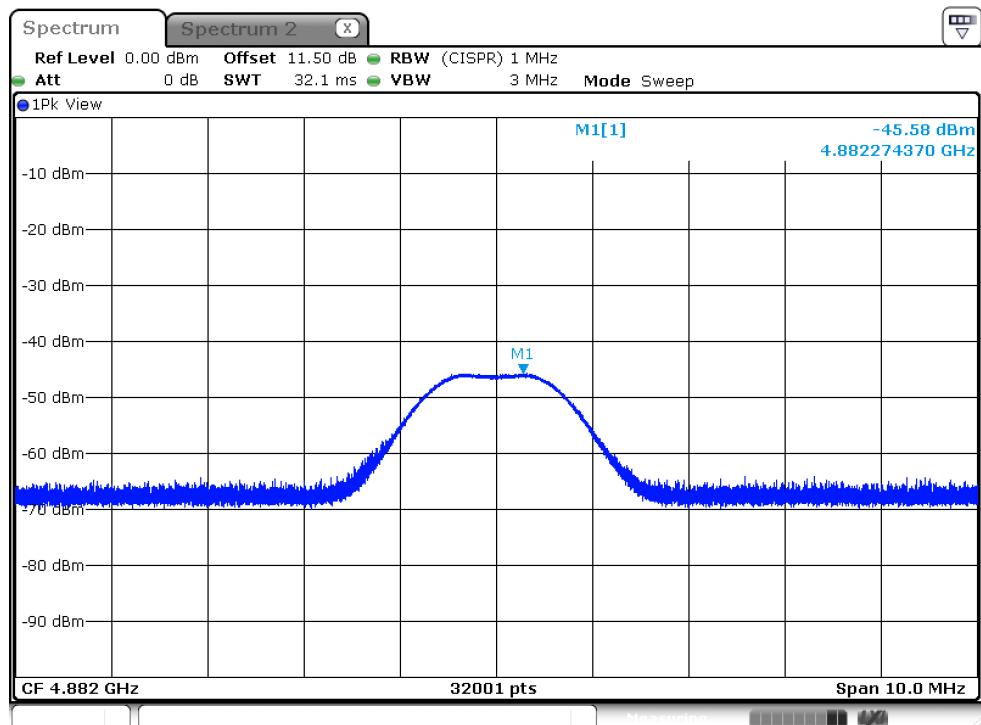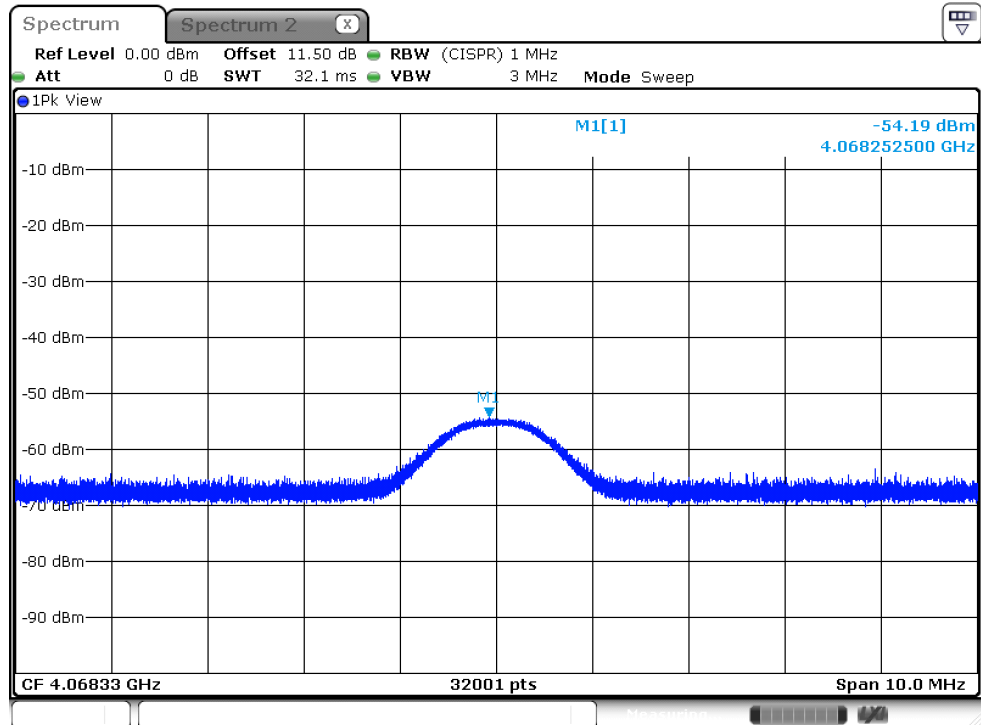



GFSK 2480 MHz

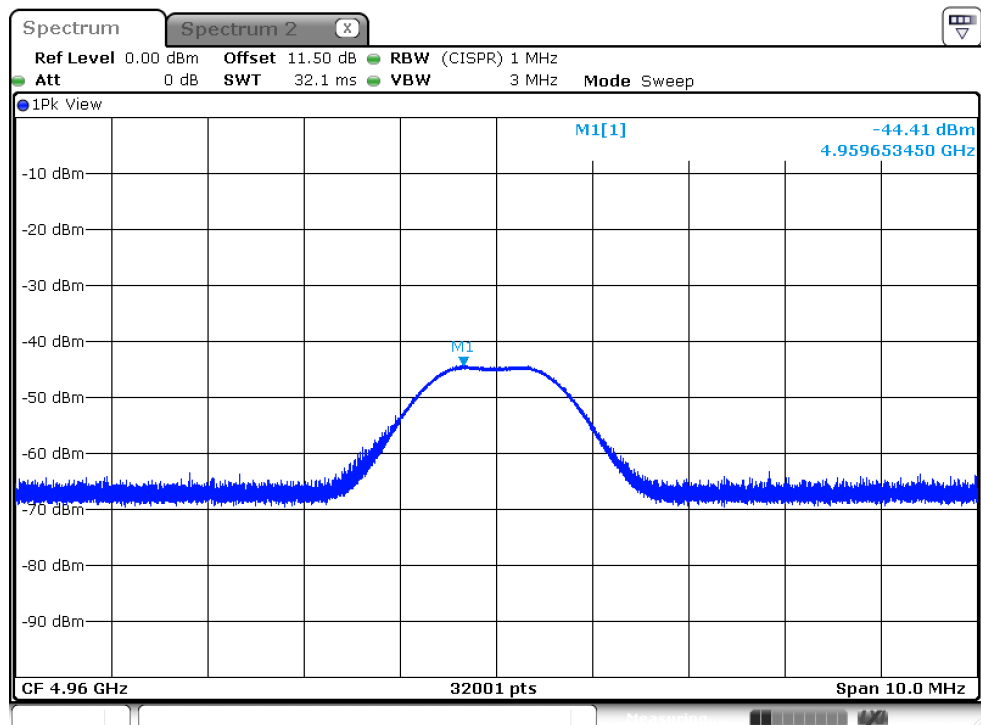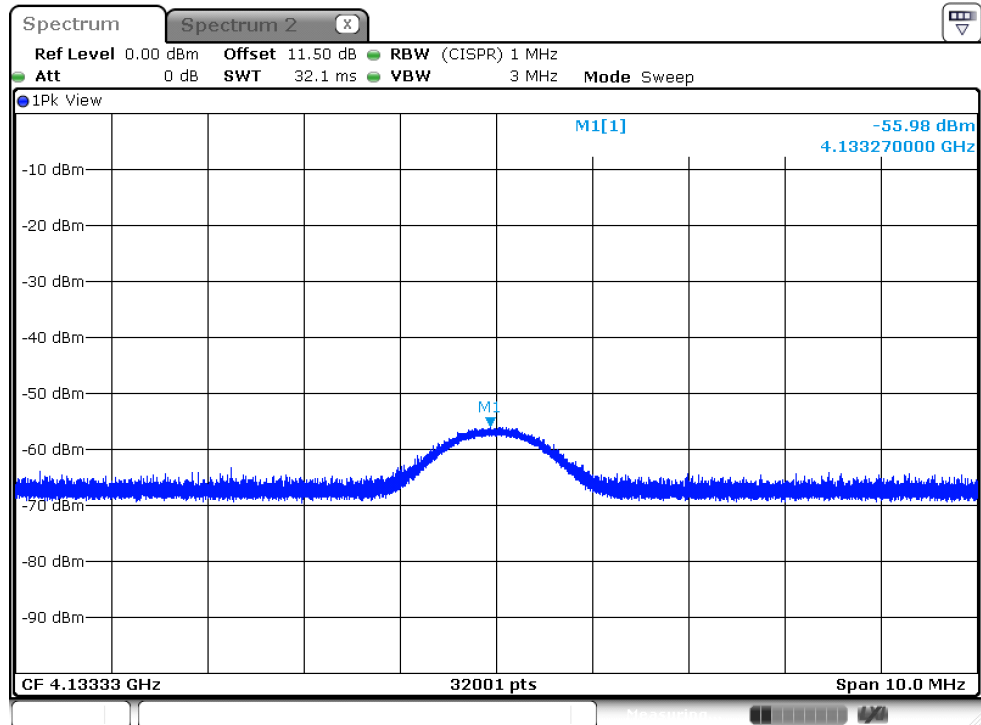



8DPSK 2402 MHz

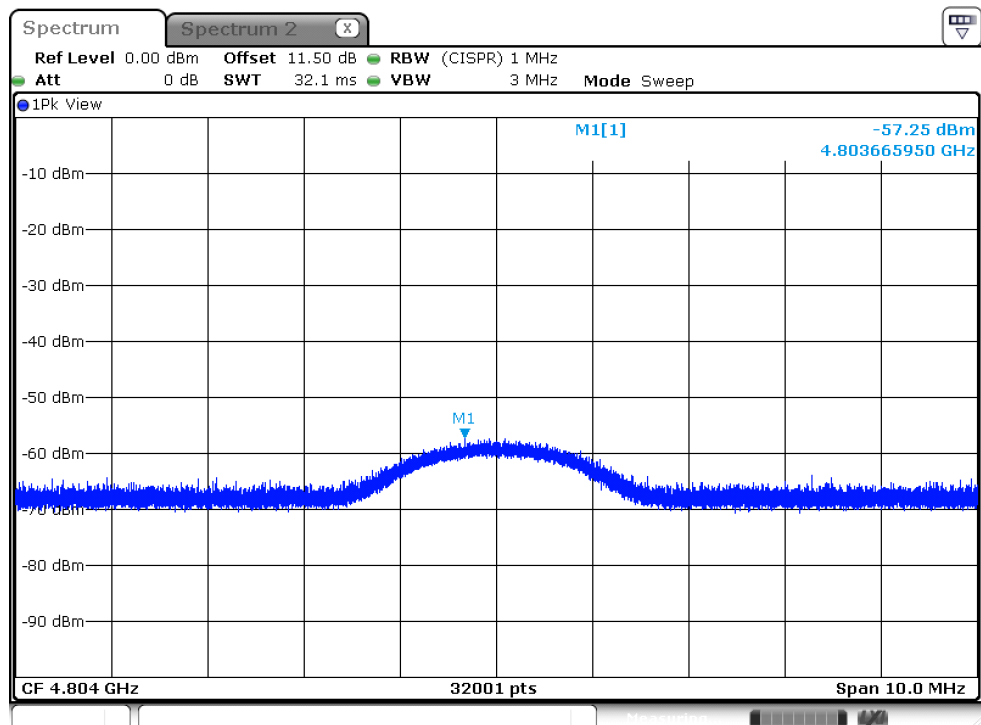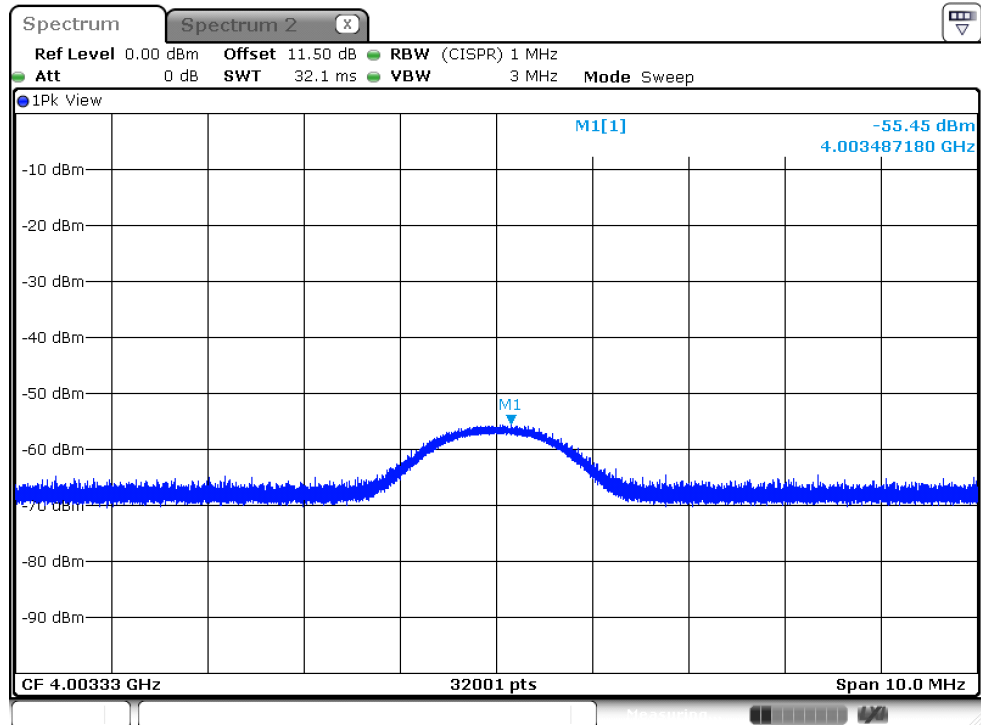

8DPSK 2441 MHz

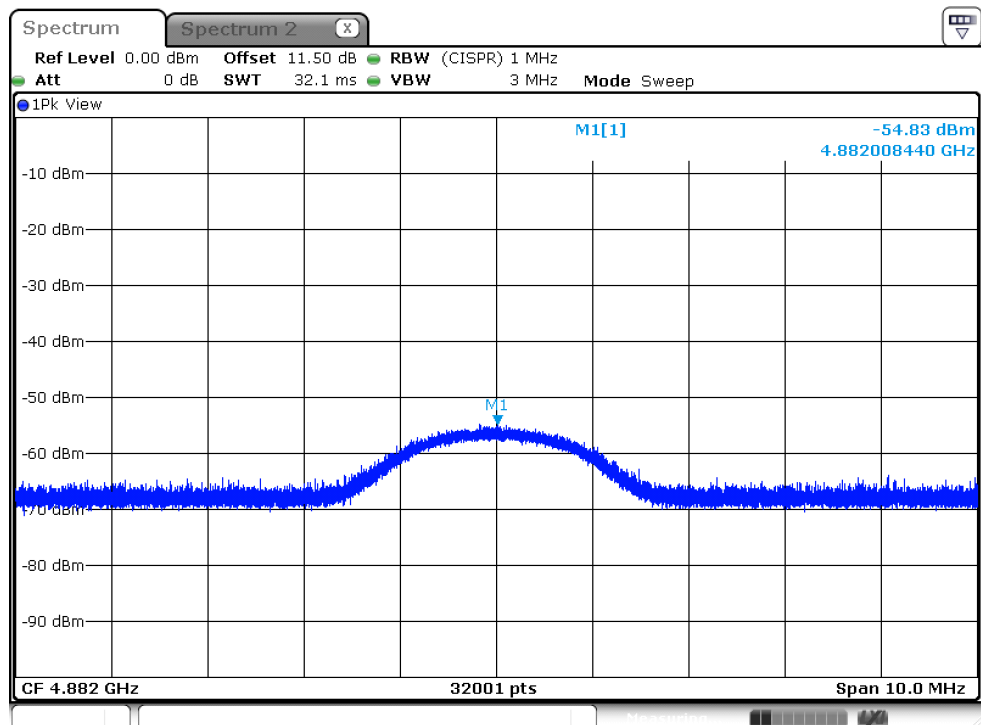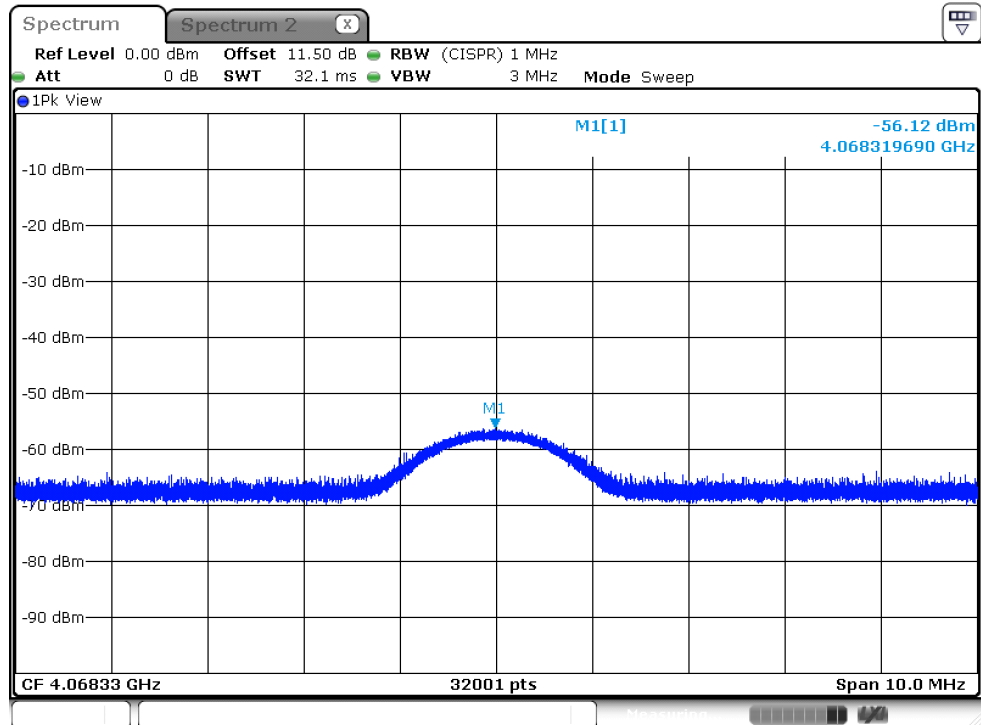



8DPSK 2480 MHz

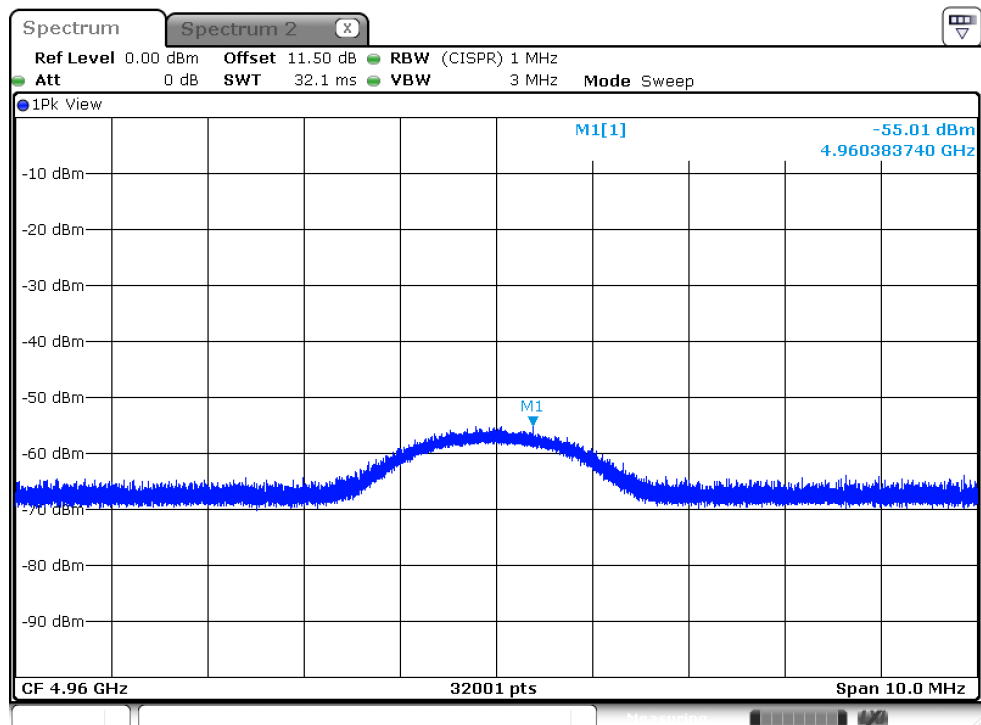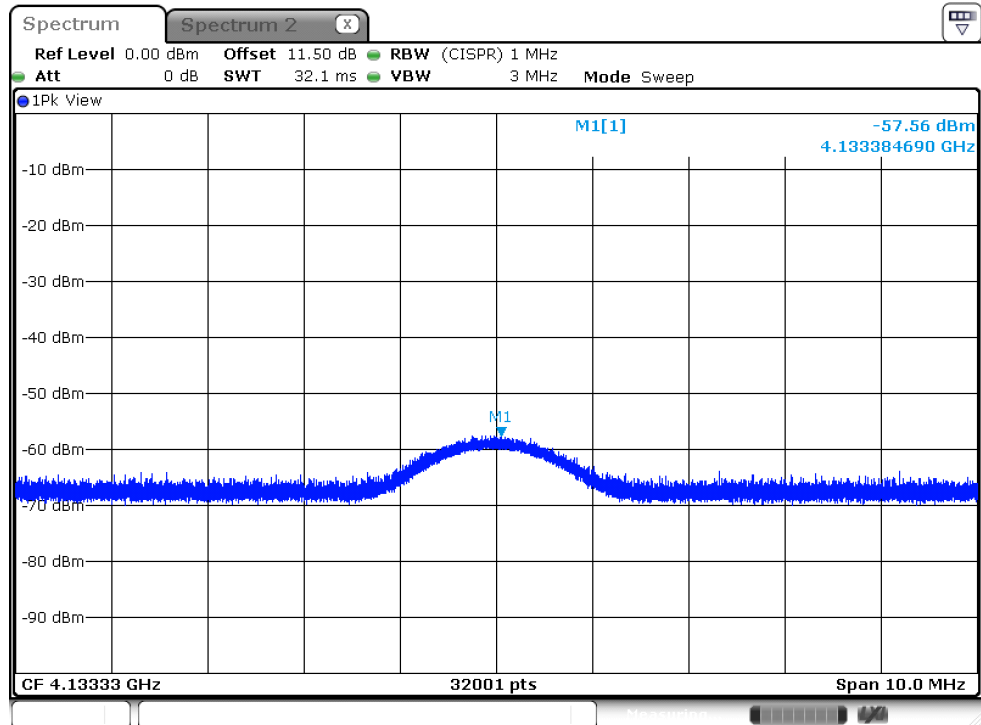



Restrict bands above 1G								
Transmitter Conducted Unwanted Emissions Results in Band Edge								
Modulation Mode	GFSK							
Test ch. Freq. (MHz)	Remark	Range (MHz)	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
2402	PK	2310~2390	-46.72	2.40	-44.32	50.94	74.00	-23.06
	AV	2310~2390	-59.88	2.40	-57.48	37.78	54.00	-16.22
	PK	2483.5~2500	-46.57	2.40	-44.17	51.09	74.00	-22.91
	AV	2483.5~2500	-60.09	2.40	-57.69	37.57	54.00	-16.43
2441	PK	2310~2390	-46.57	2.40	-44.17	51.09	74.00	-22.91
	AV	2310~2390	-60.01	2.40	-57.61	37.65	54.00	-16.35
	PK	2483.5~2500	-46.79	2.40	-44.39	50.87	74.00	-23.13
	AV	2483.5~2500	-59.92	2.40	-57.52	37.74	54.00	-16.26
2480	PK	2310~2390	-46.37	2.40	-43.97	51.29	74.00	-22.71
	AV	2310~2390	-58.44	2.40	-56.04	39.22	54.00	-14.78
	PK	2483.5~2500	-45.72	2.40	-43.32	51.94	74.00	-22.06
	AV	2483.5~2500	-57.38	2.40	-54.98	40.28	54.00	-13.72

Restrict bands above 1G								
Transmitter Conducted Unwanted Emissions Results in Band Edge								
Modulation Mode	8DPSK							
Test ch. Freq. (MHz)	Remark	Range (MHz)	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
2402	PK	2310~2390	-46.86	2.40	-44.46	50.80	74.00	-23.20
	AV	2310~2390	-60.50	2.40	-58.10	37.16	54.00	-16.84
	PK	2483.5~2500	-46.49	2.40	-44.09	51.17	74.00	-22.83
	AV	2483.5~2500	-60.09	2.40	-57.69	37.57	54.00	-16.43
2441	PK	2310~2390	-46.24	2.40	-43.84	51.42	74.00	-22.58
	AV	2310~2390	-60.05	2.40	-57.65	37.61	54.00	-16.39
	PK	2483.5~2500	-47.65	2.40	-45.25	50.01	74.00	-23.99
	AV	2483.5~2500	-60.19	2.40	-57.79	37.47	54.00	-16.53
2480	PK	2310~2390	-46.85	2.40	-44.45	50.81	74.00	-23.19
	AV	2310~2390	-59.65	2.40	-57.25	38.01	54.00	-15.99
	PK	2483.5~2500	-46.73	2.40	-44.33	50.93	74.00	-23.07
	AV	2483.5~2500	-59.84	2.40	-57.44	37.82	54.00	-16.18



GFSK 2402 MHz

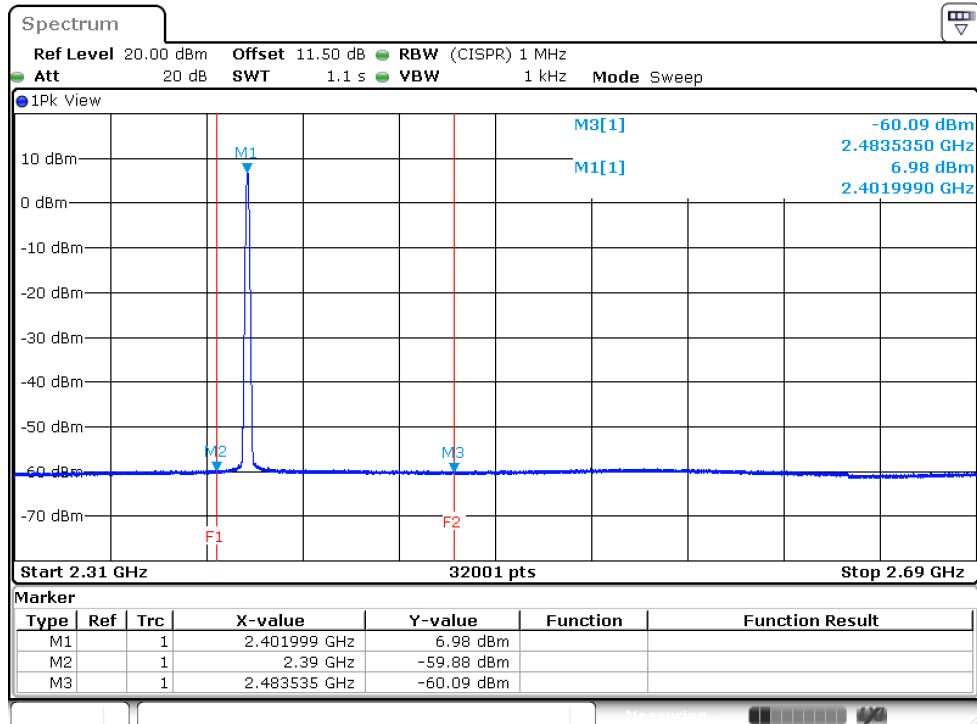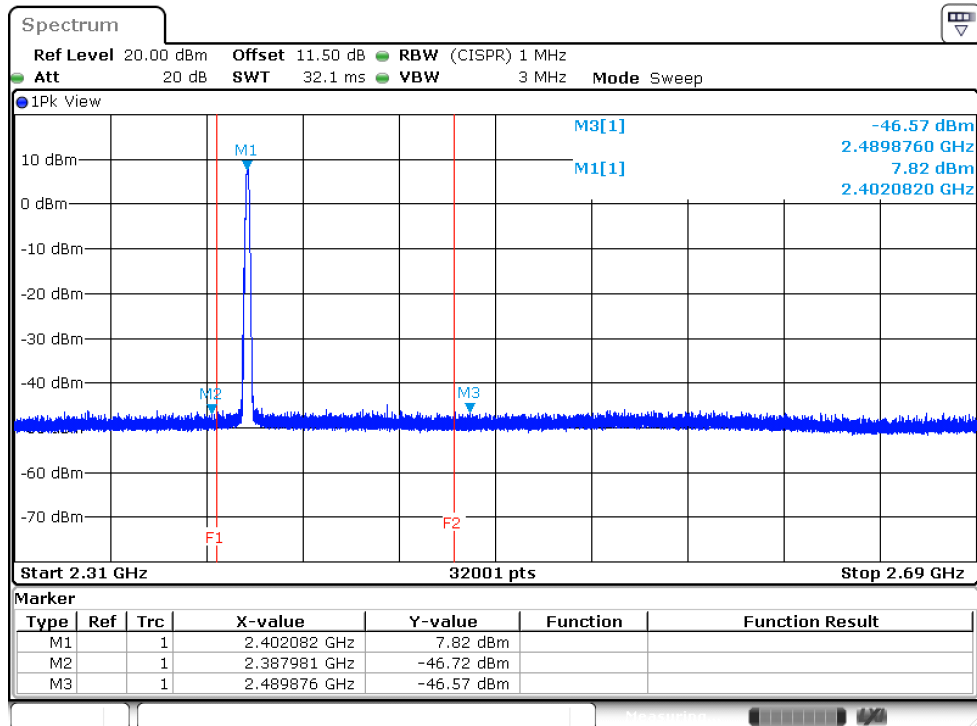



GFSK 2441 MHz

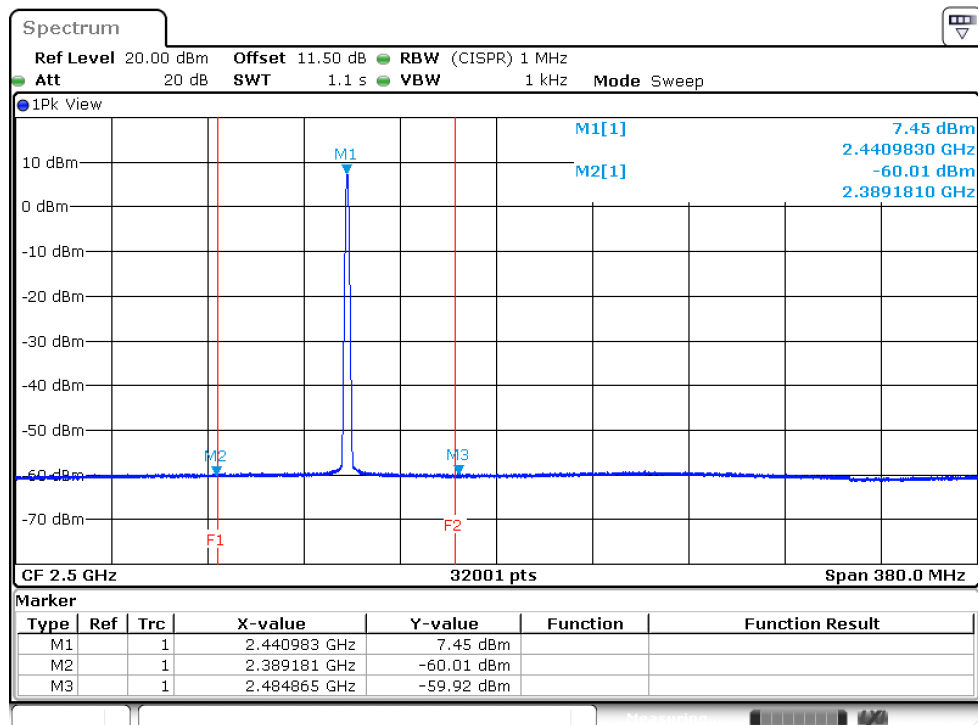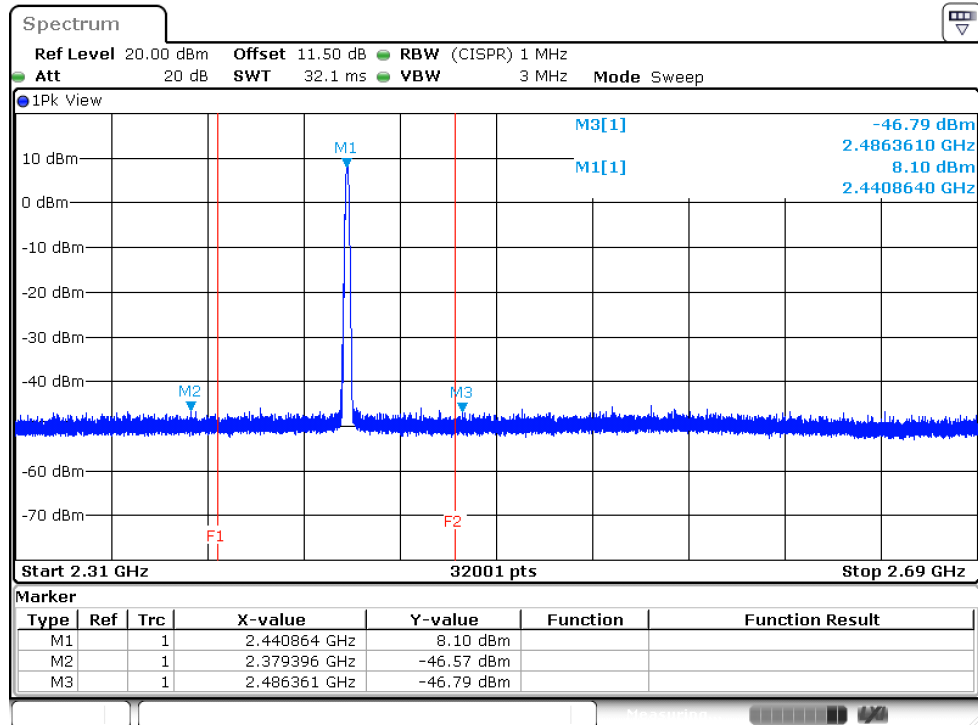



GFSK 2480 MHz

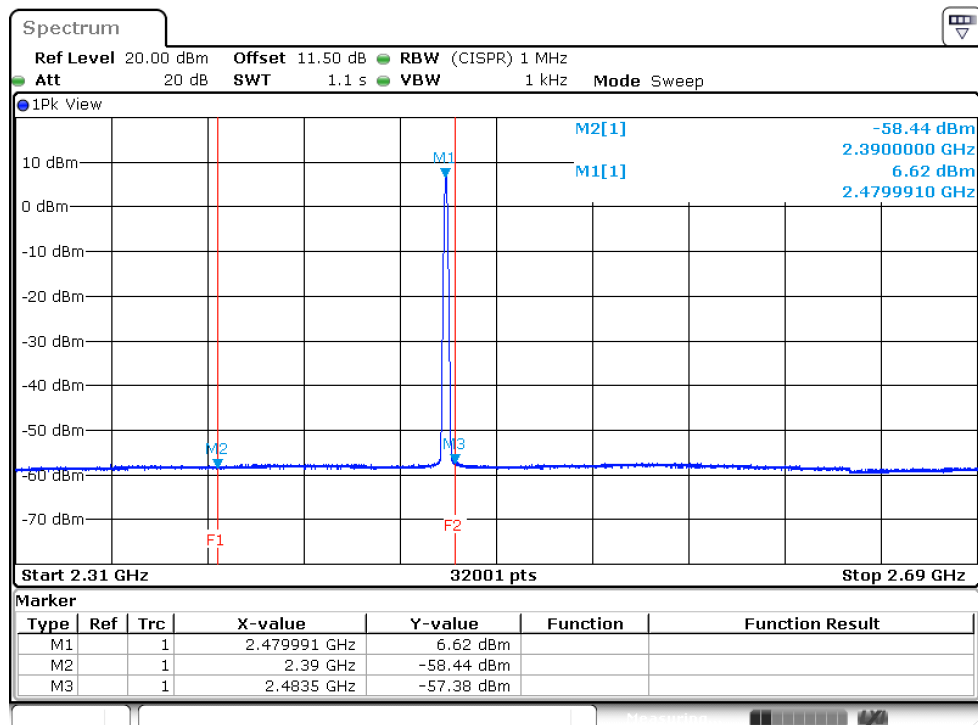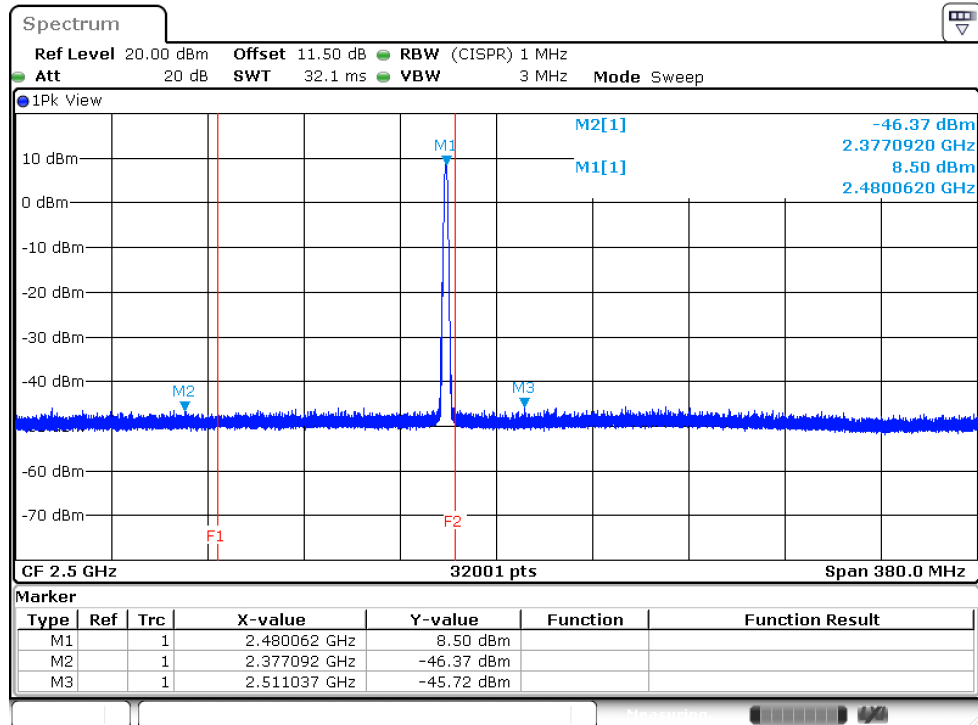



8DPSK 2402 MHz

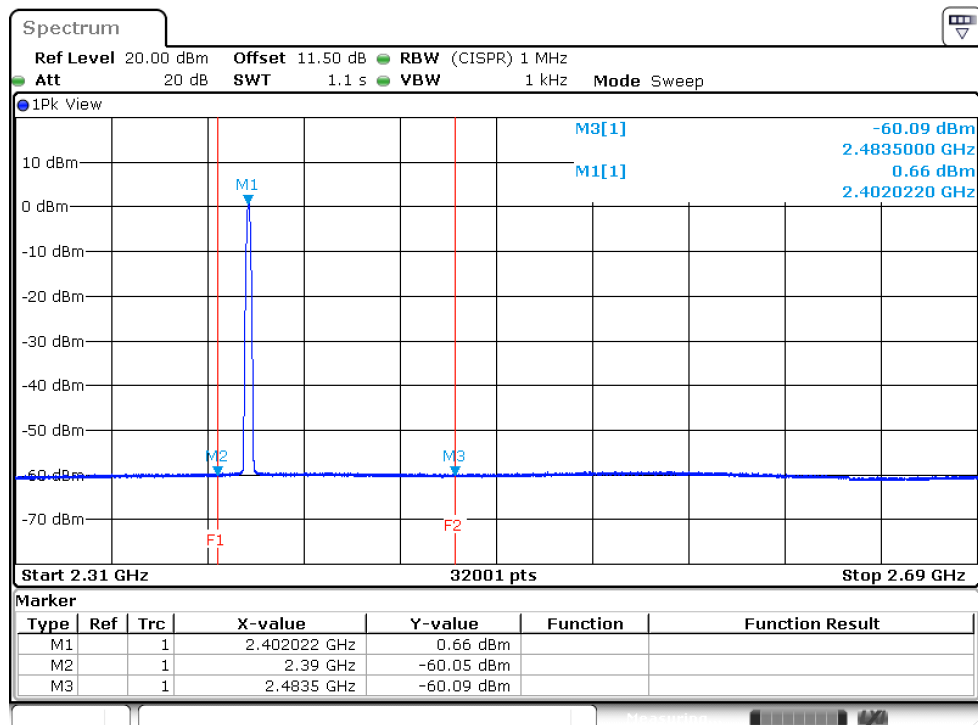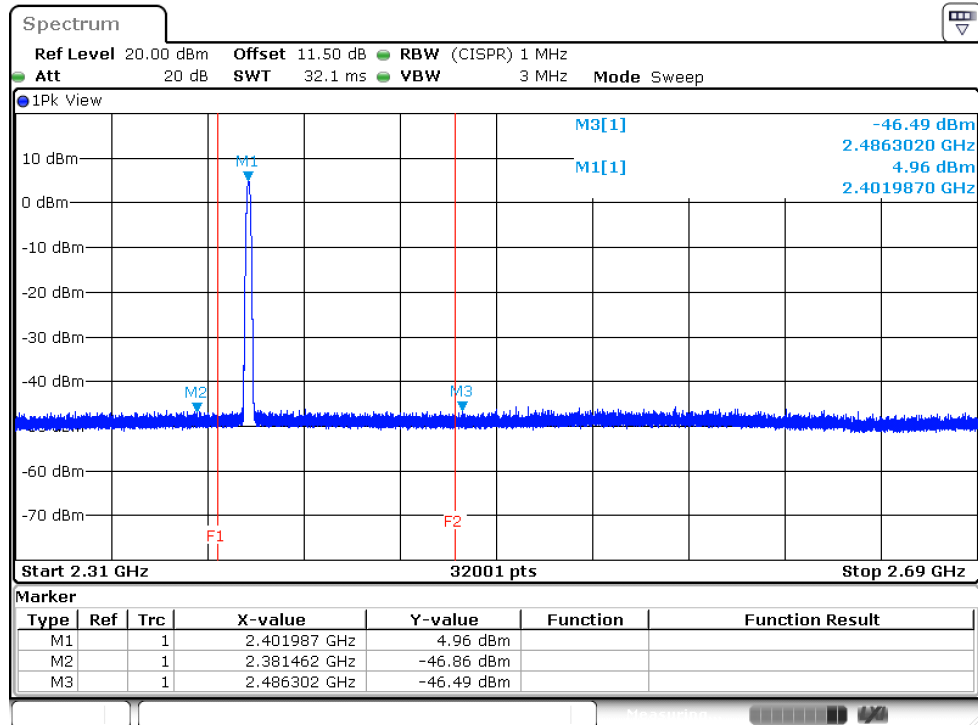



8DPSK 2441 MHz

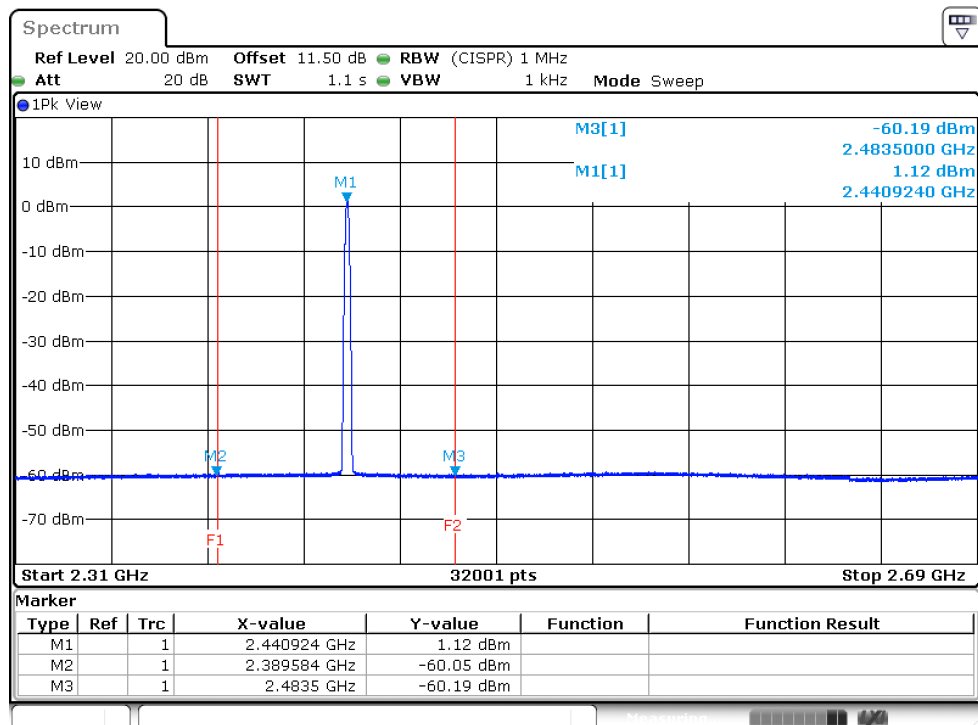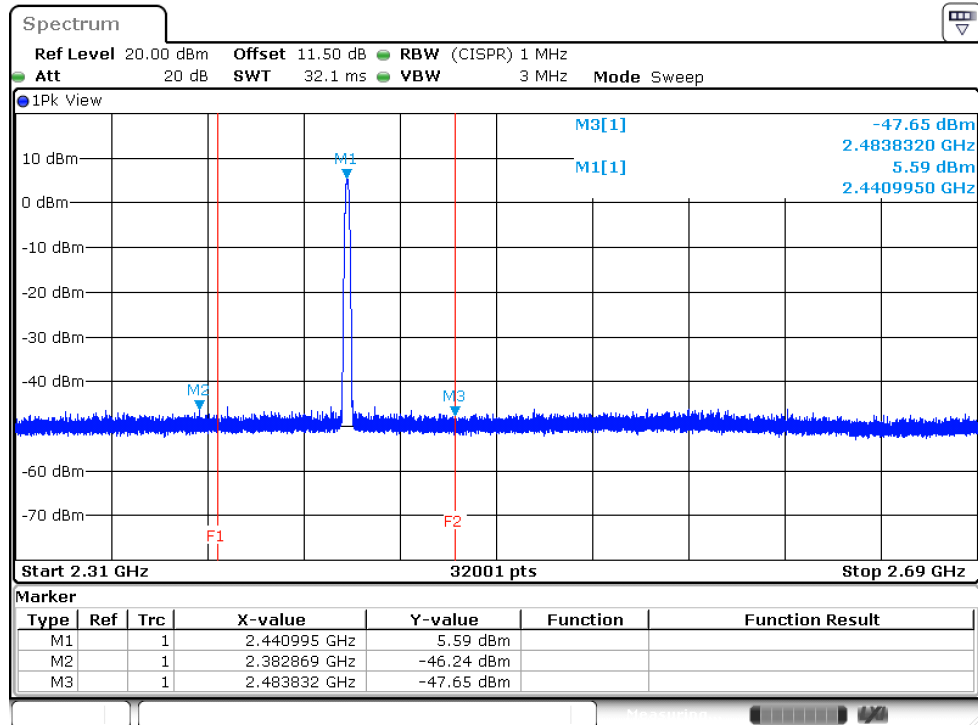



8DPSK 2480 MHz

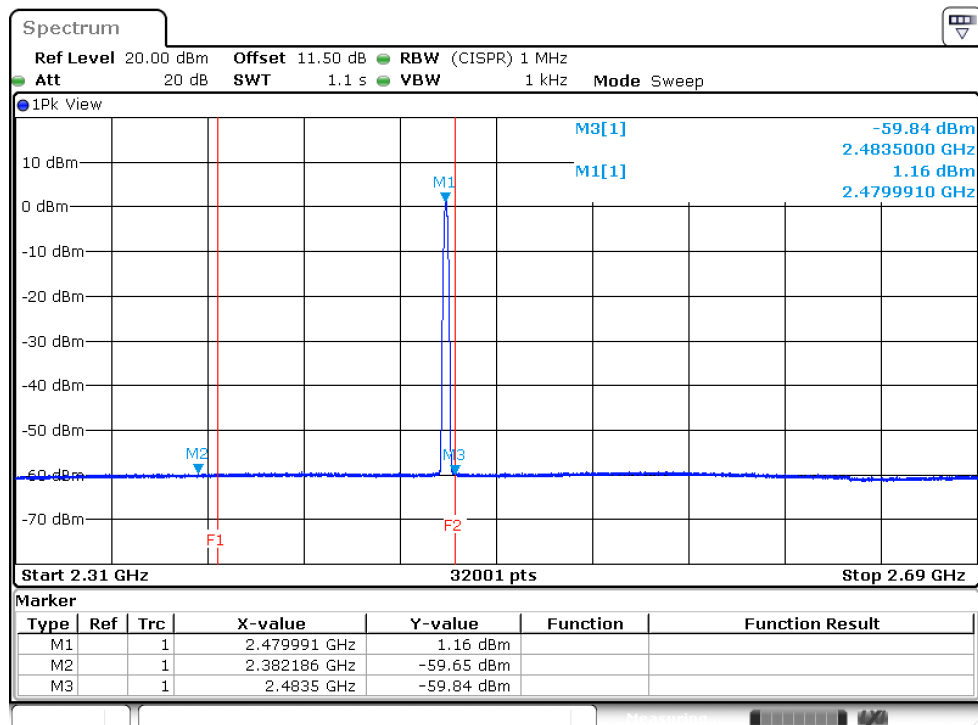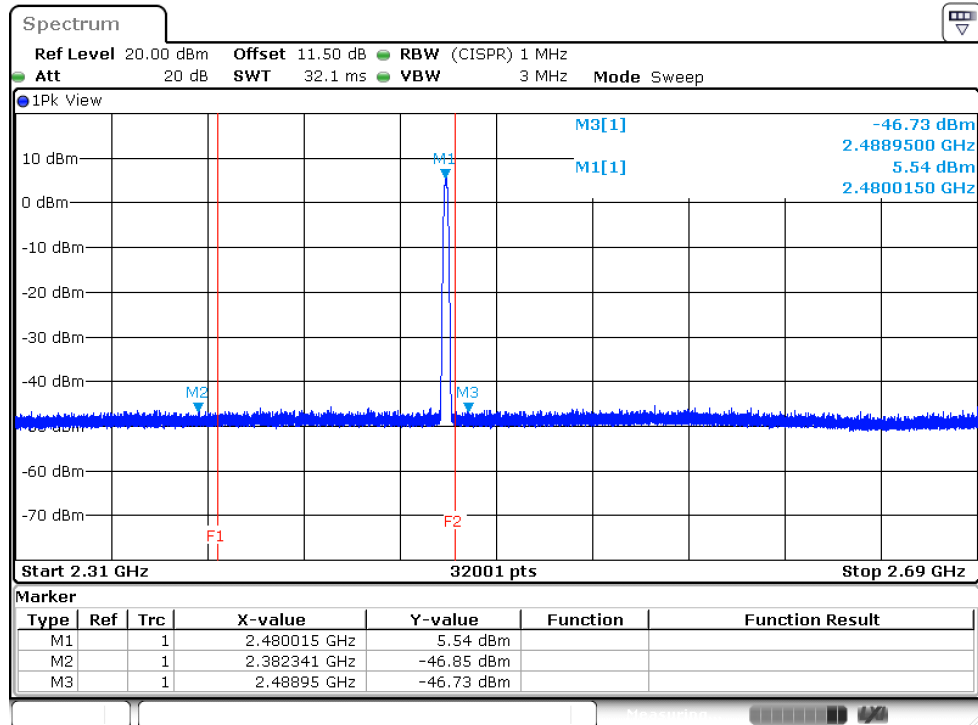



GFSK 2402 MHz

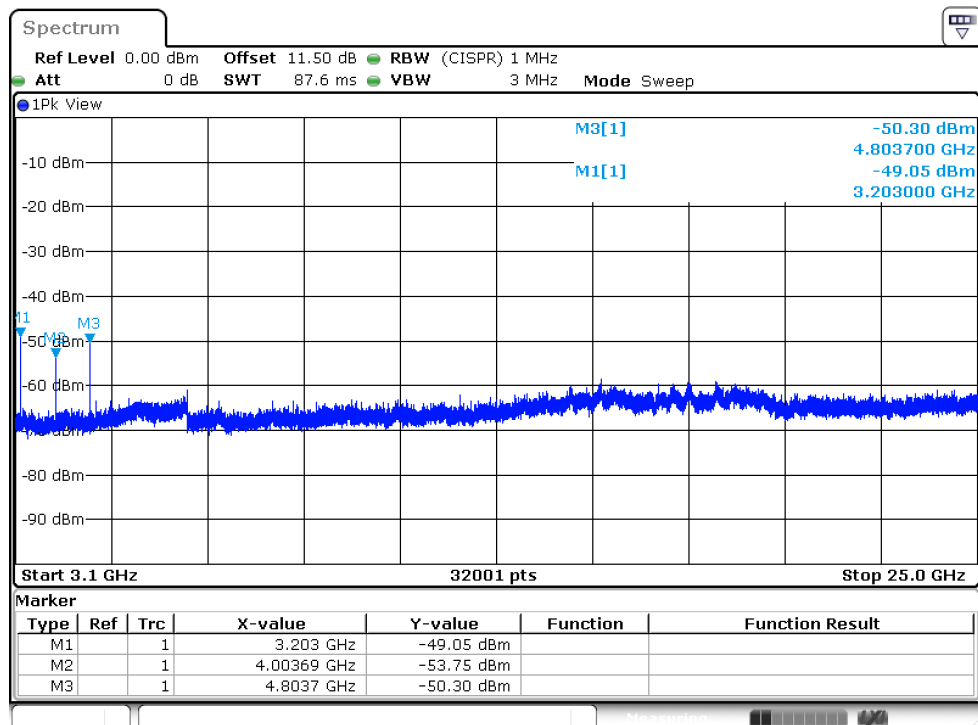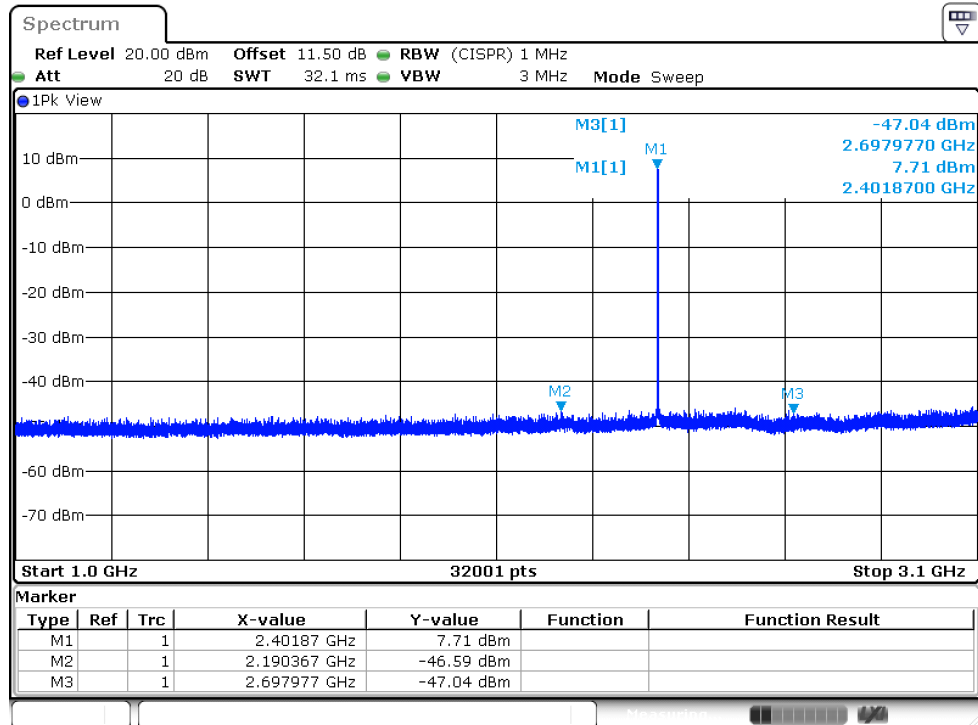



GFSK 2441 MHz

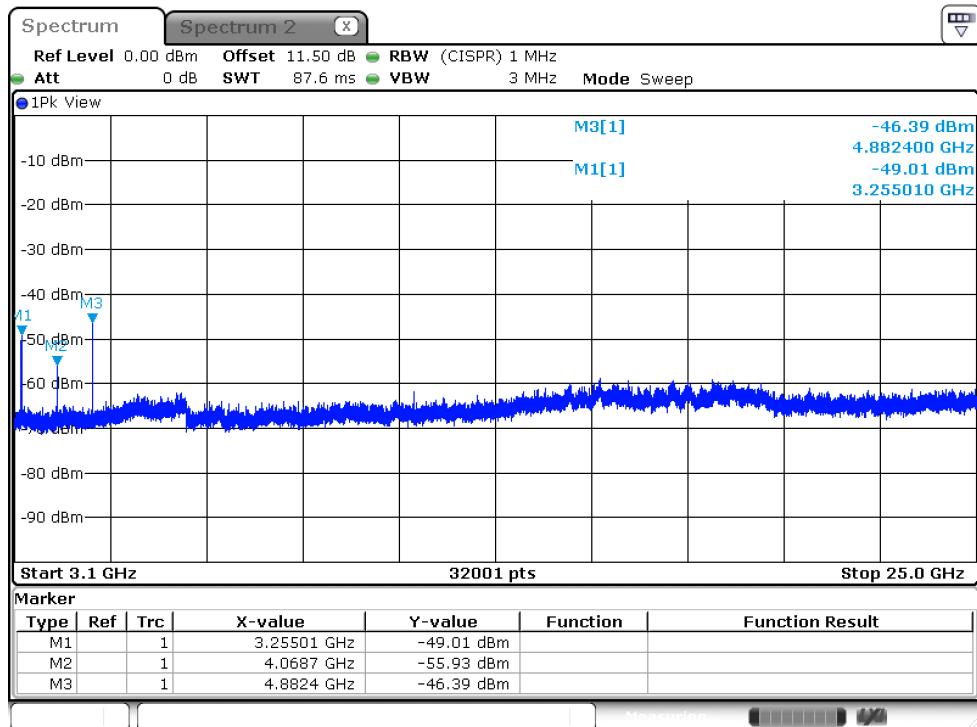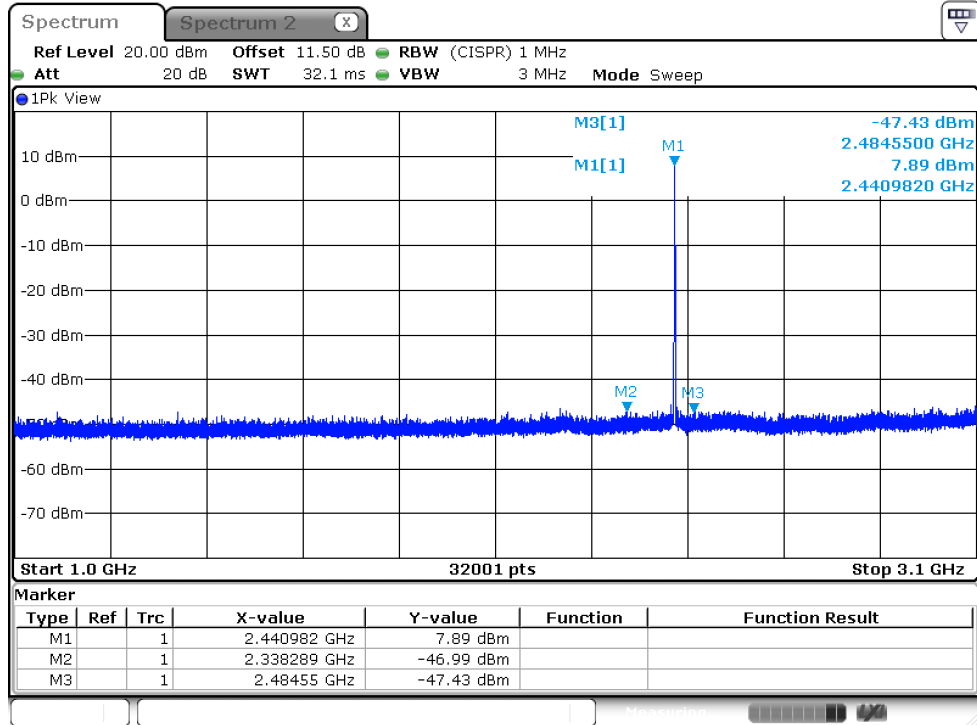



GFSK 2480 MHz

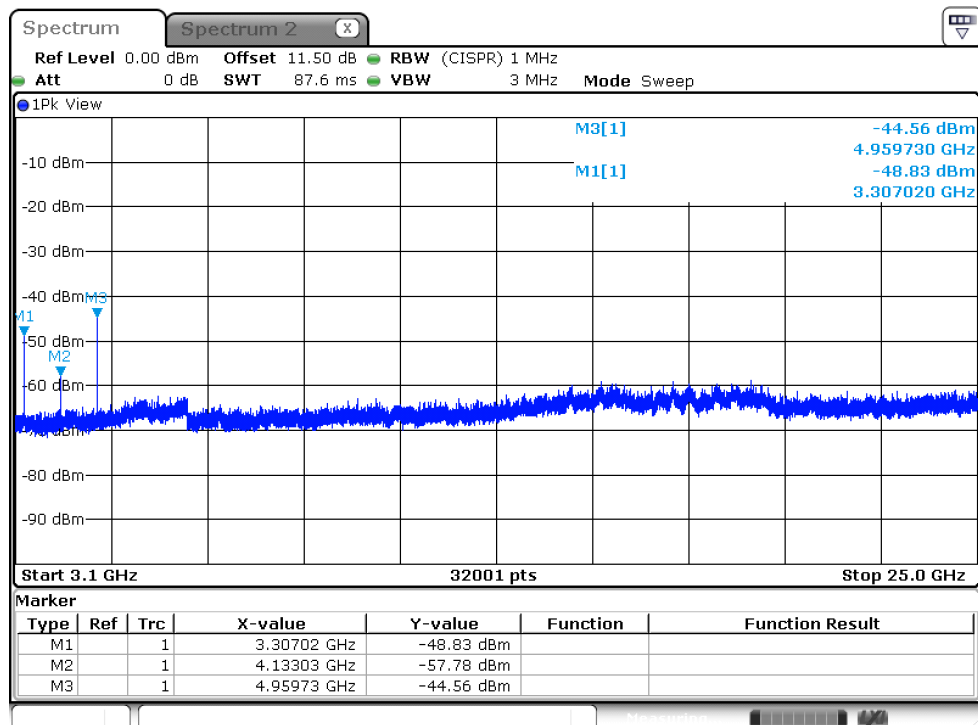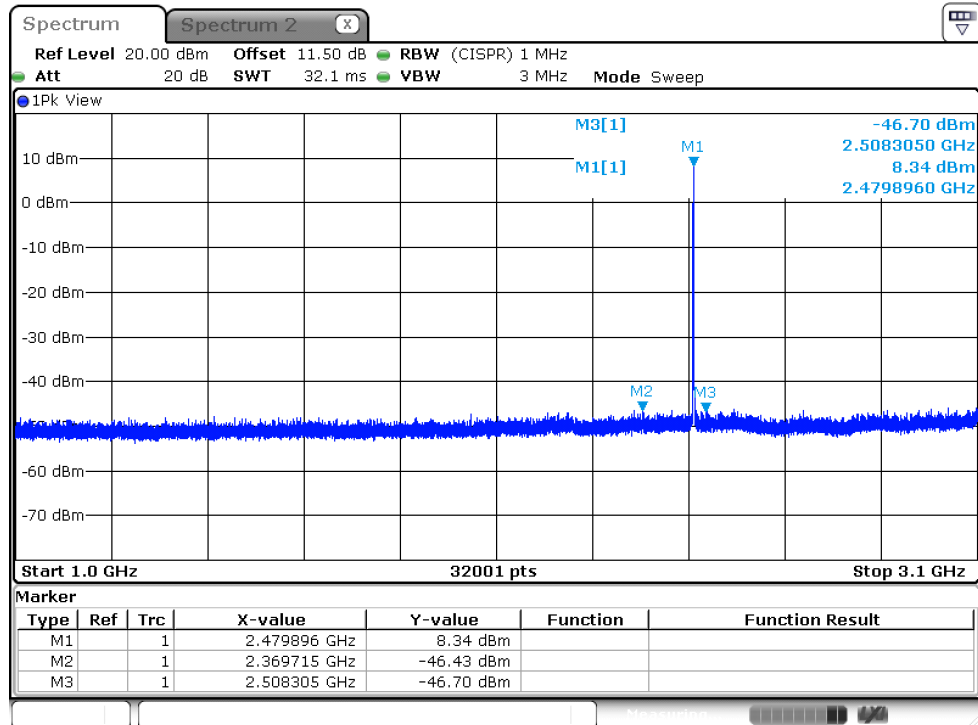



8DPSK 2402 MHz

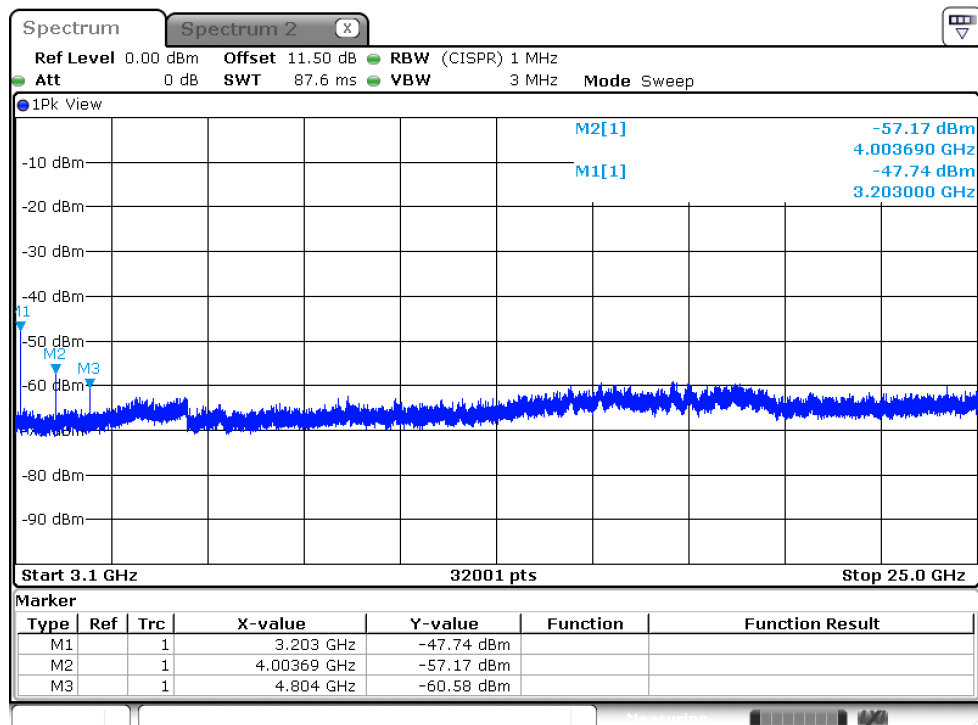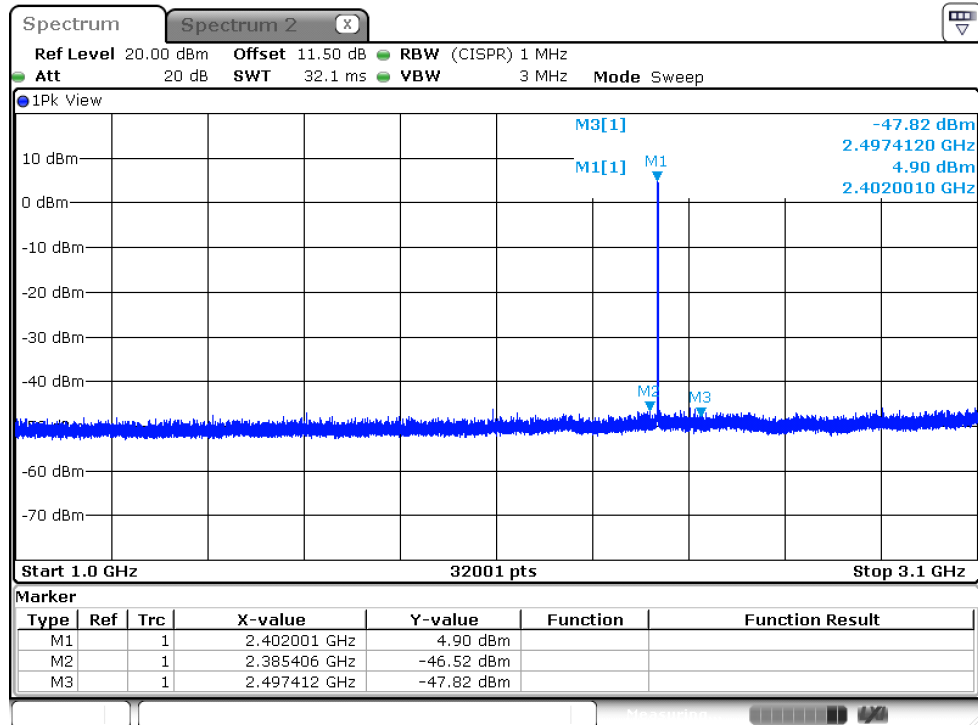

8DPSK 2441 MHz

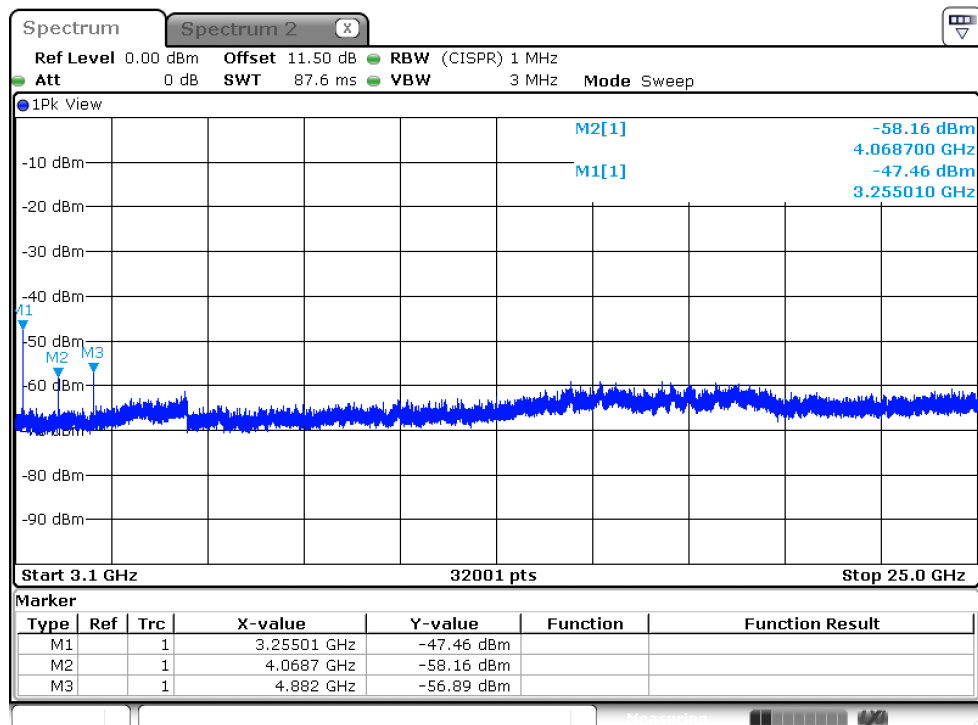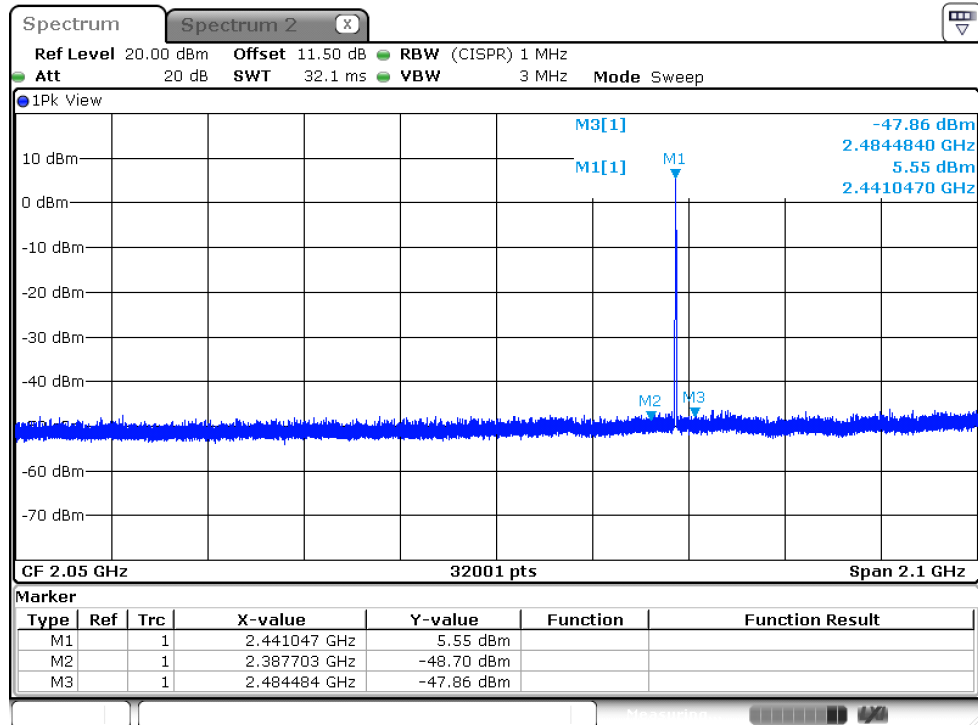


8DPSK 2480 MHz

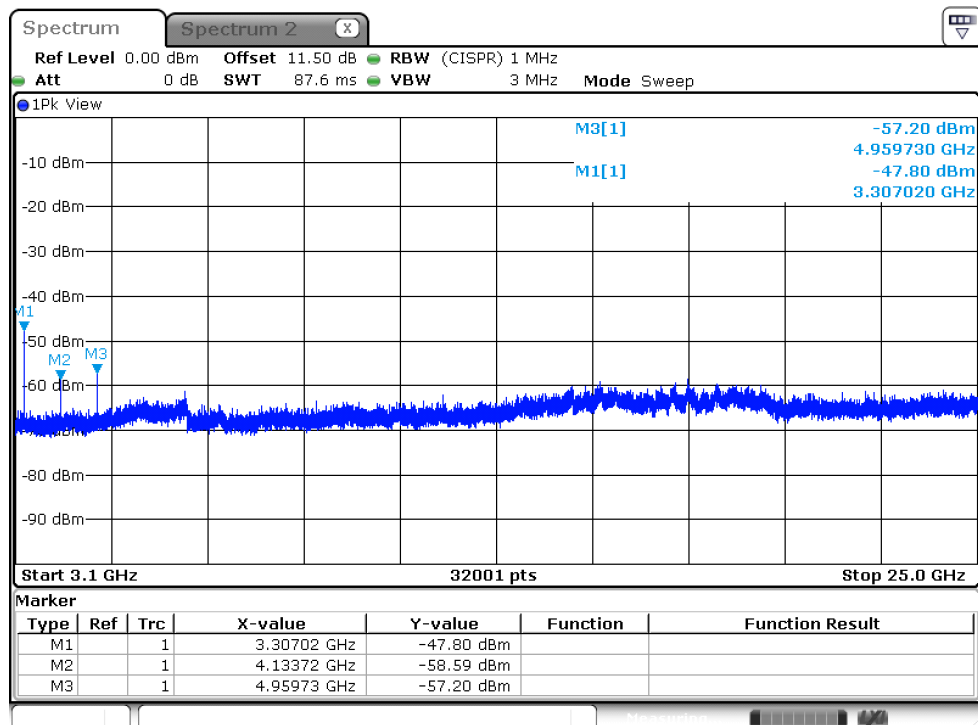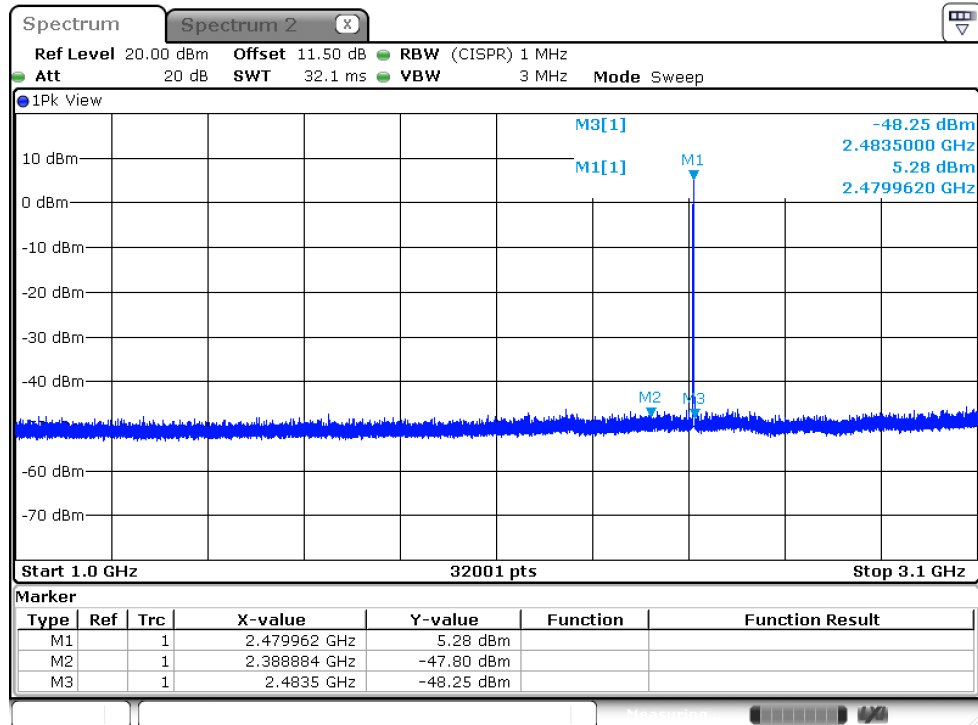

Restrict bands below 1G							
Transmitter Conducted Unwanted Emissions Results							
Modulation Mode	GFSK			Frequency	2480MHz		
Range (MHz)	Max Value (dBm)	DG (dBi)	GRF (dB)	EIRP (dBm)	E-Field (dBuV/m)	Min E-Field Limit (dBuV/m)	E-Field Margin (dB)
30~1000MHz	-76.59	2.40	4.70	-69.49	25.77	40.00	-14.23

DG=directional gain

GRF=ground reflection factor

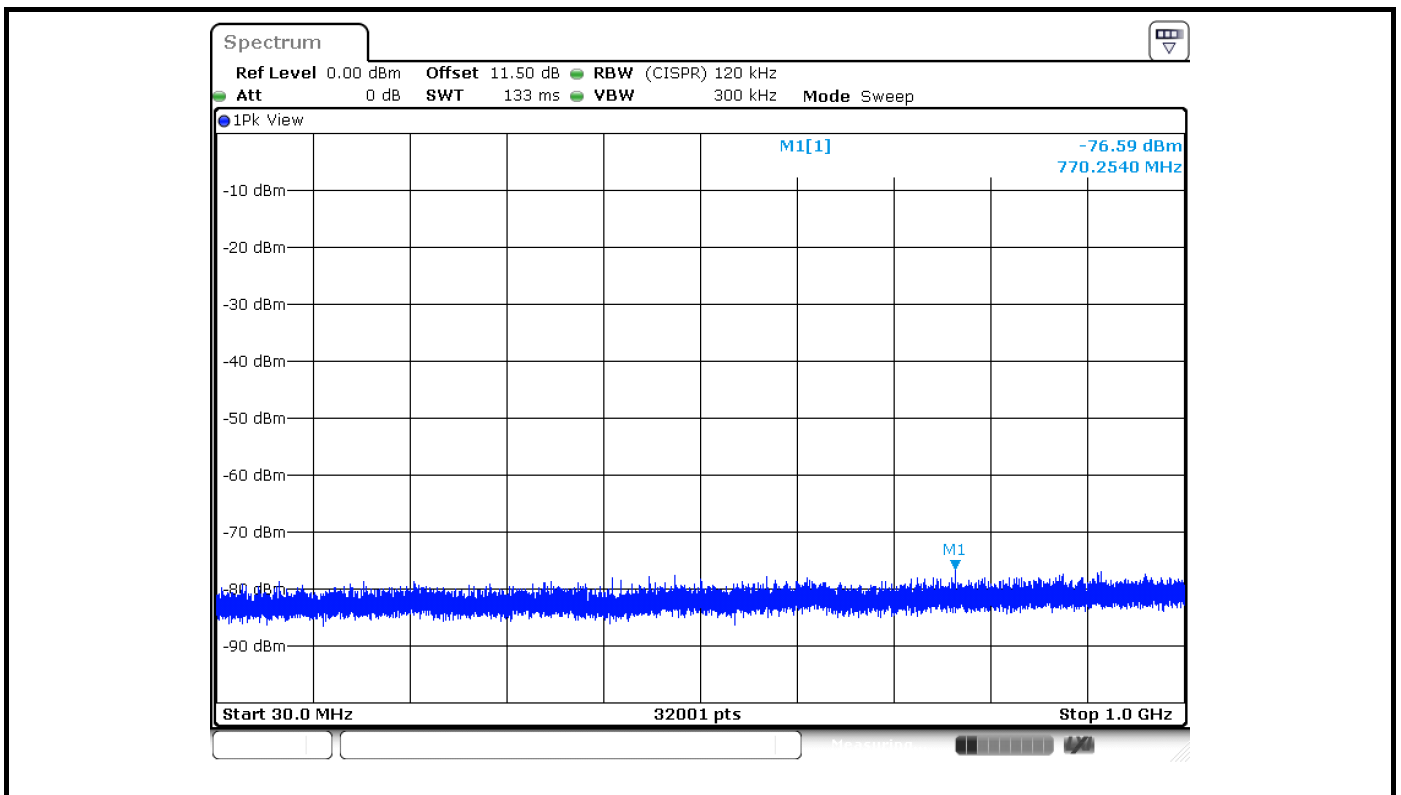

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	GFSK			Frequency	2402 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4003.33	PK	-52.82	2.40	-50.42	44.84	74.00	-29.16
4003.33	AV note1	-	2.40	-	-	54.00	-
4804.00	PK	-49.74	2.40	-47.34	47.92	74.00	-26.08
4804.00	AV note1	-	2.40	-	-	54.00	-

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	GFSK			Frequency	2441 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4068.33	PK	-54.19	2.40	-51.79	43.47	74.00	-30.53
4068.33	AV note1	-	2.40	-	-	54.00	-
4882.00	PK	-45.58	2.40	-43.18	52.08	74.00	-21.92
4882.00	AV note1	-	2.40	-	-	54.00	-

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	GFSK			Frequency	2480 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4133.33	PK	-55.98	2.40	-53.58	41.68	74.00	-32.32
4133.33	AV note1	-	2.40	-	-	54.00	-
4960.00	PK	-44.41	2.40	-42.01	53.25	74.00	-20.75
4960.00	AV note1	-	2.40	-	-	54.00	-


Note: If the PK margin greater than 20 dB, there is no need to get AVG reading.


Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	8DPSK			Frequency	2402 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4003.33	PK	-55.45	2.40	-53.05	42.21	74.00	-31.79
4003.33	AV note1	-	2.40	-	-	54.00	-
4804.00	PK	-57.25	2.40	-54.85	40.41	74.00	-33.59
4804.00	AV note1	-	2.40	-	-	54.00	-


Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	8DPSK			Frequency	2441 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4068.33	PK	-56.12	2.40	-53.72	41.54	74.00	-32.46
4068.33	AV note1	-	2.40	-	-	54.00	-
4882.00	PK	-54.83	2.40	-52.43	42.83	74.00	-31.17
4882.00	AV note1	-	2.40	-	-	54.00	-


Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	8DPSK			Frequency	2480 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4133.33	PK	-57.56	2.40	-55.16	40.10	74.00	-33.90
4133.33	AV note1	-	2.40	-	-	54.00	-
4960.00	PK	-55.01	2.40	-52.61	42.65	74.00	-31.35
4960.00	AV note1	-	2.40	-	-	54.00	-


Note: If the PK margin greater than 20 dB, there is no need to get AVG reading.

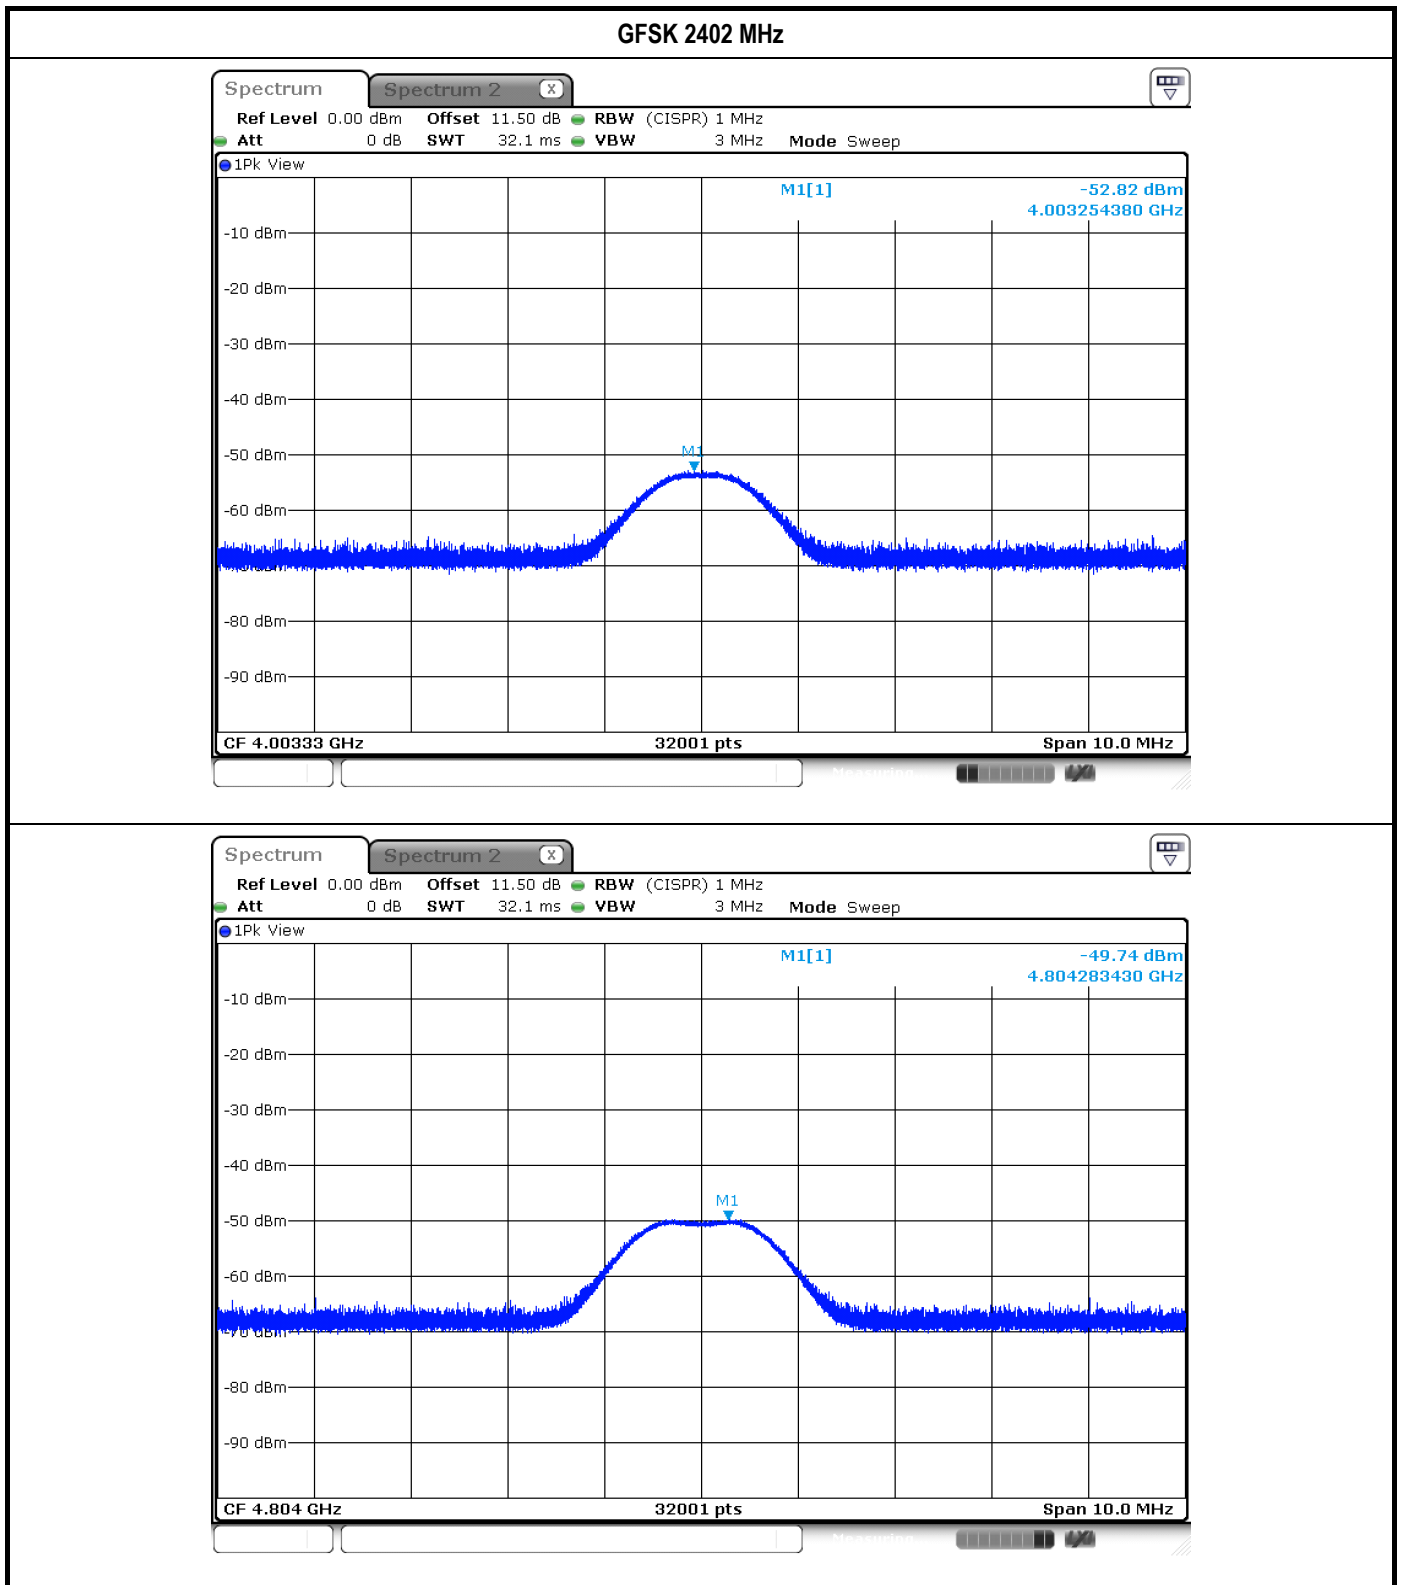


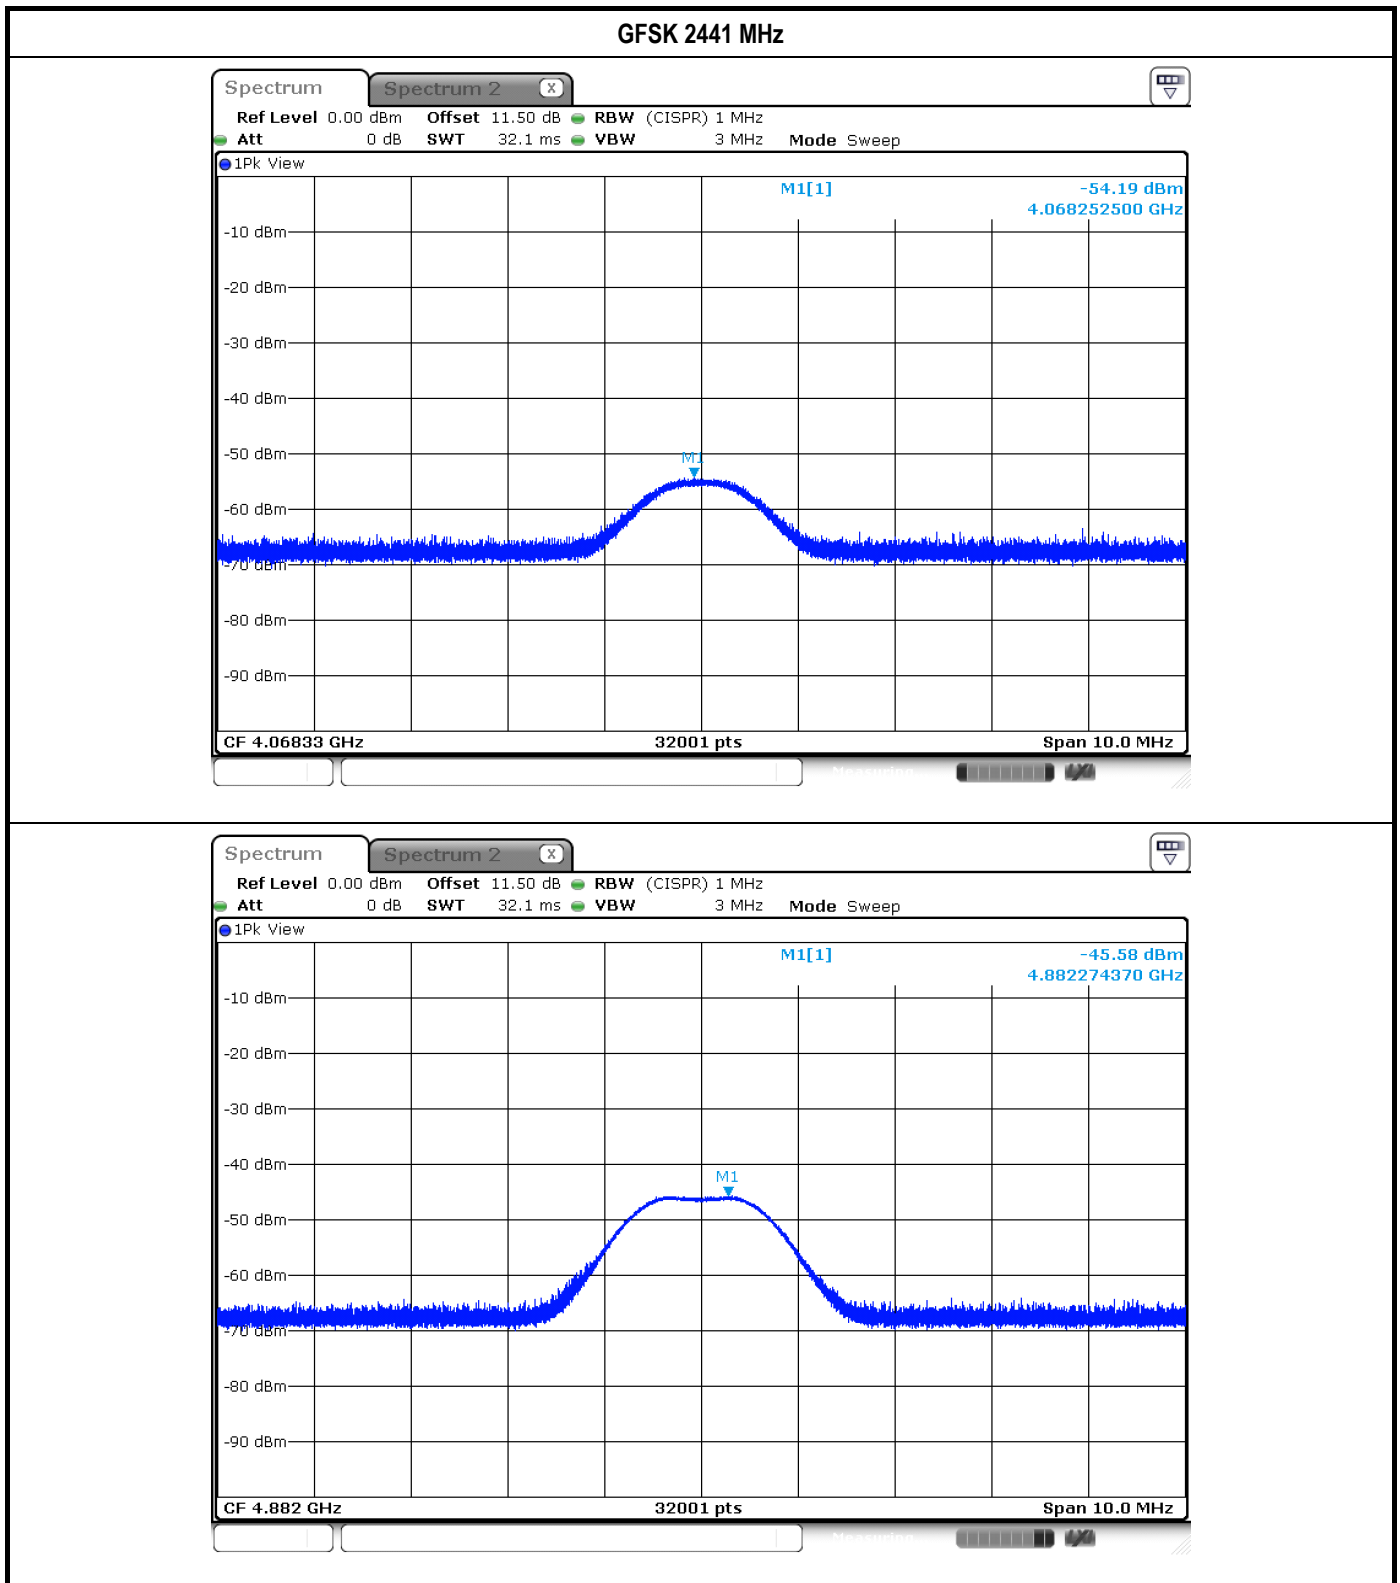


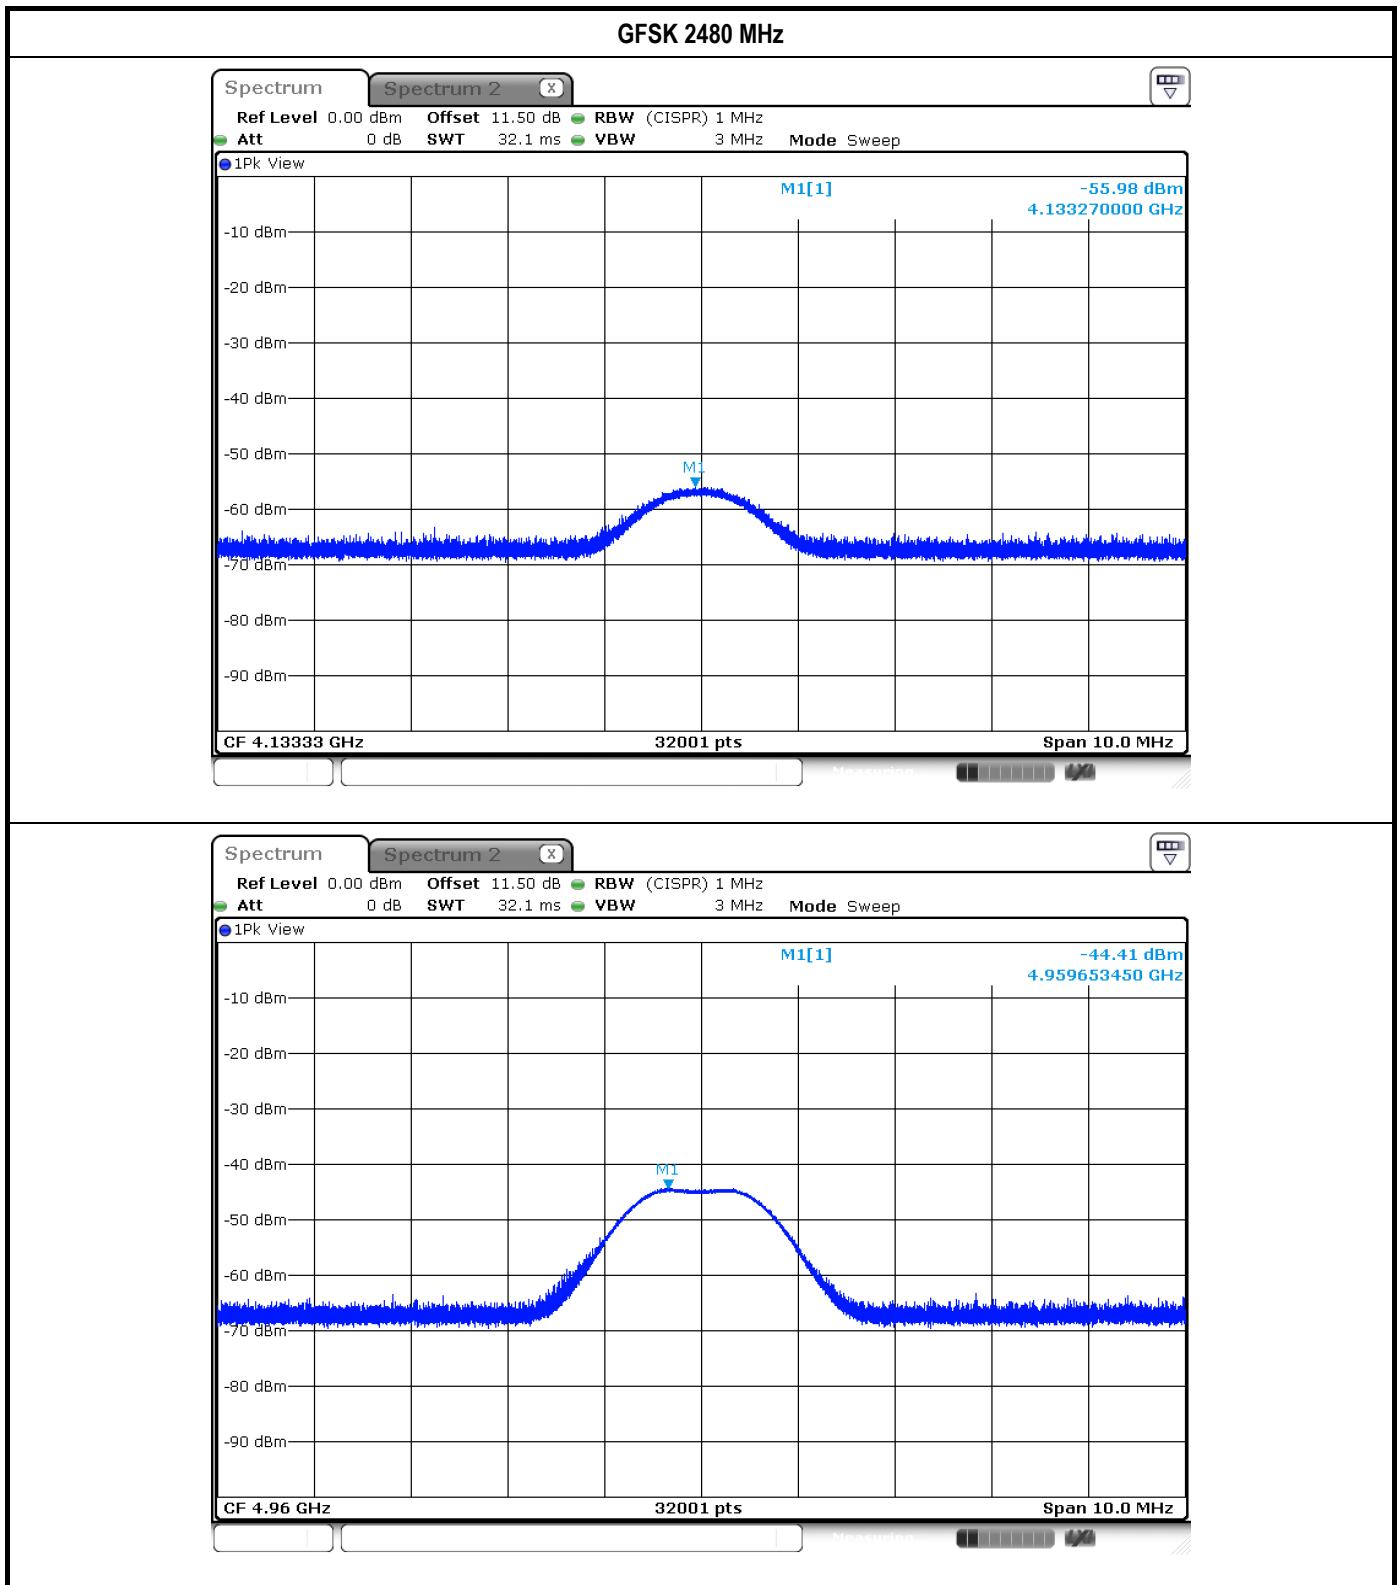

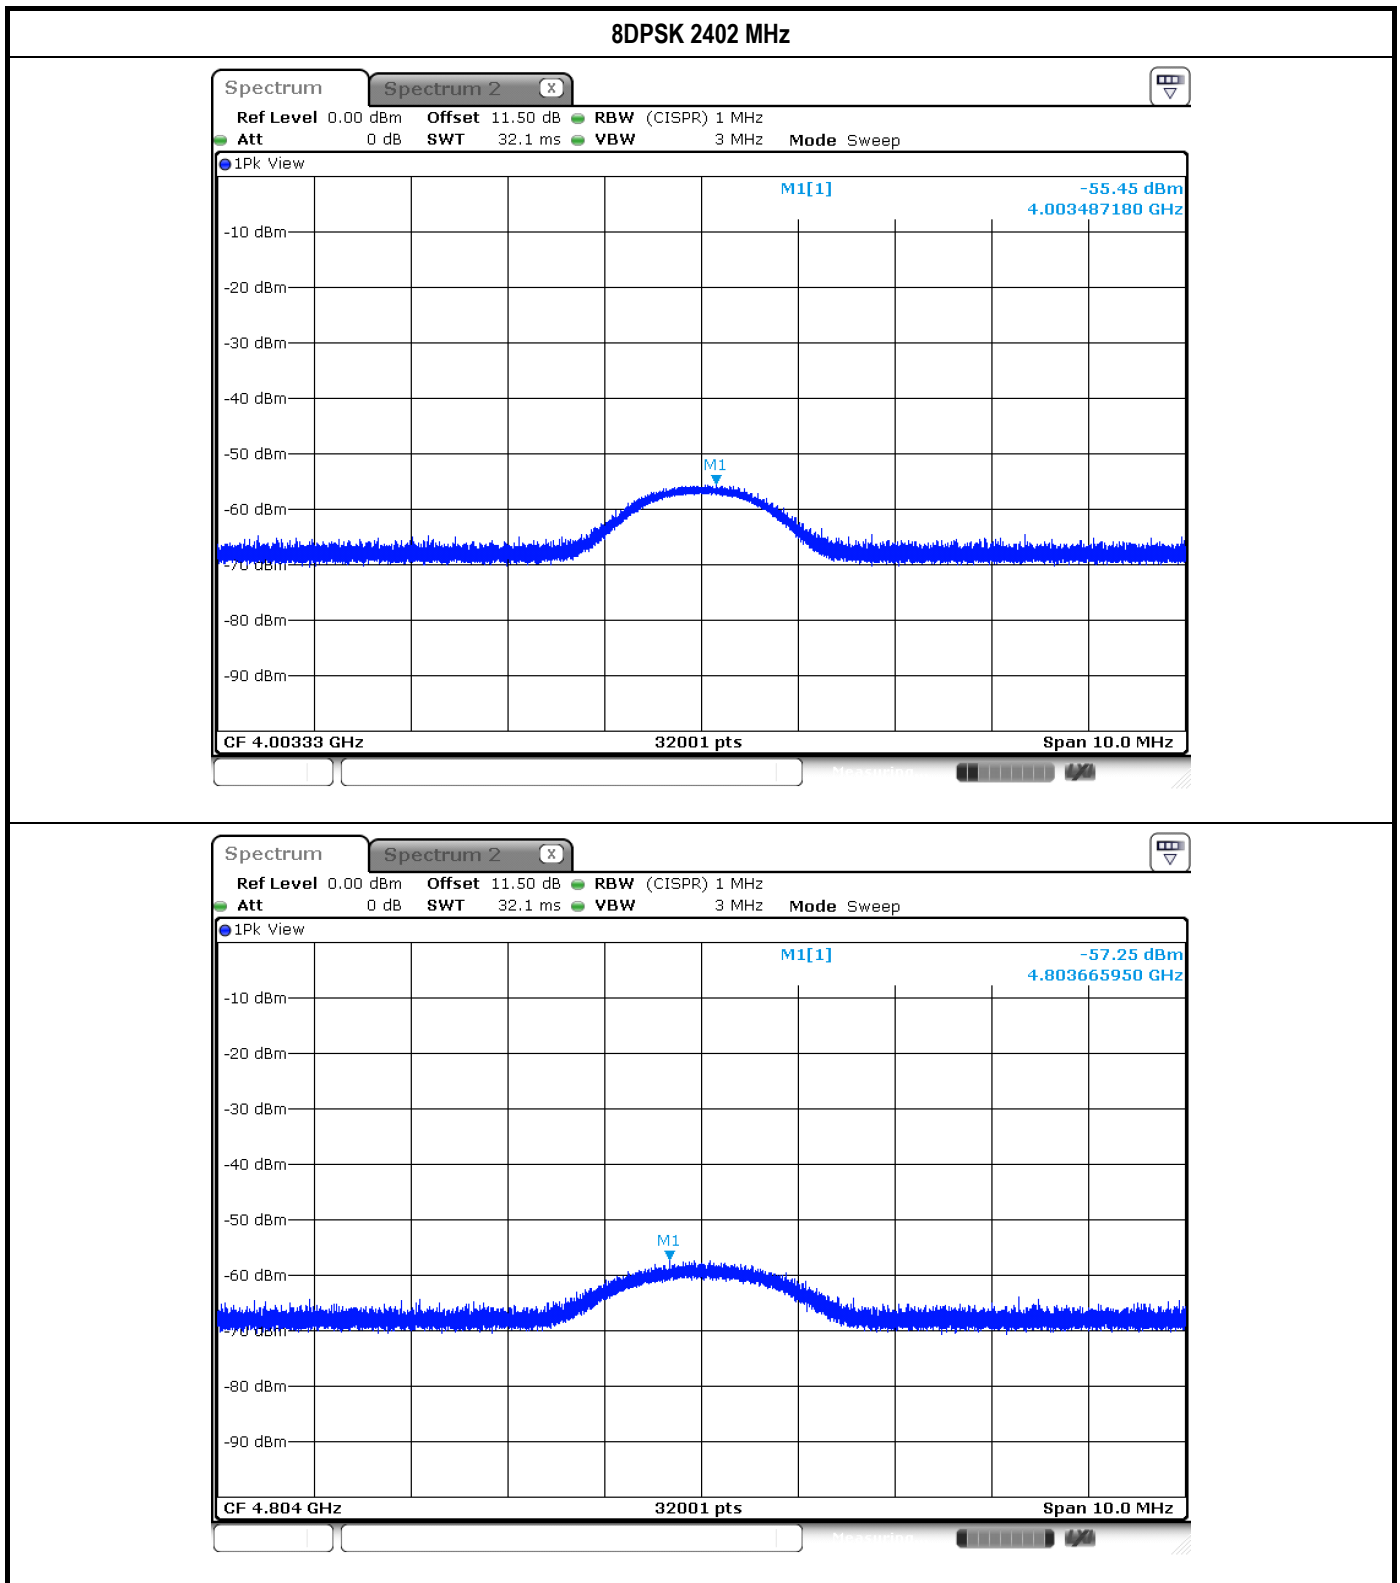

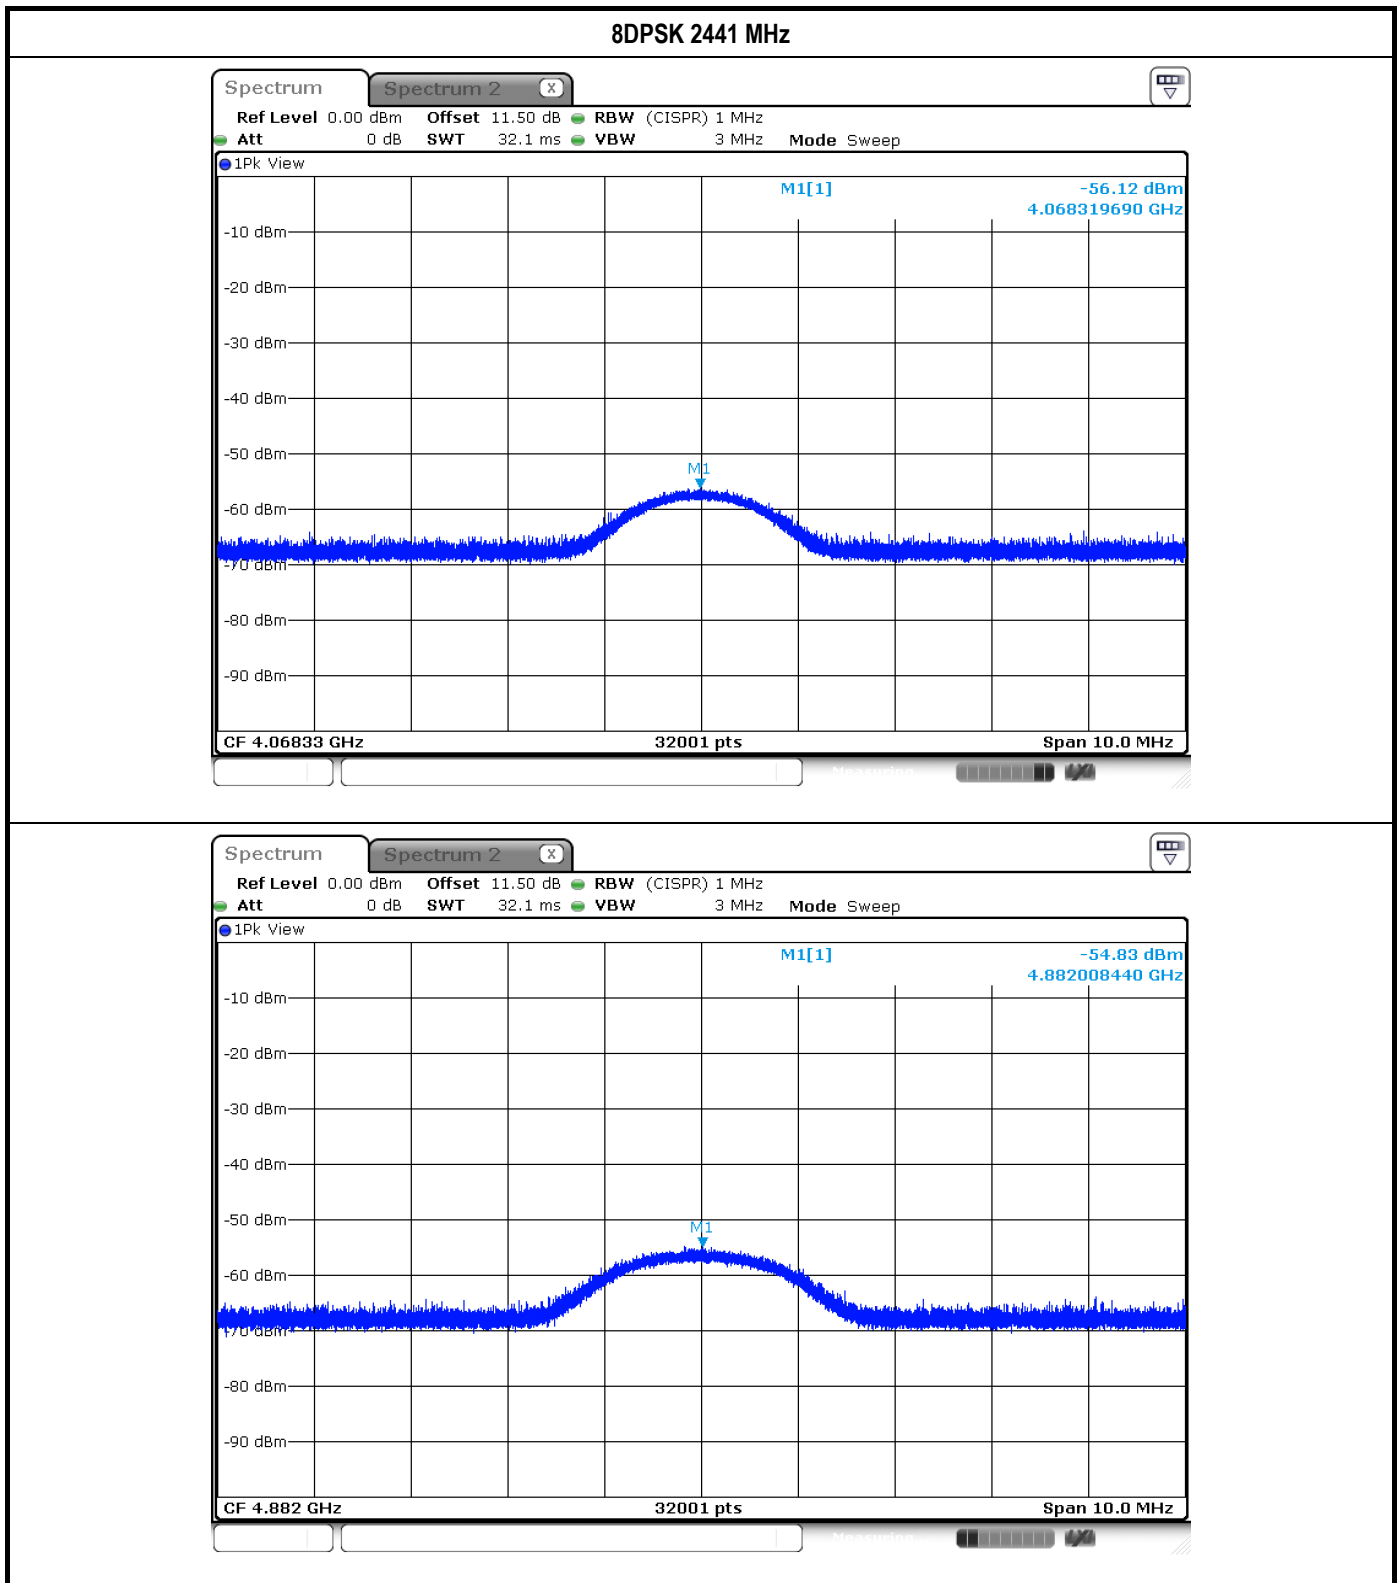



8DPSK 2480 MHz

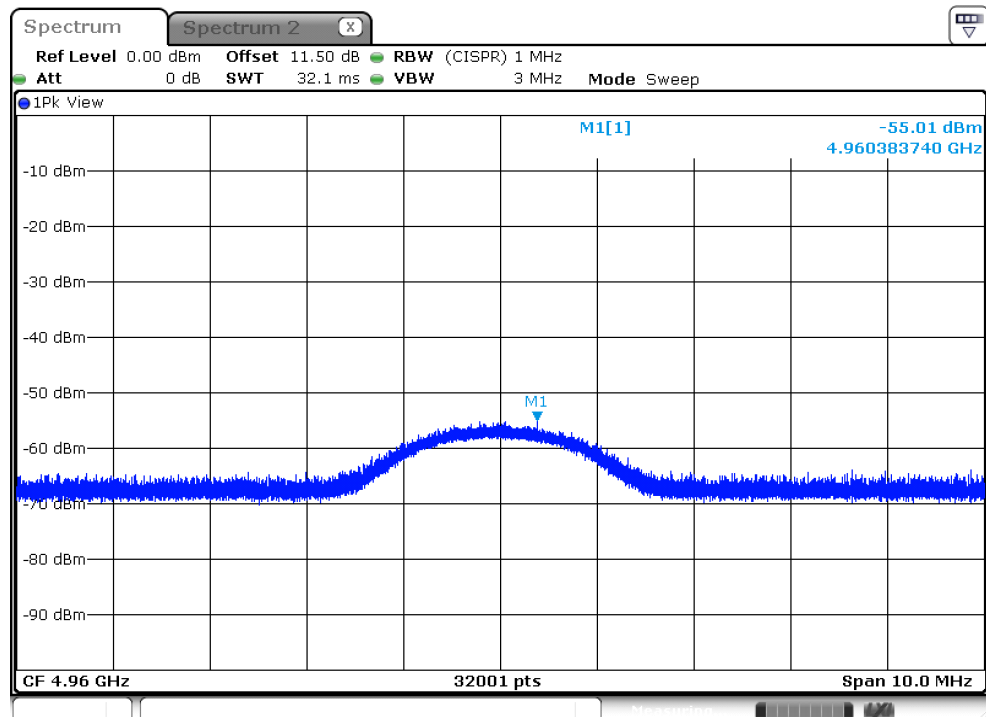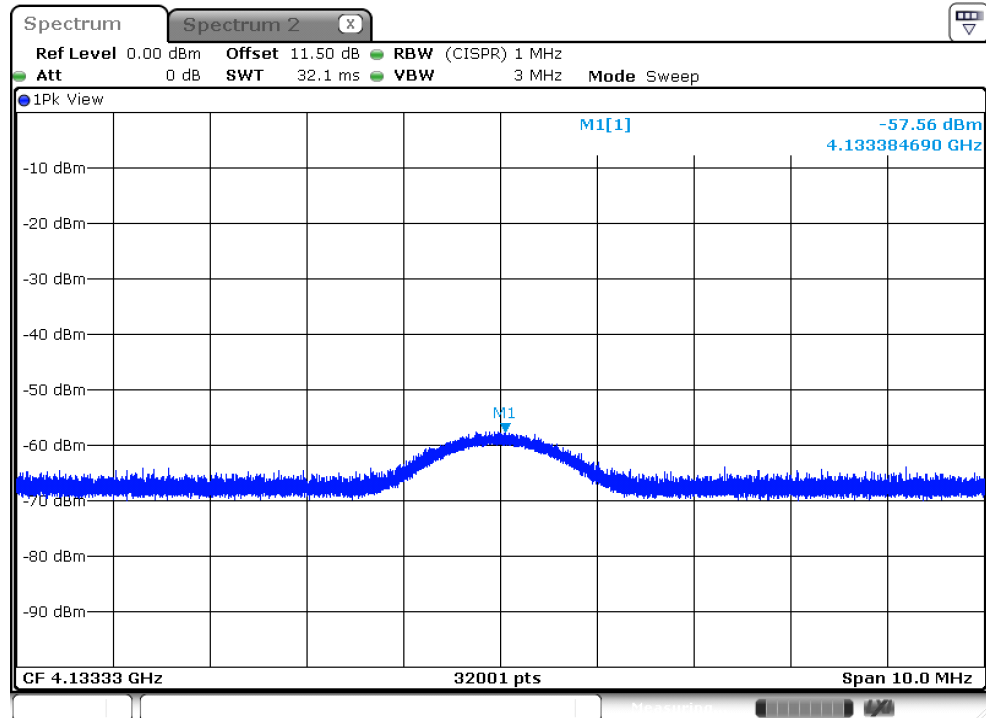



Restrict bands above 1G								
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band - Bandedge								
Modulation Mode	GFSK							
Test ch. Freq. (MHz)	Remark	Range (MHz)	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
2402	PK	2310~2390	-46.72	2.40	-44.32	50.94	74.00	-23.06
	AV	2310~2390	-59.88	2.40	-57.48	37.78	54.00	-16.22
	PK	2483.5~2500	-46.57	2.40	-44.17	51.09	74.00	-22.91
	AV	2483.5~2500	-60.09	2.40	-57.69	37.57	54.00	-16.43
2441	PK	2310~2390	-46.57	2.40	-44.17	51.09	74.00	-22.91
	AV	2310~2390	-60.01	2.40	-57.61	37.65	54.00	-16.35
	PK	2483.5~2500	-46.79	2.40	-44.39	50.87	74.00	-23.13
	AV	2483.5~2500	-59.92	2.40	-57.52	37.74	54.00	-16.26
2480	PK	2310~2390	-46.37	2.40	-43.97	51.29	74.00	-22.71
	AV	2310~2390	-58.44	2.40	-56.04	39.22	54.00	-14.78
	PK	2483.5~2500	-45.72	2.40	-43.32	51.94	74.00	-22.06
	AV	2483.5~2500	-57.38	2.40	-54.98	40.28	54.00	-13.72

Restrict bands above 1G								
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band - Bandedge								
Modulation Mode	8DPSK							
Test ch. Freq. (MHz)	Remark	Range (MHz)	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
2402	PK	2310~2390	-46.86	2.40	-44.46	50.80	74.00	-23.20
	AV	2310~2390	-60.50	2.40	-58.10	37.16	54.00	-16.84
	PK	2483.5~2500	-46.49	2.40	-44.09	51.17	74.00	-22.83
	AV	2483.5~2500	-60.09	2.40	-57.69	37.57	54.00	-16.43
2441	PK	2310~2390	-46.24	2.40	-43.84	51.42	74.00	-22.58
	AV	2310~2390	-60.05	2.40	-57.65	37.61	54.00	-16.39
	PK	2483.5~2500	-47.65	2.40	-45.25	50.01	74.00	-23.99
	AV	2483.5~2500	-60.19	2.40	-57.79	37.47	54.00	-16.53
2480	PK	2310~2390	-46.85	2.40	-44.45	50.81	74.00	-23.19
	AV	2310~2390	-59.65	2.40	-57.25	38.01	54.00	-15.99
	PK	2483.5~2500	-46.73	2.40	-44.33	50.93	74.00	-23.07
	AV	2483.5~2500	-59.84	2.40	-57.44	37.82	54.00	-16.18



GFSK 2402 MHz

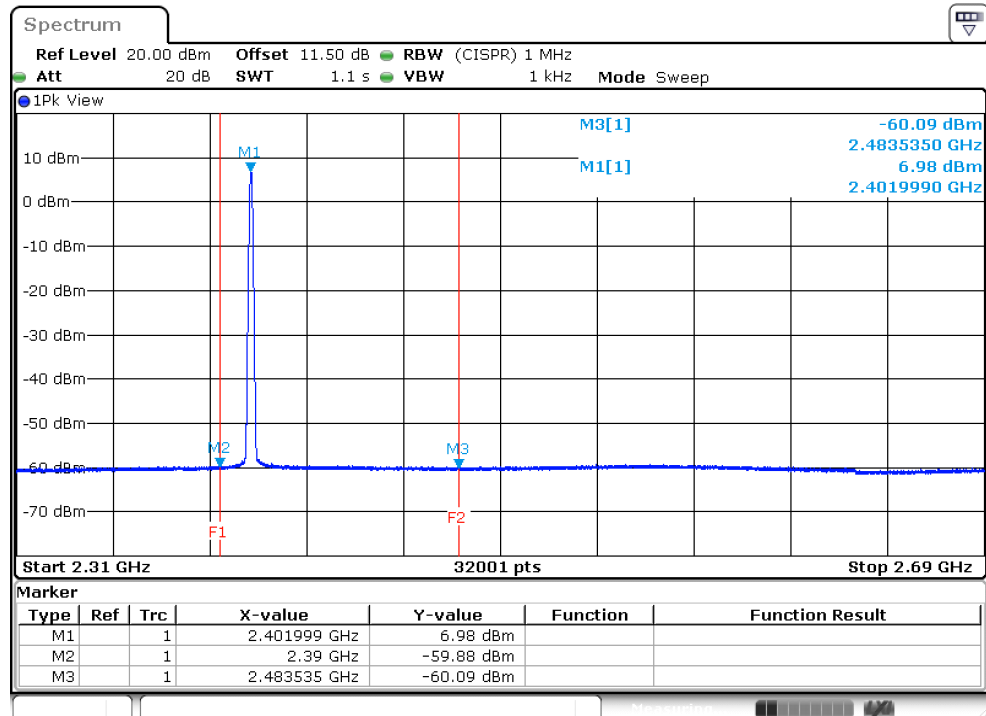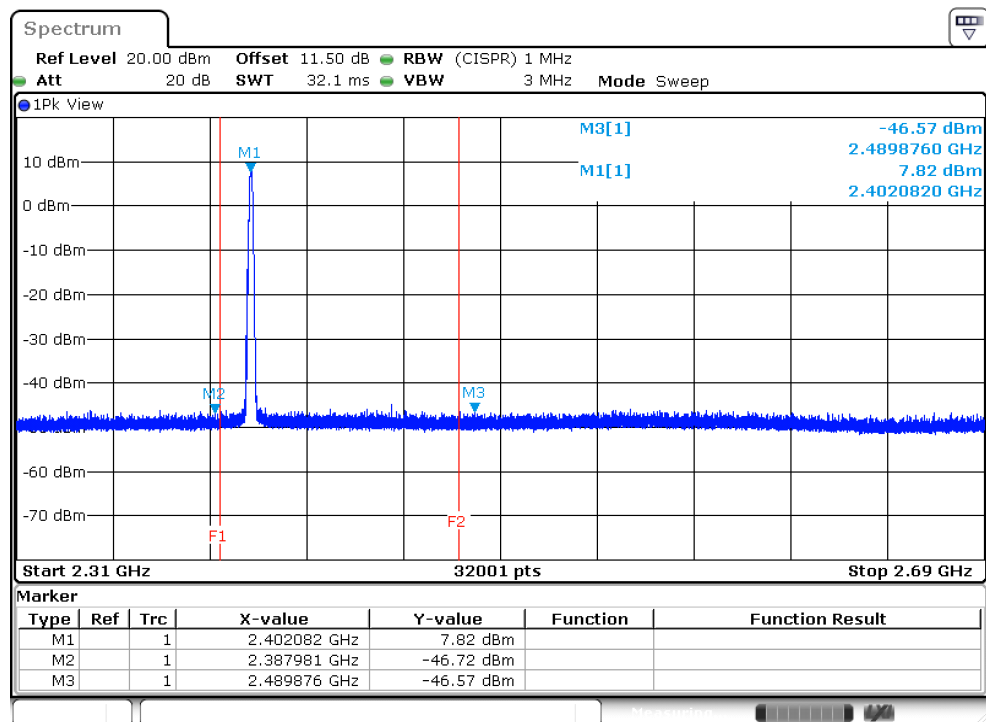



GFSK 2441 MHz

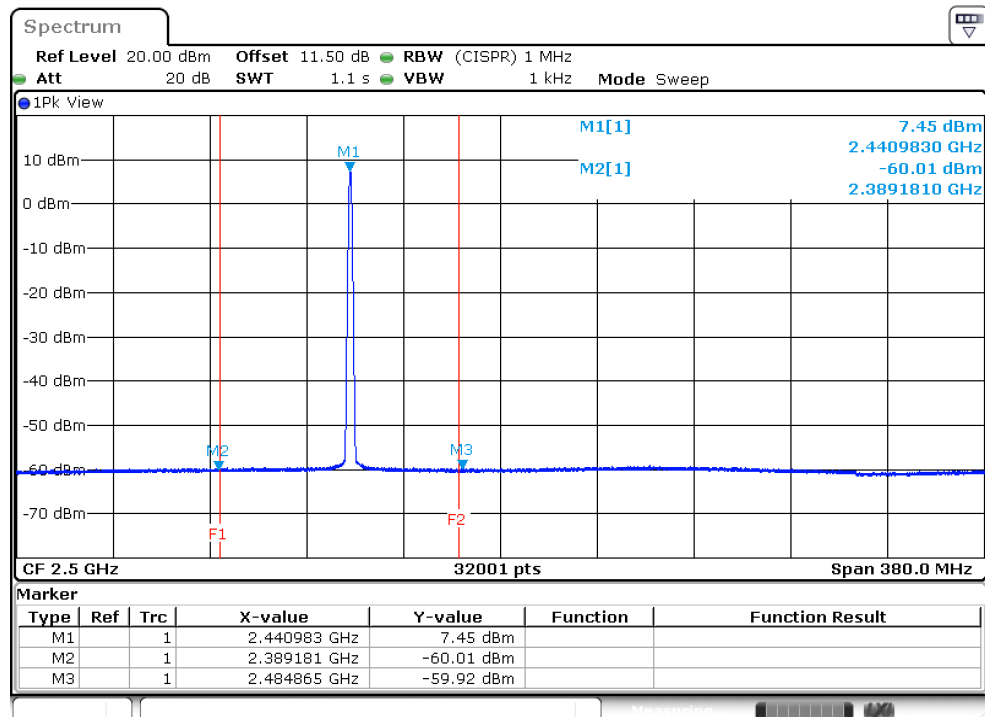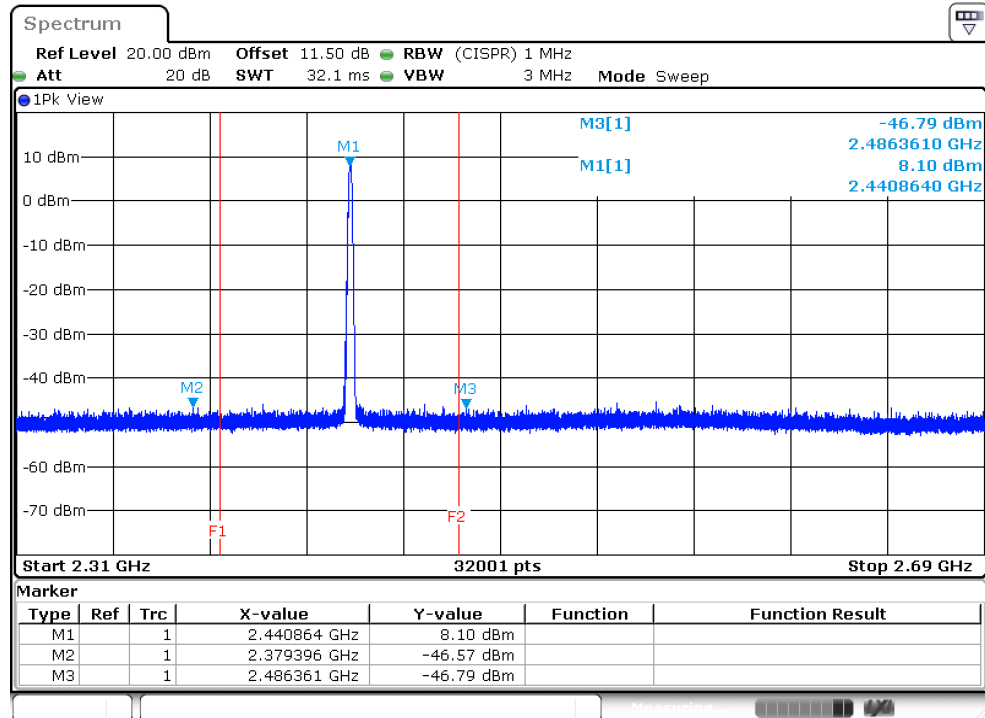



GFSK 2480 MHz

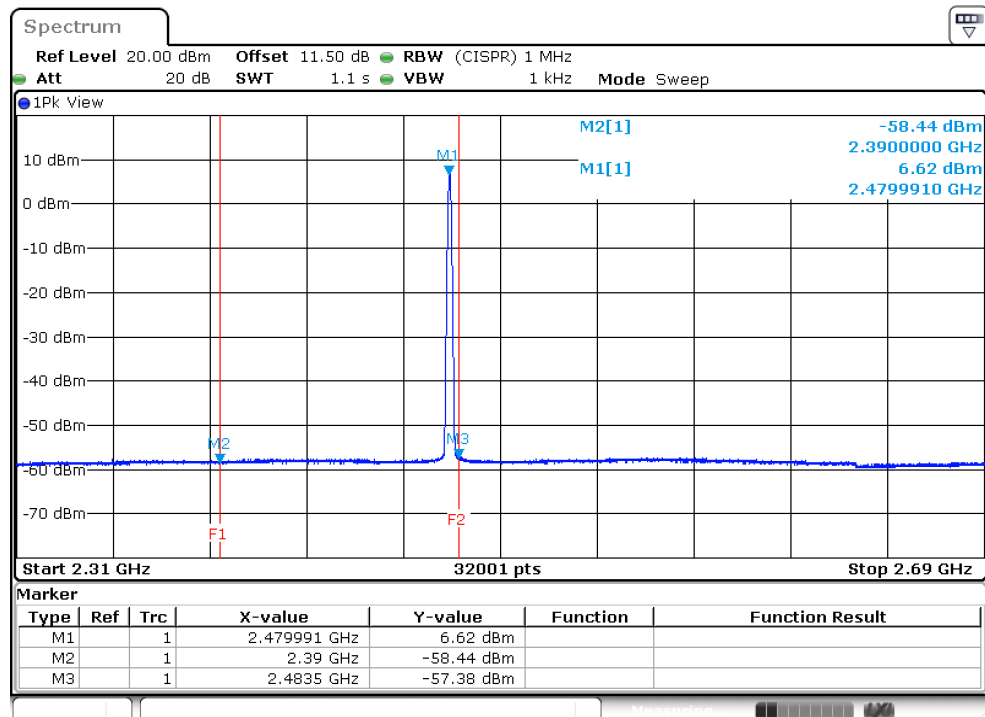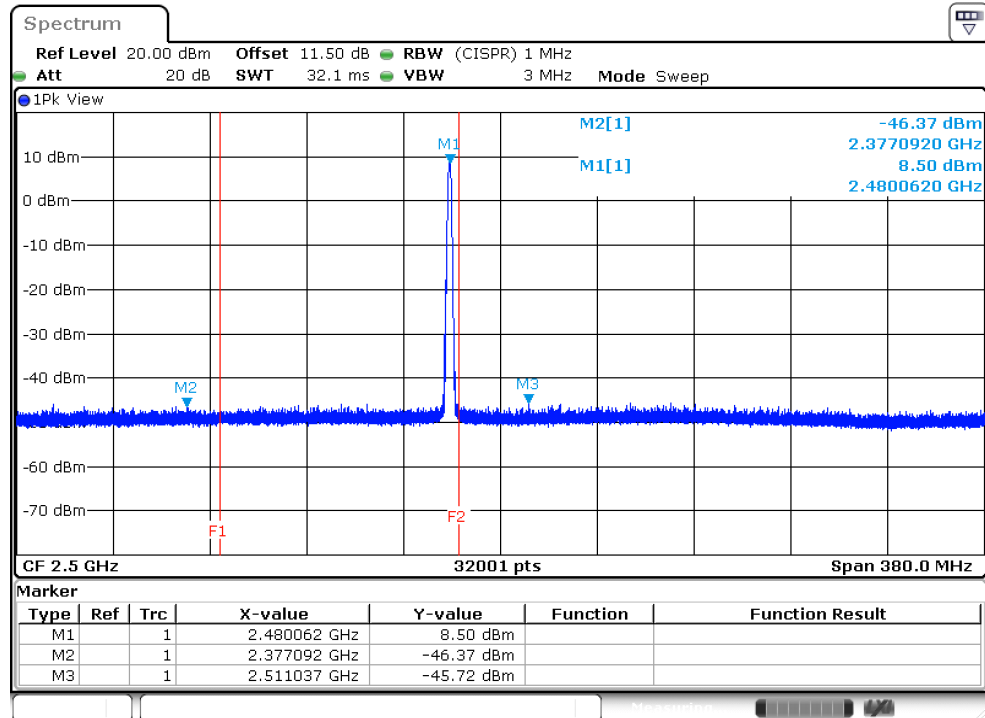



8DPSK 2402 MHz

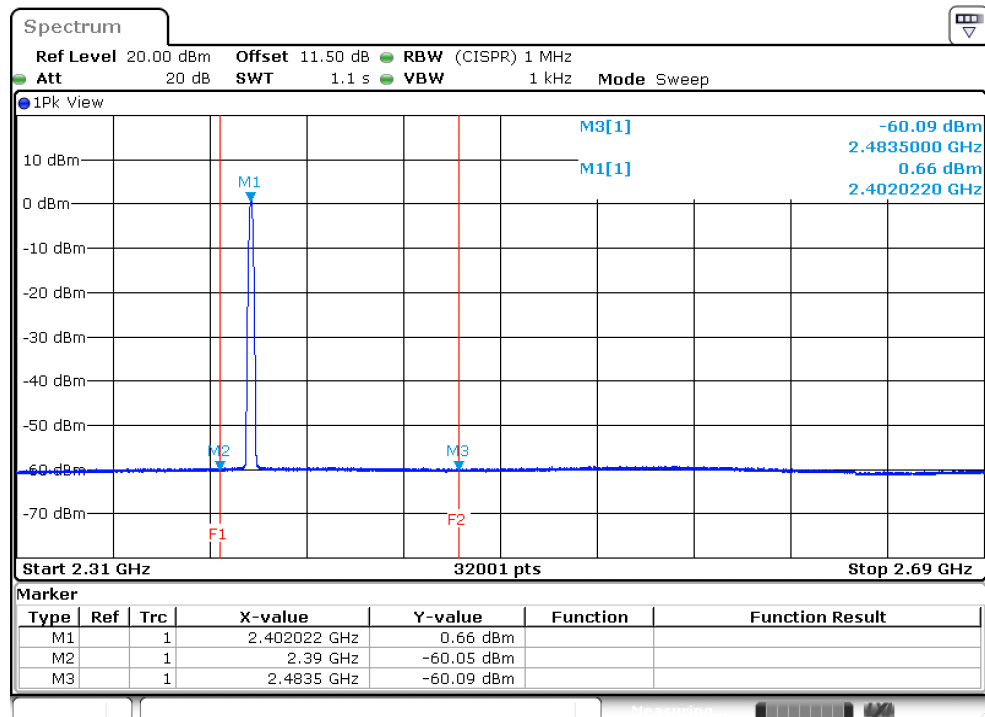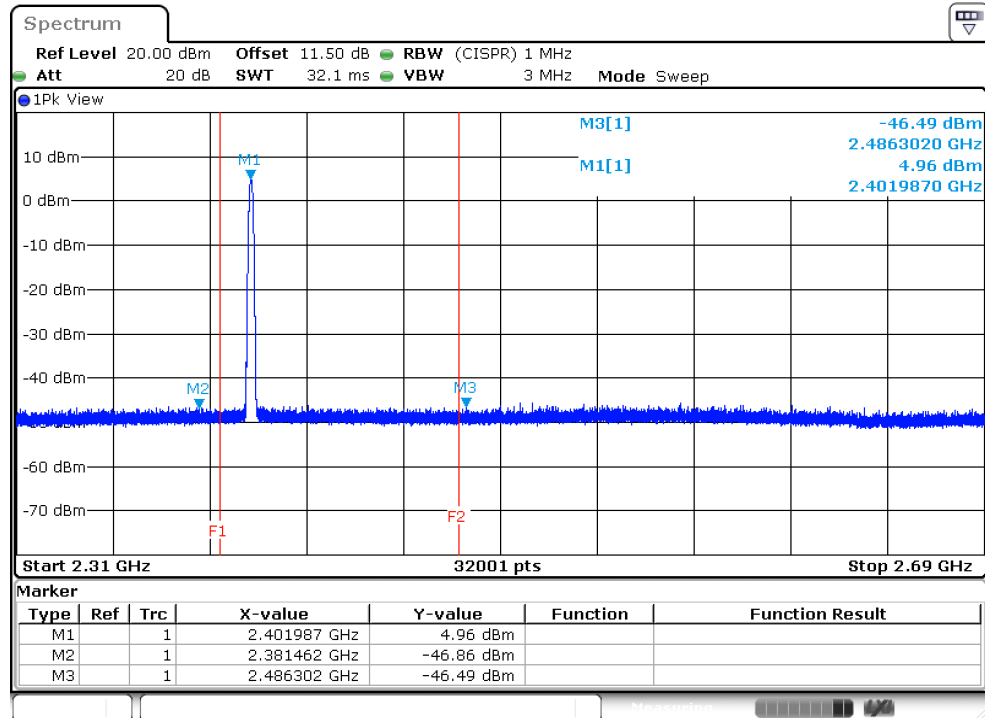

8DPSK 2441 MHz

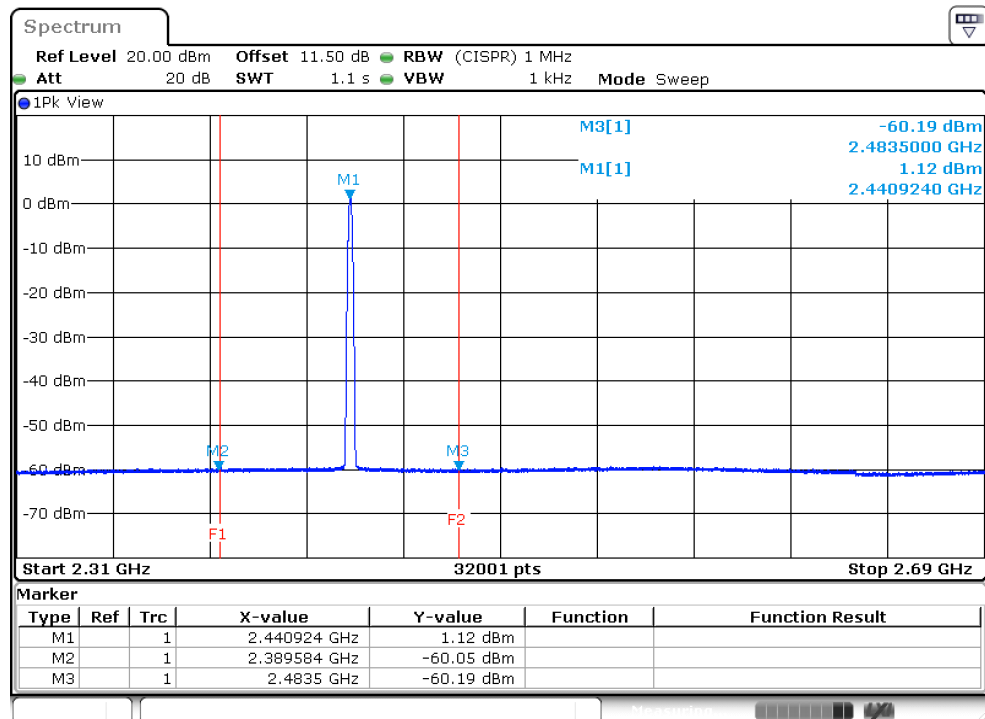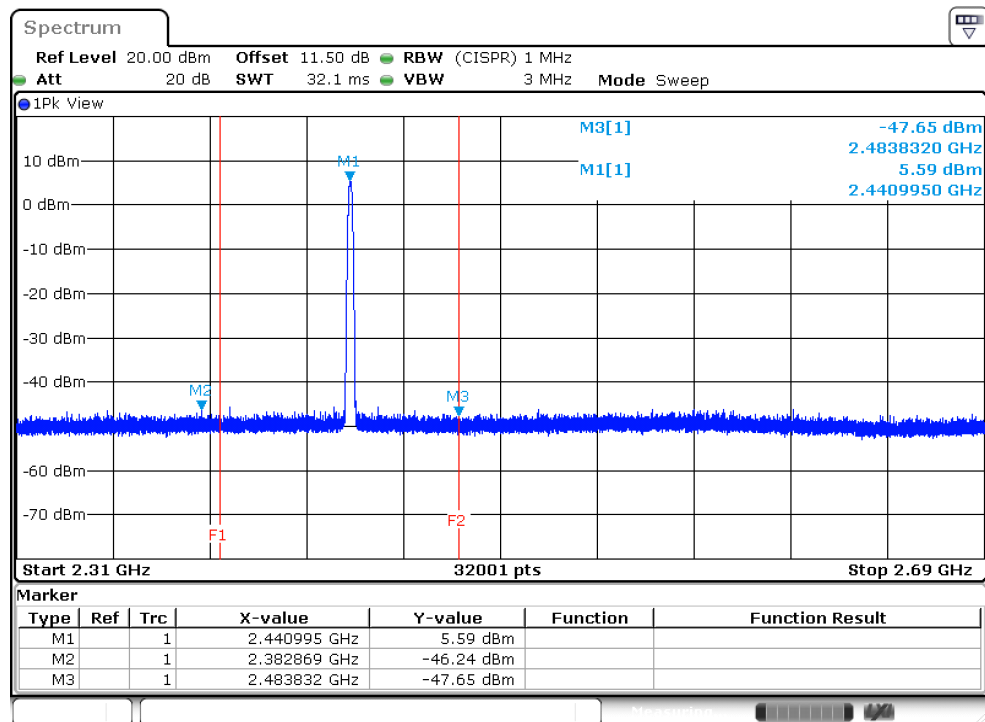

8DPSK 2480 MHz

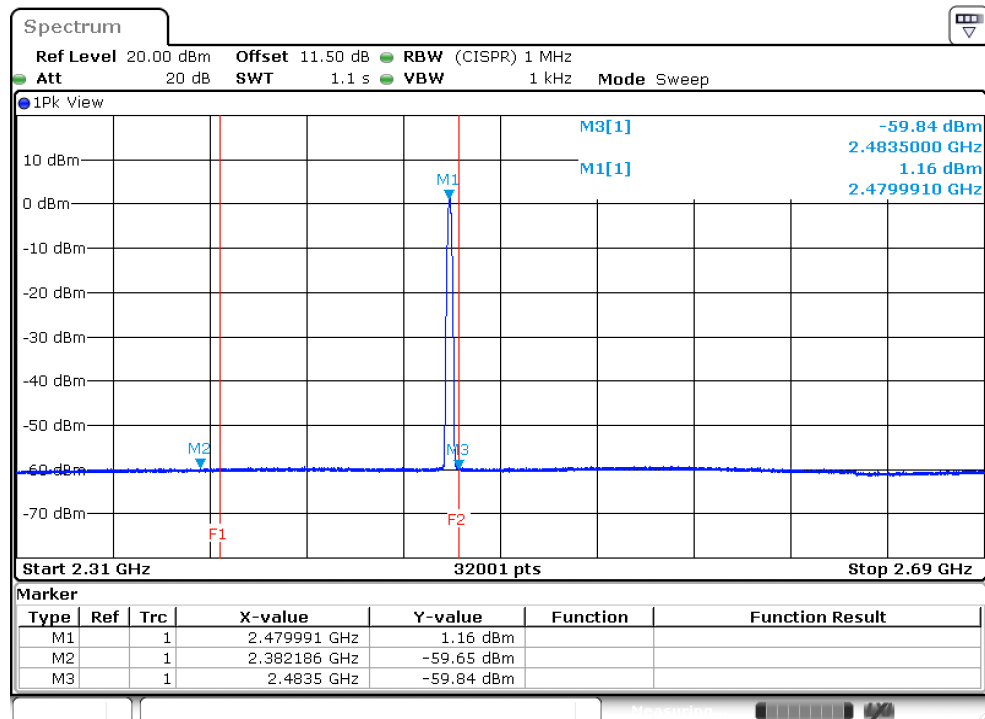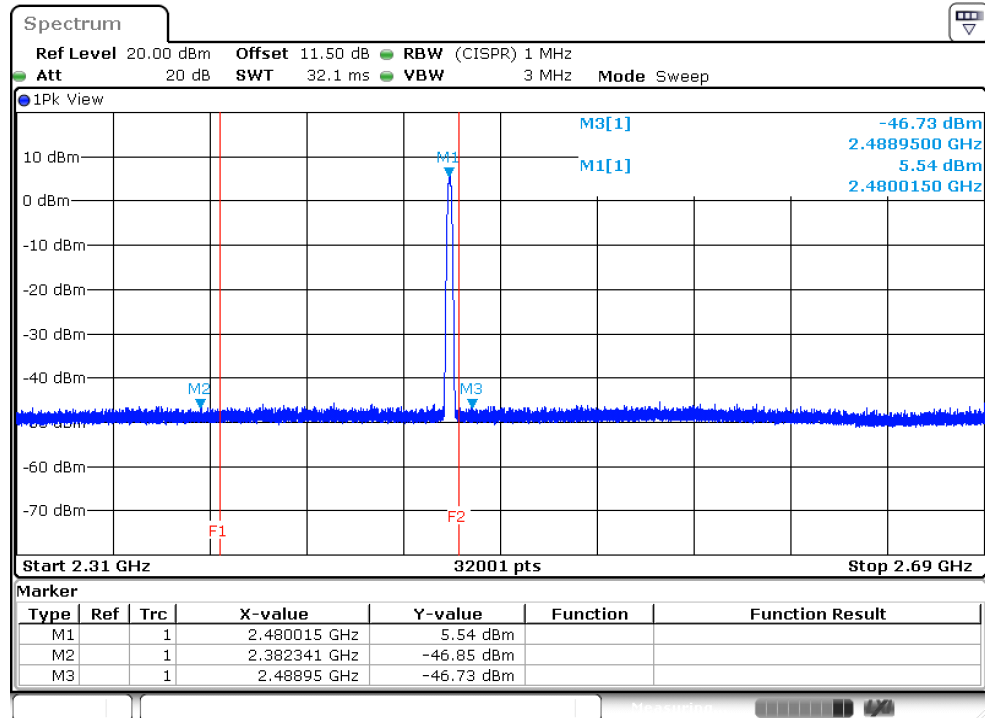




**Unwanted Conducted Emissions into Restricted
Frequency Bands - ST M.2, PCIe Module**

Appendix A.4

Restrict bands above 1G							
Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode	GFSK			Frequency	2480 MHz		
Freq (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
4133.33	PK	-54.02	2.40	-51.62	43.64	74.00	-30.36
4133.33	AV note1	-	2.40	-	-	54.00	-
4960.00	PK	-45.02	2.40	-42.62	52.64	74.00	-21.36
4960.00	AV note2	-	2.40	-	-	54.00	-

Note: If the PK margin greater than 20 dB, there is no need to get AVG reading.

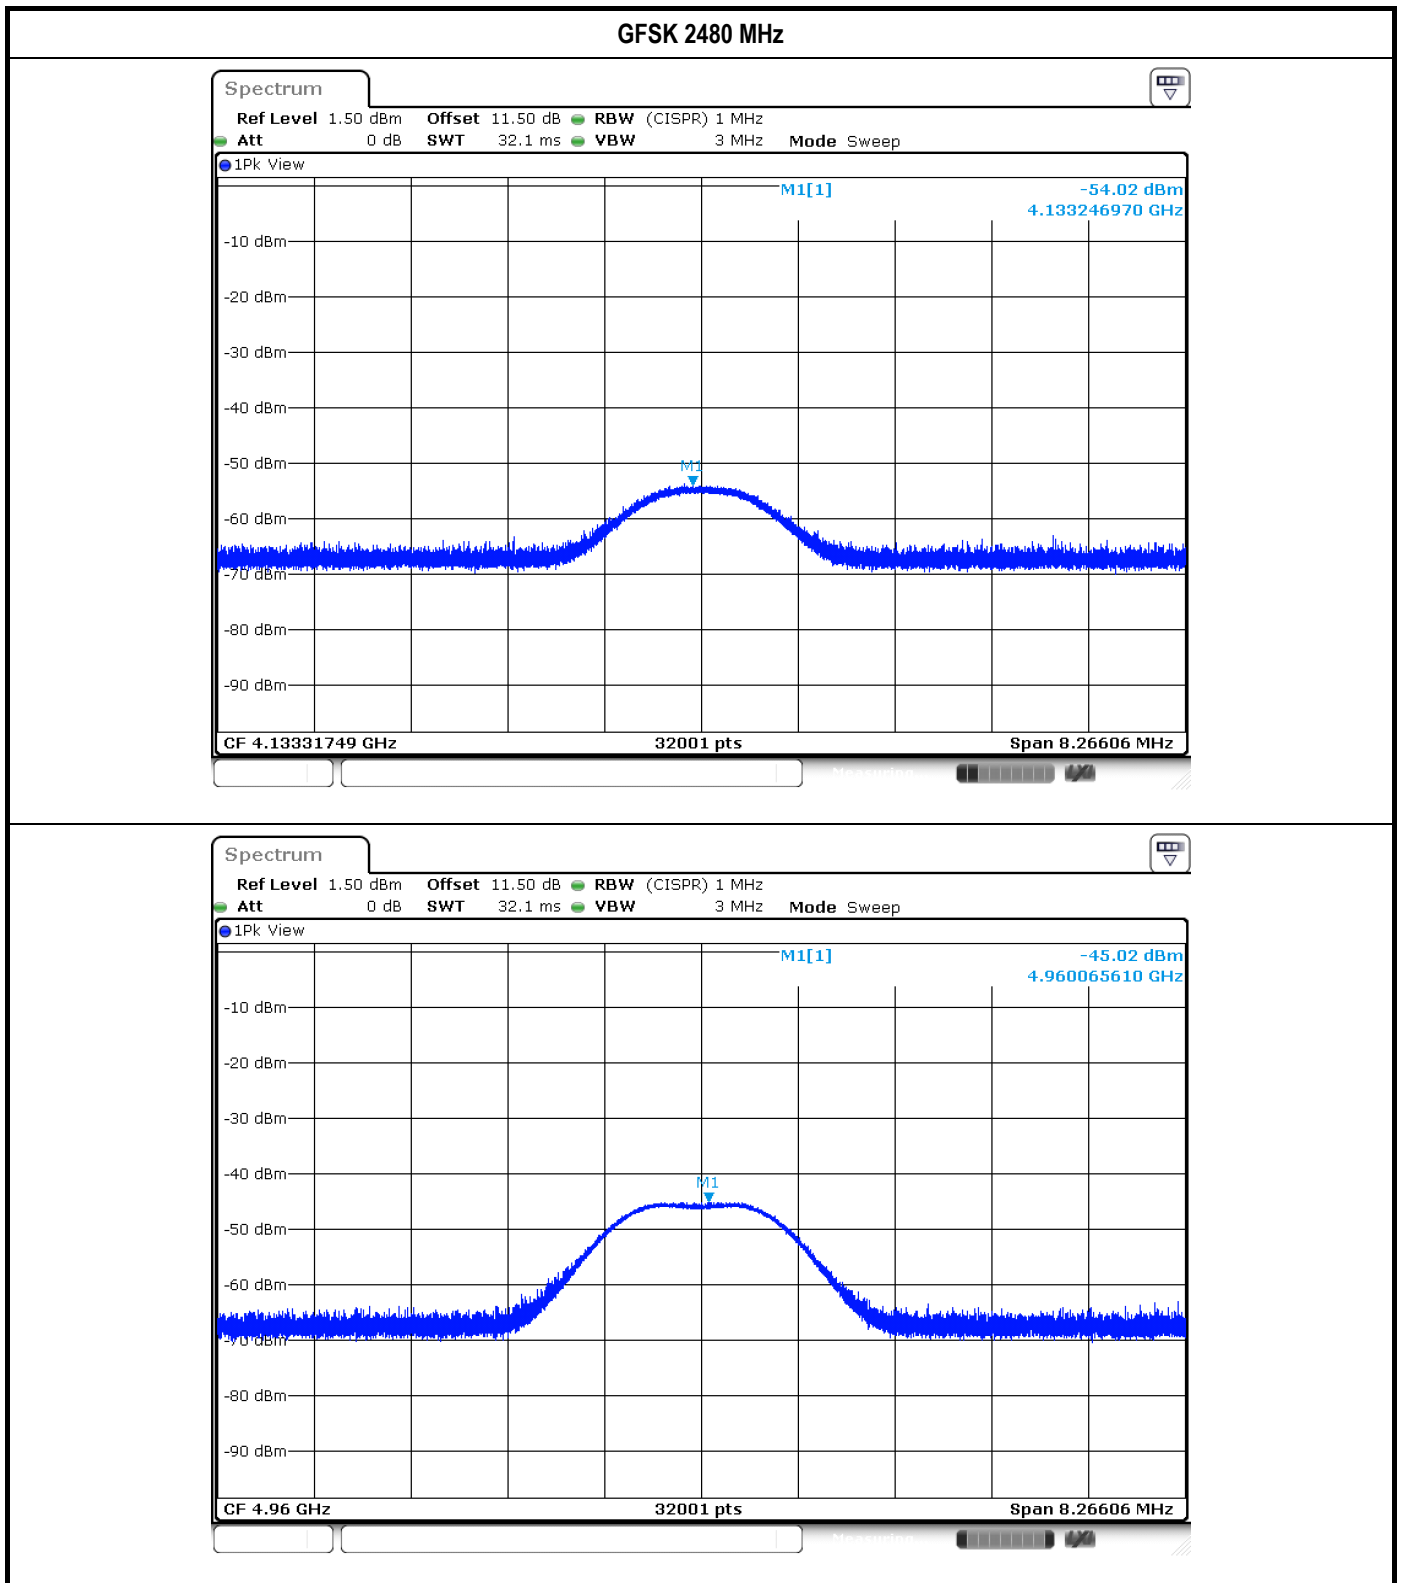





**Unwanted Conducted Emissions into Restricted
Frequency Bands - ST M.2, PCIe Module**



Appendix A.4

Restrict bands above 1G								
Transmitter Conducted Unwanted Emissions Results in Band Edge								
Modulation Mode	GFSK							
Test ch. Freq. (MHz)	Remark	Range (MHz)	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
2480	PK	2310~2390	-47.25	2.40	-44.85	50.41	74.00	-23.59
	AV	2310~2390	-60.11	2.40	-57.71	37.55	54.00	-16.45
	PK	2483.5~2500	-46.75	2.40	-44.35	50.91	74.00	-23.09
	AV	2483.5~2500	-58.74	2.40	-56.34	38.92	54.00	-15.08

GFSK 2480 MHz

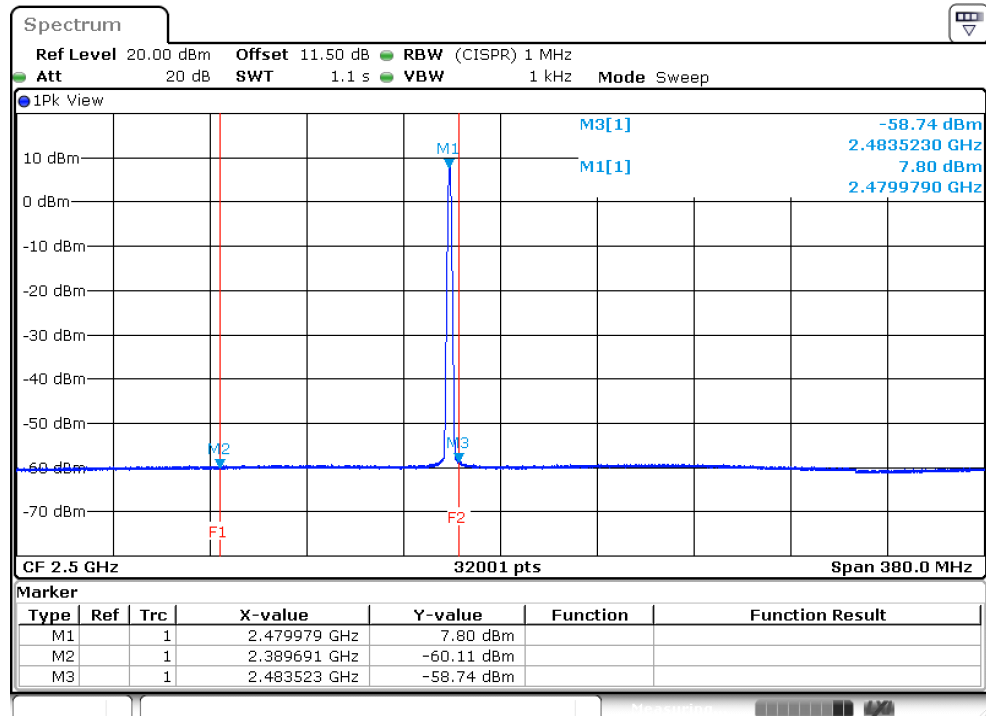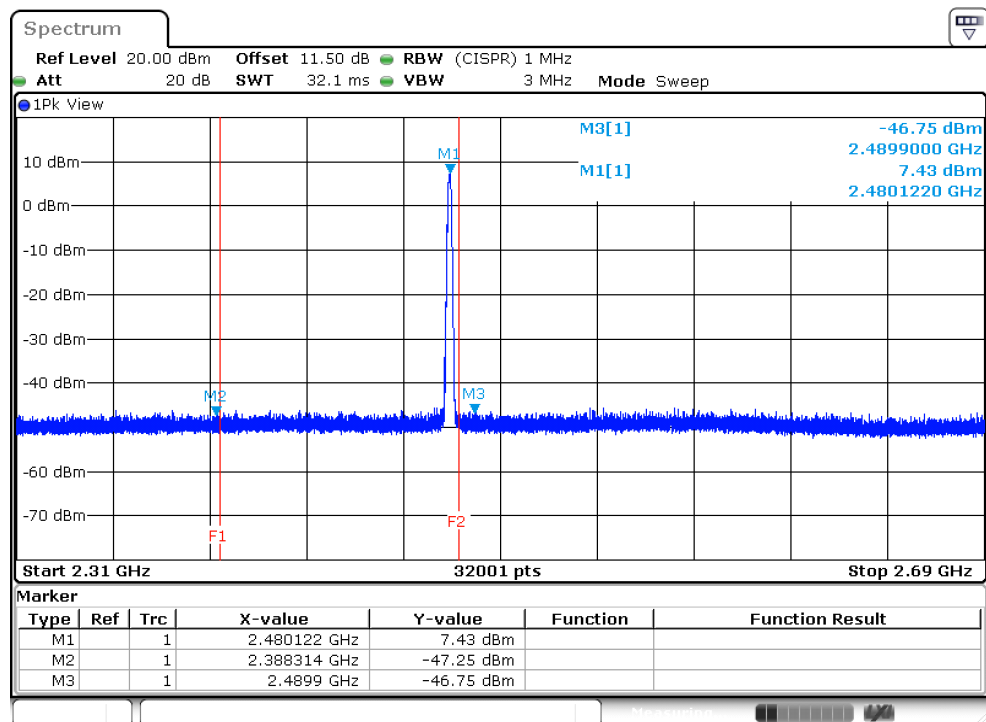

GFSK 2480 MHz

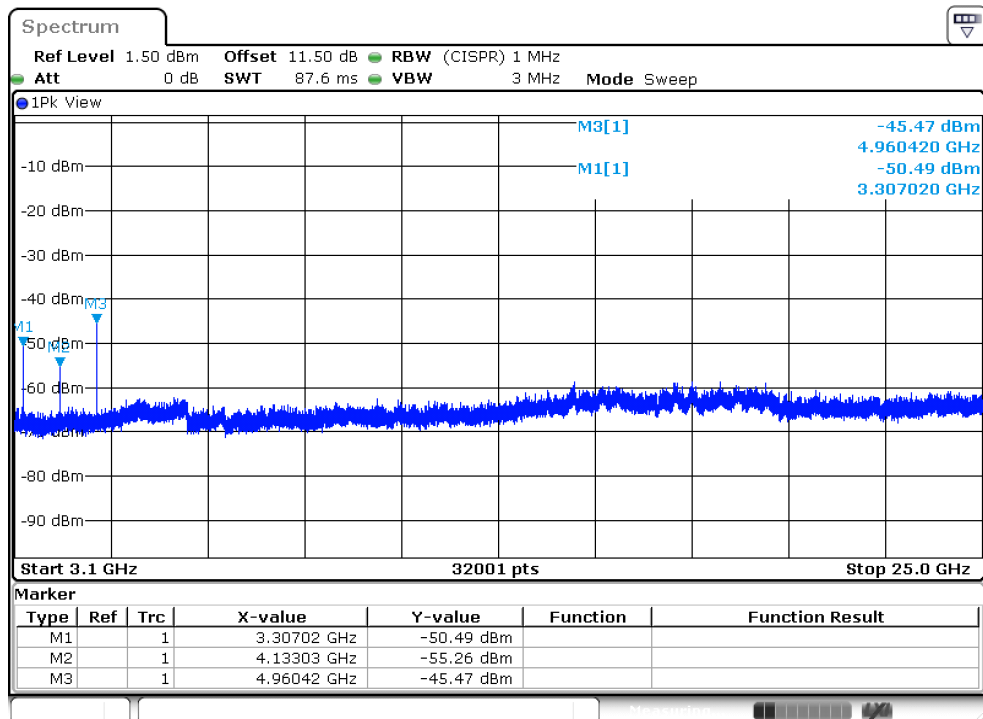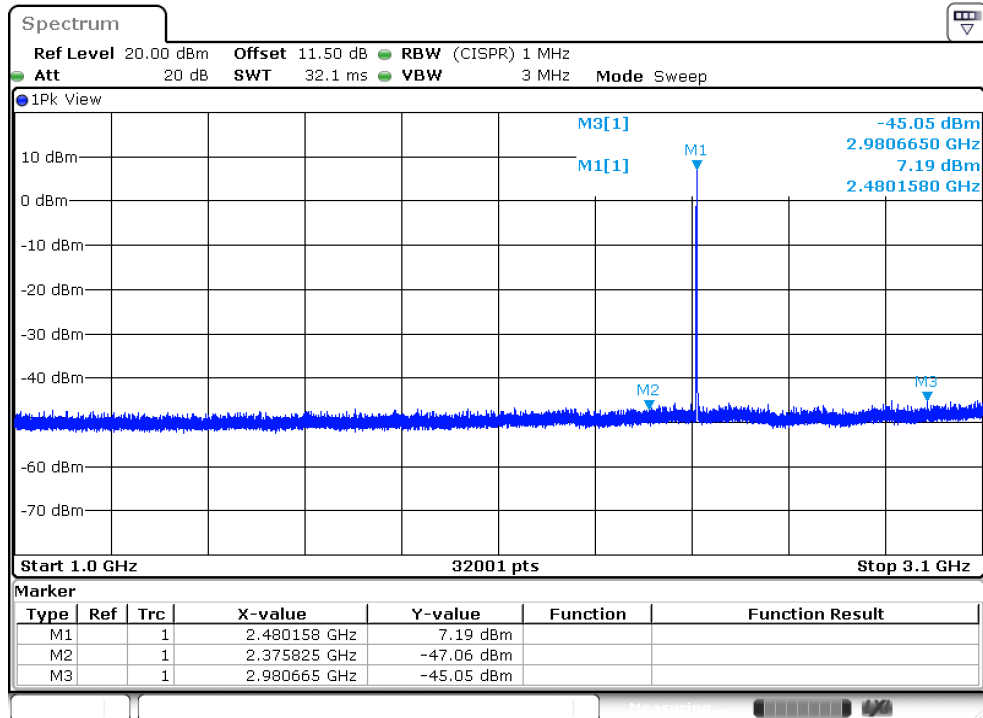



SC Module

Emissions (Below 1GHz)

Modulation	8DPSK		Test Freq. (MHz)		2480		
Polarization	Horizontal						
Test By		:Sean Yu		Temperature(°C):25		Humidity(%):61	
Level (dBuV/m) </							



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m)			



Emissions (Above 1GHz) for GFSK

Modulation	GFSK		Test Freq. (MHz)	2402	
Polarization	Horizontal				
Test By :Paul Lin Temperature(°C):26 Humidity(%):64					
Level (dBUV/m)					



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBuV/m)			



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBuV/m)			



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBuV/m) <			



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBUV/m)			



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBuV/m) <			



Emissions (Above 1GHz) for 8DPSK

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBuV/m)			



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	8DPSK	Test Freq. (MHz)	2402																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):26 Humidity(%):64																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4000.00</td><td>44.55</td><td>54.00</td><td>-9.45</td><td>46.79</td><td>-2.24</td><td>Average</td><td>306</td><td>205</td></tr><tr><td>2</td><td>4000.00</td><td>51.31</td><td>74.00</td><td>-22.69</td><td>53.55</td><td>-2.24</td><td>Peak</td><td>306</td><td>205</td></tr><tr><td>3</td><td>4804.00</td><td>14.72</td><td>54.00</td><td>-39.28</td><td></td><td></td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td>4804.00</td><td>44.82</td><td>74.00</td><td>-29.18</td><td>45.34</td><td>-0.52</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td>12010.00</td><td>26.26</td><td>54.00</td><td>-27.74</td><td></td><td></td><td>Average</td><td>100</td><td>97</td></tr><tr><td>6</td><td>12010.00</td><td>56.36</td><td>74.00</td><td>-17.64</td><td>50.23</td><td>6.13</td><td>Peak</td><td>100</td><td>97</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4000.00	44.55	54.00	-9.45	46.79	-2.24	Average	306	205	2	4000.00	51.31	74.00	-22.69	53.55	-2.24	Peak	306	205	3	4804.00	14.72	54.00	-39.28			Average	100	176	4	4804.00	44.82	74.00	-29.18	45.34	-0.52	Peak	100	176	5	12010.00	26.26	54.00	-27.74			Average	100	97	6	12010.00	56.36	74.00	-17.64	50.23	6.13	Peak	100	97
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	4000.00	44.55	54.00	-9.45	46.79	-2.24	Average	306	205																																																																
2	4000.00	51.31	74.00	-22.69	53.55	-2.24	Peak	306	205																																																																
3	4804.00	14.72	54.00	-39.28			Average	100	176																																																																
4	4804.00	44.82	74.00	-29.18	45.34	-0.52	Peak	100	176																																																																
5	12010.00	26.26	54.00	-27.74			Average	100	97																																																																
6	12010.00	56.36	74.00	-17.64	50.23	6.13	Peak	100	97																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: When average value is calculated not measured, no SA reading and factor value are listed.																																																																									



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBuV/m) <			



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBUV/m)			



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBuV/m) </			



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	8DPSK		Test Freq. (MHz)		2480	
Polarization	Vertical					
Test By :Paul Lin Temperature(°C):26 Humidity(%):64						
Level (dBUV/m)						

ST M.2, PCIe Module

Emissions (Below 1GHz)

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Paul Lin		Temperature(°C):24	Humidity(%):66

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	73.58	35.72	40.00	-4.28	47.80	-12.08	Peak	---	---
2	140.06	37.23	43.50	-6.27	46.70	-9.47	Peak	---	---
3	200.05	38.81	43.50	-4.69	50.67	-11.86	Peak	---	---
4	245.38	37.12	46.00	-8.88	47.29	-10.17	Peak	---	---
5	325.18	35.59	46.00	-10.41	43.10	-7.51	Peak	---	---
6	387.28	36.06	46.00	-9.94	41.91	-5.85	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	8DPSK		Test Freq. (MHz)		2480				
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):66									
The graph displays the emission level in dBUV/m on the y-axis (0 to 90) against frequency in MHz on the x-axis (30 to 1000). A red line represents the Class-B limit, which is 40 dBUV/m from 30 to 200 MHz, 45 dBUV/m from 200 to 900 MHz, and 55 dBUV/m from 900 to 1000 MHz. Six blue vertical lines indicate measured peaks at 42.61, 73.65, 134.22, 198.35, 244.14, and 448.34 MHz, all of which are below the Class-B limit.									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	42.61	36.68	40.00	-3.32	45.02	-8.34	QP	100	136
2	73.65	36.11	40.00	-3.89	48.21	-12.10	Peak	---	---
3	134.22	36.18	43.50	-7.32	46.07	-9.89	Peak	---	---
4	198.35	37.36	43.50	-6.14	49.13	-11.77	Peak	---	---
5	244.14	35.02	46.00	-10.98	45.25	-10.23	Peak	---	---
6	448.34	36.75	46.00	-9.25	41.00	-4.25	Peak	---	---
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.									



Emissions (Above 1GHz) for GFSK

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBUV/m)			



Unwanted Radiated Emissions into Restricted Frequency Bands

Appendix A.5

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):26 Humidity(%):64			
Level (dBuV/m) <			



ST M.2, SDIO Module

Emissions (Below 1GHz)

Modulation	8DPSK		Test Freq. (MHz)		2480																																																																							
Polarization	Horizontal																																																																											
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																												
Level (dBuV/m) CLASS-B <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>72.17</td><td>33.46</td><td>40.00</td><td>-6.54</td><td>45.05</td><td>-11.59</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>196.18</td><td>37.52</td><td>43.50</td><td>-5.98</td><td>49.24</td><td>-11.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>325.41</td><td>35.19</td><td>46.00</td><td>-10.81</td><td>42.69</td><td>-7.50</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>388.11</td><td>36.57</td><td>46.00</td><td>-9.43</td><td>42.40</td><td>-5.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>436.15</td><td>35.49</td><td>46.00</td><td>-10.51</td><td>40.03</td><td>-4.54</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>600.36</td><td>40.28</td><td>46.00</td><td>-5.72</td><td>41.20</td><td>-0.92</td><td>Peak</td><td>---</td><td>---</td></tr></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	72.17	33.46	40.00	-6.54	45.05	-11.59	Peak	---	---	2	196.18	37.52	43.50	-5.98	49.24	-11.72	Peak	---	---	3	325.41	35.19	46.00	-10.81	42.69	-7.50	Peak	---	---	4	388.11	36.57	46.00	-9.43	42.40	-5.83	Peak	---	---	5	436.15	35.49	46.00	-10.51	40.03	-4.54	Peak	---	---	6	600.36	40.28	46.00	-5.72	41.20	-0.92	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	72.17	33.46	40.00	-6.54	45.05	-11.59	Peak	---	---																																																																			
2	196.18	37.52	43.50	-5.98	49.24	-11.72	Peak	---	---																																																																			
3	325.41	35.19	46.00	-10.81	42.69	-7.50	Peak	---	---																																																																			
4	388.11	36.57	46.00	-9.43	42.40	-5.83	Peak	---	---																																																																			
5	436.15	35.49	46.00	-10.51	40.03	-4.54	Peak	---	---																																																																			
6	600.36	40.28	46.00	-5.72	41.20	-0.92	Peak	---	---																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																												



Unwanted Radiated Emissions into Restricted Frequency Bands


Appendix A.5

Modulation	8DPSK		Test Freq. (MHz)		2480	
Polarization	Vertical					
Test By :Paul Lin Temperature(°C):24 Humidity(%):66						
Level (dBuV/m) </						

2.4-2.4835GHz_BT-BR(1Mbps)

CSEndB-FS


2402MHz

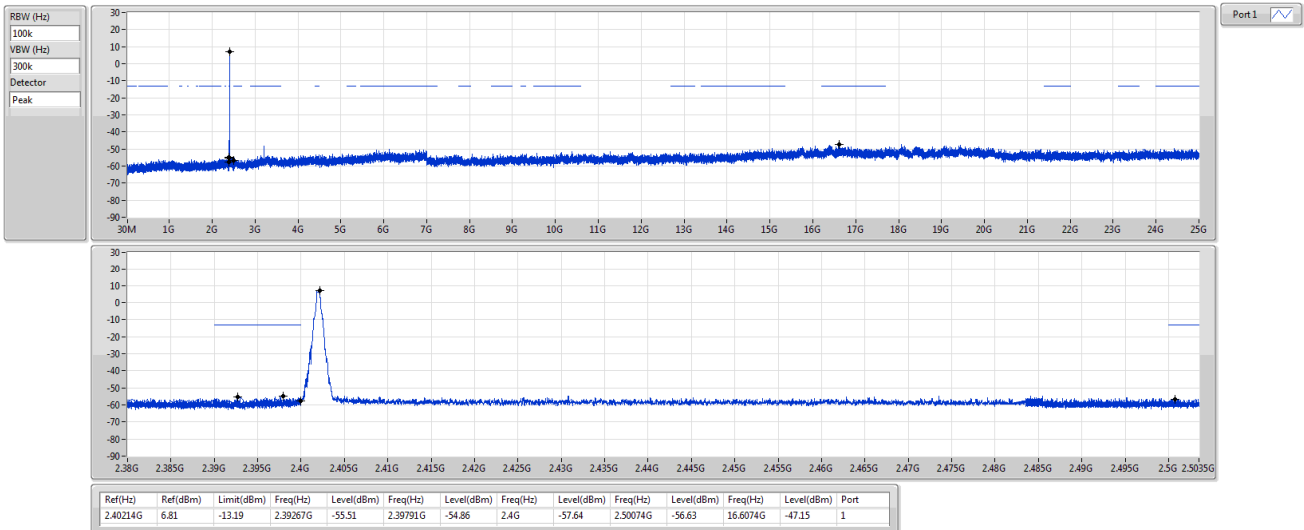

2.4-2.4835GHz_BT-BR(1Mbps)

CSEndB-FS


2441MHz

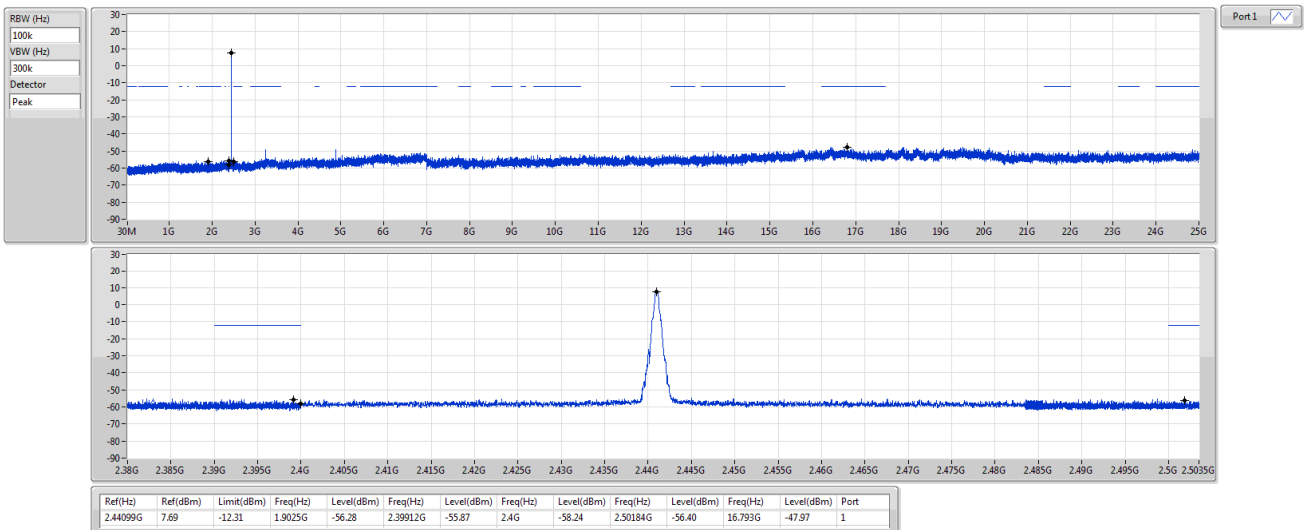

2.4-2.4835GHz_BT-BR(1Mbps)

CSEndB-FS


2480MHz

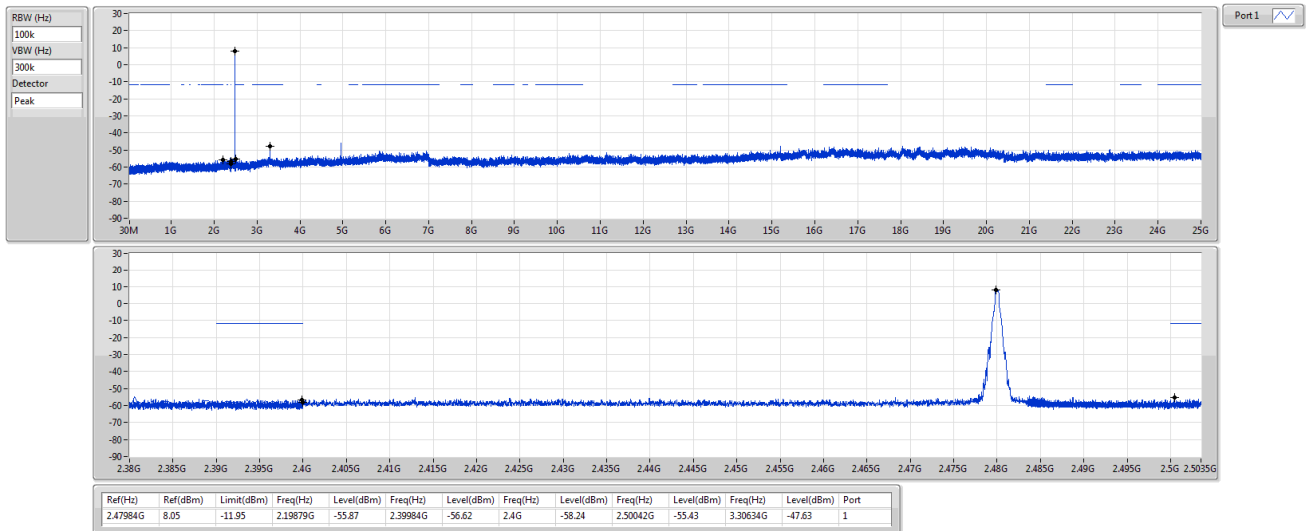

2.4-2.4835GHz_BT-EDR(2Mbps)

CSEndB-FS


2402MHz

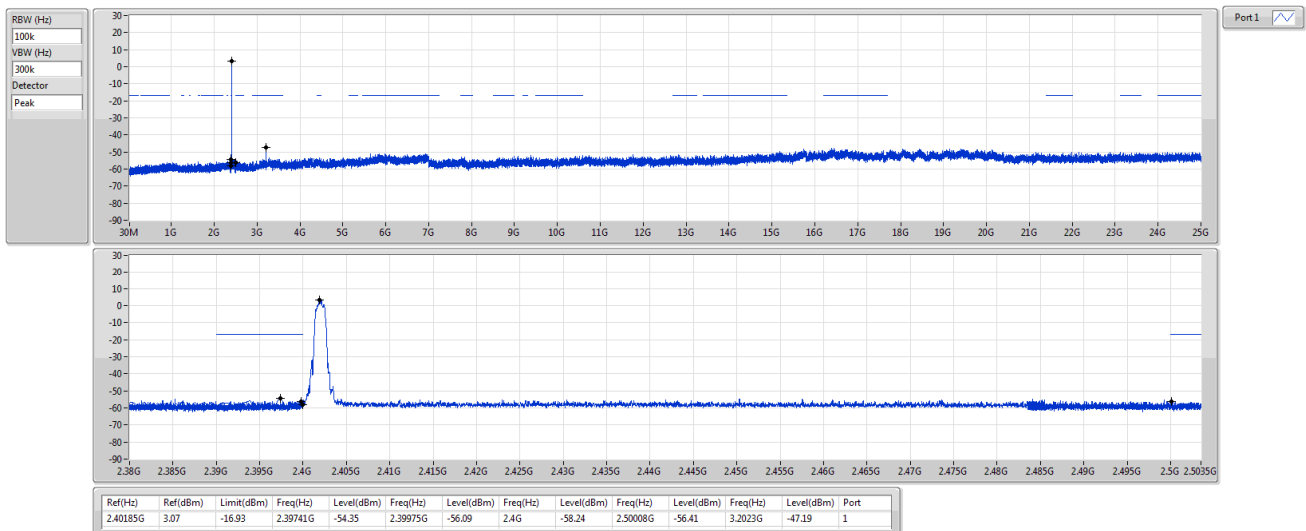

2.4-2.4835GHz_BT-EDR(2Mbps)

CSEndB-FS


2441MHz

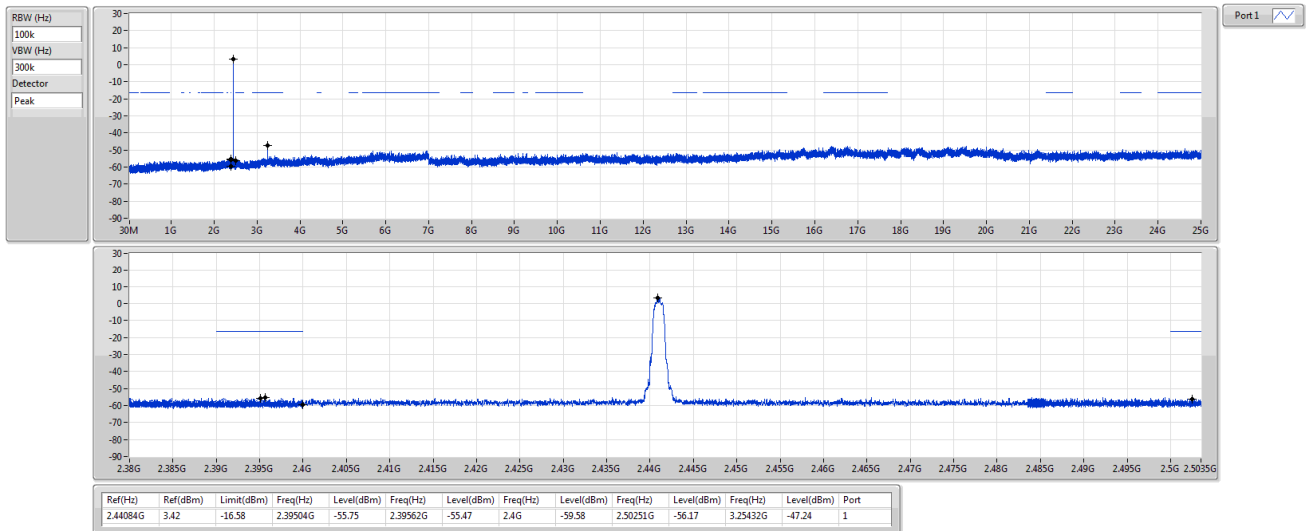

2.4-2.4835GHz_BT-EDR(2Mbps)

CSEndB-FS


2480MHz

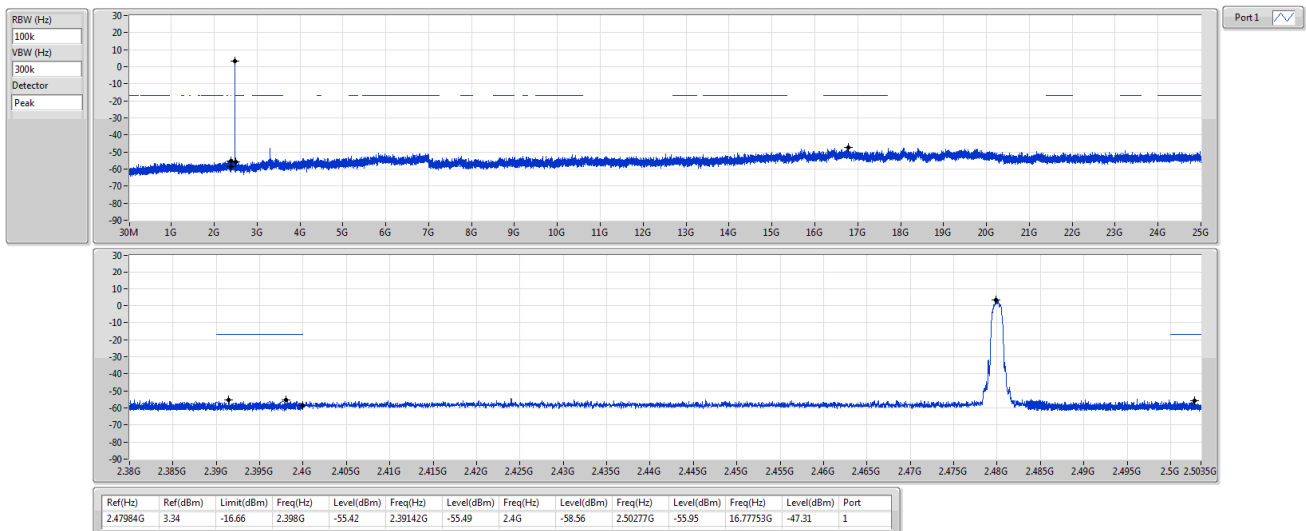

2.4-2.4835GHz_BT-EDR(3Mbps)

CSEndB-FS


2402MHz

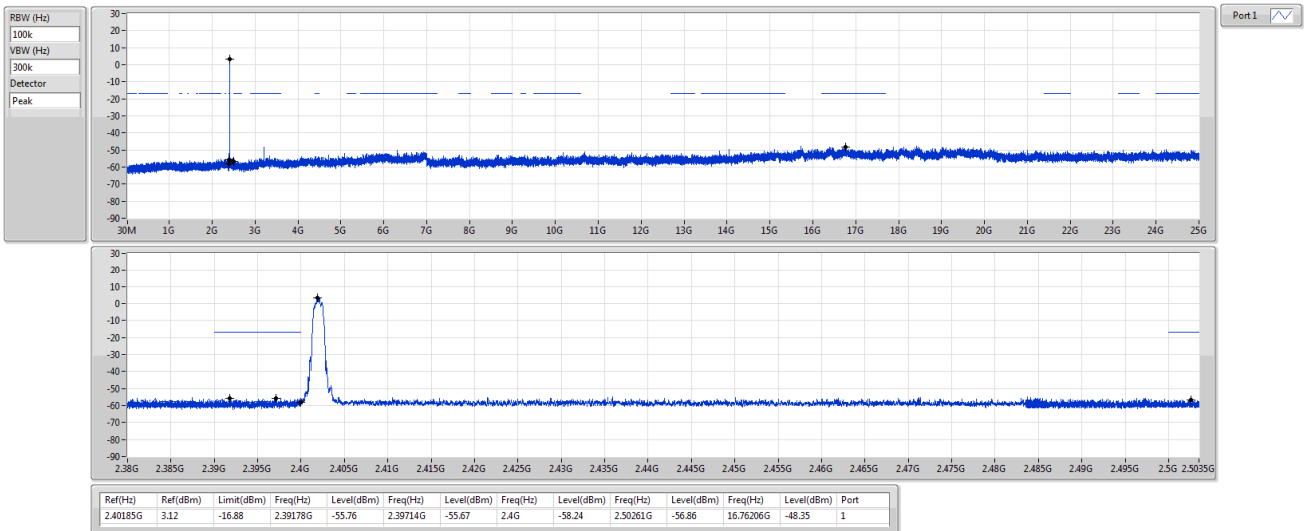

2.4-2.4835GHz_BT-EDR(3Mbps)

CSEndB-FS


2441MHz

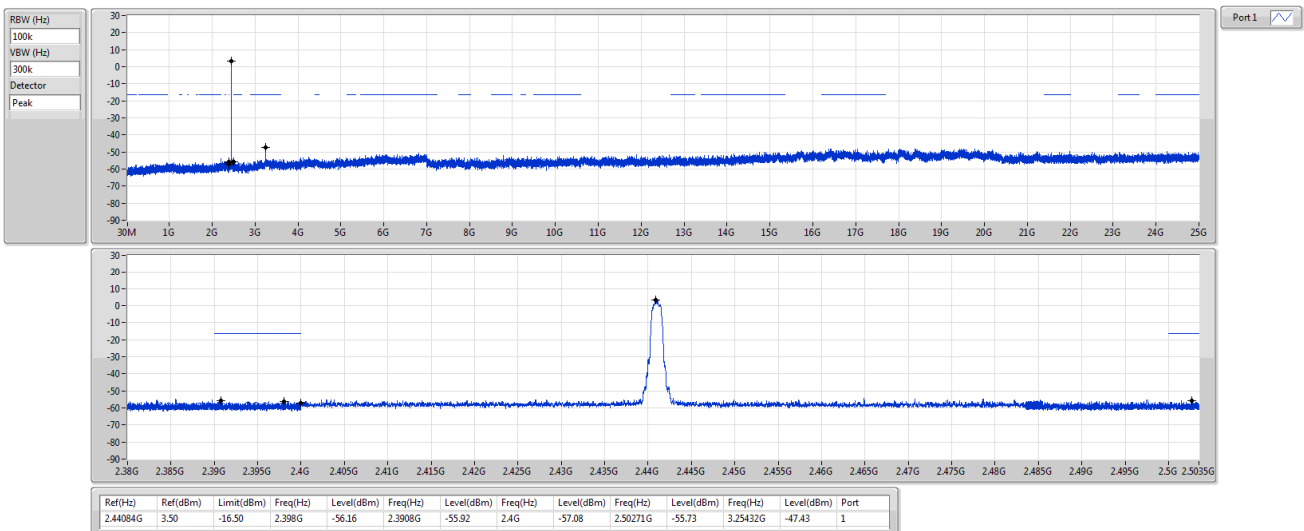

2.4-2.4835GHz_BT-EDR(3Mbps)

CSEndB-FS


2480MHz

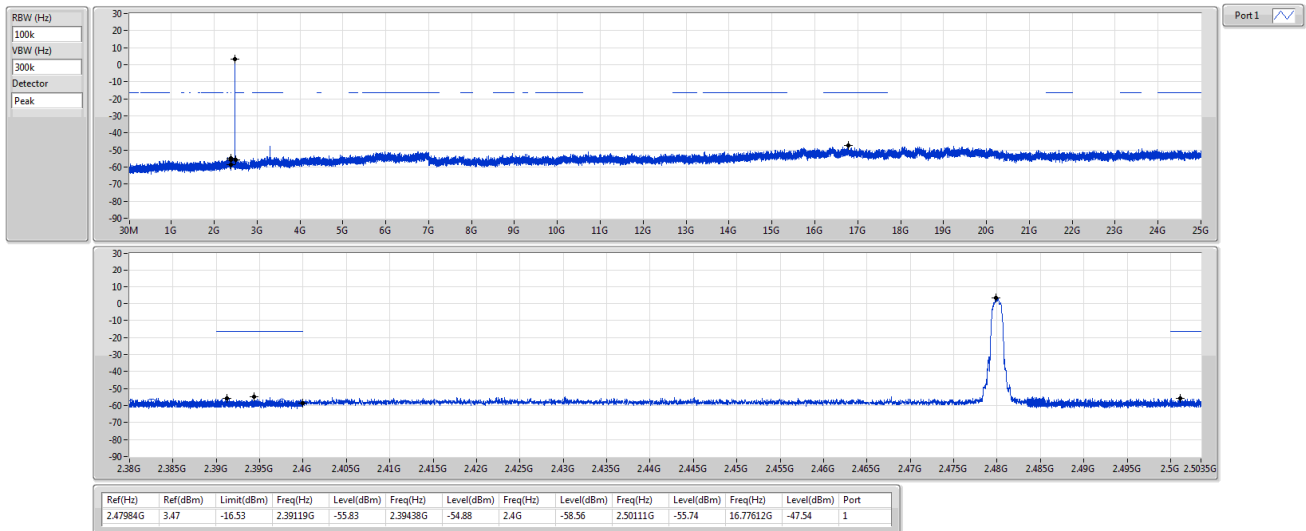

2.4-2.4835GHz_BT-BR(1Mbps)

2402MHz


Hopping Ch Bandedge (Non-restricted Band)

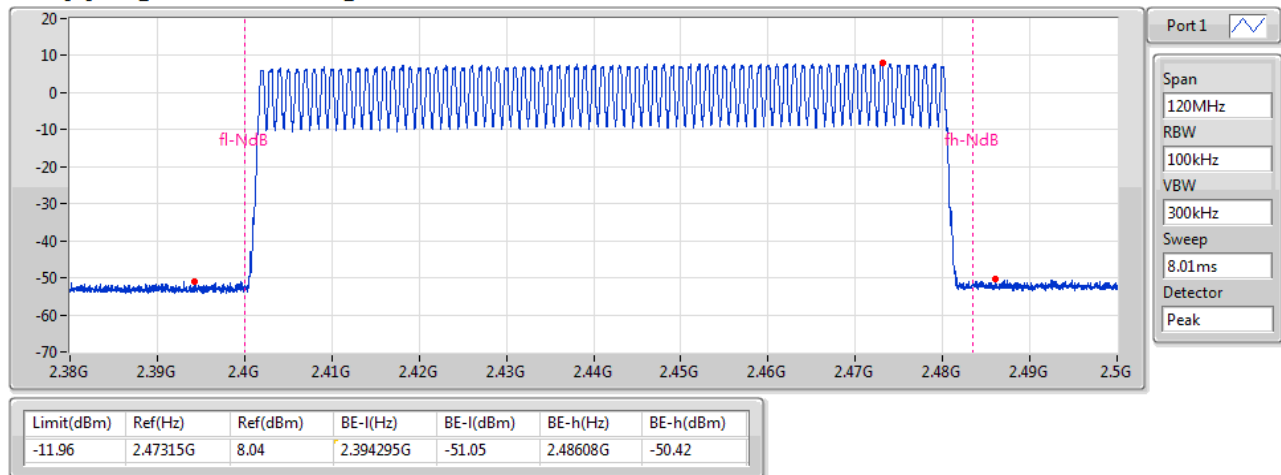

2.4-2.4835GHz_BT-EDR(2Mbps)

2402MHz


Hopping Ch Bandedge (Non-restricted Band)

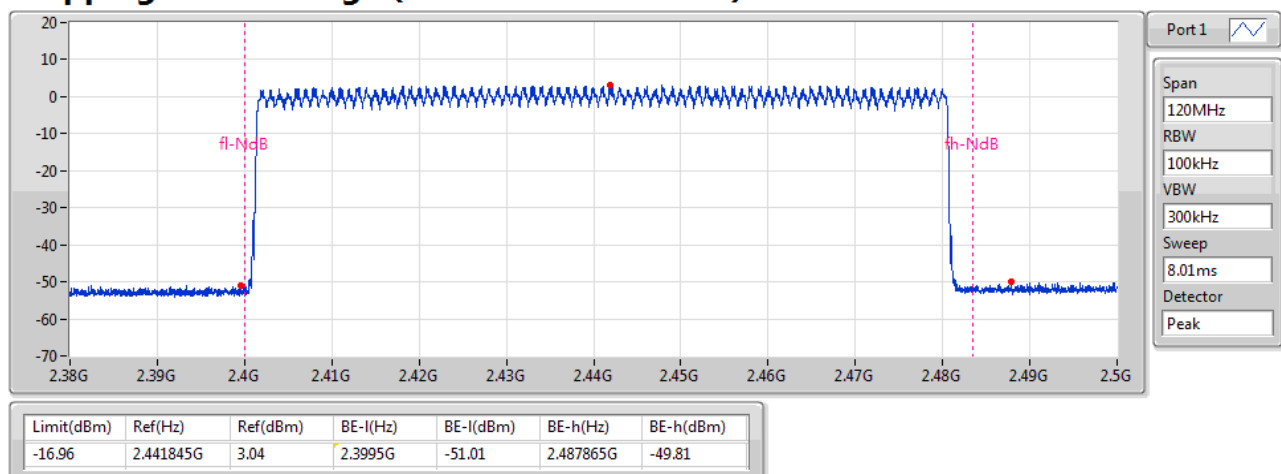

2.4-2.4835GHz_BT-EDR(3Mbps)

2402MHz

Hopping Ch Bandedge (Non-restricted Band)

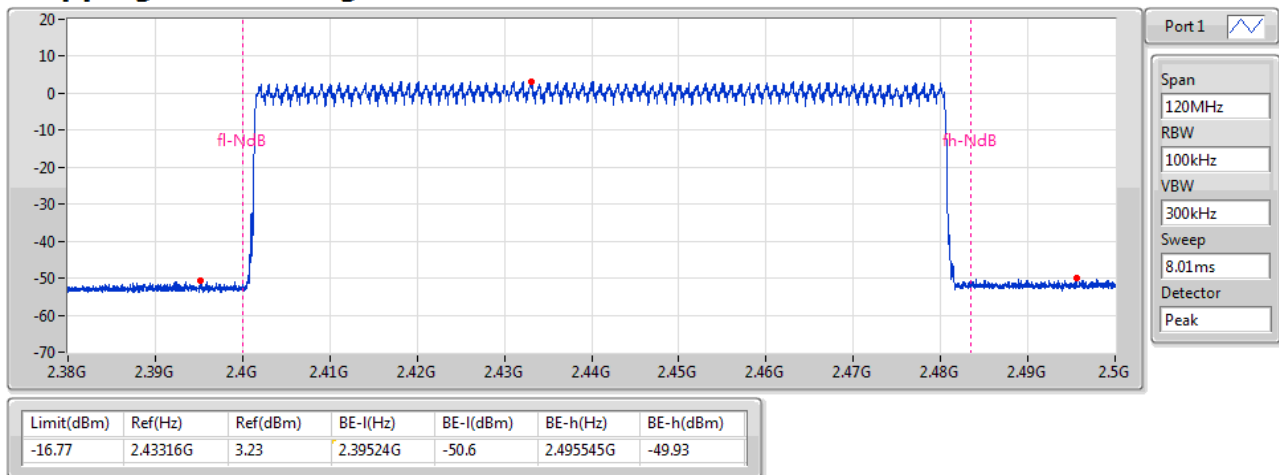



Conducted Output Power(Peak) - SC Module

Appendix C.1

Summary

Mode	Total Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	8.35	0.00684
BT-EDR(2Mbps)	6.22	0.00419
BT-EDR(3Mbps)	6.72	0.00470

Result

Mode	Result	Antenna Gain (dBi)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	7.59	21.00	9.99	36.00
2441MHz	Pass	2.40	8.06	21.00	10.46	36.00
2480MHz	Pass	2.40	8.35	21.00	10.75	36.00
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	5.58	21.00	7.98	36.00
2441MHz	Pass	2.40	6.17	21.00	8.57	36.00
2480MHz	Pass	2.40	6.22	21.00	8.62	36.00
BT-EDR(3Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	6.12	21.00	8.52	36.00
2441MHz	Pass	2.40	6.65	21.00	9.05	36.00
2480MHz	Pass	2.40	6.72	21.00	9.12	36.00

DG = Directional Gain; Port X = Port X output power

**Summary**

Mode	Total Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	8.20	0.00661
BT-EDR(2Mbps)	3.67	0.00233
BT-EDR(3Mbps)	3.68	0.00233

Result

Mode	Result	Antenna Gain (dBi)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	7.32	-	9.72	-
2441MHz	Pass	2.40	7.81	-	10.21	-
2480MHz	Pass	2.40	8.20	-	10.60	-
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	3.06	-	5.46	-
2441MHz	Pass	2.40	3.64	-	6.04	-
2480MHz	Pass	2.40	3.67	-	6.07	-
BT-EDR(3Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	3.08	-	5.48	-
2441MHz	Pass	2.40	3.65	-	6.05	-
2480MHz	Pass	2.40	3.68	-	6.08	-

Note: Average power is for reference only

**Summary**

Mode	Total Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	7.99	0.00630
BT-EDR(2Mbps)	6.31	0.00428
BT-EDR(3Mbps)	6.71	0.00469

Result

Mode	Result	Antenna Gain (dBi)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	7.35	21.00	9.75	36.00
2441MHz	Pass	2.40	7.95	21.00	10.35	36.00
2480MHz	Pass	2.40	7.99	21.00	10.39	36.00
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	5.41	21.00	7.81	36.00
2441MHz	Pass	2.40	6.31	21.00	8.71	36.00
2480MHz	Pass	2.40	6.02	21.00	8.42	36.00
BT-EDR(3Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	5.73	21.00	8.13	36.00
2441MHz	Pass	2.40	6.71	21.00	9.11	36.00
2480MHz	Pass	2.40	6.44	21.00	8.84	36.00

DG = Directional Gain; Port X = Port X output power

**Summary**

Mode	Total Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	7.72	0.00592
BT-EDR(2Mbps)	3.65	0.00232
BT-EDR(3Mbps)	3.66	0.00232

Result

Mode	Result	Antenna Gain (dBi)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	7.11	-	9.51	-
2441MHz	Pass	2.40	7.72	-	10.12	-
2480MHz	Pass	2.40	7.71	-	10.11	-
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	2.76	-	5.16	-
2441MHz	Pass	2.40	3.65	-	6.05	-
2480MHz	Pass	2.40	3.39	-	5.79	-
BT-EDR(3Mbps)	-	-	-	-	-	-
2402MHz	Pass	2.40	2.76	-	5.16	-
2441MHz	Pass	2.40	3.66	-	6.06	-
2480MHz	Pass	2.40	3.41	-	5.81	-

Note: Average power is for reference only

**Summary**

Mode	Max-Hop No
2.4-2.4835GHz	-
BT-BR(1Mbps)	79
BT-EDR(2Mbps)	79
BT-EDR(3Mbps)	79


Result

Mode	Result	Hopping No	Limit
BT-BR(1Mbps)	-	-	-
2402MHz	Pass	79	15
BT-EDR(2Mbps)	-	-	-
2402MHz	Pass	79	15
BT-EDR(3Mbps)	-	-	-
2402MHz	Pass	79	15

2.4-2.4835GHz_BT-BR(1Mbps)

Hopping-FS


2402MHz

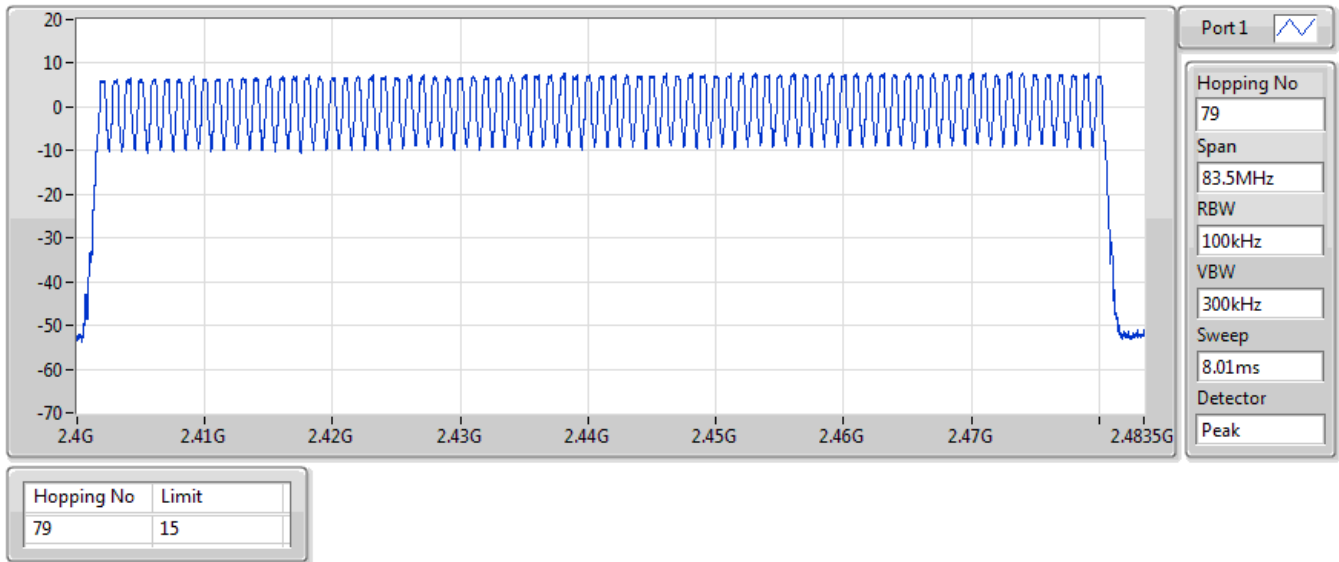

2.4-2.4835GHz_BT-EDR(2Mbps)

Hopping-FS


2402MHz

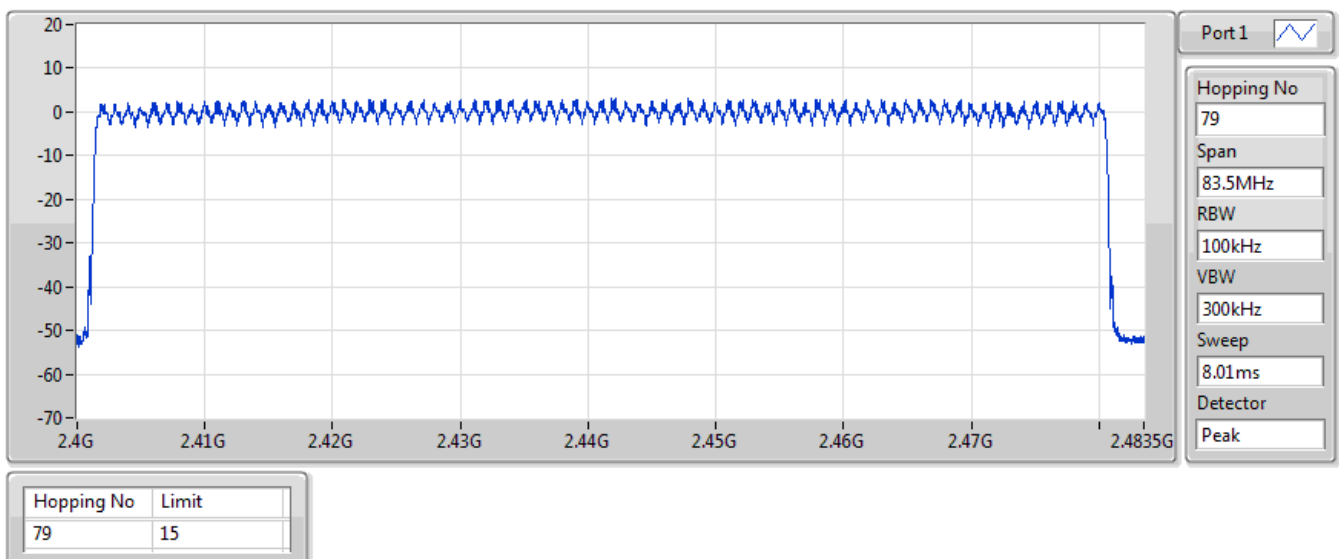

2.4-2.4835GHz_BT-EDR(3Mbps)

Hopping-FS

2402MHz

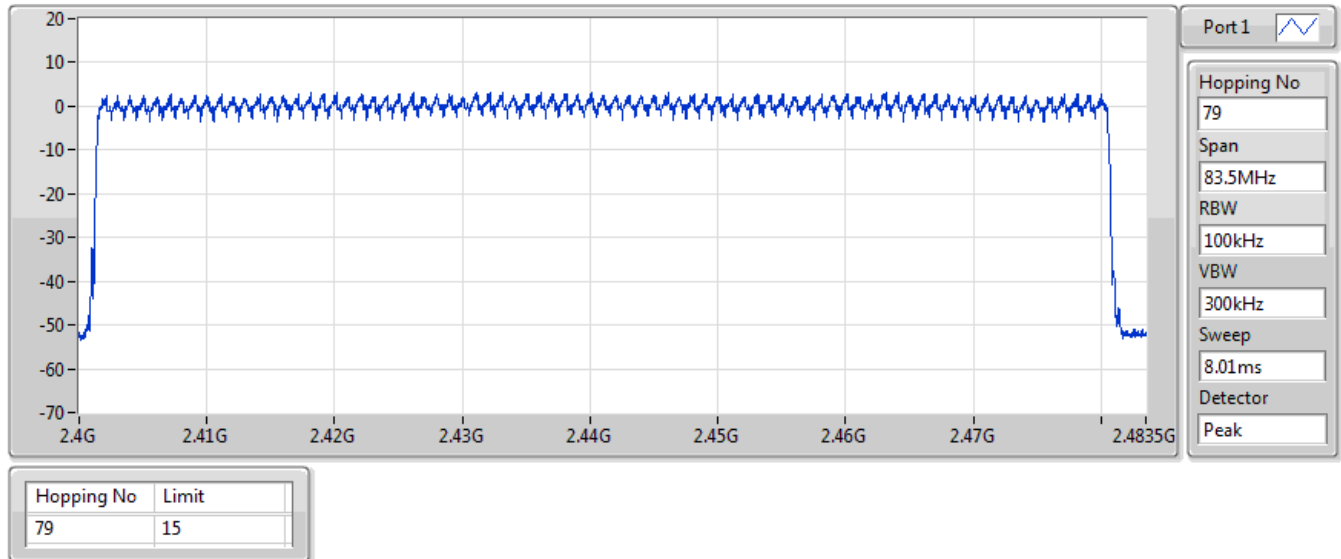

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-BR(1Mbps)	1.009M	870.815k	871KF1D	979k	867.066k
BT-EDR(2Mbps)	1.339M	1.193M	1M19G1D	1.337M	1.192M
BT-EDR(3Mbps)	1.334M	1.203M	1M20G1D	1.331M	1.201M

Max-N dB = Maximum 20dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 20dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.009M	867.066k
2441MHz	Pass	Inf	979k	868.316k
2480MHz	Pass	Inf	1.004M	870.815k
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.337M	1.192M
2441MHz	Pass	Inf	1.339M	1.193M
2480MHz	Pass	Inf	1.337M	1.192M
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.331M	1.201M
2441MHz	Pass	Inf	1.334M	1.202M
2480MHz	Pass	Inf	1.331M	1.203M



Port X-N dB = Port X 20dB down bandwidth;

Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_BT-BR(1Mbps)

EBW-FS



2402MHz

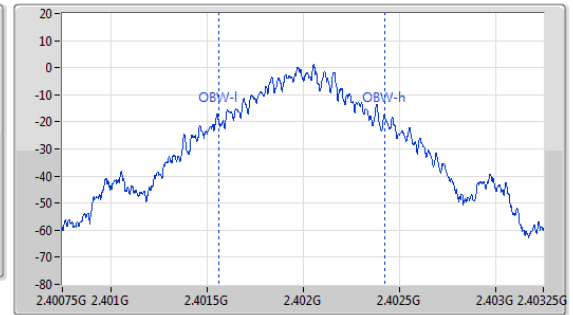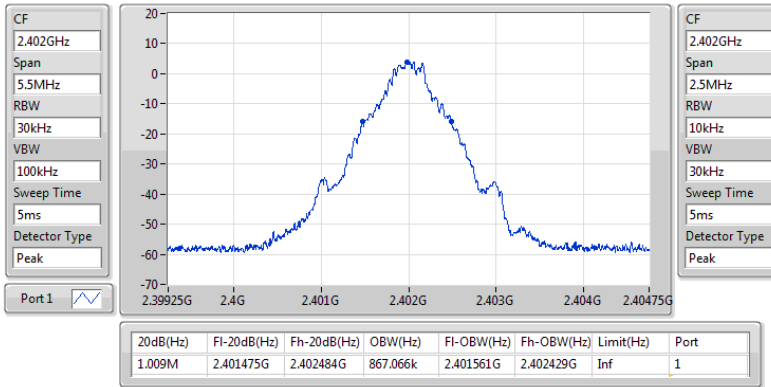

2.4-2.4835GHz_BT-BR(1Mbps)

EBW-FS



2441MHz

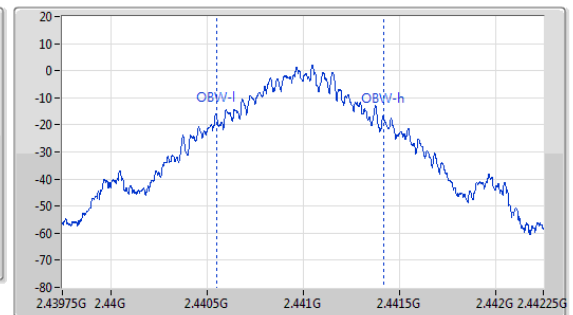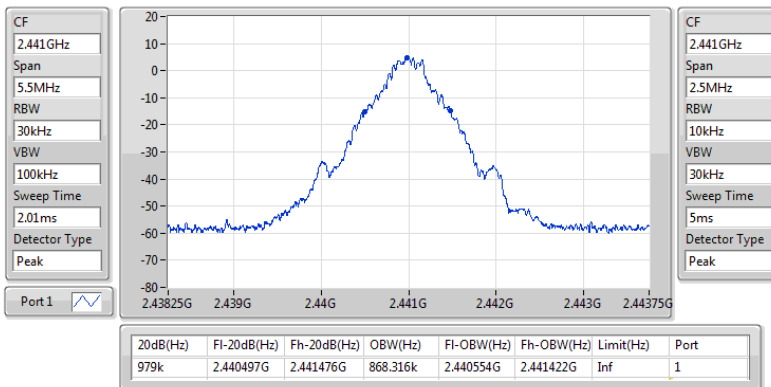

2.4-2.4835GHz_BT-BR(1Mbps)

EBW-FS



2480MHz

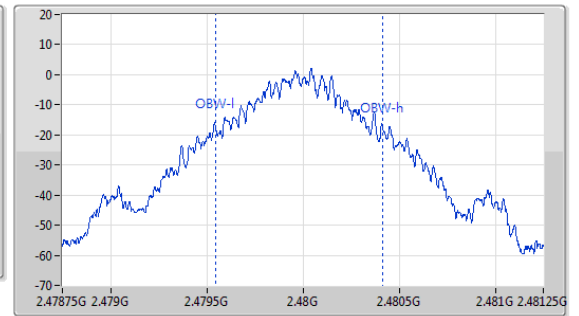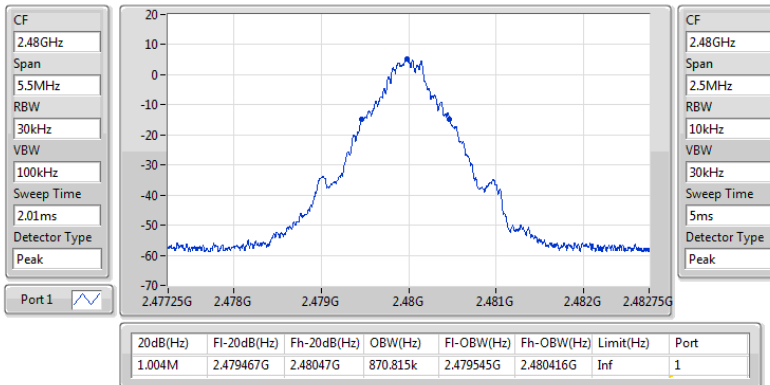

2.4-2.4835GHz_BT-EDR(2Mbps)

EBW-FS


2402MHz

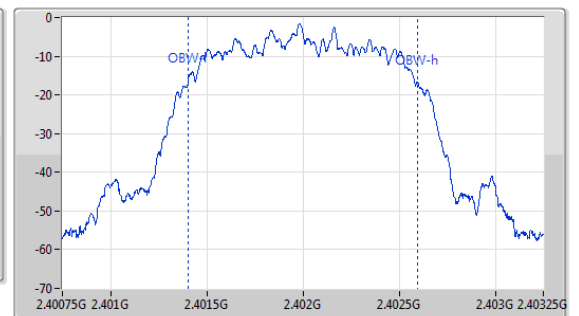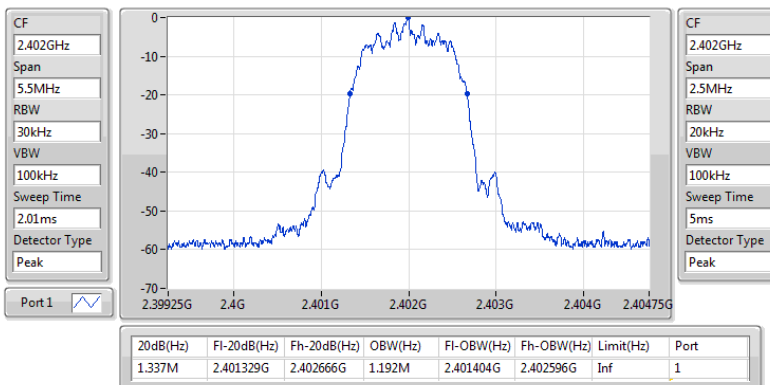

2.4-2.4835GHz_BT-EDR(2Mbps)

EBW-FS



2441MHz

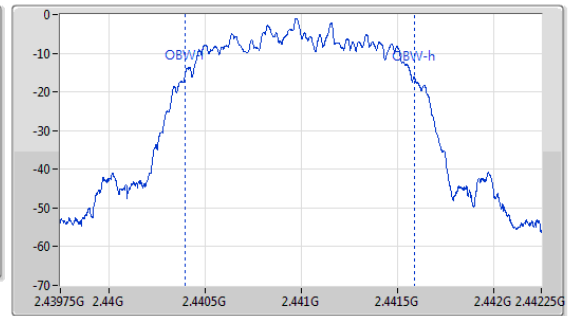

2.4-2.4835GHz_BT-EDR(2Mbps)

EBW-FS



2480MHz

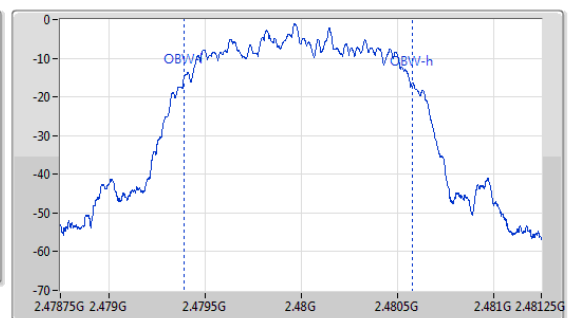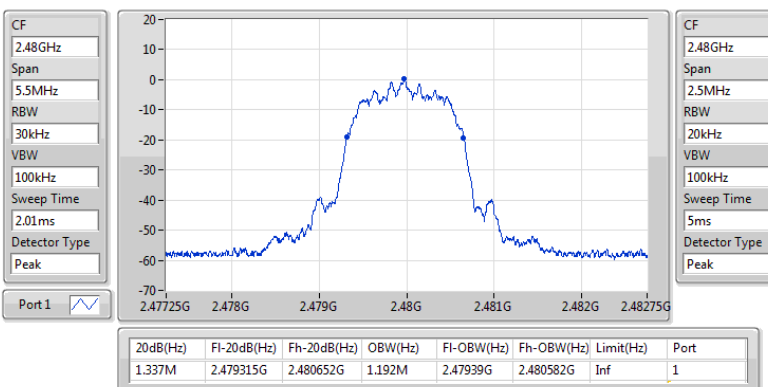

2.4-2.4835GHz_BT-EDR(3Mbps)

EBW-FS



2402MHz

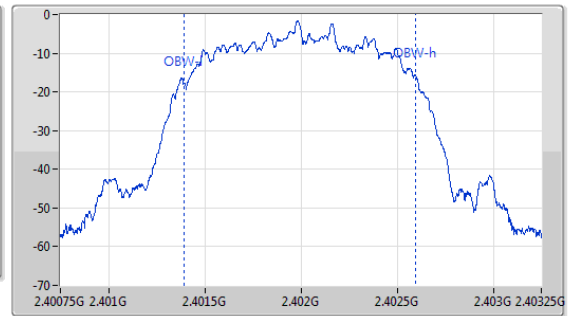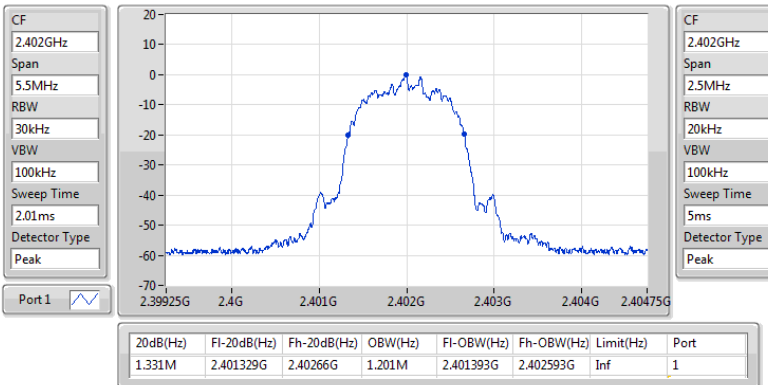

2.4-2.4835GHz_BT-EDR(3Mbps)

EBW-FS



2441MHz

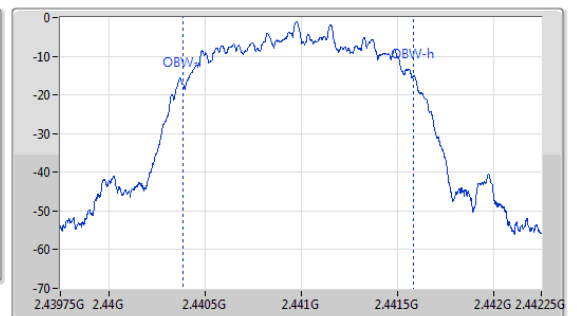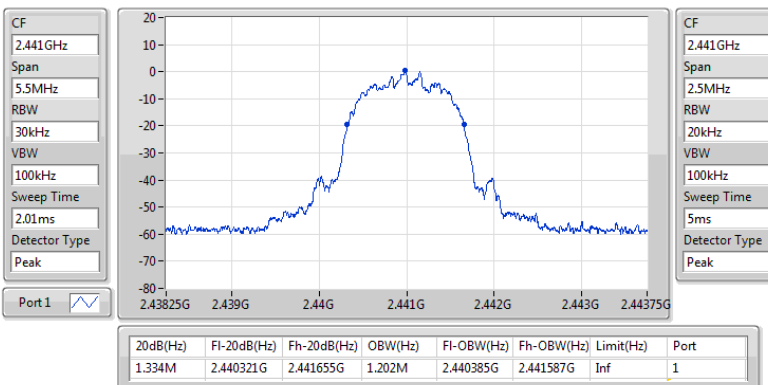

2.4-2.4835GHz_BT-EDR(3Mbps)

EBW-FS

2480MHz

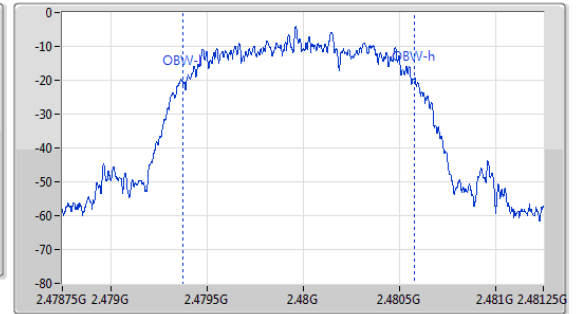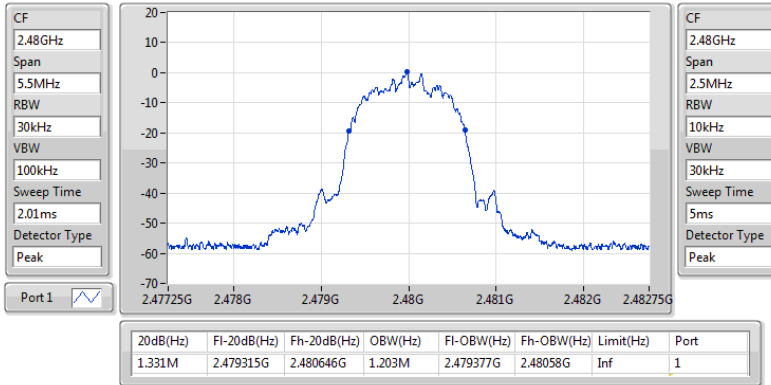

Summary

Mode	Max-Space (Hz)	Min-Space (Hz)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	1.002M	1.0005M
BT-EDR(2Mbps)	1.002M	1.0005M
BT-EDR(3Mbps)	1.0005M	1.0005M


Result

Mode	Result	Fl (Hz)	Fh (Hz)	Ch.Space (Hz)	Limit (Hz)
BT-BR(1Mbps)	-	-	-	-	-
2402MHz	Pass	2.401987G	2.402988G	1.0005M	671.994k
2441MHz	Pass	2.440981G	2.441982G	1.0005M	652.014k
2480MHz	Pass	2.478974G	2.479976G	1.002M	668.664k
BT-EDR(2Mbps)	-	-	-	-	-
2402MHz	Pass	2.401987G	2.402989G	1.002M	890.442k
2441MHz	Pass	2.440981G	2.441982G	1.0005M	891.774k
2480MHz	Pass	2.478975G	2.479976G	1.0005M	890.442k
BT-EDR(3Mbps)	-	-	-	-	-
2402MHz	Pass	2.401989G	2.402989G	1.0005M	886.446k
2441MHz	Pass	2.440983G	2.441983G	1.0005M	888.444k
2480MHz	Pass	2.478975G	2.479976G	1.0005M	886.446k

2.4-2.4835GHz_BT-BR(1Mbps)

Channel Separation-FS


2.402G/2.403GHz

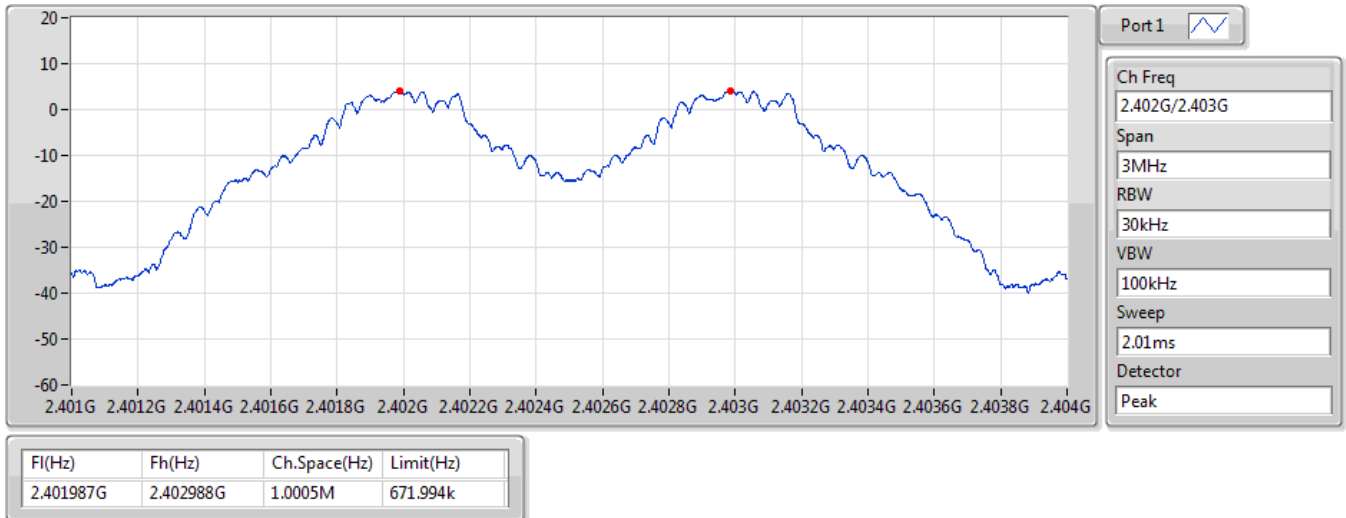

2.4-2.4835GHz_BT-BR(1Mbps)

Channel Separation-FS


2.441G/2.442GHz

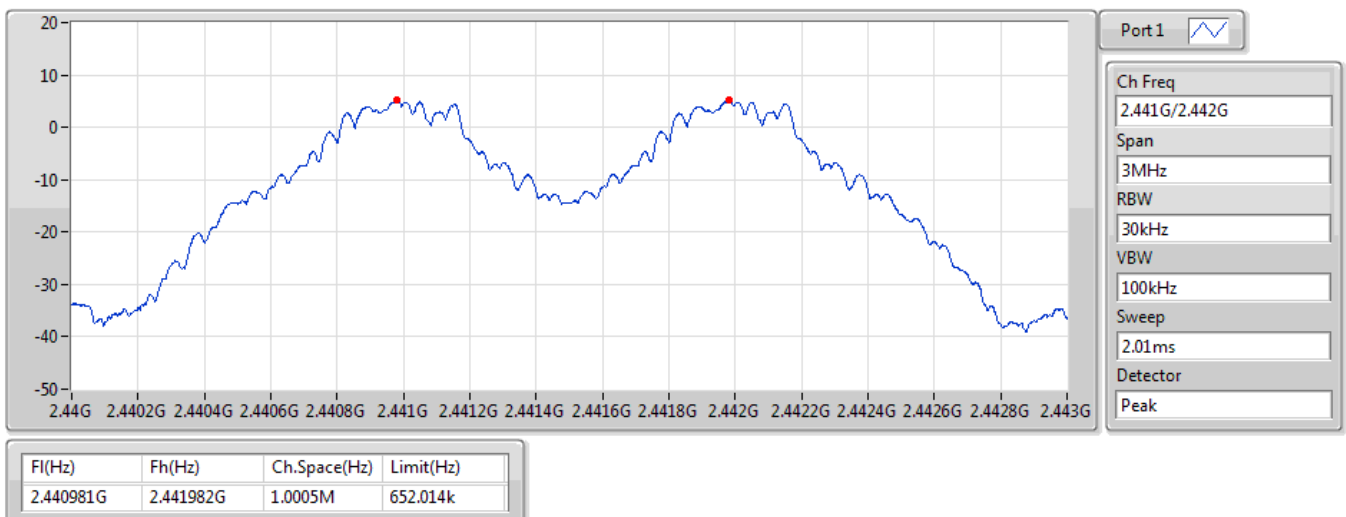

2.4-2.4835GHz_BT-BR(1Mbps)

Channel Separation-FS


2.48G/2.479GHz

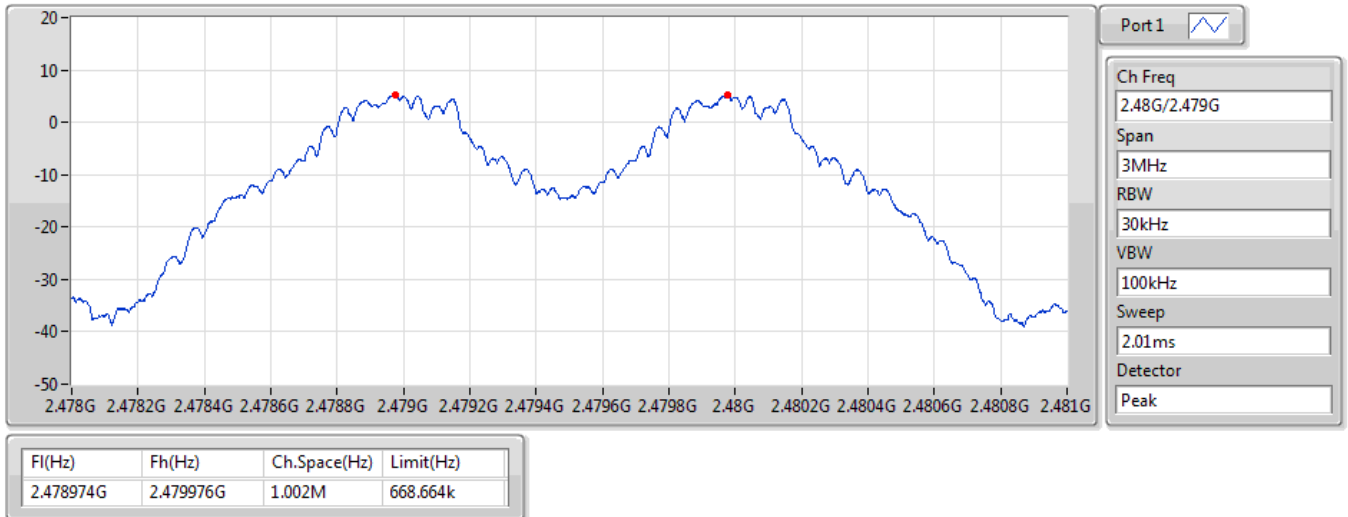

2.4-2.4835GHz_BT-EDR(2Mbps)

Channel Separation-FS


2.402G/2.403GHz

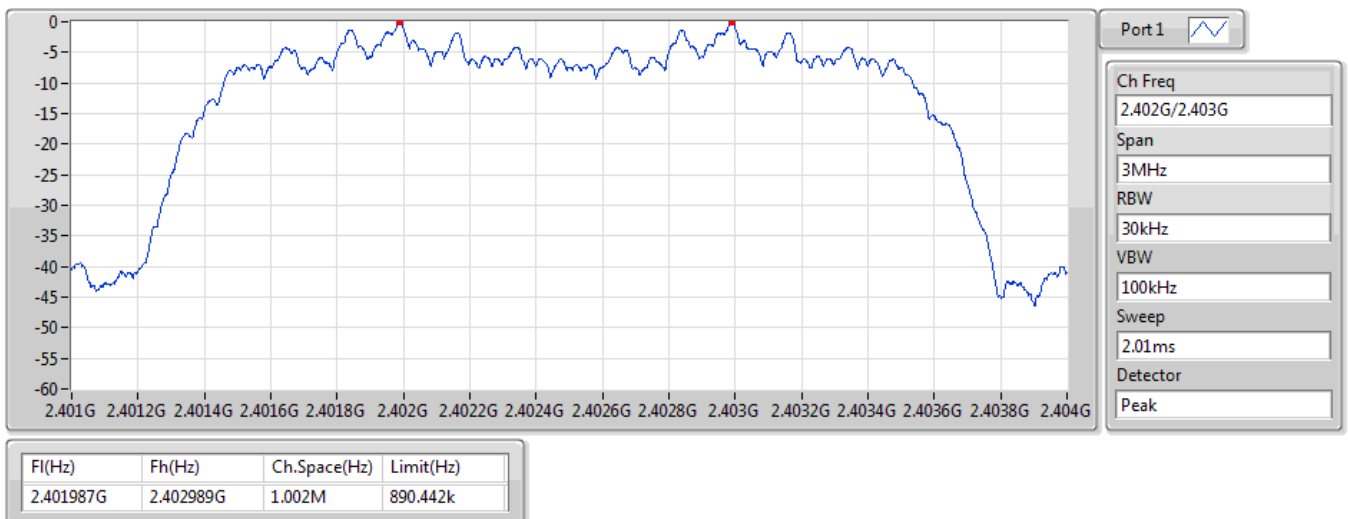

2.4-2.4835GHz_BT-EDR(2Mbps)

Channel Separation-FS


2.441G/2.442GHz

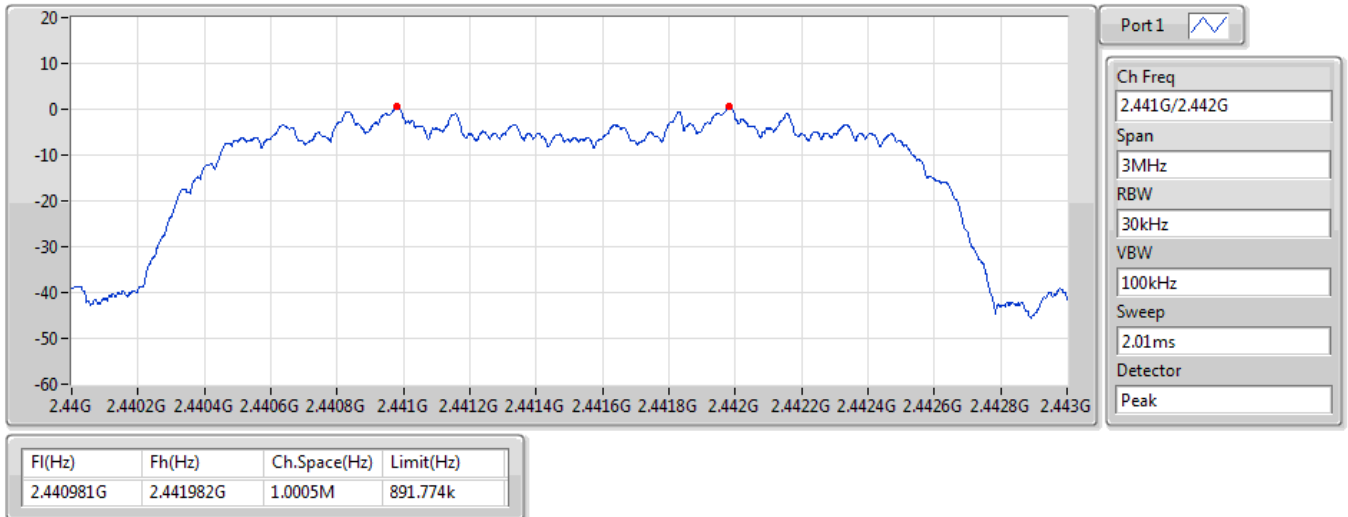

2.4-2.4835GHz_BT-EDR(2Mbps)

Channel Separation-FS


2.48G/2.479GHz

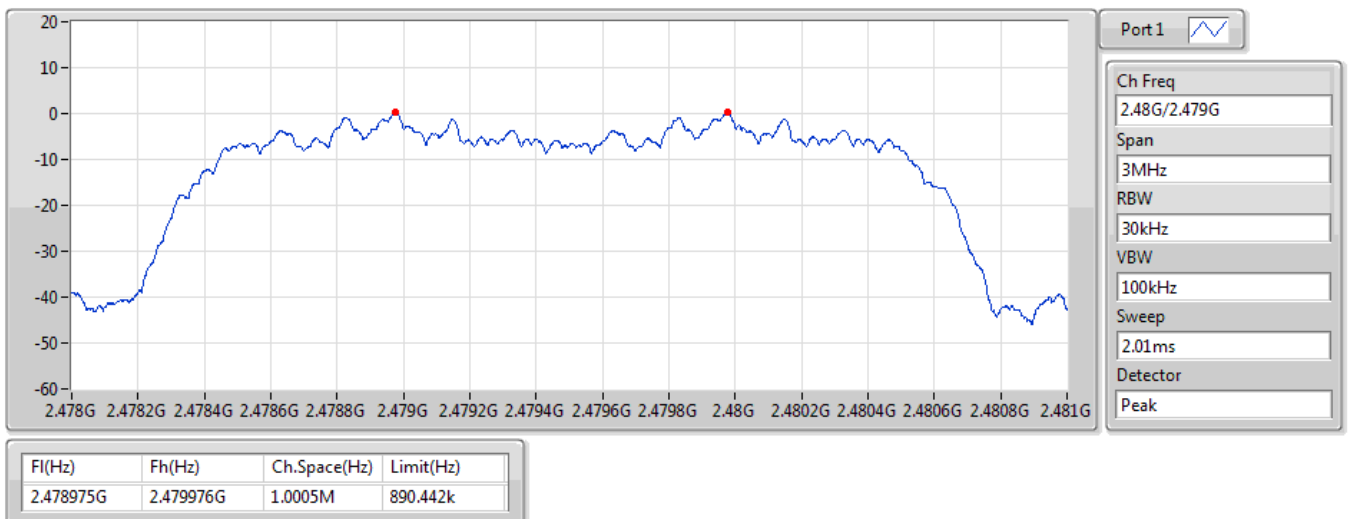

2.4-2.4835GHz_BT-EDR(3Mbps)

Channel Separation-FS


2.402G/2.403GHz

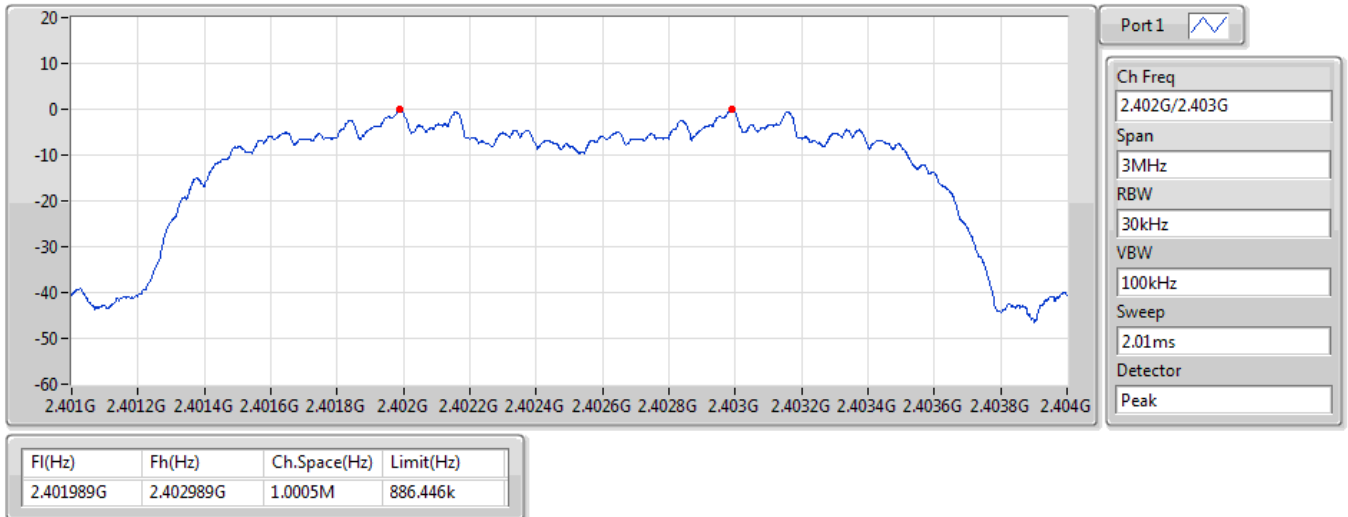

2.4-2.4835GHz_BT-EDR(3Mbps)

Channel Separation-FS


2.441G/2.442GHz

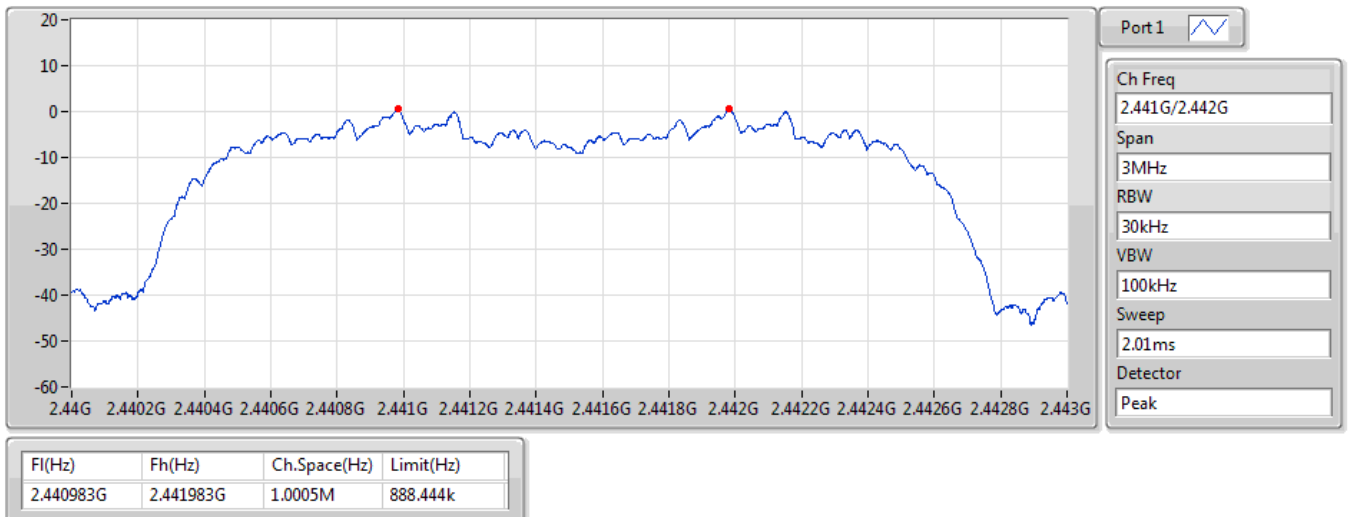

2.4-2.4835GHz_BT-EDR(3Mbps)

Channel Separation-FS

2.48G/2.479GHz

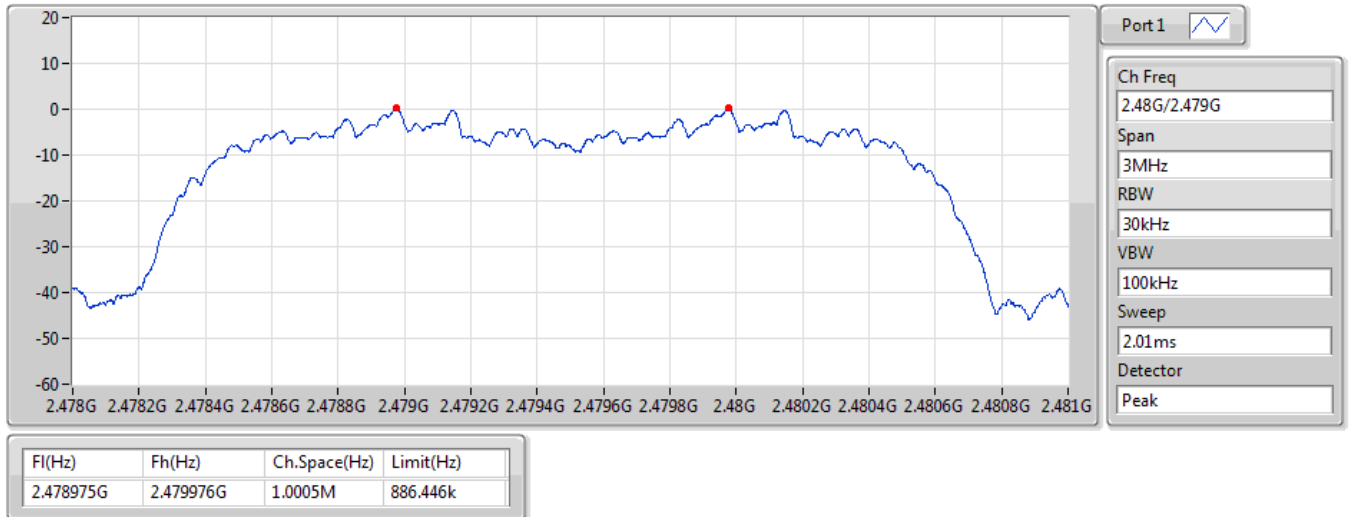

**Summary**

Mode	Max-Dwell (s)
2.4-2.4835GHz	-
BT-BR(1Mbps)	328.11228m_DH5
BT-BR-AFH(1Mbps)	288.475m_DH5-AFH
BT-EDR(2Mbps)	347.12126m_DH5
BT-EDR-AFH(2Mbps)	288.6m_DH5-AFH
BT-EDR(3Mbps)	310.31358m_DH5
BT-EDR-AFH(3Mbps)	311.877m_DH5-AFH

Result/ Non AFH mode

Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 5 s
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.32811	0.4	2.88425	18
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.34712	0.4	2.89075	19
BT-EDR(3Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.31031	0.4	2.88825	17

Note 1: Dwell time =Number of transmission in a 5 second x Tx On Time x 6.32



Note 2: DH5 was the worst mode.



Result/ AFH mode


Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 2 s
BT-BR-AFH(1Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.28848	0.4	2.88475	25
BT-EDR-AFH(2Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.28860	0.4	2.88600	25
BT-EDR-AFH(3Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.31188	0.4	2.88775	27

Note 1: Dwell time =Number of transmission in a 2 second x Tx On Time x 4

Note 2: DH5 was the worst mode.

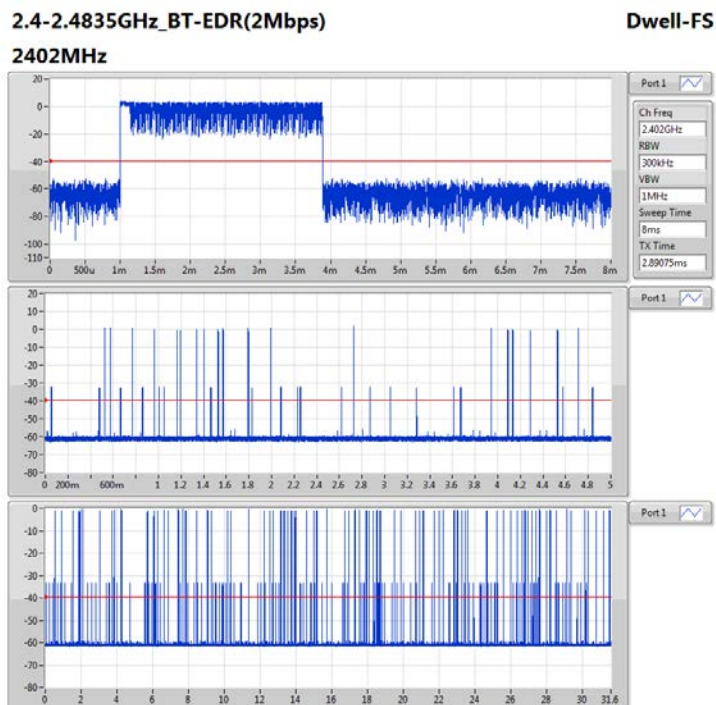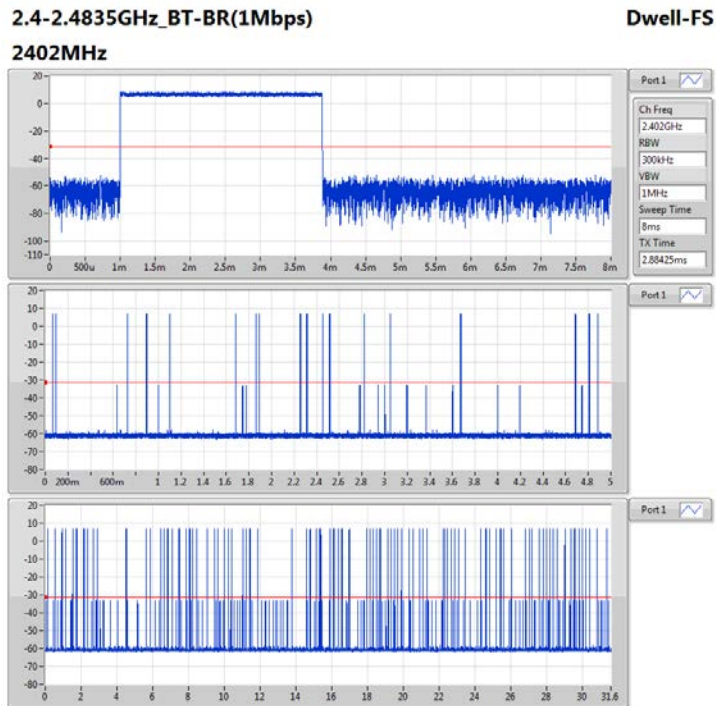

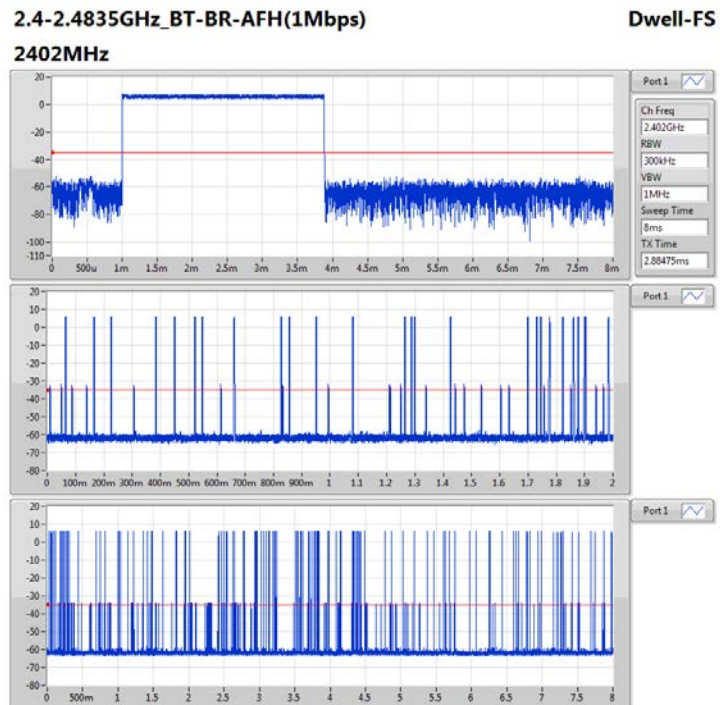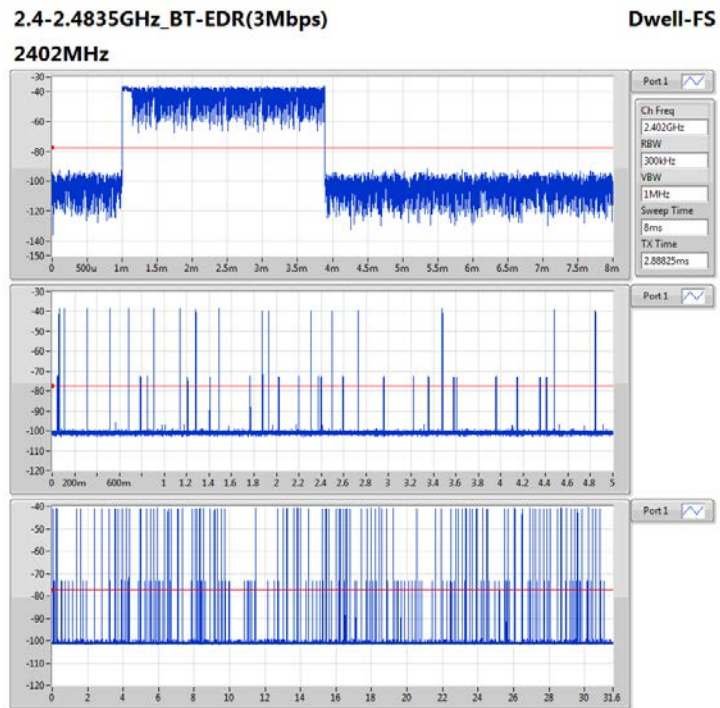

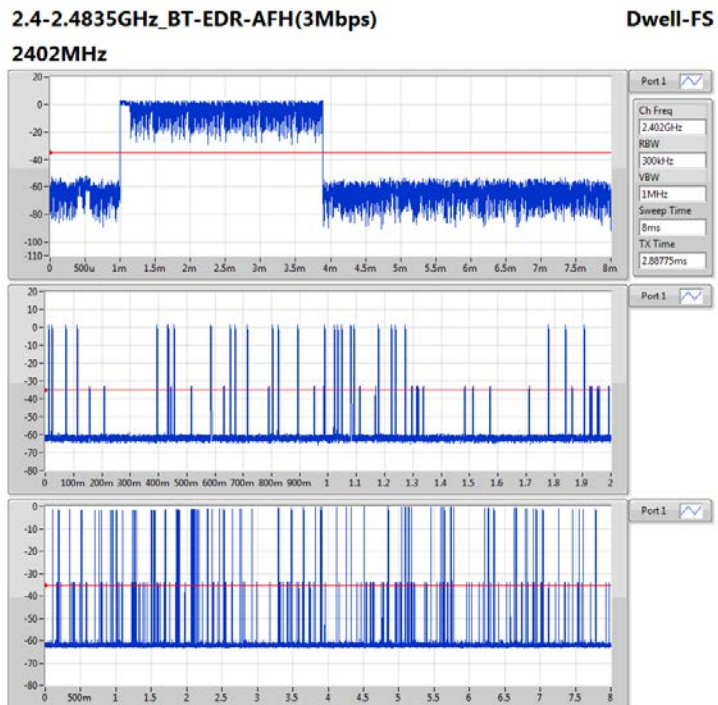



SC Module with PCB Dipole antenna

Modulation	8DPSK	Test Freq. (MHz)	2480																																																																																																																																		
Power Phase	Line																																																																																																																																				
Test by : Joe Liao Temperature: 22°C Humidity: 68%																																																																																																																																					
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.159</td><td>32.47</td><td>55.52</td><td>-23.05</td><td>22.60</td><td>9.63</td><td>0.06</td><td>0.18</td><td>Average</td></tr><tr><td>2</td><td>0.159</td><td>50.91</td><td>65.52</td><td>-14.61</td><td>41.04</td><td>9.63</td><td>0.06</td><td>0.18</td><td>QP</td></tr><tr><td>3</td><td>0.204</td><td>28.46</td><td>53.45</td><td>-24.99</td><td>18.59</td><td>9.62</td><td>0.06</td><td>0.19</td><td>Average</td></tr><tr><td>4</td><td>0.204</td><td>45.18</td><td>63.45</td><td>-18.27</td><td>35.31</td><td>9.62</td><td>0.06</td><td>0.19</td><td>QP</td></tr><tr><td>5</td><td>0.456</td><td>32.97</td><td>46.76</td><td>-13.79</td><td>22.98</td><td>9.62</td><td>0.07</td><td>0.30</td><td>Average</td></tr><tr><td>6</td><td>0.456</td><td>40.22</td><td>56.76</td><td>-16.54</td><td>30.23</td><td>9.62</td><td>0.07</td><td>0.30</td><td>QP</td></tr><tr><td>7</td><td>0.484</td><td>34.01</td><td>46.27</td><td>-12.26</td><td>24.01</td><td>9.62</td><td>0.07</td><td>0.31</td><td>Average</td></tr><tr><td>8</td><td>0.484</td><td>41.16</td><td>56.27</td><td>-15.11</td><td>31.16</td><td>9.62</td><td>0.07</td><td>0.31</td><td>QP</td></tr><tr><td>9</td><td>0.510</td><td>31.99</td><td>46.00</td><td>-14.01</td><td>21.99</td><td>9.62</td><td>0.07</td><td>0.31</td><td>Average</td></tr><tr><td>10</td><td>0.510</td><td>39.30</td><td>56.00</td><td>-16.70</td><td>29.30</td><td>9.62</td><td>0.07</td><td>0.31</td><td>QP</td></tr><tr><td>11*</td><td>0.564</td><td>34.89</td><td>46.00</td><td>-11.11</td><td>24.88</td><td>9.62</td><td>0.08</td><td>0.31</td><td>Average</td></tr><tr><td>12</td><td>0.564</td><td>42.40</td><td>56.00</td><td>-13.60</td><td>32.39</td><td>9.62</td><td>0.08</td><td>0.31</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.159	32.47	55.52	-23.05	22.60	9.63	0.06	0.18	Average	2	0.159	50.91	65.52	-14.61	41.04	9.63	0.06	0.18	QP	3	0.204	28.46	53.45	-24.99	18.59	9.62	0.06	0.19	Average	4	0.204	45.18	63.45	-18.27	35.31	9.62	0.06	0.19	QP	5	0.456	32.97	46.76	-13.79	22.98	9.62	0.07	0.30	Average	6	0.456	40.22	56.76	-16.54	30.23	9.62	0.07	0.30	QP	7	0.484	34.01	46.27	-12.26	24.01	9.62	0.07	0.31	Average	8	0.484	41.16	56.27	-15.11	31.16	9.62	0.07	0.31	QP	9	0.510	31.99	46.00	-14.01	21.99	9.62	0.07	0.31	Average	10	0.510	39.30	56.00	-16.70	29.30	9.62	0.07	0.31	QP	11*	0.564	34.89	46.00	-11.11	24.88	9.62	0.08	0.31	Average	12	0.564	42.40	56.00	-13.60	32.39	9.62	0.08	0.31	QP
	Freq MHz	Level dBuV	Limit dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.159	32.47	55.52	-23.05	22.60	9.63	0.06	0.18	Average																																																																																																																												
2	0.159	50.91	65.52	-14.61	41.04	9.63	0.06	0.18	QP																																																																																																																												
3	0.204	28.46	53.45	-24.99	18.59	9.62	0.06	0.19	Average																																																																																																																												
4	0.204	45.18	63.45	-18.27	35.31	9.62	0.06	0.19	QP																																																																																																																												
5	0.456	32.97	46.76	-13.79	22.98	9.62	0.07	0.30	Average																																																																																																																												
6	0.456	40.22	56.76	-16.54	30.23	9.62	0.07	0.30	QP																																																																																																																												
7	0.484	34.01	46.27	-12.26	24.01	9.62	0.07	0.31	Average																																																																																																																												
8	0.484	41.16	56.27	-15.11	31.16	9.62	0.07	0.31	QP																																																																																																																												
9	0.510	31.99	46.00	-14.01	21.99	9.62	0.07	0.31	Average																																																																																																																												
10	0.510	39.30	56.00	-16.70	29.30	9.62	0.07	0.31	QP																																																																																																																												
11*	0.564	34.89	46.00	-11.11	24.88	9.62	0.08	0.31	Average																																																																																																																												
12	0.564	42.40	56.00	-13.60	32.39	9.62	0.08	0.31	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					




Modulation	8DPSK	Test Freq. (MHz)	2480
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 22°C

Humidity: 68%

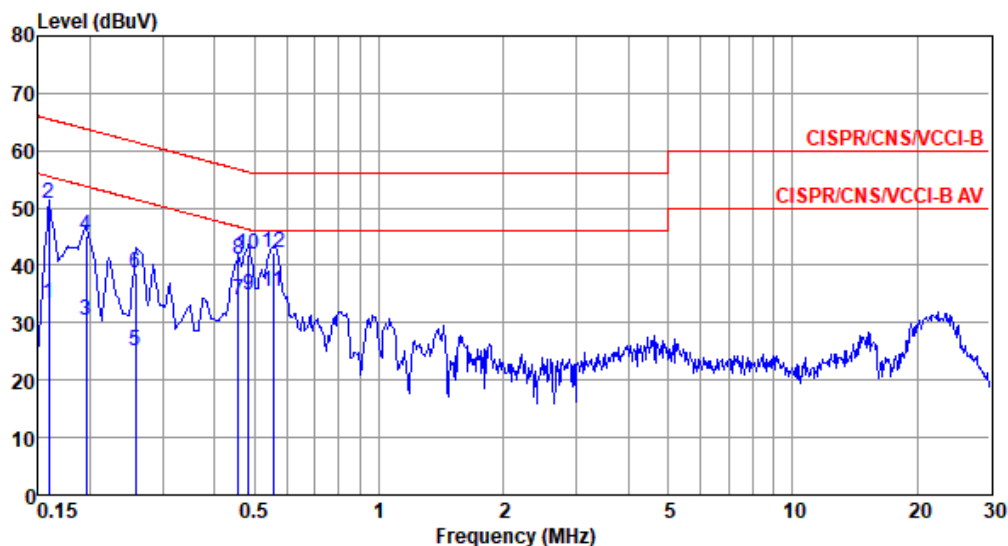

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	33.35	55.52	-22.17	23.48	9.63	0.06	0.18	Average
2	0.159	50.63	65.52	-14.89	40.76	9.63	0.06	0.18	QP
3	0.195	30.41	53.80	-23.39	20.53	9.63	0.06	0.19	Average
4	0.195	45.26	63.80	-18.54	35.38	9.63	0.06	0.19	QP
5	0.258	25.07	51.51	-26.44	15.15	9.63	0.06	0.23	Average
6	0.258	38.76	61.51	-22.75	28.84	9.63	0.06	0.23	QP
7	0.456	33.82	46.76	-12.94	23.83	9.62	0.07	0.30	Average
8	0.456	41.06	56.76	-15.70	31.07	9.62	0.07	0.30	QP
9	0.484	34.70	46.27	-11.57	24.70	9.62	0.07	0.31	Average
10	0.484	41.93	56.27	-14.34	31.93	9.62	0.07	0.31	QP
11*	0.555	35.32	46.00	-10.68	25.31	9.62	0.08	0.31	Average
12	0.555	42.29	56.00	-13.71	32.28	9.62	0.08	0.31	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




ST M.2, SDIO Module with PCB Dipole antenna

Modulation	8DPSK	Test Freq. (MHz)	2480
Power Phase	Line		

Test by : Joe Liao

Temperature: 22°C

Humidity: 68%

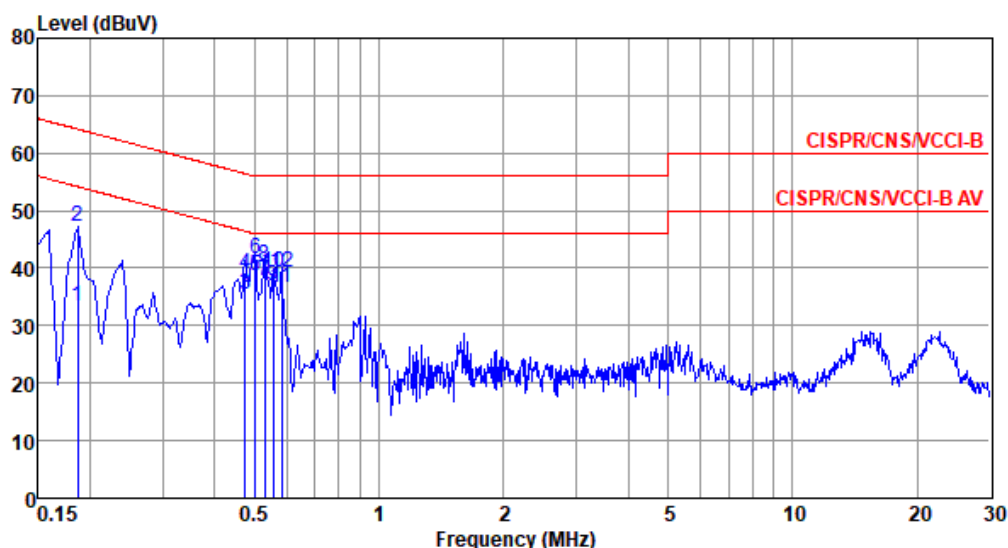

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.186	33.48	54.20	-20.72	23.61	9.62	0.06	0.19	Average
2	0.186	47.21	64.20	-16.99	37.34	9.62	0.06	0.19	QP
3	0.474	35.53	46.45	-10.92	25.53	9.62	0.07	0.31	Average
4	0.474	39.04	56.45	-17.41	29.04	9.62	0.07	0.31	QP
5*	0.502	38.64	46.00	-7.36	28.64	9.62	0.07	0.31	Average
6	0.502	41.63	56.00	-14.37	31.63	9.62	0.07	0.31	QP
7	0.529	37.73	46.00	-8.27	27.72	9.62	0.08	0.31	Average
8	0.529	40.59	56.00	-15.41	30.58	9.62	0.08	0.31	QP
9	0.555	36.75	46.00	-9.25	26.74	9.62	0.08	0.31	Average
10	0.555	39.34	56.00	-16.66	29.33	9.62	0.08	0.31	QP
11	0.582	36.64	46.00	-9.36	26.63	9.62	0.08	0.31	Average
12	0.582	39.20	56.00	-16.80	29.19	9.62	0.08	0.31	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation	8DPSK	Test Freq. (MHz)	2480
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 22°C

Humidity: 68%

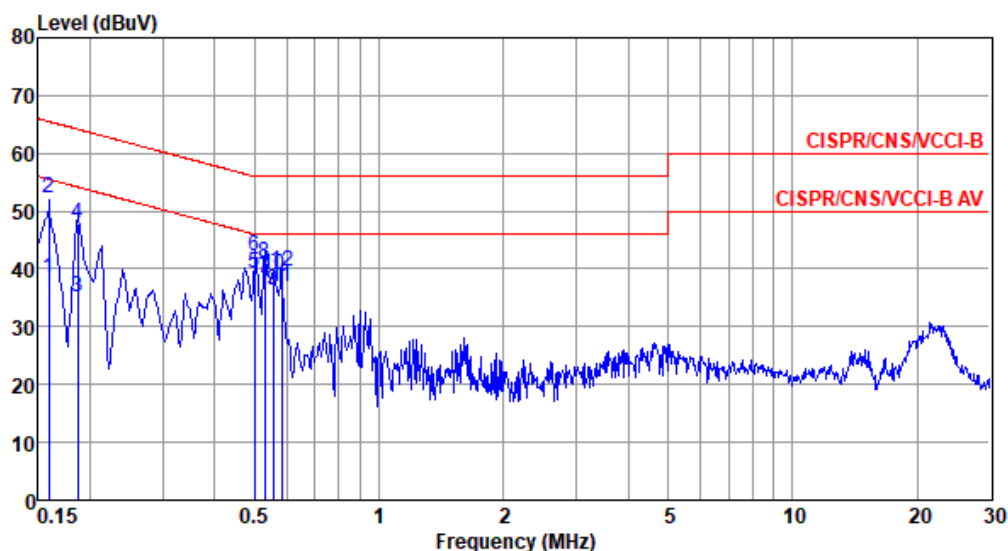

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	38.36	55.52	-17.16	28.49	9.63	0.06	0.18	Average
2	0.159	52.30	65.52	-13.22	42.43	9.63	0.06	0.18	QP
3	0.186	35.10	54.20	-19.10	25.22	9.63	0.06	0.19	Average
4	0.186	47.74	64.20	-16.46	37.86	9.63	0.06	0.19	QP
5*	0.500	39.27	46.00	-6.73	29.27	9.62	0.07	0.31	Average
6	0.500	42.35	56.00	-13.65	32.35	9.62	0.07	0.31	QP
7	0.529	38.46	46.00	-7.54	28.45	9.62	0.08	0.31	Average
8	0.529	41.15	56.00	-14.85	31.14	9.62	0.08	0.31	QP
9	0.555	36.36	46.00	-9.64	26.35	9.62	0.08	0.31	Average
10	0.555	39.05	56.00	-16.95	29.04	9.62	0.08	0.31	QP
11	0.582	36.98	46.00	-9.02	26.97	9.62	0.08	0.31	Average
12	0.582	39.56	56.00	-16.44	29.55	9.62	0.08	0.31	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



ST M.2, PCIe Module with PCB Dipole antenna

Modulation	8DPSK	Test Freq. (MHz)	2480																																																																																																																																										
Power Phase	Line																																																																																																																																												
Test by : Joe Liao Temperature: 22°C Humidity: 68%																																																																																																																																													
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV</th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dB</th><th>loss</th><th>dB</th><th></th></tr><tr><td>1</td><td>0.159</td><td>32.70</td><td>55.52</td><td>-22.82</td><td>22.83</td><td>9.63</td><td>0.06</td><td>0.18</td><td>Average</td></tr><tr><td>2</td><td>0.159</td><td>50.46</td><td>65.52</td><td>-15.06</td><td>40.59</td><td>9.63</td><td>0.06</td><td>0.18</td><td>QP</td></tr><tr><td>3</td><td>0.195</td><td>27.29</td><td>53.80</td><td>-26.51</td><td>17.42</td><td>9.62</td><td>0.06</td><td>0.19</td><td>Average</td></tr><tr><td>4</td><td>0.195</td><td>45.52</td><td>63.80</td><td>-18.28</td><td>35.65</td><td>9.62</td><td>0.06</td><td>0.19</td><td>QP</td></tr><tr><td>5</td><td>0.240</td><td>24.00</td><td>52.08</td><td>-28.08</td><td>14.10</td><td>9.62</td><td>0.06</td><td>0.22</td><td>Average</td></tr><tr><td>6</td><td>0.240</td><td>40.44</td><td>62.08</td><td>-21.64</td><td>30.54</td><td>9.62</td><td>0.06</td><td>0.22</td><td>QP</td></tr><tr><td>7</td><td>0.456</td><td>32.51</td><td>46.76</td><td>-14.25</td><td>22.52</td><td>9.62</td><td>0.07</td><td>0.30</td><td>Average</td></tr><tr><td>8</td><td>0.456</td><td>39.74</td><td>56.76</td><td>-17.02</td><td>29.75</td><td>9.62</td><td>0.07</td><td>0.30</td><td>QP</td></tr><tr><td>9</td><td>0.484</td><td>33.26</td><td>46.27</td><td>-13.01</td><td>23.26</td><td>9.62</td><td>0.07</td><td>0.31</td><td>Average</td></tr><tr><td>10</td><td>0.484</td><td>40.48</td><td>56.27</td><td>-15.79</td><td>30.48</td><td>9.62</td><td>0.07</td><td>0.31</td><td>QP</td></tr><tr><td>11*</td><td>0.555</td><td>34.08</td><td>46.00</td><td>-11.92</td><td>24.07</td><td>9.62</td><td>0.08</td><td>0.31</td><td>Average</td></tr><tr><td>12</td><td>0.555</td><td>41.19</td><td>56.00</td><td>-14.81</td><td>31.18</td><td>9.62</td><td>0.08</td><td>0.31</td><td>QP</td></tr></table>				Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark	MHz	dBuV	dBuV	dB	dBuV	dB	loss	dB		1	0.159	32.70	55.52	-22.82	22.83	9.63	0.06	0.18	Average	2	0.159	50.46	65.52	-15.06	40.59	9.63	0.06	0.18	QP	3	0.195	27.29	53.80	-26.51	17.42	9.62	0.06	0.19	Average	4	0.195	45.52	63.80	-18.28	35.65	9.62	0.06	0.19	QP	5	0.240	24.00	52.08	-28.08	14.10	9.62	0.06	0.22	Average	6	0.240	40.44	62.08	-21.64	30.54	9.62	0.06	0.22	QP	7	0.456	32.51	46.76	-14.25	22.52	9.62	0.07	0.30	Average	8	0.456	39.74	56.76	-17.02	29.75	9.62	0.07	0.30	QP	9	0.484	33.26	46.27	-13.01	23.26	9.62	0.07	0.31	Average	10	0.484	40.48	56.27	-15.79	30.48	9.62	0.07	0.31	QP	11*	0.555	34.08	46.00	-11.92	24.07	9.62	0.08	0.31	Average	12	0.555	41.19	56.00	-14.81	31.18	9.62	0.08	0.31	QP
Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark																																																																																																																																					
MHz	dBuV	dBuV	dB	dBuV	dB	loss	dB																																																																																																																																						
1	0.159	32.70	55.52	-22.82	22.83	9.63	0.06	0.18	Average																																																																																																																																				
2	0.159	50.46	65.52	-15.06	40.59	9.63	0.06	0.18	QP																																																																																																																																				
3	0.195	27.29	53.80	-26.51	17.42	9.62	0.06	0.19	Average																																																																																																																																				
4	0.195	45.52	63.80	-18.28	35.65	9.62	0.06	0.19	QP																																																																																																																																				
5	0.240	24.00	52.08	-28.08	14.10	9.62	0.06	0.22	Average																																																																																																																																				
6	0.240	40.44	62.08	-21.64	30.54	9.62	0.06	0.22	QP																																																																																																																																				
7	0.456	32.51	46.76	-14.25	22.52	9.62	0.07	0.30	Average																																																																																																																																				
8	0.456	39.74	56.76	-17.02	29.75	9.62	0.07	0.30	QP																																																																																																																																				
9	0.484	33.26	46.27	-13.01	23.26	9.62	0.07	0.31	Average																																																																																																																																				
10	0.484	40.48	56.27	-15.79	30.48	9.62	0.07	0.31	QP																																																																																																																																				
11*	0.555	34.08	46.00	-11.92	24.07	9.62	0.08	0.31	Average																																																																																																																																				
12	0.555	41.19	56.00	-14.81	31.18	9.62	0.08	0.31	QP																																																																																																																																				
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																													

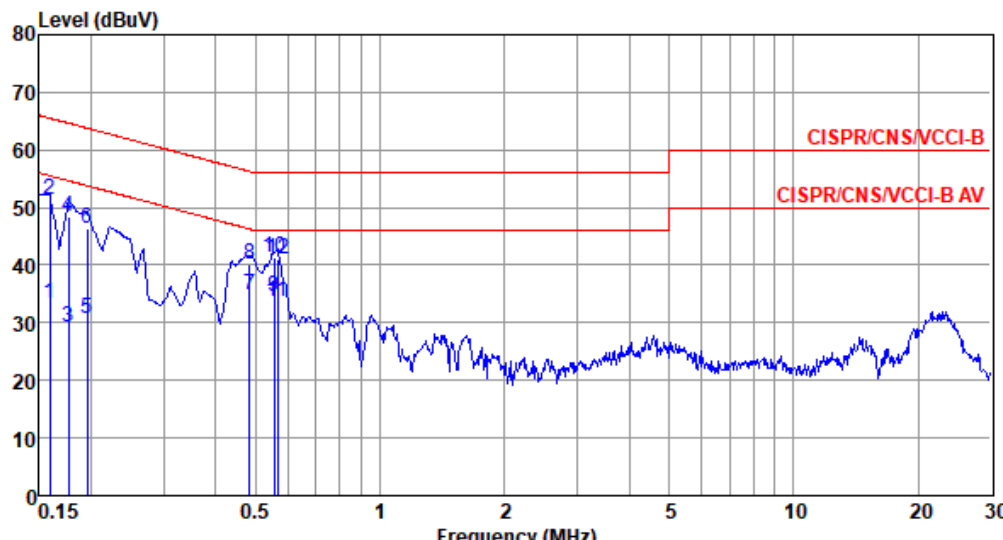Modulation	8DPSK	Test Freq. (MHz)	2480																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 22°C Humidity: 68%																																																																																																																																					
 <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.159</td><td>33.31</td><td>55.52</td><td>-22.21</td><td>23.44</td><td>9.63</td><td>0.06</td><td>0.18</td><td>Average</td></tr><tr><td>2</td><td>0.159</td><td>51.42</td><td>65.52</td><td>-14.10</td><td>41.55</td><td>9.63</td><td>0.06</td><td>0.18</td><td>QP</td></tr><tr><td>3</td><td>0.177</td><td>29.30</td><td>54.64</td><td>-25.34</td><td>19.42</td><td>9.63</td><td>0.06</td><td>0.19</td><td>Average</td></tr><tr><td>4</td><td>0.177</td><td>48.55</td><td>64.64</td><td>-16.09</td><td>38.67</td><td>9.63</td><td>0.06</td><td>0.19</td><td>QP</td></tr><tr><td>5</td><td>0.195</td><td>30.78</td><td>53.80</td><td>-23.02</td><td>20.90</td><td>9.63</td><td>0.06</td><td>0.19</td><td>Average</td></tr><tr><td>6</td><td>0.195</td><td>46.37</td><td>63.80</td><td>-17.43</td><td>36.49</td><td>9.63</td><td>0.06</td><td>0.19</td><td>QP</td></tr><tr><td>7</td><td>0.484</td><td>34.89</td><td>46.27</td><td>-11.38</td><td>24.89</td><td>9.62</td><td>0.07</td><td>0.31</td><td>Average</td></tr><tr><td>8</td><td>0.484</td><td>40.07</td><td>56.27</td><td>-16.20</td><td>30.07</td><td>9.62</td><td>0.07</td><td>0.31</td><td>QP</td></tr><tr><td>9*</td><td>0.555</td><td>34.62</td><td>46.00</td><td>-11.38</td><td>24.61</td><td>9.62</td><td>0.08</td><td>0.31</td><td>Average</td></tr><tr><td>10</td><td>0.555</td><td>41.46</td><td>56.00</td><td>-14.54</td><td>31.45</td><td>9.62</td><td>0.08</td><td>0.31</td><td>QP</td></tr><tr><td>11</td><td>0.564</td><td>33.57</td><td>46.00</td><td>-12.43</td><td>23.56</td><td>9.62</td><td>0.08</td><td>0.31</td><td>Average</td></tr><tr><td>12</td><td>0.564</td><td>41.09</td><td>56.00</td><td>-14.91</td><td>31.08</td><td>9.62</td><td>0.08</td><td>0.31</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.159	33.31	55.52	-22.21	23.44	9.63	0.06	0.18	Average	2	0.159	51.42	65.52	-14.10	41.55	9.63	0.06	0.18	QP	3	0.177	29.30	54.64	-25.34	19.42	9.63	0.06	0.19	Average	4	0.177	48.55	64.64	-16.09	38.67	9.63	0.06	0.19	QP	5	0.195	30.78	53.80	-23.02	20.90	9.63	0.06	0.19	Average	6	0.195	46.37	63.80	-17.43	36.49	9.63	0.06	0.19	QP	7	0.484	34.89	46.27	-11.38	24.89	9.62	0.07	0.31	Average	8	0.484	40.07	56.27	-16.20	30.07	9.62	0.07	0.31	QP	9*	0.555	34.62	46.00	-11.38	24.61	9.62	0.08	0.31	Average	10	0.555	41.46	56.00	-14.54	31.45	9.62	0.08	0.31	QP	11	0.564	33.57	46.00	-12.43	23.56	9.62	0.08	0.31	Average	12	0.564	41.09	56.00	-14.91	31.08	9.62	0.08	0.31	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.159	33.31	55.52	-22.21	23.44	9.63	0.06	0.18	Average																																																																																																																												
2	0.159	51.42	65.52	-14.10	41.55	9.63	0.06	0.18	QP																																																																																																																												
3	0.177	29.30	54.64	-25.34	19.42	9.63	0.06	0.19	Average																																																																																																																												
4	0.177	48.55	64.64	-16.09	38.67	9.63	0.06	0.19	QP																																																																																																																												
5	0.195	30.78	53.80	-23.02	20.90	9.63	0.06	0.19	Average																																																																																																																												
6	0.195	46.37	63.80	-17.43	36.49	9.63	0.06	0.19	QP																																																																																																																												
7	0.484	34.89	46.27	-11.38	24.89	9.62	0.07	0.31	Average																																																																																																																												
8	0.484	40.07	56.27	-16.20	30.07	9.62	0.07	0.31	QP																																																																																																																												
9*	0.555	34.62	46.00	-11.38	24.61	9.62	0.08	0.31	Average																																																																																																																												
10	0.555	41.46	56.00	-14.54	31.45	9.62	0.08	0.31	QP																																																																																																																												
11	0.564	33.57	46.00	-12.43	23.56	9.62	0.08	0.31	Average																																																																																																																												
12	0.564	41.09	56.00	-14.91	31.08	9.62	0.08	0.31	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					