



RF TEST REPORT

Product Name: Cargo Volume Measurement Camera

Model Name: Z5

FCC ID: 2AM6L-Z5

Issued For : Streamax Technology Co., Ltd.
21-23/F, Building B1, Zhiyuan, No.1001 Xueyuan Avenue,
Nanshan District, Shenzhen, Guangdong, China

Issued By : Shenzhen LGT Test Service Co., Ltd.
Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street,
Pingshan District, Shenzhen, Guangdong, China

Report Number: LGT25C118RF03

Sample Received Date: Mar. 20, 2025

Date of Test: Mar. 20, 2025 ~ Apr. 24, 2025

Date of Issue: Apr. 24, 2025

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.

Shenzhen LGT Test Service Co., Ltd. Tel: 0755-89668180 E-mail: lgt@lgt-cert.com Web: www.lgt-cert.com
Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District,
Shenzhen, Guangdong, China



TEST REPORT CERTIFICATION

Applicant: Streamax Technology Co., Ltd.
Address: 21-23/F, Building B1, Zhiyuan, No.1001 Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong, China

Manufacturer: Streamax Technology Co., Ltd.
Address: 21-23/F, Building B1, Zhiyuan, No.1001 Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong, China

Product Name: Cargo Volume Measurement Camera

Trademark: N/A

Model Name: Z5

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.407, Subpart E ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT	15
4. POWER SPECTRAL DENSITY TEST	26
4.1 LIMIT	26
4.2 TEST PROCEDURE	26
4.3 DEVIATION FROM STANDARD	26
4.4 TEST SETUP	27
4.5 EUT OPERATION CONDITIONS	27
4.6 TEST RESULTS	27
5. BANDWIDTH MEASUREMENT	28
5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	28
5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	29
5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	30
6. MAXIMUM CONDUCTED OUTPUT POWER	31
6.1 LIMIT	31
6.2 TEST PROCEDURE	31
6.3 DEVIATION FROM STANDARD	31
6.4 TEST SETUP	31
6.5 EUT OPERATION CONDITIONS	31
6.6 TEST RESULTS	31
7. AUTOMATICALLY DISCONTINUE TRANSMISSION	32
7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	32
7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	32
8. ANTENNA REQUIREMENT	33



8.1 STANDARD REQUIREMENT	33
8.2 EUT ANTENNA	33
APPENDIX I - TEST RESULTS	34
DUTY CYCLE	34
MAXIMUM CONDUCTED OUTPUT POWER	47
-26DB BANDWIDTH	48
OCCUPIED CHANNEL BANDWIDTH	55
MAXIMUM POWER SPECTRAL DENSITY LEVEL	68
BAND EDGE	82
-6DB BANDWIDTH	93
APPENDIX II - MEASUREMENT PHOTOS	100



Revision History

Rev.	Issue Date	Contents
00	Apr. 24, 2025	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Part 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	N/A
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.205/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 3.2 \%$
2	RF Output Power, Conducted	$\pm 0.71\text{dB}$
3	Power Spectral Density, Conducted	$\pm 1.57 \text{ dB}$
4	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
5	Conducted emission	$\pm 2.80\text{dB}$
6	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
7	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.40\text{dB}$
8	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$
11	Duty Cycle	$\pm 2.3\%$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Cargo Volume Measurement Camera		
Trademark:	N/A		
Model Name:	Z5		
Series Model:	N/A		
Model Difference:	N/A		
Product Description:	Operation Frequency:	IEEE 802.11a/n(HT20)/ac(VHT20)/ax(HE20): 5.180GHz-5.240GHz	
		IEEE 802.11n(HT40)/ac(VHT40)/ax(HE40): 5.190GHz-5.230GHz	
		I IEEE 802.11a/n(HT20)/ac(VHT20)/ax(HE20): 5.745GHz-5.825GHz	
		IEEE 802.11a/n(HT40)/ac(VHT40)/ax(HE40): 5.755GHz-5.795GHz	
	Modulation Type:	802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11ac (OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM 802.11ax(OFDM, OFDMA): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024QAM	
	Antenna Designation:	FPC	
	Antenna Gain(dBi)	6.2	
More details of EUT technical specification, please refer to the User Manual.			
Test Channel:	Please refer to the Note 3.		
Rating:	Input: DC 10-36V		
Hardware Version:	N/A		
Software Version:	N/A		
Connecting I/O Port(s):	Please refer to the Note 1.		



Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.

3.

Operation Frequency of channel			
5.180GHz-5.240GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	157	5785
44	5220	159	5795
46	5230	161	5805
48	5240	165	5825

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

Channel List for 802.11a/n/ac/ax(20MHz)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

Channel List for 802.11n/ac/ax(40MHz)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 3	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 4	TX IEEE 802.11ac/ax VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 5	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 6	TX IEEE 802.11ac/ax VHT20 CH149&CH157&CH165	NSS1 MCS0
Mode 7	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 8	TX IEEE 802.11ac/ax VHT40 CH38&CH46	NSS1 MCS0
Mode 9	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 10	TX IEEE 802.11ac/ax VHT40 CH151&CH159	NSS1 MCS0

Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.
(4) The battery is fully-charged during the radiated and RF conducted test.
(5) All 20M, 40M bandwidth modes have been tested, and the report only shows the worst mode data



2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 5G WIFI B1	
SecureCRT_6.5.0.380	Mode Or Modulation type	Power setting
	a	Default
	n20	Default
	n40	Default
	ac20	Default
	ac40	Default
	ax20	Default
	ax40	Default
Test software Version	Test program: 5G WIFI B4	
SecureCRT_6.5.0.380	Mode Or Modulation type	Power setting
	a	Default
	n20	Default
	n40	Default
	ac20	Default
	ac40	Default
	ax20	Default
	ax40	Default

2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
DC cable	N/A	N/A	N/A	N/A

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
DC source	Jiuyuan	QJ6010E	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
Active loop Antenna	ETS	6502	00049544	2025.03.11	2028.03.10
Spectrum Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Trilog Broadband Antenna (30M-1G)	SCHWARZBECK	VULB 9168	2705	2024.05.17	2027.05.16
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2025.03.10	2028.03.09
Horn Antenna(18-40G)	SCHWARZBECK	BBHA 9170	685	2023.10.23	2026.10.22
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2025.03.06	2026.03.05
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2025.03.06	2026.03.05
Pre-amplifier(18-40G)	SCHWARZBECK	BBV 9721	9721-019	2024.10.21	2025.10.20
Coaxial cables (9kHz-1GHz)	Juncoax	JMR600-NMMN-8M	N.A	2025.03.06	2026.03.05
Coaxial cables (1GHz-18GHz)	TaiHe	UCD460B-NMSM-1M9	N.A	2025.03.06	2026.03.05
Coaxial cables (18GHz-40GHz)	Junkosha Inc.	MWX241-05000KMS KMS	N.A	2025.03.08	2026.03.07
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05	2025.08.04
Antenna Tower	SAEMC	BK-4AT-BS-D	SK2021093008	N.A	N.A
DC source	Jiuyuan	QJ6010E	N.A	2025.03.09	2026.03.08
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Signal Analyzer	Keysight	N9020A	MY50530994	2025.03.05	2026.03.04
Power Sensor	R&S	NRP8S	149.0006K02-104963-Ae	2025.03.06	2026.03.05
RF Automatic Test system	MW	MW100-RFCB	MW220324L G-33	2025.03.06	2026.03.05
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2025.03.05	2026.03.04
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05	2025.08.04
Attenuator	eastsheep	90db	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Digital multimeter	MASTECH	MS8261	MBGBC83053	2025.03.05	2026.03.04
DC source	Jiuyuan	QJ6010E	N.A	2025.03.09	2026.03.08
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

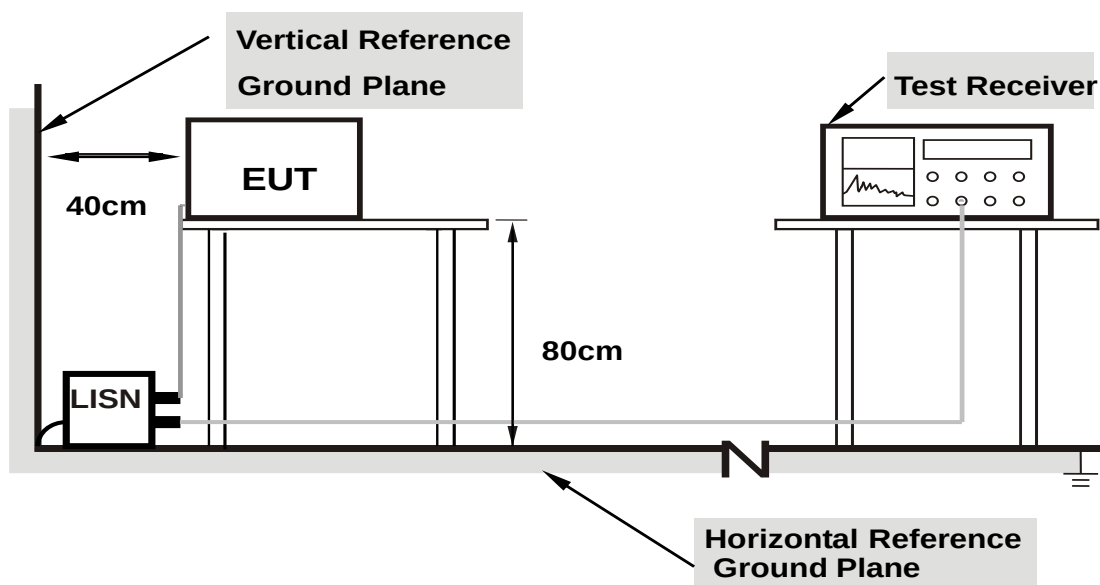

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS

N/A. EUT product DC power supply.



3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&15.205/209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Note: In case the emission radiated emission above 1000MHz fall within the restricted band the restricted frequency bands, the peak limit is 74 dBuV/m.



LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: $\text{dBuV/m(at 3M)} = \text{EIRP(dBm)} + 95.2$.

Peak Limit = $-27\text{dBm/MHz} + 95.2 = 68.2$ dBuV/m.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

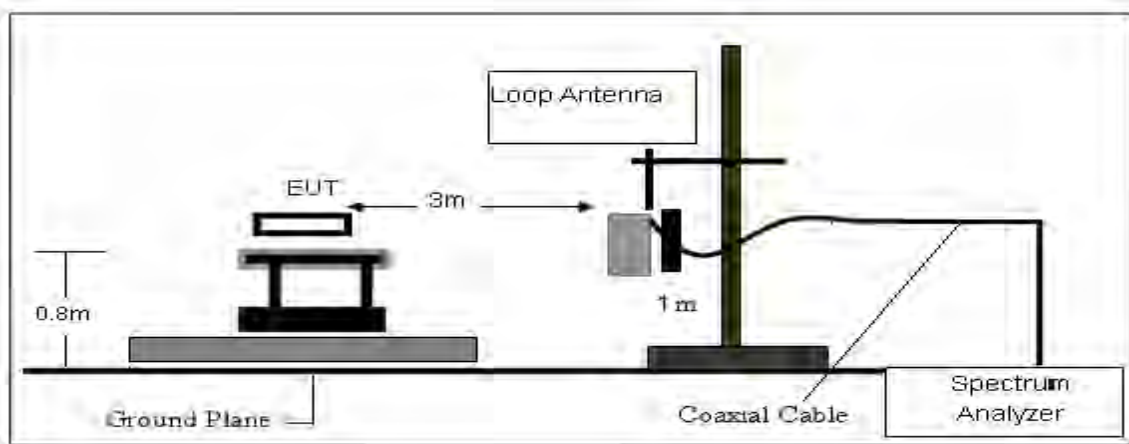

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

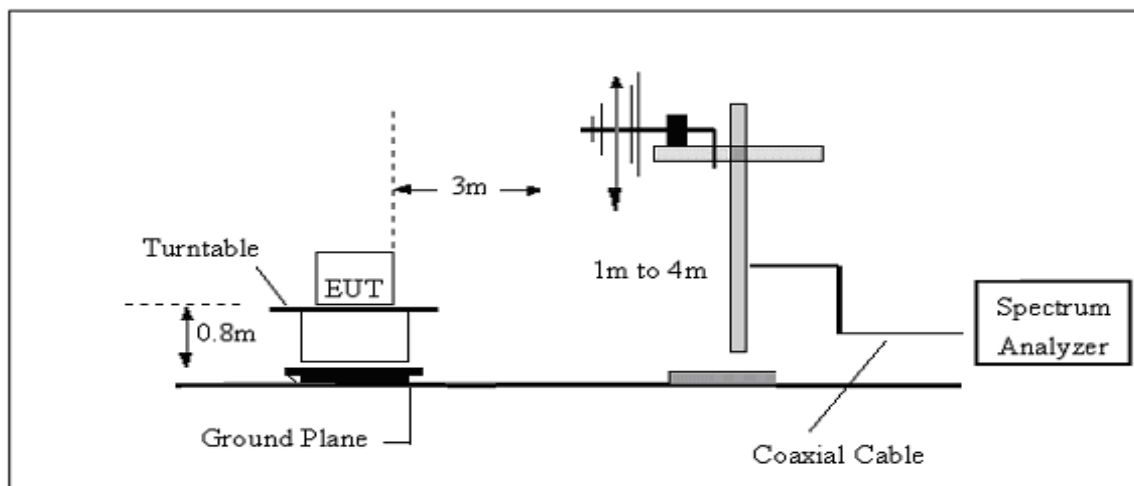

(C) Radiated Emission Test-Up Frequency Above 1GHz

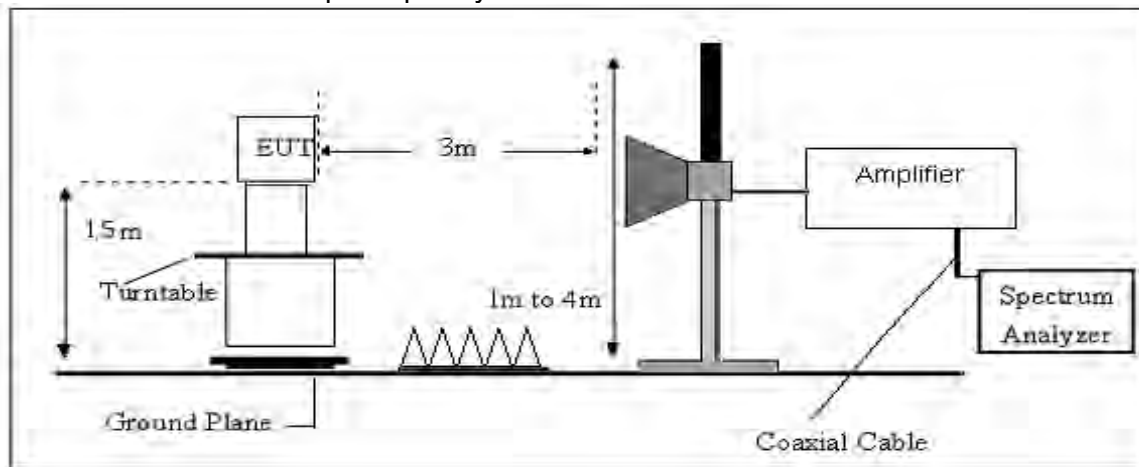



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



3.2.6 TEST RESULTS

Results of Radiated Emissions (9 KHz~30MHz)

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Remark
1*	-	-	-	-	-	-	-	See Note

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.




Results of Radiated Emissions (30MHz~1000MHz)

Note:1. All mode has been tested, only shown the worst case data.

Project: LGT25C118	Test Engineer: LiuH
EUT: Cargo Volume Measurement Camera	Temperature: 23°C
M/N: Z5	Humidity: 52%RH
Test Voltage: DC 12V	Test Data: 2025-03-28
Test Mode: TX 802.11a 5180	
Note:	

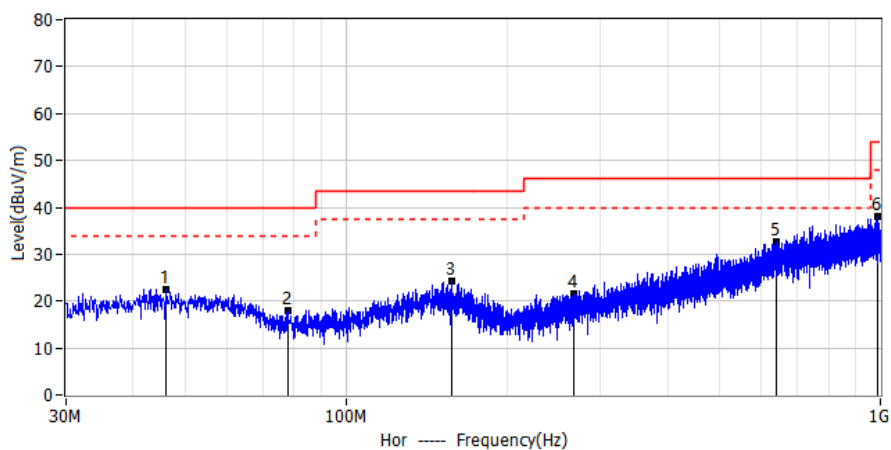

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Height m	Degrees °	Detector	Polar
1*	46.126	1.90	20.43	22.33	40.00	-17.67	1	116.2	QP	Hor
2*	78.015	1.34	16.58	17.92	40.00	-22.08	1	76.4	QP	Hor
3*	157.434	2.59	21.80	24.39	43.50	-19.11	1	40.7	QP	Hor
4*	267.771	1.49	19.95	21.44	46.00	-24.56	1	47.5	QP	Hor
5*	639.281	2.98	29.58	32.56	46.00	-13.44	1	35.6	QP	Hor
6*	985.935	3.89	34.17	38.06	54.00	-15.94	1	30.2	QP	Hor

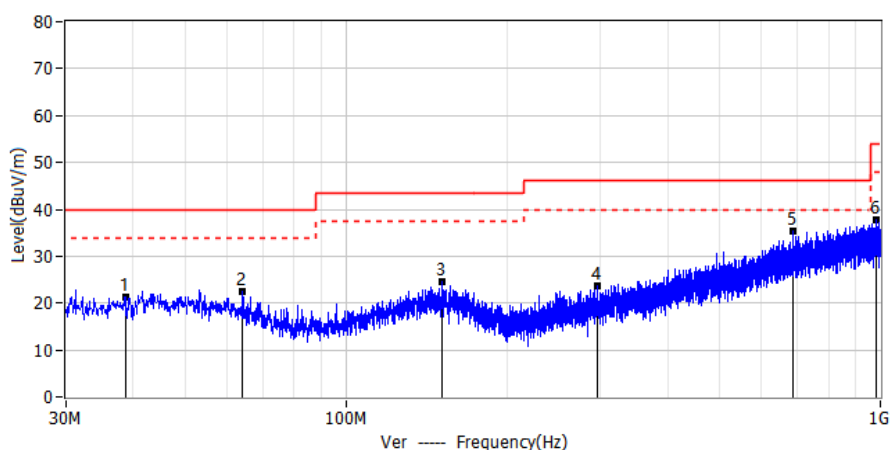

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Height m	Degrees °	Detector	Polar
1*	38.730	1.42	19.84	21.26	40.00	-18.74	1	84.2	QP	Ver
2*	64.193	3.56	18.94	22.50	40.00	-17.50	1	97.9	QP	Ver
3*	151.614	3.22	21.32	24.54	43.50	-18.96	1	29.2	QP	Ver
4*	295.174	2.46	21.20	23.66	46.00	-22.34	1	78.5	QP	Ver
5*	687.539	5.24	30.09	35.33	46.00	-10.67	1	141.9	QP	Ver
6*	983.025	3.51	34.10	37.61	54.00	-16.39	1	59.9	QP	Ver



Results of Radiated Emissions (Above 1000MHz)

Note:1. All mode has been tested, only shown the worst case data.

Band I(5.15-5.25) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (802.11/ 5180 MHz)							
3985.64	53.42	-6.89	46.53	74.00	-27.47	PK	Vertical
3985.64	42.62	-6.89	35.73	54.00	-18.27	AV	Vertical
3986.05	53.39	-6.89	46.50	74.00	-27.50	PK	Horizontal
3986.05	42.46	-6.89	35.57	54.00	-18.43	AV	Horizontal
8909.82	53.97	-3.80	50.17	68.20	-18.03	PK	Vertical
8909.82	43.82	-3.80	40.02	54.00	-13.98	AV	Vertical
8921.91	53.05	-3.80	49.25	68.20	-18.95	PK	Horizontal
8921.91	43.41	-3.80	39.61	54.00	-14.39	AV	Horizontal
10360.38	55.16	-2.92	52.24	68.20	-15.96	PK	Vertical
10360.38	44.45	-2.92	41.53	54.00	-12.47	AV	Vertical
10360.04	55.97	-2.92	53.05	68.20	-15.15	PK	Horizontal
10360.04	44.10	-2.92	41.18	54.00	-12.82	AV	Horizontal
13286.15	53.67	-0.67	53.00	74.00	-21.00	PK	Vertical
13286.15	43.94	-0.67	43.27	54.00	-10.73	AV	Vertical
13284.33	54.95	-0.67	54.28	74.00	-19.72	PK	Horizontal
13284.33	44.14	-0.67	43.47	54.00	-10.53	AV	Horizontal
Mid Channel (802.11/ 5200 MHz)							
3980.95	52.53	-6.89	45.64	74.00	-28.36	PK	Vertical
3980.95	42.90	-6.89	36.01	54.00	-17.99	AV	Vertical
3994.05	52.16	-6.89	45.27	74.00	-28.73	PK	Horizontal
3994.05	43.45	-6.89	36.56	54.00	-17.44	AV	Horizontal
7232.07	53.79	-3.80	49.99	68.20	-18.21	PK	Vertical
7232.07	43.23	-3.80	39.43	54.00	-14.57	AV	Vertical
7220.51	53.23	-3.80	49.43	68.20	-18.77	PK	Horizontal
7220.51	43.19	-3.80	39.39	54.00	-14.61	AV	Horizontal
10400.20	56.50	-2.92	53.58	68.20	-14.62	PK	Vertical
10400.20	45.42	-2.92	42.50	54.00	-11.50	AV	Vertical
10400.08	55.27	-2.92	52.35	68.20	-15.85	PK	Horizontal
10400.08	44.26	-2.92	41.34	54.00	-12.66	AV	Horizontal
13283.60	54.05	-0.67	53.38	74.00	-20.62	PK	Vertical
13283.60	43.75	-0.67	43.08	54.00	-10.92	AV	Vertical
13297.20	54.22	-0.67	53.55	74.00	-20.45	PK	Horizontal
13297.20	44.15	-0.67	43.48	54.00	-10.52	AV	Horizontal
High Channel (802.11/ 5240 MHz)							
3988.71	53.08	-6.89	46.19	74.00	-27.81	PK	Vertical
3988.71	43.01	-6.89	36.12	54.00	-17.88	AV	Vertical
3992.87	53.13	-6.89	46.24	74.00	-27.76	PK	Horizontal
3992.87	42.96	-6.89	36.07	54.00	-17.93	AV	Horizontal
7228.44	54.37	-3.80	50.57	68.20	-17.63	PK	Vertical
7228.44	43.23	-3.80	39.43	54.00	-14.57	AV	Vertical
7234.58	53.10	-3.80	49.30	68.20	-18.90	PK	Horizontal
7234.58	43.40	-3.80	39.60	54.00	-14.40	AV	Horizontal
10480.21	56.19	-2.92	53.27	68.20	-14.93	PK	Vertical
10480.21	44.74	-2.92	41.82	54.00	-12.18	AV	Vertical
10479.96	56.28	-2.92	53.36	68.20	-14.84	PK	Horizontal
10479.96	44.55	-2.92	41.63	54.00	-12.37	AV	Horizontal
13283.05	54.05	-0.67	53.38	74.00	-20.62	PK	Vertical
13283.05	44.02	-0.67	43.35	54.00	-10.65	AV	Vertical
13298.19	54.96	-0.67	54.29	74.00	-19.71	PK	Horizontal
13298.19	44.68	-0.67	44.01	54.00	-9.99	AV	Horizontal



Band IV(5.725-5.85) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (802.11/ 5745 MHz)							
3995.79	53.07	-6.89	46.18	74.00	-27.82	PK	Vertical
3995.79	43.09	-6.89	36.20	54.00	-17.80	AV	Vertical
3999.98	53.19	-6.89	46.30	74.00	-27.70	PK	Horizontal
3999.98	43.39	-6.89	36.50	54.00	-17.50	AV	Horizontal
8924.03	53.87	-3.80	50.07	68.20	-18.13	PK	Vertical
8924.03	43.44	-3.80	39.64	54.00	-14.36	AV	Vertical
8916.16	53.85	-3.80	50.05	68.20	-18.15	PK	Horizontal
8916.16	43.45	-3.80	39.65	54.00	-14.35	AV	Horizontal
11481.33	55.34	-2.92	52.42	74.00	-21.58	PK	Vertical
11481.33	44.06	-2.92	41.14	54.00	-12.86	AV	Vertical
11473.06	56.18	-2.92	53.26	74.00	-20.74	PK	Horizontal
11473.06	44.50	-2.92	41.58	54.00	-12.42	AV	Horizontal
13295.40	53.53	-0.35	53.18	74.00	-20.82	PK	Vertical
13295.40	43.74	-0.35	43.39	54.00	-10.61	AV	Vertical
13288.77	53.52	-0.35	53.17	74.00	-20.83	PK	Horizontal
13288.77	44.77	-0.35	44.42	54.00	-9.58	AV	Horizontal
Mid Channel (802.11/ 5785 MHz)							
3997.16	52.87	-6.89	45.98	74.00	-28.02	PK	Vertical
3997.16	43.29	-6.89	36.40	54.00	-17.60	AV	Vertical
3986.93	52.90	-6.89	46.01	74.00	-27.99	PK	Horizontal
3986.93	42.22	-6.89	35.33	54.00	-18.67	AV	Horizontal
8914.52	53.27	-3.80	49.47	68.20	-18.73	PK	Vertical
8914.52	43.96	-3.80	40.16	54.00	-13.84	AV	Vertical
8918.96	53.25	-3.80	49.45	68.20	-18.75	PK	Horizontal
8918.96	43.25	-3.80	39.45	54.00	-14.55	AV	Horizontal
11568.83	56.08	-2.92	53.16	74.00	-20.84	PK	Vertical
11568.83	44.33	-2.92	41.41	54.00	-12.59	AV	Vertical
11558.96	55.96	-2.92	53.04	74.00	-20.96	PK	Horizontal
11558.96	44.50	-2.92	41.58	54.00	-12.42	AV	Horizontal
13286.15	53.54	-0.35	53.19	74.00	-20.81	PK	Vertical
13286.15	44.02	-0.35	43.67	54.00	-10.33	AV	Vertical
13293.41	54.64	-0.35	54.29	74.00	-19.71	PK	Horizontal
13293.41	43.81	-0.35	43.46	54.00	-10.54	AV	Horizontal
High Channel (802.11/ 5825 MHz)							
3994.25	52.01	-6.89	45.12	74.00	-28.88	PK	Vertical
3994.25	43.37	-6.89	36.48	54.00	-17.52	AV	Vertical
3999.05	53.07	-6.89	46.18	74.00	-27.82	PK	Horizontal
3999.05	42.59	-6.89	35.70	54.00	-18.30	AV	Horizontal
8918.50	53.24	-3.80	49.44	68.20	-18.76	PK	Vertical
8918.50	43.91	-3.80	40.11	54.00	-13.89	AV	Vertical
8910.37	53.69	-3.80	49.89	68.20	-18.31	PK	Horizontal
8910.37	44.43	-3.80	40.63	54.00	-13.37	AV	Horizontal
11630.79	56.08	-2.92	53.16	74.00	-20.84	PK	Vertical
11630.79	45.37	-2.92	42.45	54.00	-11.55	AV	Vertical
11650.16	55.80	-2.92	52.88	74.00	-21.12	PK	Horizontal
11650.16	45.49	-2.92	42.57	54.00	-11.43	AV	Horizontal
13284.92	53.59	-0.35	53.24	74.00	-20.76	PK	Vertical
13284.92	44.83	-0.35	44.48	54.00	-9.52	AV	Vertical
13284.74	54.37	-0.35	54.02	74.00	-19.98	PK	Horizontal
13284.74	44.62	-0.35	44.27	54.00	-9.73	AV	Horizontal

Remark: In frequency ranges 18~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.



3.2.7 TEST RESULTS(Band edge Requirements)

Note:1. All mode has been tested, only shown the worst case data.

Band I(5.15-5.35) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
802.11n BW20MHz							
5150	55.59	-7.51	48.08	74	-25.92	PK	Vertical
5150	45.33	-7.51	37.82	54	-16.18	AV	Vertical
5150	56.33	-7.51	48.82	74	-25.18	PK	Horizontal
5150	45.07	-7.51	37.56	54	-16.44	AV	Horizontal
5350	54.52	-8.19	46.33	74	-27.67	PK	Vertical
5350	44.94	-8.19	36.75	54	-17.25	AV	Vertical
5350	54.67	-8.19	46.48	74	-27.52	PK	Horizontal
5350	44.68	-8.19	36.49	54	-17.51	AV	Horizontal
802.11n BW40MHz							
5150	55.91	-7.51	48.40	74	-25.60	Peak	Vertical
5150	44.46	-7.51	36.95	54	-17.05	AVG	Vertical
5150	55.22	-7.51	47.71	74	-26.29	Peak	Horizontal
5150	45.23	-7.51	37.72	54	-16.28	AVG	Horizontal
5350	54.91	-8.19	46.72	74	-27.28	Peak	Vertical
5350	44.22	-8.19	36.03	54	-17.97	AVG	Vertical
5350	54.25	-8.19	46.06	74	-27.94	Peak	Horizontal
5350	44.60	-8.19	36.41	54	-17.59	AVG	Horizontal
802.11ac BW80MHz							
5150	55.54	-7.51	48.03	74	-25.97	Peak	Vertical
5150	45.22	-7.51	37.71	54	-16.29	AVG	Vertical
5150	55.06	-7.51	47.55	74	-26.45	Peak	Horizontal
5150	44.25	-7.51	36.74	54	-17.26	AVG	Horizontal
5350	55.03	-8.19	46.84	74	-27.16	Peak	Vertical
5350	44.96	-8.19	36.77	54	-17.23	AVG	Vertical
5350	54.54	-8.19	46.35	74	-27.65	Peak	Horizontal
5350	43.58	-8.19	35.39	54	-18.61	AVG	Horizontal



Band IV(5.725-5.85 GHz)							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
802.11n BW20MHz							
5460	54.01	-8.27	45.74	74	-28.26	PK	Vertical
5460	43.42	-8.27	35.15	54	-18.85	AV	Vertical
5460	54.02	-8.27	45.75	74	-28.25	PK	Horizontal
5460	42.84	-8.27	34.57	54	-19.43	AV	Horizontal
7250	55.19	-6.33	48.86	74	-25.14	PK	Vertical
7250	44.95	-6.33	38.62	54	-15.38	AV	Vertical
7250	55.38	-6.33	49.05	74	-24.95	PK	Horizontal
7250	43.86	-6.33	37.53	54	-16.47	AV	Horizontal
802.11n BW40MHz							
5460	53.11	-8.27	44.84	74	-29.16	PK	Vertical
5460	43.75	-8.27	35.48	54	-18.52	AV	Vertical
5460	54.09	-8.27	45.82	74	-28.18	PK	Horizontal
5460	43.72	-8.27	35.45	54	-18.55	AV	Horizontal
7250	55.10	-6.33	48.77	74	-25.23	PK	Vertical
7250	43.96	-6.33	37.63	54	-16.37	AV	Vertical
7250	54.10	-6.33	47.77	74	-26.23	PK	Horizontal
7250	43.75	-6.33	37.42	54	-16.58	AV	Horizontal
802.11ac BW80MHz							
5460	53.40	-8.27	45.13	74	-28.87	PK	Vertical
5460	43.88	-8.27	35.61	54	-18.39	AV	Vertical
5460	54.29	-8.27	46.02	74	-27.98	PK	Horizontal
5460	43.74	-8.27	35.47	54	-18.53	AV	Horizontal
7250	54.07	-6.33	47.74	74	-26.26	PK	Vertical
7250	44.41	-6.33	38.08	54	-15.92	AV	Vertical
7250	55.40	-6.33	49.07	74	-24.93	PK	Horizontal
7250	43.87	-6.33	37.54	54	-16.46	AV	Horizontal



4. POWER SPECTRAL DENSITY TEST

4.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.



4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.



5. BANDWIDTH MEASUREMENT

5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth.

5.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

For the measurement records, refer to the appendix I.



5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

5.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

5.2.2 DEVIATION FROM STANDARD

No deviation.

5.2.3 TEST SETUP



5.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.5 TEST RESULTS

For the measurement records, refer to the appendix I.



5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth.

5.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.2 DEVIATION FROM STANDARD

No deviation.

5.3.3 TEST SETUP



5.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.3.5 TEST RESULTS

For the measurement records, refer to the appendix I.



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or $11 \text{ dBm} + 10 \log (26 \text{ dB emission bandwidth})$	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	

6.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

For the measurement records, refer to the appendix I.



7. AUTOMATICALLY DISCONTINUE TRANSMISSION

7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

Part 15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is FPC Antenna. It comply with the standard requirement.




APPENDIX I - TEST RESULTS

Duty Cycle

Condition	Mode	Frequency (MHz)	Tx On (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	0	0	100	0	0.01
NVNT	a	5200	0	0	100	0	0.01
NVNT	a	5240	0	0	100	0	0.01
NVNT	a	5745	0	0	100	0	0.01
NVNT	a	5785	0	0	100	0	0.01
NVNT	a	5825	0	0	100	0	0.01
NVNT	n20	5180	0	0	100	0	0.01
NVNT	n20	5200	0	0	100	0	0.01
NVNT	n20	5240	0	0	100	0	0.01
NVNT	n20	5745	0	0	100	0	0.01
NVNT	n20	5785	0	0	100	0	0.01
NVNT	n20	5825	0	0	100	0	0.01
NVNT	n40	5190	0	0	100	0	0.01
NVNT	n40	5230	0	0	100	0	0.01
NVNT	n40	5755	0	0	100	0	0.01
NVNT	n40	5795	0	0	100	0	0.01
NVNT	ac20	5180	0	0	100	0	0.01
NVNT	ac20	5200	0	0	100	0	0.01
NVNT	ac20	5240	0	0	100	0	0.01
NVNT	ac20	5745	0	0	100	0	0.01
NVNT	ac20	5785	0	0	100	0	0.01
NVNT	ac20	5825	0	0	100	0	0.01
NVNT	ac40	5190	0	0	100	0	0.01
NVNT	ac40	5230	0	0	100	0	0.01
NVNT	ac40	5755	0	0	100	0	0.01
NVNT	ac40	5795	0	0	100	0	0.01
NVNT	ax20	5180	0	0	100	0	0.01
NVNT	ax20	5200	0	0	100	0	0.01
NVNT	ax20	5240	0	0	100	0	0.01
NVNT	ax20	5745	0	0	100	0	0.01
NVNT	ax20	5785	0	0	100	0	0.01
NVNT	ax20	5825	0	0	100	0	0.01
NVNT	ax40	5190	0	0	100	0	0.01
NVNT	ax40	5230	0	0	100	0	0.01
NVNT	ax40	5755	0	0	100	0	0.01
NVNT	ax40	5795	0	0	100	0	0.01

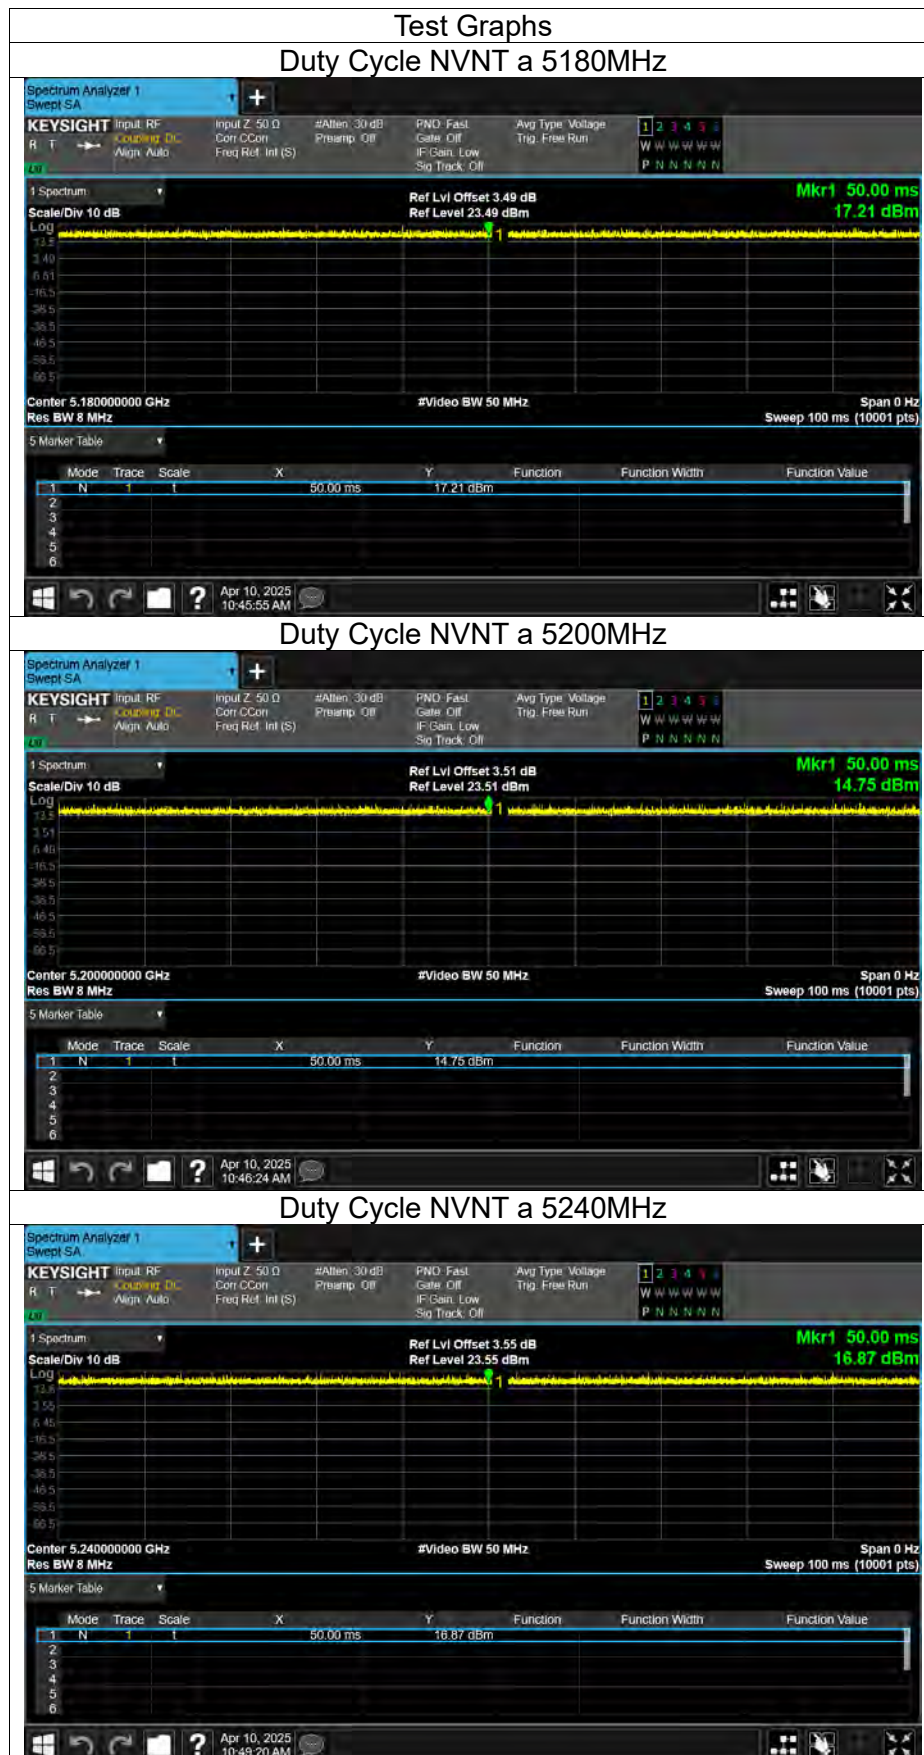

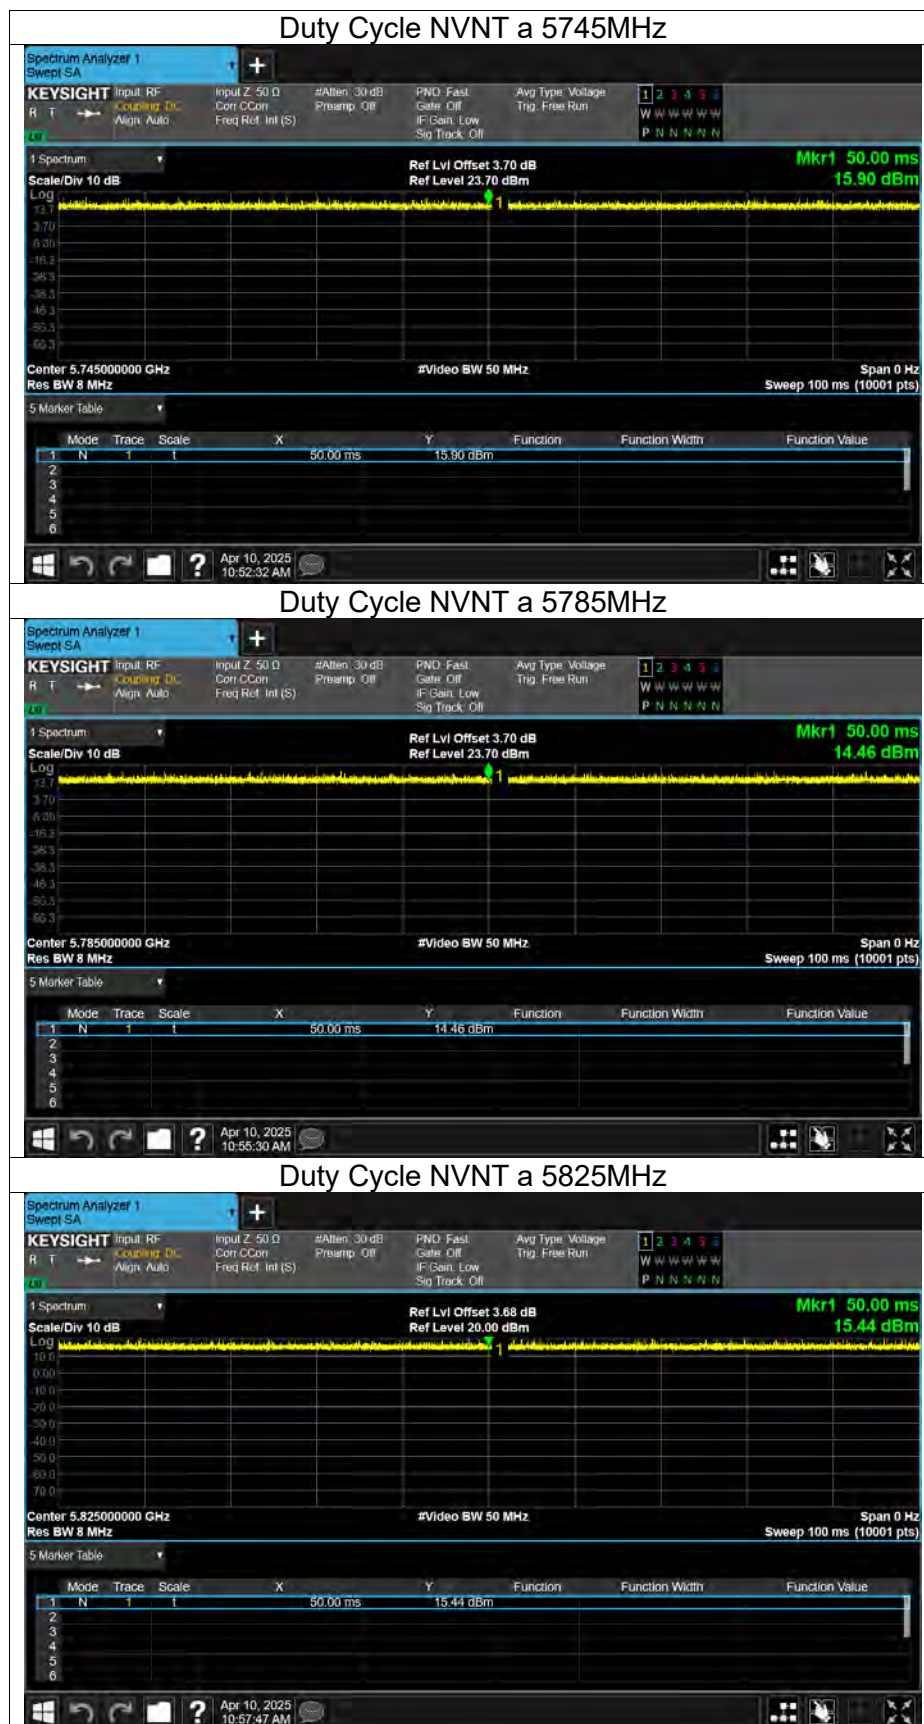














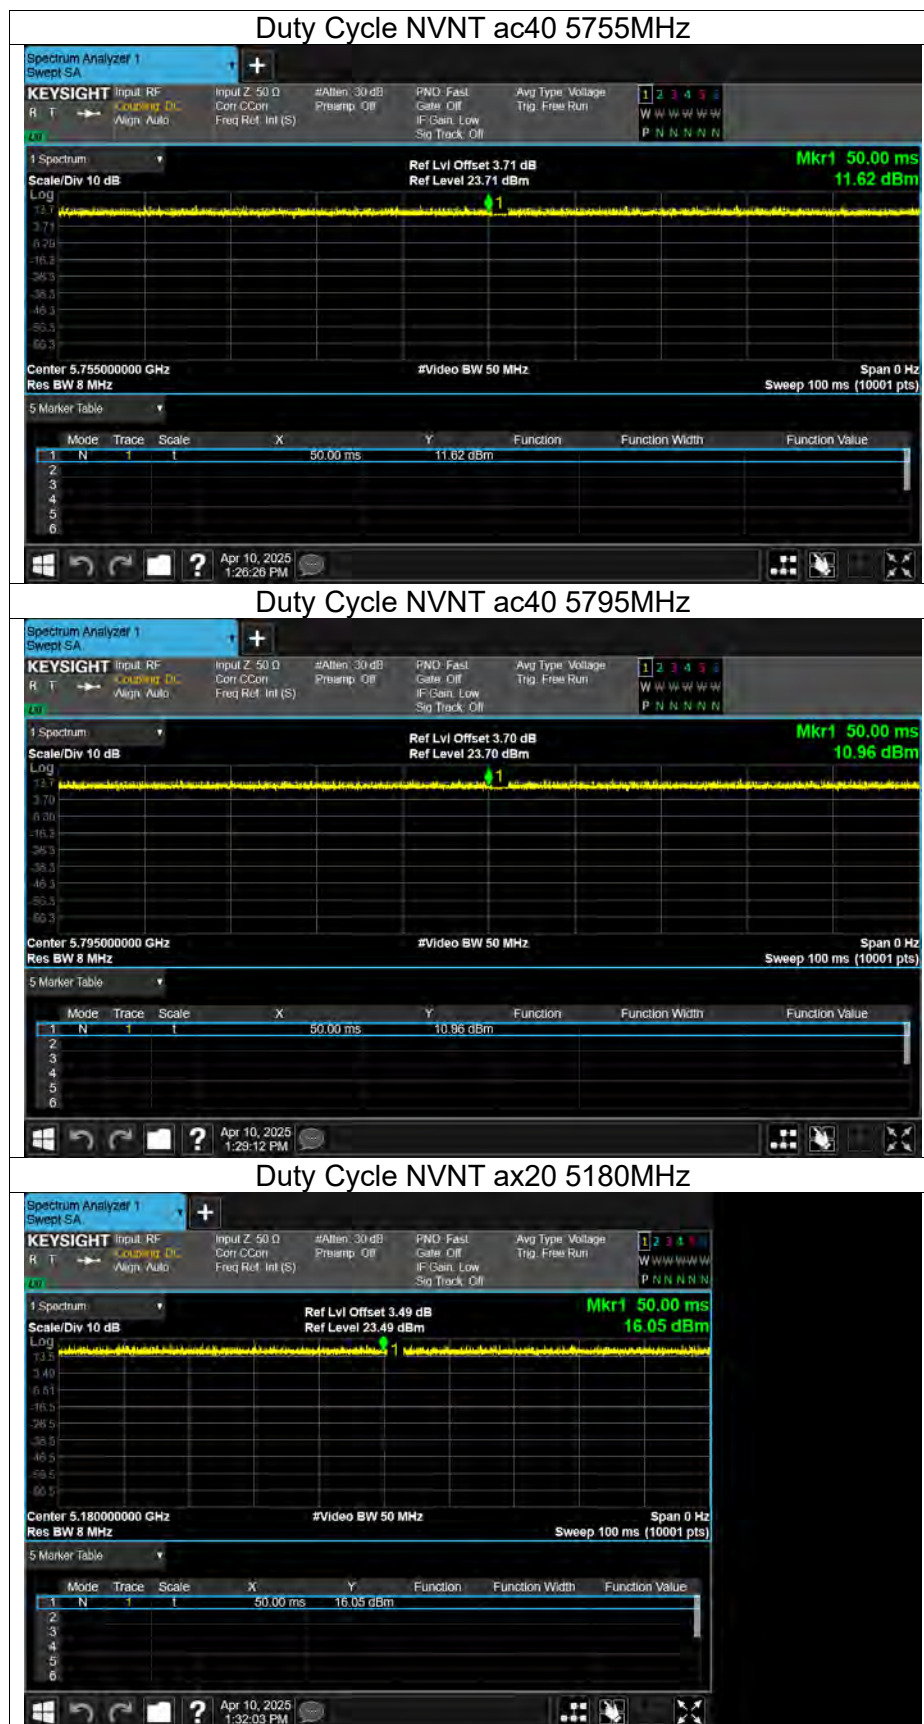









Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	13.18	0	13.18	23.8	Pass
NVNT	a	5200	12.83	0	12.83	23.8	Pass
NVNT	a	5240	13.06	0	13.06	23.8	Pass
NVNT	a	5745	11.21	0	11.21	29.8	Pass
NVNT	a	5785	11.13	0	11.13	29.8	Pass
NVNT	a	5825	11.21	0	11.21	29.8	Pass
NVNT	n20	5180	11.76	0	11.76	23.8	Pass
NVNT	n20	5200	11.72	0	11.72	23.8	Pass
NVNT	n20	5240	11.48	0	11.48	23.8	Pass
NVNT	n20	5745	9.91	0	9.91	29.8	Pass
NVNT	n20	5785	9.64	0	9.64	29.8	Pass
NVNT	n20	5825	9.6	0	9.6	29.8	Pass
NVNT	n40	5190	11.58	0	11.58	23.8	Pass
NVNT	n40	5230	11.87	0	11.87	23.8	Pass
NVNT	n40	5755	10.02	0	10.02	29.8	Pass
NVNT	n40	5795	9.85	0	9.85	29.8	Pass
NVNT	ac20	5180	11.33	0	11.33	23.8	Pass
NVNT	ac20	5200	11.65	0	11.65	23.8	Pass
NVNT	ac20	5240	11.91	0	11.91	23.8	Pass
NVNT	ac20	5745	10.02	0	10.02	29.8	Pass
NVNT	ac20	5785	9.84	0	9.84	29.8	Pass
NVNT	ac20	5825	10.05	0	10.05	29.8	Pass
NVNT	ac40	5190	11.63	0	11.63	23.8	Pass
NVNT	ac40	5230	11.8	0	11.8	23.8	Pass
NVNT	ac40	5755	9.86	0	9.86	29.8	Pass
NVNT	ac40	5795	9.91	0	9.91	29.8	Pass
NVNT	ax20	5180	11.72	0	11.72	23.8	Pass
NVNT	ax20	5200	12.04	0	12.04	23.8	Pass
NVNT	ax20	5240	12.19	0	12.19	23.8	Pass
NVNT	ax20	5745	10.22	0	10.22	29.8	Pass
NVNT	ax20	5785	10.27	0	10.27	29.8	Pass
NVNT	ax20	5825	10.32	0	10.32	29.8	Pass
NVNT	ax40	5190	11.8	0	11.8	23.8	Pass
NVNT	ax40	5230	12.15	0	12.15	23.8	Pass
NVNT	ax40	5755	10.17	0	10.17	29.8	Pass
NVNT	ax40	5795	10.13	0	10.13	29.8	Pass



-26dB Bandwidth

Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	19.781	Pass
NVNT	a	5200	19.958	Pass
NVNT	a	5240	19.614	Pass
NVNT	n20	5180	20.261	Pass
NVNT	n20	5200	20.011	Pass
NVNT	n20	5240	20.226	Pass
NVNT	n40	5190	39.717	Pass
NVNT	n40	5230	39.303	Pass
NVNT	ac20	5180	20.232	Pass
NVNT	ac20	5200	20.12	Pass
NVNT	ac20	5240	20.057	Pass
NVNT	ac40	5190	39.523	Pass
NVNT	ac40	5230	39.837	Pass
NVNT	ax20	5180	19.872	Pass
NVNT	ax20	5200	19.823	Pass
NVNT	ax20	5240	19.87	Pass
NVNT	ax40	5190	39.228	Pass
NVNT	ax40	5230	39.192	Pass




Test Graphs


-26dB Bandwidth NVNT a 5180MHz



-26dB Bandwidth NVNT a 5200MHz

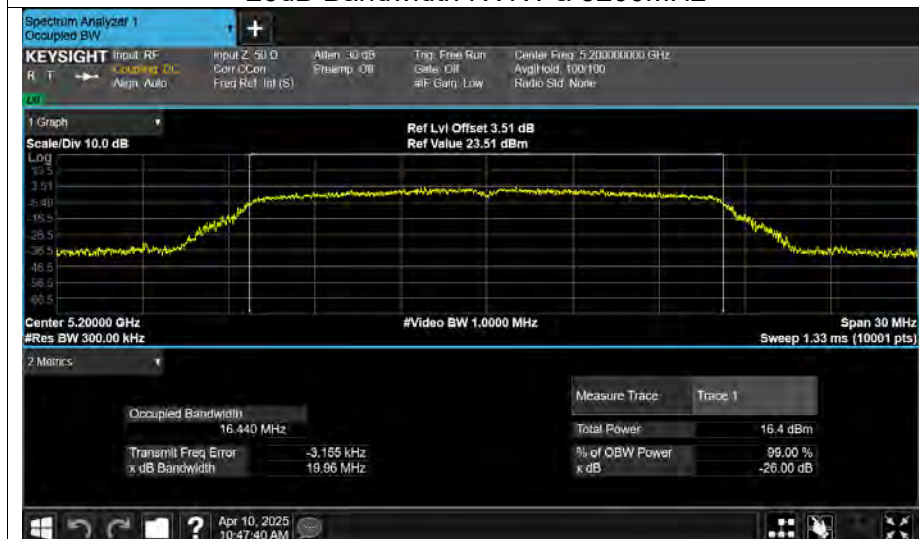

-26dB Bandwidth NVNT a 5240MHz

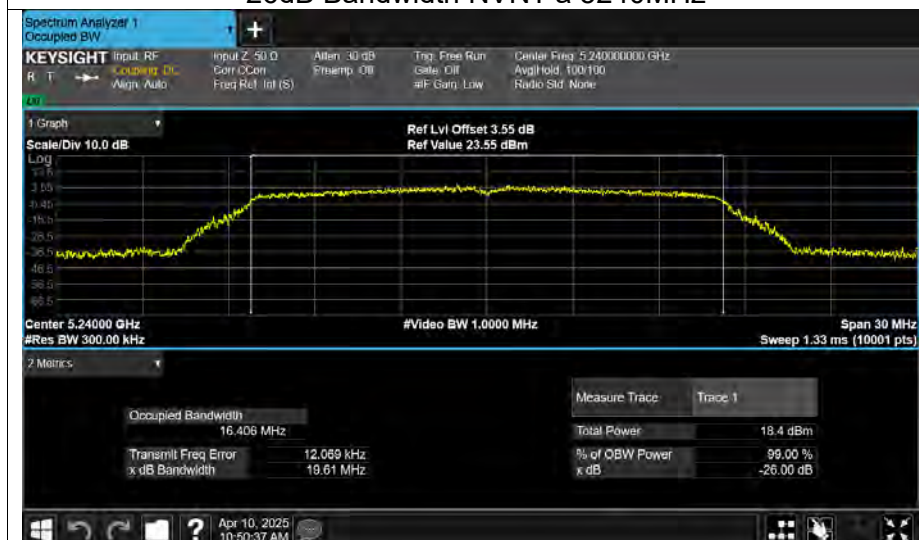




-26dB Bandwidth NVNT n20 5180MHz



-26dB Bandwidth NVNT n20 5200MHz

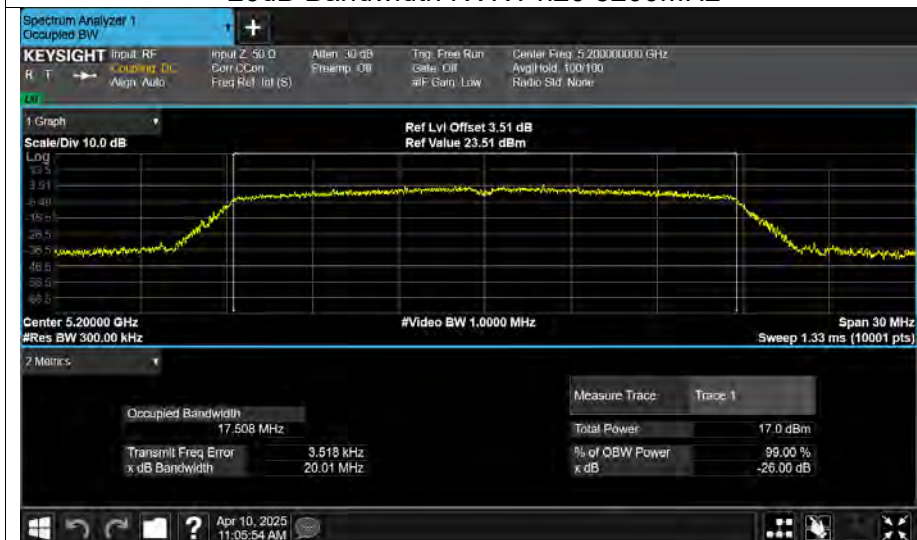

-26dB Bandwidth NVNT n20 5240MHz





-26dB Bandwidth NVNT n40 5190MHz




-26dB Bandwidth NVNT n40 5230MHz




-26dB Bandwidth NVNT ac20 5180MHz





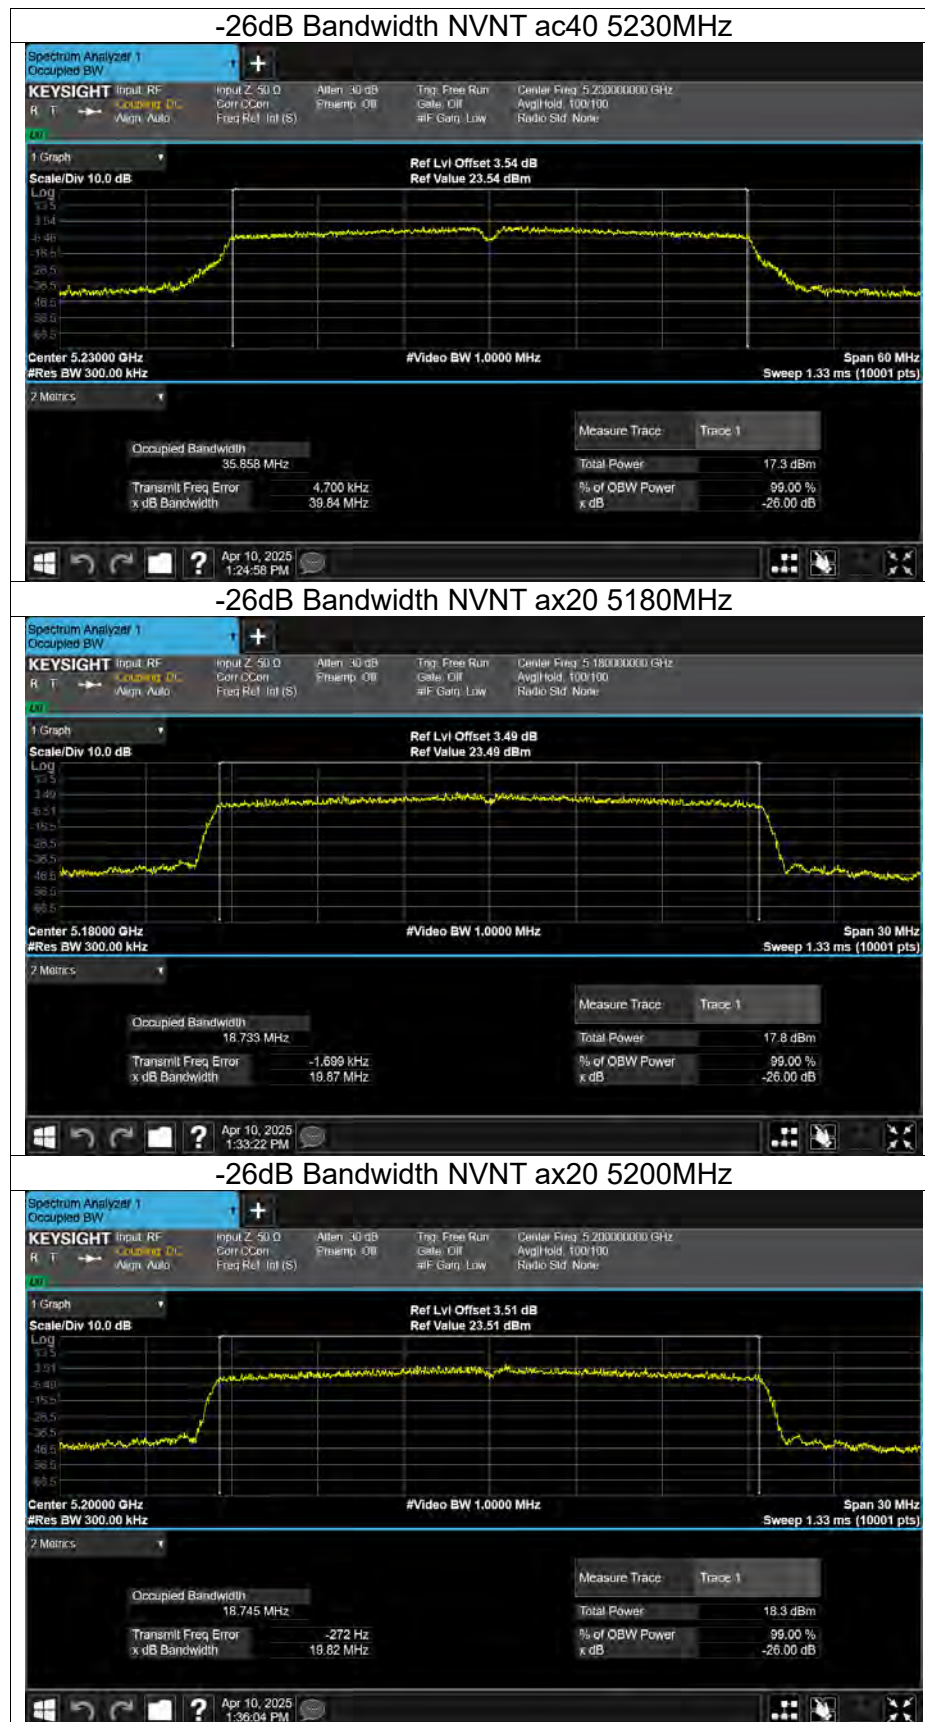

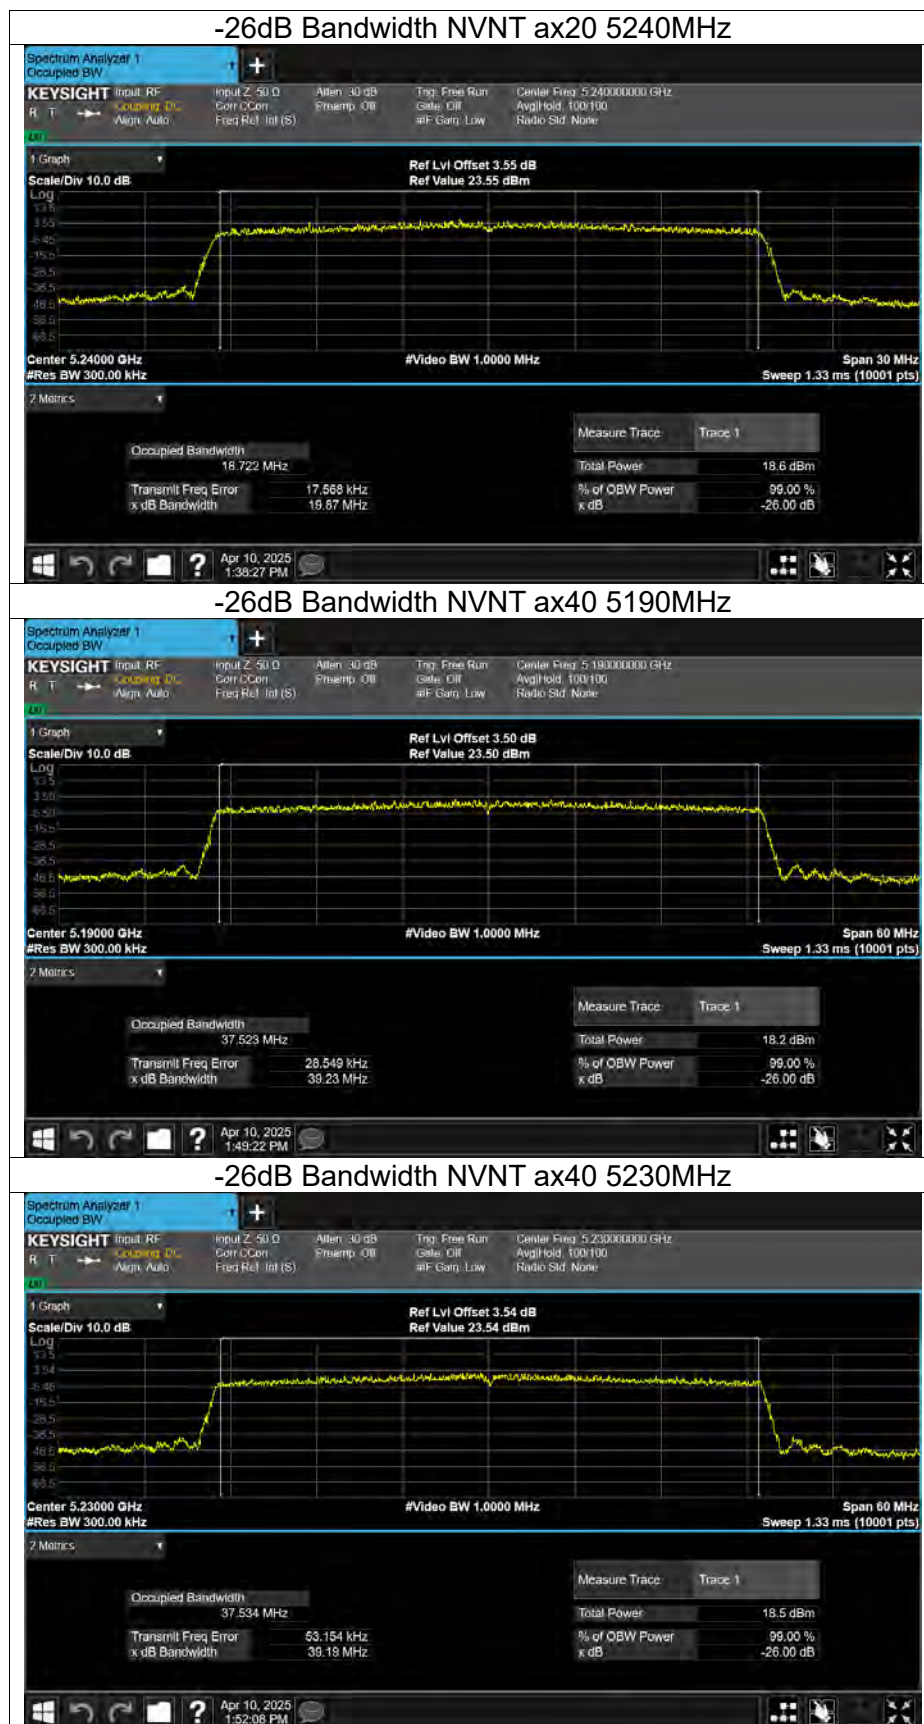



Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.272
NVNT	a	5200	16.327
NVNT	a	5240	16.349
NVNT	a	5745	16.319
NVNT	a	5785	16.293
NVNT	a	5825	16.284
NVNT	n20	5180	17.47
NVNT	n20	5200	17.447
NVNT	n20	5240	17.444
NVNT	n20	5745	17.471
NVNT	n20	5785	17.465
NVNT	n20	5825	17.448
NVNT	n40	5190	35.881
NVNT	n40	5230	35.866
NVNT	n40	5755	35.949
NVNT	n40	5795	35.903
NVNT	ac20	5180	17.446
NVNT	ac20	5200	17.469
NVNT	ac20	5240	17.453
NVNT	ac20	5745	17.461
NVNT	ac20	5785	17.468
NVNT	ac20	5825	17.454
NVNT	ac40	5190	35.832
NVNT	ac40	5230	35.898
NVNT	ac40	5755	35.909
NVNT	ac40	5795	35.877
NVNT	ax20	5180	18.741
NVNT	ax20	5200	18.759
NVNT	ax20	5240	18.743
NVNT	ax20	5745	18.713
NVNT	ax20	5785	18.692
NVNT	ax20	5825	18.712
NVNT	ax40	5190	37.57
NVNT	ax40	5230	37.57
NVNT	ax40	5755	37.653
NVNT	ax40	5795	37.541



Test Graphs

OBW NVNT a 5180MHz



OBW NVNT a 5200MHz



OBW NVNT a 5240MHz





OBW NVNT a 5745MHz



OBW NVNT a 5785MHz




OBW NVNT a 5825MHz







OBW NVNT n20 5745MHz

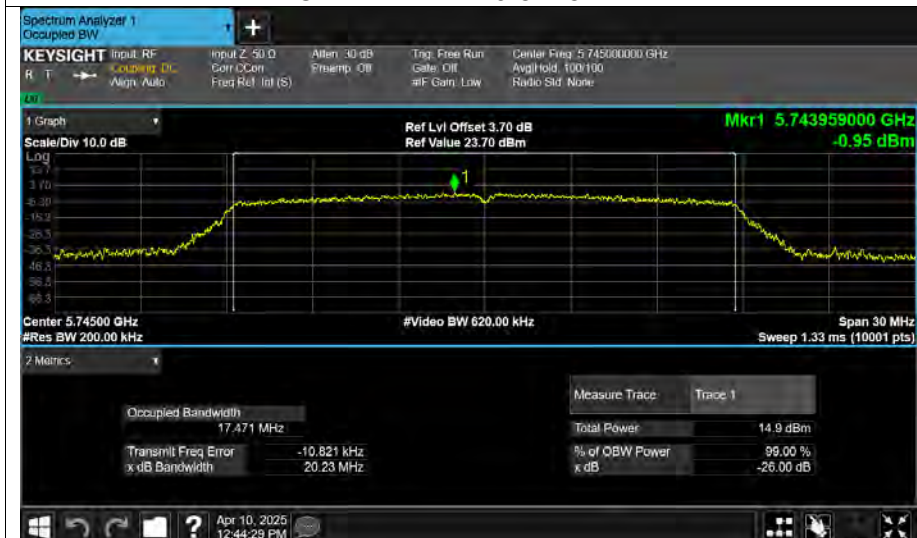


OBW NVNT n20 5785MHz



OBW NVNT n20 5825MHz



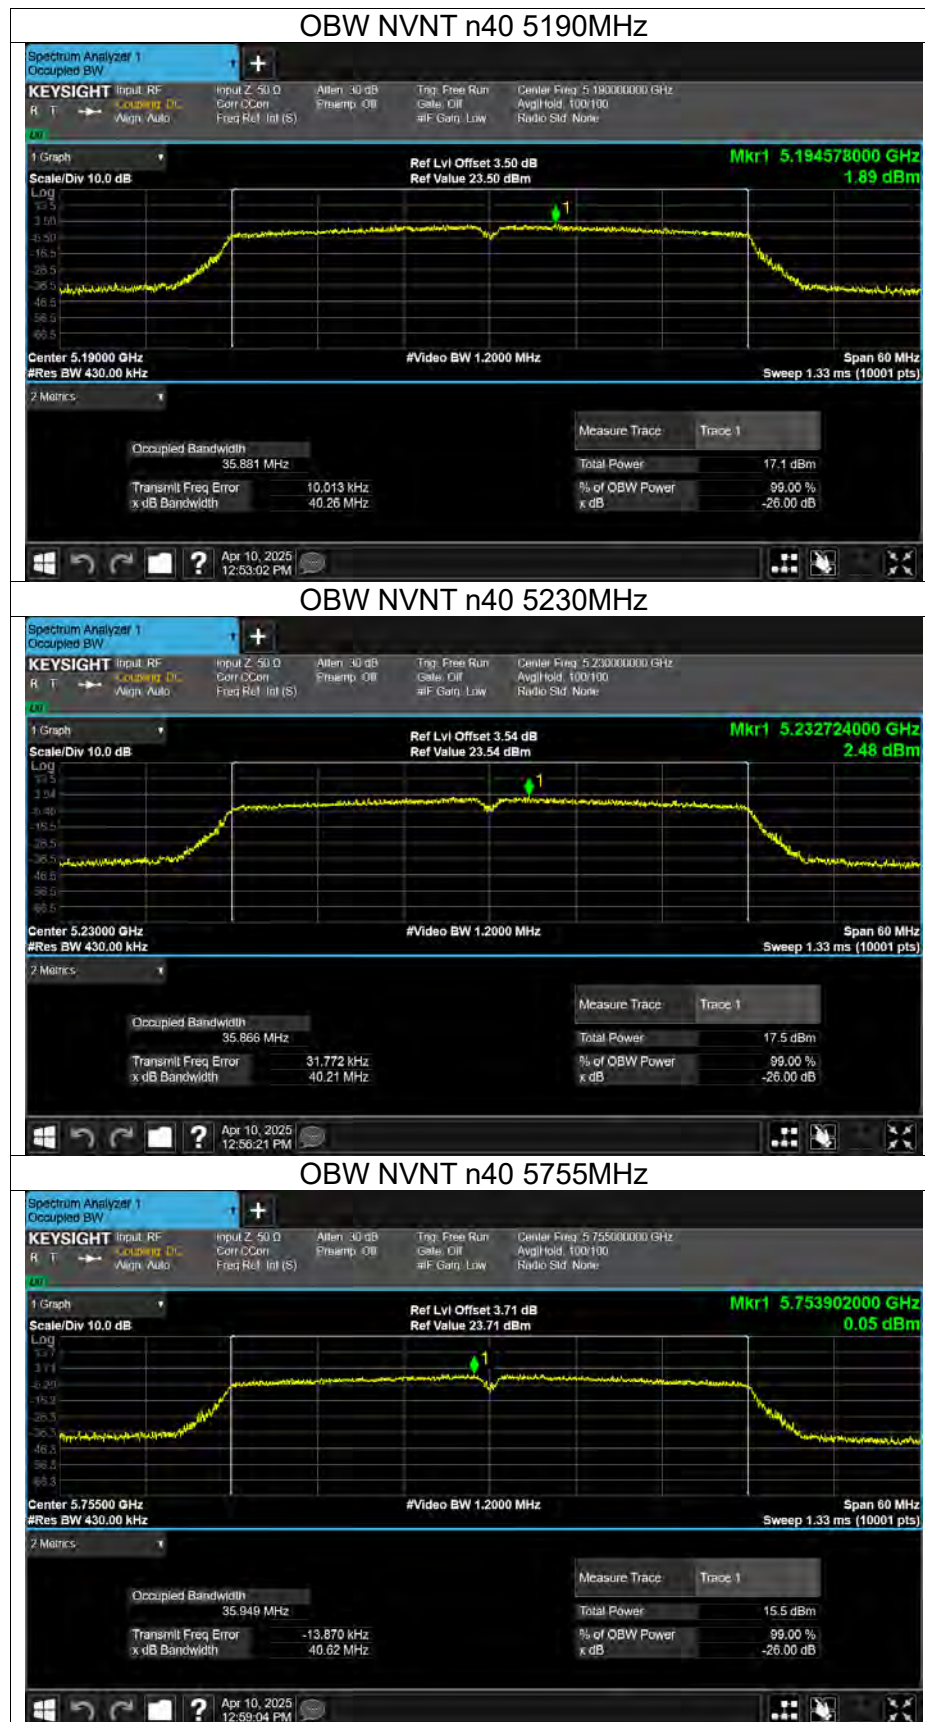



OBW NVNT n40 5795MHz




OBW NVNT ac20 5180MHz



OBW NVNT ac20 5200MHz



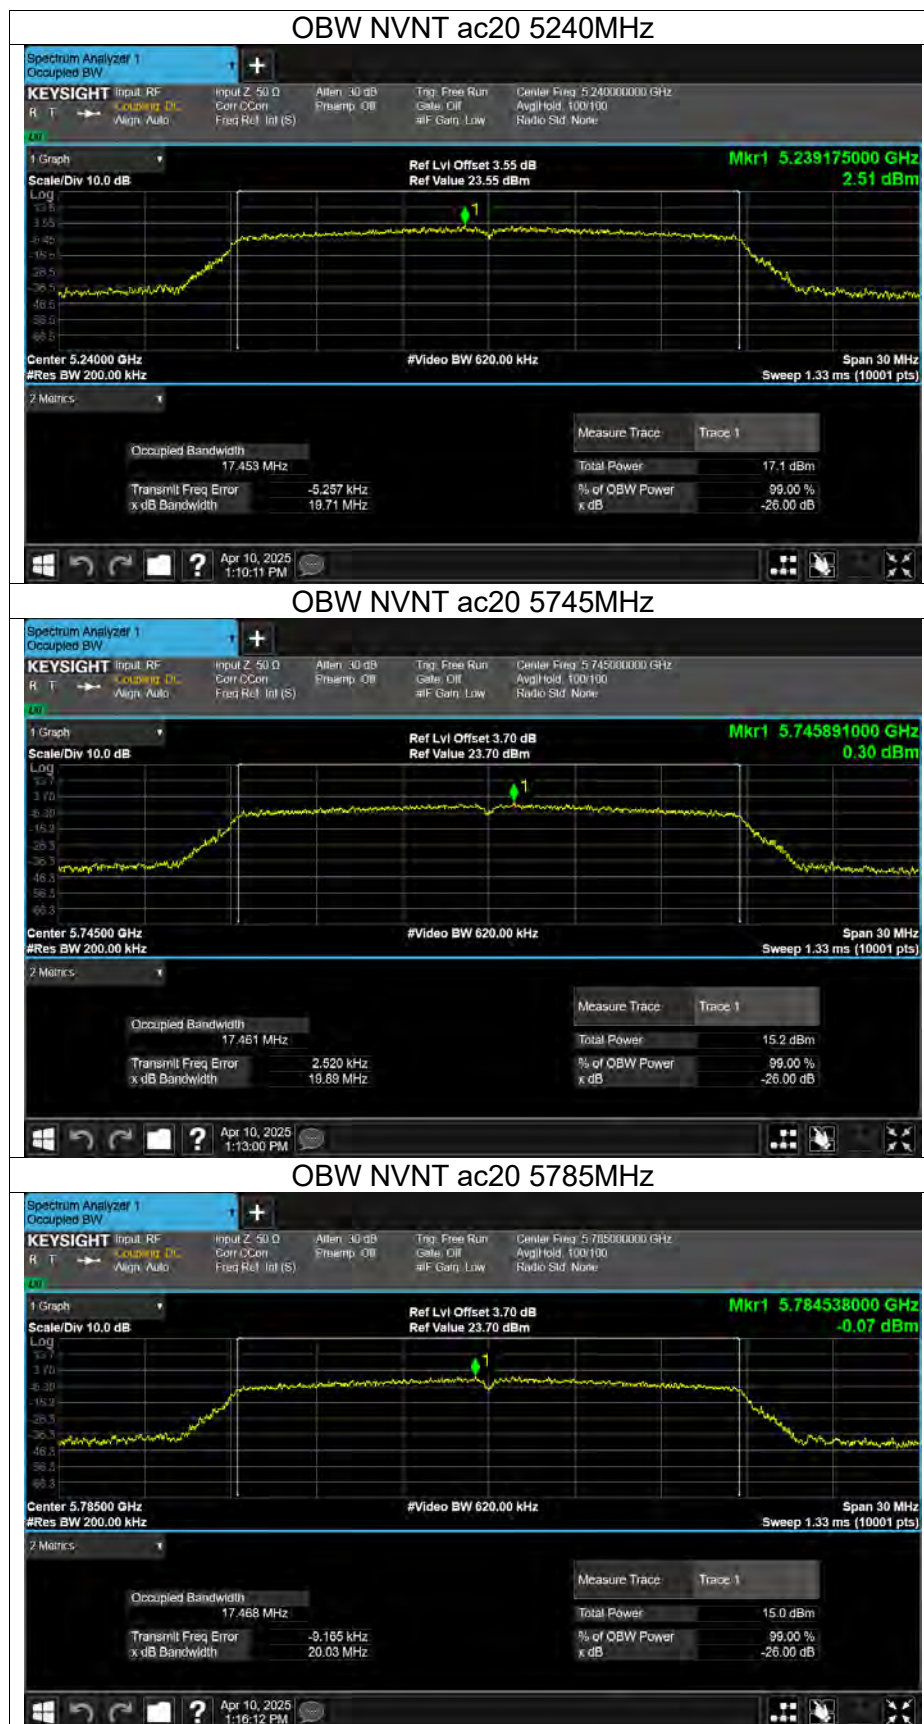



OBW NVNT ac20 5825MHz



OBW NVNT ac40 5190MHz



OBW NVNT ac40 5230MHz





OBW NVNT ac40 5755MHz





OBW NVNT ac40 5795MHz




OBW NVNT ax20 5180MHz



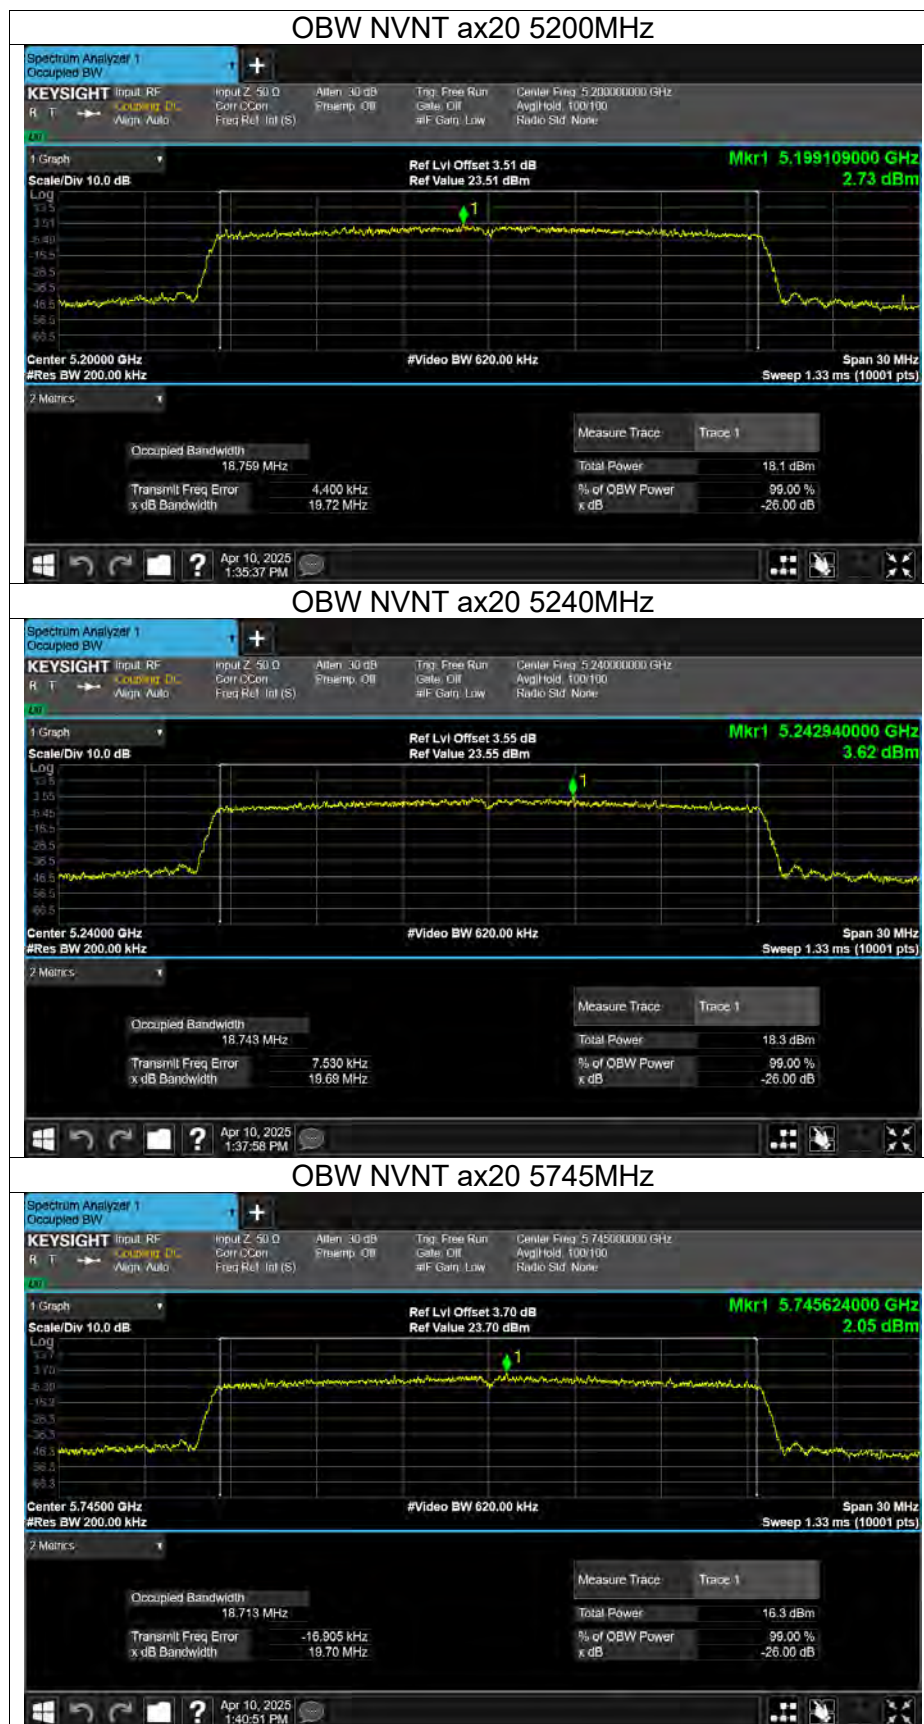

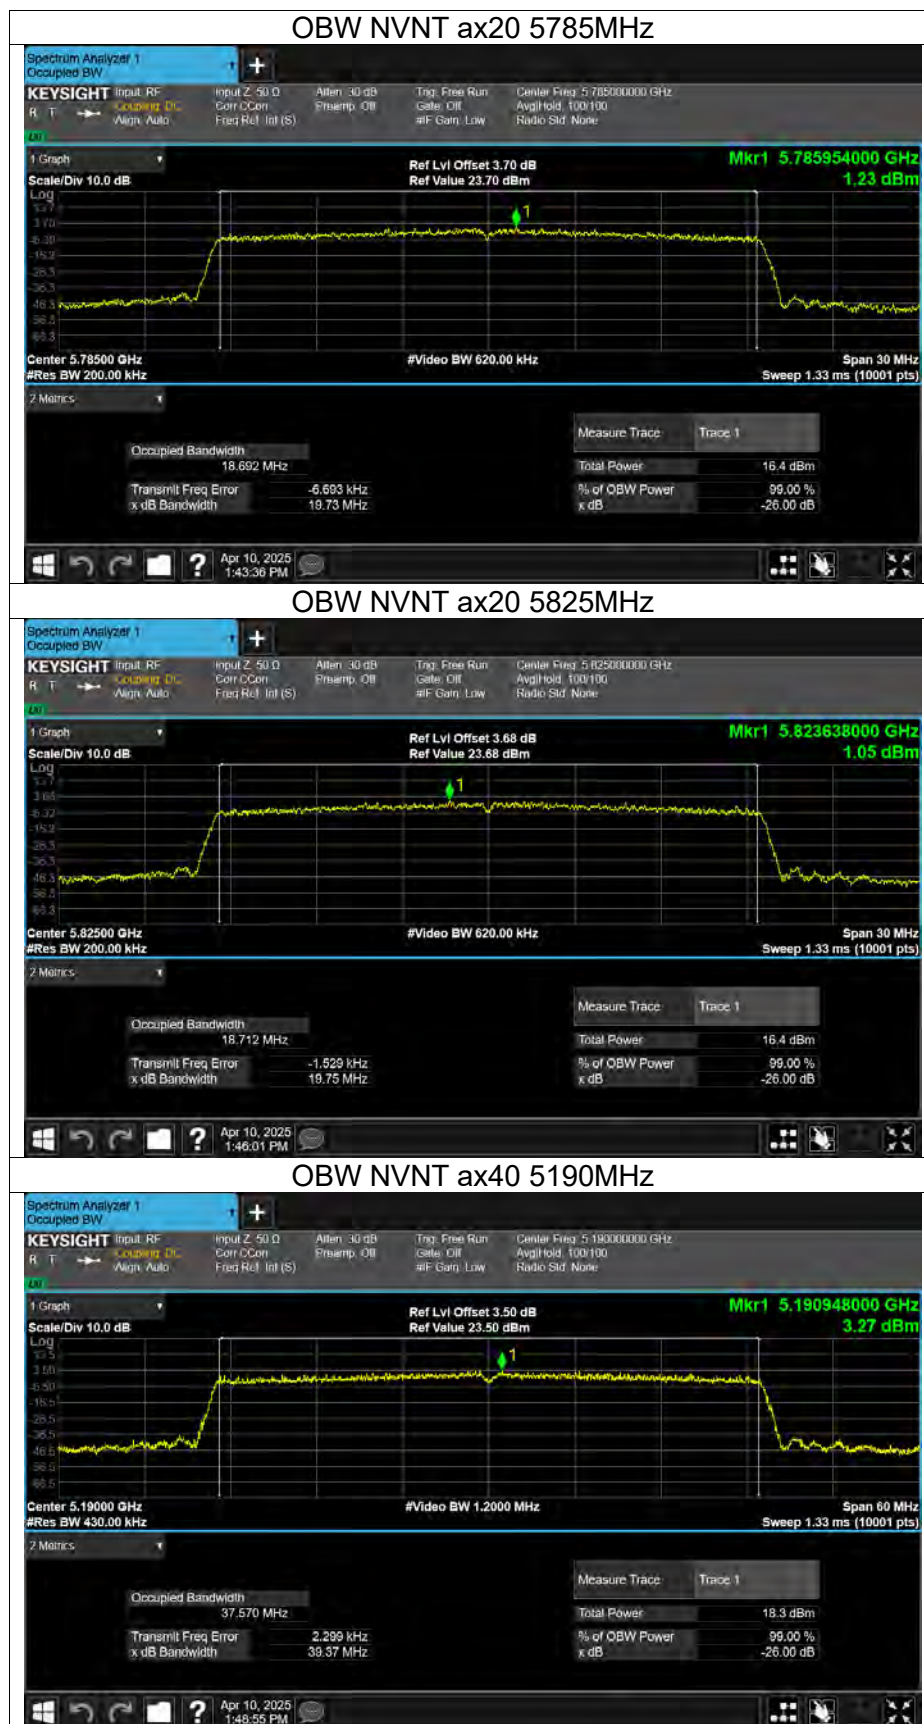

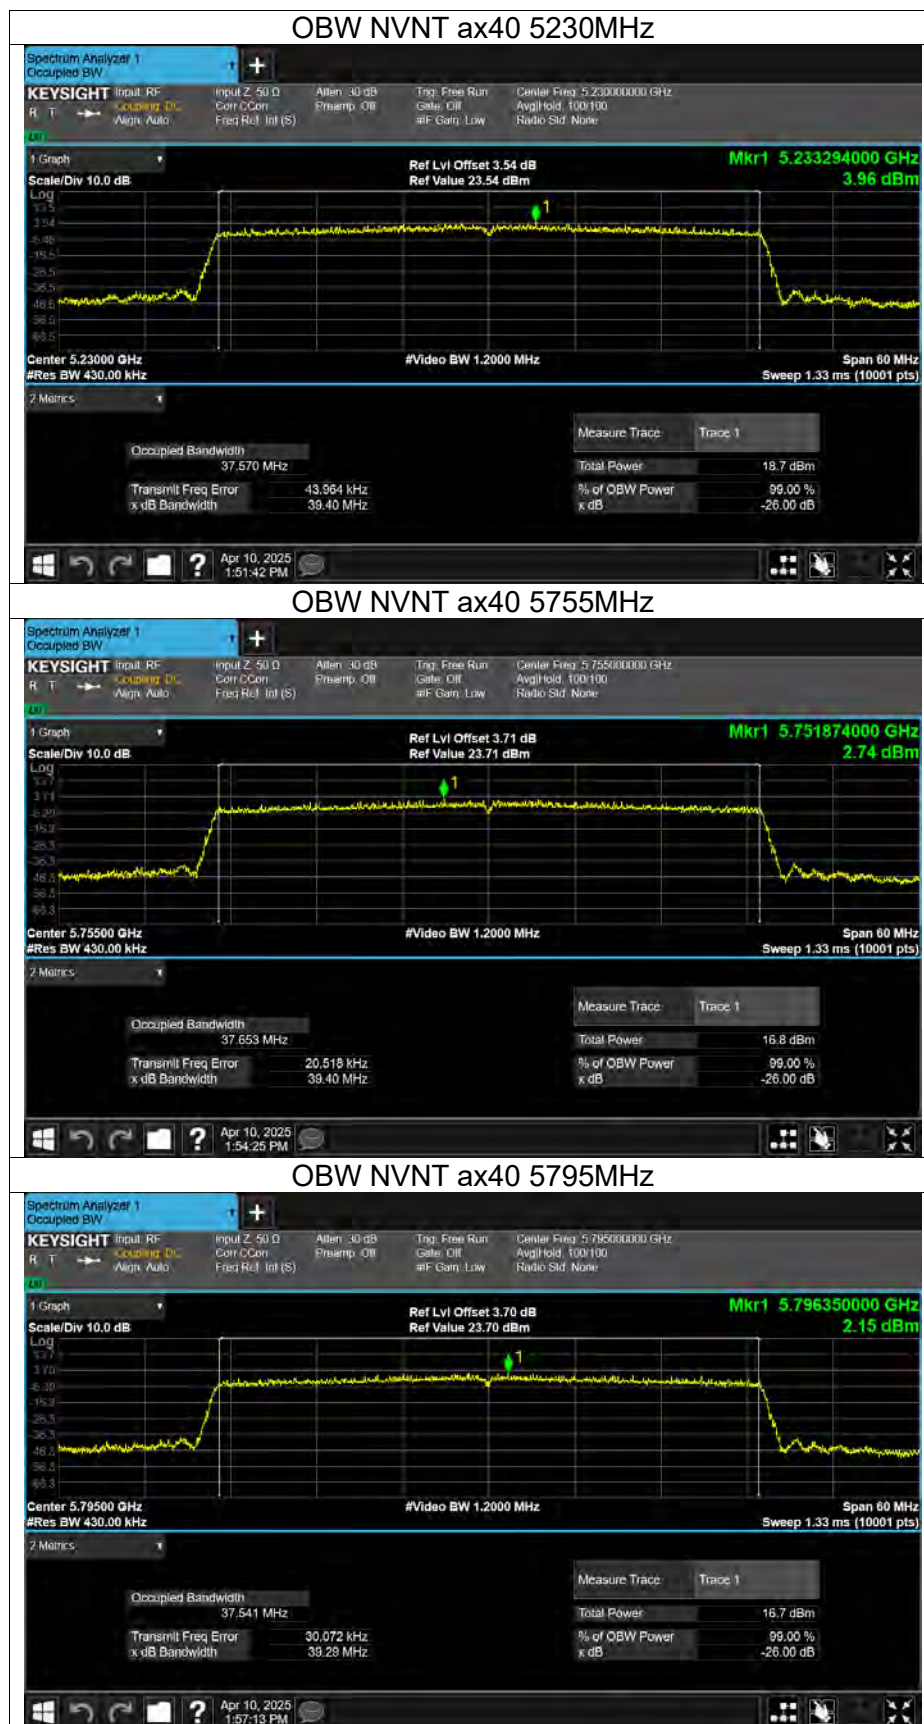



Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	2.23	0	2.23	10.8	Pass
NVNT	a	5200	0.04	0	0.04	10.8	Pass
NVNT	a	5240	2.35	0	2.35	10.8	Pass
NVNT	n20	5180	0.54	0	0.54	10.8	Pass
NVNT	n20	5200	0.93	0	0.93	10.8	Pass
NVNT	n20	5240	1.19	0	1.19	10.8	Pass
NVNT	n40	5190	-2.44	0	-2.44	10.8	Pass
NVNT	n40	5230	-2.16	0	-2.16	10.8	Pass
NVNT	ac20	5180	0.3	0	0.3	10.8	Pass
NVNT	ac20	5200	0.91	0	0.91	10.8	Pass
NVNT	ac20	5240	1.19	0	1.19	10.8	Pass
NVNT	ac40	5190	-2.33	0	-2.33	10.8	Pass
NVNT	ac40	5230	-2.26	0	-2.26	10.8	Pass
NVNT	ax20	5180	0.05	0	0.05	10.8	Pass
NVNT	ax20	5200	0.75	0	0.75	10.8	Pass
NVNT	ax20	5240	1.23	0	1.23	10.8	Pass
NVNT	ax40	5190	-2.68	0	-2.68	10.8	Pass
NVNT	ax40	5230	-1.5	0	-1.5	10.8	Pass





PSD NVNT n20 5200MHz



PSD NVNT n20 5240MHz



PSD NVNT n40 5190MHz



PSD NVNT n40 5230MHz



PSD NVNT ac20 5180MHz



PSD NVNT ac20 5200MHz



PSD NVNT ac20 5240MHz



PSD NVNT ac40 5190MHz



PSD NVNT ac40 5230MHz



PSD NVNT ax20 5180MHz



PSD NVNT ax20 5200MHz




PSD NVNT ax20 5240MHz



PSD NVNT ax40 5190MHz



PSD NVNT ax40 5230MHz

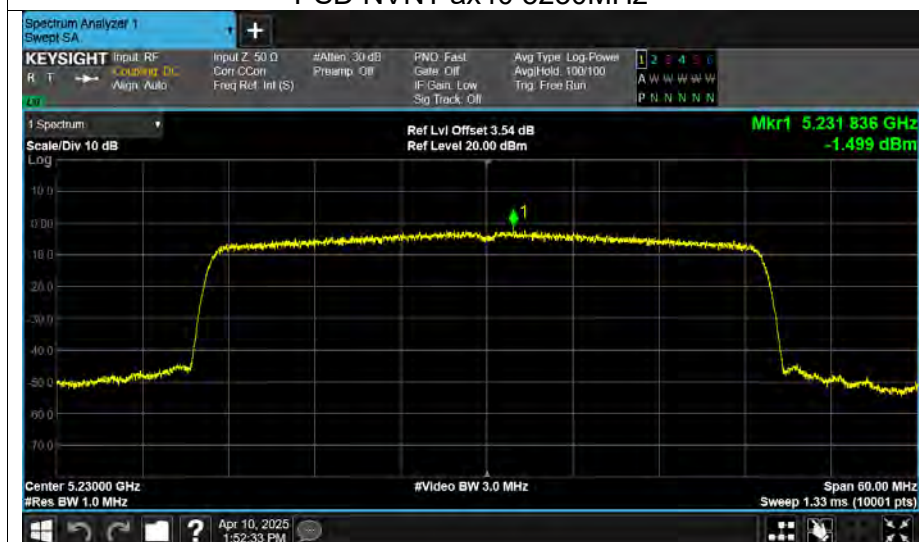



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm /500kHz)	Duty Factor (dB)	Total PSD (dBm/ 500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	-2.83	0	-2.83	29.8	Pass
NVNT	a	5785	-2.85	0	-2.85	29.8	Pass
NVNT	a	5825	-2.39	0	-2.39	29.8	Pass
NVNT	n20	5745	-3.97	0	-3.97	29.8	Pass
NVNT	n20	5785	-4.19	0	-4.19	29.8	Pass
NVNT	n20	5825	-4.65	0	-4.65	29.8	Pass
NVNT	n40	5755	-6.86	0	-6.86	29.8	Pass
NVNT	n40	5795	-7.2	0	-7.2	29.8	Pass
NVNT	ac20	5745	-3.92	0	-3.92	29.8	Pass
NVNT	ac20	5785	-4.19	0	-4.19	29.8	Pass
NVNT	ac20	5825	-4.06	0	-4.06	29.8	Pass
NVNT	ac40	5755	-7.52	0	-7.52	29.8	Pass
NVNT	ac40	5795	-6.88	0	-6.88	29.8	Pass
NVNT	ax20	5745	-4.51	0	-4.51	29.8	Pass
NVNT	ax20	5785	-4.5	0	-4.5	29.8	Pass
NVNT	ax20	5825	-4.54	0	-4.54	29.8	Pass
NVNT	ax40	5755	-7.24	0	-7.24	29.8	Pass
NVNT	ax40	5795	-7.62	0	-7.62	29.8	Pass




PSD NVNT a 5745MHz



PSD NVNT a 5785MHz



PSD NVNT a 5825MHz

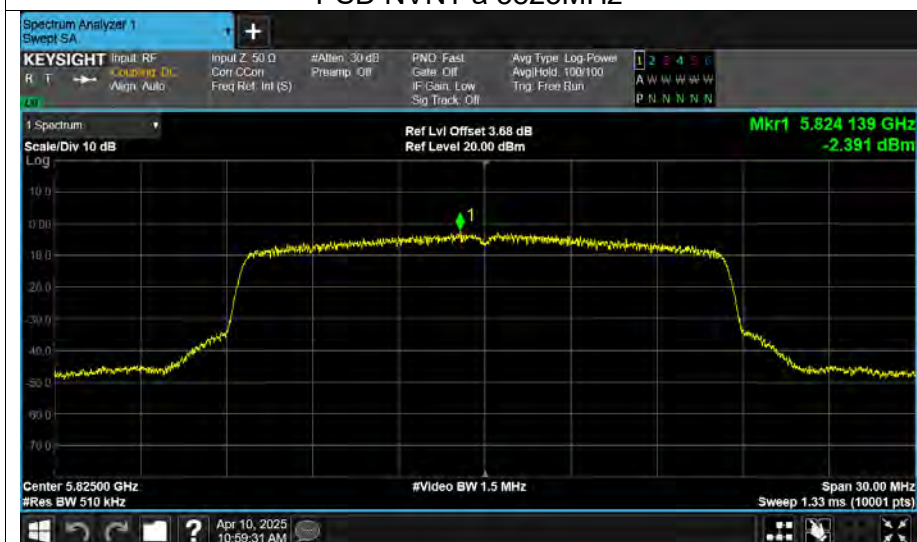



PSD NVNT n20 5745MHz




PSD NVNT n20 5785MHz









PSD NVNT n20 5825MHz





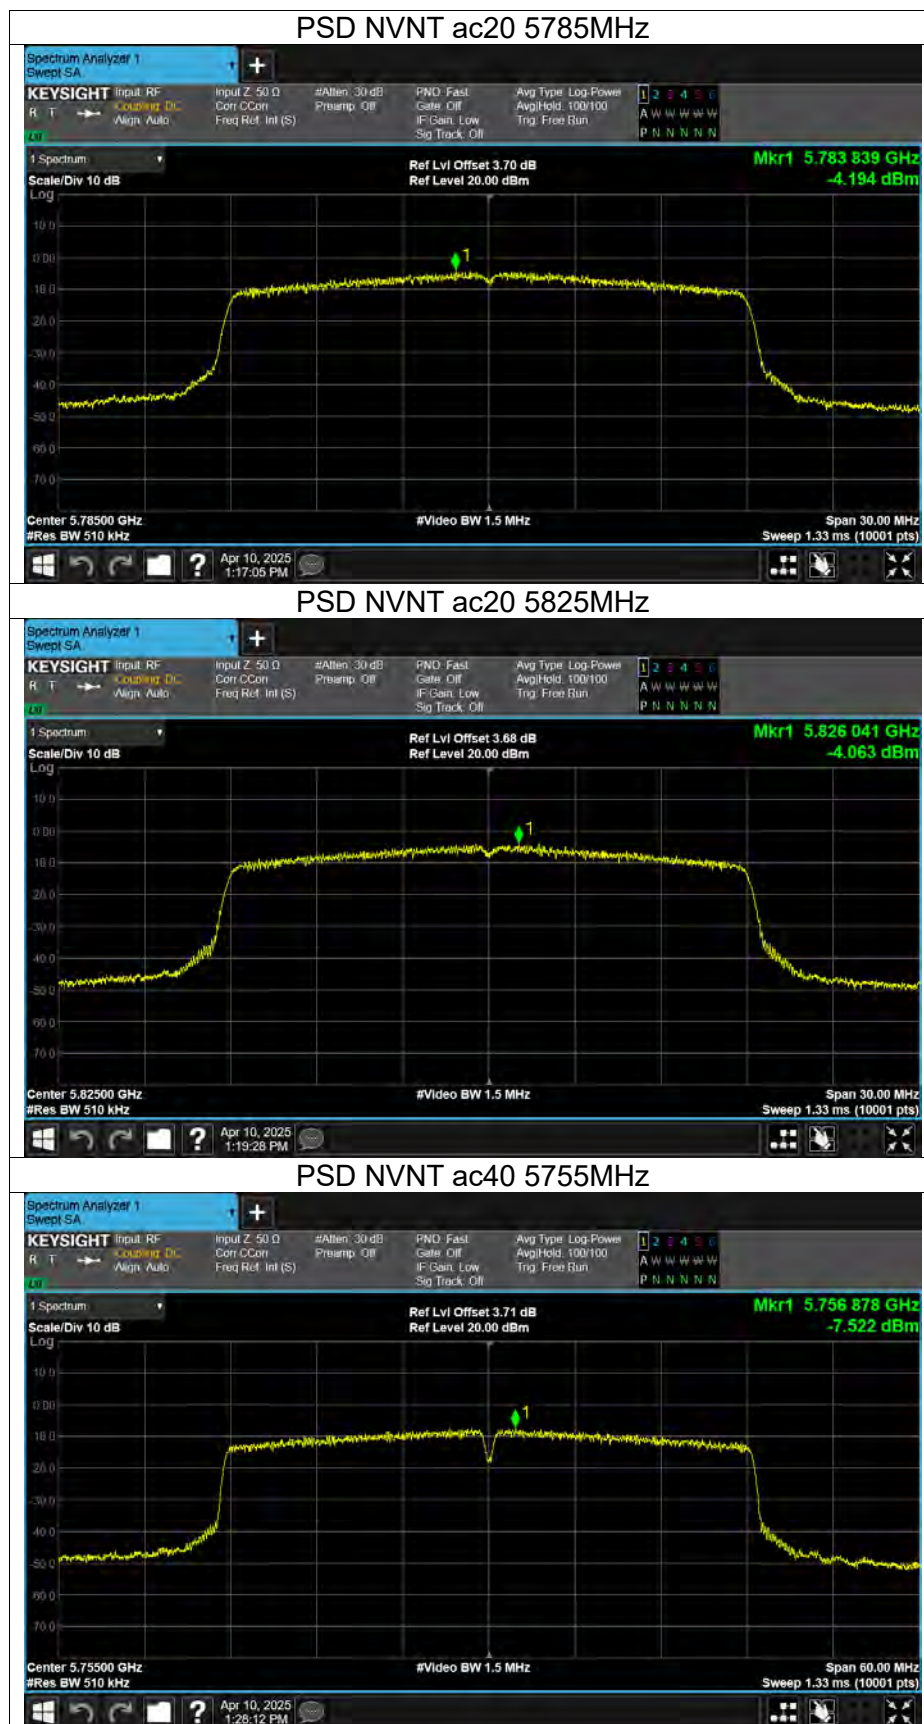

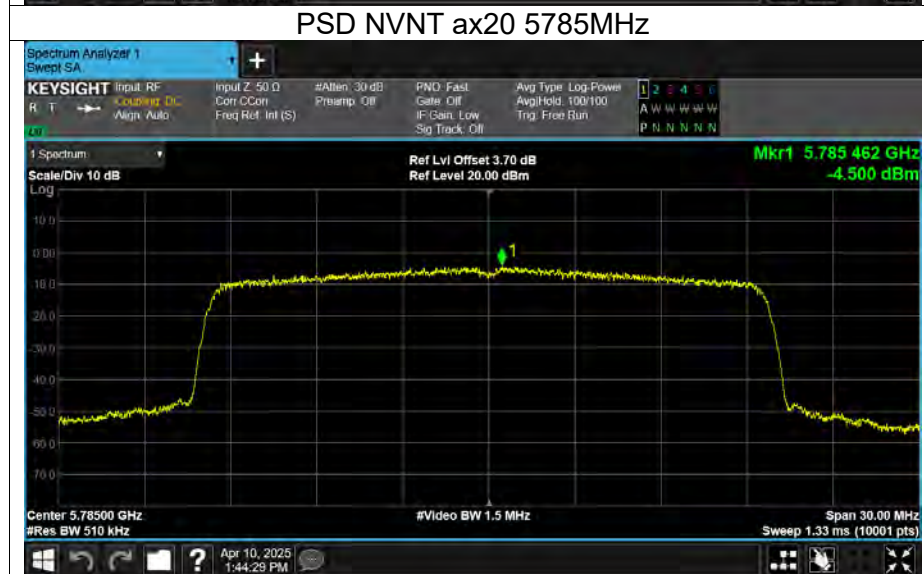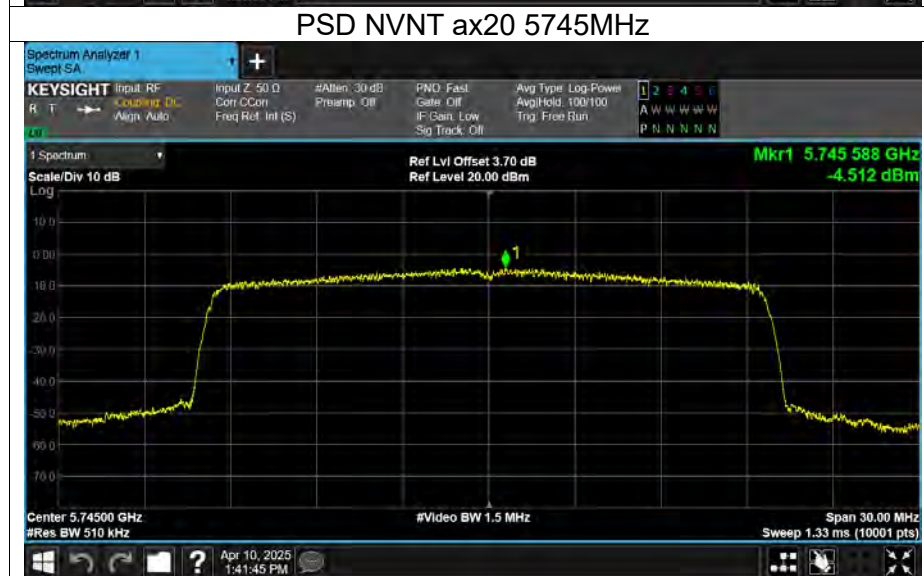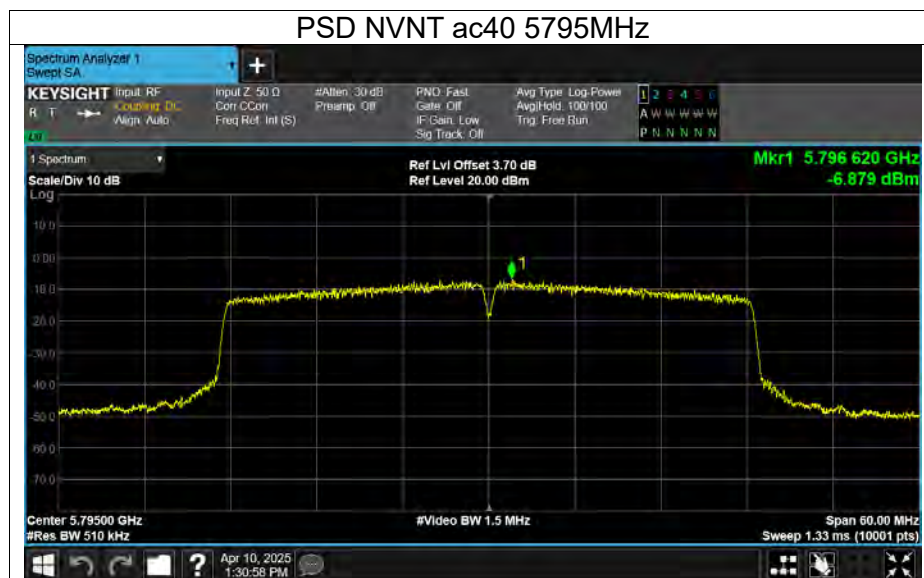

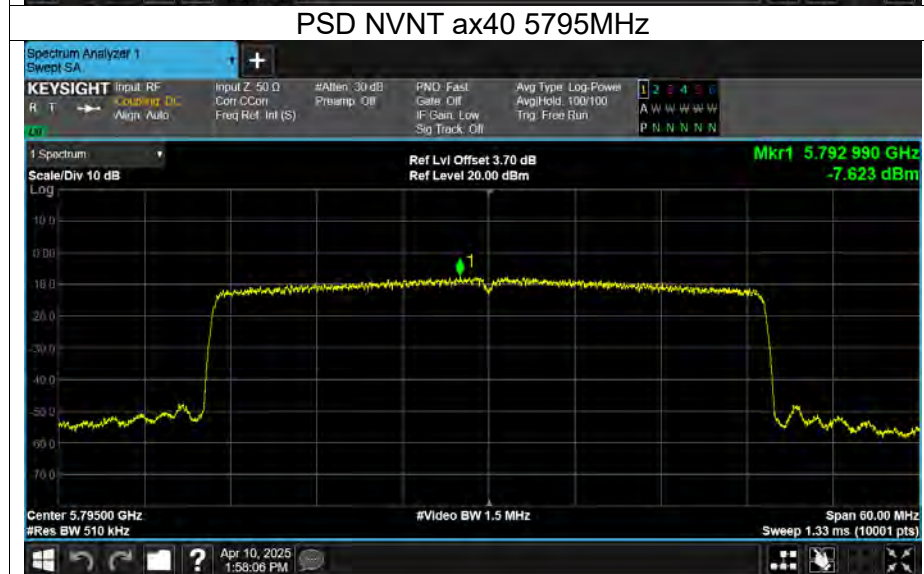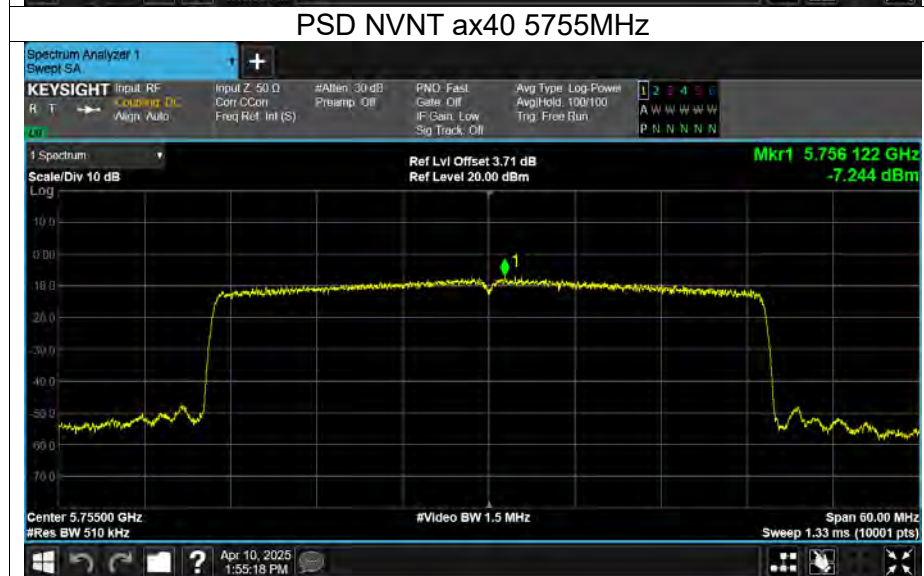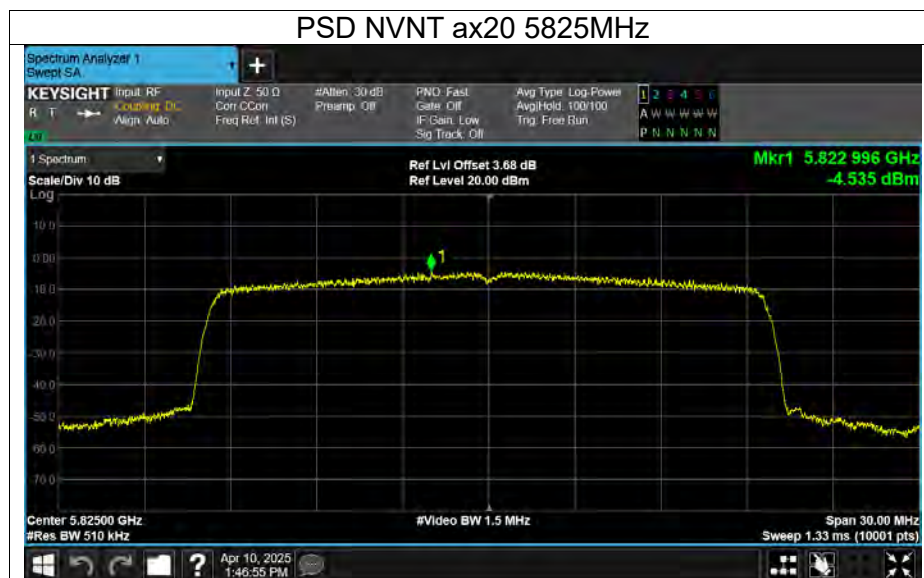



Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	-34.48	-27	Pass
NVNT	a	5240	-38.08	-27	Pass
Condition	Mode	Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	-27.68		Pass
NVNT	a	5825	-31.01		Pass
NVNT	n20	5180	-34.75	-27	Pass
NVNT	n20	5240	-39.1	-27	Pass
NVNT	n20	5745	-26.55		Pass
NVNT	n20	5825	-33.49		Pass
NVNT	n40	5190	-30.21	-27	Pass
NVNT	n40	5230	-39.03	-27	Pass
NVNT	n40	5755	-27.31		Pass
NVNT	n40	5795	-35.99		Pass
NVNT	ac20	5180	-34.77	-27	Pass
NVNT	ac20	5240	-38.8	-27	Pass
NVNT	ac20	5745	-29.18		Pass
NVNT	ac20	5825	-33.1		Pass
NVNT	ac40	5190	-29.42	-27	Pass
NVNT	ac40	5230	-38.59	-27	Pass
NVNT	ac40	5755	-28.45		Pass
NVNT	ac40	5795	-34.18		Pass
NVNT	ax20	5180	-35.62	-27	Pass
NVNT	ax20	5240	-38.51	-27	Pass
NVNT	ax20	5745	-36.55		Pass
NVNT	ax20	5825	-37.55		Pass
NVNT	ax40	5190	-35.65	-27	Pass
NVNT	ax40	5230	-39.04	-27	Pass
NVNT	ax40	5755	-32.3		Pass
NVNT	ax40	5795	-37.68		Pass





Band Edge NVNT a 5825MHz High







Band Edge NVNT n20 5180MHz Low



Band Edge NVNT n20 5240MHz High



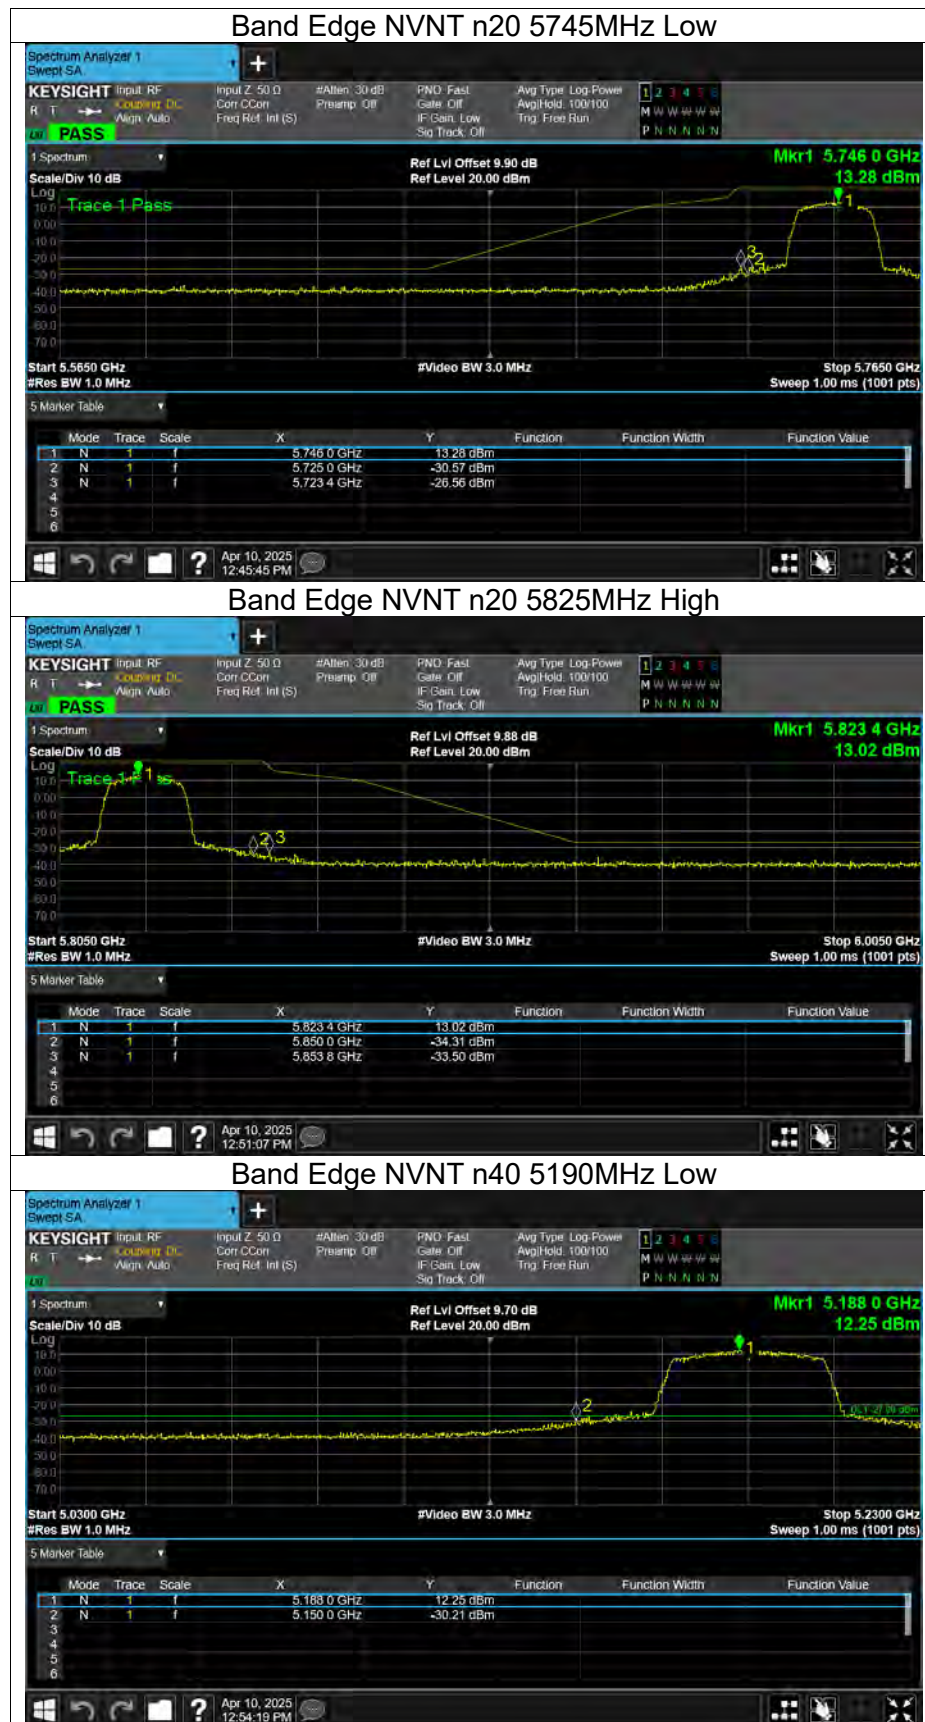

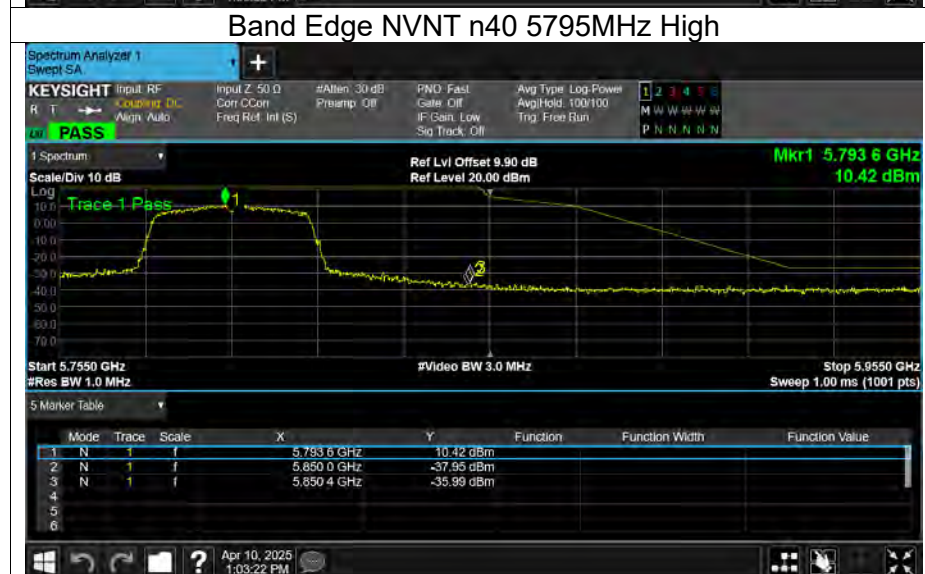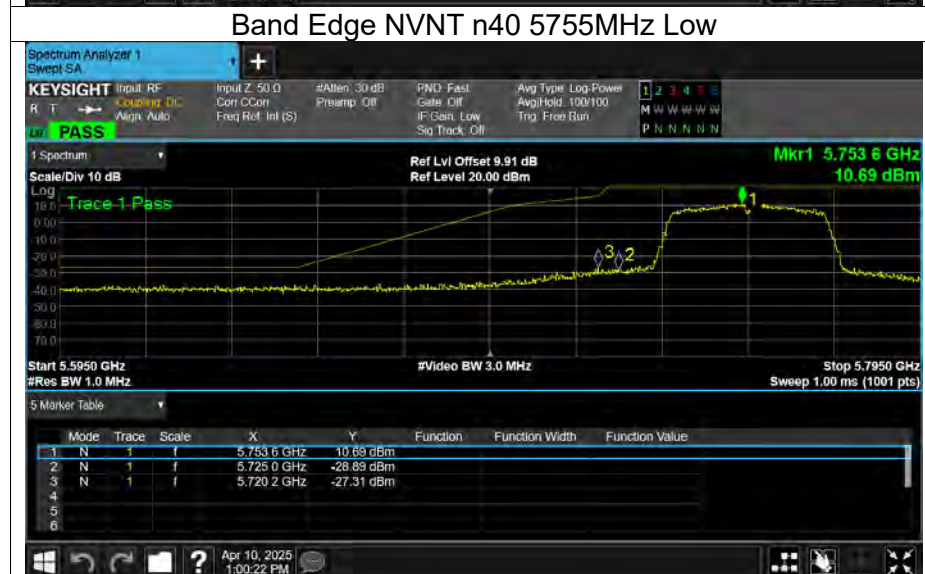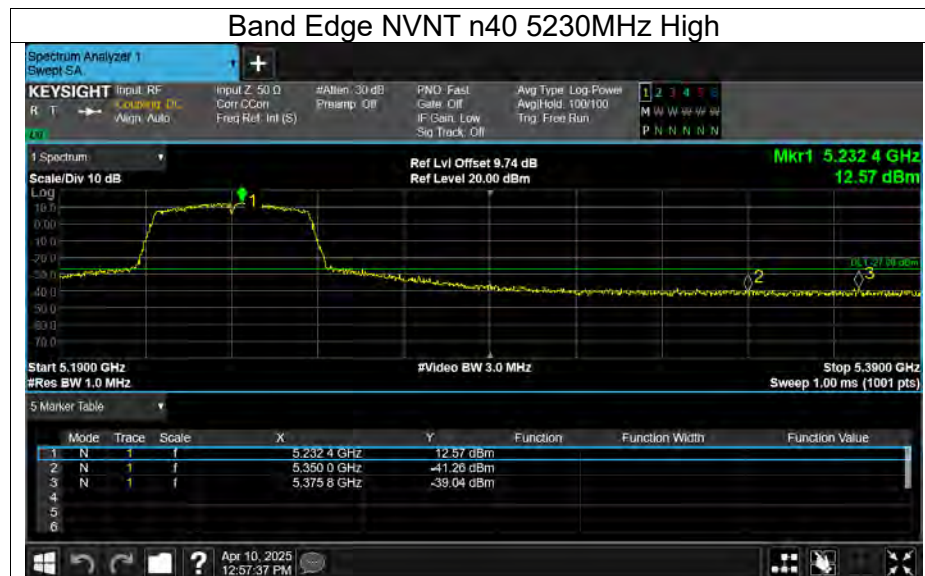





Band Edge NVNT ac20 5825MHz High



Band Edge NVNT ac40 5190MHz Low




Band Edge NVNT ac40 5230MHz High






Band Edge NVNT ac40 5755MHz Low

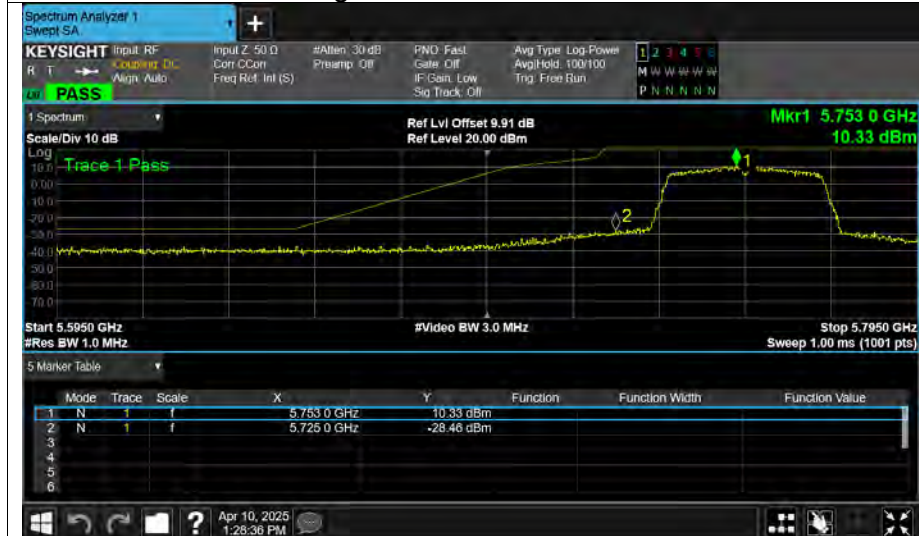

Band Edge NVNT ac40 5795MHz High



Band Edge NVNT ax20 5180MHz Low

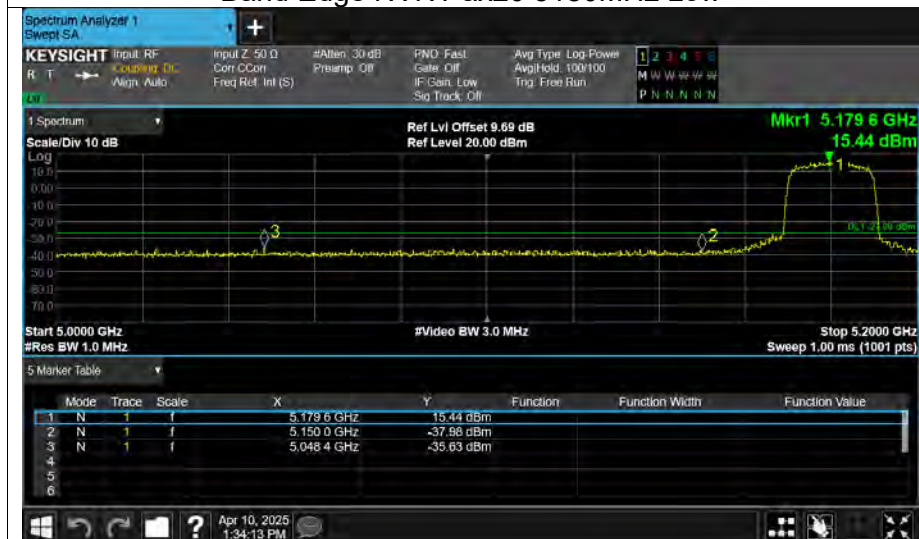



Band Edge NVNT ax20 5240MHz High





Band Edge NVNT ax20 5745MHz Low



Band Edge NVNT ax20 5825MHz High



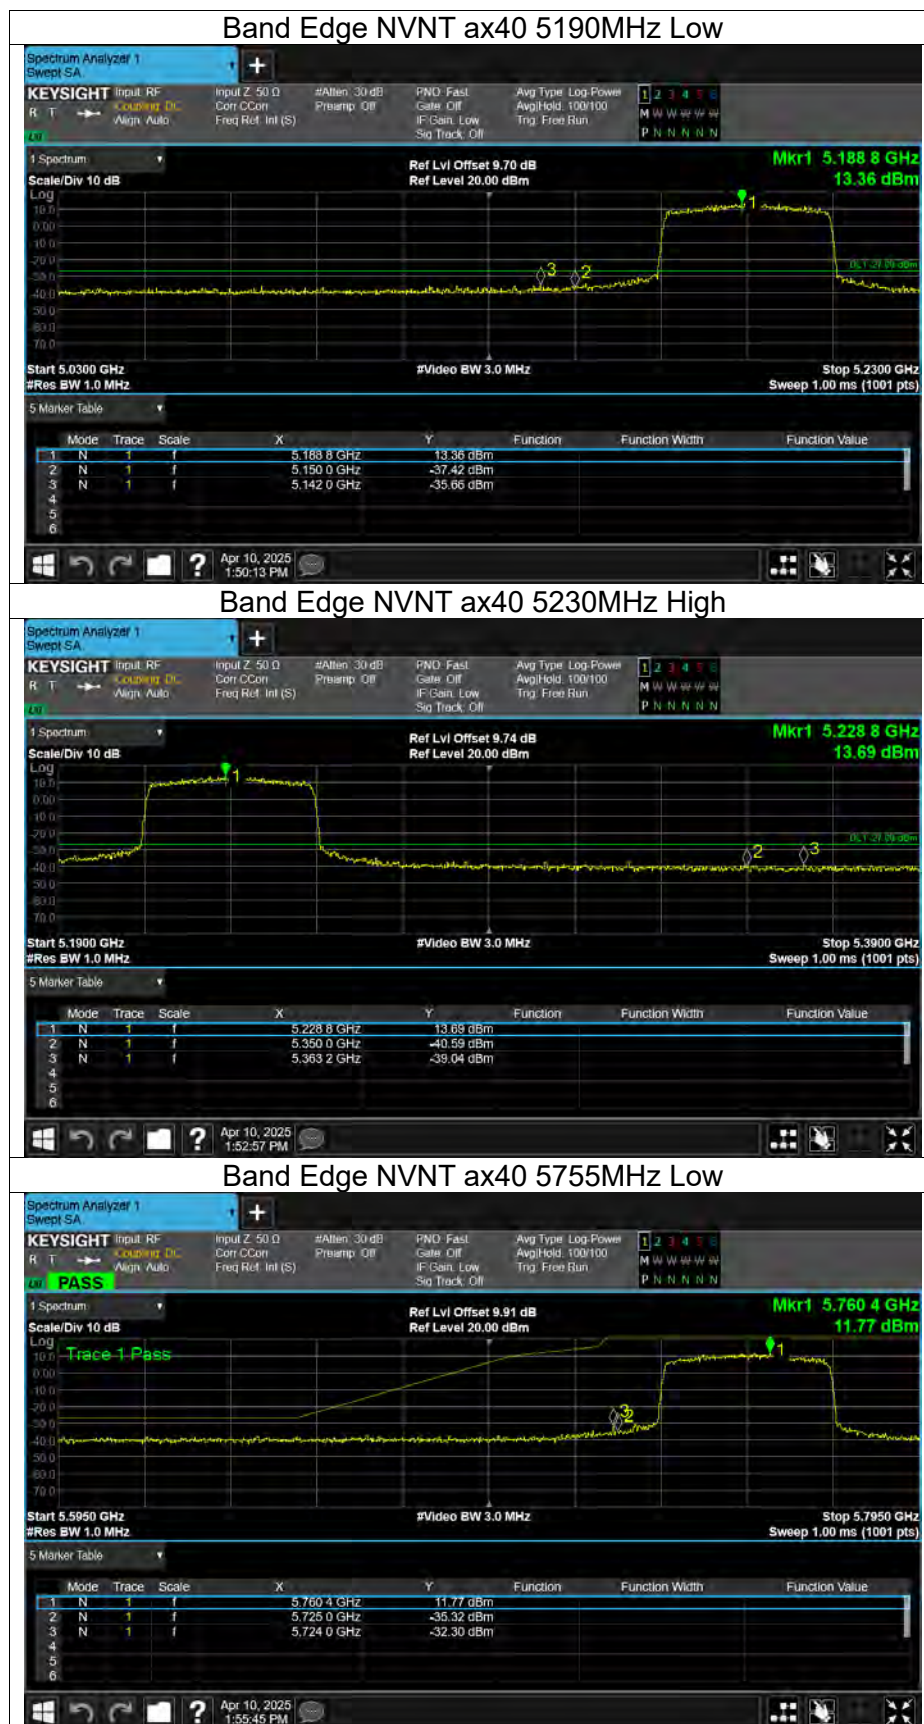

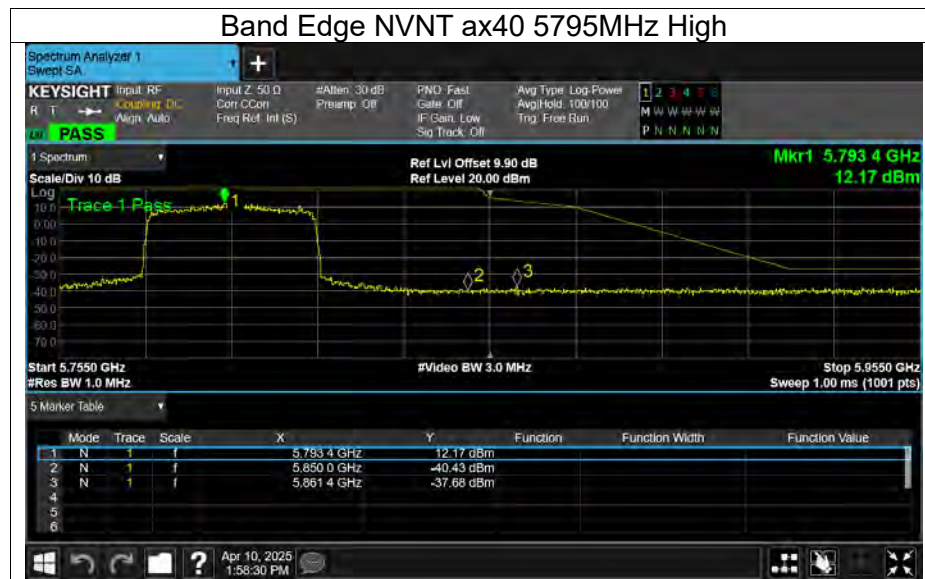



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	15.801	0.5	Pass
NVNT	a	5785	15.715	0.5	Pass
NVNT	a	5825	16.064	0.5	Pass
NVNT	n20	5745	16.996	0.5	Pass
NVNT	n20	5785	17.059	0.5	Pass
NVNT	n20	5825	17.088	0.5	Pass
NVNT	n40	5755	36.054	0.5	Pass
NVNT	n40	5795	36.049	0.5	Pass
NVNT	ac20	5745	15.621	0.5	Pass
NVNT	ac20	5785	16.663	0.5	Pass
NVNT	ac20	5825	15.655	0.5	Pass
NVNT	ac40	5755	35.934	0.5	Pass
NVNT	ac40	5795	35.318	0.5	Pass
NVNT	ax20	5745	18.576	0.5	Pass
NVNT	ax20	5785	18.412	0.5	Pass
NVNT	ax20	5825	18.301	0.5	Pass
NVNT	ax40	5755	37.577	0.5	Pass
NVNT	ax40	5795	37.439	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT a 5745MHz







-6dB Bandwidth NVNT a 5785MHz







-6dB Bandwidth NVNT a 5825MHz




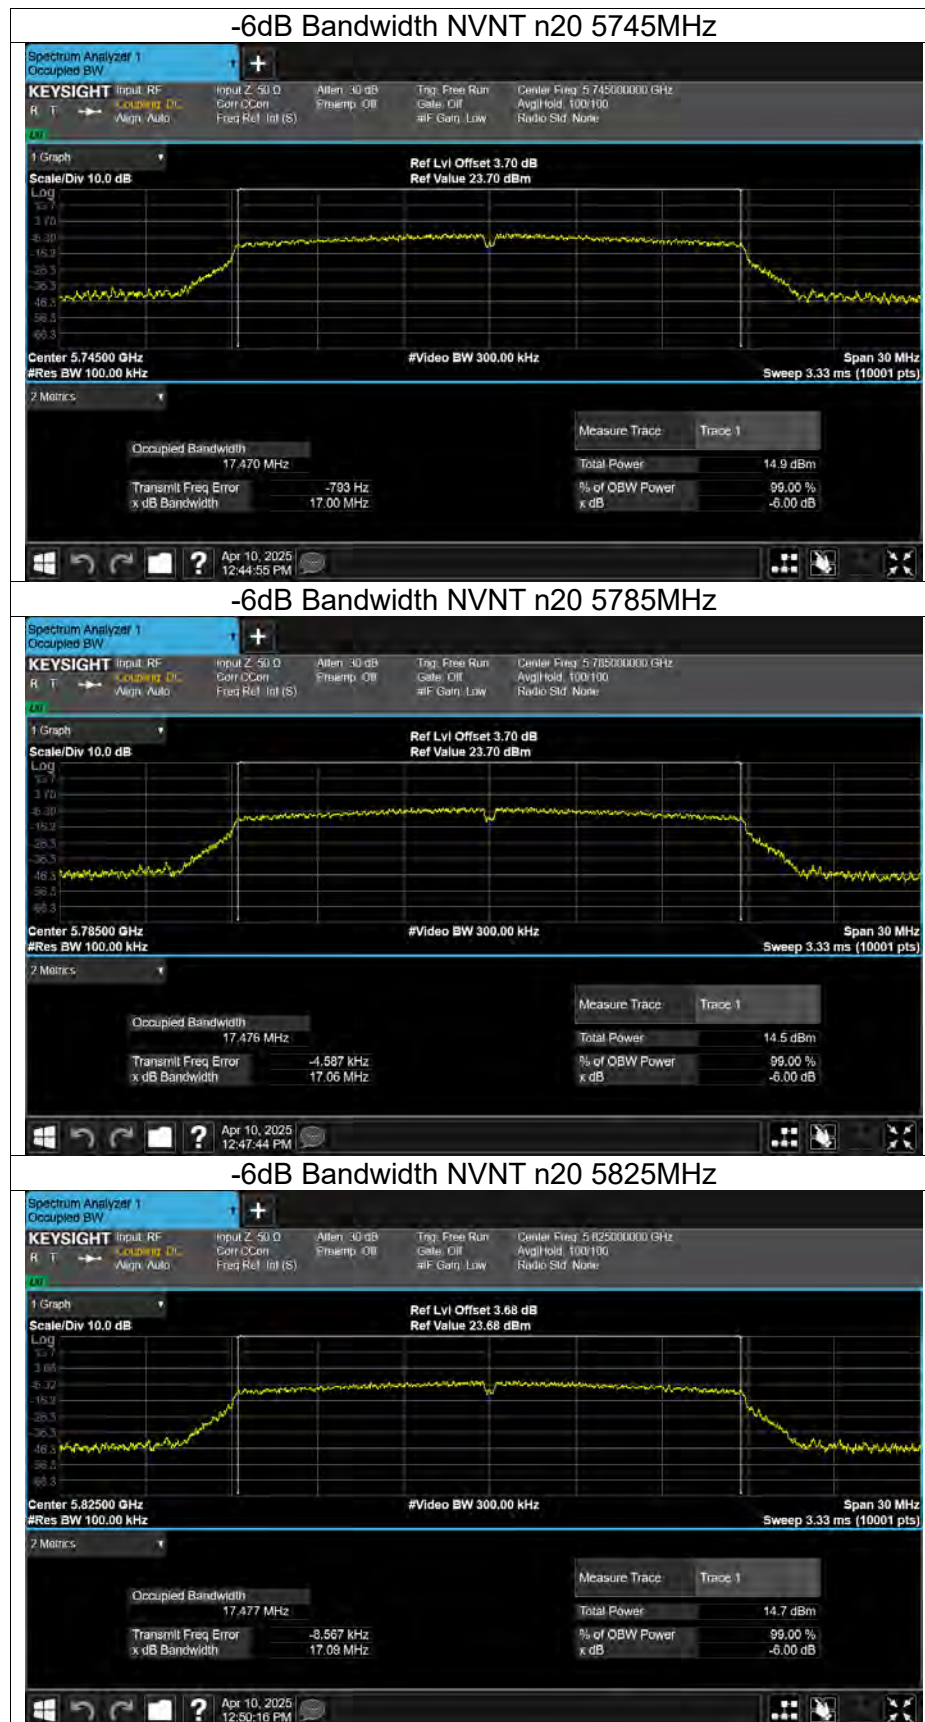

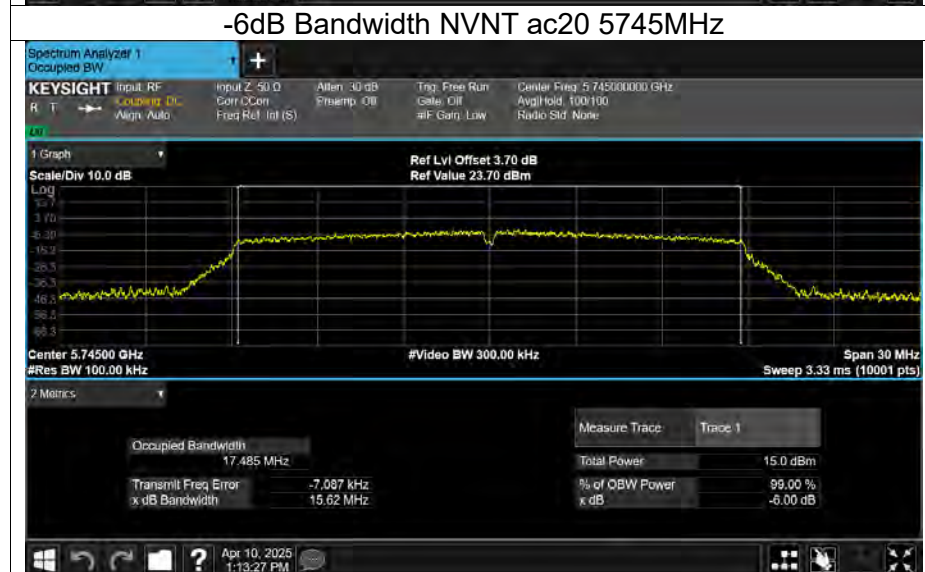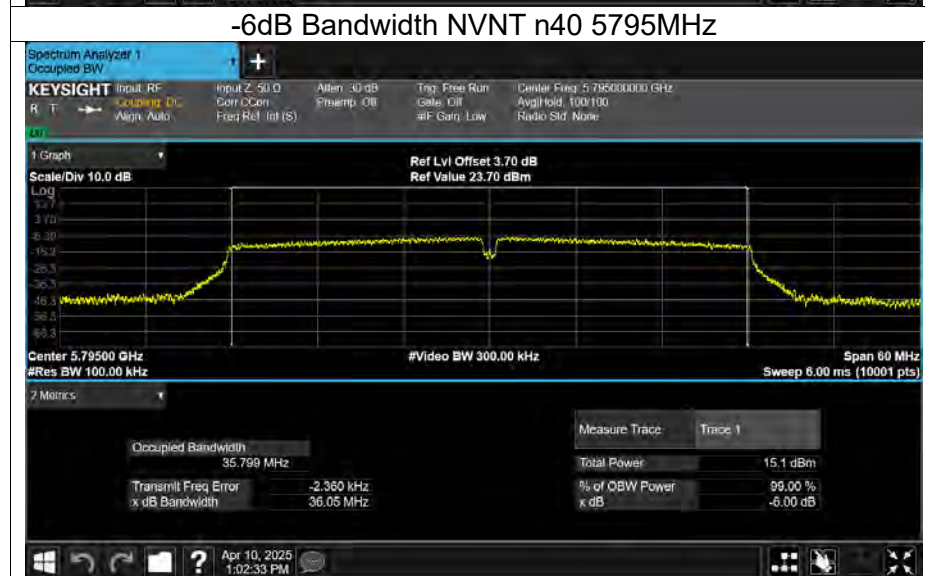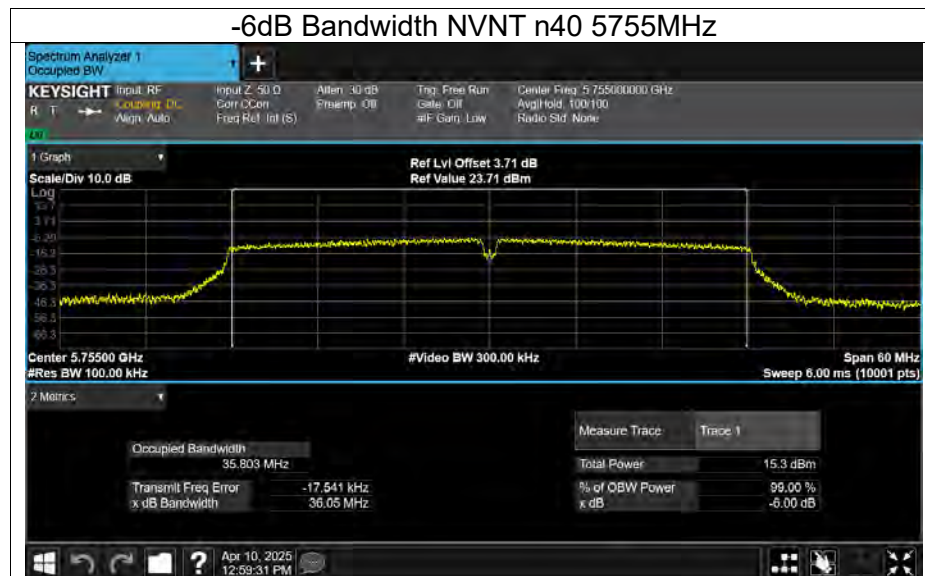

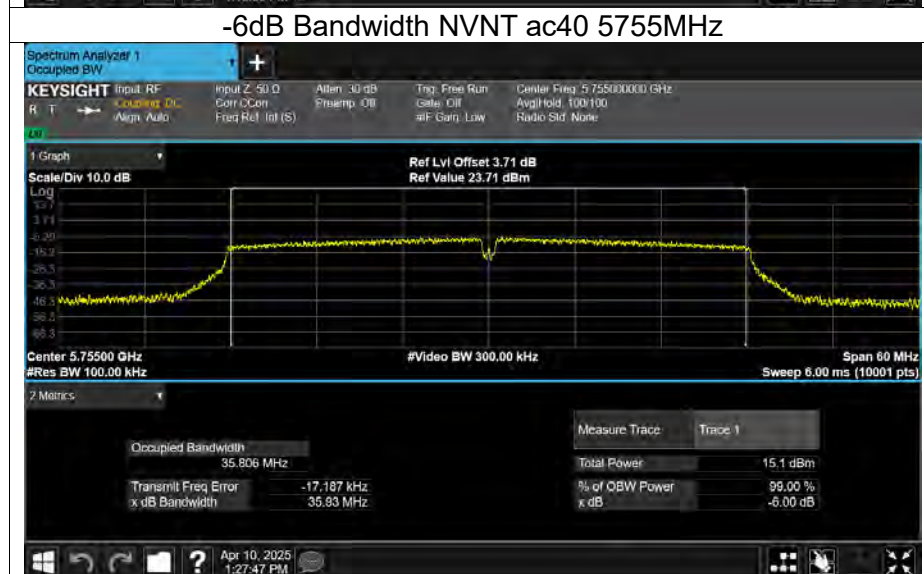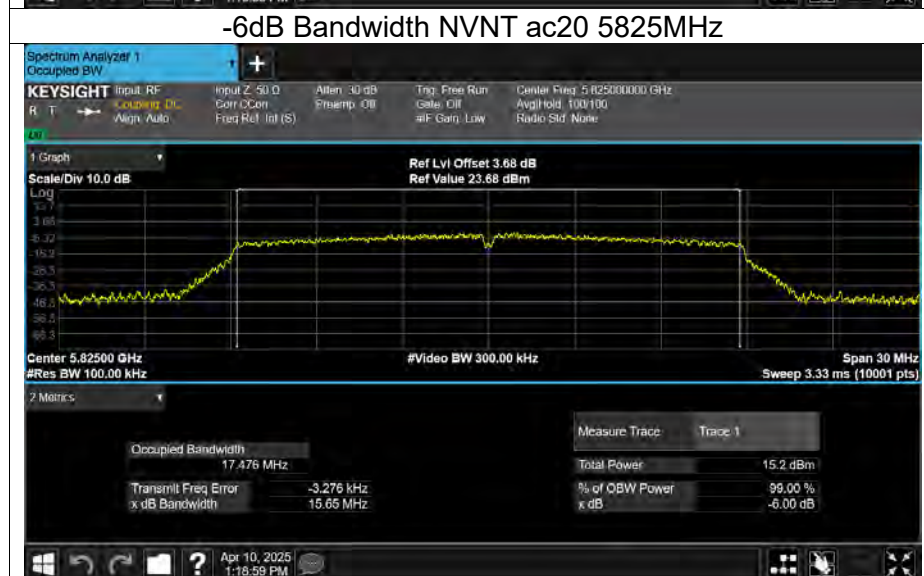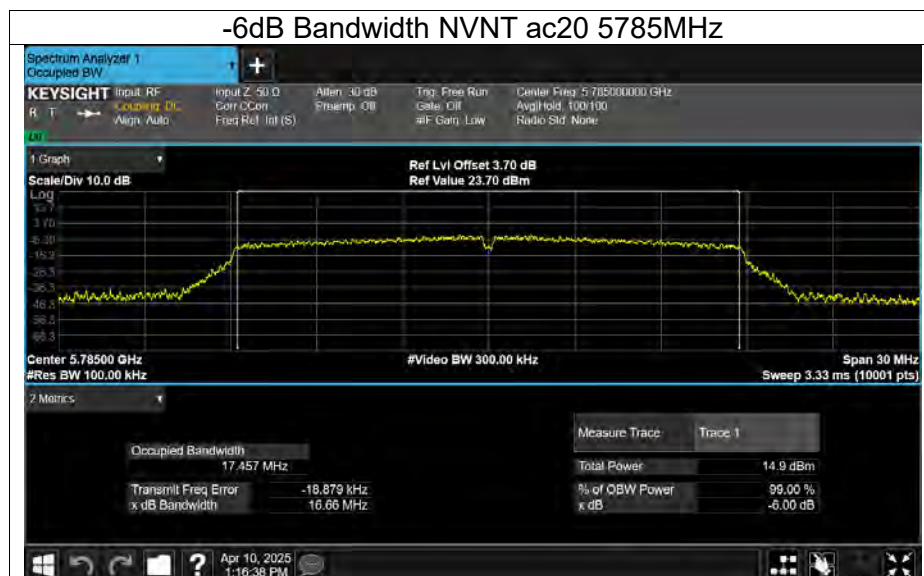

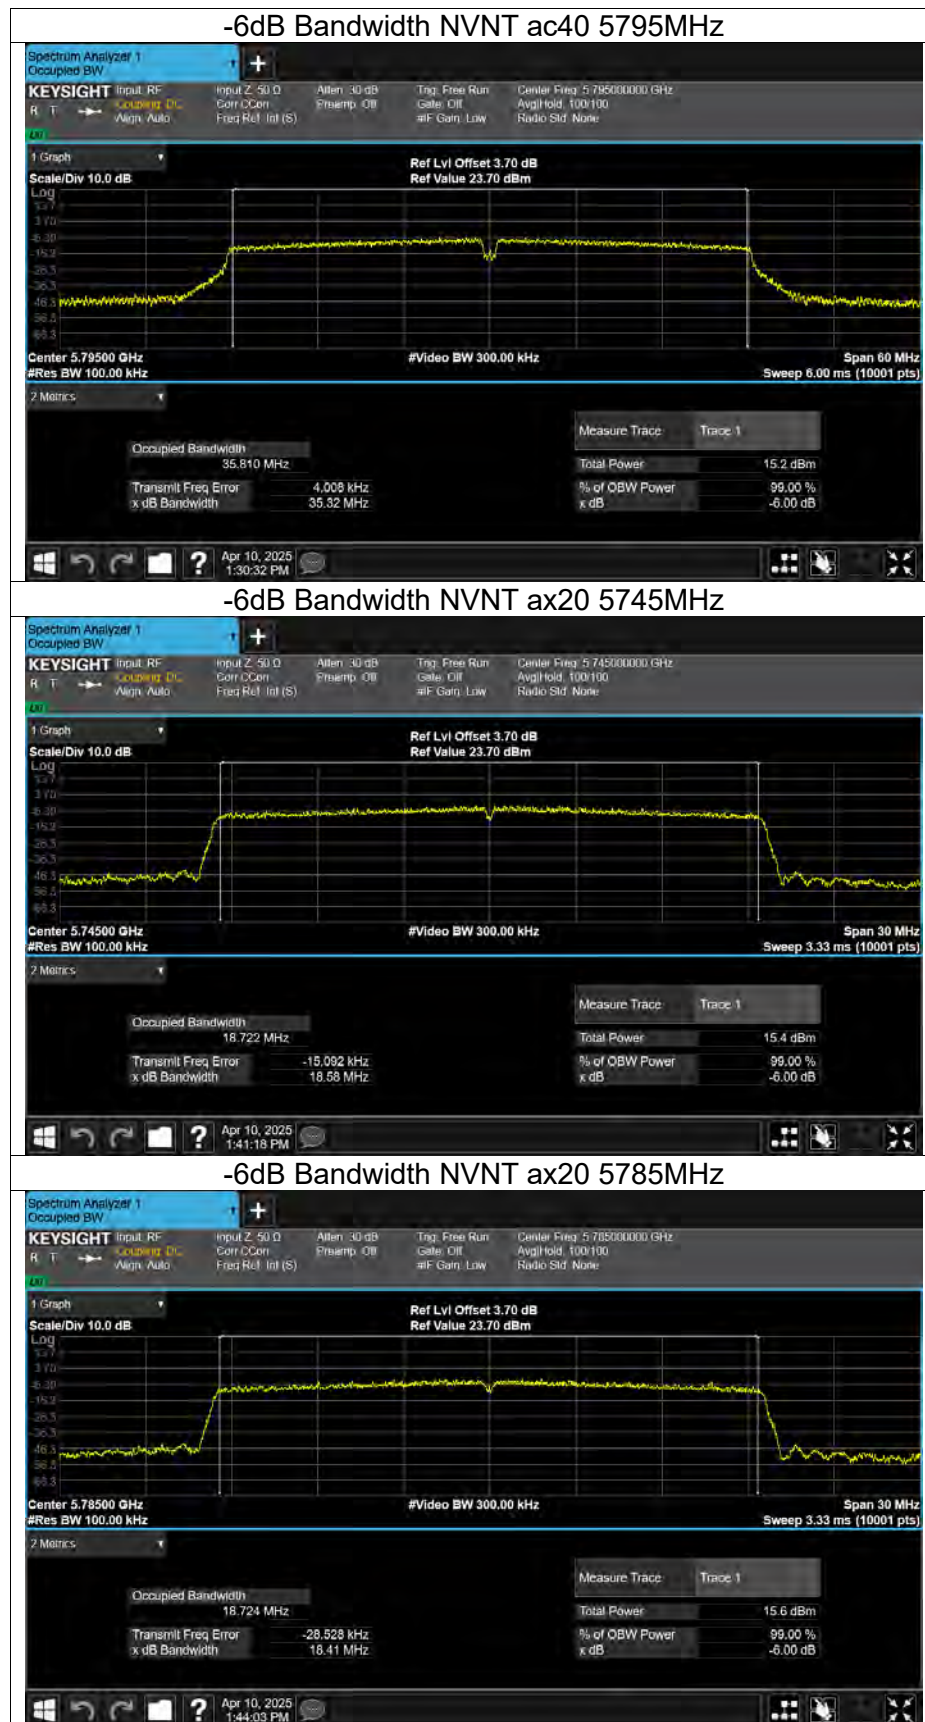

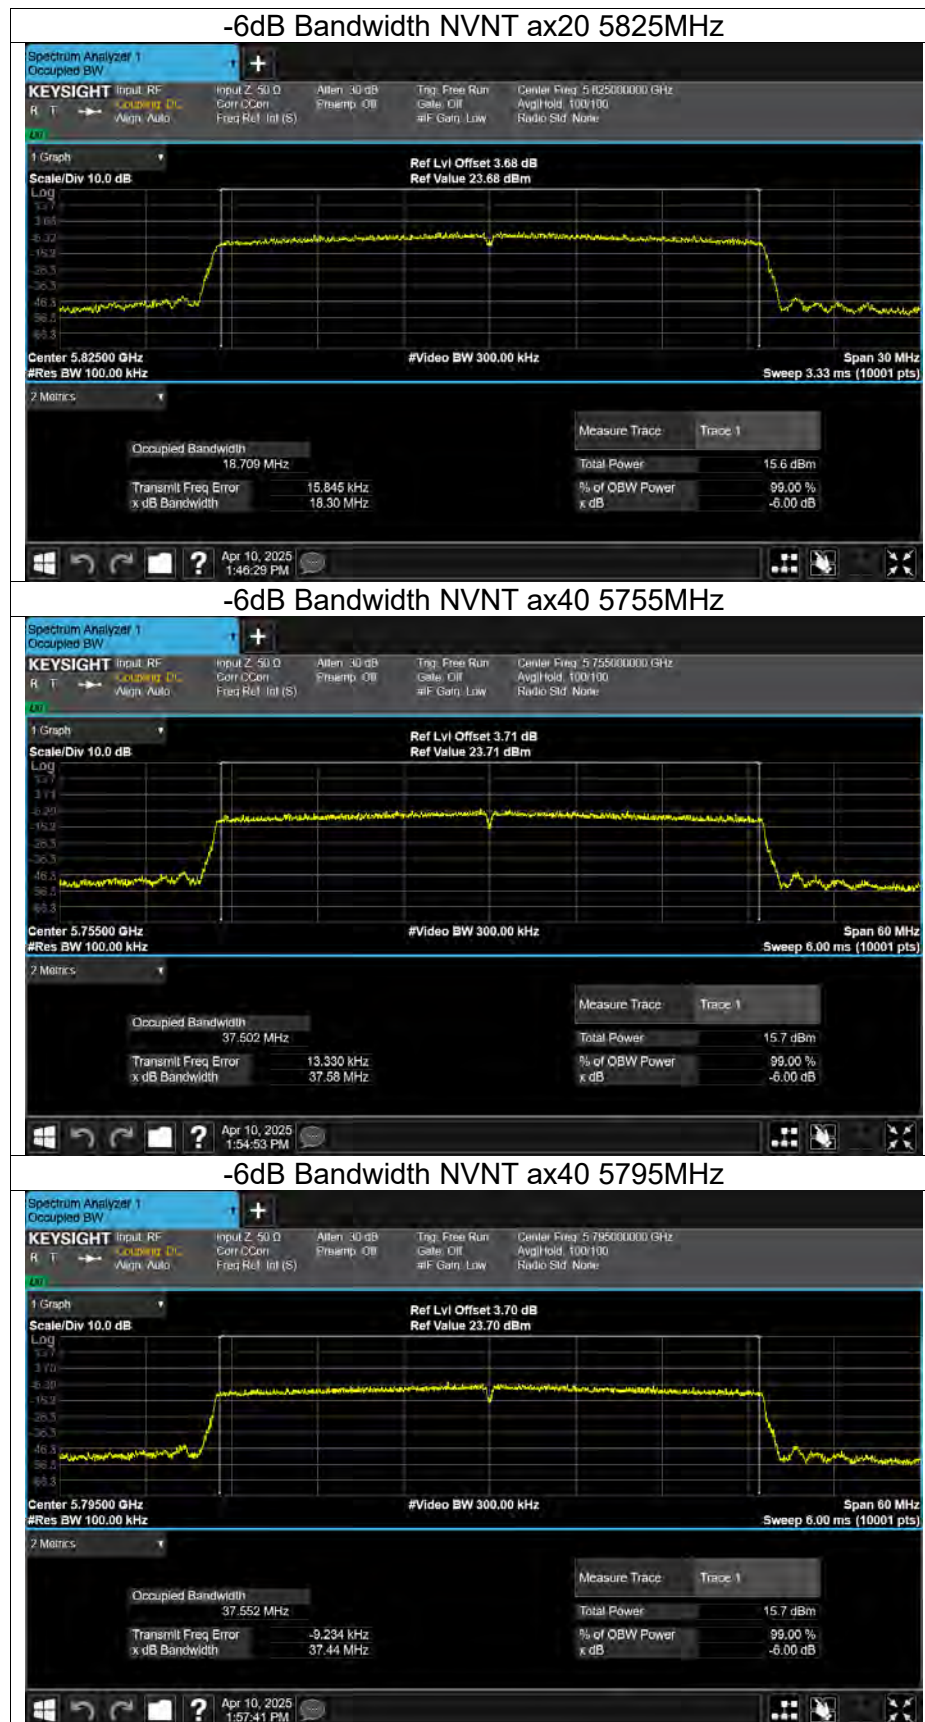



APPENDIX II - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID & IC.

※※※※※END OF THE REPORT※※※※※