


FCC Radio Test Report

FCC ID: RWO-RZ090300

This report concerns: Original Grant

Project No. : 1903C316
Equipment : Notebook
Test Model : RZ09-0300
Series Model : N/A
Applicant : Razer Inc.
Address : 201 3rd Street, Suite 900, San Francisco, CA 94103
USA

Date of Receipt : Mar. 27, 2019
Date of Test : Mar. 28, 2019 ~ Apr. 22, 2019
Issued Date : May 09, 2019
Tested by : BTL Inc.

Testing Engineer : 
(Kai Xu)

Technical Manager : 
(Steven Lu)

Authorized Signatory : 
(Ethan Ma)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Certificate #5123.02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents

Page

REPORT ISSUED HISTORY	6
1 . GENERAL SUMMARY	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	13
3.3 PARAMETERS OF TEST SOFTWARE	16
3.4 DUTY CYCLE	18
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	20
3.6 SUPPORT UNITS	20
4 . AC POWER LINE CONDUCTED EMISSIONS TEST	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	21
4.3 DEVIATION FROM TEST STANDARD	21
4.4 TEST SETUP	22
4.5 EUT OPERATION CONDITIONS	22
4.6 EUT TEST CONDITIONS	22
4.7 TEST RESULTS	22
5 . RADIATED EMISSIONS TEST	23
5.1 LIMIT	23
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM TEST STANDARD	24
5.4 TEST SETUP	25
5.5 EUT OPERATION CONDITIONS	26
5.6 EUT TEST CONDITIONS	26
5.7 TEST RESULTS - 9 KHZ to 30 MHZ	26
5.8 TEST RESULTS - 30 MHz TO 1000 MHz	26
5.9 TEST RESULTS - ABOVE 1000 MHz	26
6 . BANDWIDTH TEST	27
6.1 LIMIT	27
6.2 TEST PROCEDURE	27

Table of Contents

Page

6.3 TEST PROCEDURE	27
6.4 TEST SETUP	28
6.5 EUT OPERATION CONDITIONS	28
6.6 EUT TEST CONDITIONS	28
6.7 TEST RESULTS	28
7 . MAXIMUM OUTPUT POWER TEST	29
7.1 LIMIT	29
7.2 TEST PROCEDURE	29
7.3 DEVIATION FROM STANDARD	29
7.4 TEST SETUP	30
7.5 EUT OPERATION CONDITIONS	30
7.6 EUT TEST CONDITIONS	30
7.7 TEST RESULTS	30
8 . POWER SPECTRAL DENSITY TEST	31
8.1 LIMIT	31
8.2 TEST PROCEDURE	31
8.3 DEVIATION FROM STANDARD	31
8.4 TEST SETUP	32
8.5 EUT OPERATION CONDITIONS	32
8.6 UT TEST CONDITIONS	32
8.7 TEST RESULTS	32
9 . FREQUENCY STABILITY MEASUREMENT	33
9.1 LIMIT	33
9.2 TEST PROCEDURE	33
9.3 DEVIATION FROM STANDARD	33
9.4 TEST SETUP	34
9.5 EUT OPERATION CONDITIONS	34
9.6 EUT TEST CONDITIONS	34
9.7 TEST RESULTS	34
10 . MEASUREMENT INSTRUMENTS LIST	35
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	37
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	40
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ	45

Table of Contents

Page

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	48
APPENDIX E - BANDWIDTH	293
APPENDIX F - CONDUCTED OUTPUT POWER	310
APPENDIX G - POWER SPECTRAL DENSITY	337
APPENDIX H - FREQUENCY STABILITY	378

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	May 09, 2019

1. GENERAL SUMMARY

Equipment : Notebook
Brand Name : RAZER
Test Model : RZ09-0300
Series Model : N/A
Applicant : Razer Inc.
Manufacturer : Razer Inc.
Address : 201 3rd Street, Suite 900, San Francisco, CA 94103 USA
Date of Test : Mar. 28, 2019 ~ Apr. 22, 2019
Test Sample : Engineering Sample No.: D190303120
Standard(s) : FCC Part15, Subpart E(15.407)
ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc..

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-4-1903C316) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of A2LA according to the ISO/IEC 17025 quality assessment standard and technical standard(s).

Test results included in this report are only for the UNII-1, UNII-2A, UNII-2C and UNII-3 part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s):FCC Part15, Subpart E(15.407)				
Standard(s) Section	Test Item	Test Result	Judgement	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	Appendix A	Pass	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	Appendix B Appendix C Appendix D	Pass	-----
15.407(a) 15.407(e)	Spectrum Bandwidth	Appendix E	Pass	-----
15.407(a)	Maximum Output Power	Appendix F	Pass	-----
15.407(a)	Power Spectral Density	Appendix G	Pass	-----
15.407(g)	Frequency Stability	Appendix H	Pass	-----
15.203	Antenna Requirements	-----	PASS	-----
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (3) For UNII-1 this device was functioned as a
☐ Access point device ☒ Client device

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30 MHz	2.32

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9 kHz~30 MHz	V	3.79
		9 kHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	3.82
		30 MHz~200 MHz	H	3.60
		200 MHz~1,000 MHz	V	3.86
		200 MHz~1,000 MHz	H	3.94
		1 GHz~18 GHz	V	3.12
		1 GHz~18 GHz	H	3.68
		18 GHz~40 GHz	V	4.15
		18 GHz~40 GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Notebook
Brand Name	RAZER
Test Model	RZ09-0300
Series Model	N/A
Model Difference(s)	N/A
Software Version	Window 10
Hardware Version	DA530_MB
Power Source	1# DC voltage supplied from AC/DC adapter. Brand / Model: RAZER / RC30-0238 2# Supplied from battery. Brand / Model: RAZER / RC30-0270
Power Rating	1# I/P: 100-240V~2.5A 50/60Hz O/P: 19.5V  10.26A 2# DC 15.4V, 4221mAh/65Wh
Operation Frequency	UNII-1: 5150 MHz~5250 MHz UNII-2A: 5250 MHz~5350 MHz UNII-2C: 5470 MHz~5725 MHz UNII-3: 5725 MHz~5850 MHz
Modulation Type	OFDM
Bit Rate of Transmitter	Up to 1733.4Mbps
Maximum Conducted Output Power for UNII-1	IEEE 802.11a: 19.08 dBm (0.0809 W) IEEE 802.11n (HT20): 19.06 dBm (0.0805 W) IEEE 802.11n (HT40): 18.23 dBm (0.0665 W) IEEE 802.11ac (VHT20): 19.16 dBm (0.0824 W) IEEE 802.11ac (VHT40): 18.54 dBm (0.0714 W) IEEE 802.11ac (VHT80): 17.29 dBm (0.0536 W) IEEE 802.11ac (VHT160): 17.18 dBm (0.0522 W)
Maximum Conducted Output Power for UNII-2A	IEEE 802.11a: 19.06 dBm (0.0805 W) IEEE 802.11n (HT20): 19.11 dBm (0.0815 W) IEEE 802.11n (HT40): 18.18 dBm (0.0658 W) IEEE 802.11ac (VHT20): 19.20 dBm (0.0832 W) IEEE 802.11ac (VHT40): 18.56 dBm (0.0718 W) IEEE 802.11ac (VHT80): 17.31 dBm (0.0538 W)
Maximum Conducted Output Power for UNII-2C	IEEE 802.11a: 19.11 dBm (0.0815 W) IEEE 802.11n (HT20): 19.04 dBm (0.0802 W) IEEE 802.11n (HT40): 18.23 dBm (0.0665 W) IEEE 802.11ac (VHT20): 19.19 dBm (0.0830 W) IEEE 802.11ac (VHT40): 18.59 dBm (0.0723 W) IEEE 802.11ac (VHT80): 17.34 dBm (0.0542 W) IEEE 802.11ac (VHT160): 17.16 dBm (0.0520 W)
Maximum Conducted Output Power for UNII-3	IEEE 802.11a: 19.09 dBm (0.0811 W) IEEE 802.11n (HT20): 19.08 dBm (0.0809 W) IEEE 802.11n (HT40): 18.21 dBm (0.0662 W) IEEE 802.11ac (VHT20): 19.19 dBm (0.0830 W) IEEE 802.11ac (VHT40): 18.59 dBm (0.0723 W) IEEE 802.11ac (VHT80): 17.25 dBm (0.0531 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

IEEE 802.11ac (VHT160)	
Channel	Frequency (MHz)
50	5250
114	5570

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1		BY5810-16-001-C	PIFA	IPEX	4.65
2		BY5810-16-002-C	PIFA	IPEX	4.69

Note: This EUT supports MIMO 2X2, any transmit signals are correlated with each other, so Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi, that is Directional gain = $10\log[(10^{4.65/20} + 10^{4.69/20})^2 / 2]$ dBi = 7.68. So, the UNII-1, UNII-2A, UNII-2C output power limit is $24 - 7.68 + 6 = 22.32$, the UNII-3 output power limit is $30 - 7.68 + 6 = 28.32$. The UNII-1, UNII-2A, UNII-2C power density limit is $11 - 7.68 + 6 = 9.32$, the UNII-3 power density limit is $30 - 7.68 + 6 = 28.32$.

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX AC (VHT160) Mode / CH50 (UNII-1)
Mode 8	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N (HT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 10	TX N (HT40) Mode / CH54, CH62 (UNII-2A)
Mode 11	TX AC (VHT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 12	TX AC (VHT40) Mode / CH54, CH62 (UNII-2A)
Mode 13	TX AC (VHT80) Mode / CH58 (UNII-2A)
Mode 14	TX A Mode / CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N (HT20) Mode / CH100, CH116, CH140 (UNII-2C)
Mode 16	TX N (HT40) Mode / CH102, CH110, CH134 (UNII-2C)
Mode 17	TX AC (VHT20) Mode / CH100, CH116, CH140 (UNII-2C)
Mode 18	TX AC (VHT40) Mode / CH102, CH110, CH134 (UNII-2C)
Mode 19	TX AC (VHT80) Mode / CH106, CH122 (UNII-2C)
Mode 20	TX AC (VHT160) Mode / CH114 (UNII-2C)
Mode 21	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 22	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 25	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 26	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 27	TX AC(VHT20) Mode / CH60 (UNII-2A)

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 27	TX AC(VHT20) Mode / CH60 (UNII-2A)

Radiated emissions test – Below 1GHz	
Final Test Mode	Description
Mode 27	TX AC(VHT20) Mode / CH60 (UNII-2A)

Radiated emissions test – Above 1GHz	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX AC (VHT160) Mode / CH50 (UNII-1)
Mode 8	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N (HT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 10	TX N (HT40) Mode / CH54, CH62 (UNII-2A)
Mode 11	TX AC (VHT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 12	TX AC (VHT40) Mode / CH54, CH62 (UNII-2A)
Mode 13	TX AC (VHT80) Mode / CH58 (UNII-2A)
Mode 14	TX A Mode / CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N (HT20) Mode / CH100, CH116, CH140 (UNII-2C)
Mode 16	TX N (HT40) Mode / CH102, CH110, CH134 (UNII-2C)
Mode 17	TX AC (VHT20) Mode / CH100, CH116, CH140 (UNII-2C)
Mode 18	TX AC (VHT40) Mode / CH102, CH110, CH134 (UNII-2C)
Mode 19	TX AC (VHT80) Mode / CH106, CH122 (UNII-2C)
Mode 20	TX AC (VHT160) Mode / CH114 (UNII-2C)
Mode 21	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 22	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 25	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 26	TX AC (VHT80) Mode / CH155 (UNII-3)

Conducted test	
Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX AC (VHT160) Mode / CH50 (UNII-1)
Mode 8	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N (HT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 10	TX N (HT40) Mode / CH54, CH62 (UNII-2A)
Mode 11	TX AC (VHT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 12	TX AC (VHT40) Mode / CH54, CH62 (UNII-2A)
Mode 13	TX AC (VHT80) Mode / CH58 (UNII-2A)
Mode 14	TX A Mode / CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N (HT20) Mode / CH100, CH116, CH140 (UNII-2C)
Mode 16	TX N (HT40) Mode / CH102, CH110, CH134 (UNII-2C)
Mode 17	TX AC (VHT20) Mode / CH100, CH116, CH140 (UNII-2C)
Mode 18	TX AC (VHT40) Mode / CH102, CH110, CH134 (UNII-2C)
Mode 19	TX AC (VHT80) Mode / CH106, CH122 (UNII-2C)
Mode 20	TX AC (VHT160) Mode / CH114 (UNII-2C)
Mode 21	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 22	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 25	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 26	TX AC (VHT80) Mode / CH155 (UNII-3)

Note :

- (1) For radiated emission below 1 GHz test, the IEEE 802.11ac (VHT20) channel 60 is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software	DRTU		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11a	15.5/15.5	15.625/15.5	15.325/15.25
IEEE 802.11n (HT20)	15.5/15.5	15.75/15.5	15.75/15.25
IEEE 802.11ac (VHT20)	15.75/15.5	15.875/15.75	15.875/15.5
Test Frequency (MHz)	5190	5230	
IEEE 802.11n (HT40)	15/14.625	15.125/14.75	
IEEE 802.11ac (VHT40)	15/15	15.25/15	
Test Frequency (MHz)	5210		
IEEE 802.11ac (VHT80)	13.875/13.375		
Test Frequency (MHz)	5250		
IEEE 802.11ac (VHT160)	12.125/13.625		

UNII-2A			
Test Software	DRTU		
Test Frequency (MHz)	5260	5300	5320
IEEE 802.11a	15.5/15.125	15.5/15.125	15.375/15.25
IEEE 802.11n (HT20)	15.5/15	15.5/15.125	15.5/15.25
IEEE 802.11ac (VHT20)	15.625/15.25	15.625/15.375	15.5/15.5
Test Frequency (MHz)	5270	5310	
IEEE 802.11n (HT40)	14.875/14.25	14.875/14.375	
IEEE 802.11ac (VHT40)	15.125/14.5	15/14.625	
Test Frequency (MHz)	5290		
IEEE 802.11ac (VHT80)	13.625/12.875		


UNII-2C			
Test Software	DRTU		
Test Frequency (MHz)	5500	5580	5700
IEEE 802.11a	15.75/15.625	15.75/15.625	15.5/15.625
IEEE 802.11n (HT20)	15.875/15.625	15.875/15.625	15.5/15.625
IEEE 802.11ac (VHT20)	16/15.75	15.875/15.875	15.625/15.75
Test Frequency (MHz)	5510	5550	5670
IEEE 802.11n (HT40)	15.125/14.625	15.125/14.625	15/14.625
IEEE 802.11ac (VHT40)	15.25/14.875	15.25/14.875	15/14.875
Test Frequency (MHz)	5530	5610	
IEEE 802.11ac (VHT80)	13.75/13.375	13.75/13.375	
Test Frequency (MHz)	5570		
IEEE 802.11ac (VHT160)	14.25/14.125		

UNII-3			
Test Software	DRTU		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11a	15.75/15.625	15.625/15.5	15.875/15.625
IEEE 802.11n (HT20)	15.75/15.625	15.625/15.5	15.875/15.5
IEEE 802.11ac (VHT20)	15.875/15.75	15.75/15.625	15.75/15.5
Test Frequency (MHz)	5755	5795	
IEEE 802.11n (HT40)	15/14.75	15/14.5	
IEEE 802.11ac (VHT40)	15/15	15/14.875	
Test Frequency (MHz)	5775		
IEEE 802.11ac (VHT80)	13.625/13.25		

3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.


IEEE 802.11a

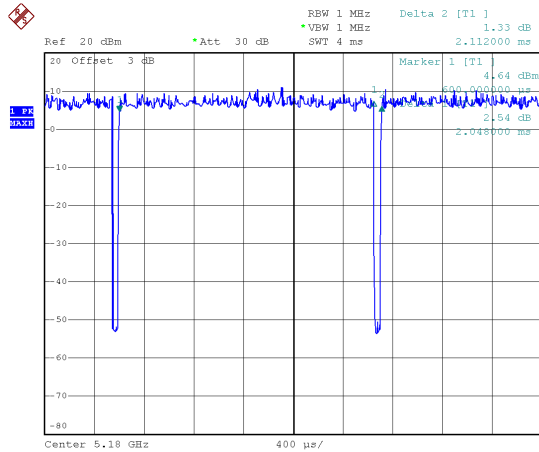

Date: 1.APR.2019 22:27:21

Duty cycle = $2.048 \text{ ms} / 2.112 \text{ ms} = 96.97\%$
Duty Factor = $10 * \log(1 / 96.97\%) = 0.13 \text{ dB}$


IEEE 802.11n (HT20)

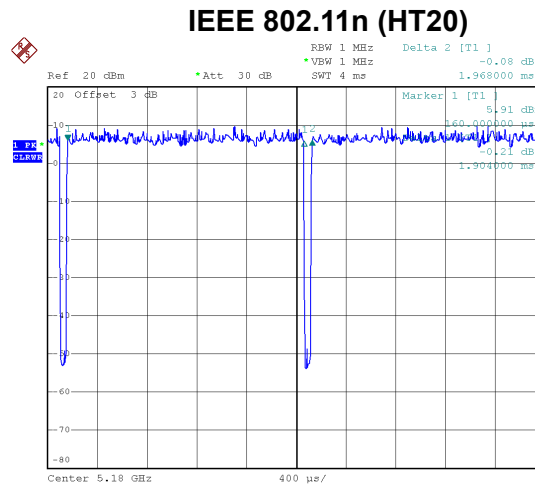

Date: 1.APR.2019 22:27:39


Duty cycle = $1.904 \text{ ms} / 1.968 \text{ ms} = 96.75\%$
Duty Factor = $10 * \log(1 / 96.75\%) = 0.14 \text{ dB}$

IEEE 802.11ac (VHT20)

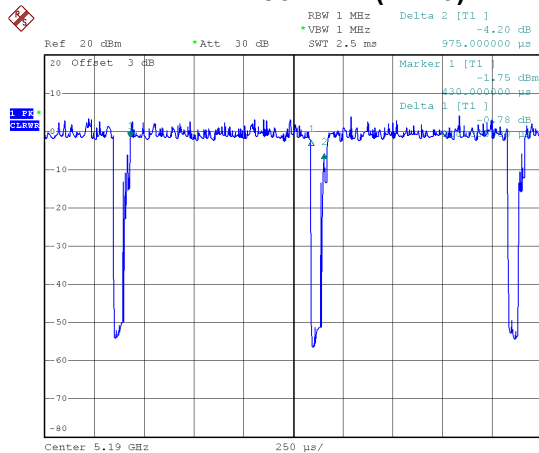

Date: 1.APR.2019 22:28:23


Duty cycle = $0.910 \text{ ms} / 0.975 \text{ ms} = 93.33\%$
Duty Factor = $10 * \log(1 / 93.33\%) = 0.30 \text{ dB}$

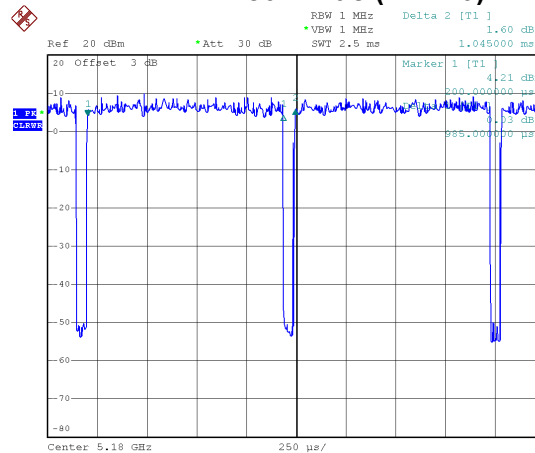

Date: 1.APR.2019 22:28:00

Duty cycle = $0.985 \text{ ms} / 1.045 \text{ ms} = 94.26\%$
Duty Factor = $10 * \log(1 / 94.26\%) = 0.26 \text{ dB}$


IEEE 802.11ac (VHT40)

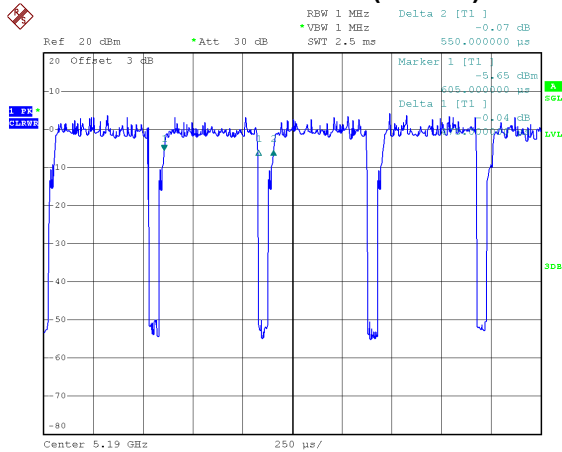

Date: 1.APR.2019 22:28:42

Duty cycle = 0.475 ms / 0.550 ms = 86.36%
Duty Factor = 10 * log(1 / 86.36%) = 0.64 dB

IEEE 802.11ac (VHT160)

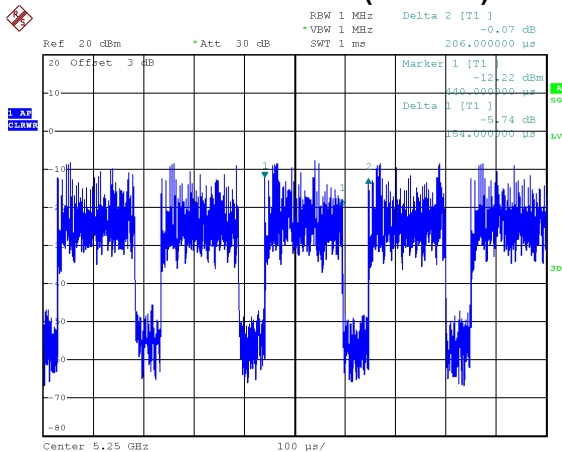

Date: 3.APR.2019 16:34:06

Duty cycle = 0.154 ms / 0.206 ms = 74.76%
Duty Factor = 10 * log(1 / 86.36%) = 1.26 dB

NOTE:

For IEEE 802.11a, IEEE 802.11n (HT20) and IEEE 802.11ac (VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11n (HT40) and IEEE 802.11ac (VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).


For IEEE 802.11ac (VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

For IEEE 802.11ac (VHT160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

IEEE 802.11ac (VHT80)

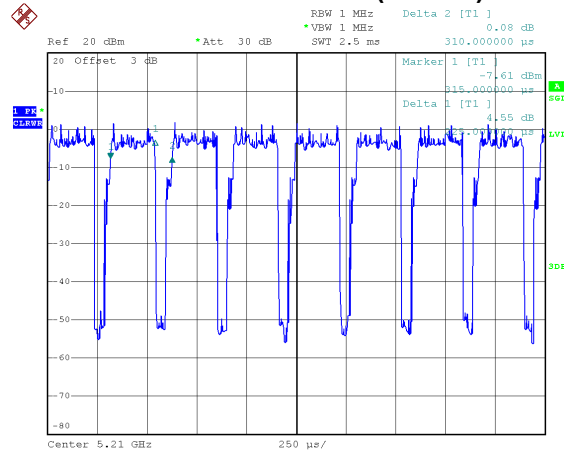

Date: 1.APR.2019 22:29:01

Duty cycle = 0.225 ms / 0.310 ms = 72.58%
Duty Factor = 10 * log(1 / 72.58%) = 1.39 dB

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



3.6 SUPPORT UNITS

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	2m	DC Cable
2	NO	NO	1m	AC Cable

4. AC POWER LINE CONDUCTED EMISSIONS TEST

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

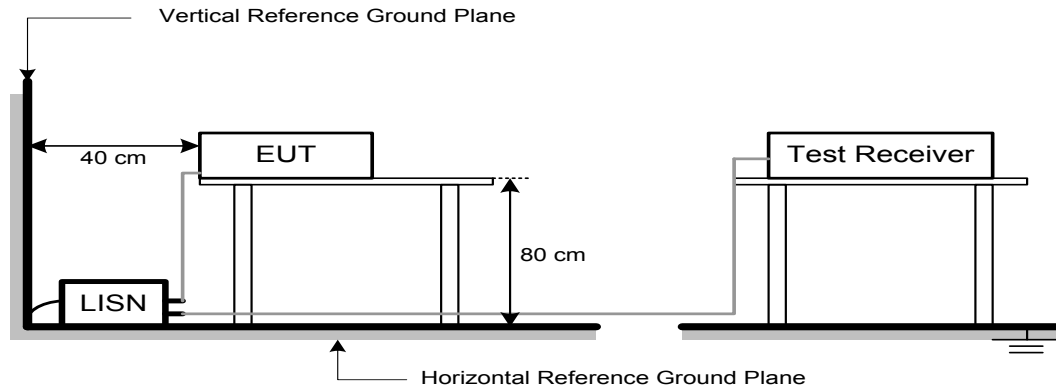

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.7 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS TEST

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 NOTE (2)	68.3
	10 NOTE (2)	105.3
	15.6 NOTE (2)	110.9
	27 NOTE (2)	122.3

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3}$ μV/m, where P is the eirp (Watts)

(2) According to FCC 16-24, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

5.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.3 DEVIATION FROM TEST STANDARD


No deviation


5.4 TEST SETUP

9 kHz to 30 MHz

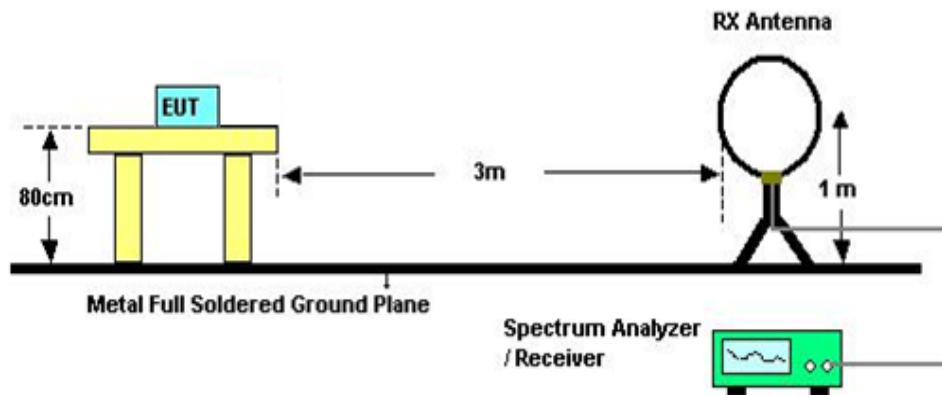

30 MHz to 1 GHz

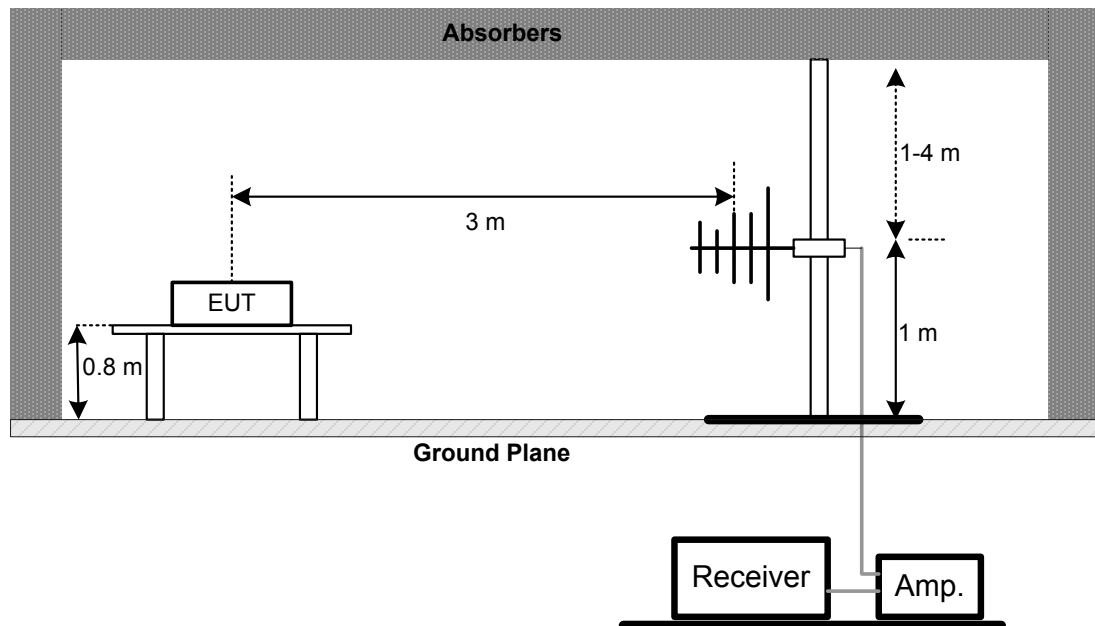

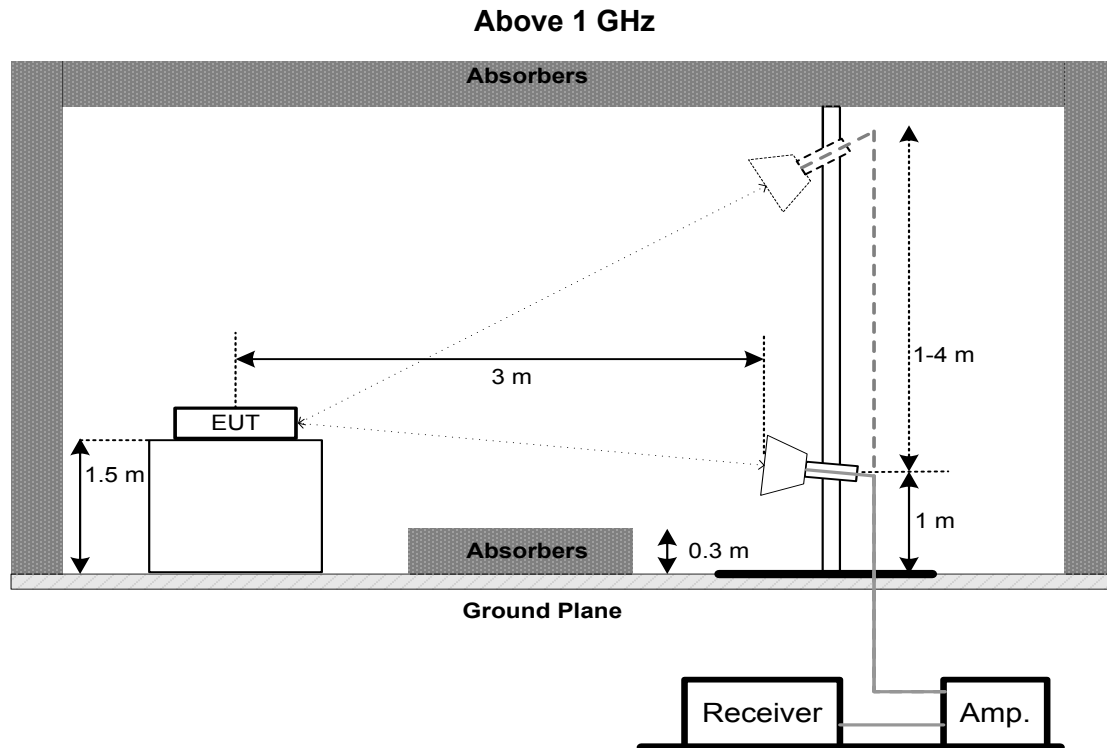

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 68% Test Voltage: AC 120V/60Hz

5.7 TEST RESULTS - 9 KHZ to 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.8 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.9 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a) 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below

- b. Spectrum Setting:

For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz (Bandwidth 20 MHz) 1 MHz (Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz (Bandwidth 20 MHz) 3 MHz (Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB below carrier

6.3 TEST PROCEDURE

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 EUT TEST CONDITIONS

Temperature: 22.2°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.7 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER TEST

7.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Conducted Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (24 dBm)	5150-5250
		250 mW (24 dBm)	5250-5350
		250 mW (24 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Used spectrum analyzer band power measurement function.
- Spectrum Setting

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Sweep points	≥ 2 x span / RBW
Detector	RMS
Trace	Trace average at least 100 traces in power averaging(rms) mode.
Sweep Time	auto

- Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 EUT TEST CONDITIONS

Temperature: 22.2°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.7 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY TEST

8.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 1 MHz and VBW at 3 MHz if the spectrum analyzer does not have 500 kHz RBW.
- The value measured with RBW=1 MHz is to be added with $10\log(500 \text{ kHz}/1 \text{ MHz})$ which is -3 dB. For example, if the measured value is +10dBm using RBW=1 MHz (that is +10 dBm/MHz), then the converted value will be +7dBm/500kHz.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 UT TEST CONDITIONS

Temperature: 22.2°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.7 TEST RESULTS

Please refer to the APPENDIX H.

9. FREQUENCY STABILITY MEASUREMENT

9.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(g)	Frequency Stability	Specified in the user's manual	5150-5250
			5250-5350
			5470-5725
			5725-5850

9.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto


c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. User manual temperature is 0°C~40°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

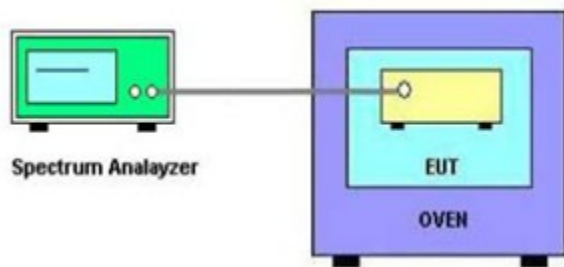

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 EUT TEST CONDITIONS

Temperature: 22.2°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

9.7 TEST RESULTS

Please refer to the APPENDIX I.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 10, 2020
2	LISN	EMCO	3816/2	52765	Mar. 10, 2020
3	50ohm Terminator	SHX	TF5-3	15041305	Mar. 10, 2020
4	Artificial-Mains Network	SCHWARZBEC K	NSLK 8127	8127685	Mar. 10, 2020
5	TRANSIENT LIMITER	EM	EM-7600	772	Mar. 10, 2020
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	Cable	N/A	RG223	12m	Mar. 12, 2020

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Jan. 15, 2020
2	Cable	N/A	RG 213/U	C-102	Jun. 01, 2019
3	EMI Test Receiver	R&S	ESCI	100895	Mar. 10, 2020
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2020
2	Amplifier	HP	8447D	2944A09673	Aug. 11, 2019
3	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
4	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	May 25, 2019
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 09, 2020
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2019
3	Amplifier	Agilent	8449B	3008A02333	Mar. 10, 2020
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 10, 2020
5	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jul. 30, 2019
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Conducted Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019


Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019
2	Precision Oven Tester	Bell	BTH-50C	20170306001	Mar. 10, 2020

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode: TX AC20 MODE CHANNEL 60

Line

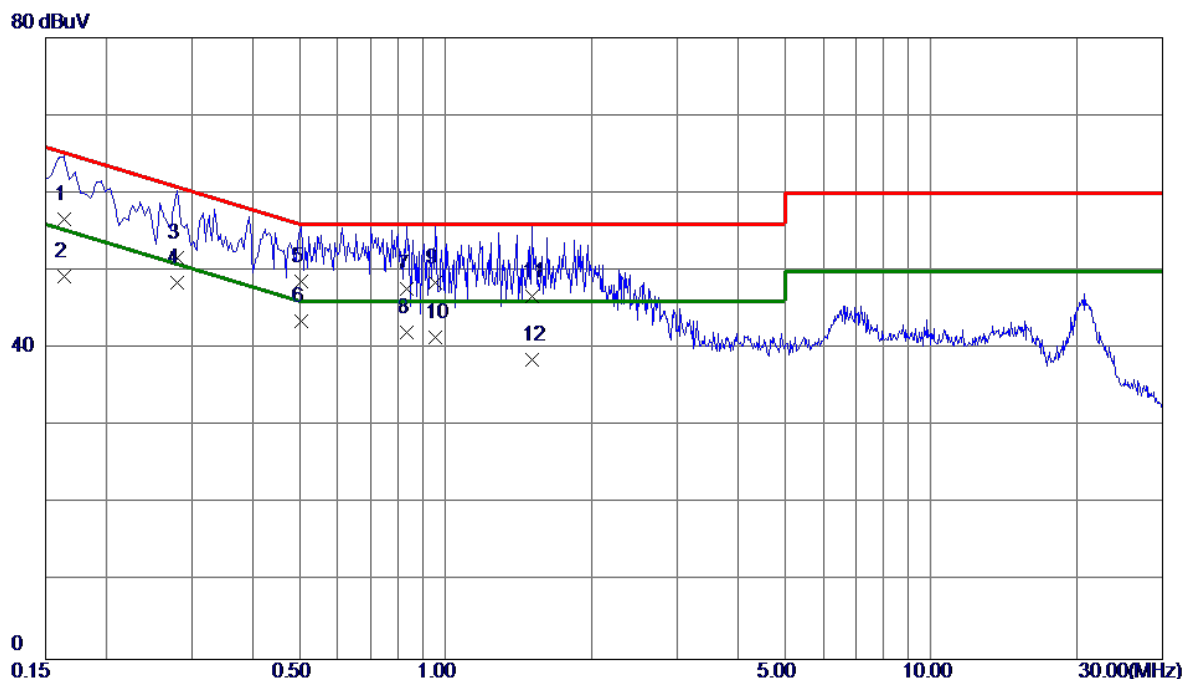


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1635	46.80	9.82	56.62	65.28	-8.66	QP	
2	0.1635	39.40	9.82	49.22	55.28	-6.06	AVG	
3	0.2805	41.80	9.82	51.62	60.80	-9.18	QP	
4 *	0.2805	38.60	9.82	48.42	50.80	-2.38	AVG	
5	0.5055	38.90	9.79	48.69	56.00	-7.31	QP	
6	0.5055	33.70	9.79	43.49	46.00	-2.51	AVG	
7	0.8340	37.70	9.91	47.61	56.00	-8.39	QP	
8	0.8340	32.20	9.91	42.11	46.00	-3.89	AVG	
9	0.9510	38.50	9.92	48.42	56.00	-7.58	QP	
10	0.9510	31.50	9.92	41.42	46.00	-4.58	AVG	
11	1.5045	36.80	9.96	46.76	56.00	-9.24	QP	
12	1.5045	28.60	9.96	38.56	46.00	-7.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

Test Mode: TX AC20 MODE CHANNEL 60

Neutral

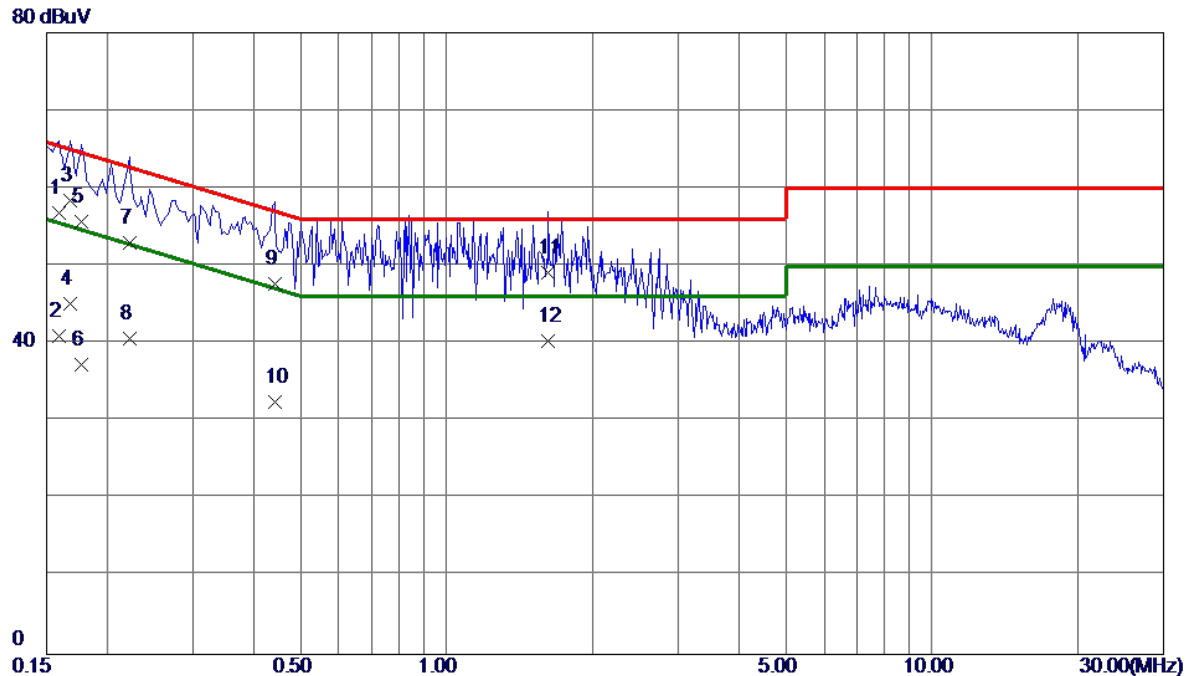

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1590	46.90	9.91	56.81	65.52	-8.71	QP	
2	0.1590	31.00	9.91	40.91	55.52	-14.61	AVG	
3	0.1680	48.50	9.91	58.41	65.06	-6.65	QP	
4	0.1680	35.27	9.91	45.18	55.06	-9.88	AVG	
5	0.1770	45.81	9.91	55.72	64.63	-8.91	QP	
6	0.1770	27.41	9.91	37.32	54.63	-17.31	AVG	
7	0.2220	43.11	9.91	53.02	62.74	-9.72	QP	
8	0.2220	30.71	9.91	40.62	52.74	-12.12	AVG	
9	0.4425	37.79	9.95	47.74	57.01	-9.27	QP	
10	0.4425	22.59	9.95	32.54	47.01	-14.47	AVG	
11	1.6215	38.90	10.16	49.06	56.00	-6.94	QP	
12 *	1.6215	30.10	10.16	40.26	46.00	-5.74	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode: TX AC20 MODE CHANNEL 60

Ant 0°

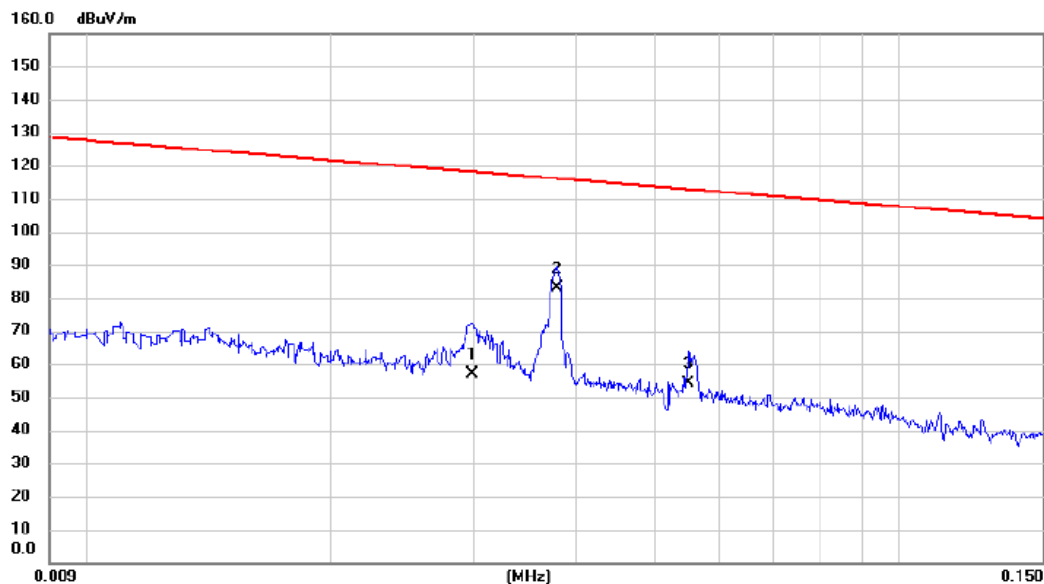


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0298	37.20	19.86	57.06	118.12	-61.06	AVG	
2	*	0.0380	63.10	19.73	82.83	116.01	-33.18	AVG	
3		0.0550	34.90	19.43	54.33	112.80	-58.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AC20 MODE CHANNEL 60

Ant 0°

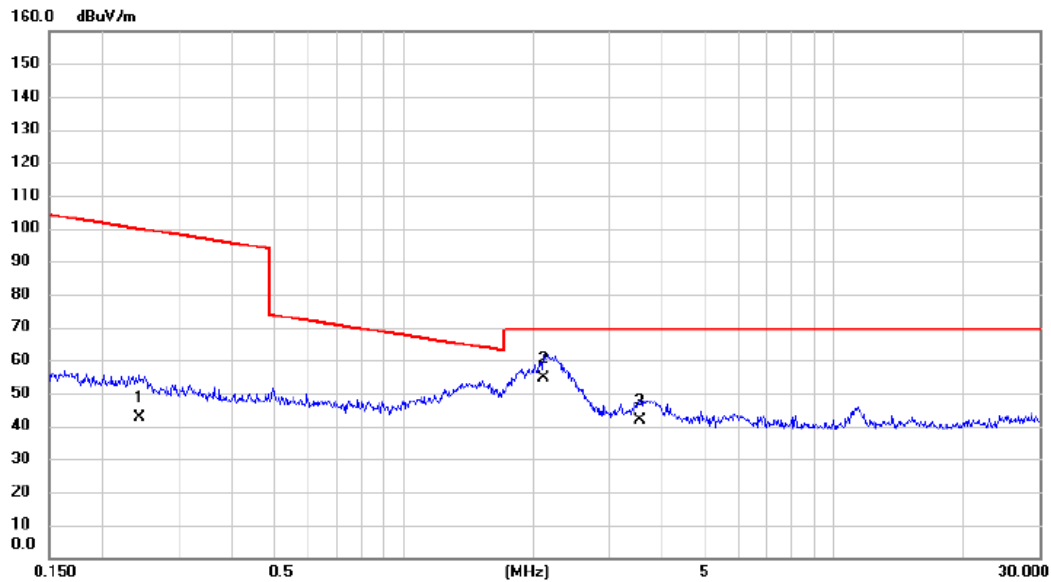


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2442	25.50	17.07	42.57	99.85	-57.28	AVG	
2	*	2.1213	37.70	17.05	54.75	69.54	-14.79	QP	
3		3.5466	25.60	16.10	41.70	69.54	-27.84	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AC20 MODE CHANNEL 60

Ant 90°

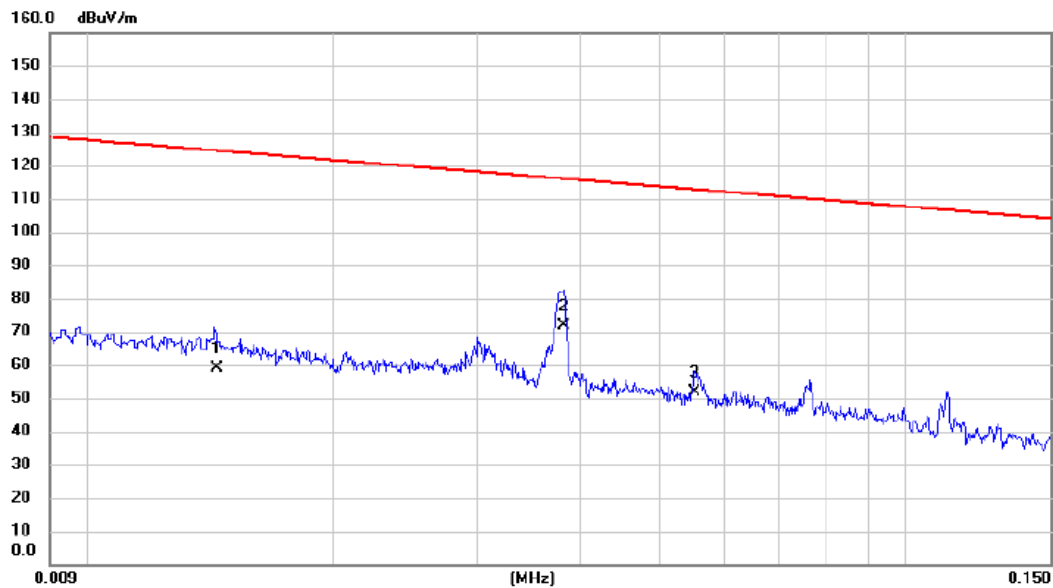


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0144	38.30	20.80	59.10	124.44	-65.34	AVG	
2	*	0.0382	52.10	19.73	71.83	115.96	-44.13	AVG	
3		0.0553	32.50	19.42	51.92	112.75	-60.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AC20 MODE CHANNEL 60

Ant 90°

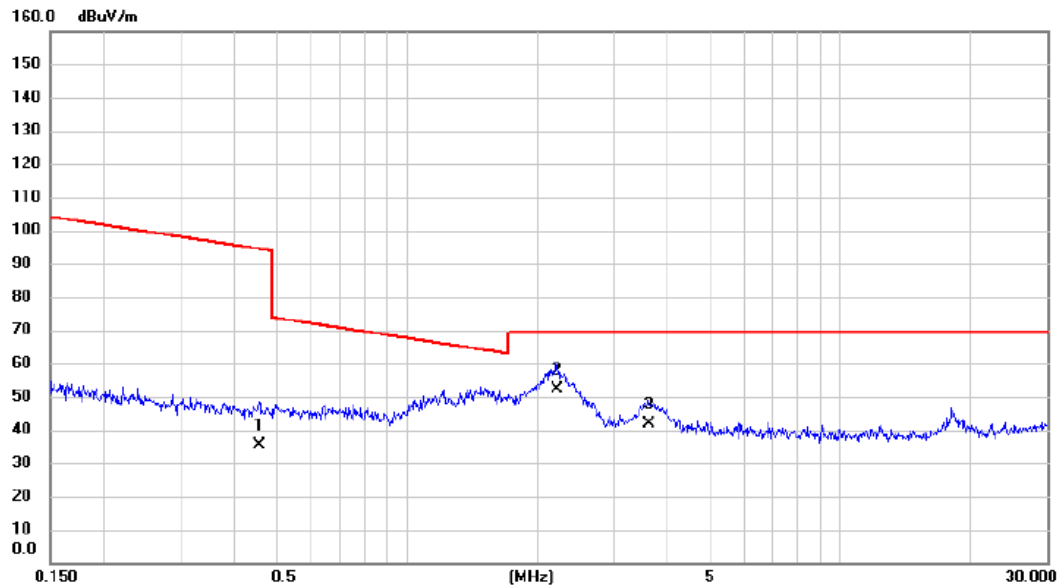

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.4564	18.50	16.98	35.48	94.42	-58.94	AVG	
2	*	2.2132	35.40	16.99	52.39	69.54	-17.15	QP	
3		3.6034	25.80	16.06	41.86	69.54	-27.68	QP	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ

Test Mode: TX AC20 MODE CHANNEL 60

Vertical

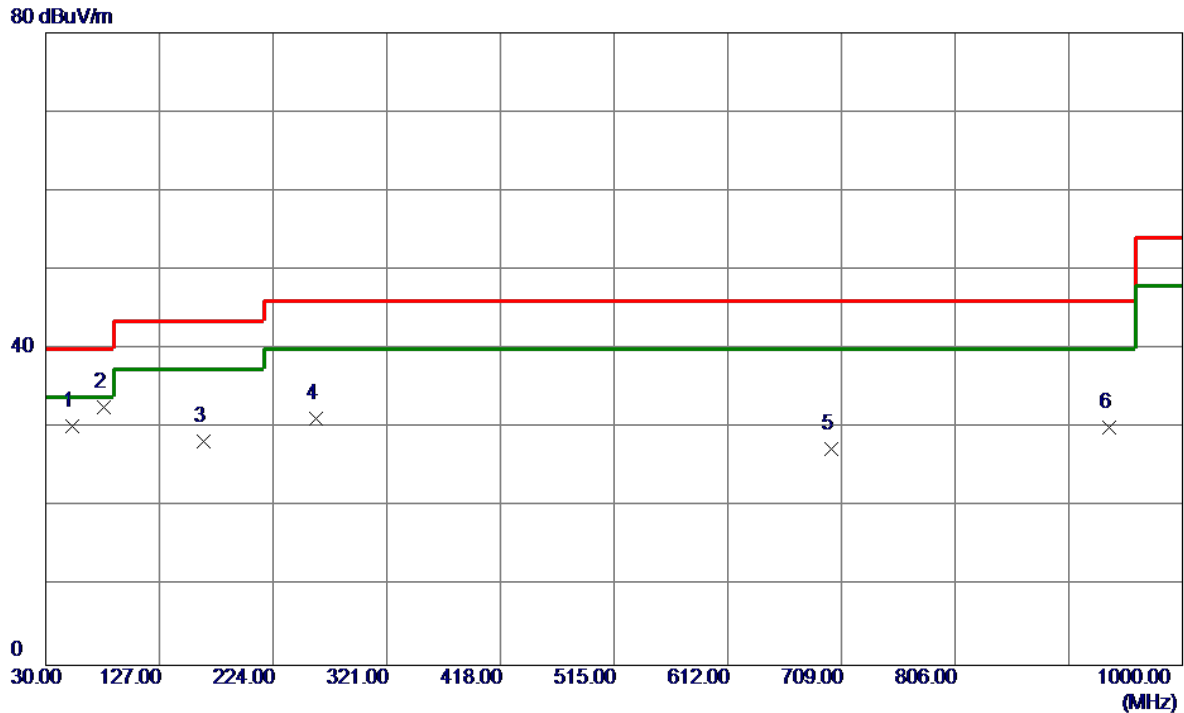


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	52.3100	45.09	-14.89	30.20	40.00	-9.80	Peak	
2 *	79.4700	51.15	-18.56	32.59	40.00	-7.41	Peak	
3	164.8300	39.18	-10.89	28.29	43.50	-15.21	Peak	
4	260.8599	44.58	-13.42	31.16	46.00	-14.84	Peak	
5	700.2700	30.13	-2.75	27.38	46.00	-18.62	Peak	
6	937.9200	29.22	0.92	30.14	46.00	-15.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AC20 MODE CHANNEL 60

Horizontal

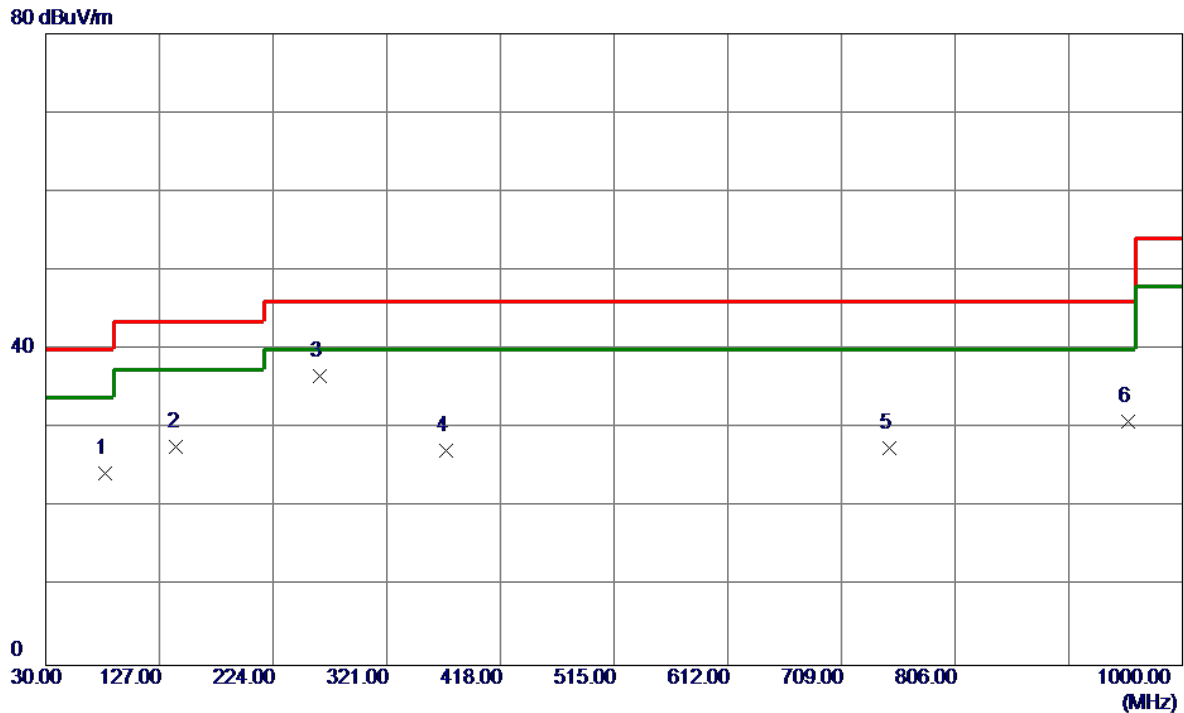

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	80.4400	42.88	-18.62	24.26	40.00	-15.74	Peak	
2	141.5500	39.65	-12.00	27.65	43.50	-15.85	Peak	
3 *	263.7700	49.78	-13.14	36.64	46.00	-9.36	Peak	
4	371.4400	37.62	-10.35	27.27	46.00	-18.73	Peak	
5	749.7400	31.59	-4.04	27.55	46.00	-18.45	Peak	
6	953.4400	29.53	1.33	30.86	46.00	-15.14	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Vertical

130 dBuV/m

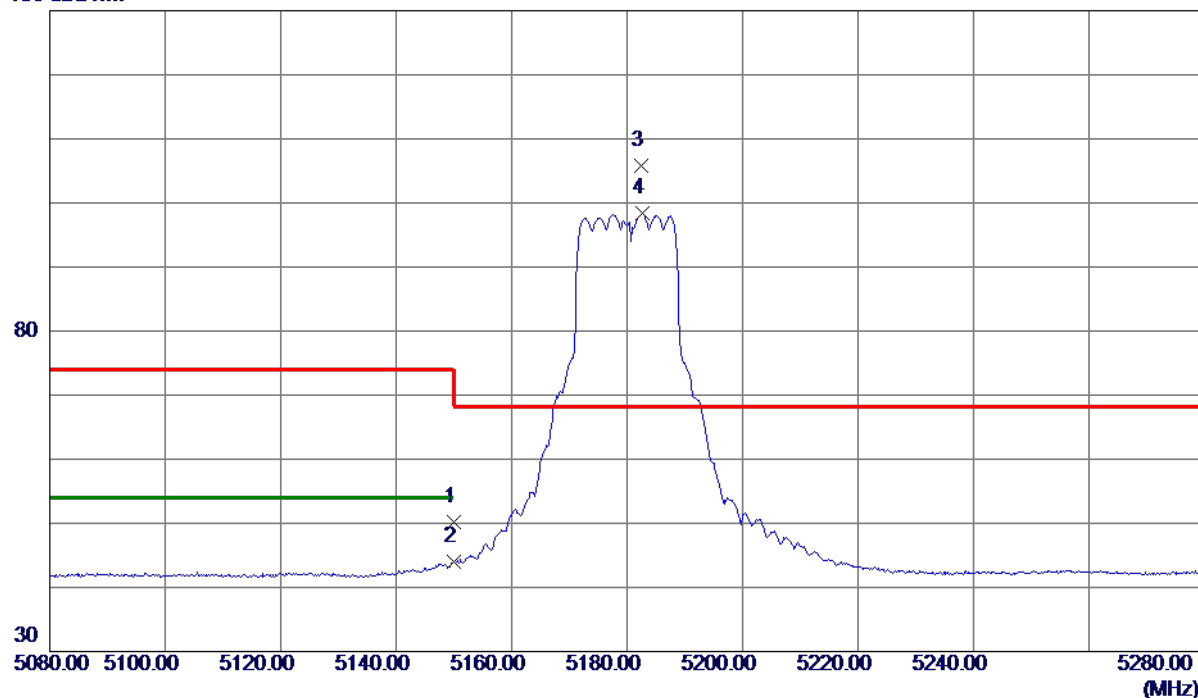

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	35.33	14.91	50.24	74.00	-23.76	Peak	
2	5150.0000	29.03	14.91	43.94	54.00	-10.06	AVG	
3 *	5182.4000	90.84	14.98	105.82	68.30	37.52	Peak	No Limit
4	5182.6000	83.46	14.98	98.44	999.00	-900.56	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Vertical

80 dBuV/m

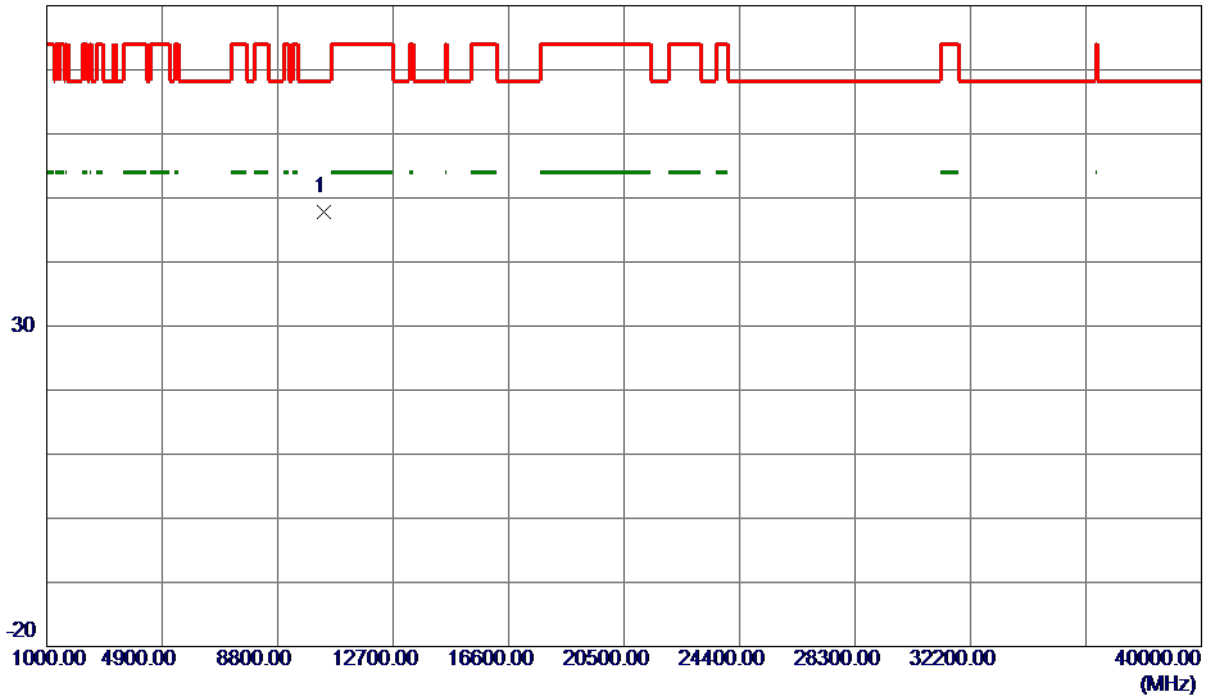

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10354.0400	34.85	12.88	47.73	68.30	-20.57	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Horizontal

130 dBuV/m

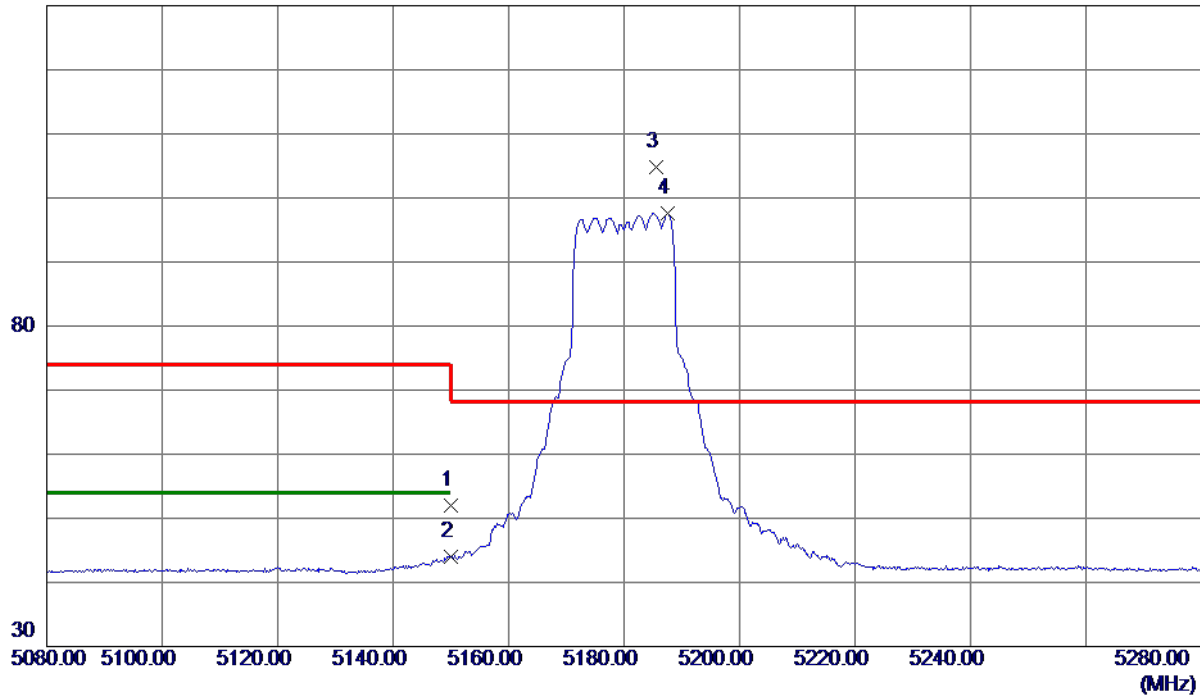

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	37.04	14.91	51.95	74.00	-22.05	Peak	
2	5150.0000	29.07	14.91	43.98	54.00	-10.02	AVG	
3 *	5185.6000	89.78	14.98	104.76	68.30	36.46	Peak	No Limit
4	5187.6000	82.63	14.99	97.62	999.00	-901.38	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Horizontal

80 dBuV/m

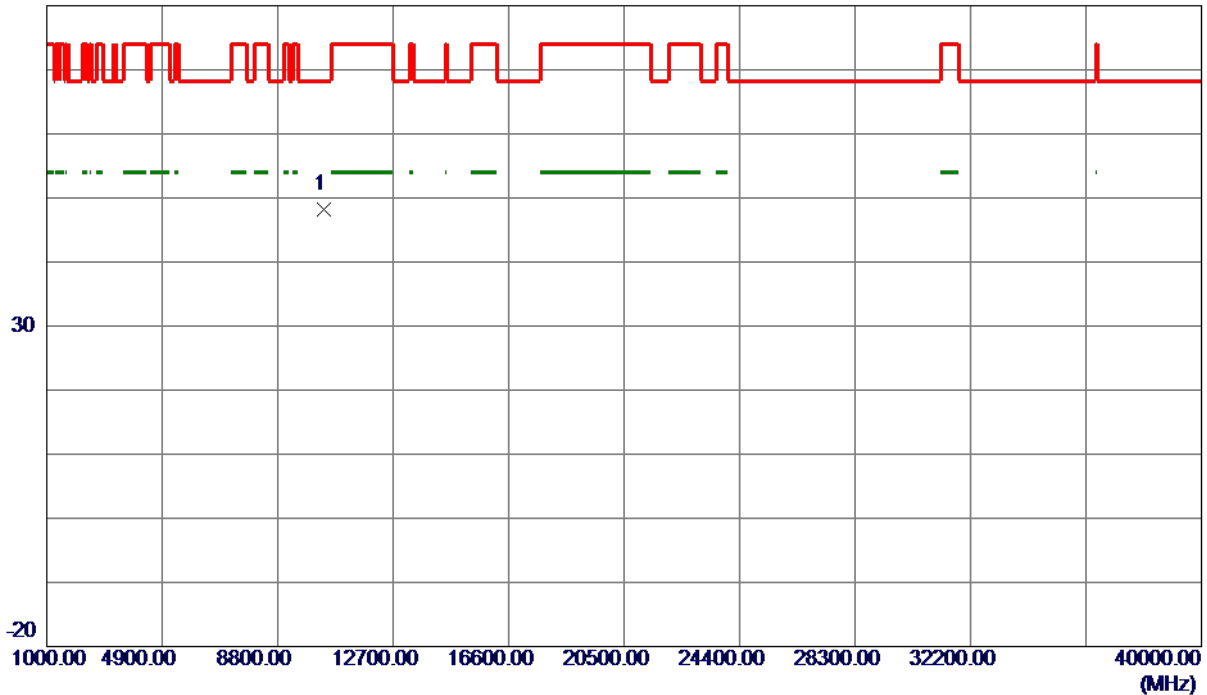

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10368.1000	35.34	12.91	48.25	68.30	-20.05	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Vertical

130 dBuV/m

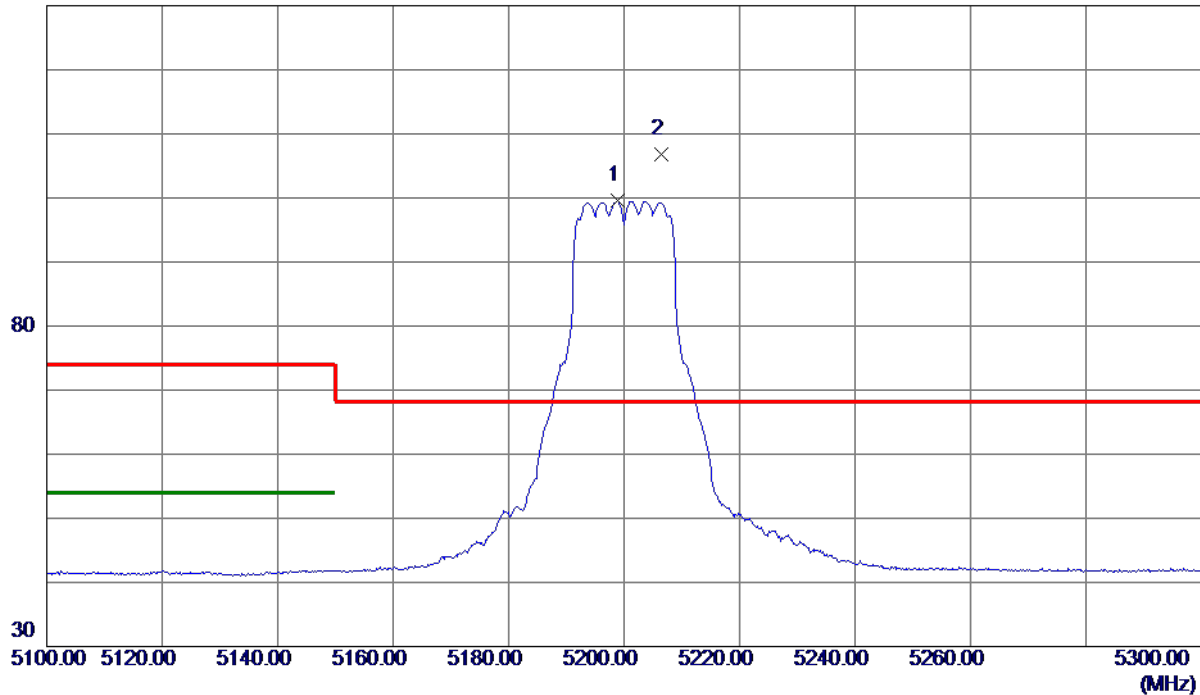

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5198.8000	84.51	15.01	99.52	999.00	-899.48	AVG	No Limit
2 *	5206.4000	91.75	15.03	106.78	68.30	38.48	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Vertical

80 dBuV/m

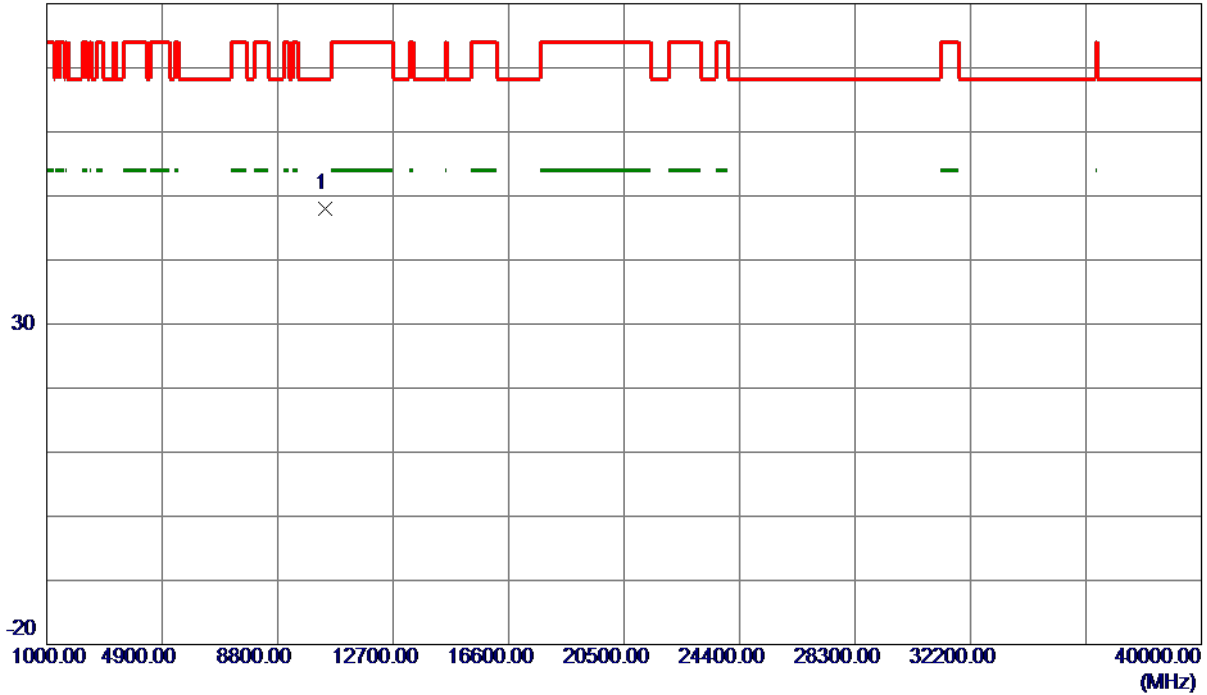


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10403.2200	34.98	12.98	47.96	68.30	-20.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Horizontal

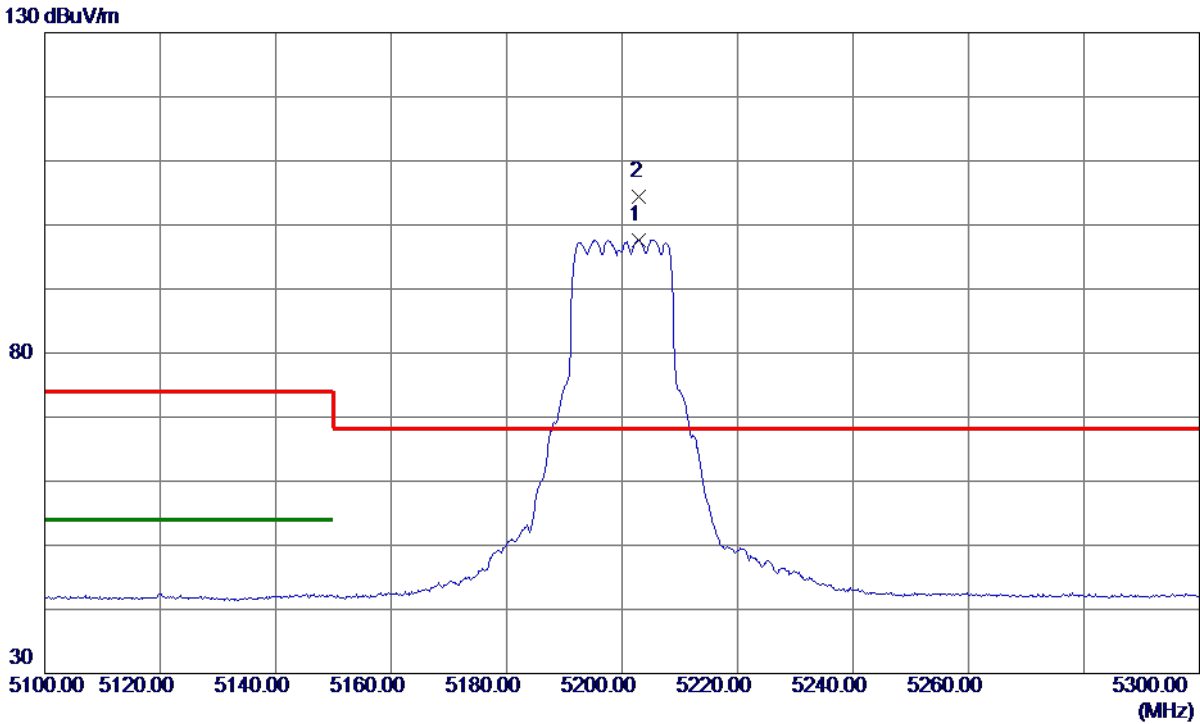

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5202.8000	82.67	15.02	97.69	999.00	-901.31	AVG	No Limit
2 *	5203.0000	89.39	15.02	104.41	68.30	36.11	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Horizontal

80 dBuV/m

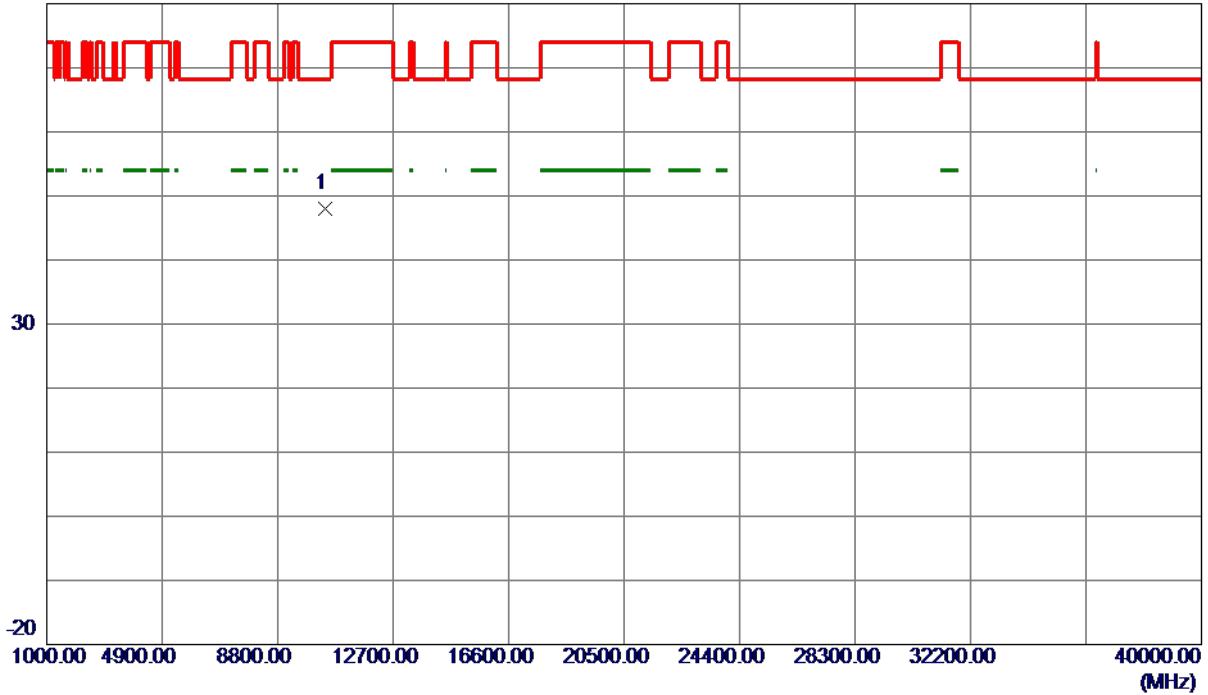

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10398.3800	35.10	12.97	48.07	68.30	-20.23	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Vertical

130 dBuV/m

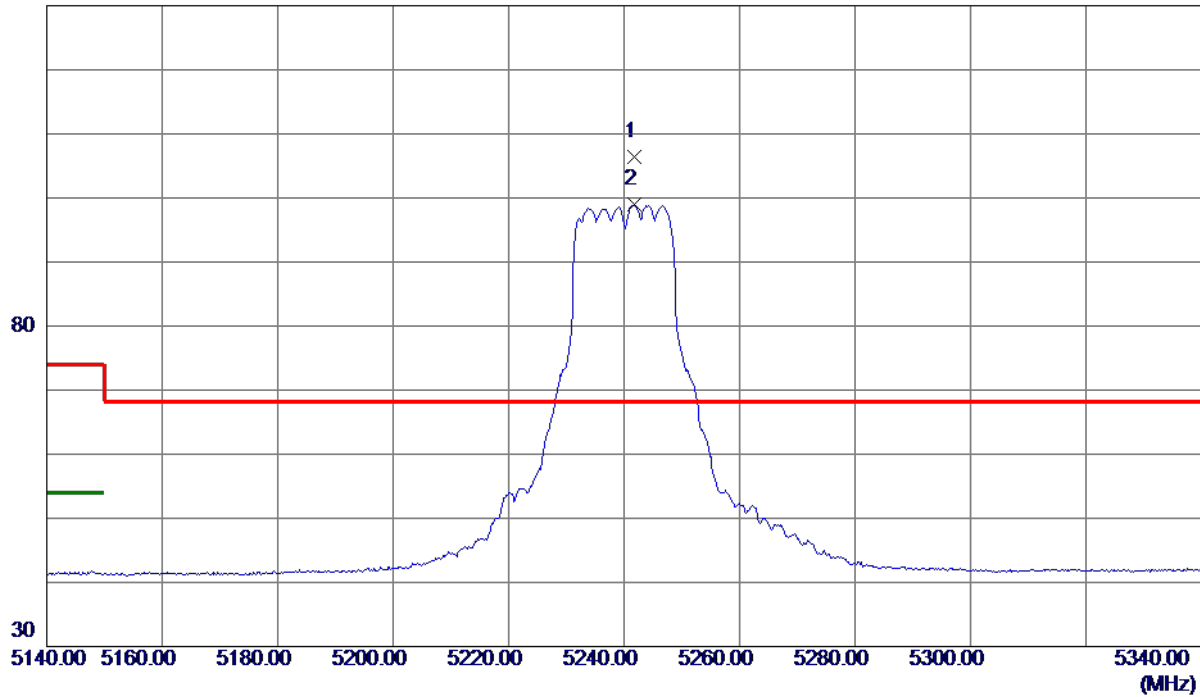


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5241.8000	91.37	15.10	106.47	68.30	38.17	Peak	No Limit
2	5241.8000	83.85	15.10	98.95	999.00	-900.05	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Vertical

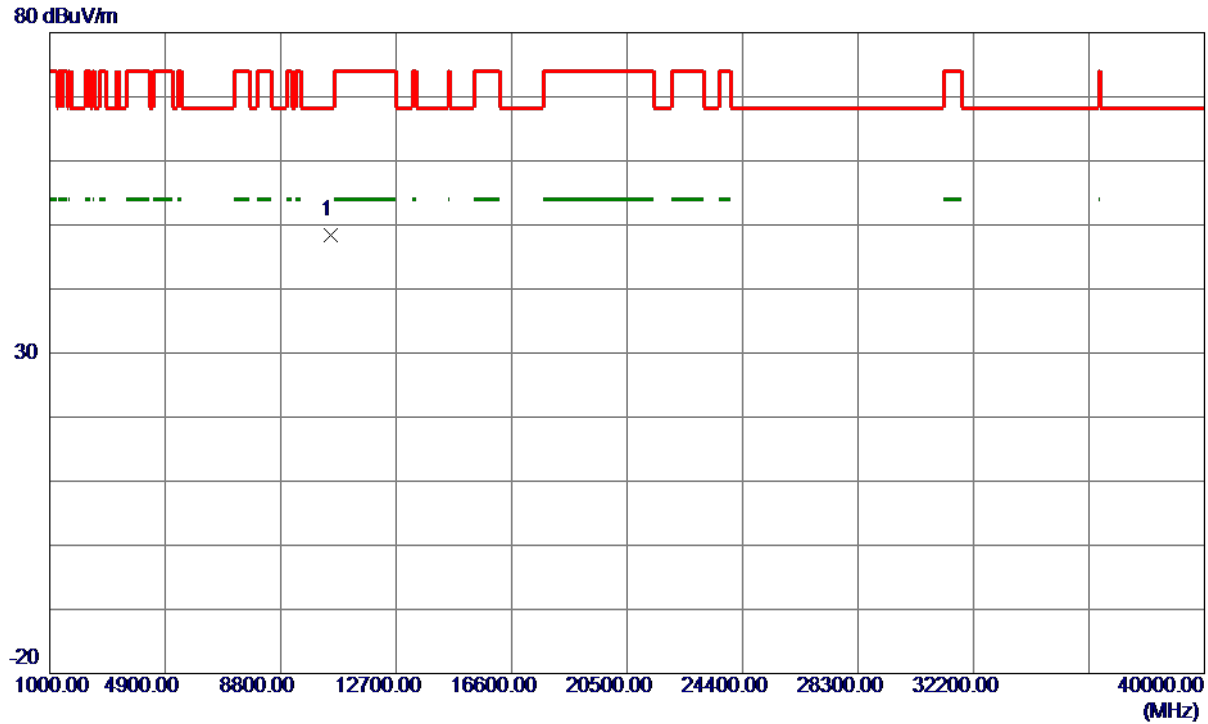


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10496.1000	35.24	13.17	48.41	68.30	-19.89	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Horizontal

130 dBuV/m

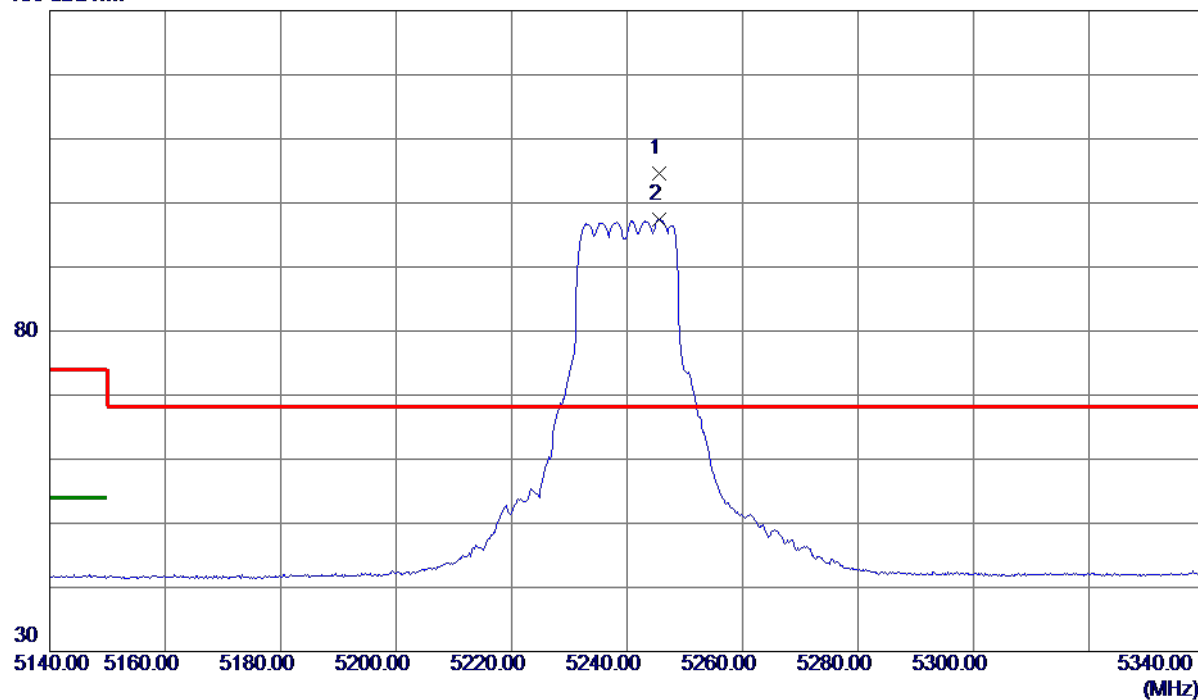

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5245.6000	89.58	15.11	104.69	68.30	36.39	Peak	No Limit
2	5245.6000	82.37	15.11	97.48	999.00	-901.52	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Horizontal

80 dBuV/m

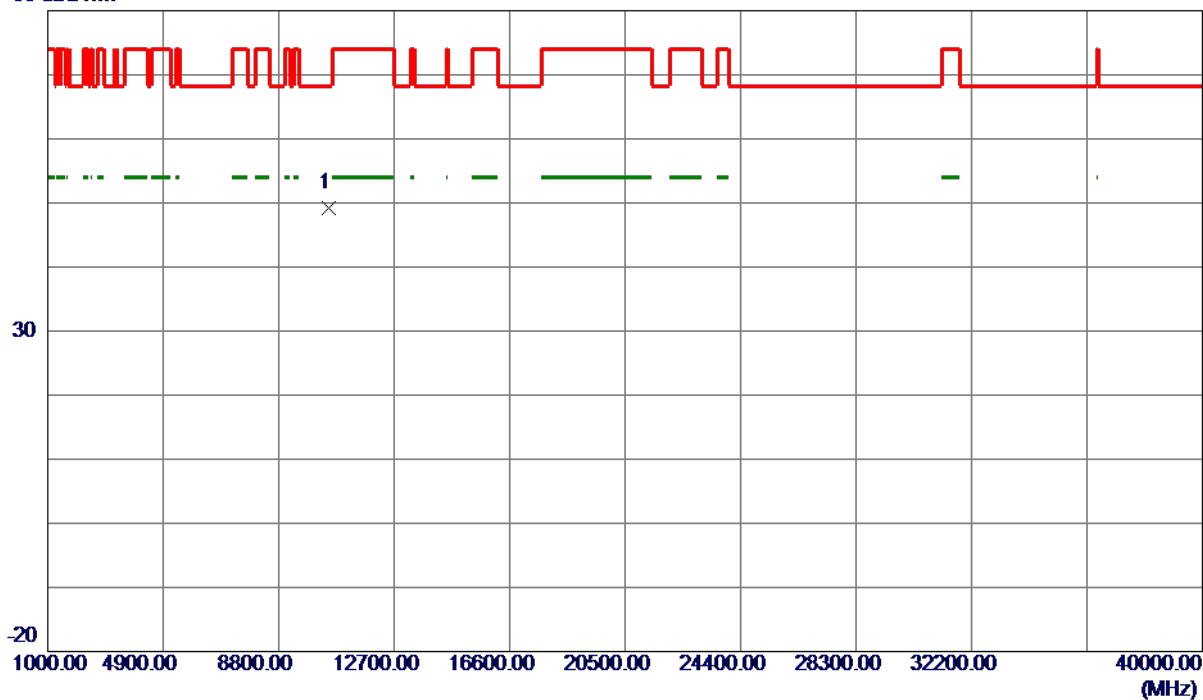

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10471.9000	35.99	13.12	49.11	68.30	-19.19	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz

Vertical

130 dBuV/m

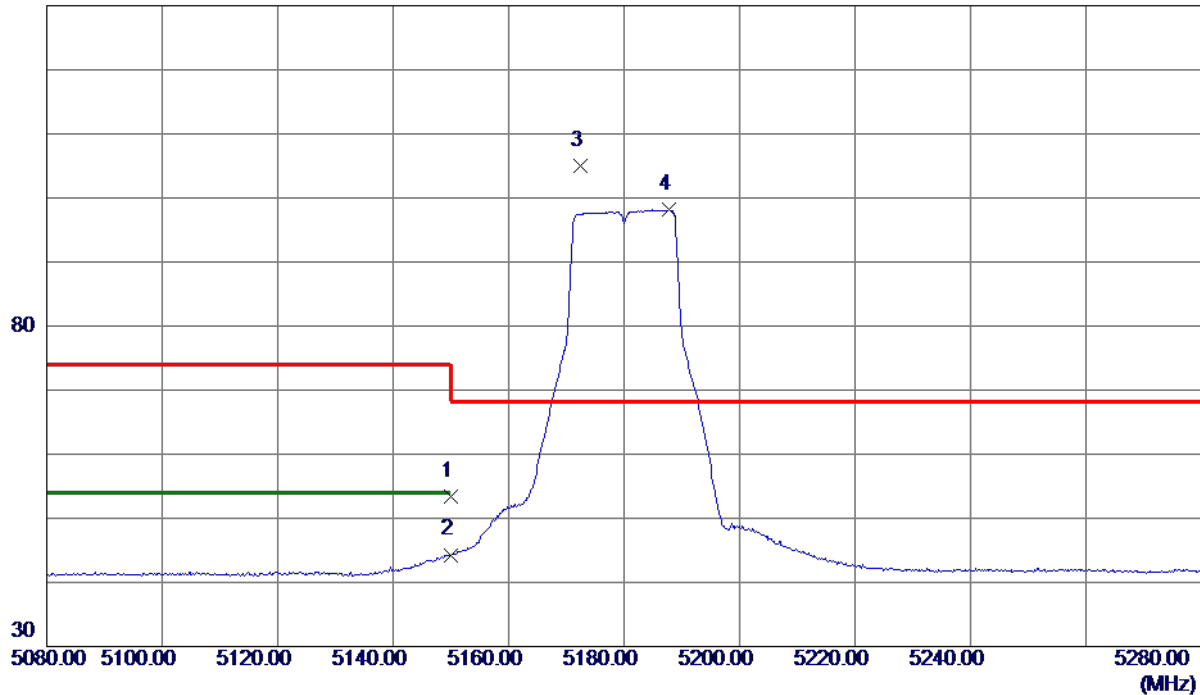

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	38.52	14.91	53.43	74.00	-20.57	Peak	
2	5150.0000	29.39	14.91	44.30	54.00	-9.70	AVG	
3 *	5172.4000	90.04	14.96	105.00	68.30	36.70	Peak	No Limit
4	5187.8000	83.16	14.99	98.15	999.00	-900.85	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz

Vertical

80 dBuV/m

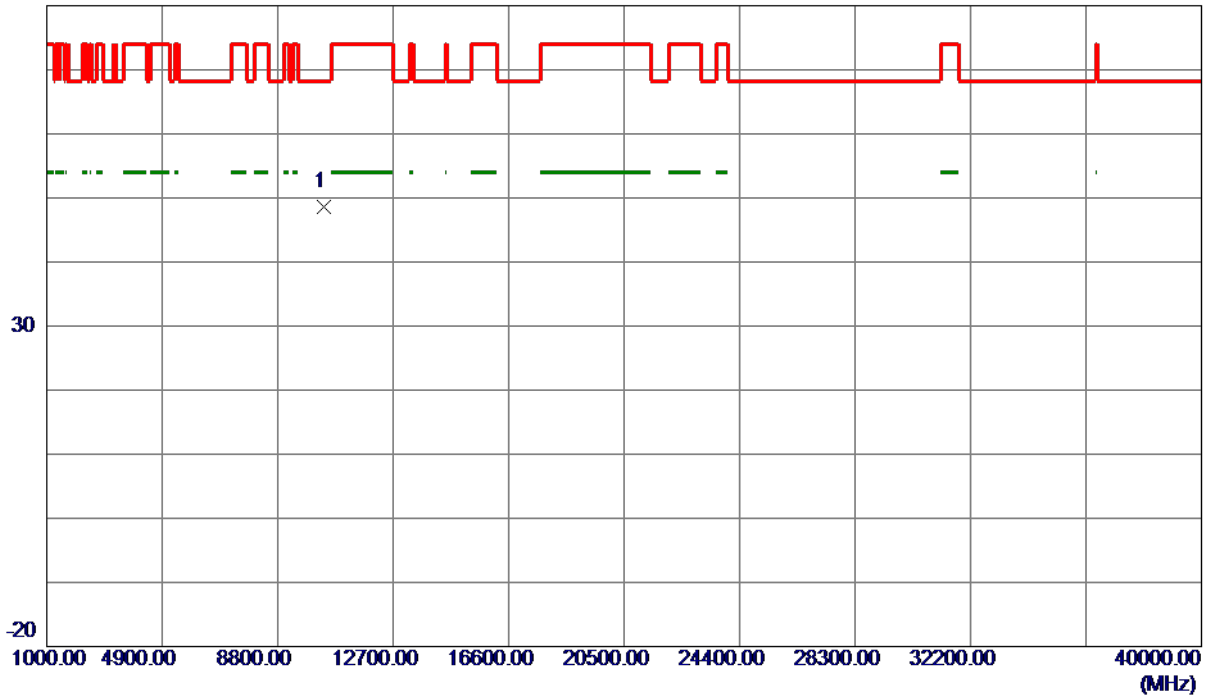

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10364.4800	35.69	12.90	48.59	68.30	-19.71	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz

Horizontal

130 dBuV/m

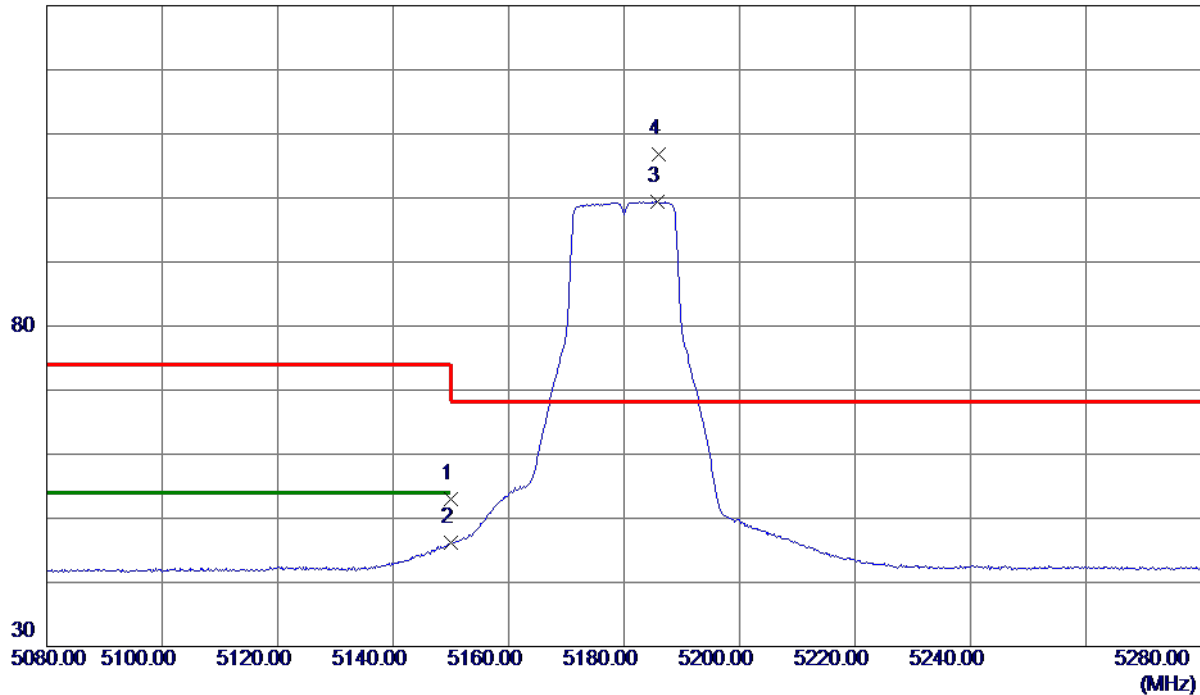

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	38.02	14.91	52.93	74.00	-21.07	Peak	
2	5150.0000	31.22	14.91	46.13	54.00	-7.87	AVG	
3	5185.8000	84.41	14.98	99.39	999.00	-899.61	AVG	No Limit
4 *	5186.0000	91.87	14.98	106.85	68.30	38.55	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz

Horizontal

80 dBuV/m

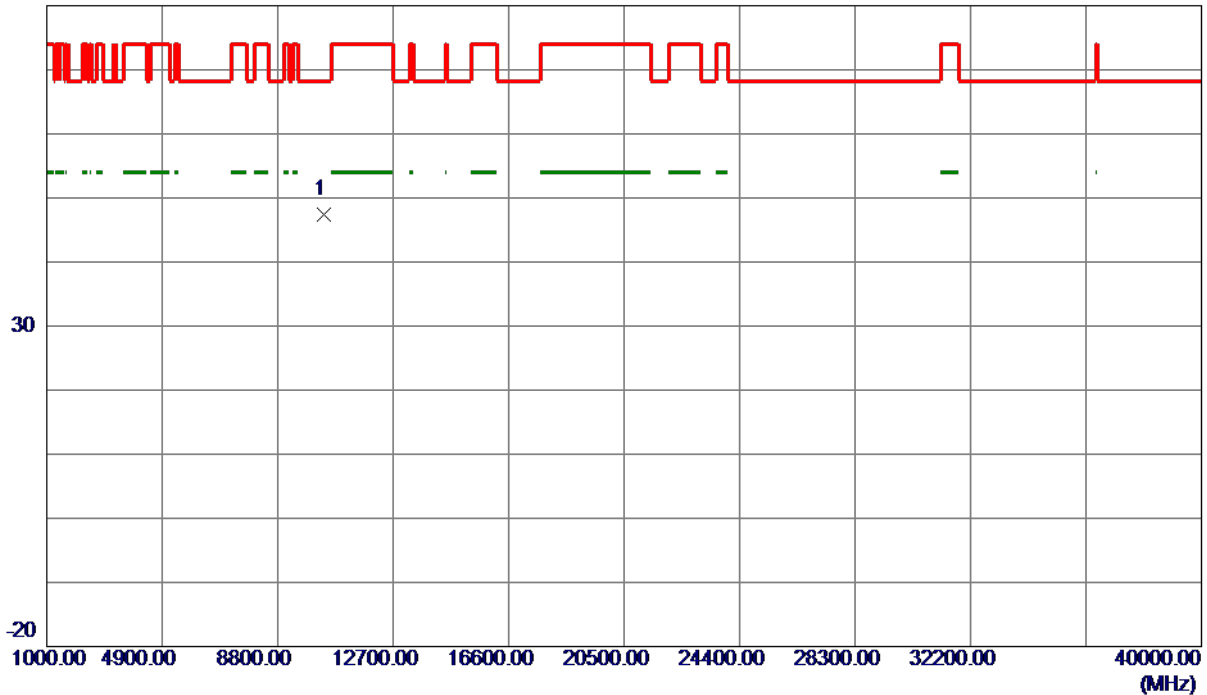


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10356.3400	34.49	12.88	47.37	68.30	-20.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5200 MHz

Vertical

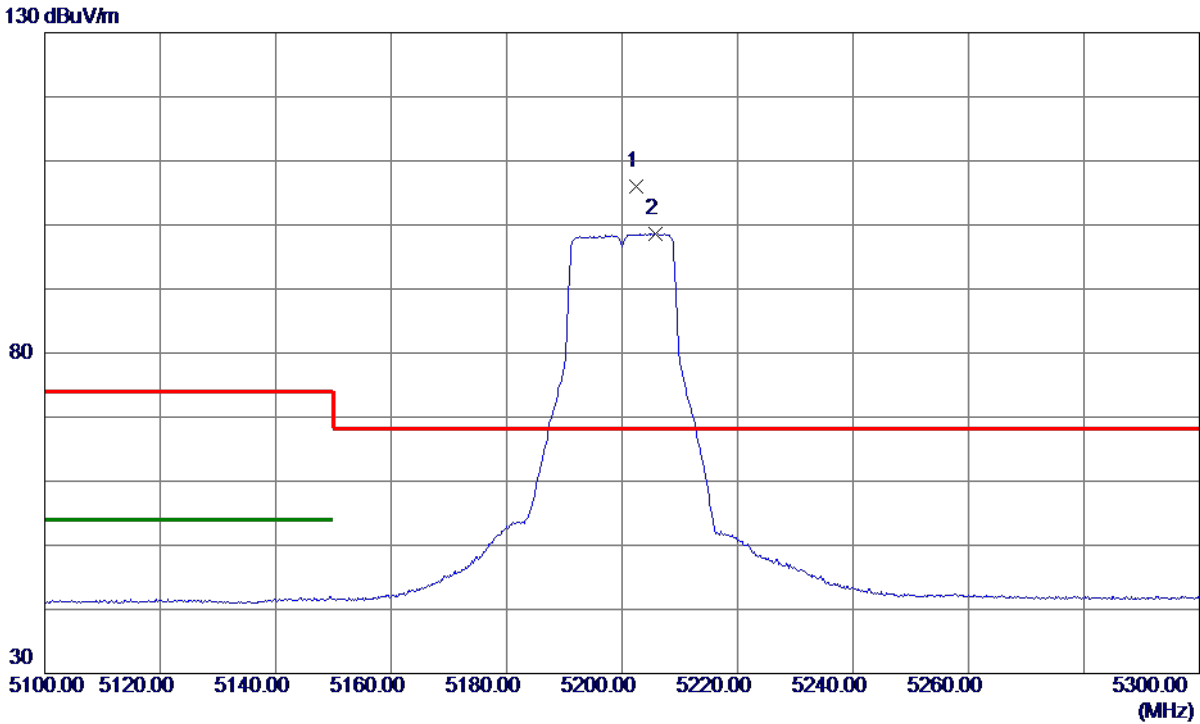

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5202.4000	90.88	15.02	105.90	68.30	37.60	Peak	No Limit
2	5205.8000	83.53	15.03	98.56	999.00	-900.44	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5200 MHz

Vertical

80 dBuV/m

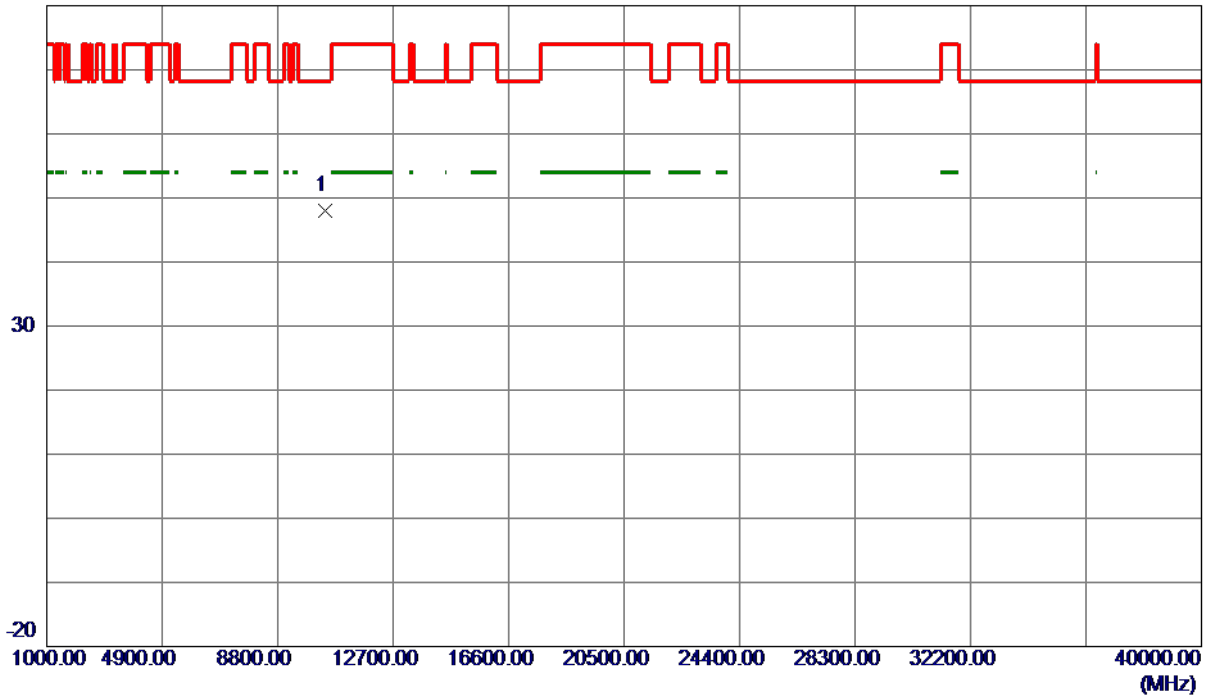

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10408.8400	35.06	12.99	48.05	68.30	-20.25	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5200 MHz

Horizontal

130 dBuV/m

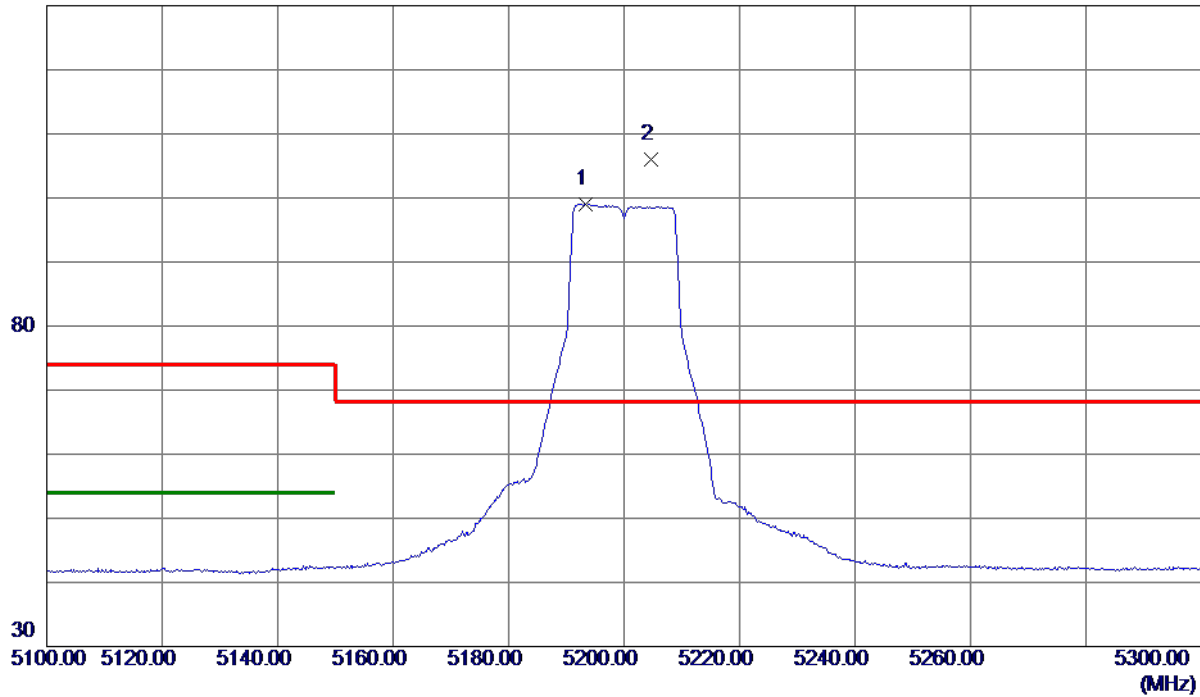

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5193.4000	84.01	15.00	99.01	999.00	-899.99	AVG	No Limit
2 *	5204.6000	90.93	15.02	105.95	68.30	37.65	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5200 MHz

Horizontal

80 dBuV/m

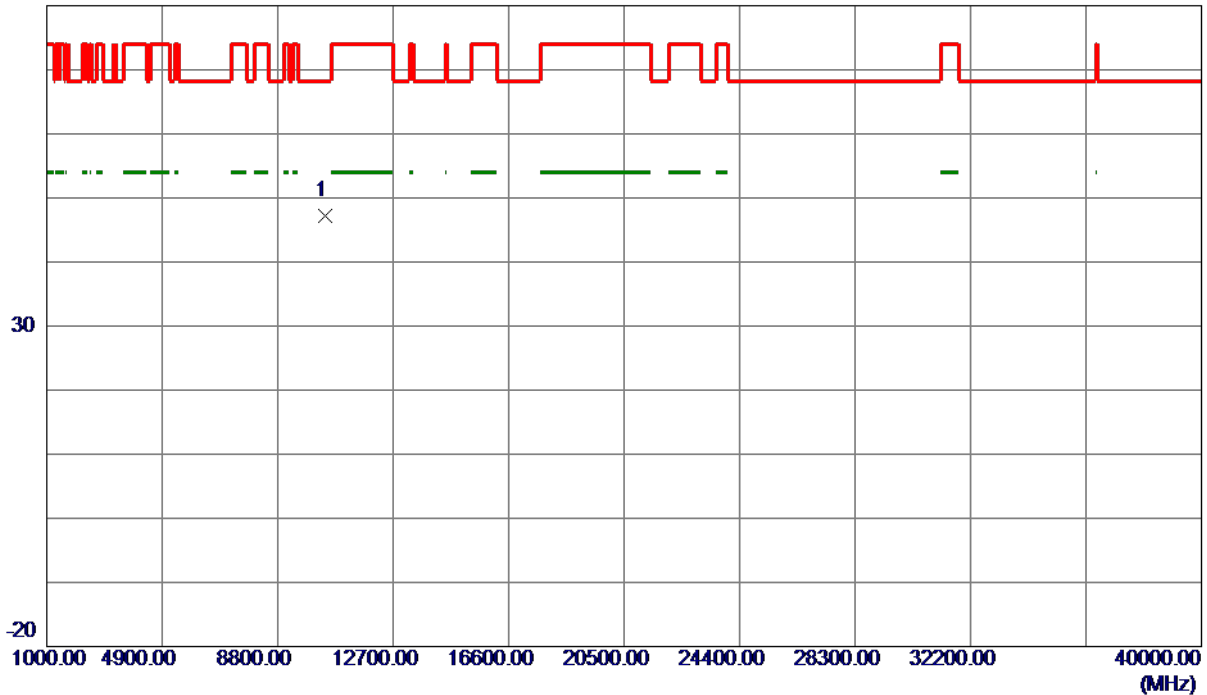

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.3400	34.19	12.97	47.16	68.30	-21.14	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

Vertical

130 dBuV/m

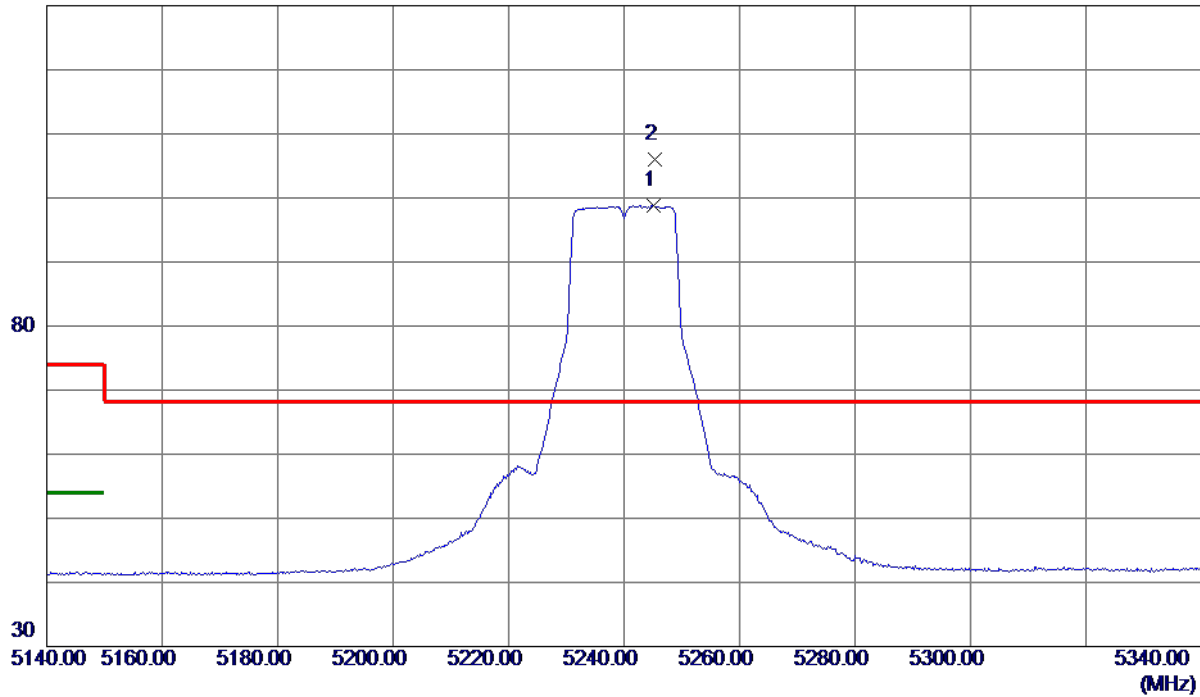

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5245.2000	83.66	15.11	98.77	999.00	-900.23	AVG	No Limit
2 *	5245.4000	90.89	15.11	106.00	68.30	37.70	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

Vertical

80 dBuV/m

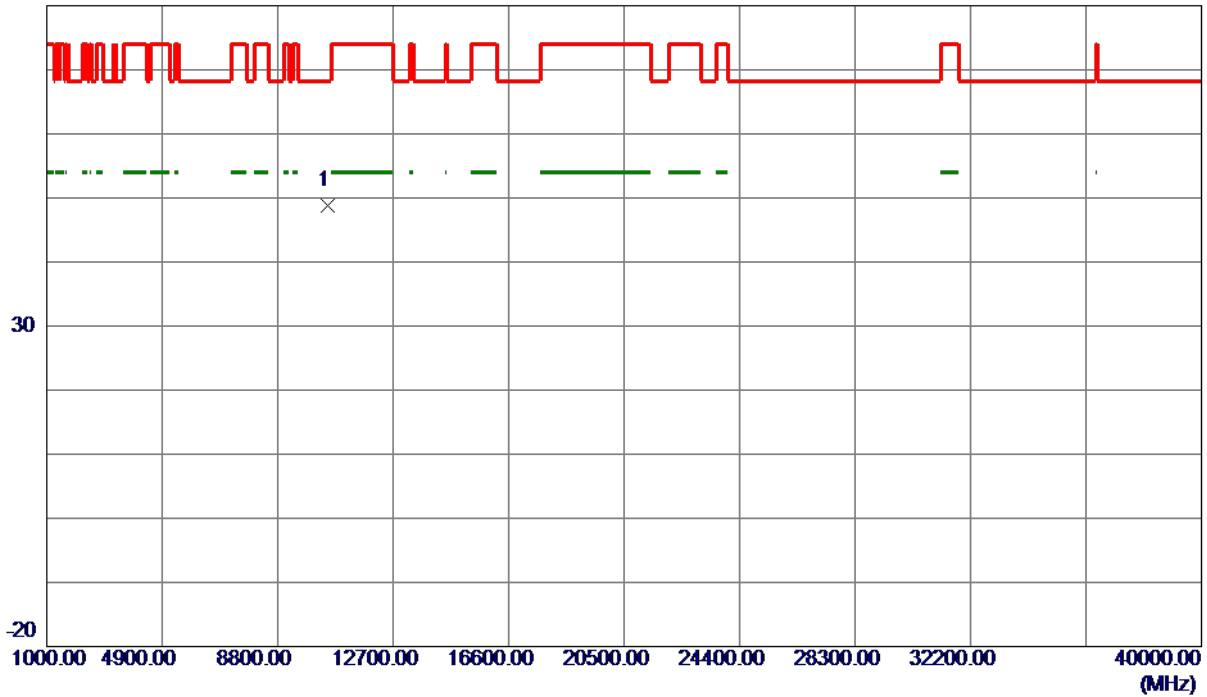

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10484.5199	35.66	13.14	48.80	68.30	-19.50	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

Horizontal

130 dBuV/m

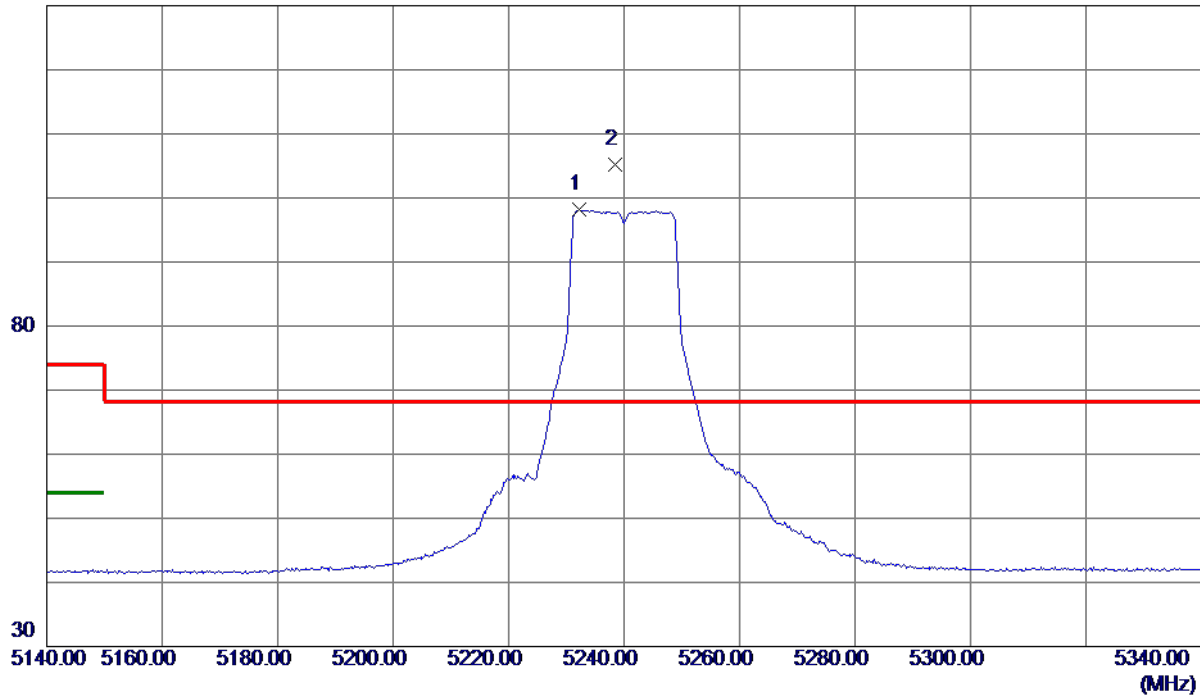

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5232.2000	83.10	15.08	98.18	999.00	-900.82	AVG	No Limit
2 *	5238.4000	90.10	15.09	105.19	68.30	36.89	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5240 MHz

Horizontal

80 dBuV/m

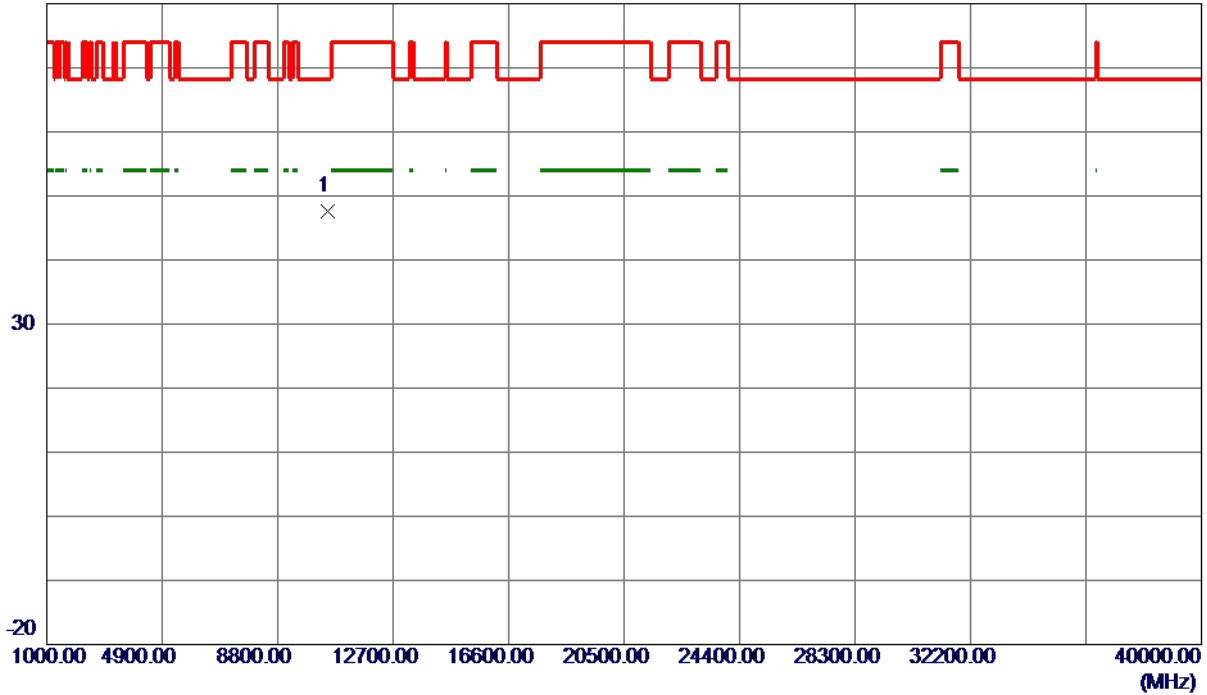

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10487.9600	34.38	13.15	47.53	68.30	-20.77	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

Vertical

130 dBuV/m

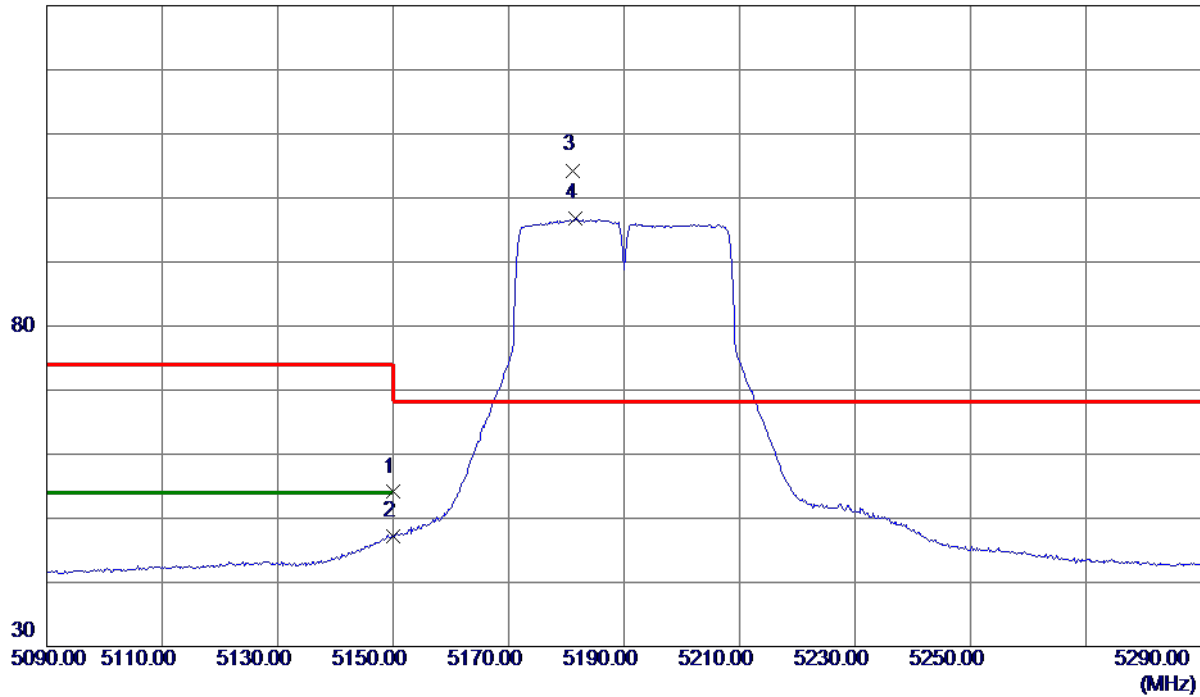


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	39.19	14.91	54.10	74.00	-19.90	Peak	
2	5150.0000	32.38	14.91	47.29	54.00	-6.71	AVG	
3 *	5181.2000	89.32	14.98	104.30	68.30	36.00	Peak	No Limit
4	5181.6000	81.79	14.98	96.77	999.00	-902.23	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

Vertical

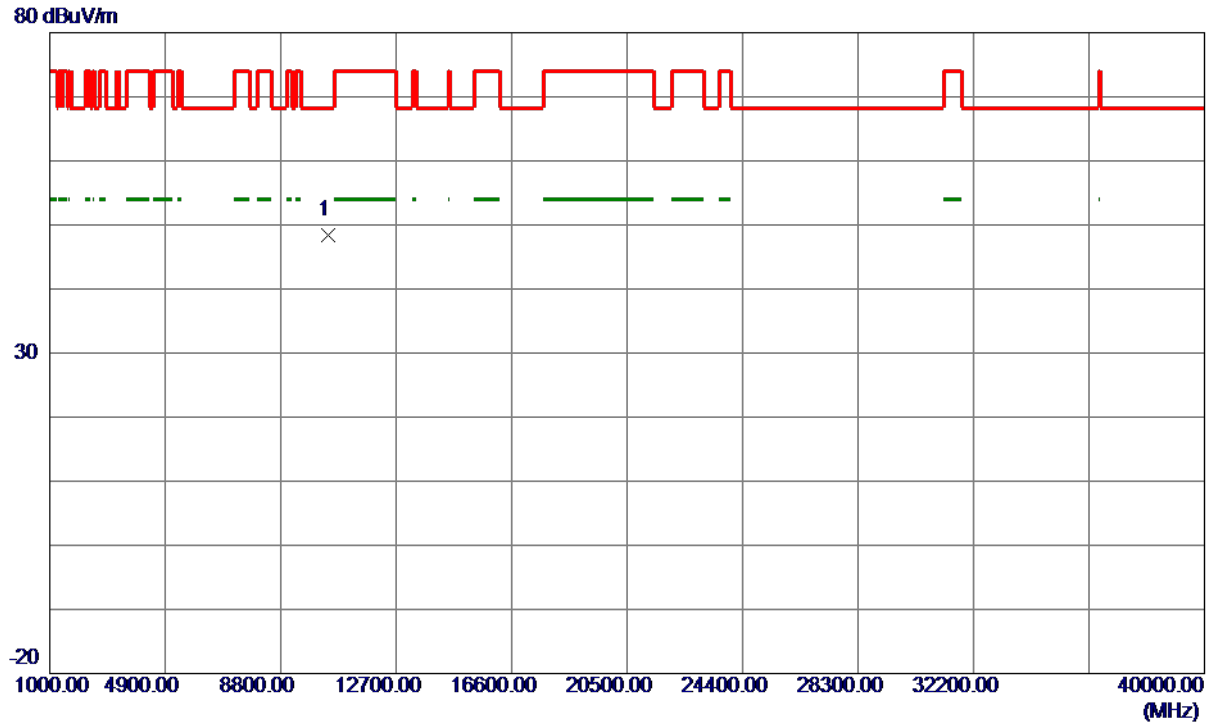


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10389.2400	35.54	12.95	48.49	68.30	-19.81	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

Horizontal

130 dBuV/m

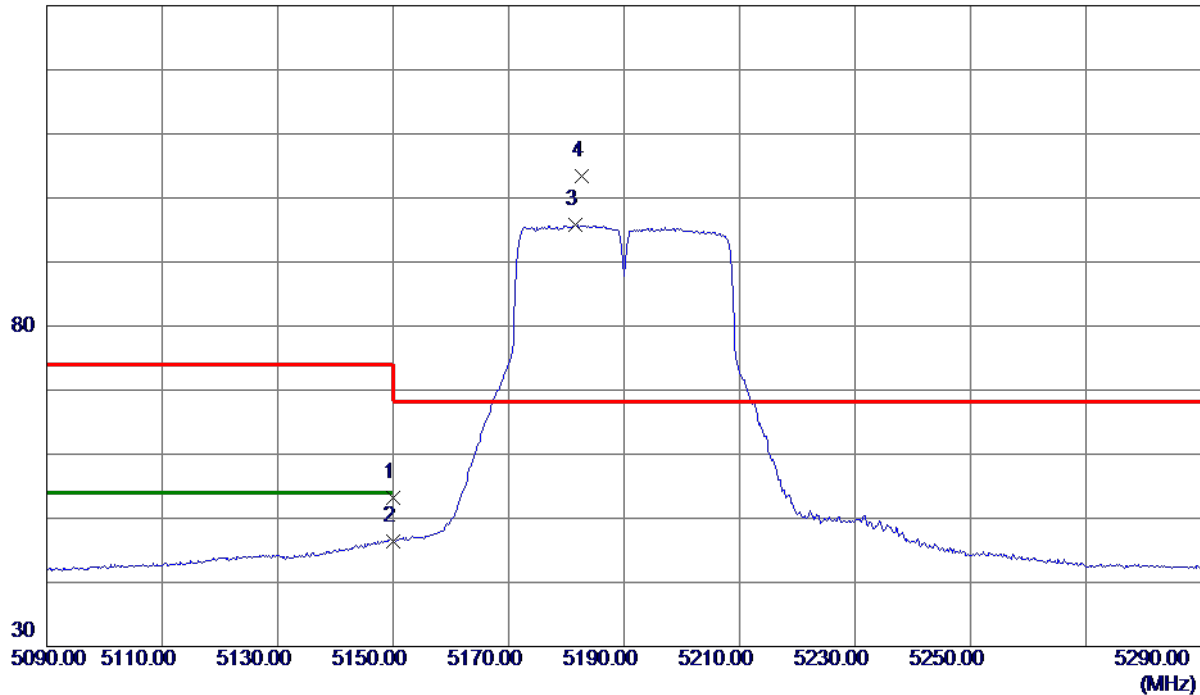

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	38.36	14.91	53.27	74.00	-20.73	Peak	
2	5150.0000	31.45	14.91	46.36	54.00	-7.64	AVG	
3	5181.6000	80.80	14.98	95.78	999.00	-903.22	AVG	No Limit
4 *	5182.6000	88.50	14.98	103.48	68.30	35.18	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz

Horizontal

80 dBuV/m

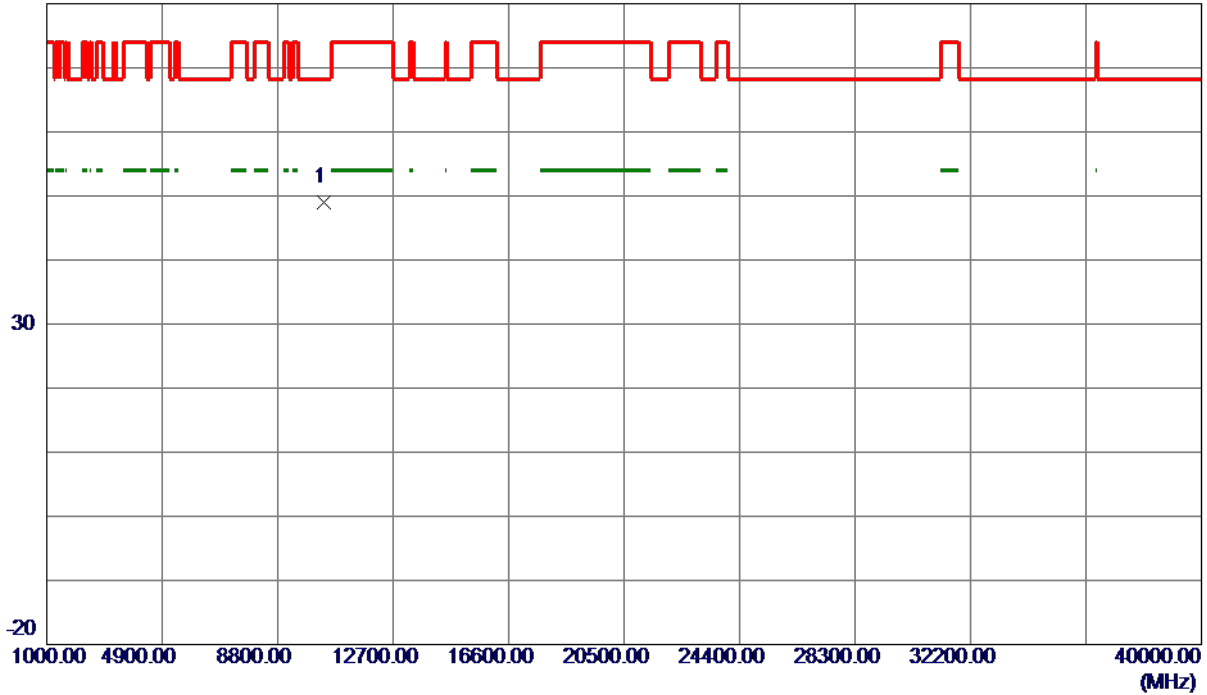


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10381.6600	36.15	12.93	49.08	68.30	-19.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

Vertical

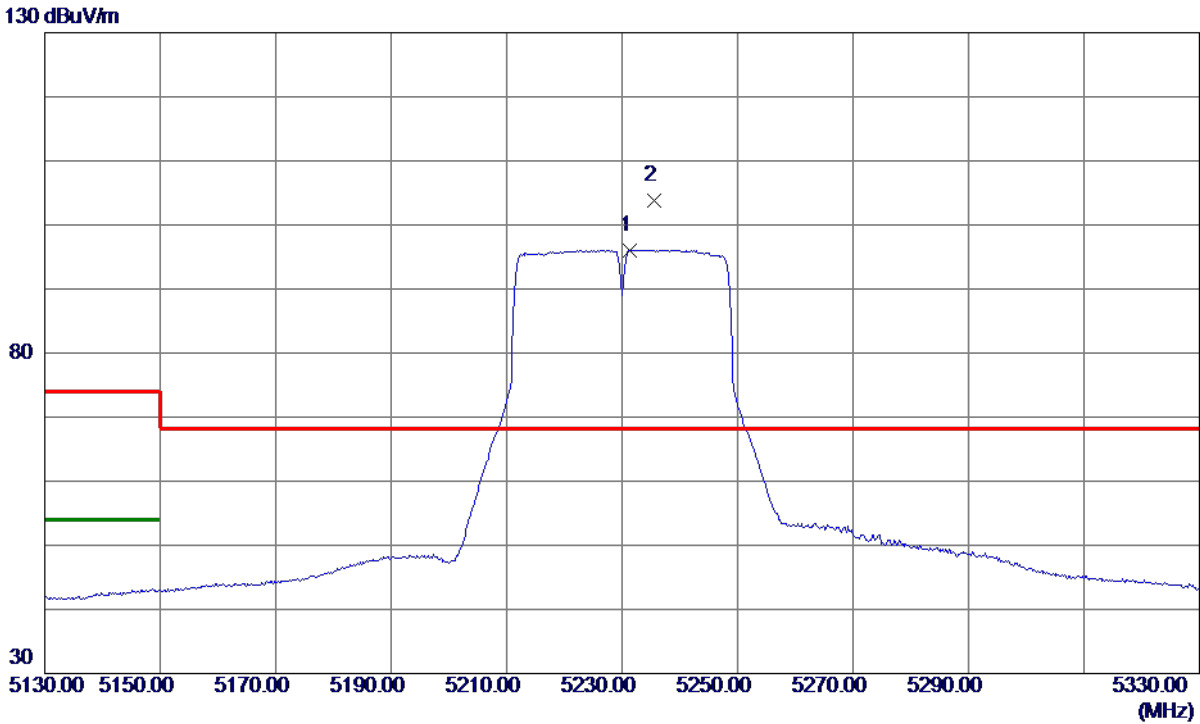


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5231.4000	81.00	15.08	96.08	999.00	-902.92	AVG	No Limit
2 *	5235.6000	88.74	15.09	103.83	68.30	35.53	Peak	No Limit

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

Vertical

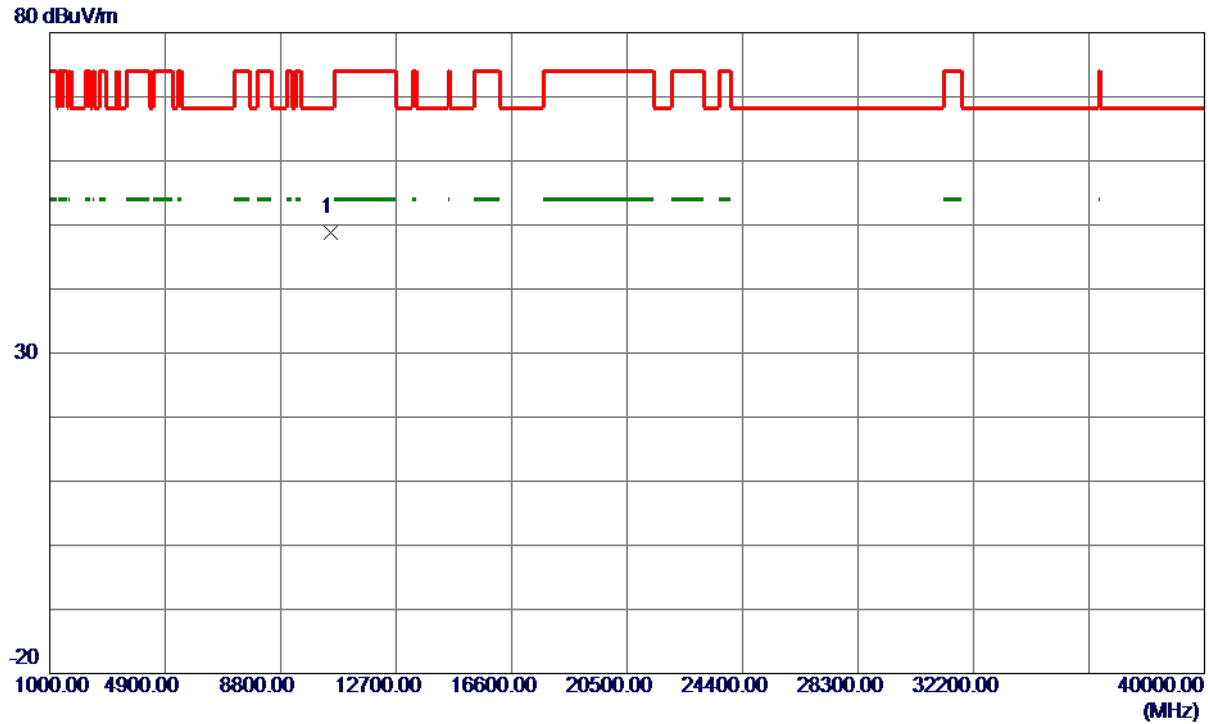


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10504.0000	35.53	13.18	48.71	68.30	-19.59	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

Horizontal

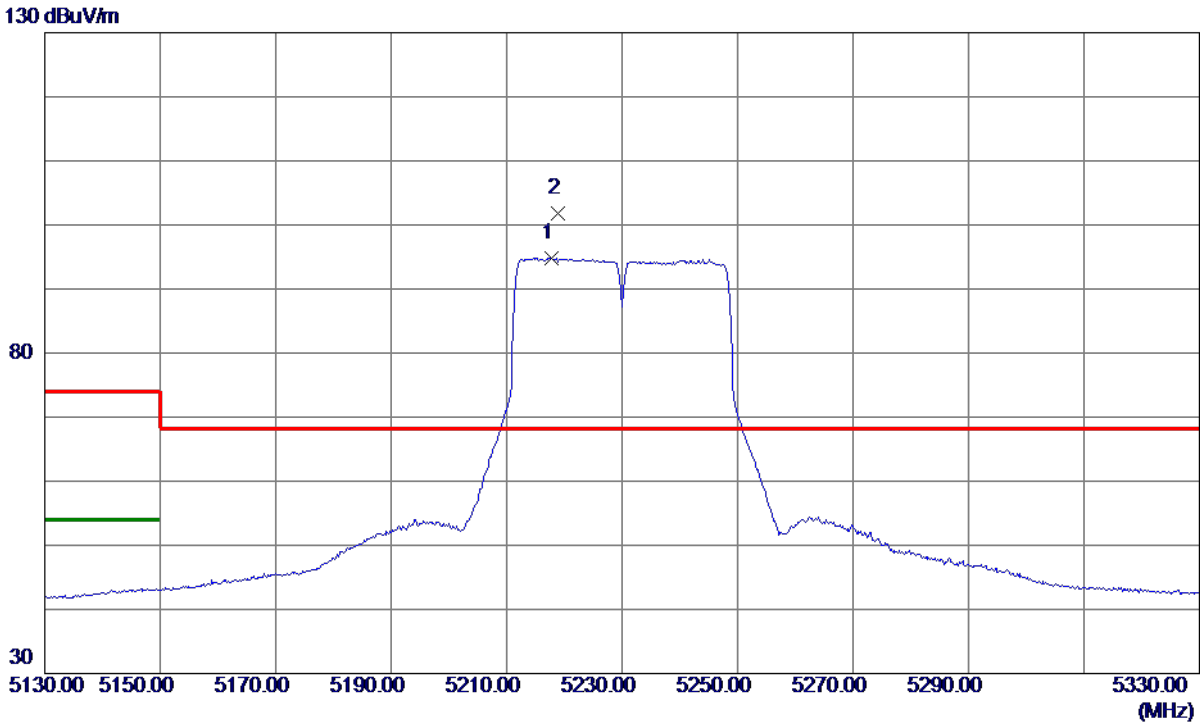


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5217.8000	79.78	15.05	94.83	999.00	-904.17	AVG	No Limit
2 *	5218.8000	86.68	15.05	101.73	68.30	33.43	Peak	No Limit

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5230 MHz

Horizontal

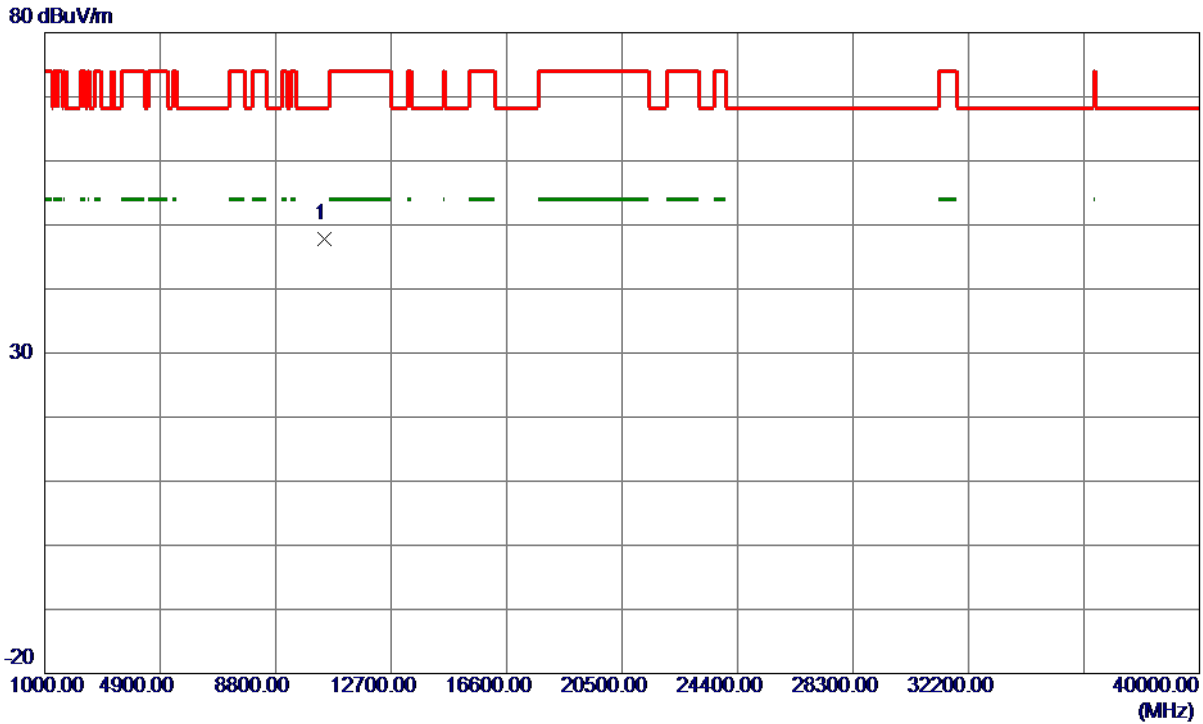


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10428.0000	34.83	13.03	47.86	68.30	-20.44	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5260 MHz

Vertical

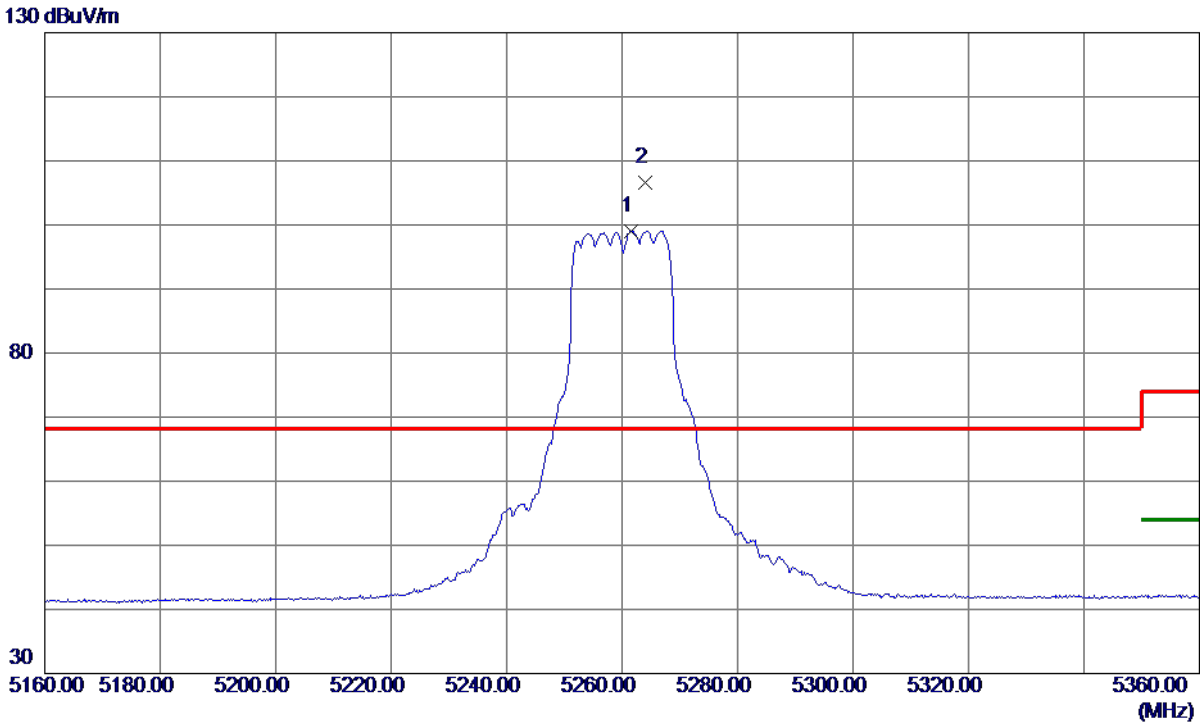

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5261.6000	83.91	15.14	99.05	999.00	-899.95	AVG	No Limit
2 *	5264.0000	91.48	15.15	106.63	68.30	38.33	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5260 MHz

Vertical

80 dBuV/m

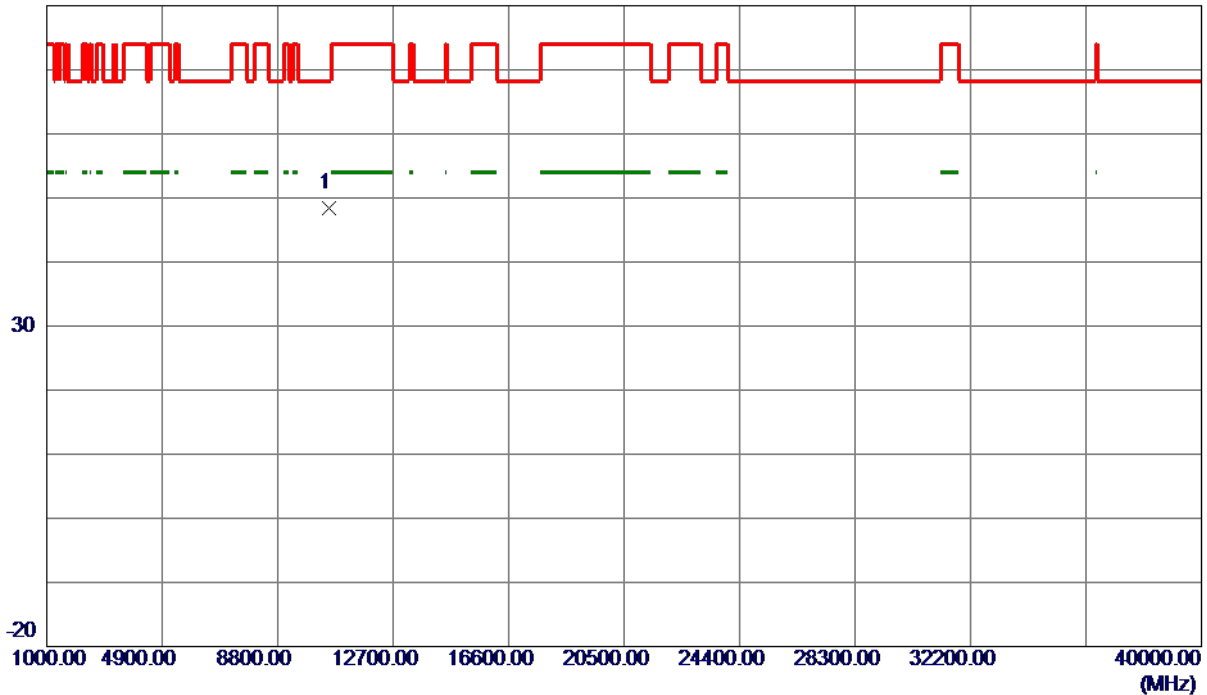


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10524.4000	35.18	13.19	48.37	68.30	-19.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5260 MHz

Horizontal

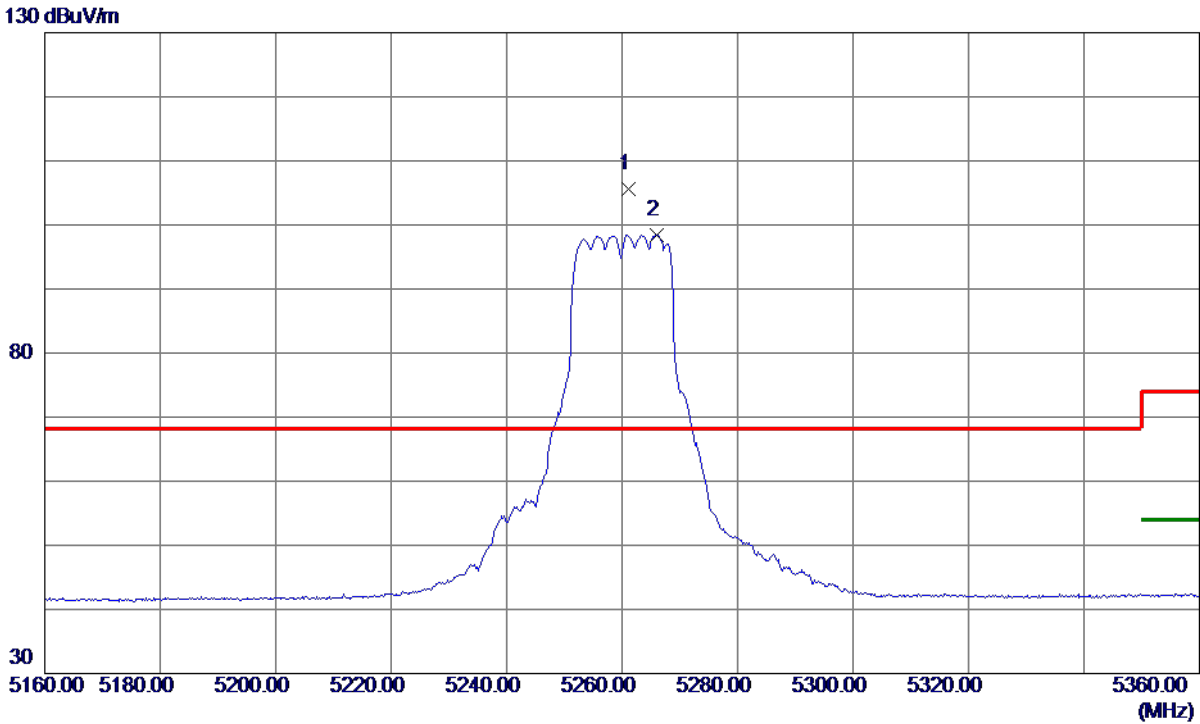


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5261.2000	90.44	15.14	105.58	68.30	37.28	Peak	No Limit
2	5266.0000	83.27	15.15	98.42	999.00	-900.58	AVG	No Limit

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5260 MHz

Horizontal

80 dBuV/m

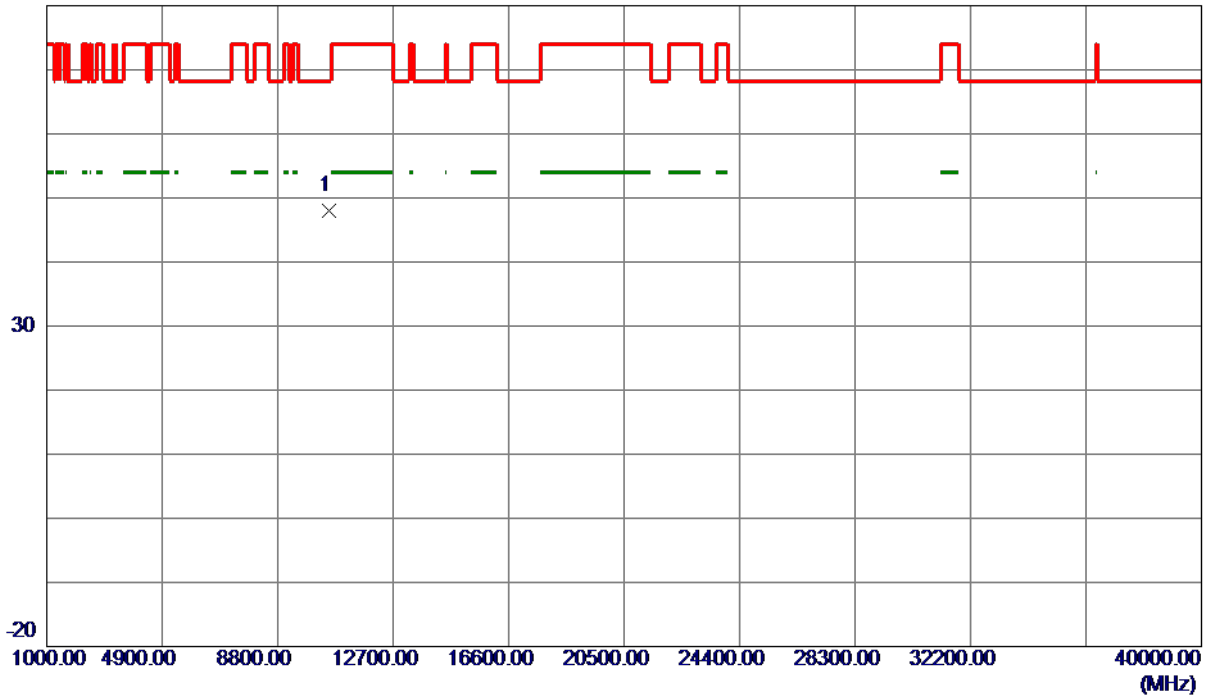

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10514.9000	34.73	13.18	47.91	68.30	-20.39	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5300 MHz

Vertical

130 dBuV/m

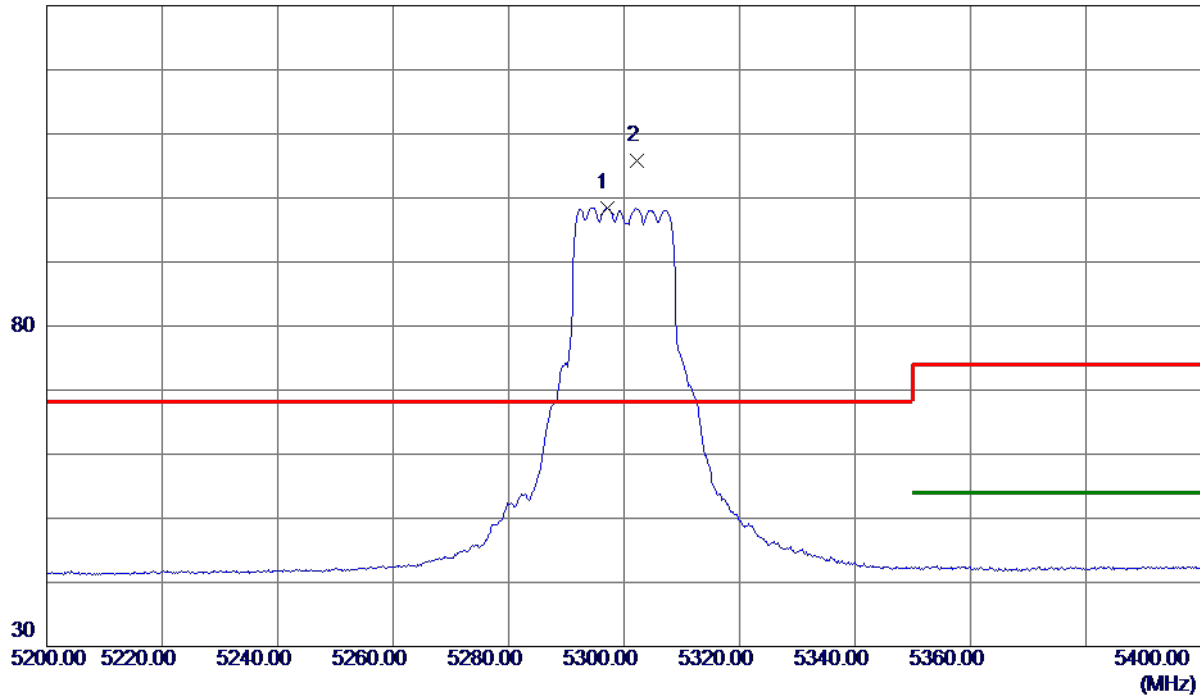


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5297.0000	83.28	15.21	98.49	999.00	-900.51	AVG	No Limit
2 *	5302.0000	90.54	15.23	105.77	68.30	37.47	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5300 MHz

Vertical

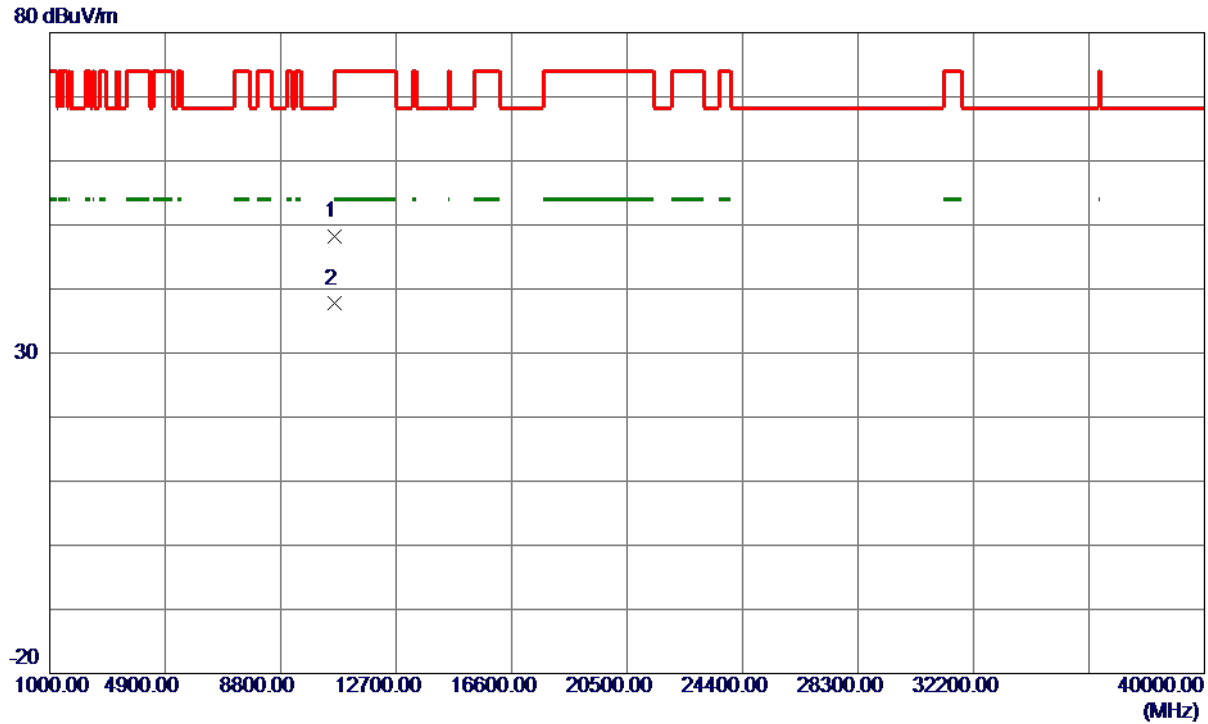


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10604.3000	34.93	13.24	48.17	74.00	-25.83	Peak	
2 *	10605.3000	24.46	13.24	37.70	54.00	-16.30	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5300 MHz

Horizontal

130 dBuV/m

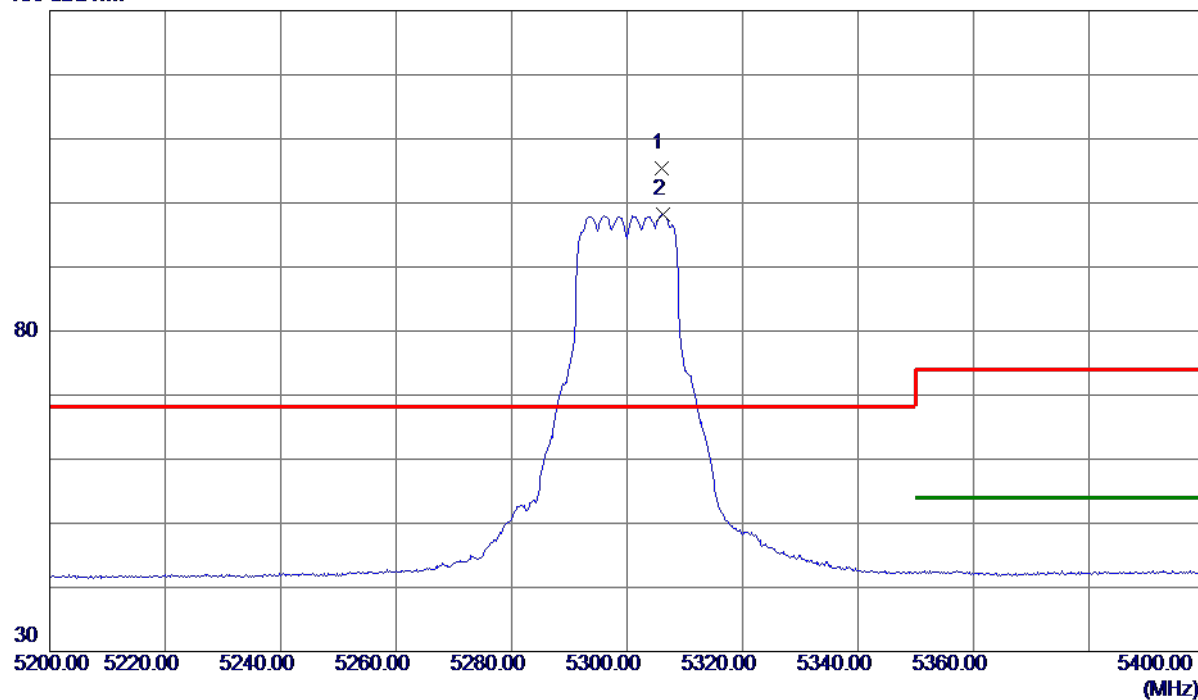

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5306.0000	90.11	15.23	105.34	68.30	37.04	Peak	No Limit
2	5306.2000	82.95	15.23	98.18	999.00	-900.82	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5300 MHz

Horizontal

80 dBuV/m

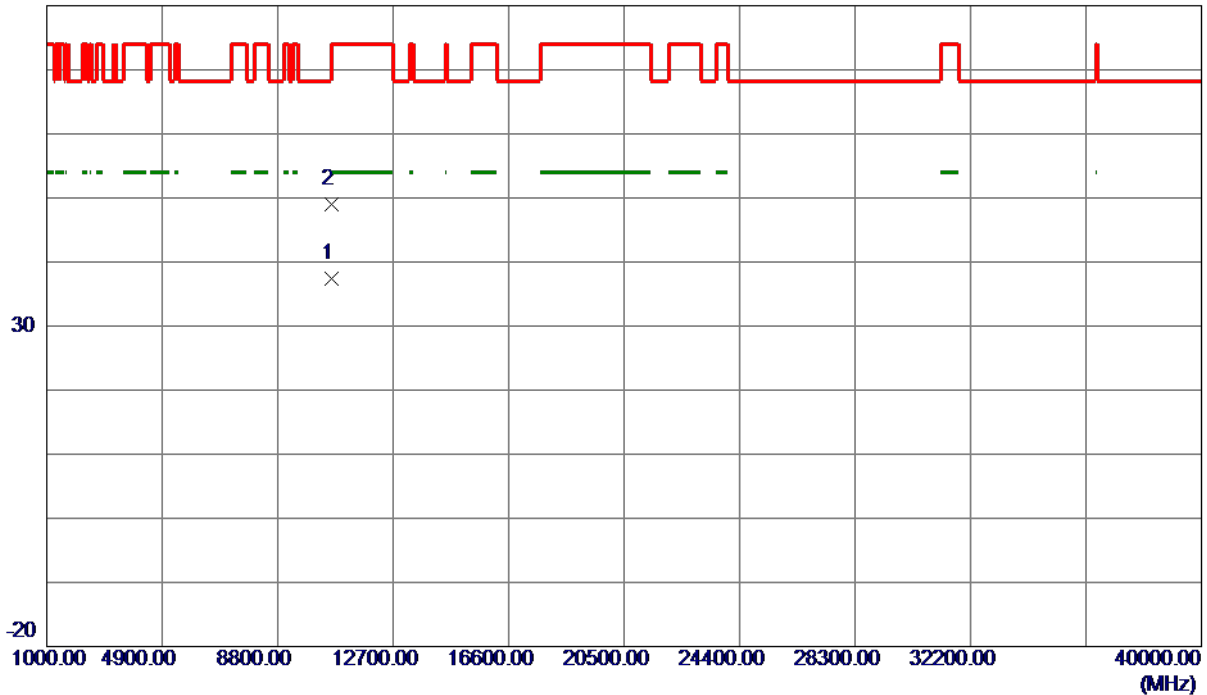


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10635.2000	24.16	13.26	37.42	54.00	-16.58	AVG	
2	10635.3000	35.75	13.26	49.01	74.00	-24.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5320 MHz

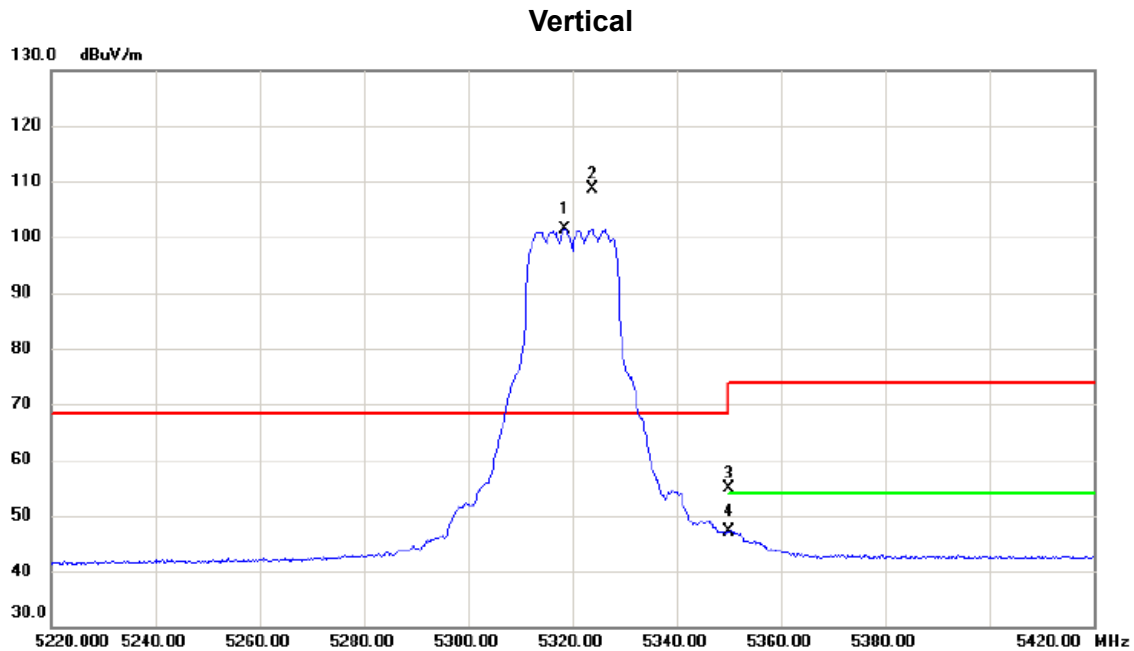

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5318.600	86.09	15.26	101.35	68.30	33.05	AVG	No Limit
2	*	5323.800	93.28	15.27	108.55	68.30	40.25	peak	No Limit
3		5350.000	39.44	15.32	54.76	74.00	-19.24	peak	
4		5350.000	31.84	15.32	47.16	54.00	-6.84	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5320 MHz

Vertical

80 dBuV/m

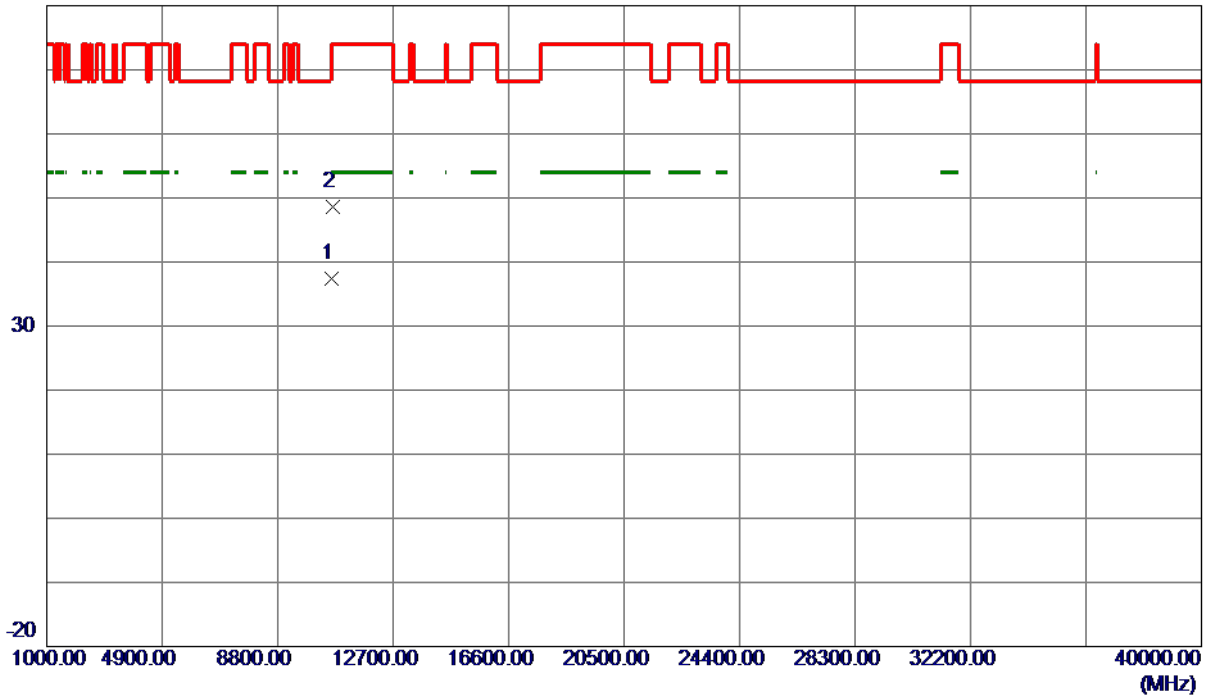


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10638.5000	24.18	13.26	37.44	54.00	-16.56	AVG	
2	10642.0400	35.33	13.26	48.59	74.00	-25.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5320 MHz

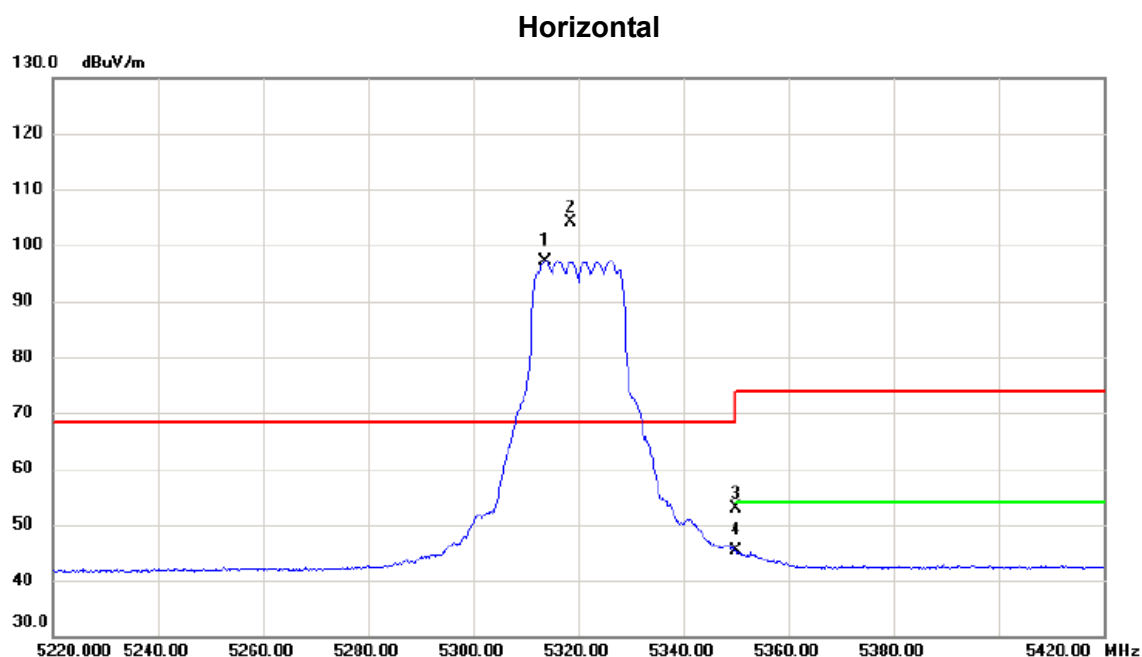

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5313.800	81.89	15.25	97.14	68.30	28.84	AVG	No Limit
2	*	5318.600	88.80	15.26	104.06	68.30	35.76	peak	No Limit
3		5350.000	37.46	15.32	52.78	74.00	-21.22	peak	
4		5350.000	30.09	15.32	45.41	54.00	-8.59	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5320 MHz

Horizontal

80 dBuV/m

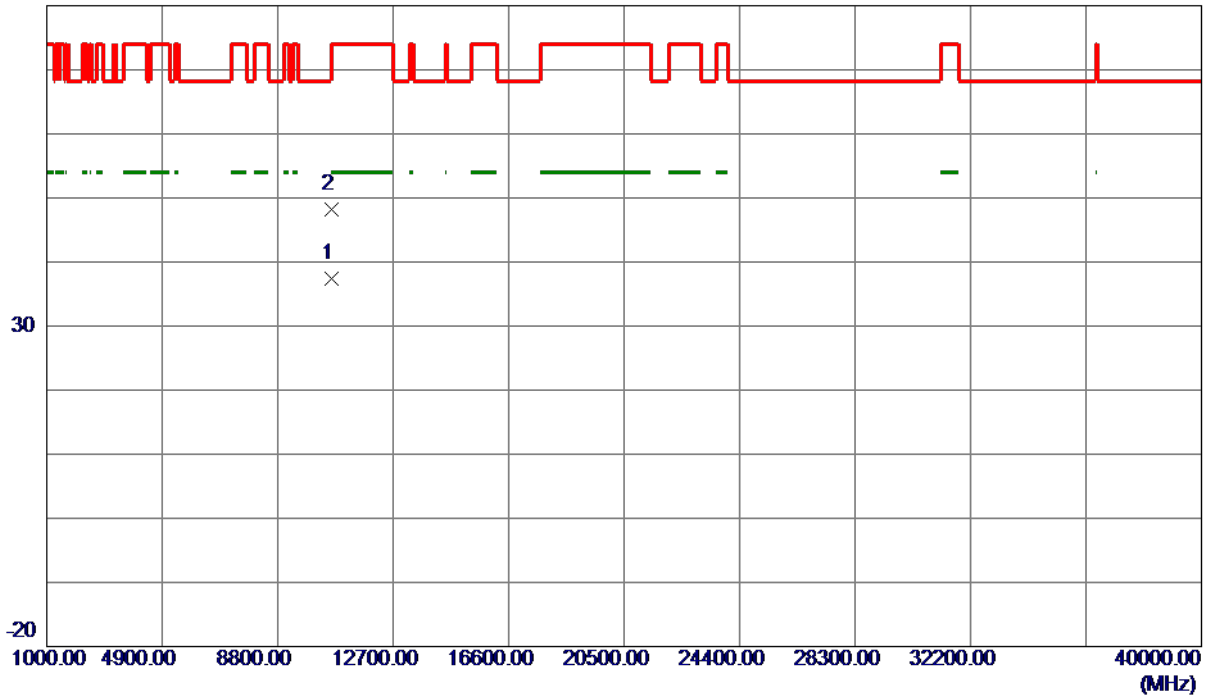

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10631.7400	24.11	13.26	37.37	54.00	-16.63	AVG	
2	10638.2000	34.90	13.26	48.16	74.00	-25.84	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5260 MHz

Vertical

130 dBuV/m

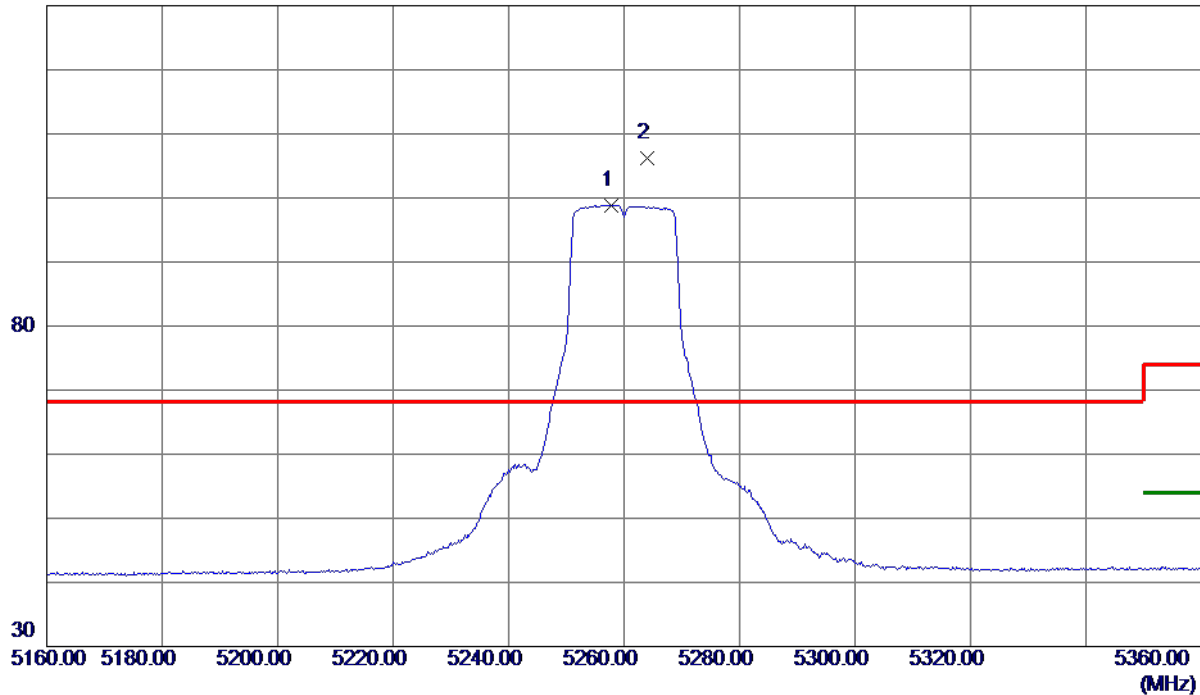


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5257.8000	83.75	15.13	98.88	999.00	-900.12	AVG	No Limit
2 *	5264.0000	91.10	15.15	106.25	68.30	37.95	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5260 MHz

Vertical

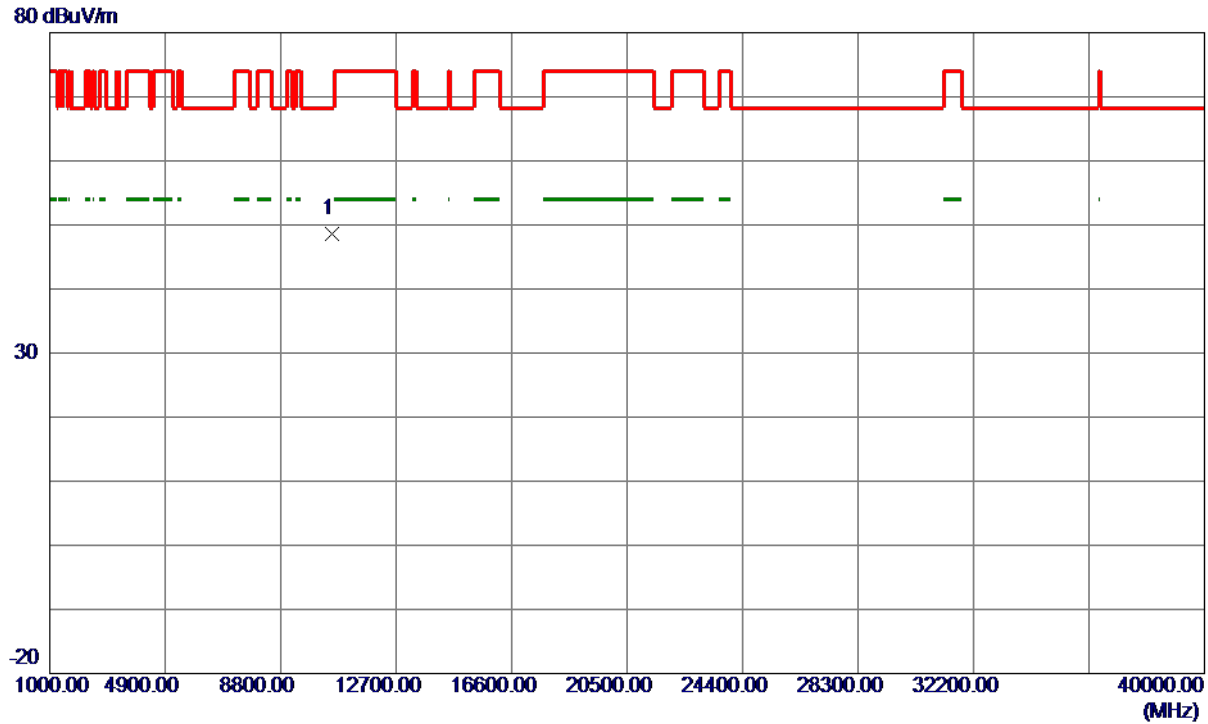

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10528.0400	35.42	13.19	48.61	68.30	-19.69	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5260 MHz

Horizontal

130 dBuV/m

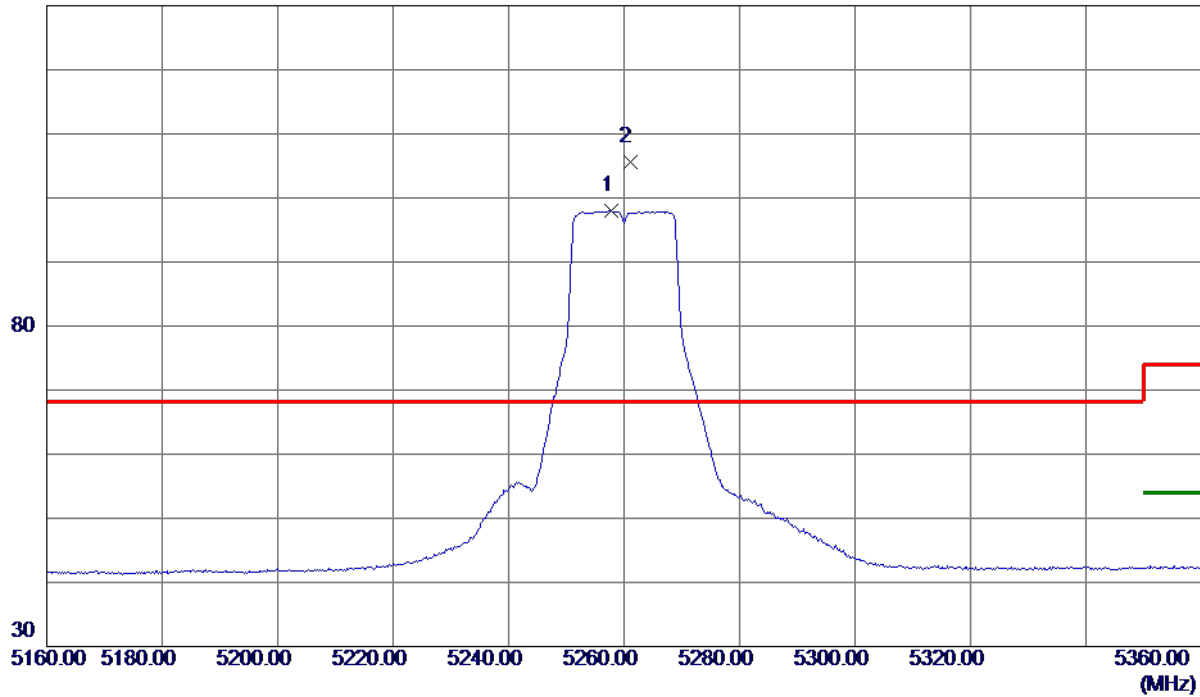

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5257.8000	82.80	15.13	97.93	999.00	-901.07	AVG	No Limit
2 *	5261.0000	90.37	15.14	105.51	68.30	37.21	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5260 MHz

Horizontal

80 dBuV/m

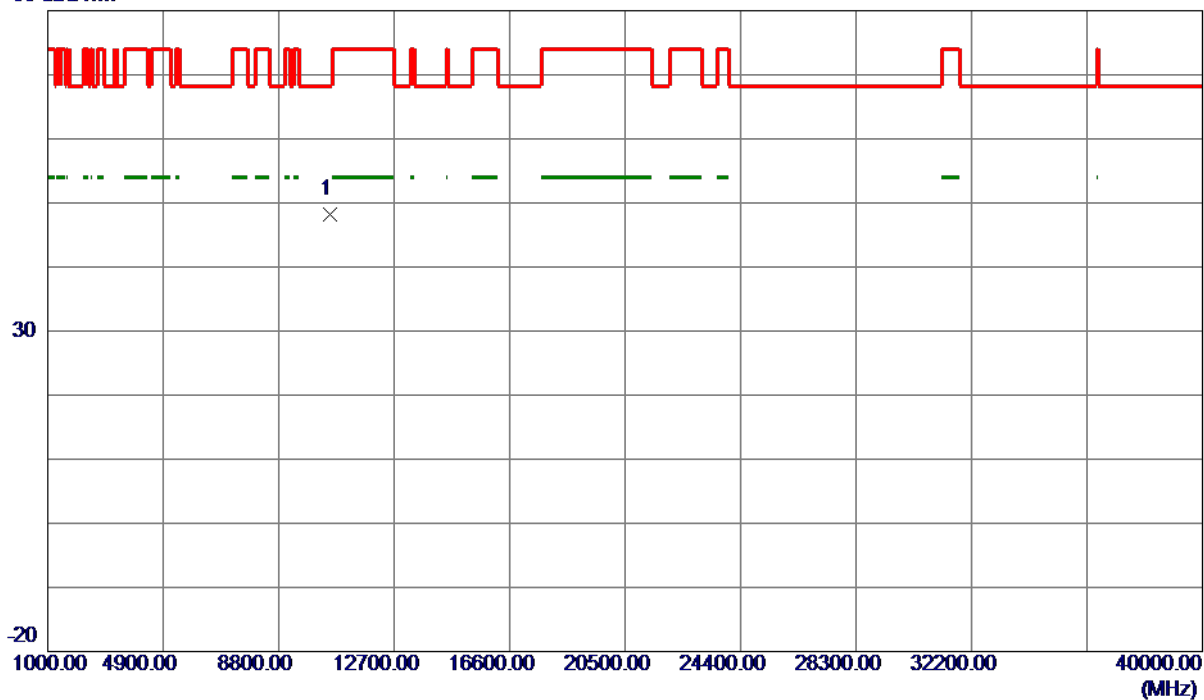

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10518.9400	34.95	13.19	48.14	68.30	-20.16	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5300 MHz

Vertical

130 dBuV/m

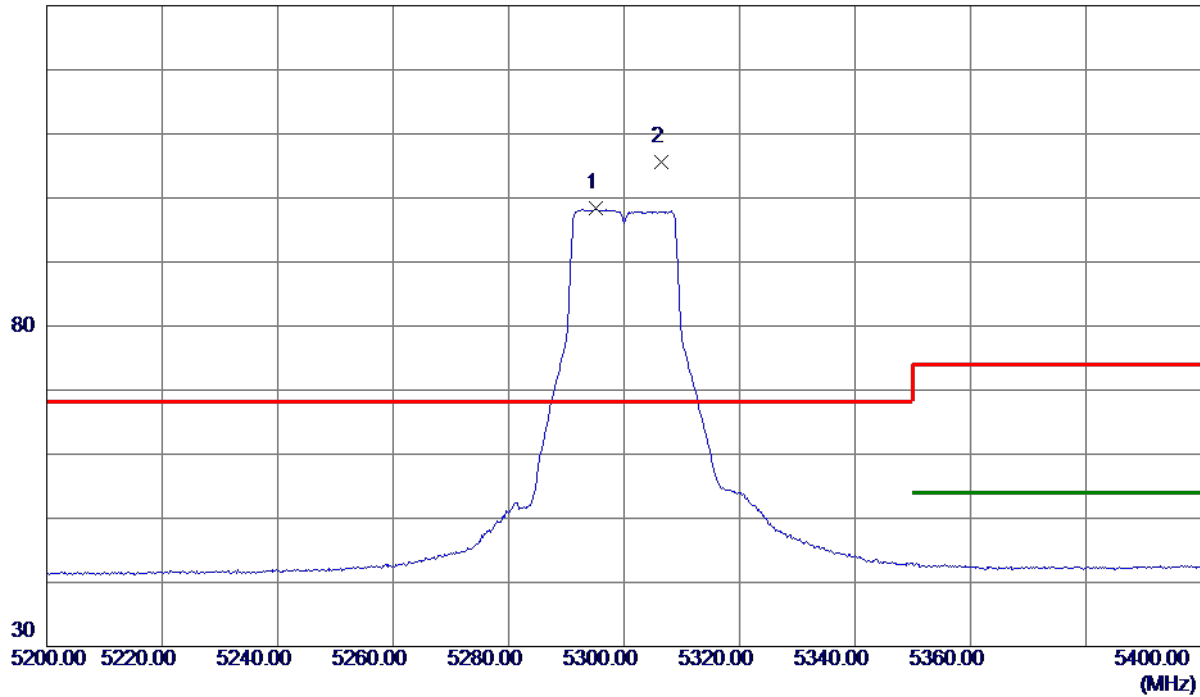

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5295.2000	83.12	15.21	98.33	999.00	-900.67	AVG	No Limit
2 *	5306.4000	90.28	15.23	105.51	68.30	37.21	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5300 MHz

Vertical

80 dBuV/m

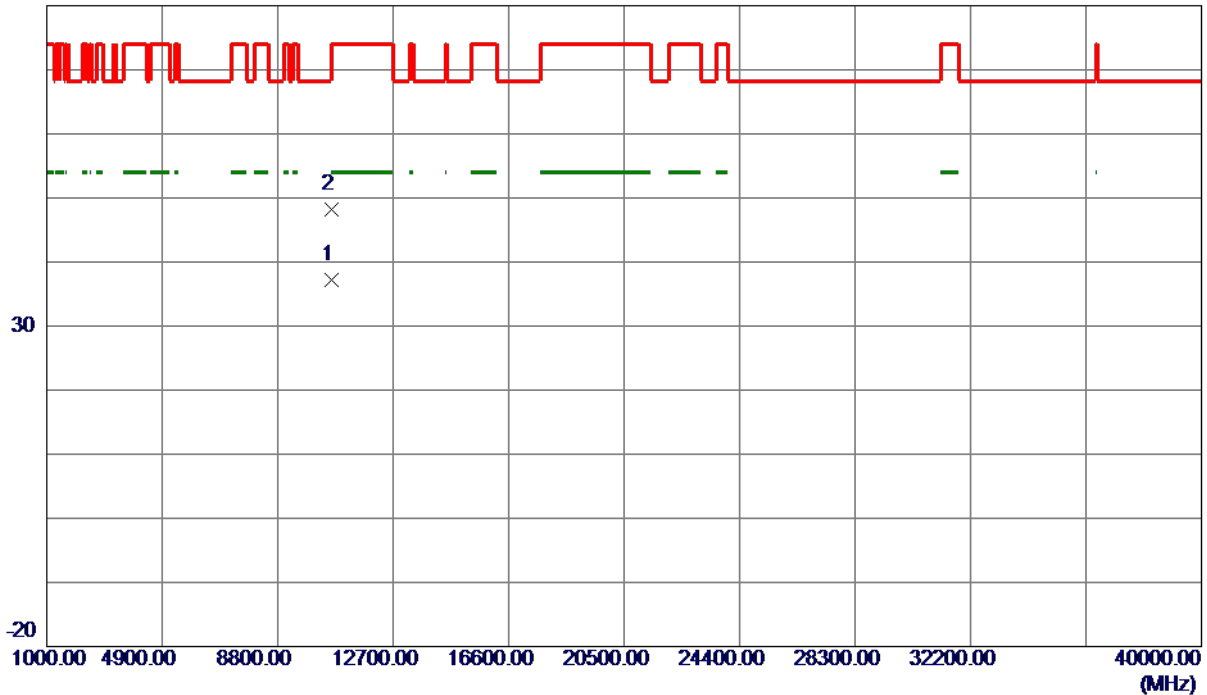


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.1800	23.88	13.24	37.12	54.00	-16.88	AVG	
2	10605.6200	34.97	13.24	48.21	74.00	-25.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5300 MHz

Horizontal

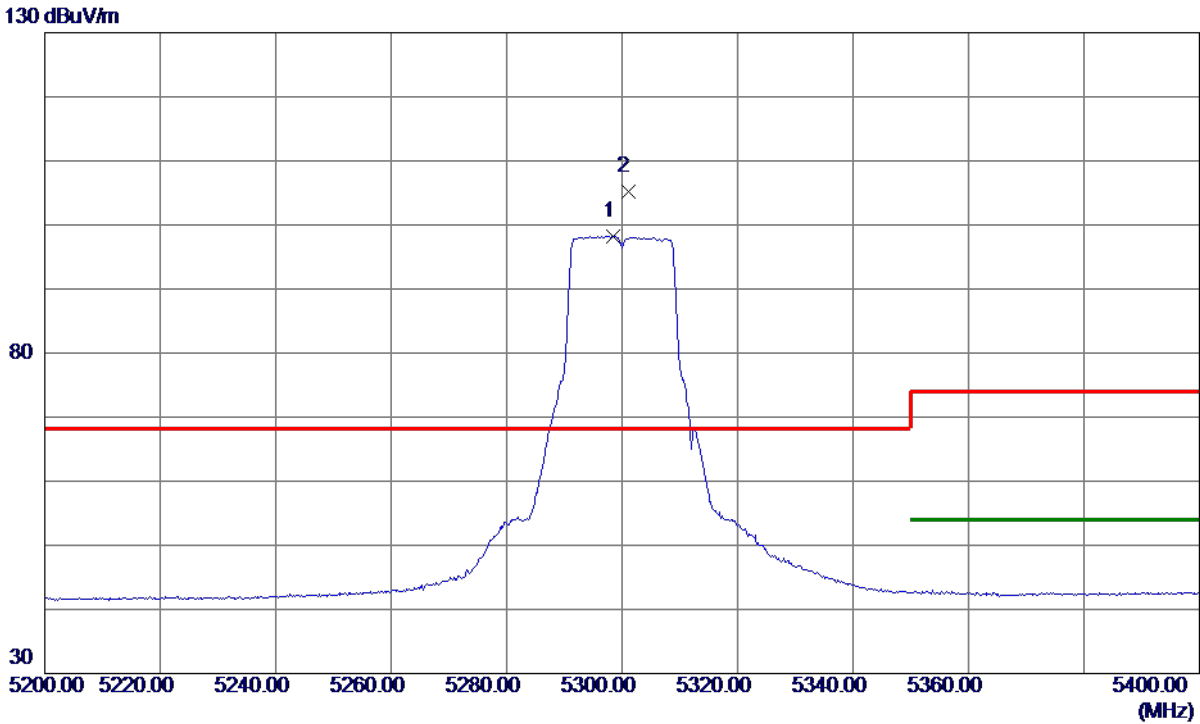

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5298.4000	83.00	15.22	98.22	999.00	-900.78	AVG	No Limit
2 *	5301.0000	89.89	15.22	105.11	68.30	36.81	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5300 MHz

Horizontal

80 dBuV/m

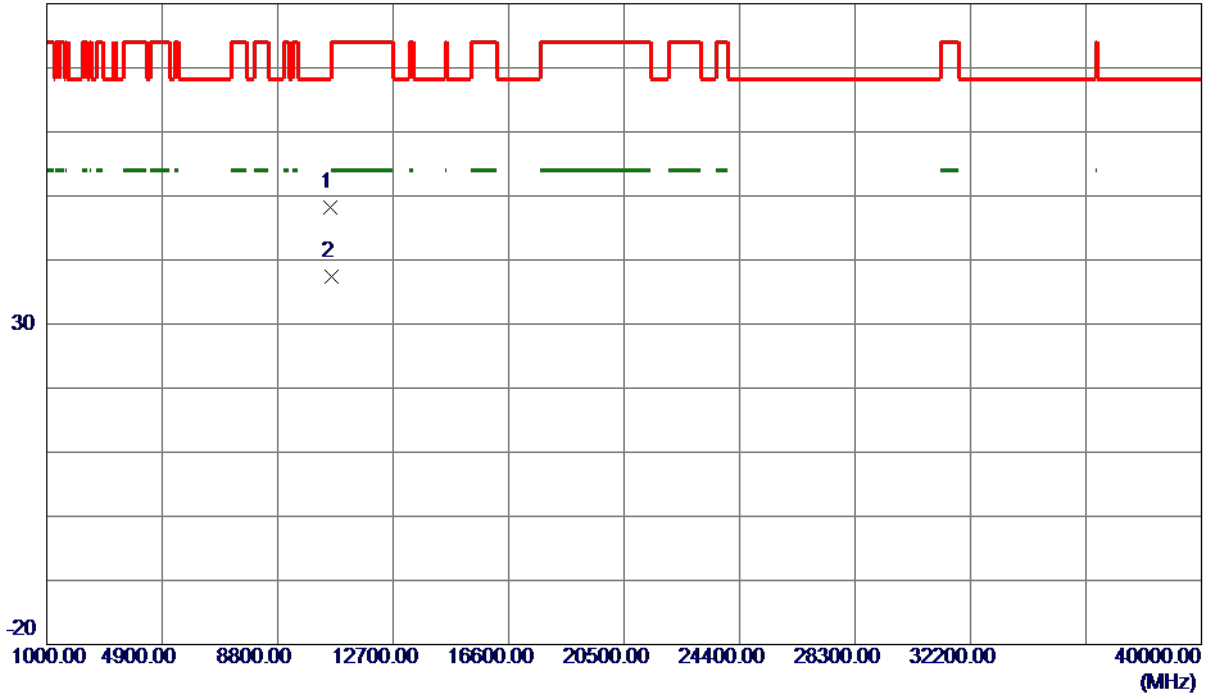


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10596.4400	35.01	13.24	48.25	68.30	-20.05	Peak	
2 *	10605.4000	24.23	13.24	37.47	54.00	-16.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5320 MHz

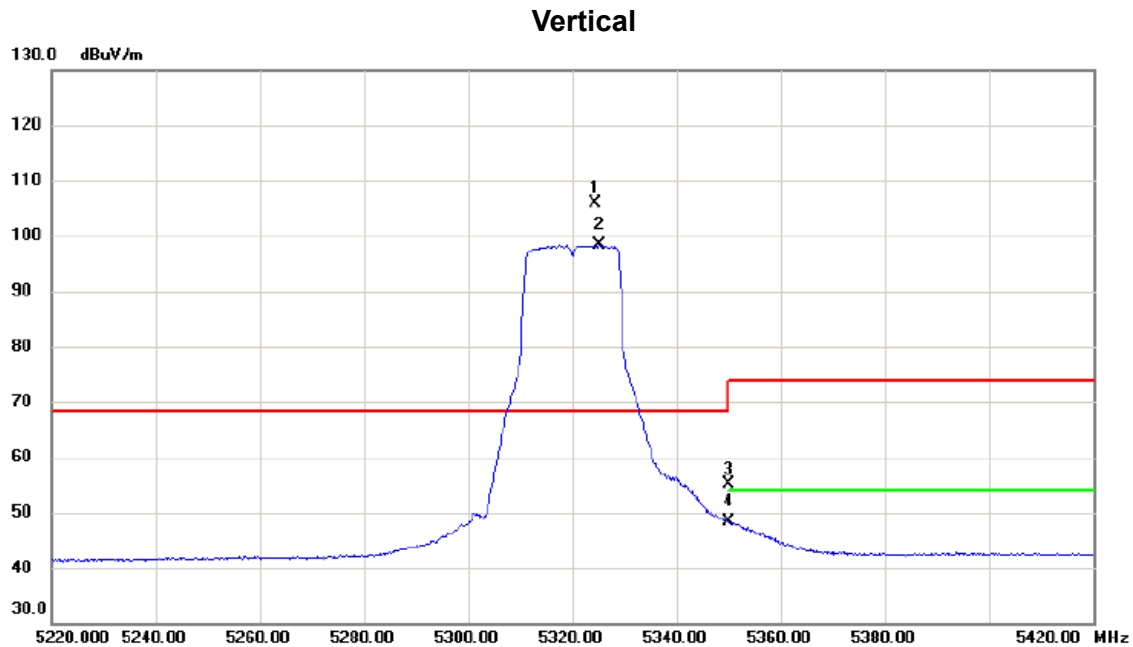


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5324.400	90.70	15.27	105.97	68.30	37.67	peak	No Limit
2	X	5325.200	83.02	15.27	98.29	68.30	29.99	AVG	No Limit
3		5350.000	39.77	15.32	55.09	74.00	-18.91	peak	
4		5350.000	33.11	15.32	48.43	54.00	-5.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5320 MHz

Vertical

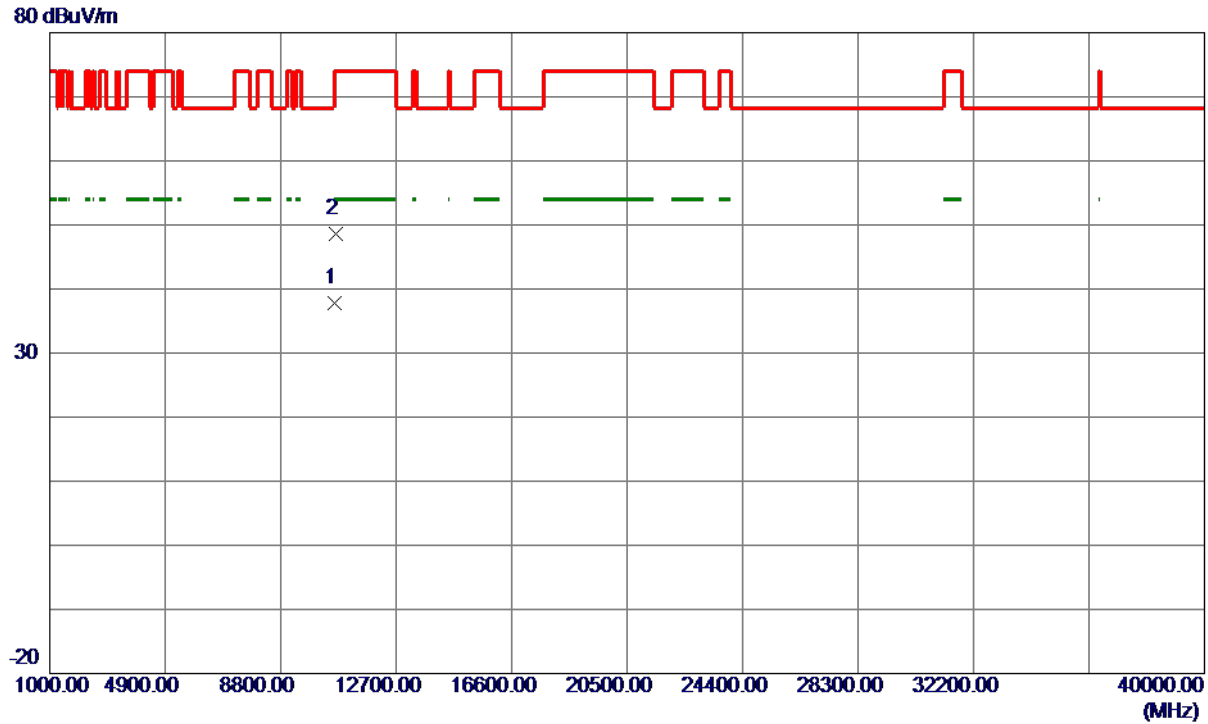


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10630.3000	24.51	13.26	37.77	54.00	-16.23	AVG	
2	10643.2200	35.26	13.27	48.53	74.00	-25.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5320 MHz

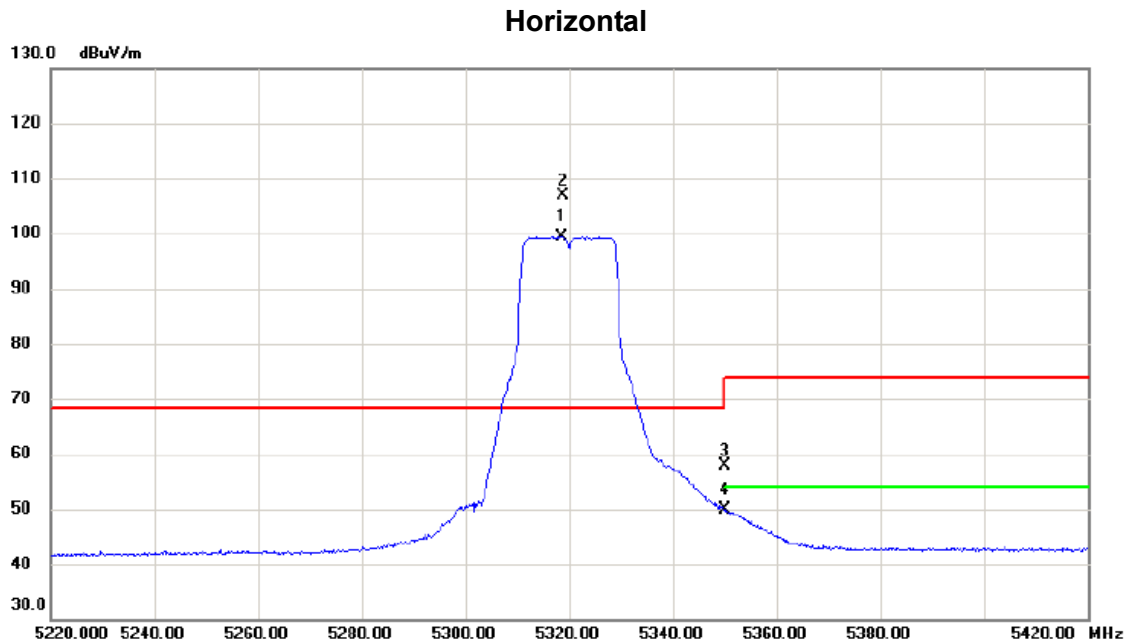

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5318.600	84.07	15.26	99.33	68.30	31.03	AVG	No Limit
2	*	5318.800	91.72	15.26	106.98	68.30	38.68	peak	No Limit
3		5350.000	42.48	15.32	57.80	74.00	-16.20	peak	
4		5350.000	34.62	15.32	49.94	54.00	-4.06	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5320 MHz

Horizontal

80 dBuV/m

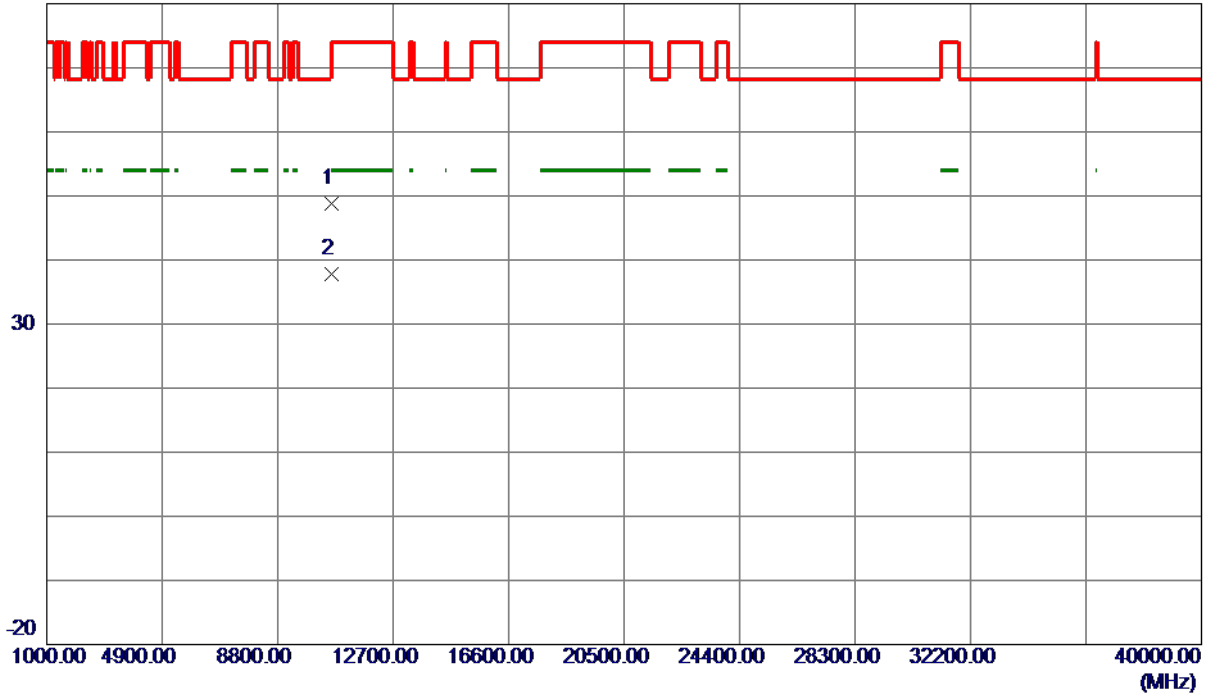


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10633.9400	35.48	13.26	48.74	74.00	-25.26	Peak	
2 *	10636.0199	24.50	13.26	37.76	54.00	-16.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5270 MHz

Vertical

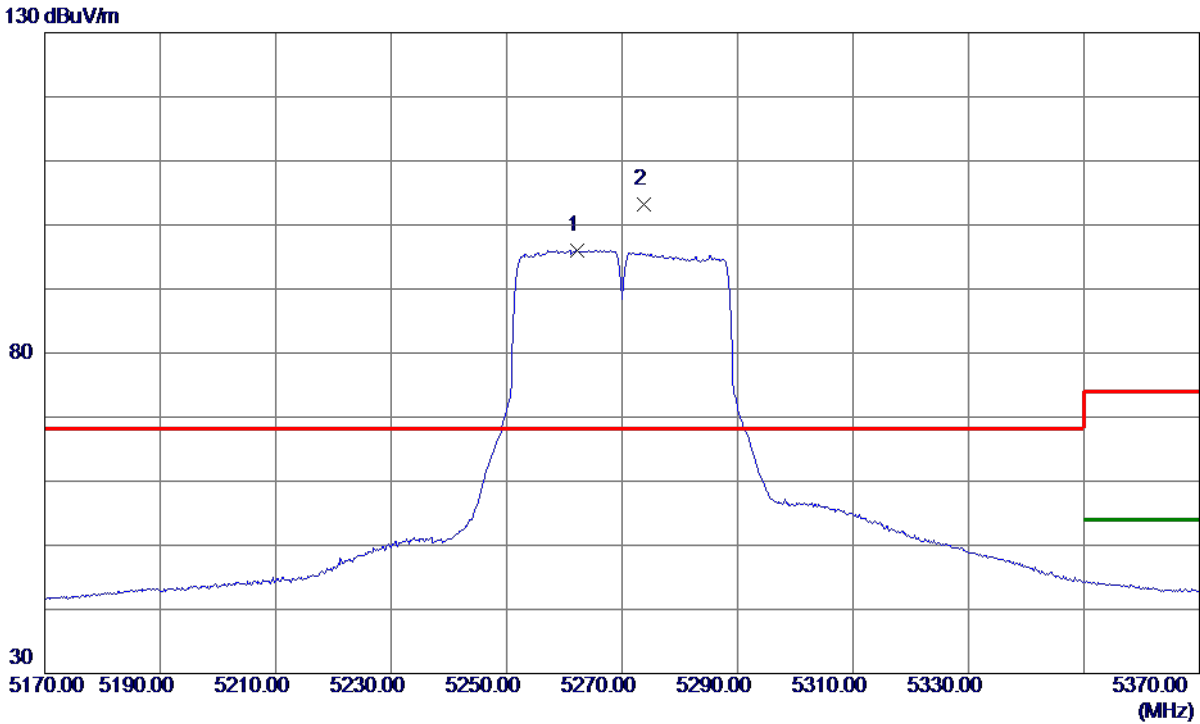


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5262.2000	80.87	15.14	96.01	999.00	-902.99	AVG	No Limit
2 *	5273.8000	88.09	15.17	103.26	68.30	34.96	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5270 MHz

Vertical

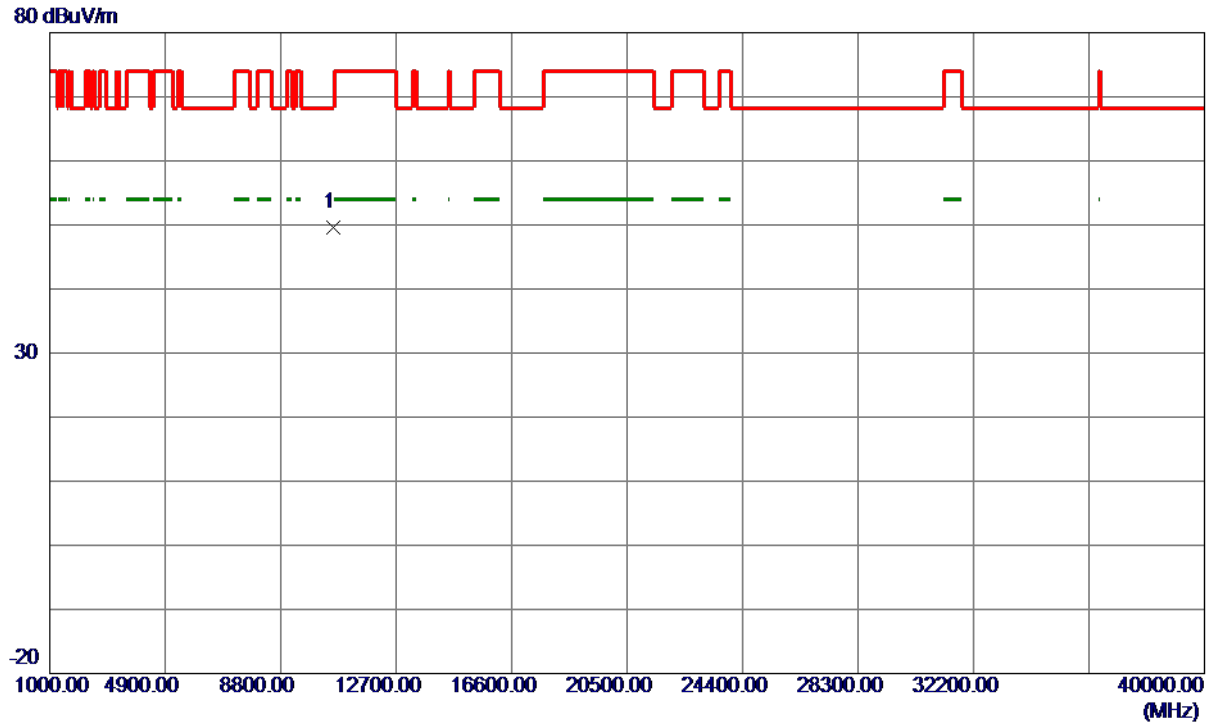


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10561.6000	36.48	13.21	49.69	68.30	-18.61	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5270 MHz

Horizontal

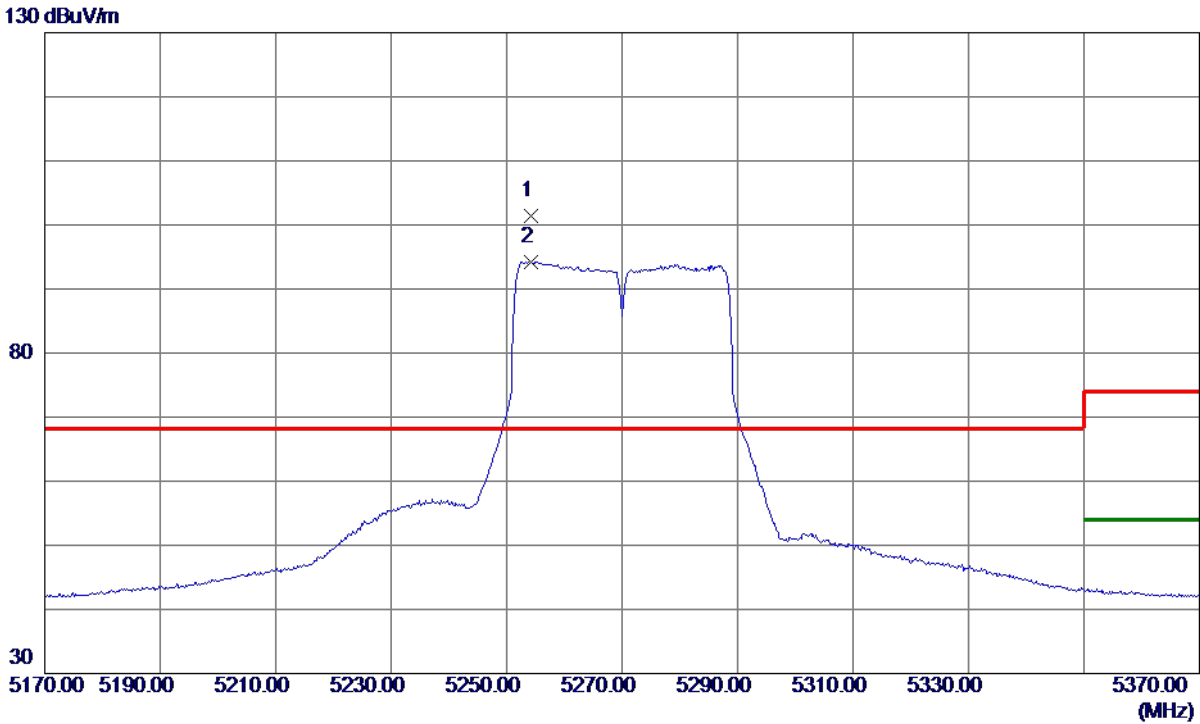


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5254.2000	86.36	15.13	101.49	68.30	33.19	Peak	No Limit
2	5254.2000	79.06	15.13	94.19	999.00	-904.81	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5270 MHz

Horizontal

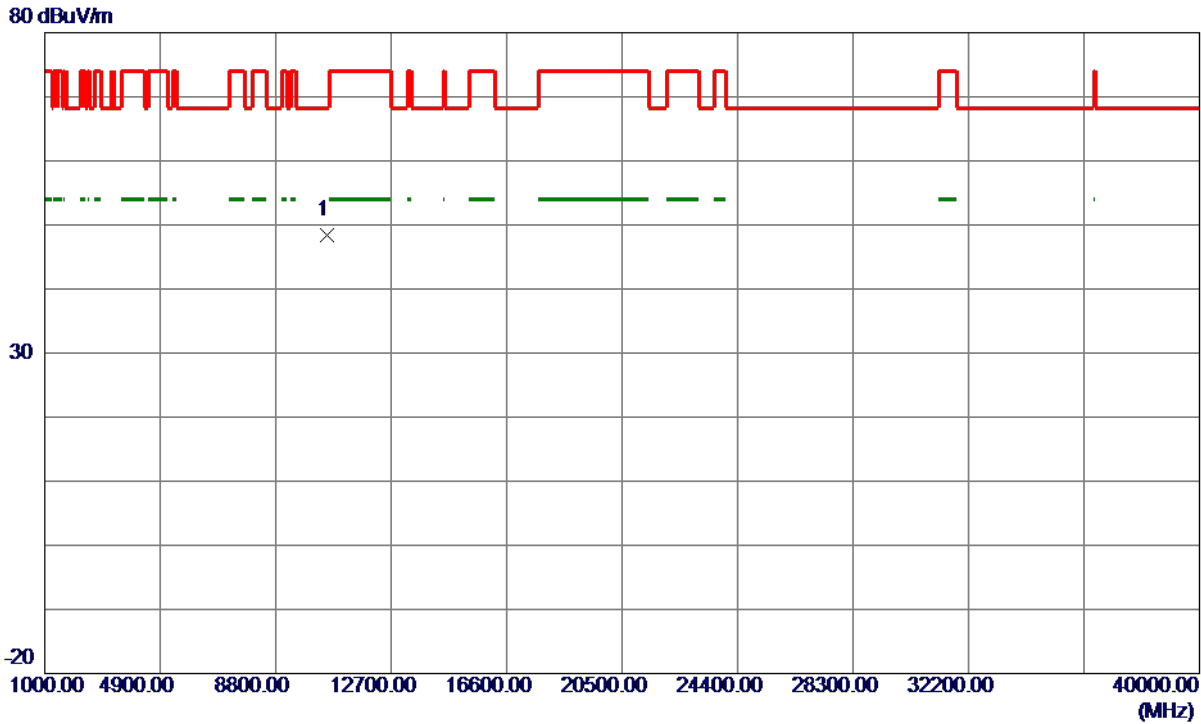


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10516.1000	35.14	13.19	48.33	68.30	-19.97	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5310 MHz

Vertical

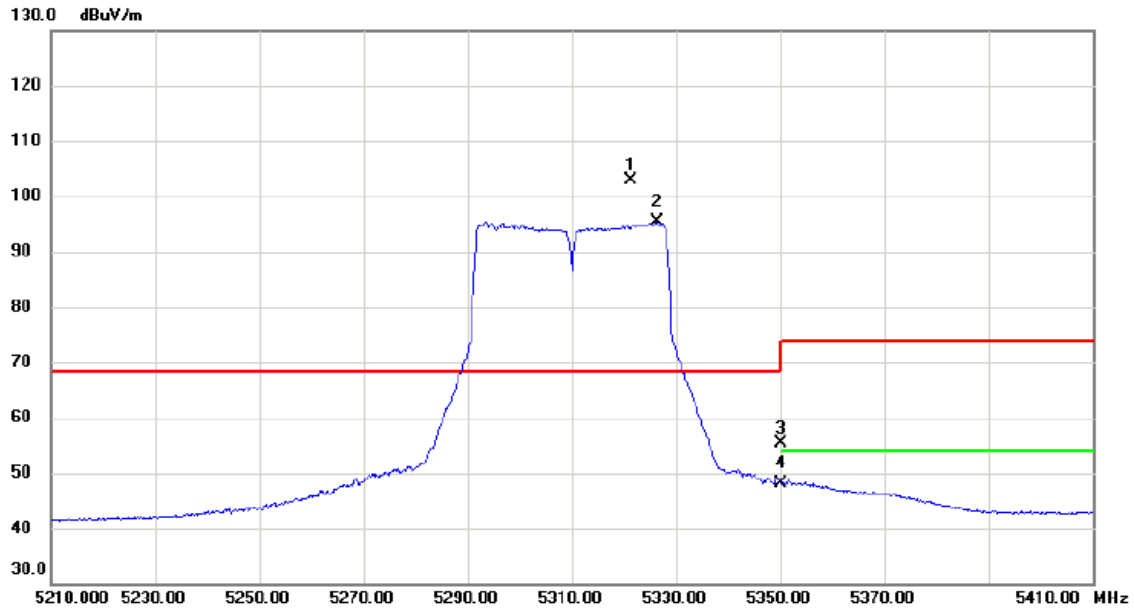

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5321.400	87.69	15.26	102.95	68.30	34.65	peak	No Limit
2	X	5326.400	80.07	15.27	95.34	68.30	27.04	AVG	No Limit
3		5350.000	40.17	15.32	55.49	74.00	-18.51	peak	
4		5350.000	32.90	15.32	48.22	54.00	-5.78	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5310 MHz

Vertical

80 dBuV/m

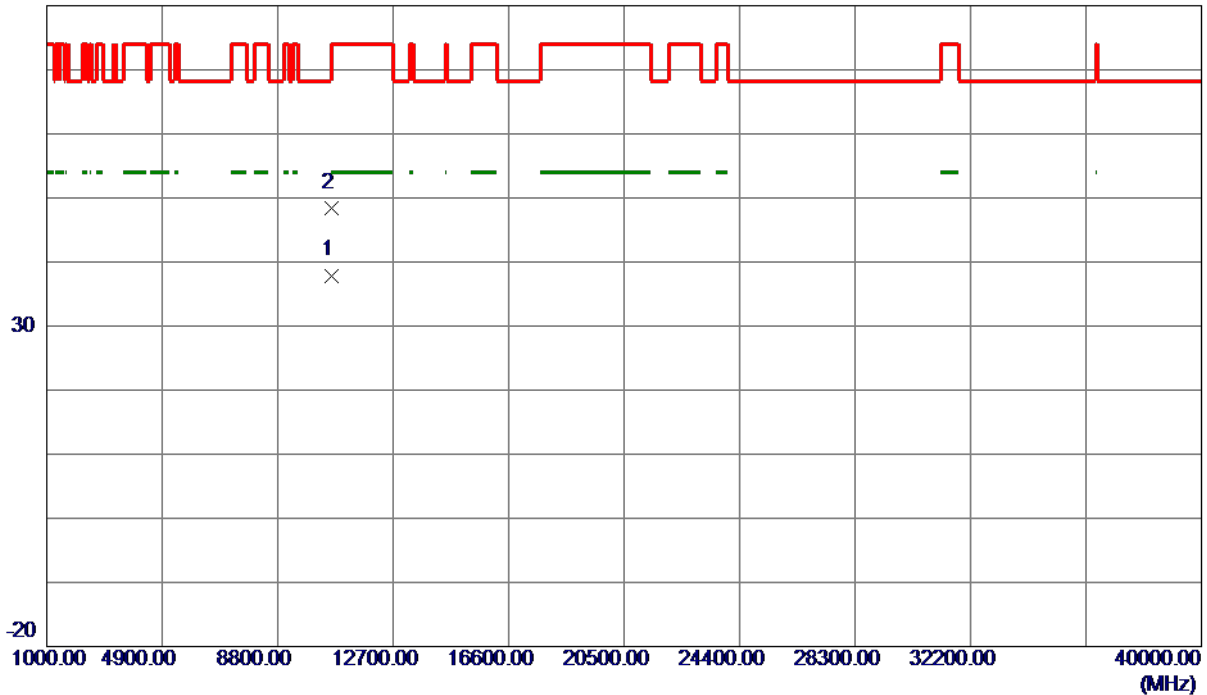


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10624.7000	24.65	13.25	37.90	54.00	-16.10	AVG	
2	10626.1000	35.13	13.25	48.38	74.00	-25.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5310 MHz

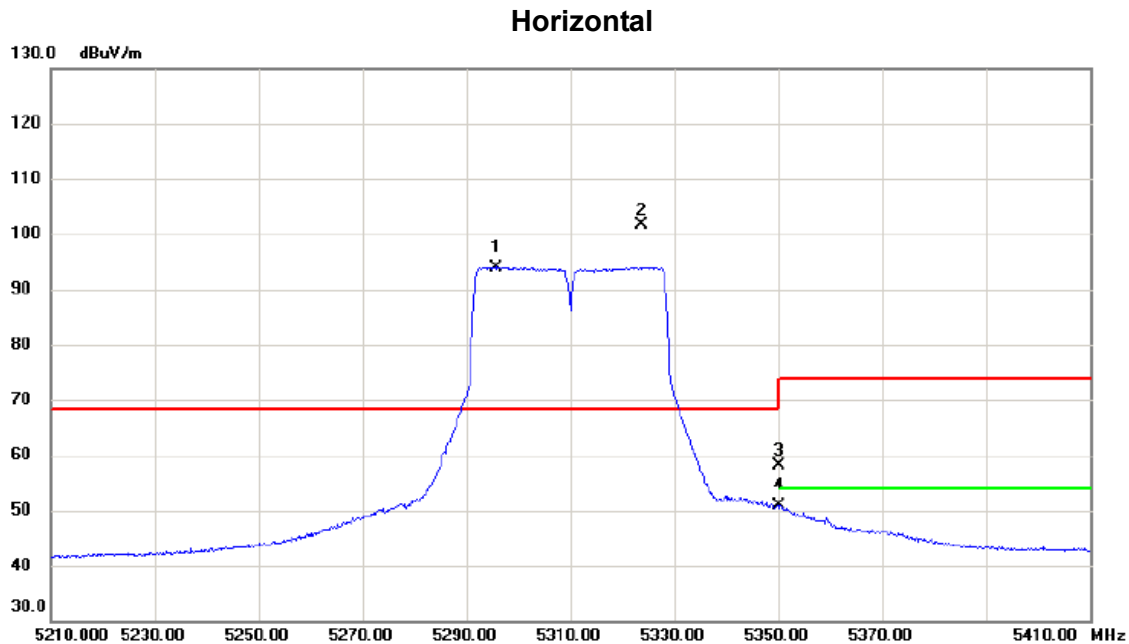

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5295.600	78.78	15.22	94.00	68.30	25.70	AVG	No Limit
2	*	5323.800	86.36	15.27	101.63	68.30	33.33	peak	No Limit
3		5350.000	42.82	15.32	58.14	74.00	-15.86	peak	
4		5350.000	35.44	15.32	50.76	54.00	-3.24	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5310 MHz

Horizontal

80 dBuV/m

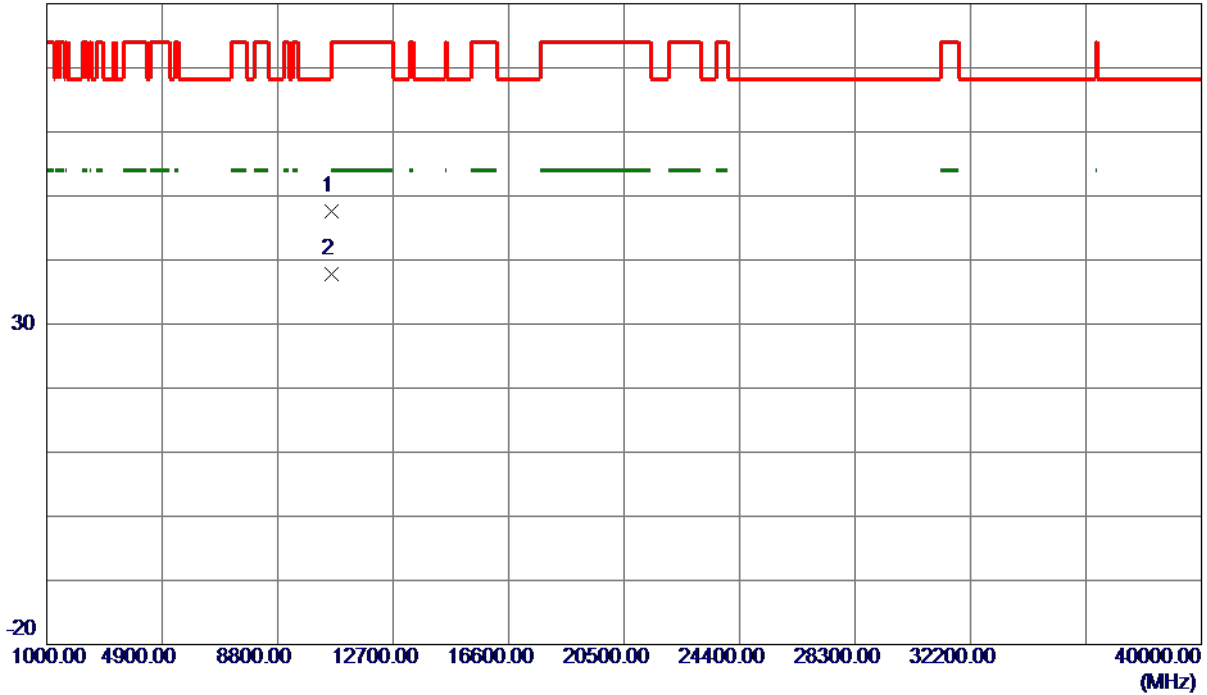

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10626.8000	34.30	13.25	47.55	74.00	-26.45	Peak	
2 *	10635.9000	24.49	13.26	37.75	54.00	-16.25	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5500 MHz

Vertical

130 dBuV/m

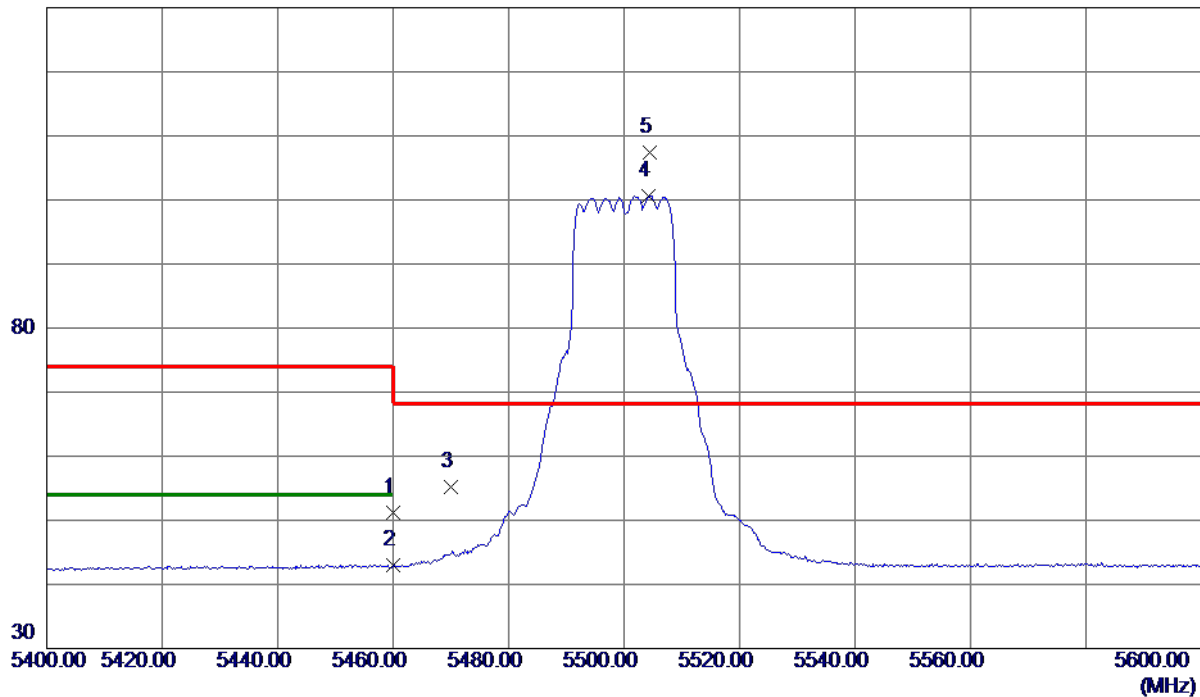

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	35.65	15.55	51.20	74.00	-22.80	Peak	
2	5460.0000	27.37	15.55	42.92	54.00	-11.08	AVG	
3	5470.0000	39.69	15.57	55.26	68.30	-13.04	Peak	
4	5504.2000	84.97	15.65	100.62	999.00	-898.38	AVG	No Limit
5 *	5504.4000	91.79	15.65	107.44	68.30	39.14	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5500 MHz

Vertical

80 dBuV/m

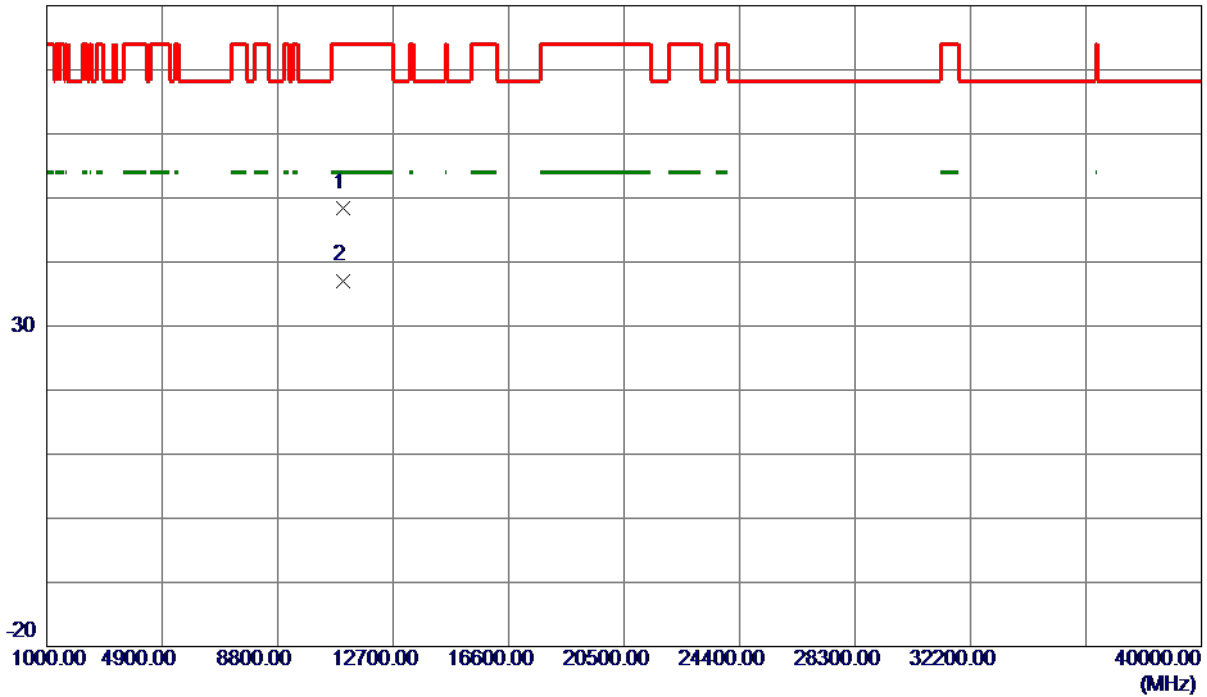

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	34.98	13.49	48.47	74.00	-25.53	Peak	
2 *	11000.0000	23.61	13.49	37.10	54.00	-16.90	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5500 MHz

Horizontal

130 dBuV/m

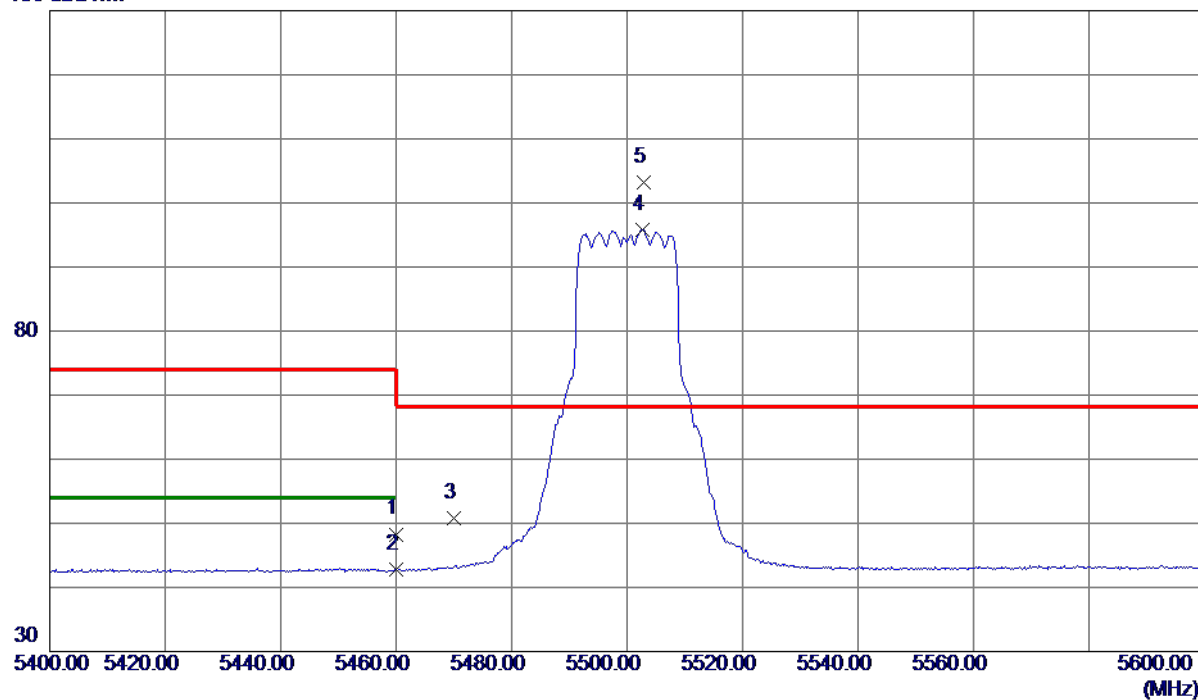

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	32.75	15.55	48.30	74.00	-25.70	Peak	
2	5460.0000	27.24	15.55	42.79	54.00	-11.21	AVG	
3	5470.0000	35.27	15.57	50.84	68.30	-17.46	Peak	
4	5502.6000	80.17	15.65	95.82	999.00	-903.18	AVG	No Limit
5 *	5502.8000	87.49	15.65	103.14	68.30	34.84	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5500 MHz

Horizontal

80 dBuV/m

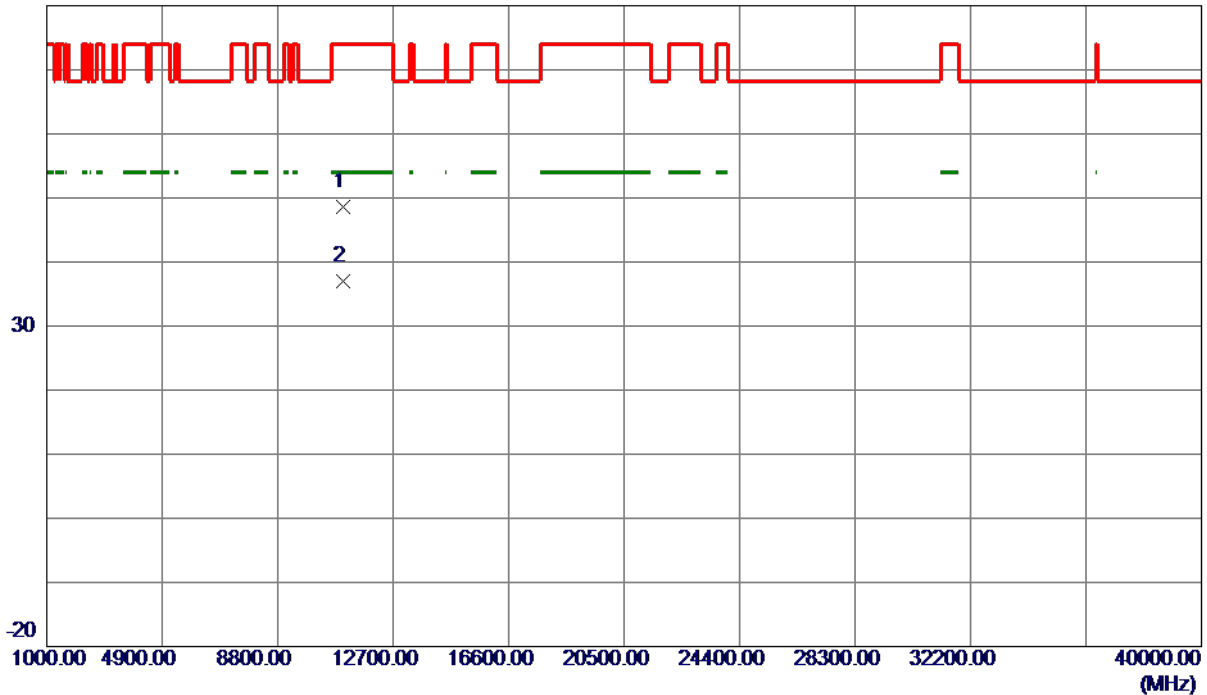

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	35.07	13.49	48.56	74.00	-25.44	Peak	
2 *	11000.0000	23.55	13.49	37.04	54.00	-16.96	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5580 MHz

Vertical

130 dBuV/m

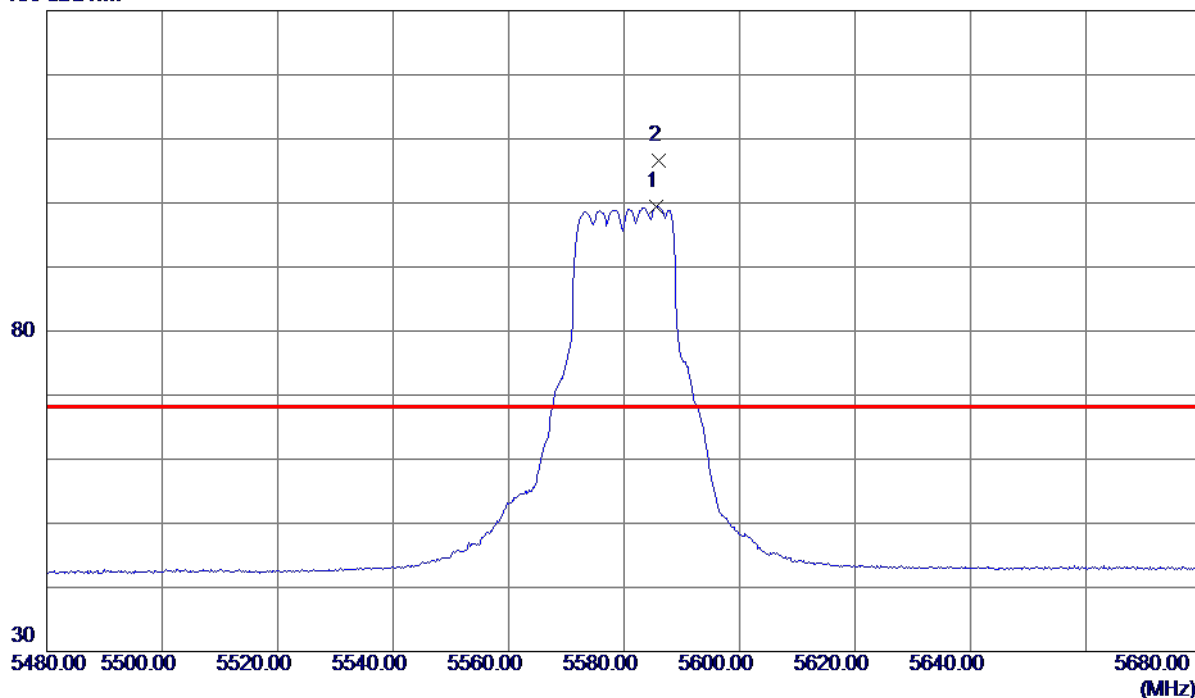


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5585.6000	83.50	15.97	99.47	999.00	-899.53	AVG	No Limit
2 *	5586.0000	90.72	15.97	106.69	68.30	38.39	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5580 MHz

Vertical

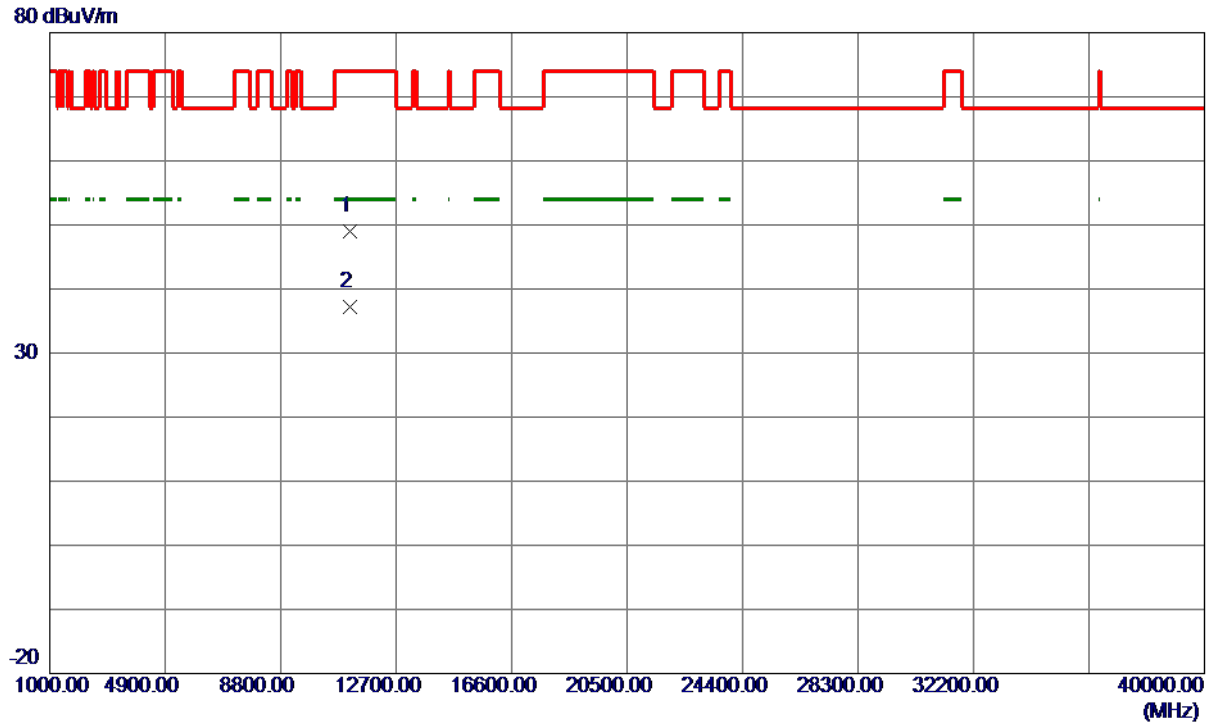

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	35.41	13.68	49.09	74.00	-24.91	Peak	
2 *	11160.0000	23.46	13.68	37.14	54.00	-16.86	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5580 MHz

Horizontal

130 dBuV/m

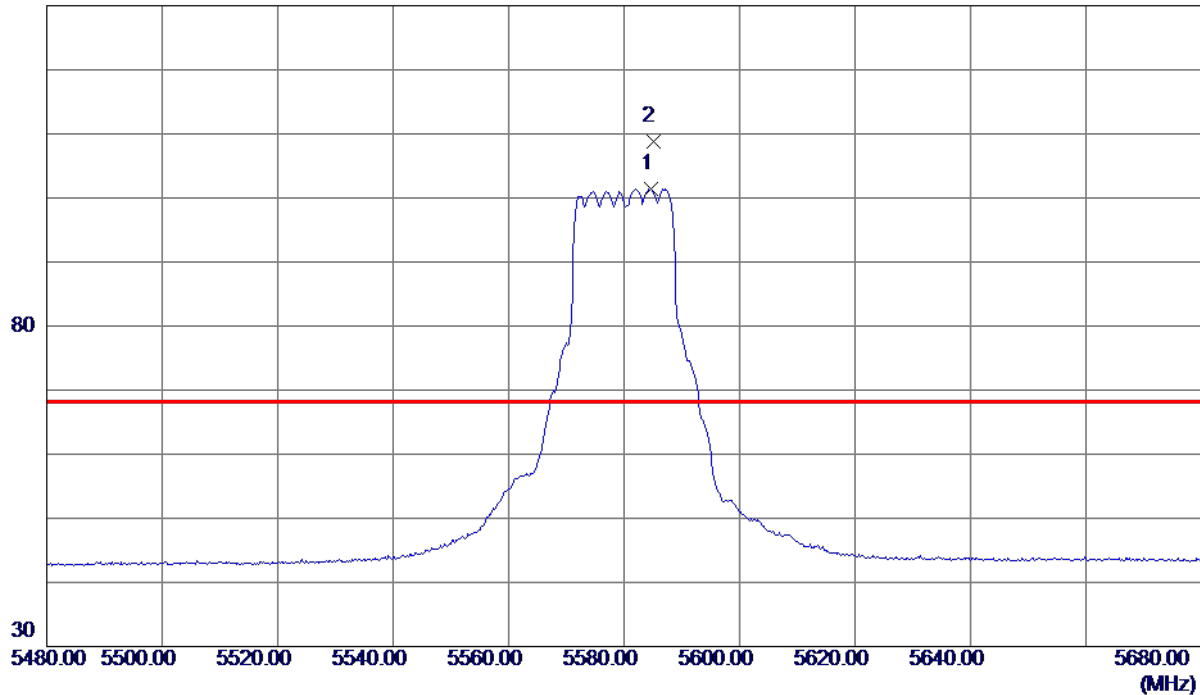

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5584.6000	85.41	15.97	101.38	999.00	-897.62	AVG	No Limit
2 *	5585.0000	92.90	15.97	108.87	68.30	40.57	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5580 MHz

Horizontal

80 dBuV/m

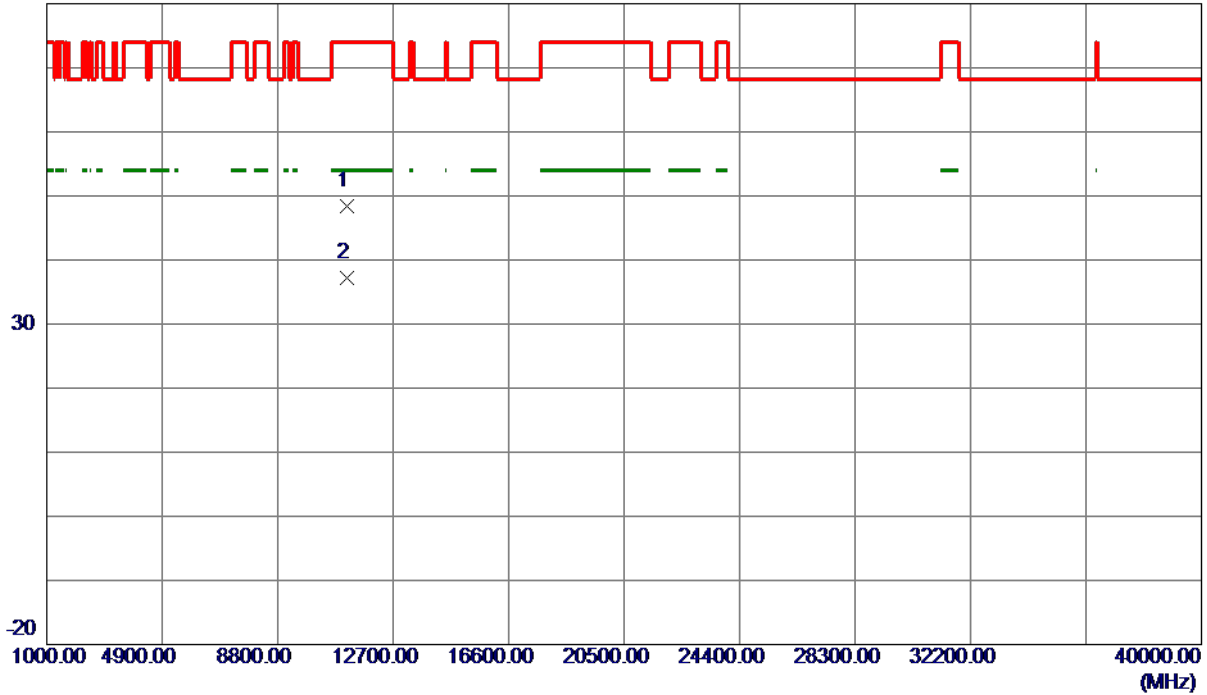

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	34.66	13.68	48.34	74.00	-25.66	Peak	
2 *	11160.0000	23.47	13.68	37.15	54.00	-16.85	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5700 MHz

Vertical

130 dBuV/m

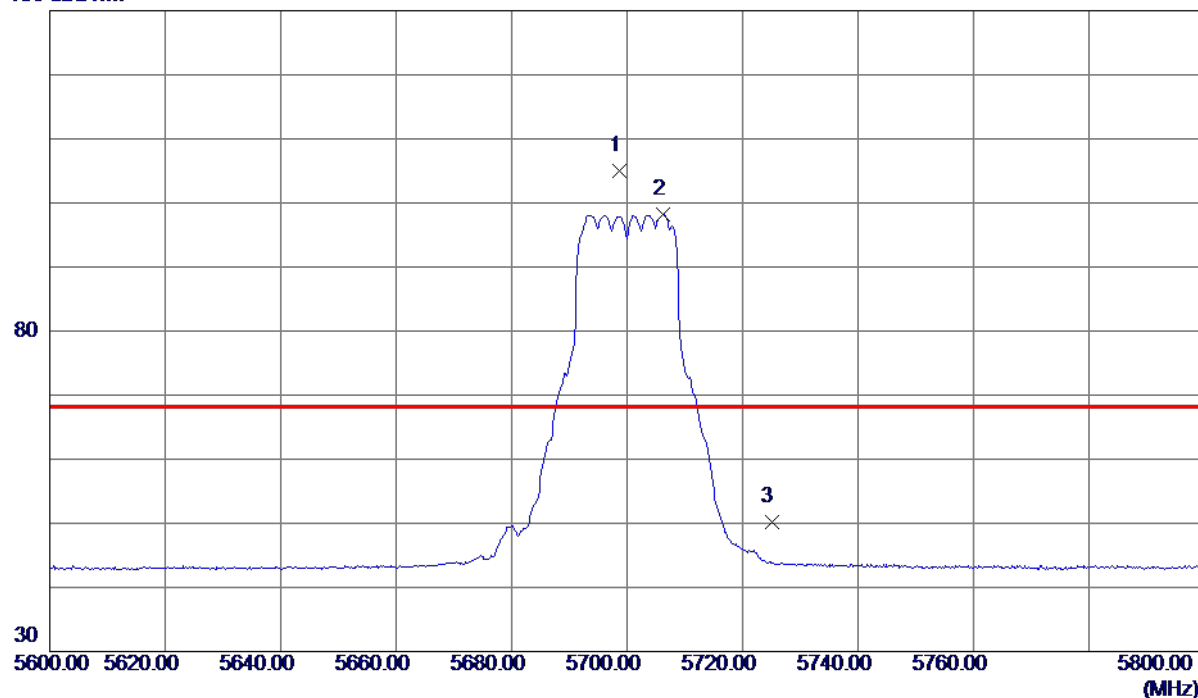

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5698.6000	88.64	16.42	105.06	68.30	36.76	Peak	No Limit
2	5706.2000	81.66	16.45	98.11	999.00	-900.89	AVG	No Limit
3	5725.0000	33.63	16.52	50.15	68.30	-18.15	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5700 MHz

Vertical

80 dBuV/m

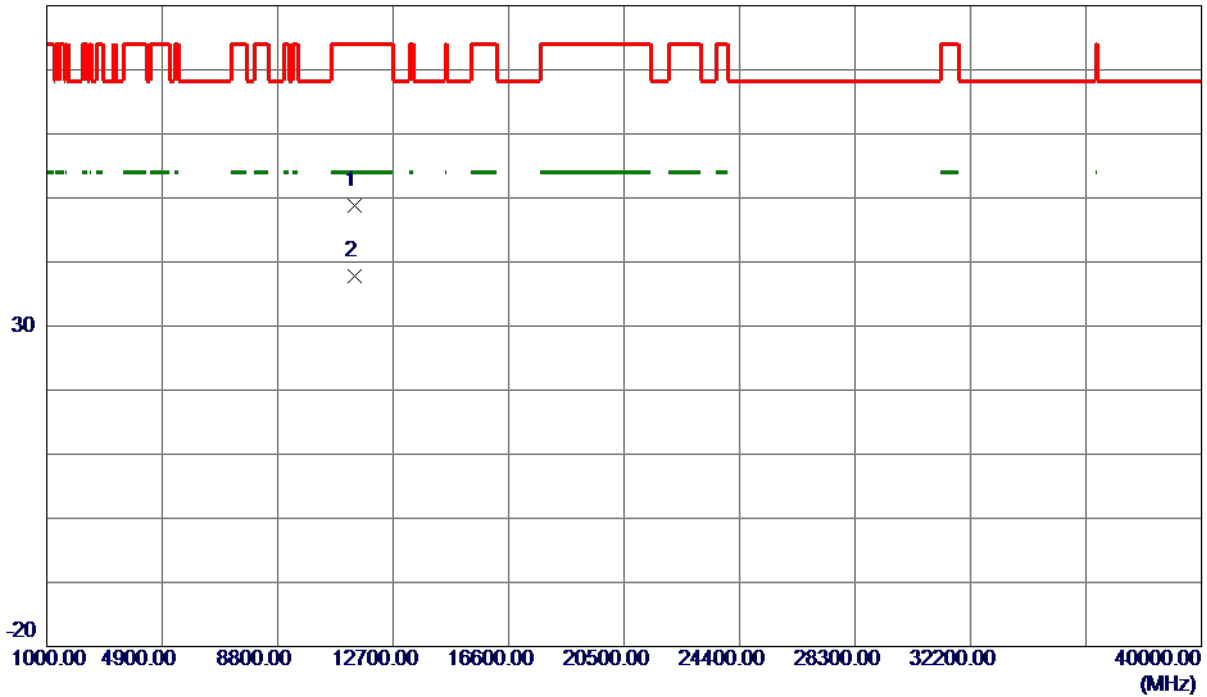

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	34.88	13.97	48.85	74.00	-25.15	Peak	
2 *	11400.0000	23.78	13.97	37.75	54.00	-16.25	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5700 MHz

Horizontal

130 dBuV/m

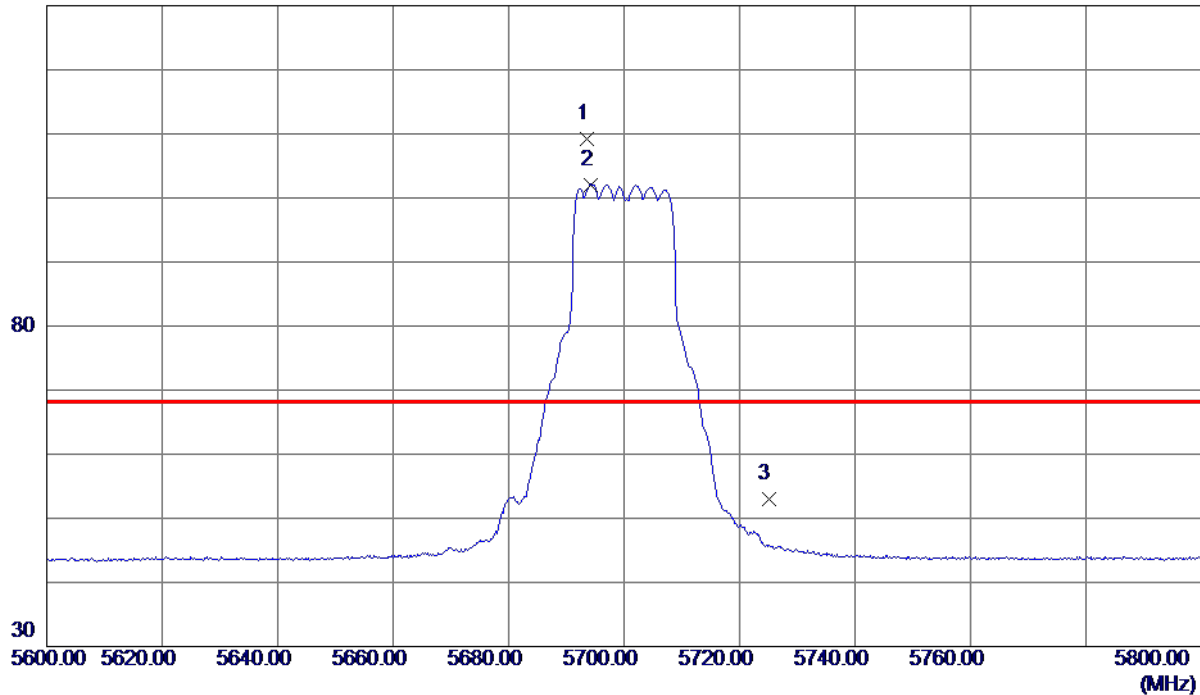

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5693.6000	92.85	16.40	109.25	68.30	40.95	Peak	No Limit
2	5694.2000	85.70	16.40	102.10	999.00	-896.90	AVG	No Limit
3	5725.0000	36.48	16.52	53.00	68.30	-15.30	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5700 MHz

Horizontal

80 dBuV/m

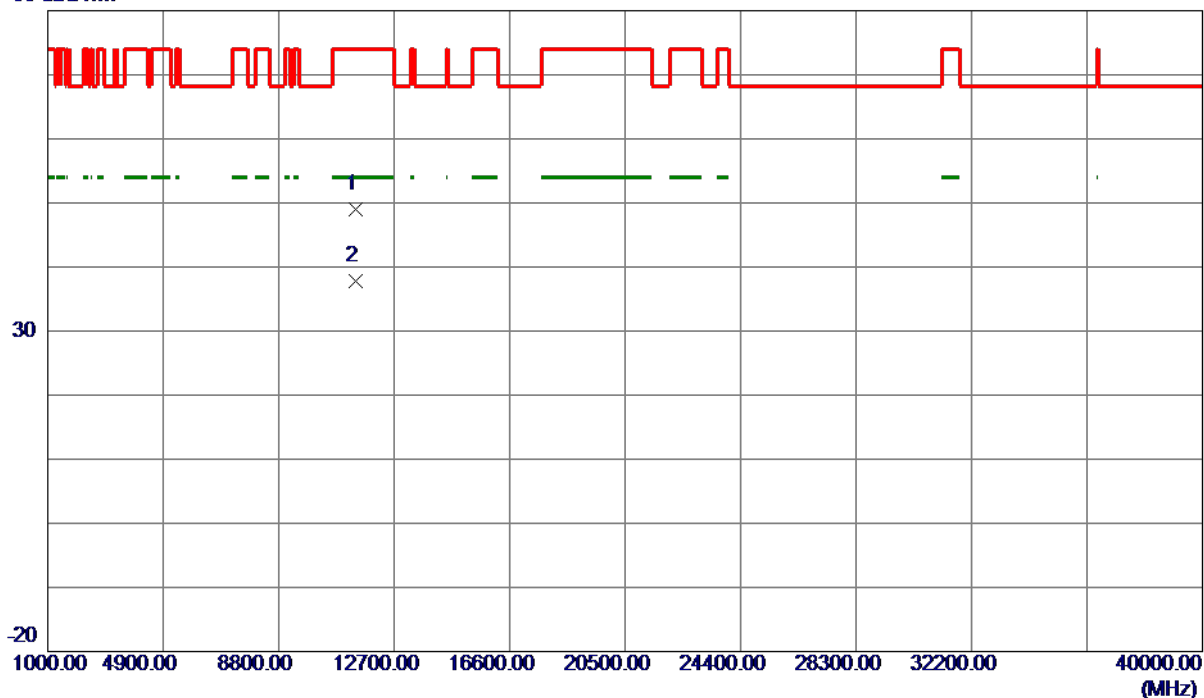

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	34.95	13.97	48.92	74.00	-25.08	Peak	
2 *	11400.0000	23.82	13.97	37.79	54.00	-16.21	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5500 MHz

Vertical

130 dBuV/m

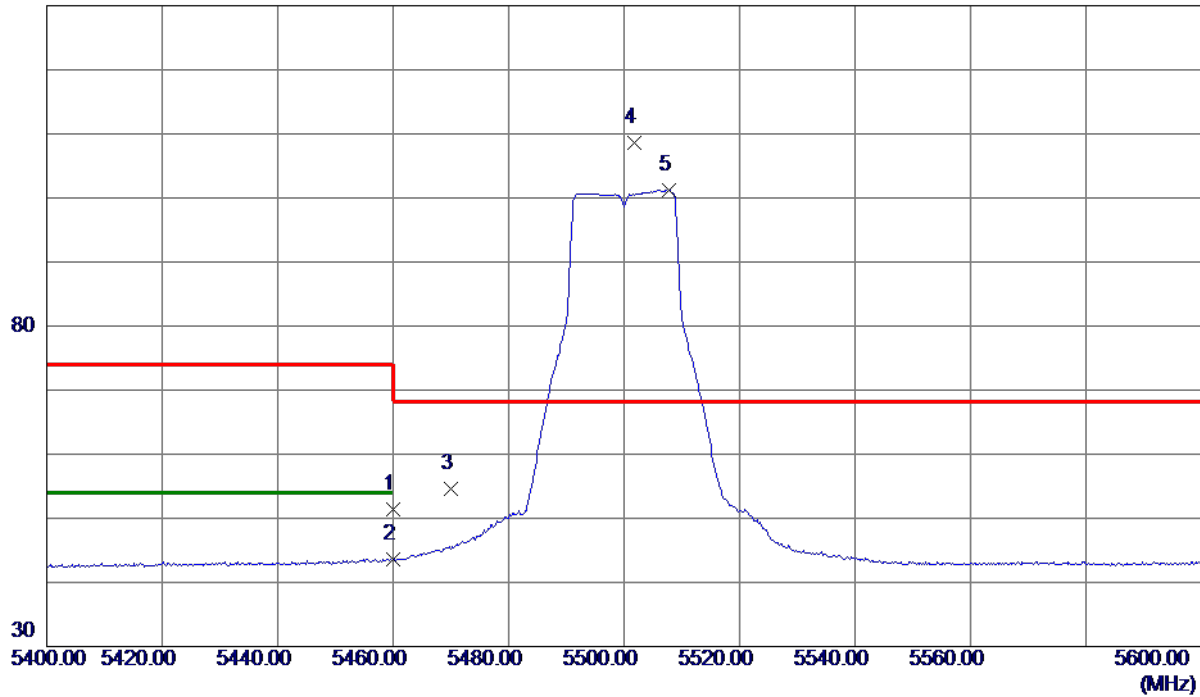

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	35.82	15.55	51.37	74.00	-22.63	Peak	
2	5460.0000	28.12	15.55	43.67	54.00	-10.33	AVG	
3	5470.0000	38.97	15.57	54.54	68.30	-13.76	Peak	
4 *	5501.8000	92.87	15.64	108.51	68.30	40.21	Peak	No Limit
5	5507.8000	85.55	15.67	101.22	999.00	-897.78	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5500 MHz

Vertical

80 dBuV/m

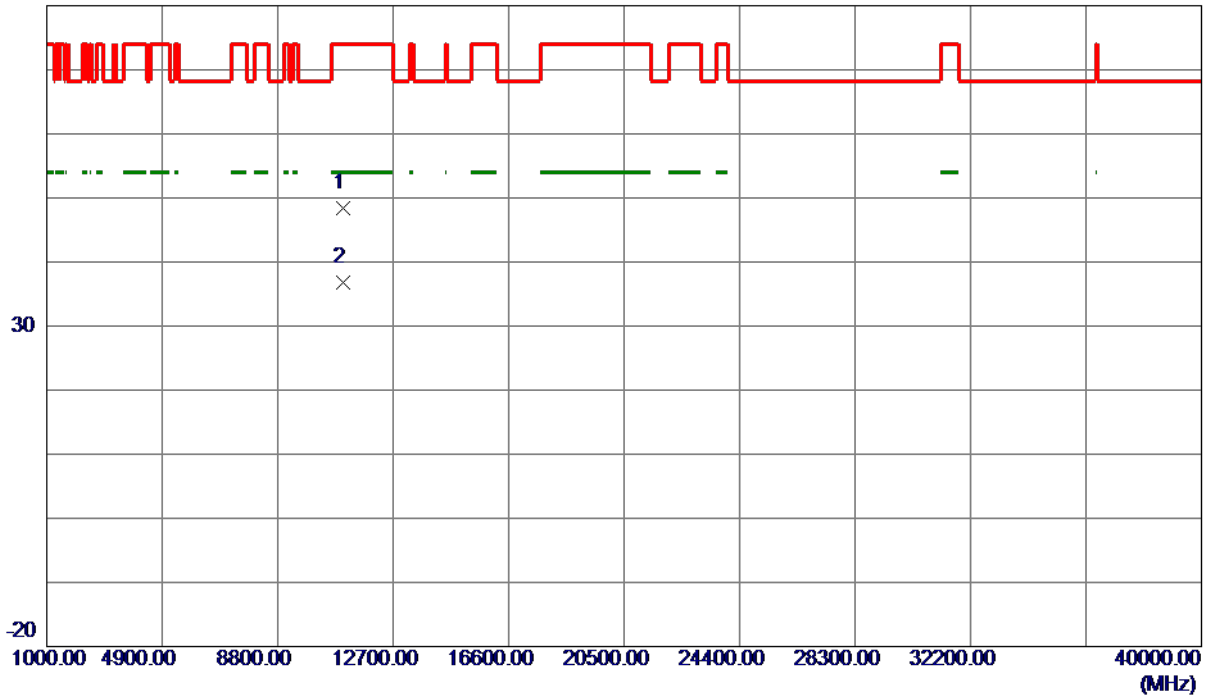

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	34.87	13.49	48.36	74.00	-25.64	Peak	
2 *	11000.0000	23.27	13.49	36.76	54.00	-17.24	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5500 MHz

Horizontal

130 dBuV/m

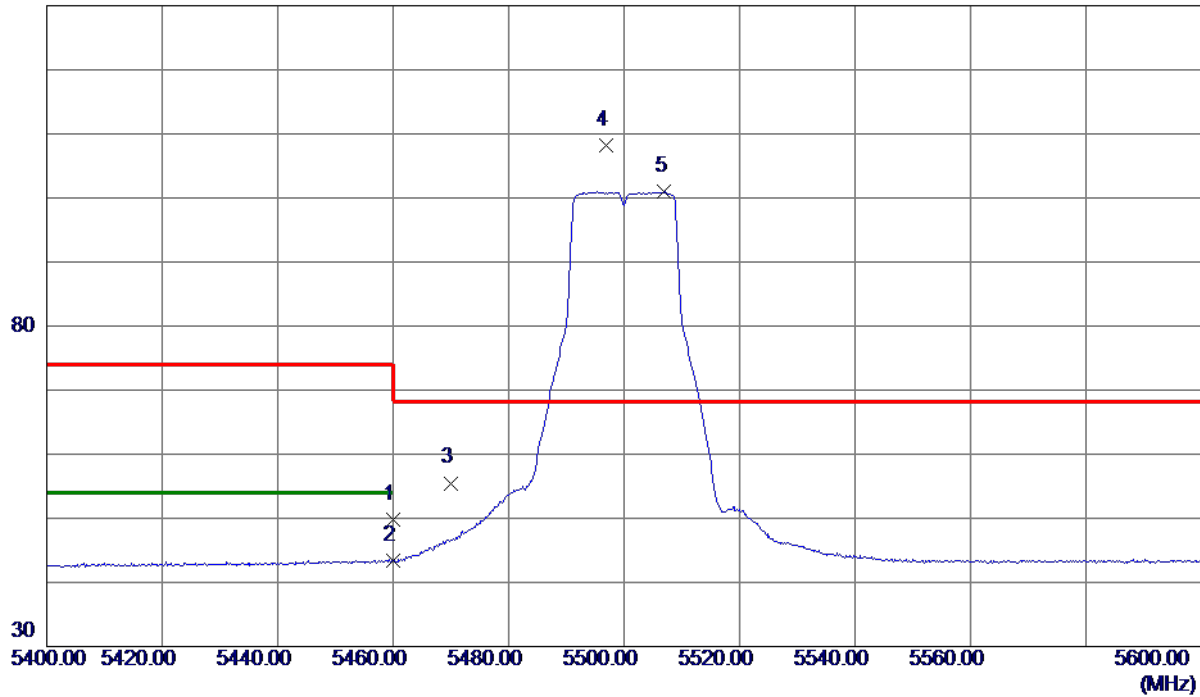

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	34.26	15.55	49.81	74.00	-24.19	Peak	
2	5460.0000	27.88	15.55	43.43	54.00	-10.57	AVG	
3	5470.0000	39.93	15.57	55.50	68.30	-12.80	Peak	
4 *	5496.8000	92.51	15.63	108.14	68.30	39.84	Peak	No Limit
5	5507.0000	85.26	15.66	100.92	999.00	-898.08	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5500 MHz

Horizontal

80 dBuV/m

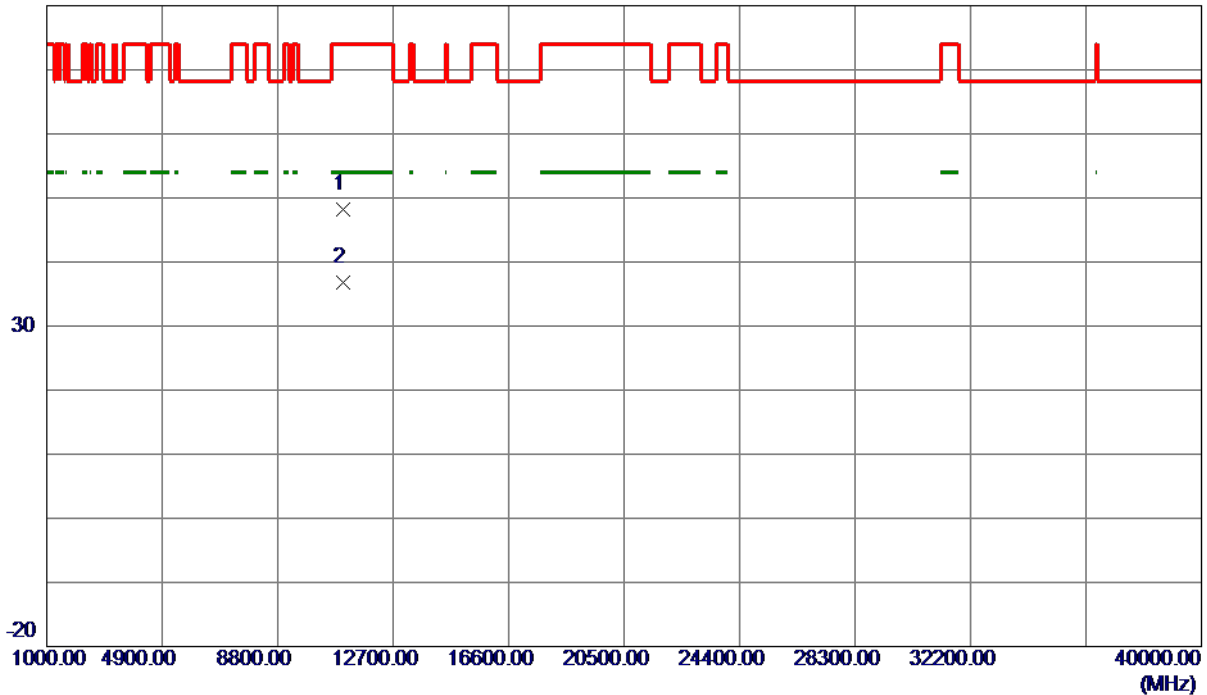

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	34.80	13.49	48.29	74.00	-25.71	Peak	
2 *	11000.0000	23.30	13.49	36.79	54.00	-17.21	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5580 MHz

Vertical

130 dBuV/m

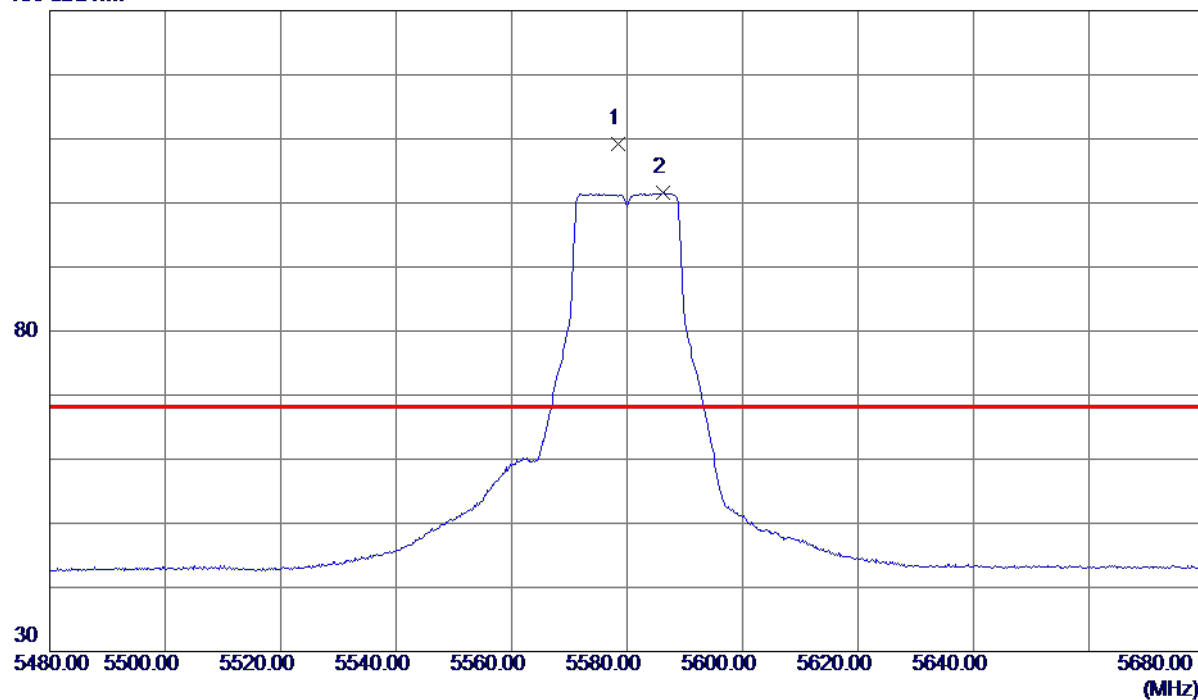

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5578.4000	93.18	15.94	109.12	68.30	40.82	Peak	No Limit
2	5586.2000	85.56	15.98	101.54	999.00	-897.46	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5580 MHz

Vertical

80 dBuV/m

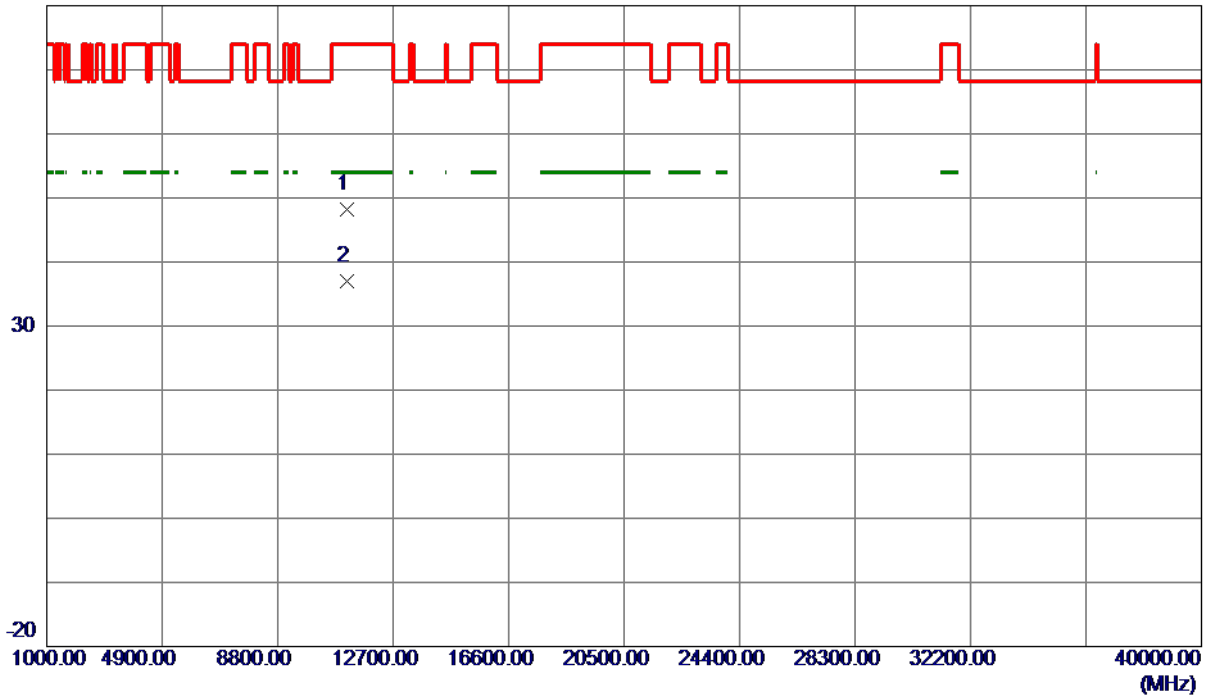

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	34.57	13.68	48.25	74.00	-25.75	Peak	
2 *	11160.0000	23.35	13.68	37.03	54.00	-16.97	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5580 MHz

Horizontal

130 dBuV/m

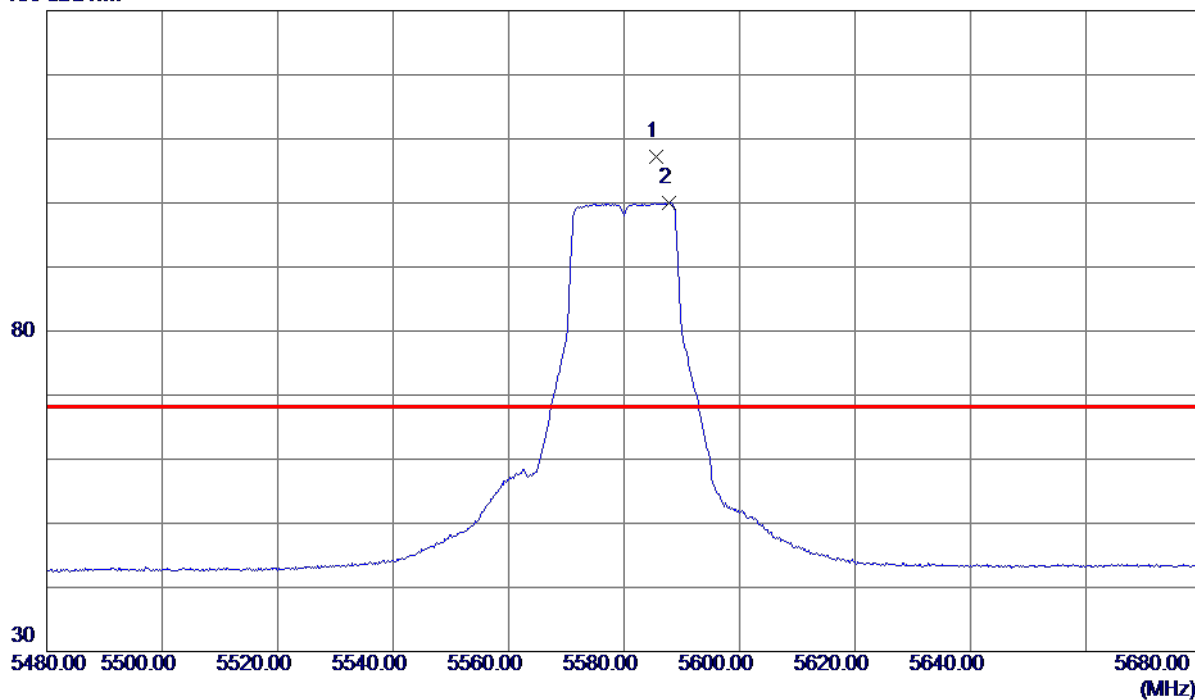

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5585.6000	91.29	15.97	107.26	68.30	38.96	Peak	No Limit
2	5587.8000	84.03	15.98	100.01	999.00	-898.99	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5580 MHz

Horizontal

80 dBuV/m

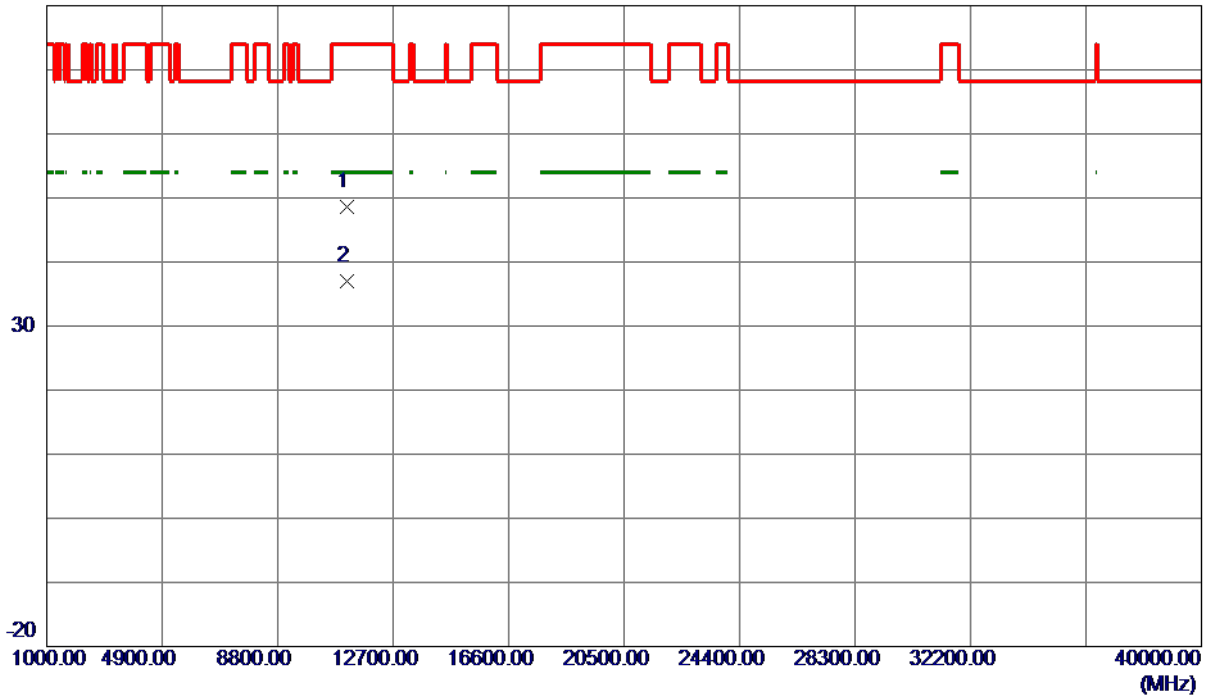

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	34.86	13.68	48.54	74.00	-25.46	Peak	
2 *	11160.0000	23.37	13.68	37.05	54.00	-16.95	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5700 MHz

Vertical

130 dBuV/m

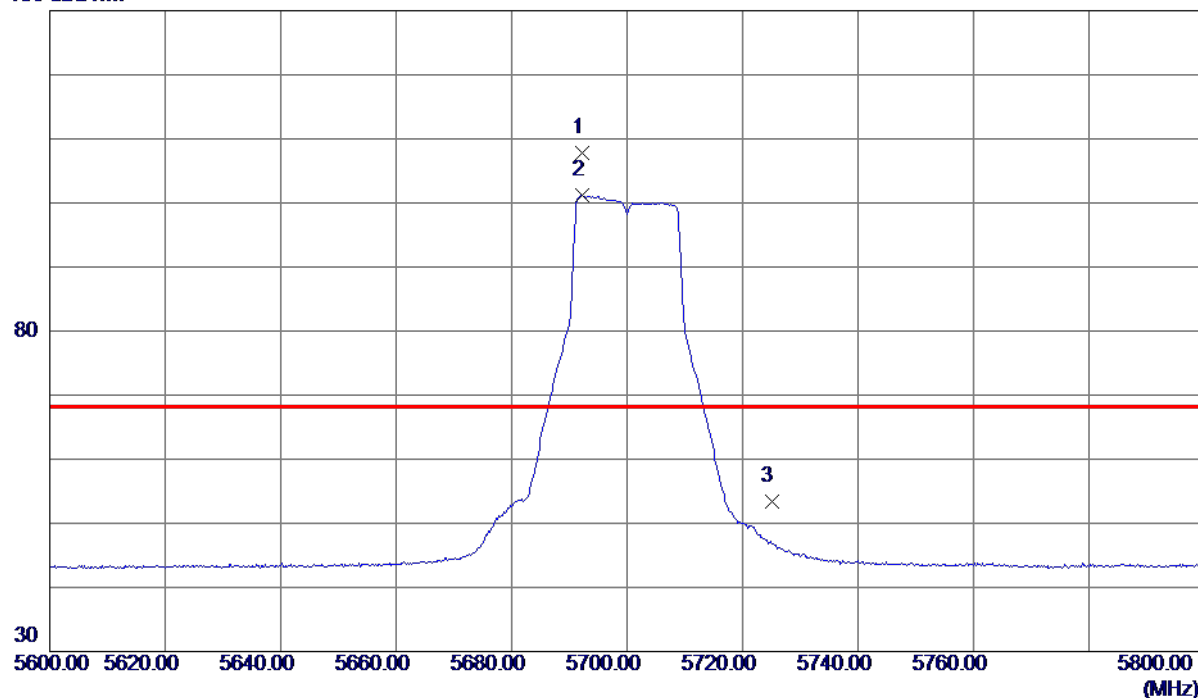


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5692.2000	91.40	16.39	107.79	68.30	39.49	Peak	No Limit
2	5692.2000	84.74	16.39	101.13	999.00	-897.87	AVG	No Limit
3	5725.0000	36.91	16.52	53.43	68.30	-14.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5700 MHz

Vertical

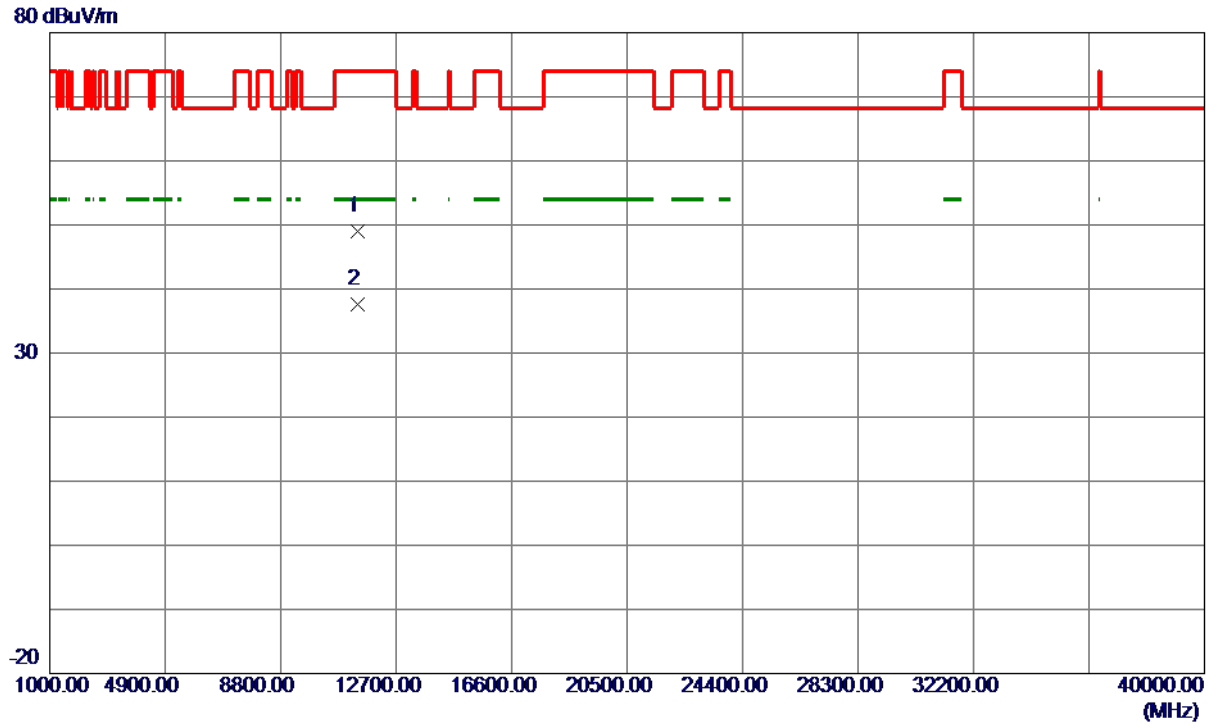


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	35.12	13.97	49.09	74.00	-24.91	Peak	
2 *	11400.0000	23.59	13.97	37.56	54.00	-16.44	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5700 MHz

Horizontal

130 dBuV/m

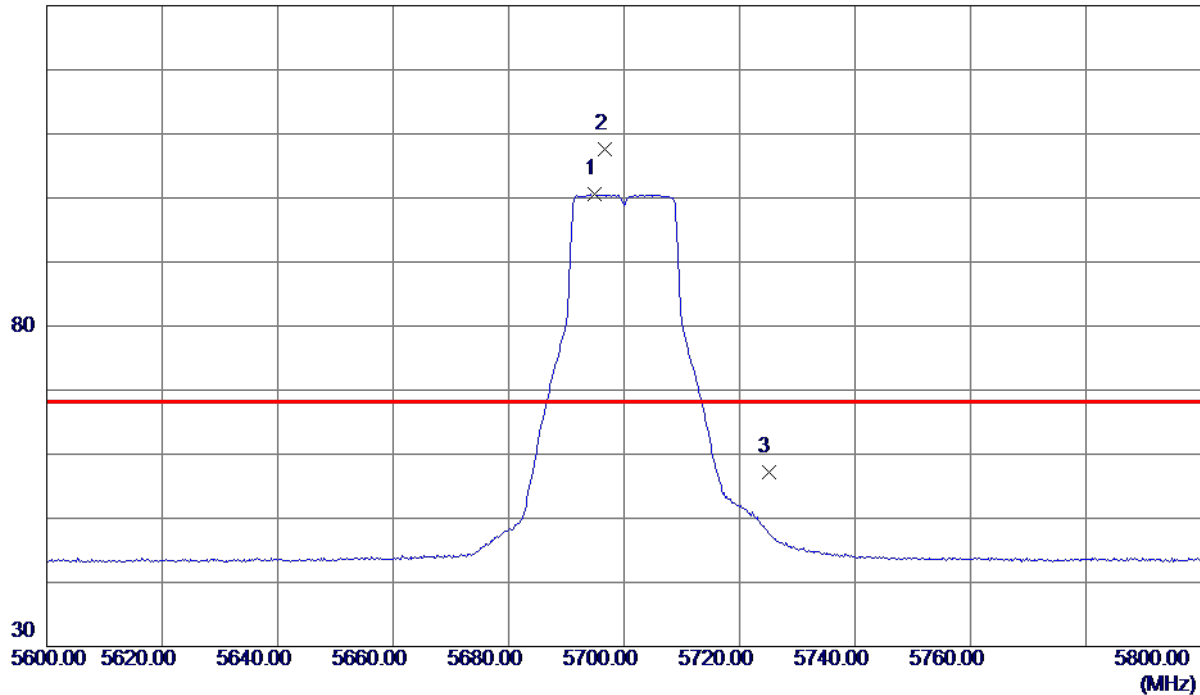

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5694.8000	84.15	16.40	100.55	999.00	-898.45	AVG	No Limit
2 *	5696.6000	91.10	16.41	107.51	68.30	39.21	Peak	No Limit
3	5725.0000	40.69	16.52	57.21	68.30	-11.09	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5700 MHz

Horizontal

80 dBuV/m

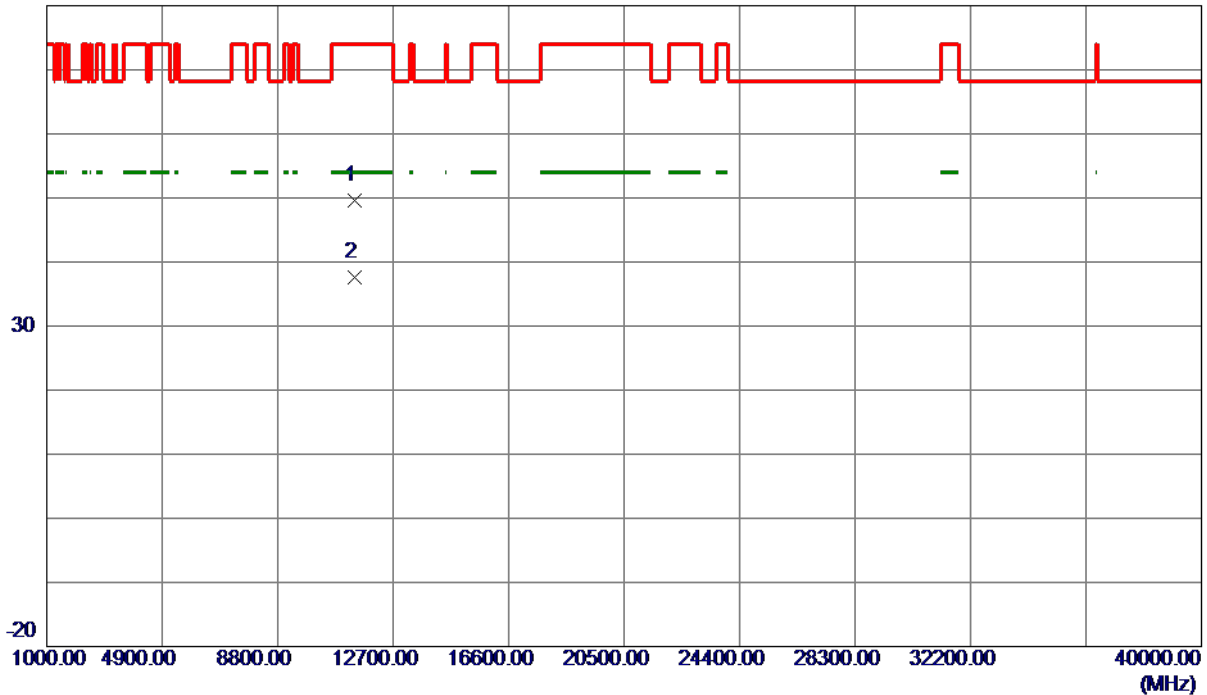

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	35.54	13.97	49.51	74.00	-24.49	Peak	
2 *	11400.0000	23.58	13.97	37.55	54.00	-16.45	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5510 MHz

Vertical

130 dBuV/m

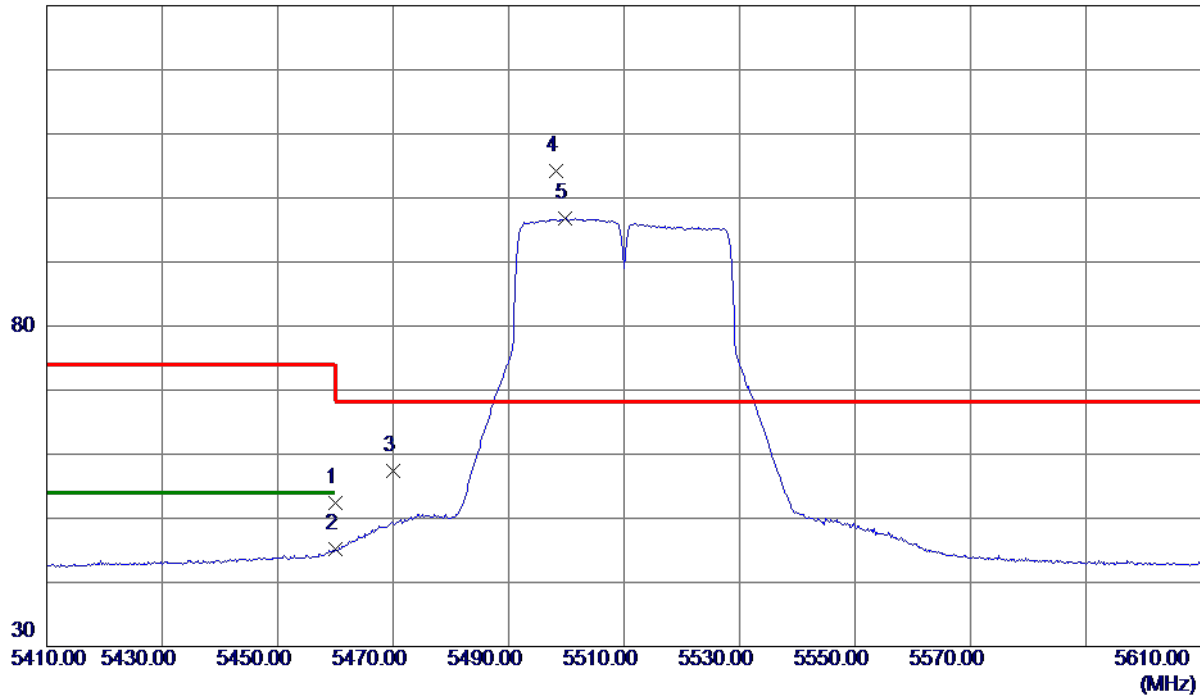


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	36.87	15.55	52.42	74.00	-21.58	Peak	
2	5460.0000	29.70	15.55	45.25	54.00	-8.75	AVG	
3	5470.0000	41.77	15.57	57.34	68.30	-10.96	Peak	
4 *	5498.2000	88.63	15.63	104.26	68.30	35.96	Peak	No Limit
5	5499.8000	81.26	15.63	96.89	999.00	-902.11	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5510 MHz

Vertical

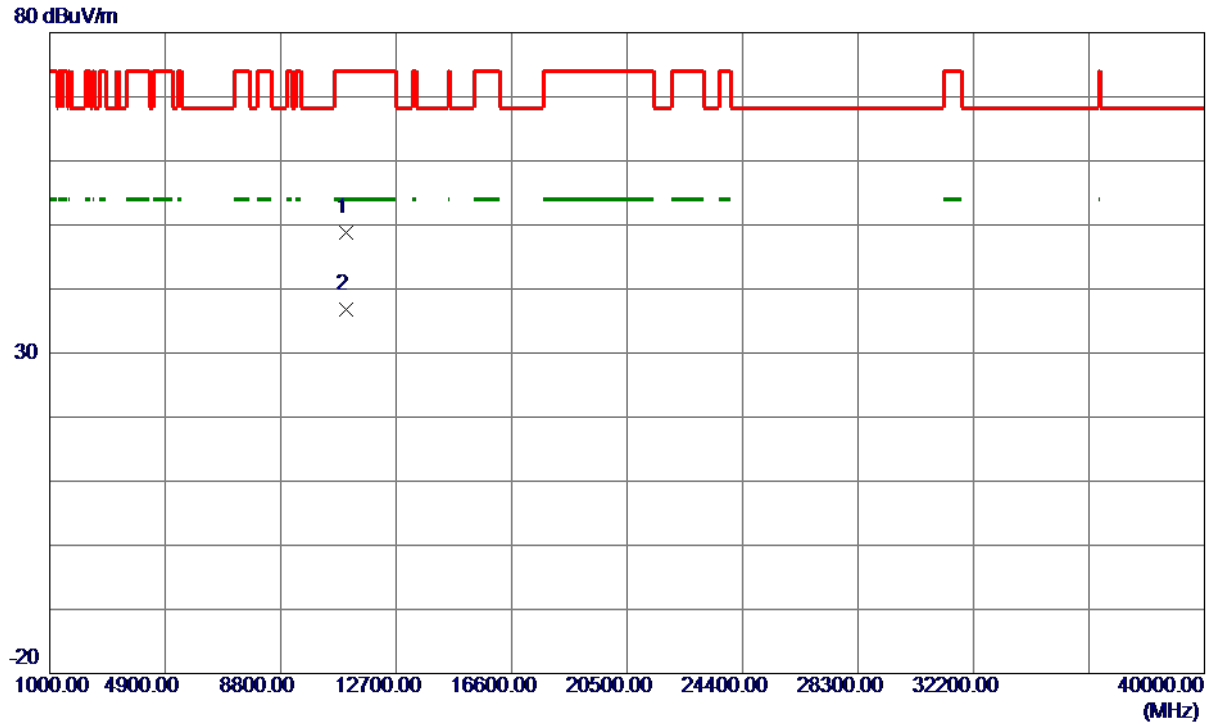


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	35.37	13.51	48.88	74.00	-25.12	Peak	
2 *	11020.0000	23.23	13.51	36.74	54.00	-17.26	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5510 MHz

Horizontal

130 dBuV/m

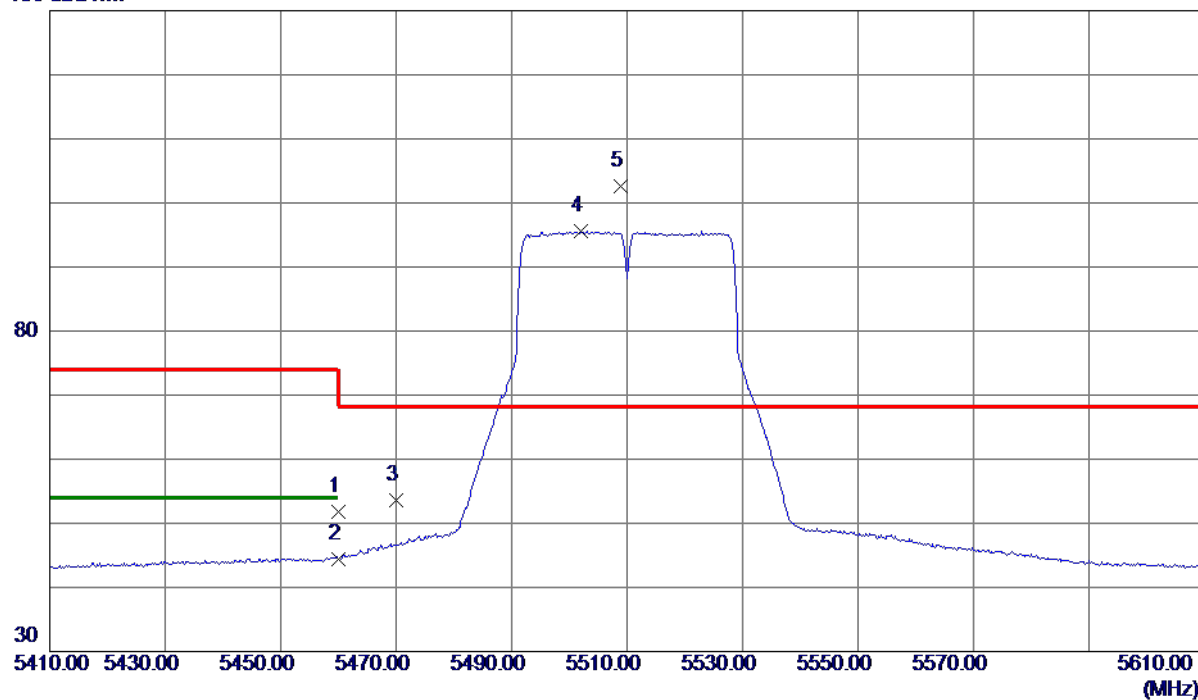

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	36.32	15.55	51.87	74.00	-22.13	Peak	
2	5460.0000	28.86	15.55	44.41	54.00	-9.59	AVG	
3	5470.0000	37.96	15.57	53.53	68.30	-14.77	Peak	
4	5502.0000	79.99	15.64	95.63	999.00	-903.37	AVG	No Limit
5 *	5508.8000	86.89	15.67	102.56	68.30	34.26	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5510 MHz

Horizontal

80 dBuV/m

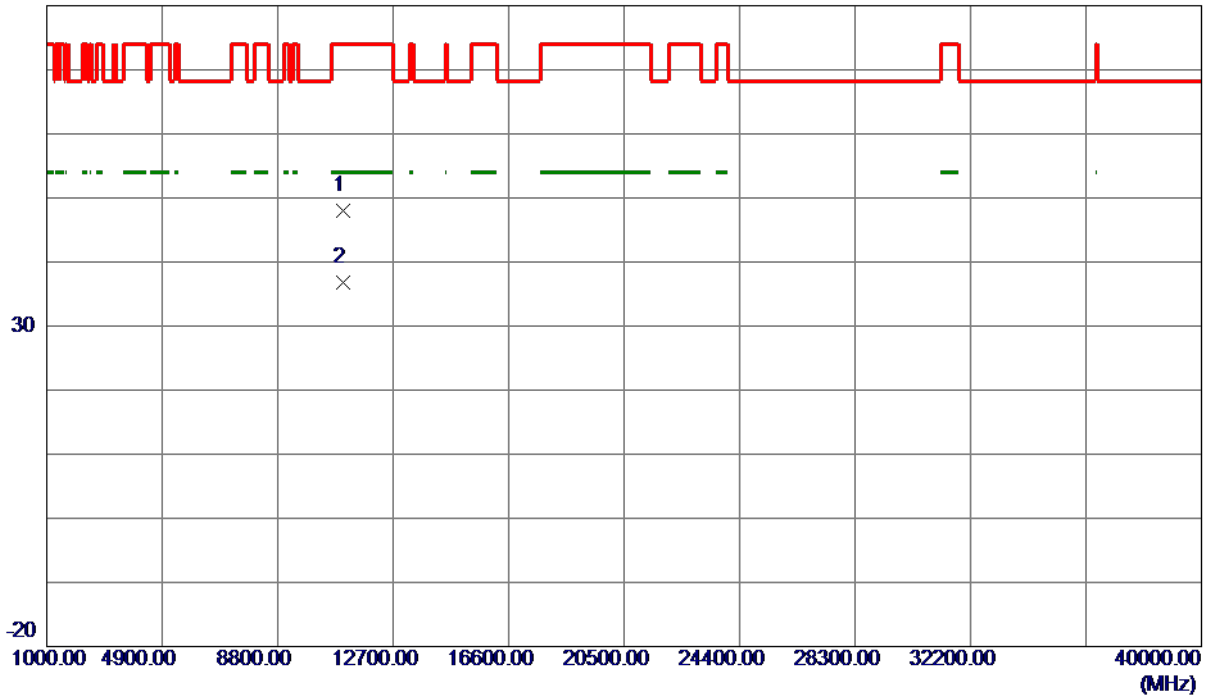


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	34.57	13.51	48.08	74.00	-25.92	Peak	
2 *	11020.0000	23.35	13.51	36.86	54.00	-17.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5550 MHz

Vertical

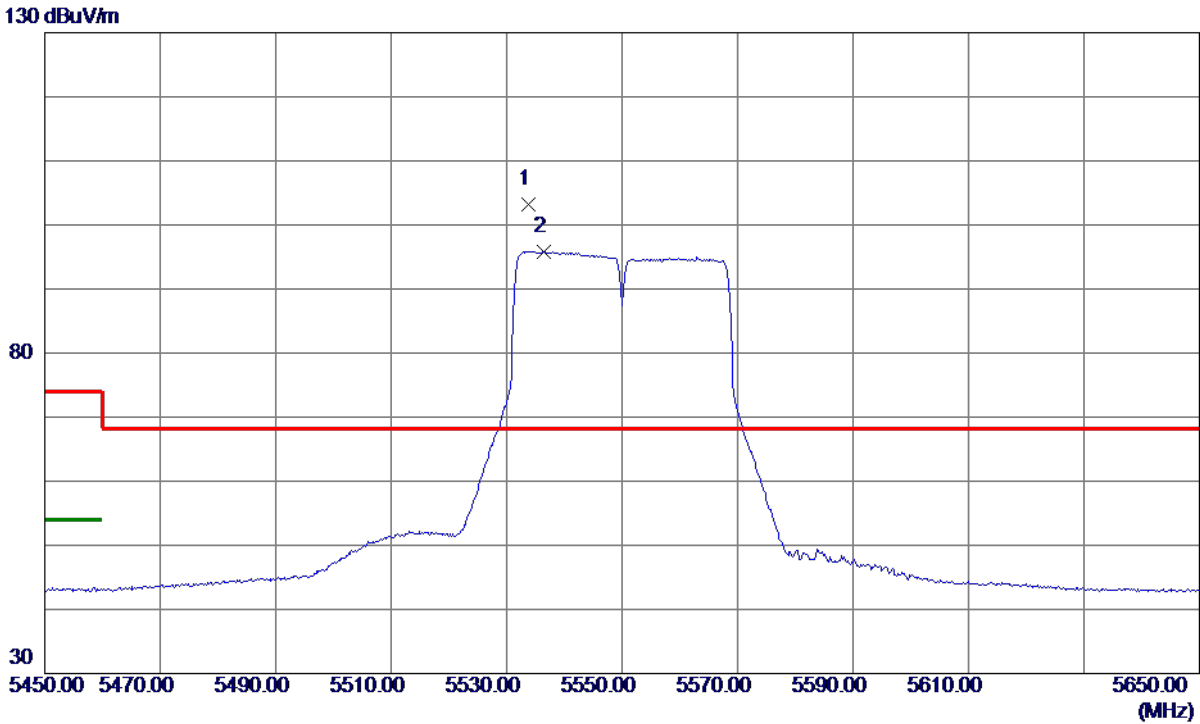

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5533.8000	87.39	15.77	103.16	68.30	34.86	Peak	No Limit
2	5536.4000	80.10	15.78	95.88	999.00	-903.12	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5550 MHz

Vertical

80 dBuV/m

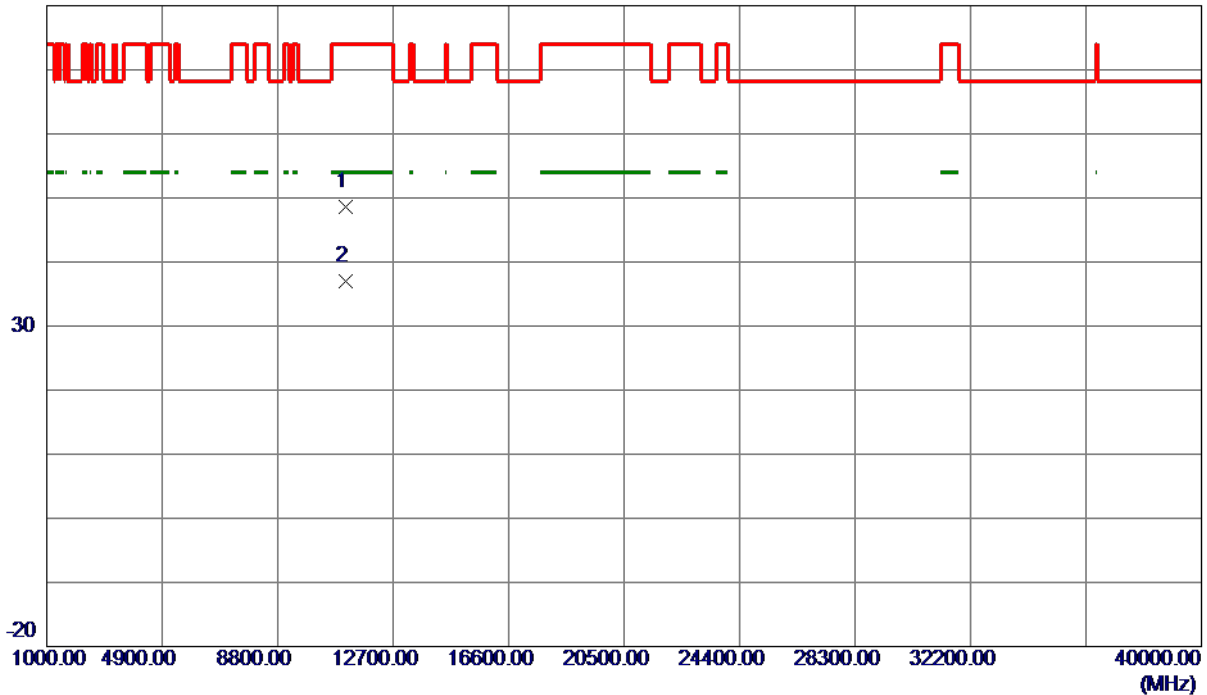


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	34.96	13.61	48.57	74.00	-25.43	Peak	
2 *	11100.0000	23.41	13.61	37.02	54.00	-16.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5550 MHz

Horizontal

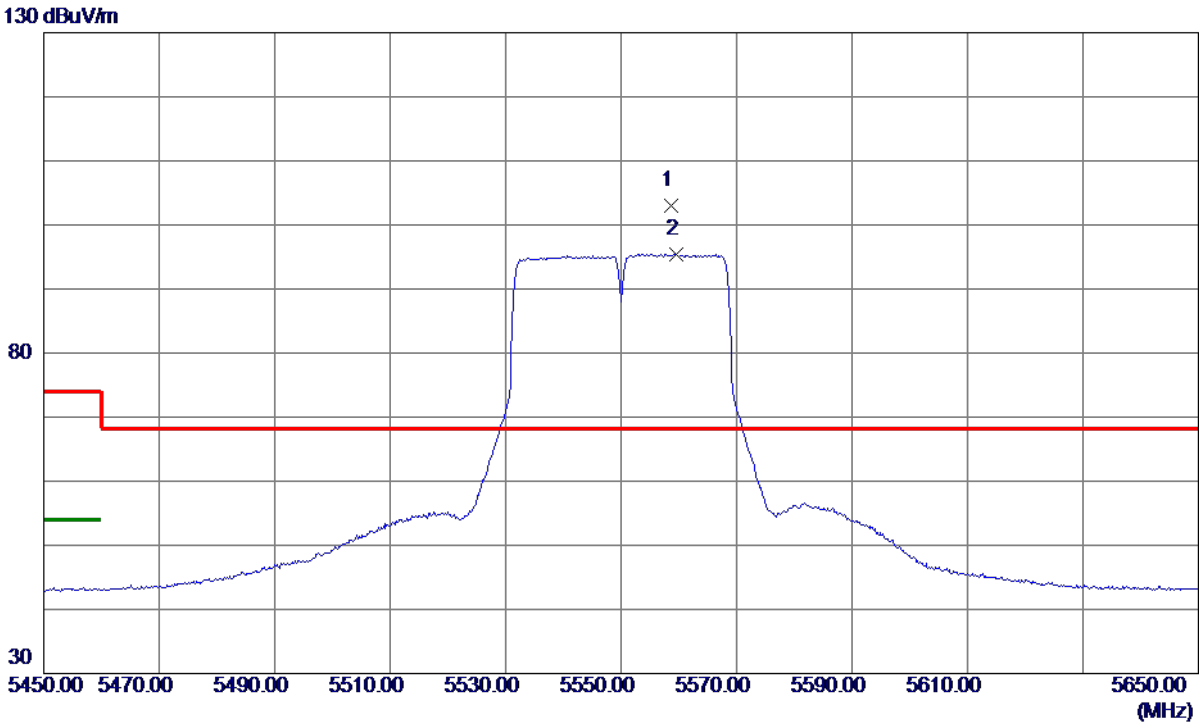

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5558.6000	87.17	15.87	103.04	68.30	34.74	Peak	No Limit
2	5559.6000	79.51	15.87	95.38	999.00	-903.62	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5550 MHz

Horizontal

80 dBuV/m

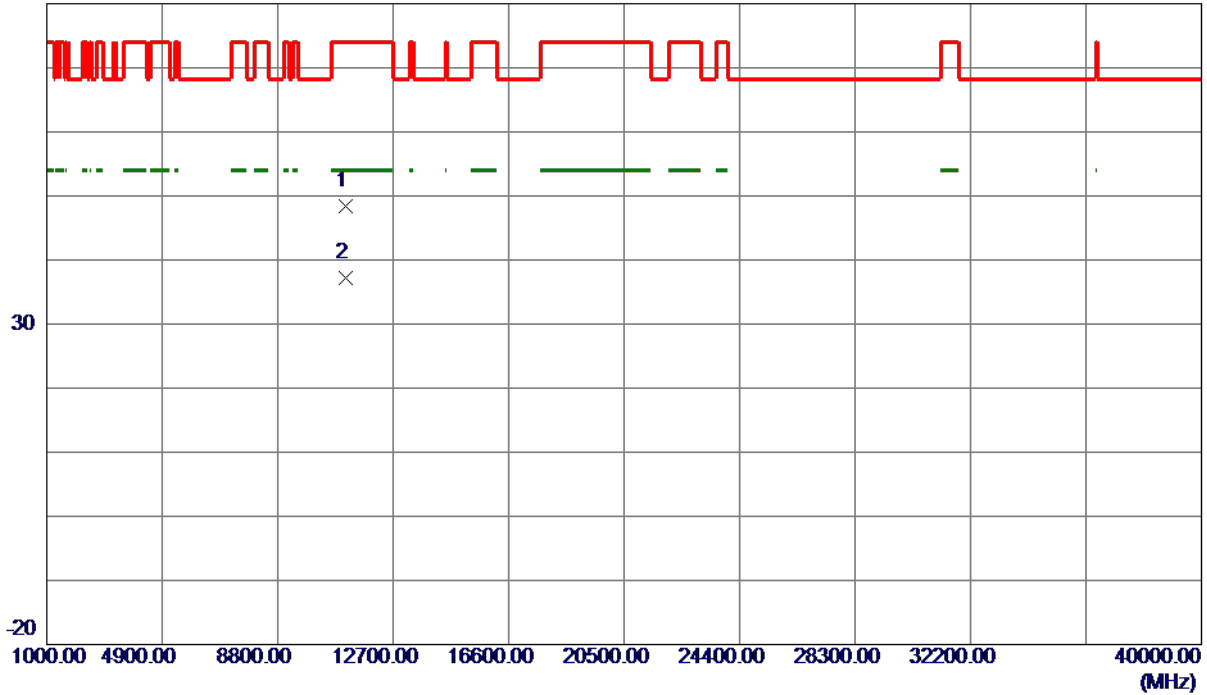

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	34.82	13.61	48.43	74.00	-25.57	Peak	
2 *	11100.0000	23.53	13.61	37.14	54.00	-16.86	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5670 MHz

Vertical

130 dBuV/m

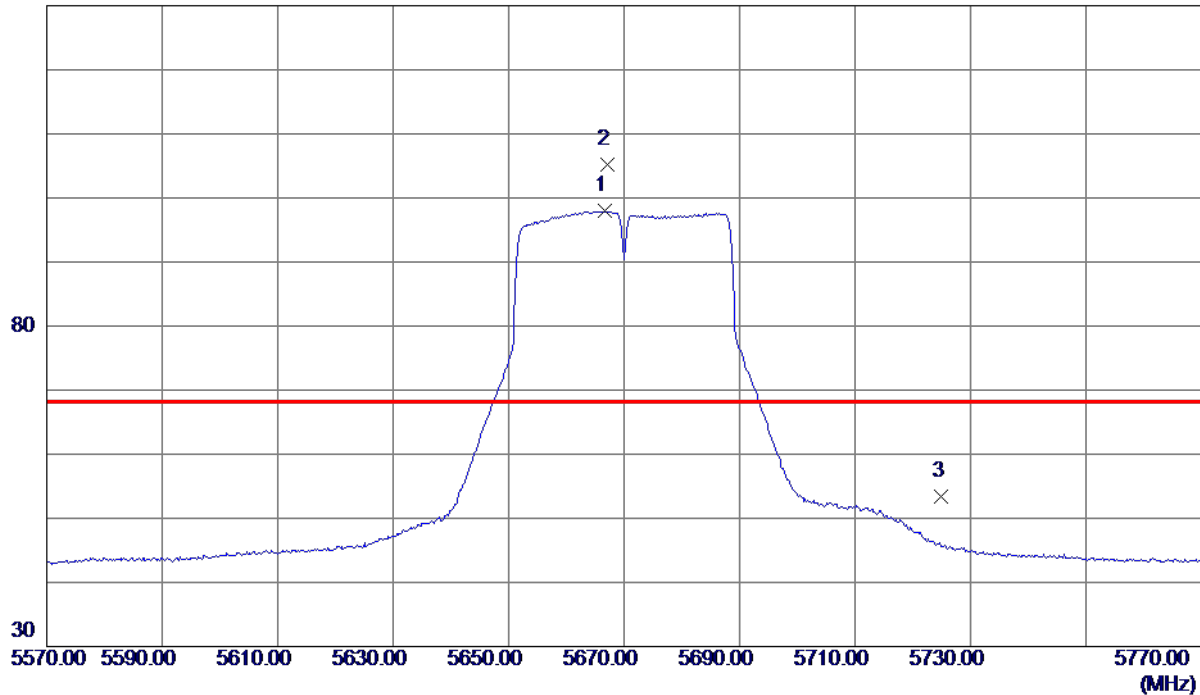


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5666.6000	81.61	16.29	97.90	999.00	-901.10	AVG	No Limit
2 *	5667.2000	88.95	16.30	105.25	68.30	36.95	Peak	No Limit
3	5725.0000	36.88	16.52	53.40	68.30	-14.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5670 MHz

Vertical

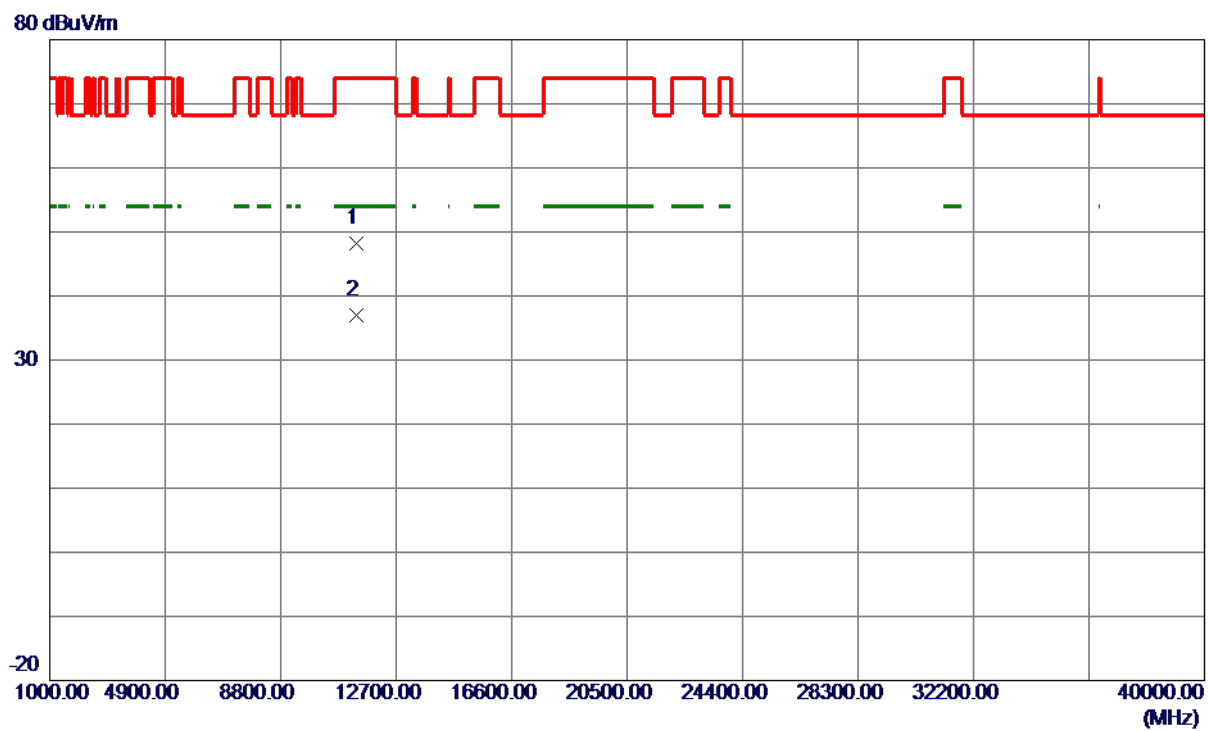


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	34.26	13.90	48.16	74.00	-25.84	Peak	
2 *	11340.0000	23.18	13.90	37.08	54.00	-16.92	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5670 MHz

Horizontal

130 dBuV/m

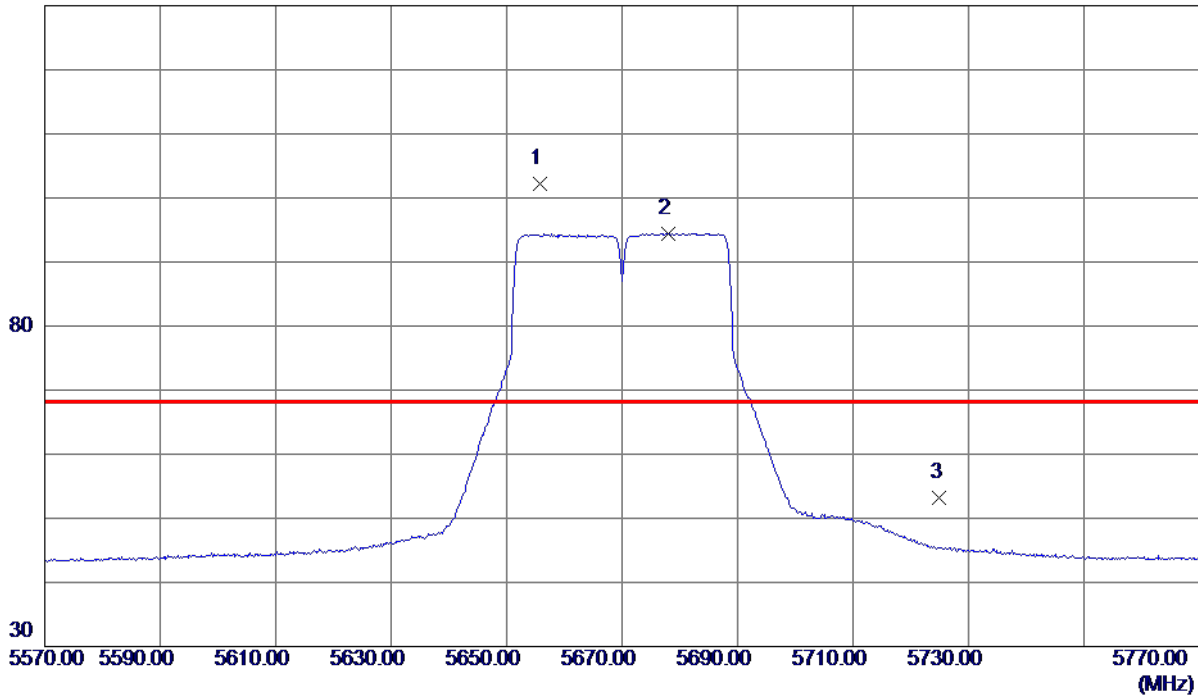

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5655.8000	85.95	16.25	102.20	68.30	33.90	Peak	No Limit
2	5678.0000	78.14	16.34	94.48	999.00	-904.52	AVG	No Limit
3	5725.0000	36.62	16.52	53.14	68.30	-15.16	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5670 MHz

Horizontal

80 dBuV/m

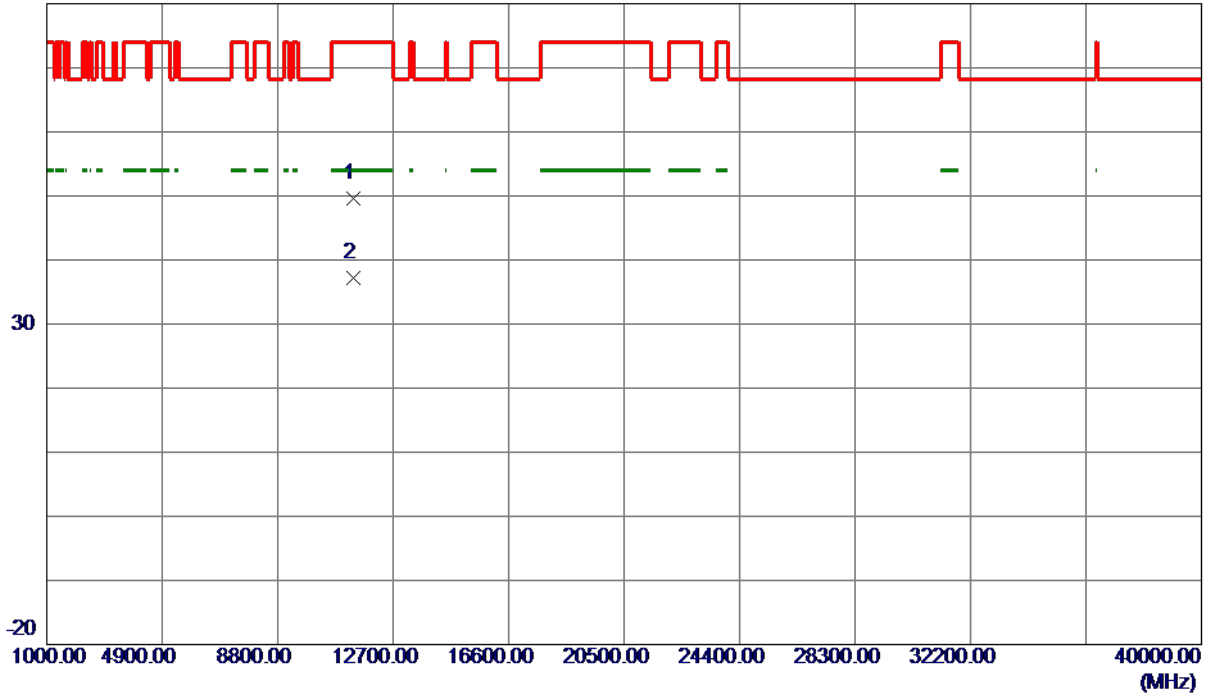


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	35.68	13.90	49.58	74.00	-24.42	Peak	
2 *	11340.0000	23.32	13.90	37.22	54.00	-16.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

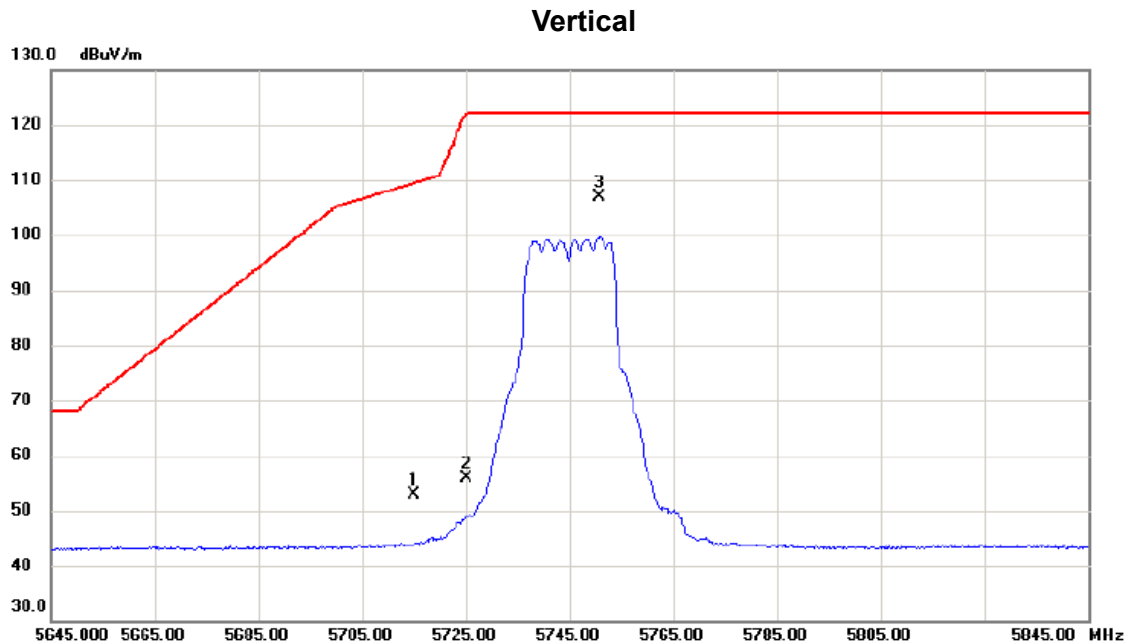


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	36.32	16.48	52.80	109.40	-56.60	peak	
2		5725.000	39.24	16.52	55.76	122.20	-66.44	peak	
3	*	5750.600	90.17	16.62	106.79	122.20	-15.41	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Vertical

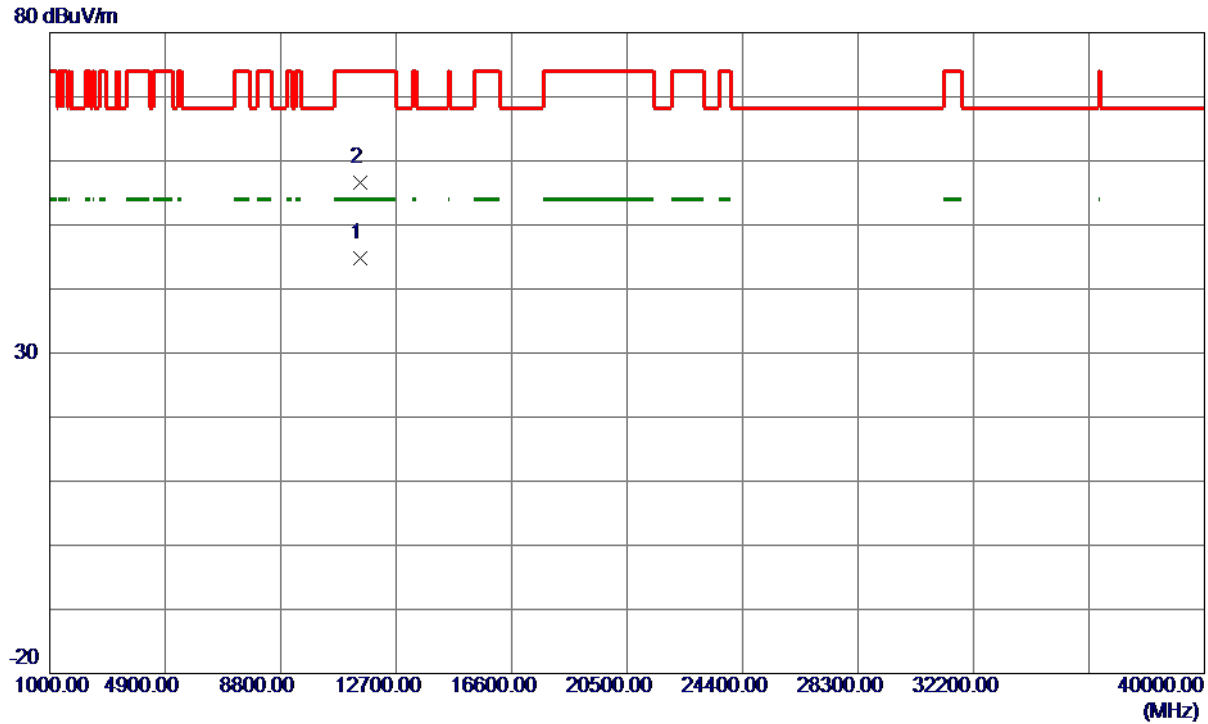


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.9400	30.70	14.08	44.78	54.00	-9.22	AVG	
2	11490.6400	42.53	14.08	56.61	74.00	-17.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

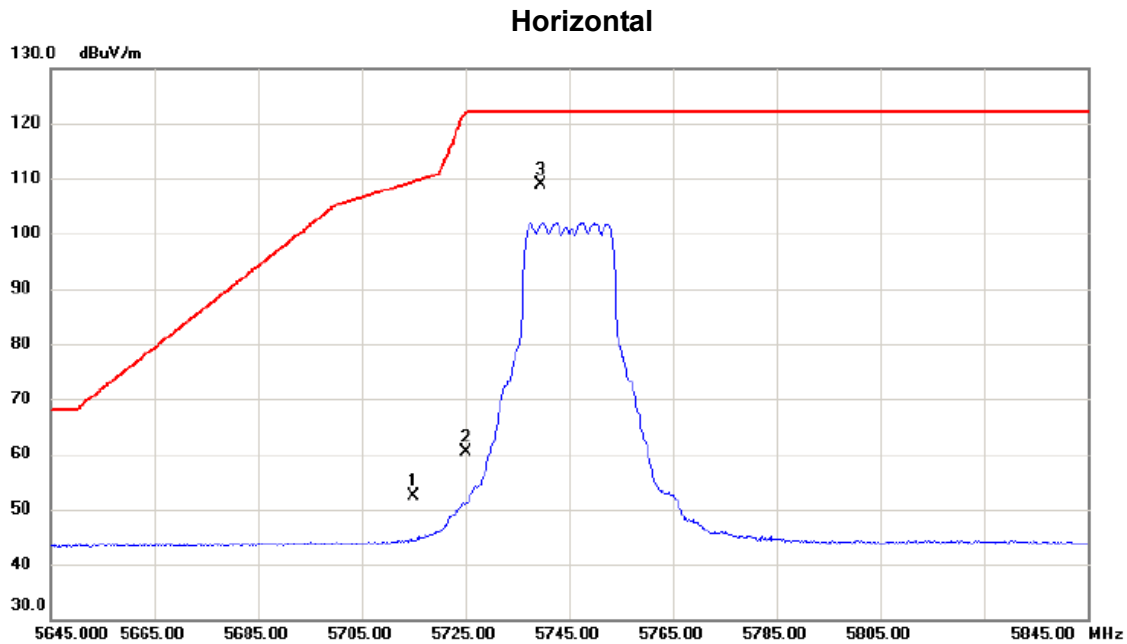

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	35.84	16.48	52.32	109.40	-57.08	peak	
2		5725.000	43.91	16.52	60.43	122.20	-61.77	peak	
3	*	5739.600	92.42	16.58	109.00	122.20	-13.20	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Horizontal

80 dBuV/m

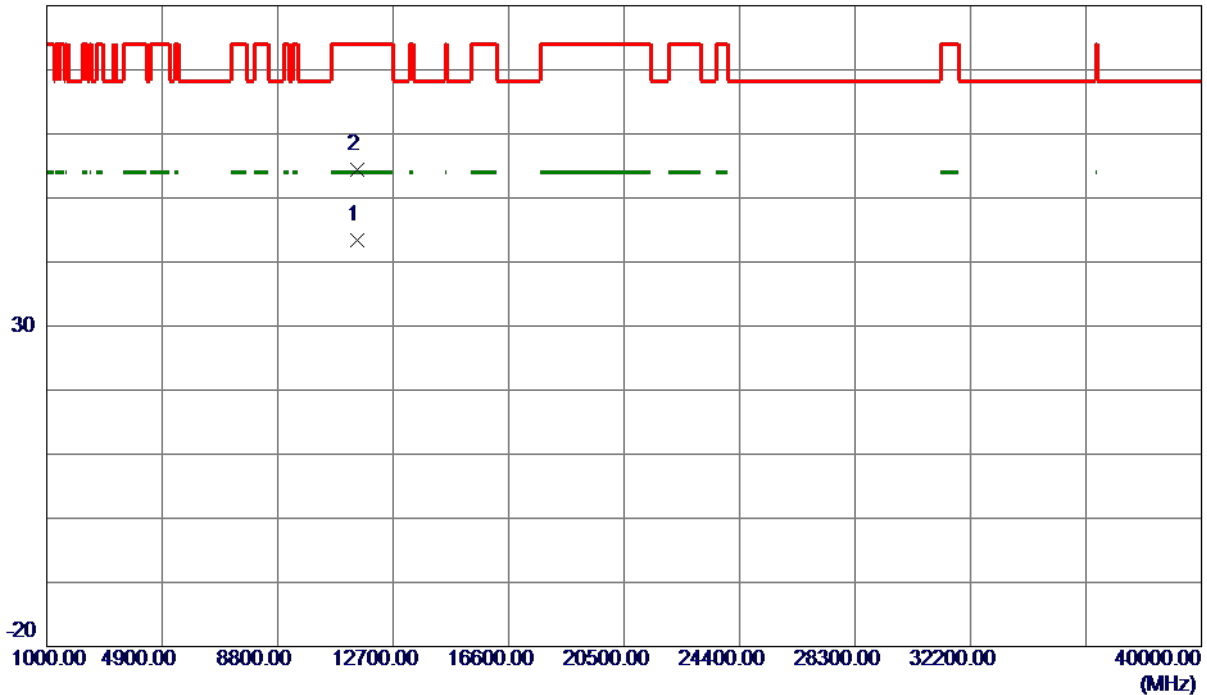


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11486.3500	29.40	14.08	43.48	54.00	-10.52	AVG	
2	11486.7000	40.37	14.08	54.45	74.00	-19.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

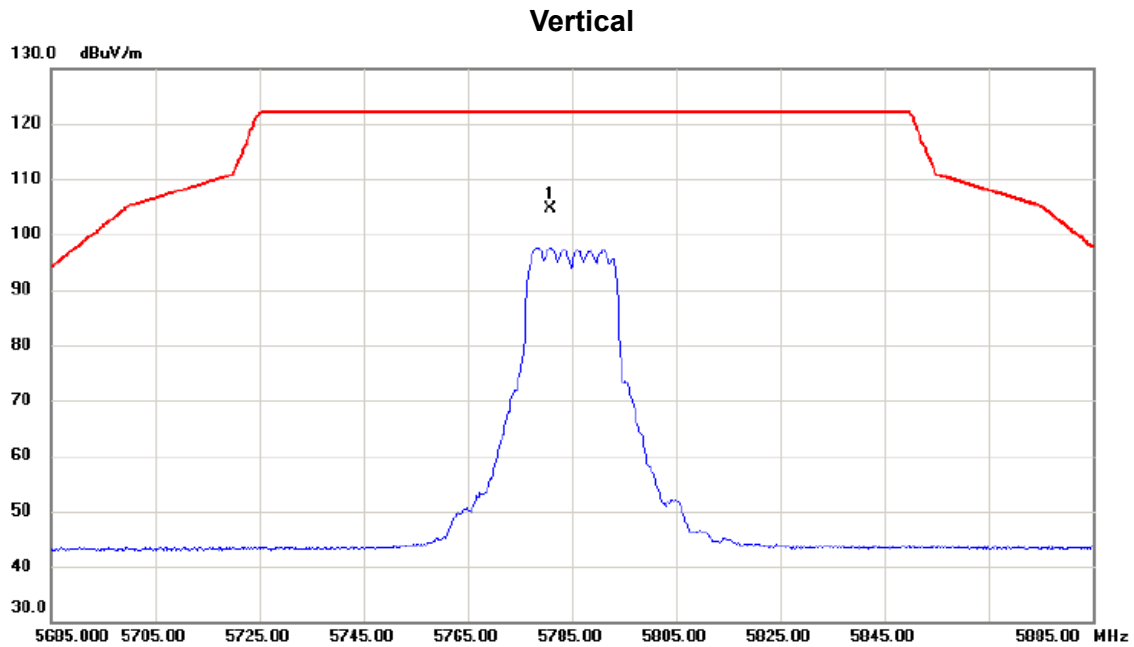

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5780.800	87.89	16.75	104.64	122.20	-17.56	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Vertical

80 dBuV/m

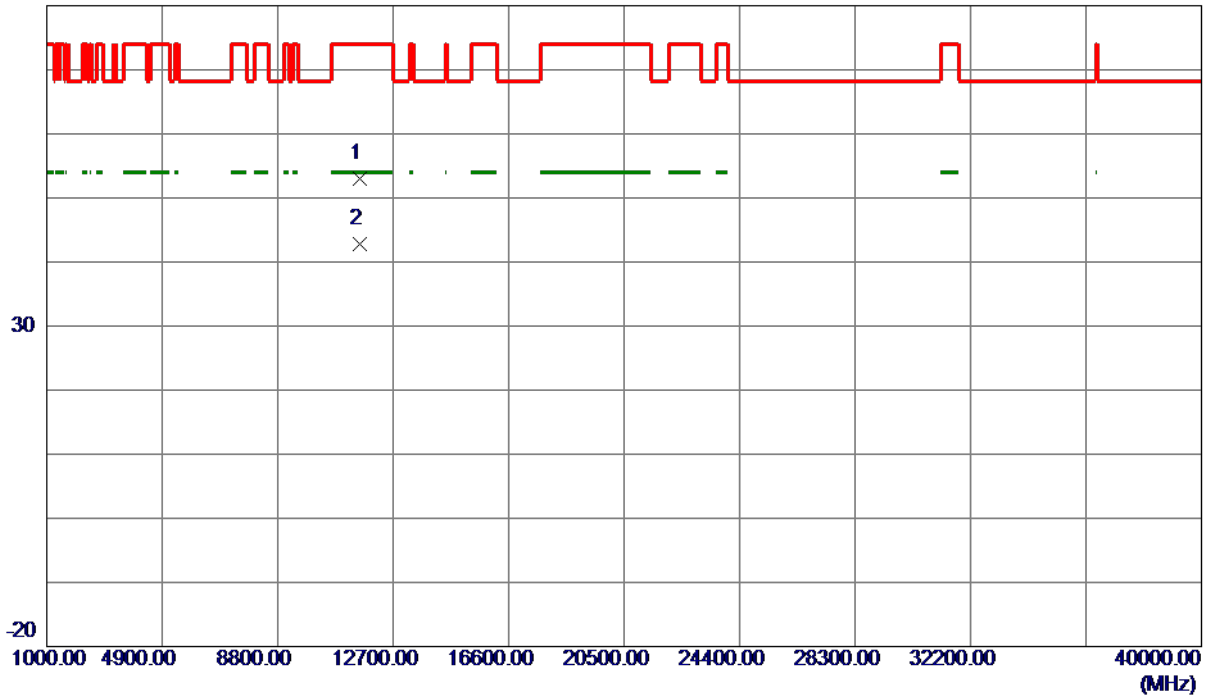


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11571.8500	38.86	14.15	53.01	74.00	-20.99	Peak	
2 *	11572.2500	28.61	14.15	42.76	54.00	-11.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

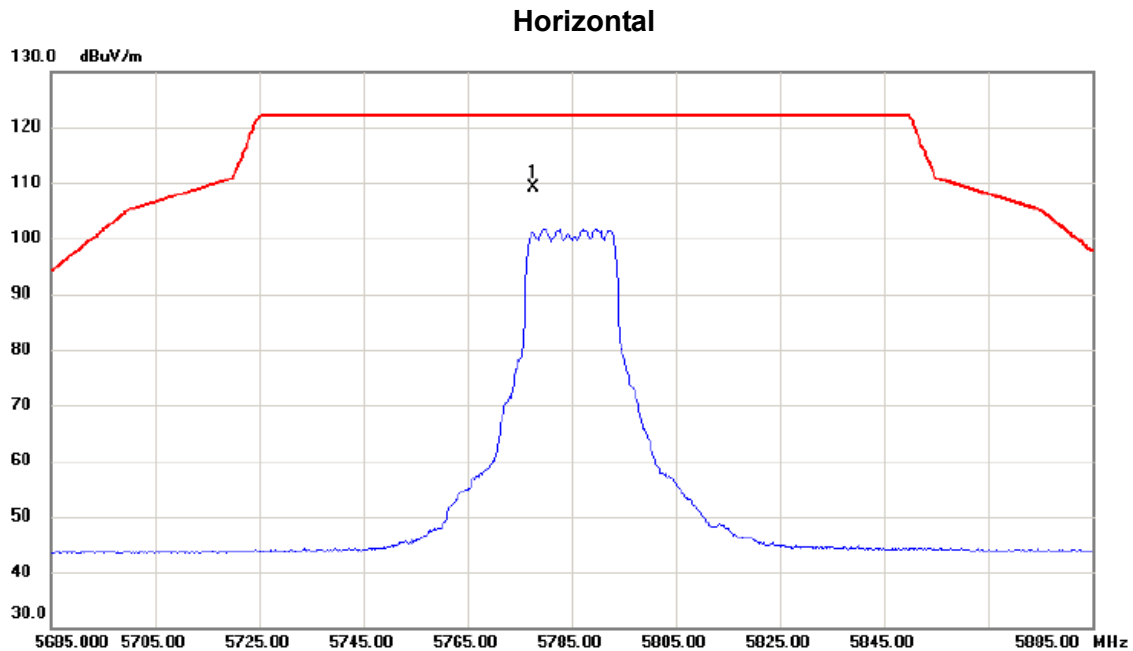


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5777.600	92.28	16.73	109.01	122.20	-13.19	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Horizontal

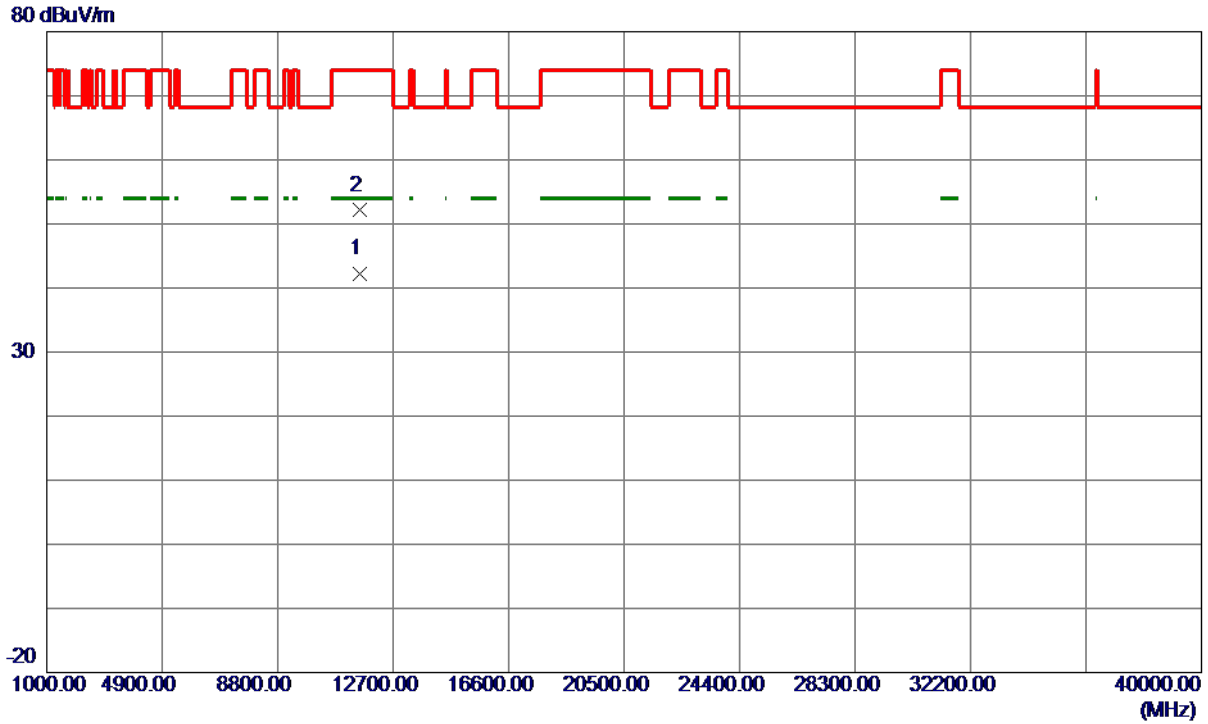


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.3500	28.00	14.15	42.15	54.00	-11.85	AVG	
2	11573.0500	37.95	14.15	52.10	74.00	-21.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

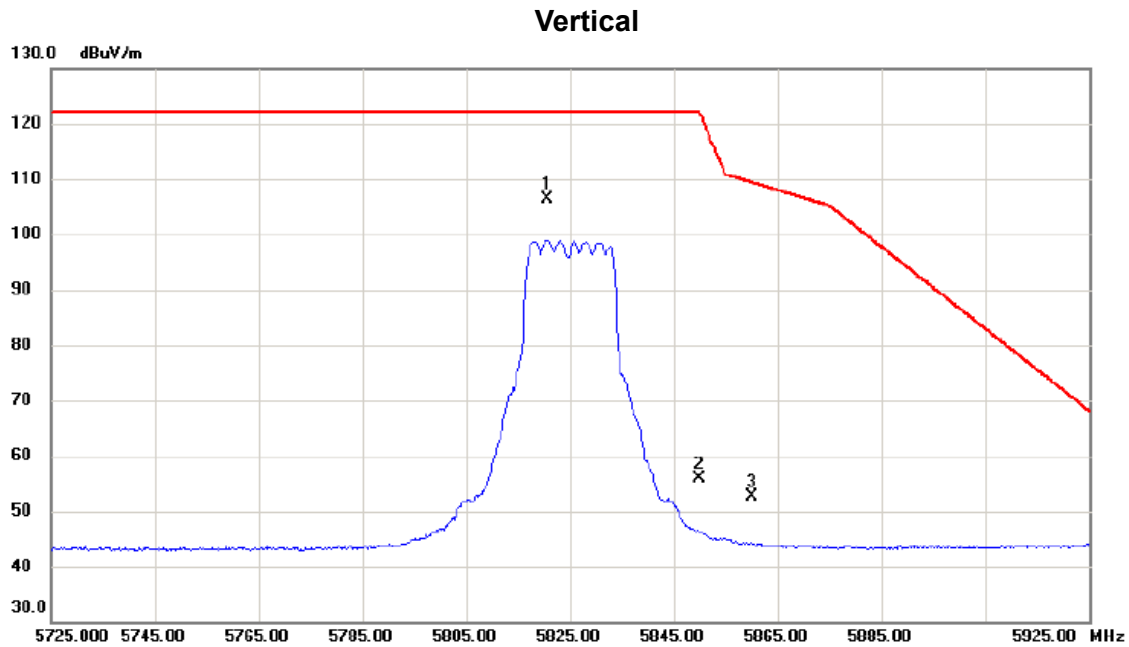


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5820.600	89.46	16.90	106.36	122.20	-15.84	peak	No Limit
2		5850.000	38.74	17.02	55.76	122.20	-66.44	peak	
3		5860.000	35.58	17.06	52.64	109.40	-56.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz


Vertical

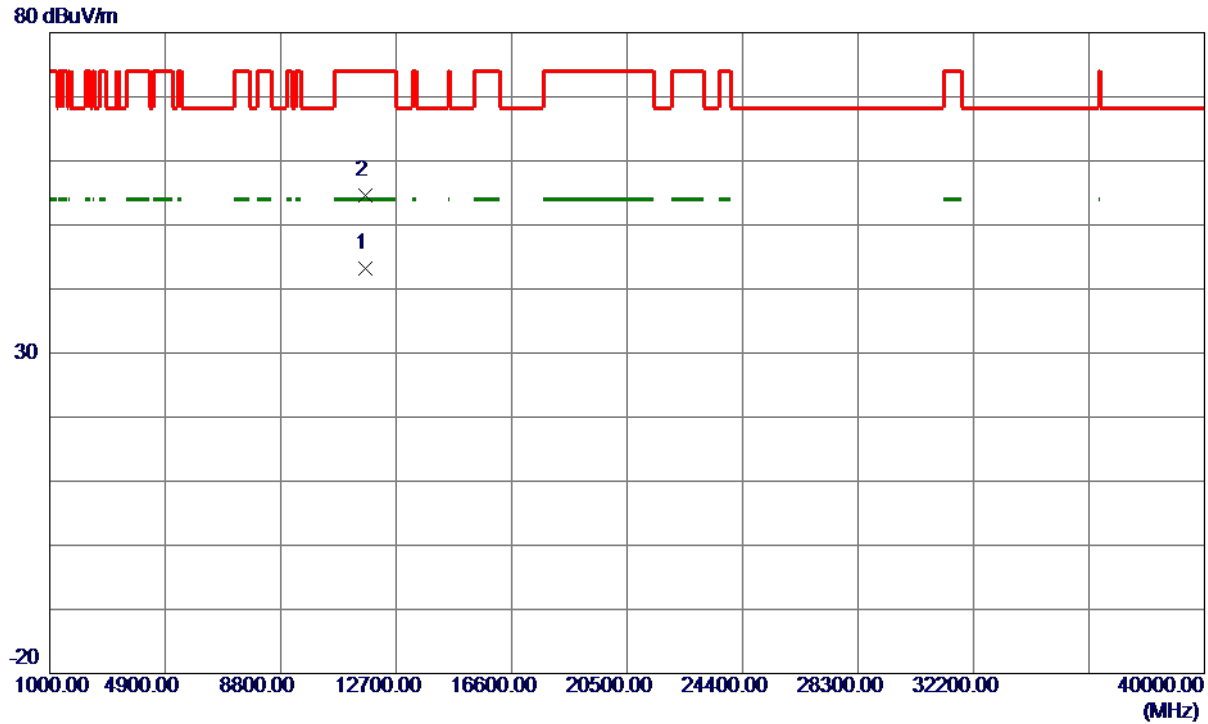

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.4000	29.00	14.21	43.21	54.00	-10.79	AVG	
2	11651.2500	40.44	14.21	54.65	74.00	-19.35	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

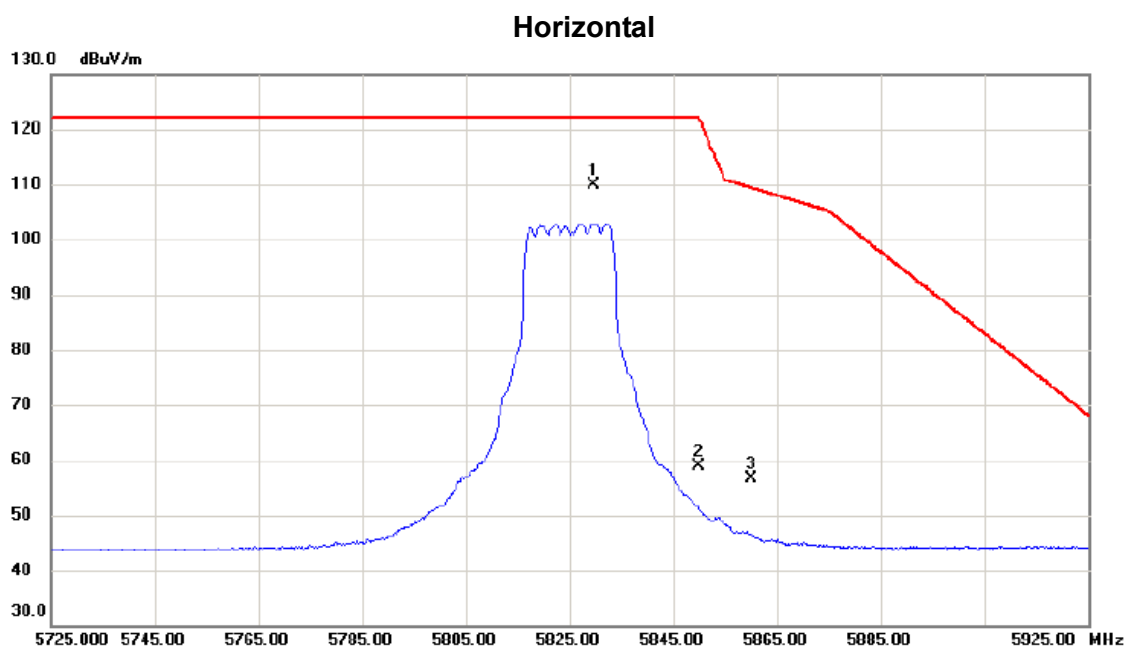

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5829.600	92.98	16.94	109.92	122.20	-12.28	peak	No Limit
2		5850.000	41.82	17.02	58.84	122.20	-63.36	peak	
3		5860.000	39.45	17.06	56.51	109.40	-52.89	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz


Horizontal

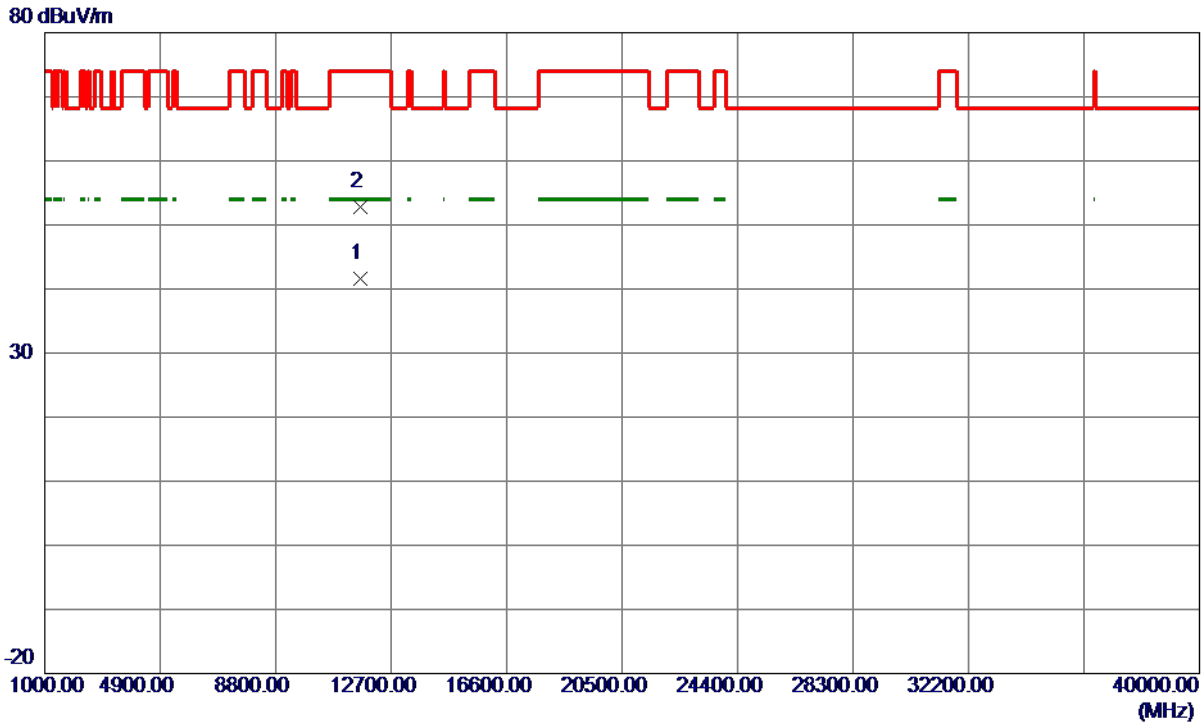

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.8500	27.41	14.21	41.62	54.00	-12.38	AVG	
2	11651.0000	38.62	14.21	52.83	74.00	-21.17	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

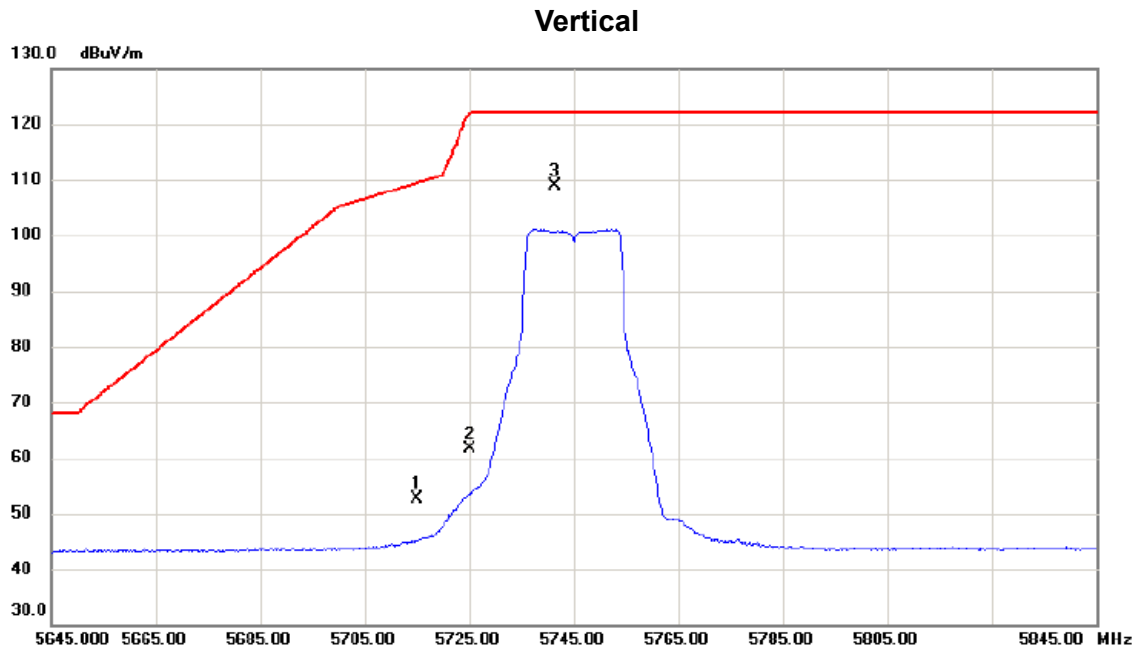

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	36.22	16.48	52.70	109.40	-56.70	peak	
2		5725.000	45.15	16.52	61.67	122.20	-60.53	peak	
3	*	5741.400	92.30	16.59	108.89	122.20	-13.31	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

Vertical

80 dBuV/m

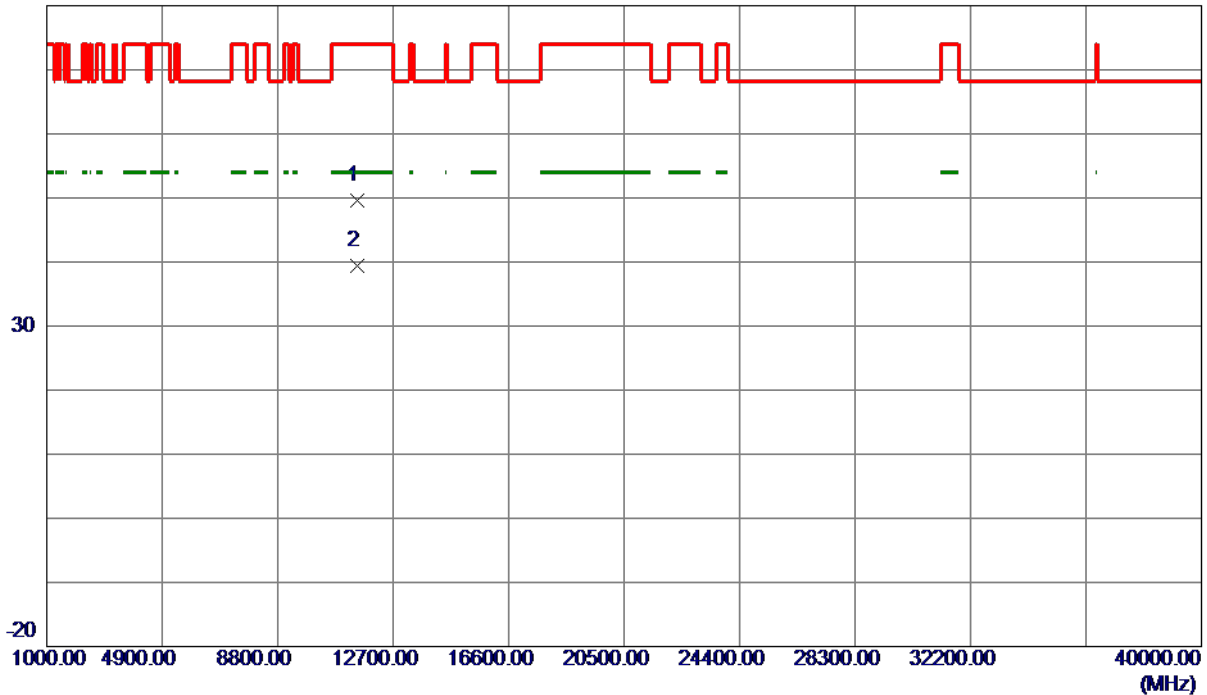


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11482.7500	35.55	14.07	49.62	74.00	-24.38	Peak	
2 *	11488.7000	25.29	14.08	39.37	54.00	-14.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

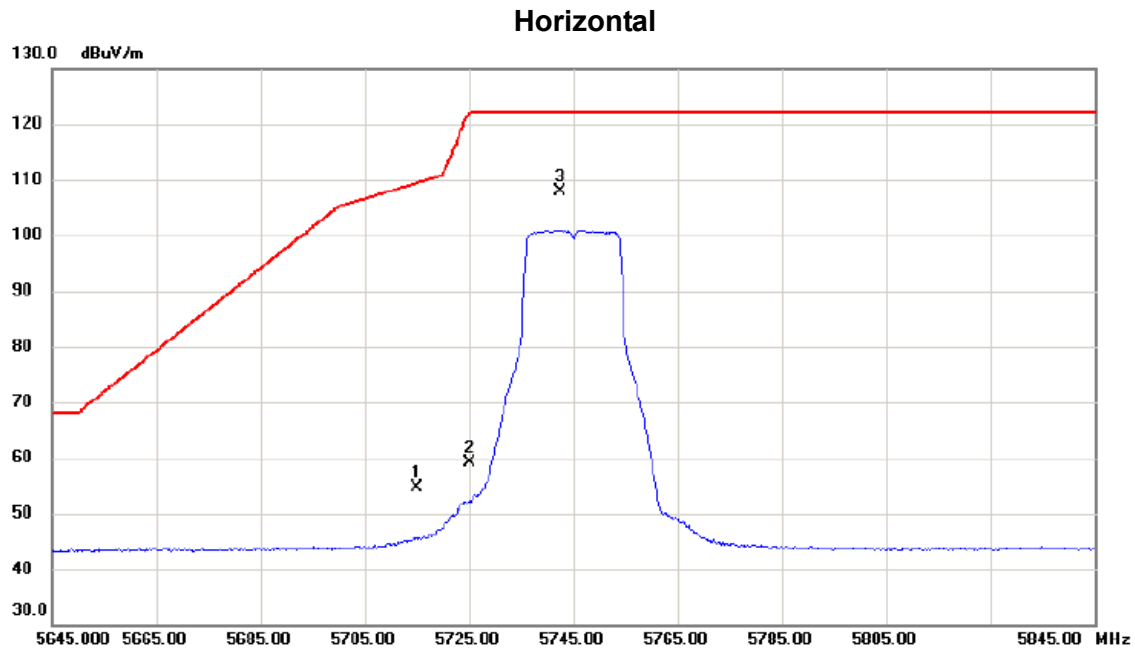

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	38.07	16.48	54.55	109.40	-54.85	peak	
2		5725.000	42.57	16.52	59.09	122.20	-63.11	peak	
3	*	5742.400	91.24	16.59	107.83	122.20	-14.37	peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

Horizontal

80 dBuV/m

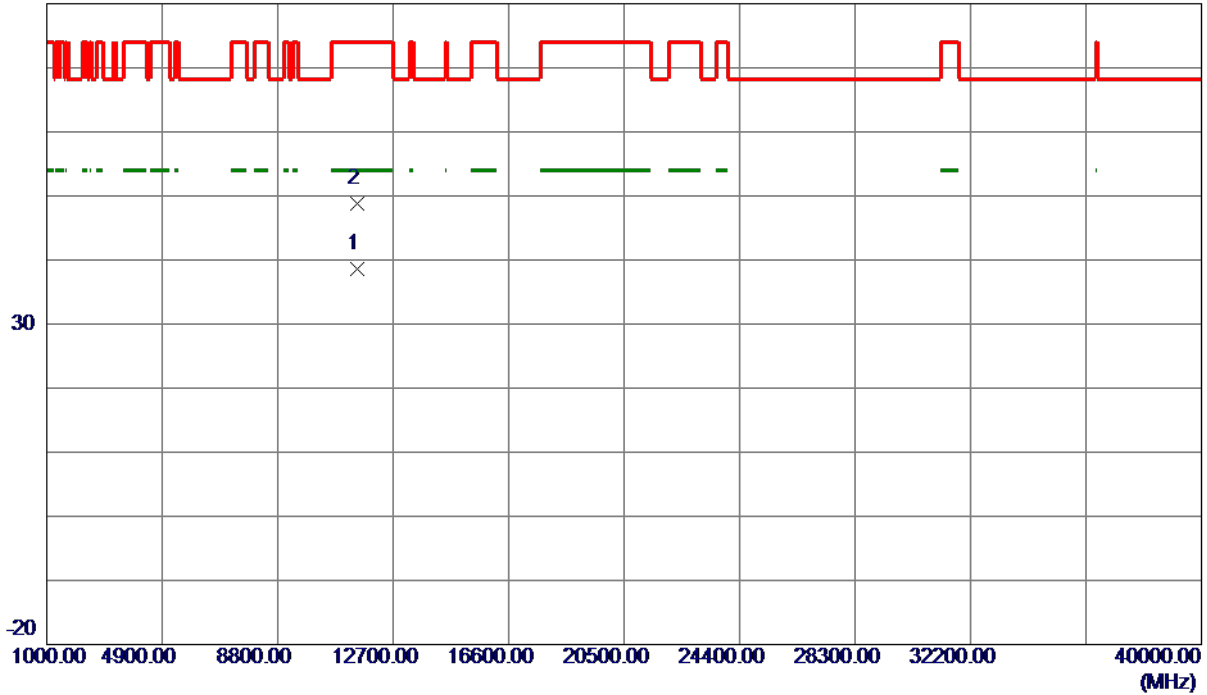


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.7000	24.56	14.08	38.64	54.00	-15.36	AVG	
2	11495.5500	34.80	14.09	48.89	74.00	-25.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

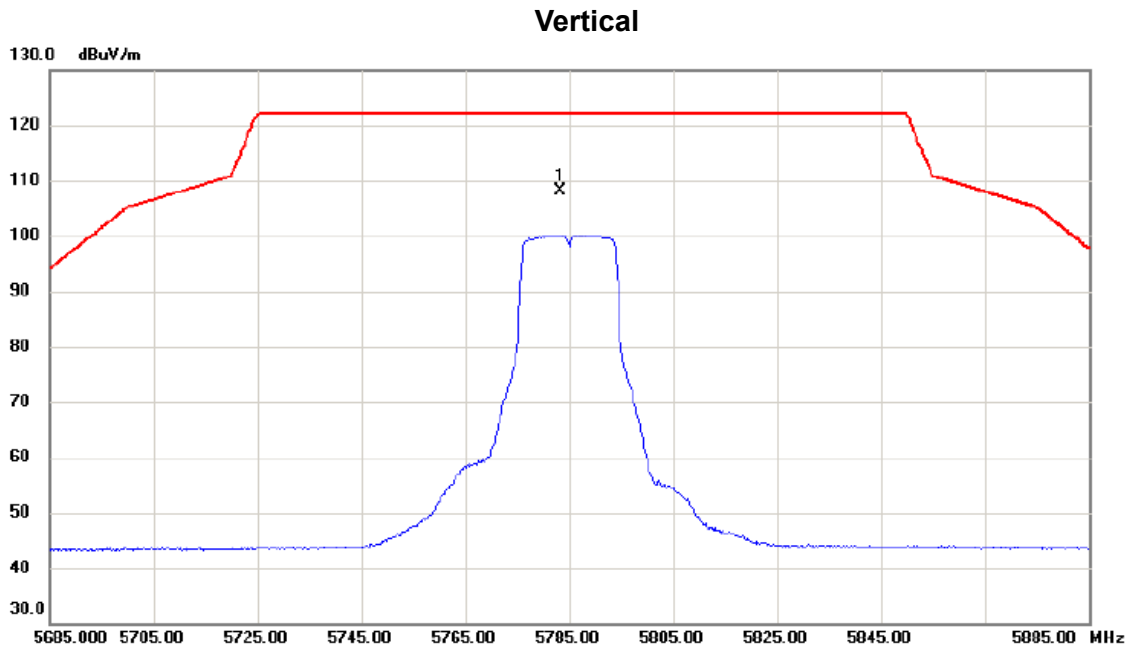


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5783.400	91.27	16.75	108.02	122.20	-14.18	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

Vertical

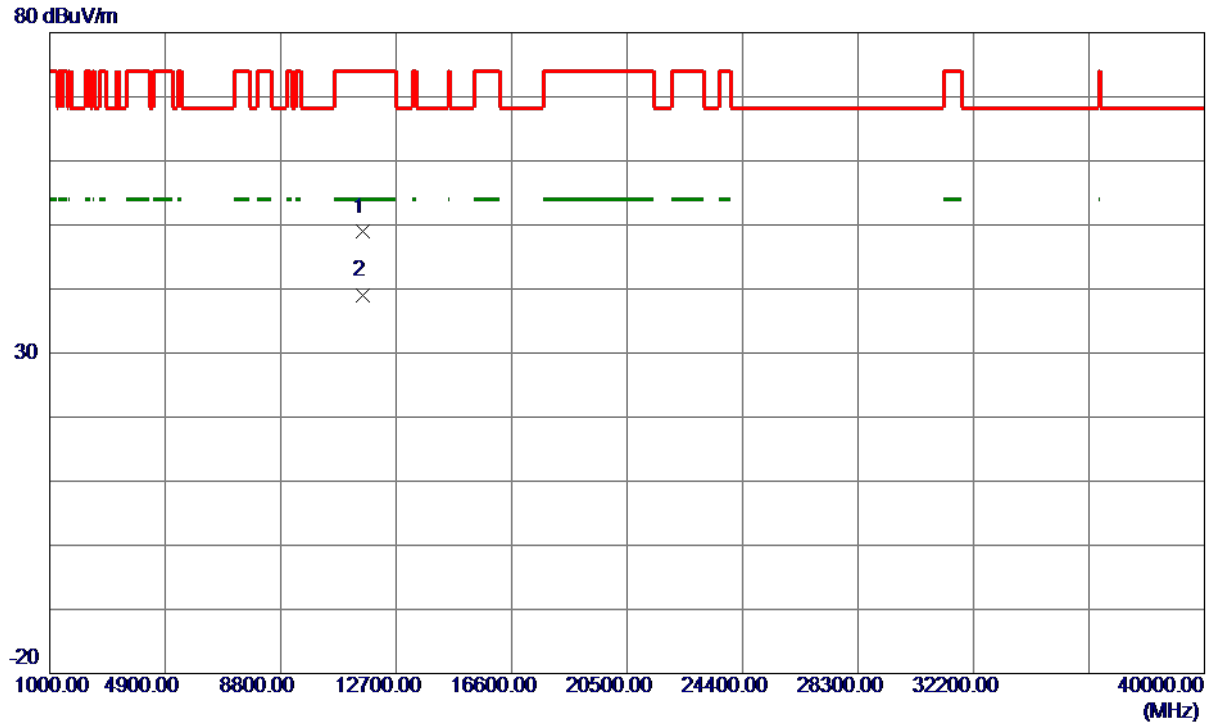


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11565.4500	34.75	14.15	48.90	74.00	-25.10	Peak	
2 *	11566.0000	24.87	14.15	39.02	54.00	-14.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

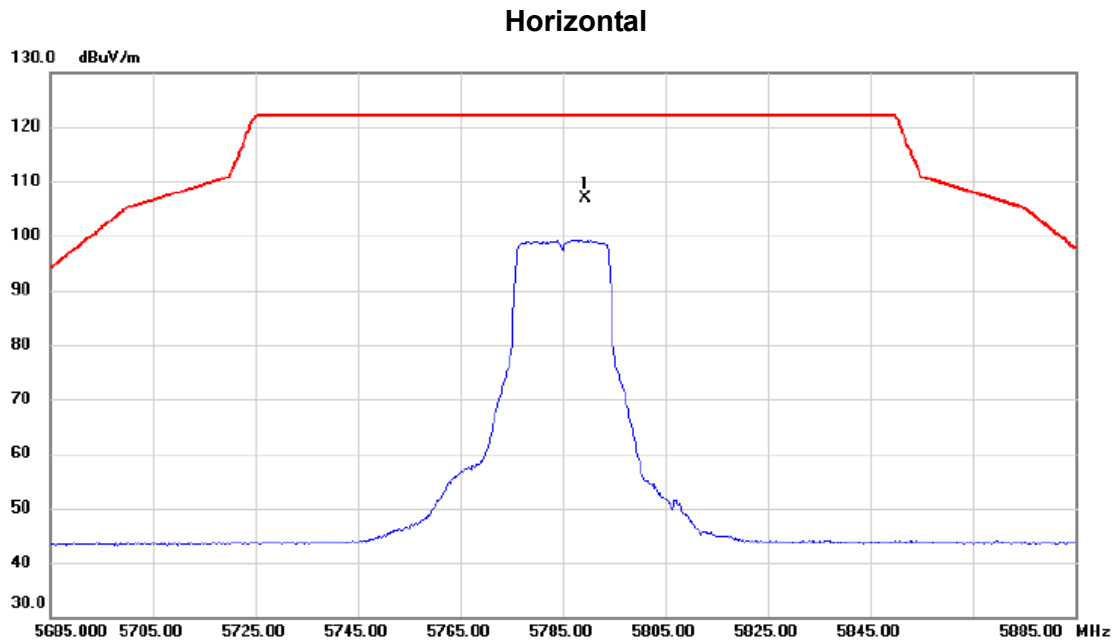

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5789.400	90.18	16.78	106.96	122.20	-15.24	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

Horizontal

80 dBuV/m

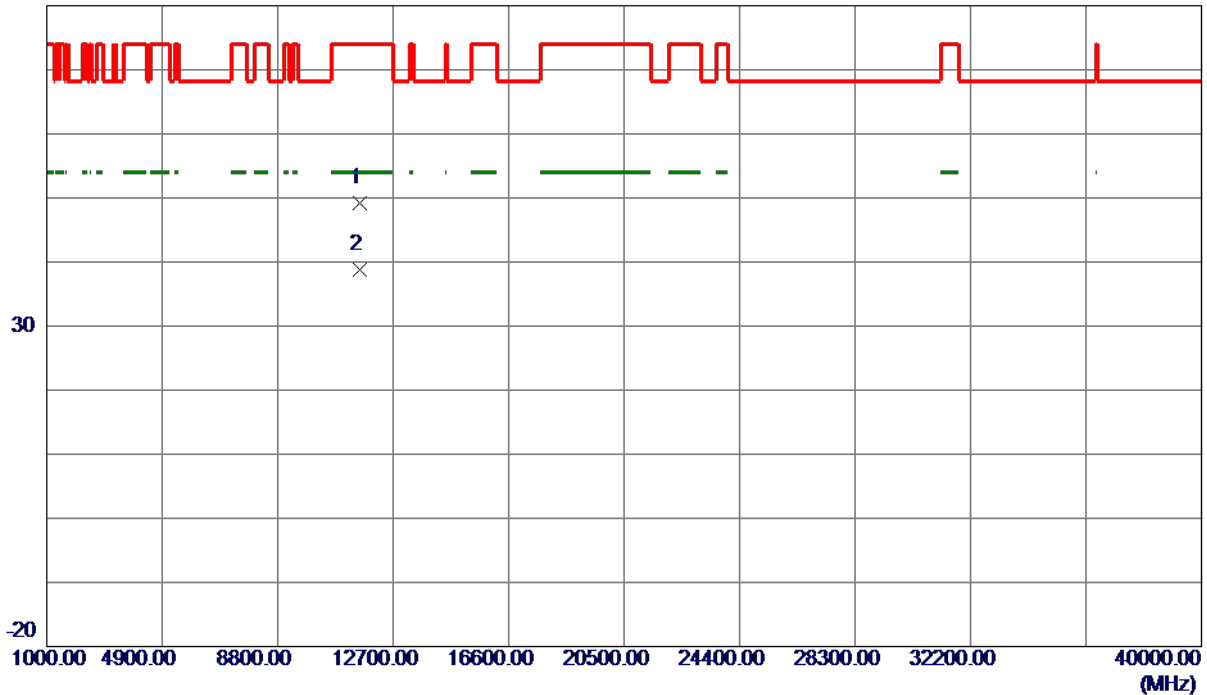


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11563.6000	35.06	14.15	49.21	74.00	-24.79	Peak	
2 *	11567.2000	24.59	14.15	38.74	54.00	-15.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

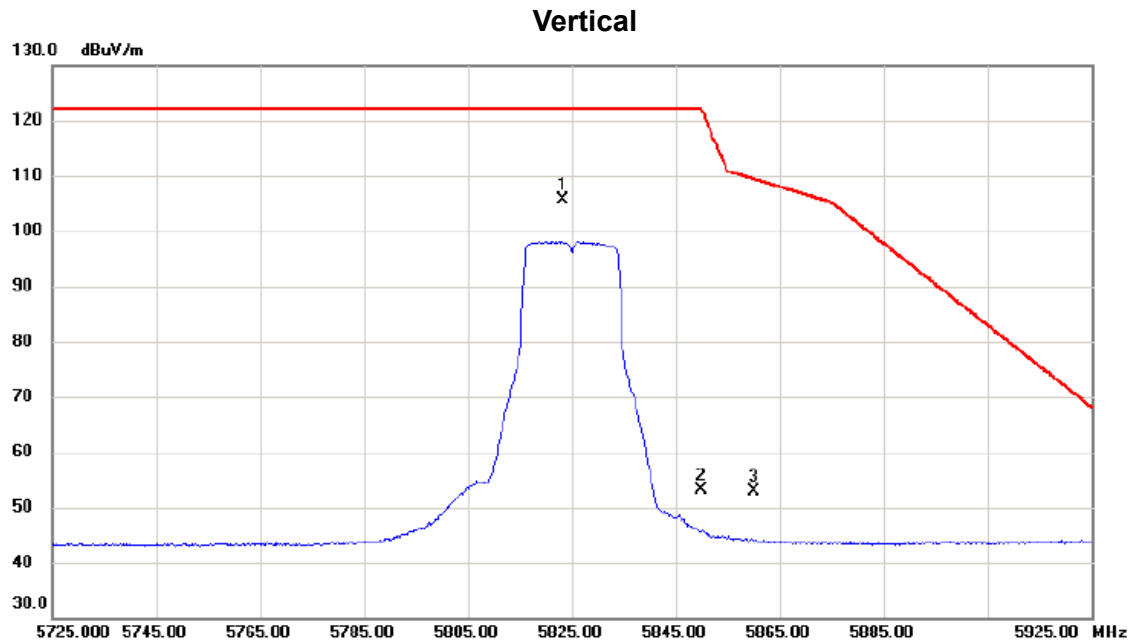

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5823.400	88.67	16.92	105.59	122.20	-16.61	peak	No Limit
2		5850.000	36.04	17.02	53.06	122.20	-69.14	peak	
3		5860.000	35.82	17.06	52.88	109.40	-56.52	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Vertical

80 dBuV/m

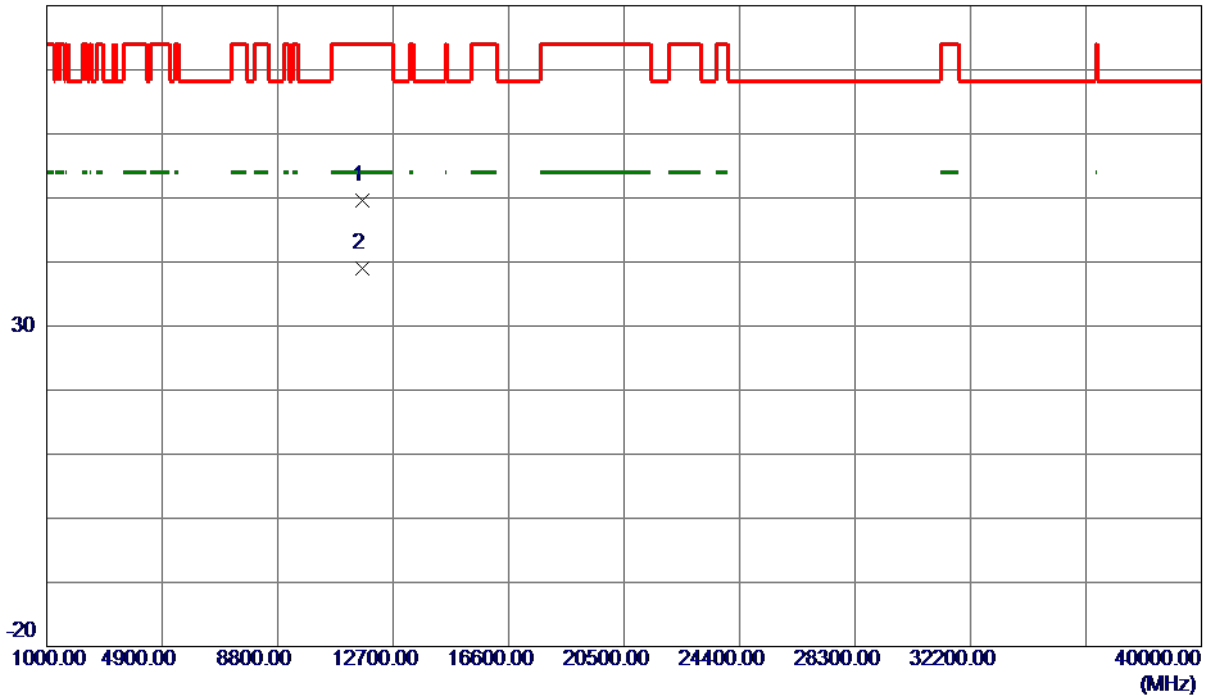


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11645.2000	35.33	14.21	49.54	74.00	-24.46	Peak	
2 *	11655.0000	24.87	14.22	39.09	54.00	-14.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

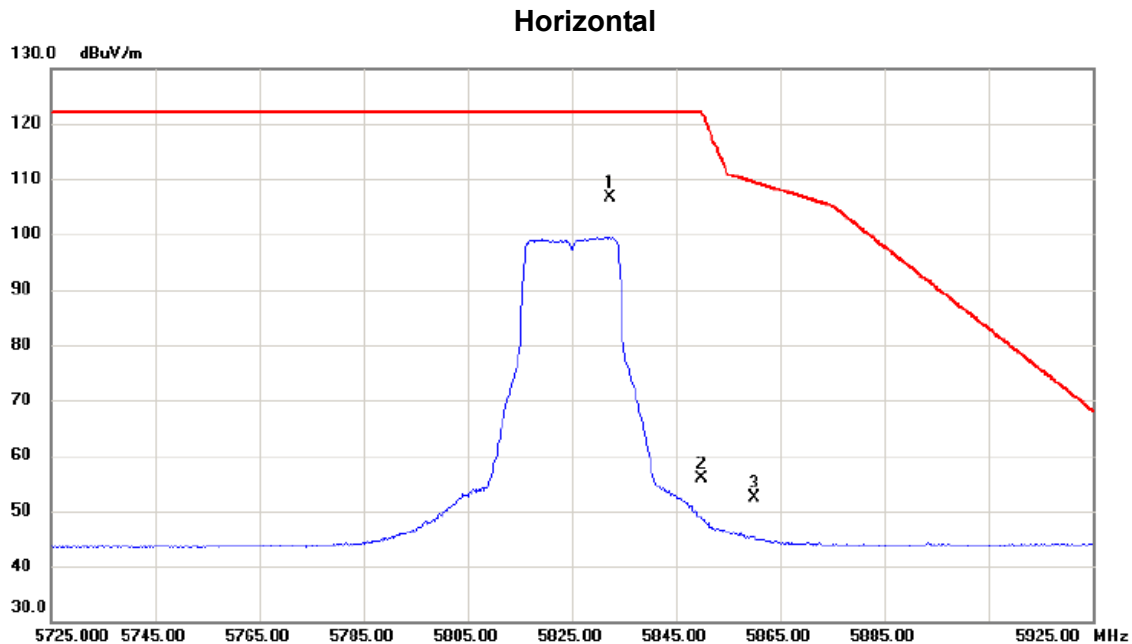

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5832.400	89.58	16.95	106.53	122.20	-15.67	peak	No Limit
2		5850.000	38.93	17.02	55.95	122.20	-66.25	peak	
3		5860.000	35.23	17.06	52.29	109.40	-57.11	peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Horizontal

80 dBuV/m

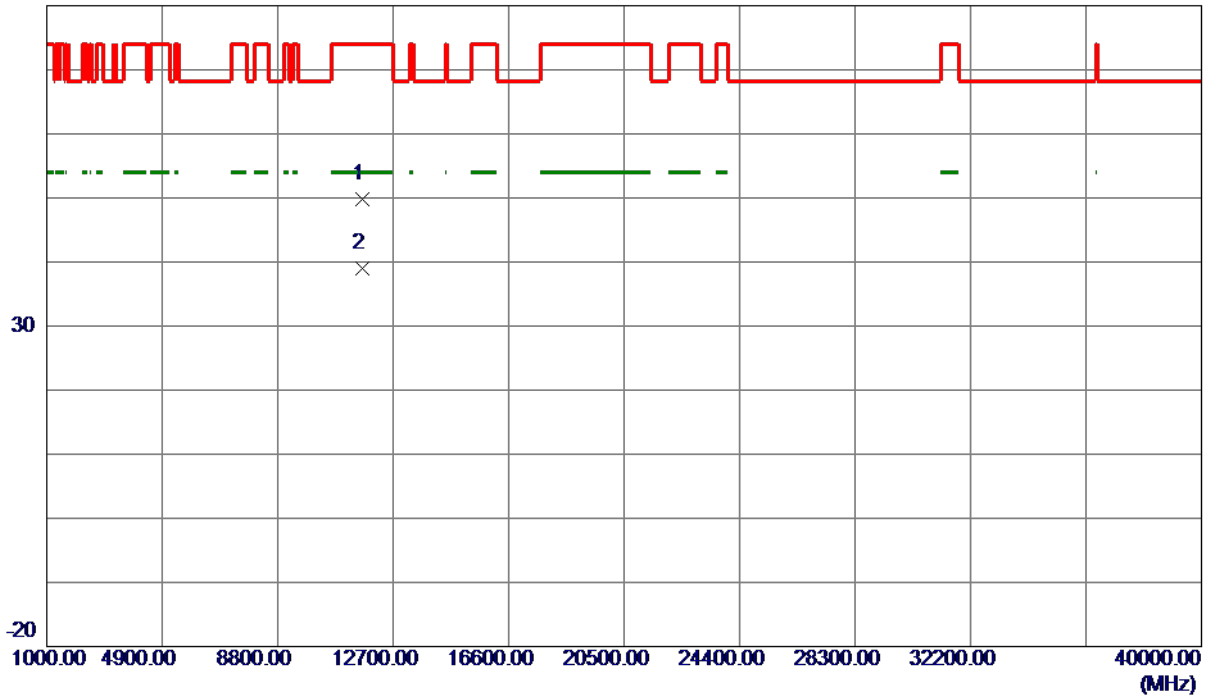

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11644.4000	35.52	14.21	49.73	74.00	-24.27	Peak	
2 *	11647.7500	24.78	14.21	38.99	54.00	-15.01	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Vertical

130 dBuV/m

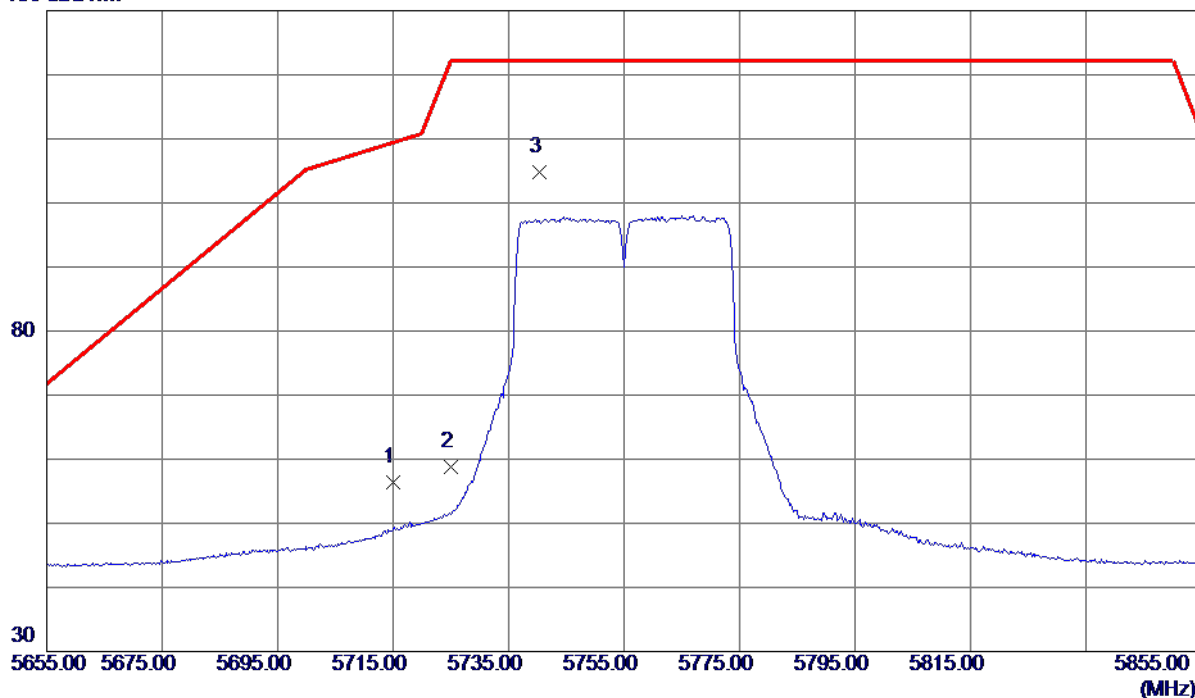

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	39.94	16.48	56.42	109.40	-52.98	Peak	
2	5725.0000	42.20	16.52	58.72	122.20	-63.48	Peak	
3 *	5740.4000	88.25	16.58	104.83	122.20	-17.37	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Vertical

80 dBuV/m

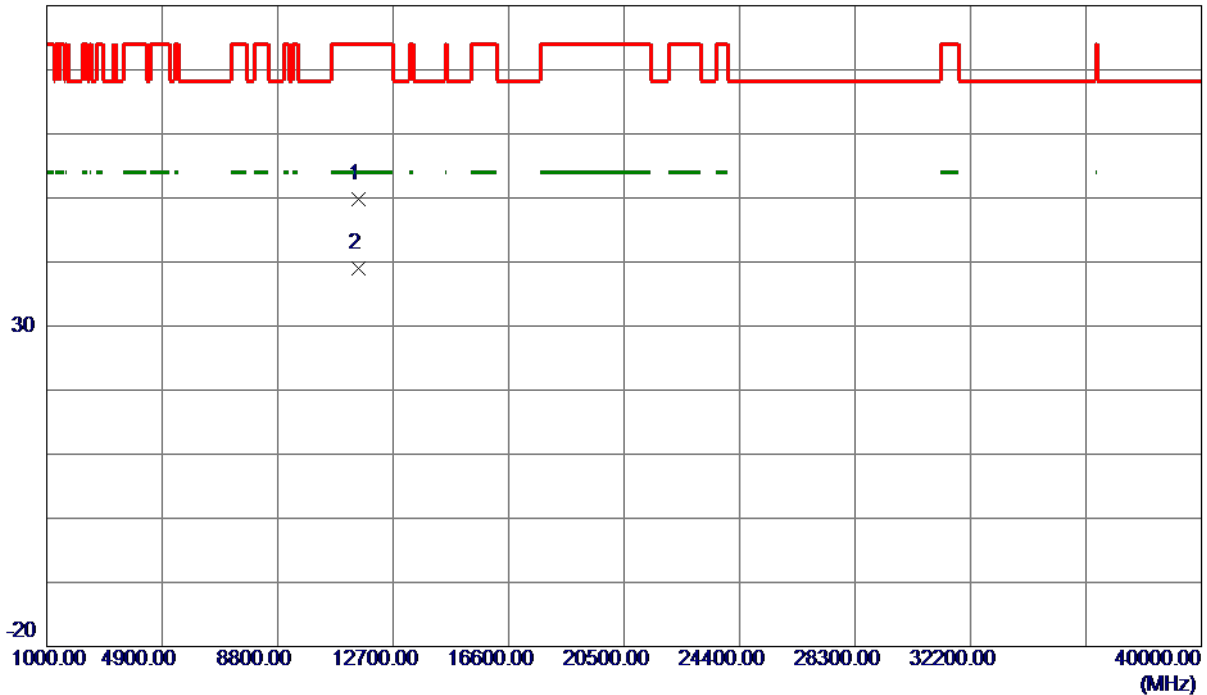


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11508.9650	35.73	14.10	49.83	74.00	-24.17	Peak	
2 *	11509.7200	24.87	14.10	38.97	54.00	-15.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Horizontal

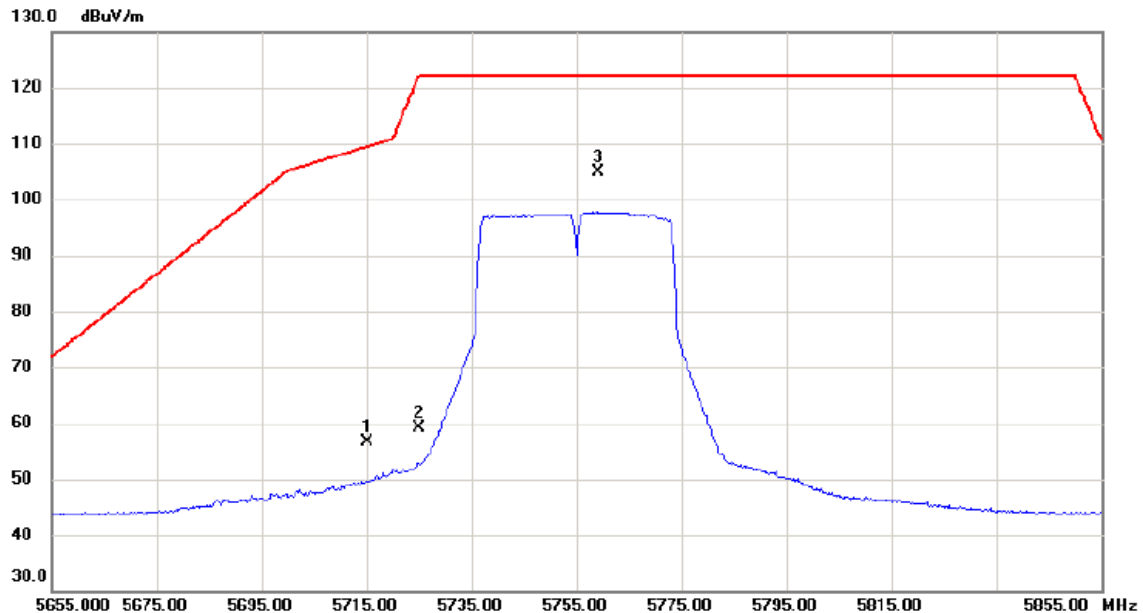

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	40.04	16.48	56.52	109.40	-52.88	peak	
2		5725.000	42.56	16.52	59.08	122.20	-63.12	peak	
3	*	5759.200	88.15	16.66	104.81	122.20	-17.39	peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Horizontal

80 dBuV/m

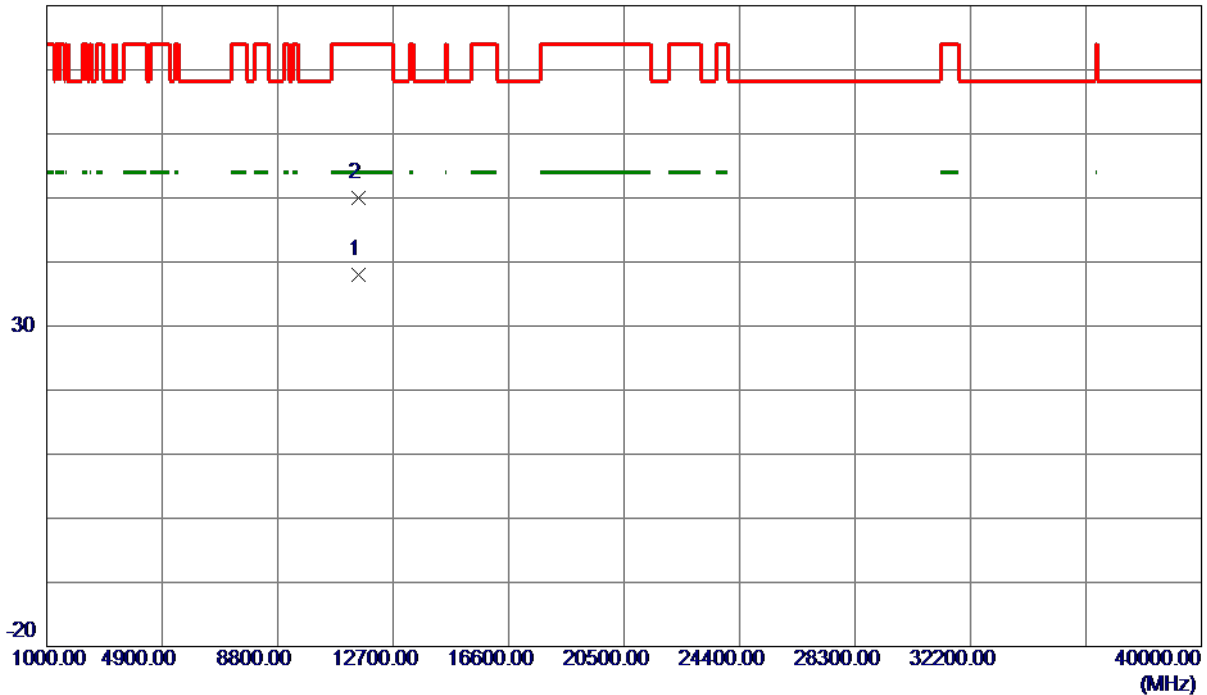


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.2600	23.82	14.10	37.92	54.00	-16.08	AVG	
2	11509.5900	35.86	14.10	49.96	74.00	-24.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

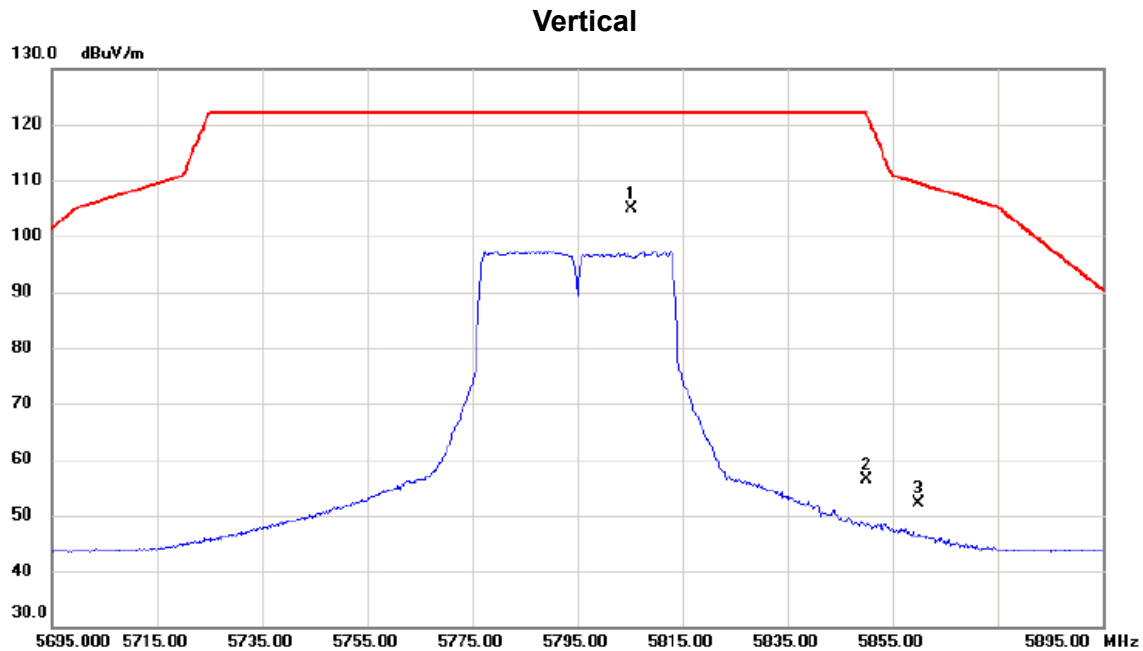

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5805.200	88.02	16.84	104.86	122.20	-17.34	peak	No Limit
2		5850.000	39.36	17.02	56.38	122.20	-65.82	peak	
3		5860.000	35.13	17.06	52.19	109.40	-57.21	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

Vertical

80 dBuV/m

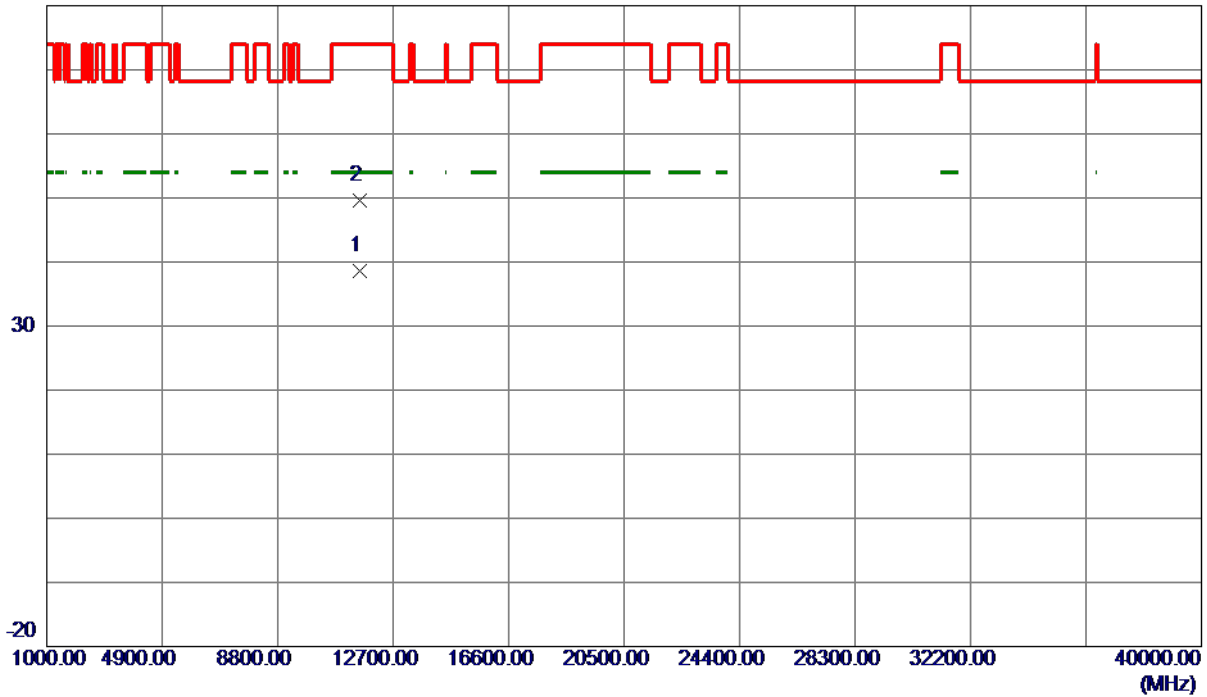


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11589.9700	24.40	14.17	38.57	54.00	-15.43	AVG	
2	11590.4200	35.49	14.17	49.66	74.00	-24.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

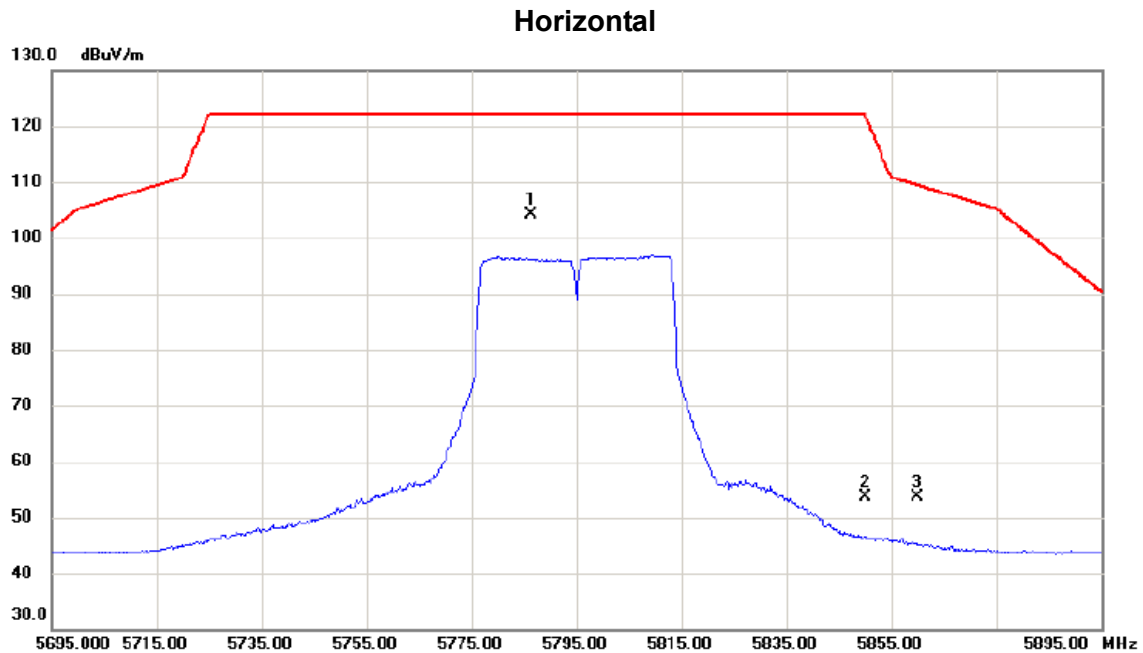

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5786.400	87.41	16.76	104.17	122.20	-18.03	peak	No Limit
2		5850.000	36.69	17.02	53.71	122.20	-68.49	peak	
3		5860.000	36.60	17.06	53.66	109.40	-55.74	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

Horizontal

80 dBuV/m

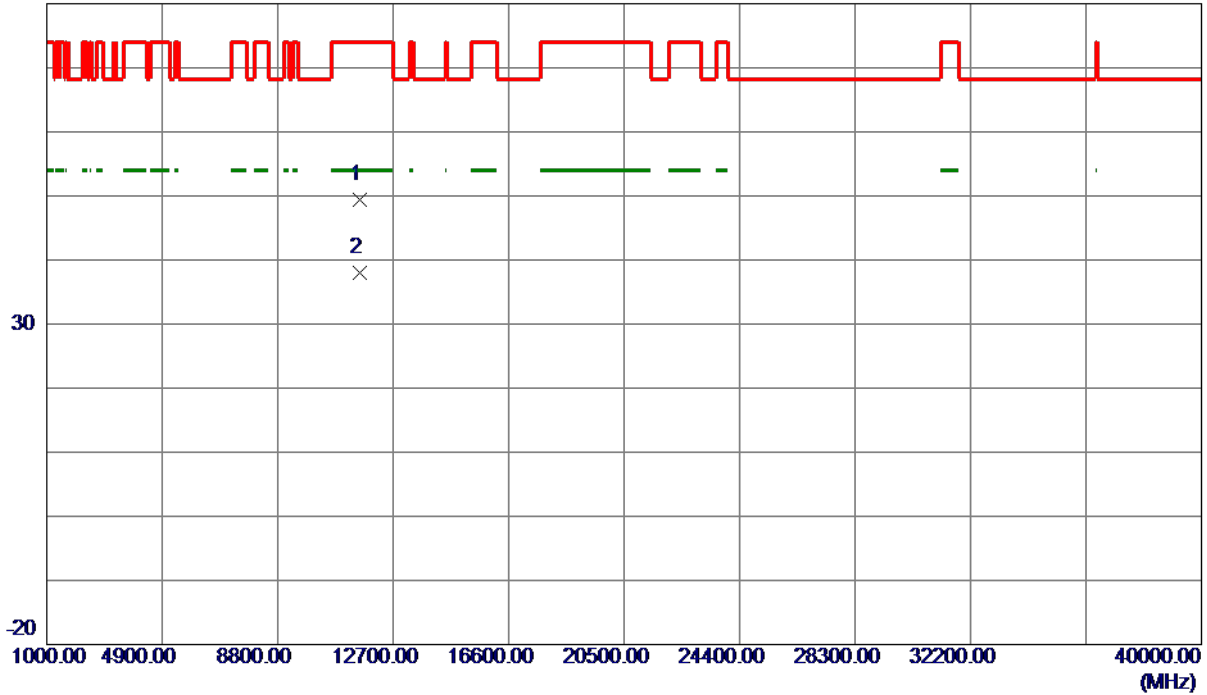

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11589.0050	35.25	14.17	49.42	74.00	-24.58	Peak	
2 *	11592.2350	23.78	14.17	37.95	54.00	-16.05	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Vertical

130 dBuV/m

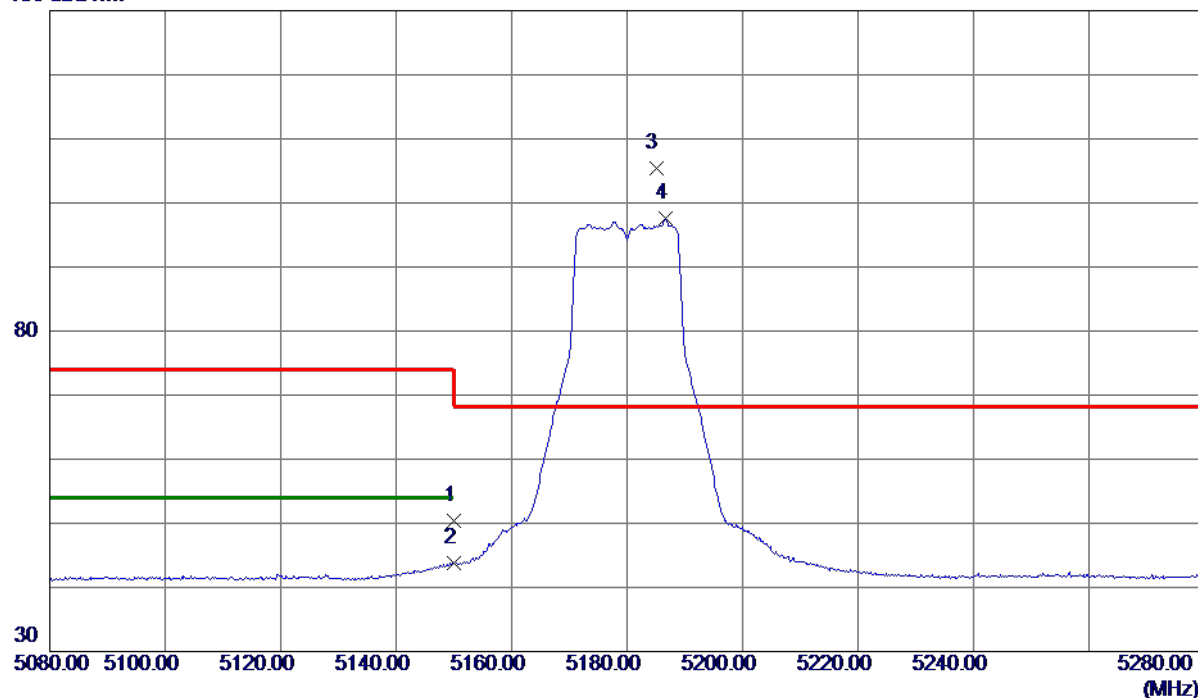

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	35.40	14.91	50.31	74.00	-23.69	Peak	
2	5150.0000	28.81	14.91	43.72	54.00	-10.28	AVG	
3 *	5185.0000	90.35	14.98	105.33	68.30	37.03	Peak	No Limit
4	5186.6000	82.54	14.99	97.53	999.00	-901.47	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Vertical

80 dBuV/m

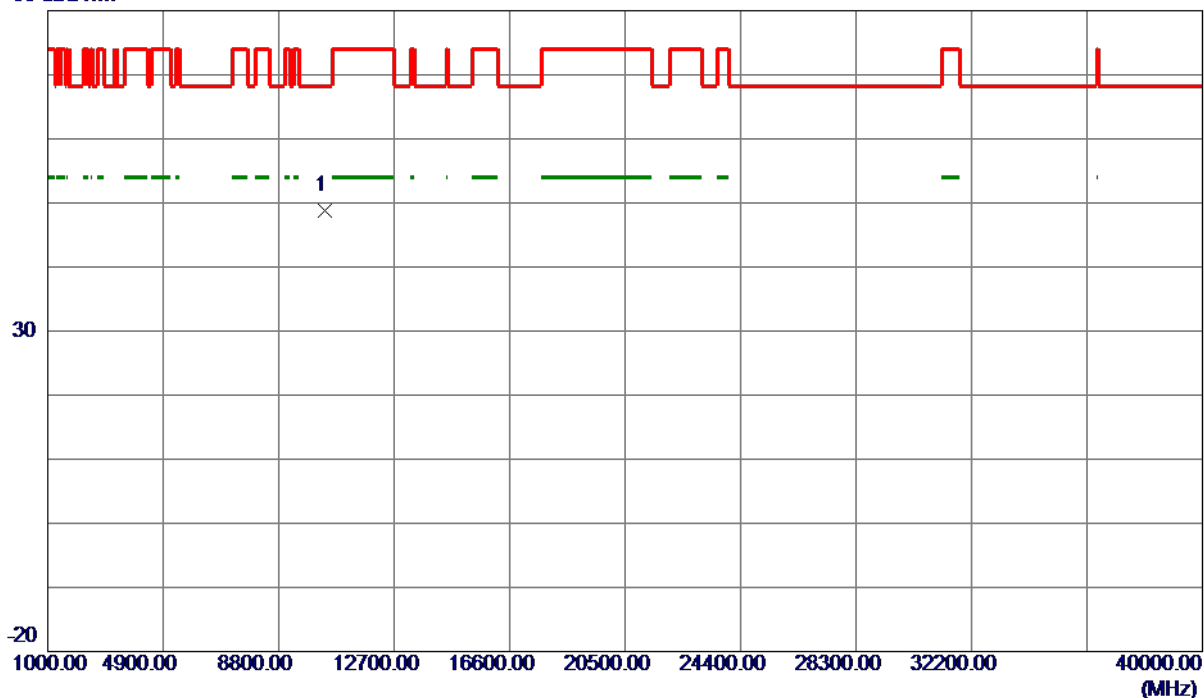

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10364.9400	35.94	12.90	48.84	68.30	-19.46	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Horizontal

130 dBuV/m

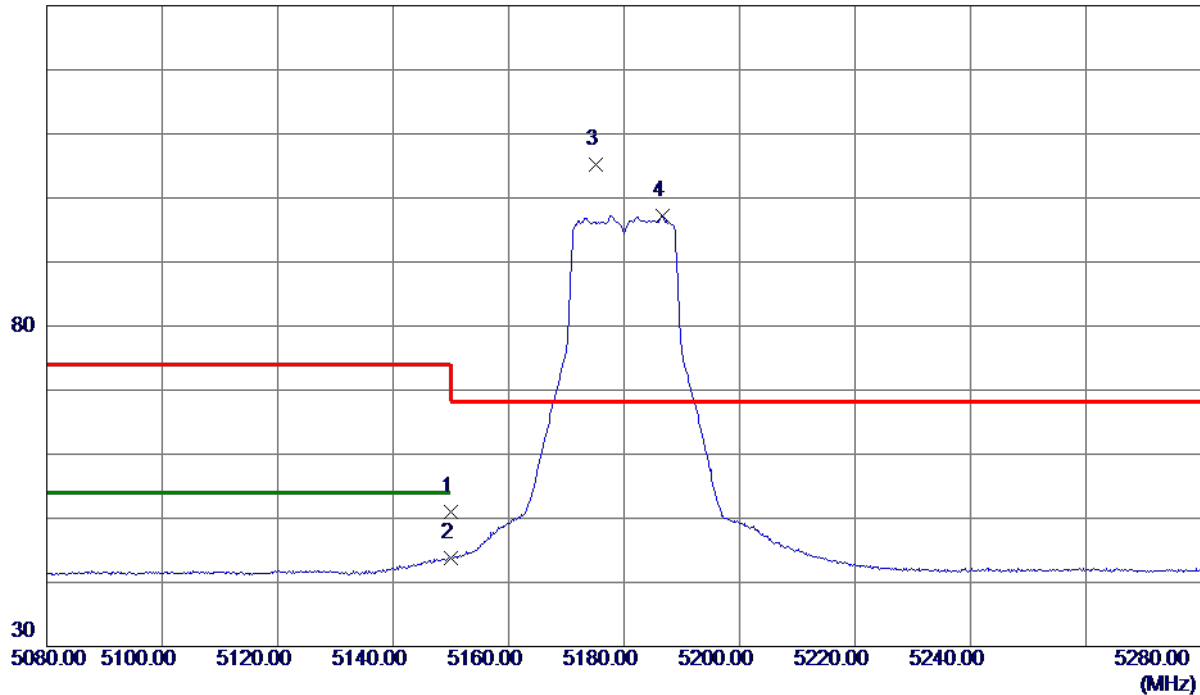

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	36.01	14.91	50.92	74.00	-23.08	Peak	
2	5150.0000	28.97	14.91	43.88	54.00	-10.12	AVG	
3 *	5175.2000	90.26	14.96	105.22	68.30	36.92	Peak	No Limit
4	5186.6000	82.27	14.99	97.26	999.00	-901.74	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Horizontal

80 dBuV/m

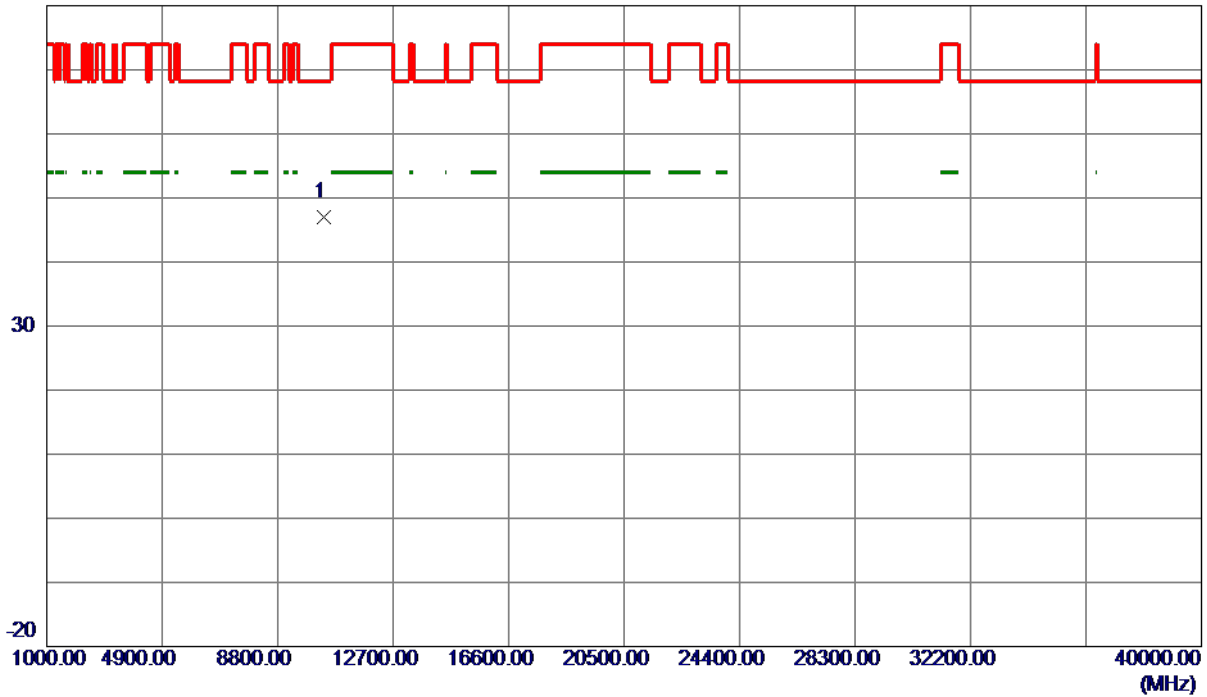


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10361.1800	34.06	12.89	46.95	68.30	-21.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Vertical

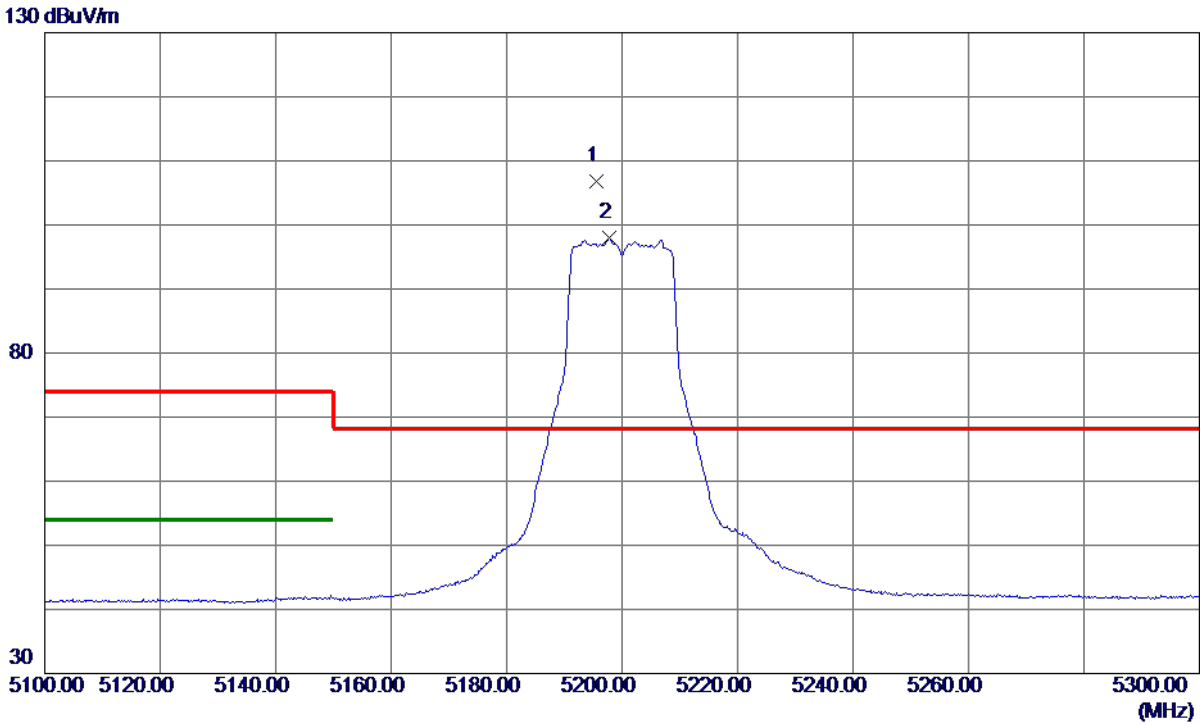


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5195.6000	91.86	15.00	106.86	68.30	38.56	Peak	No Limit
2	5197.8000	82.94	15.01	97.95	999.00	-901.05	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Vertical

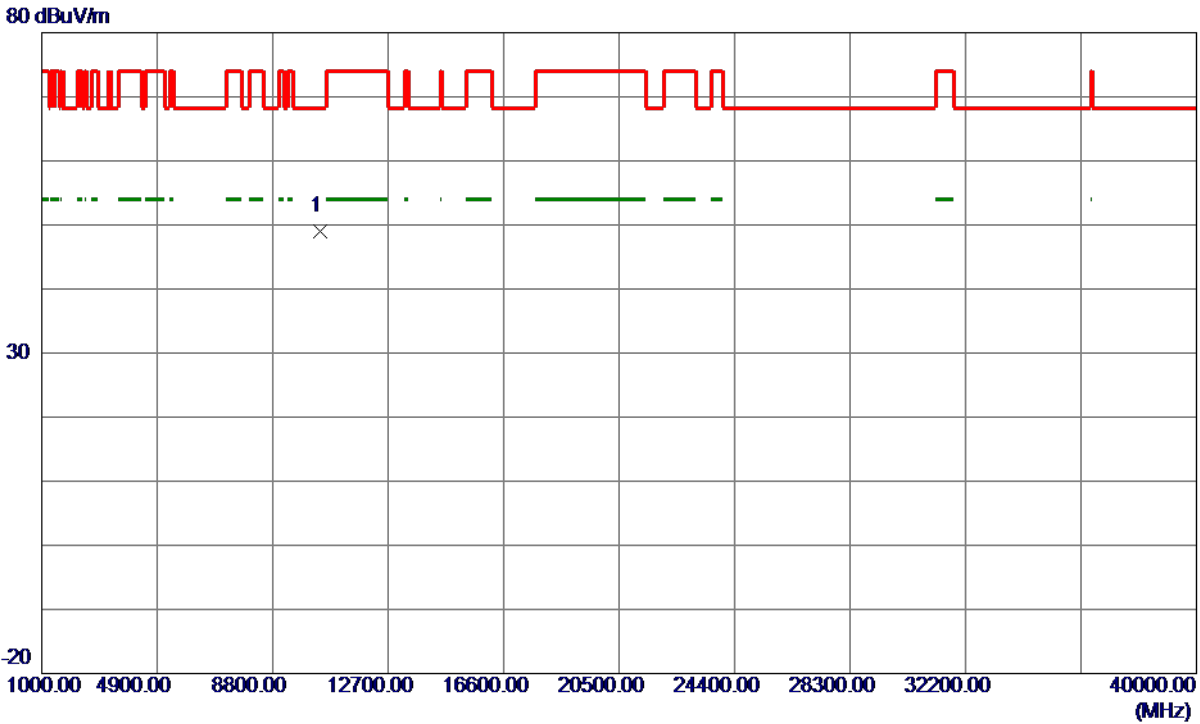


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10406.2000	36.10	12.98	49.08	68.30	-19.22	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Horizontal

130 dBuV/m

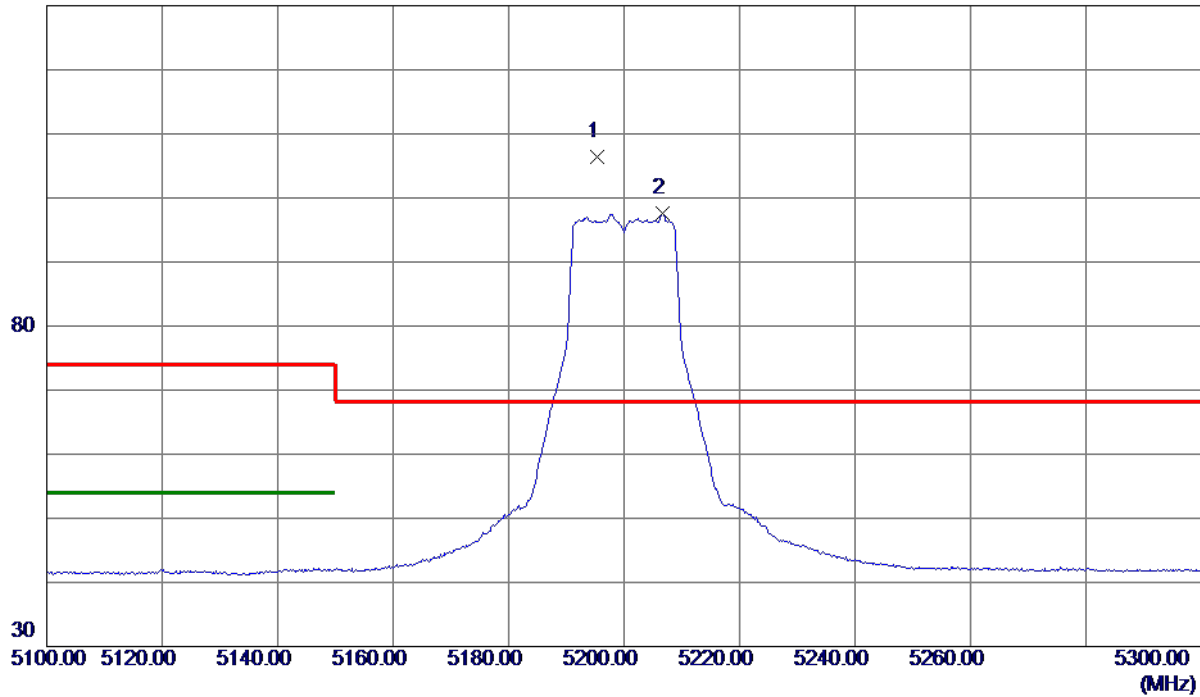


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5195.4000	91.42	15.00	106.42	68.30	38.12	Peak	No Limit
2	5206.6000	82.56	15.03	97.59	999.00	-901.41	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Horizontal

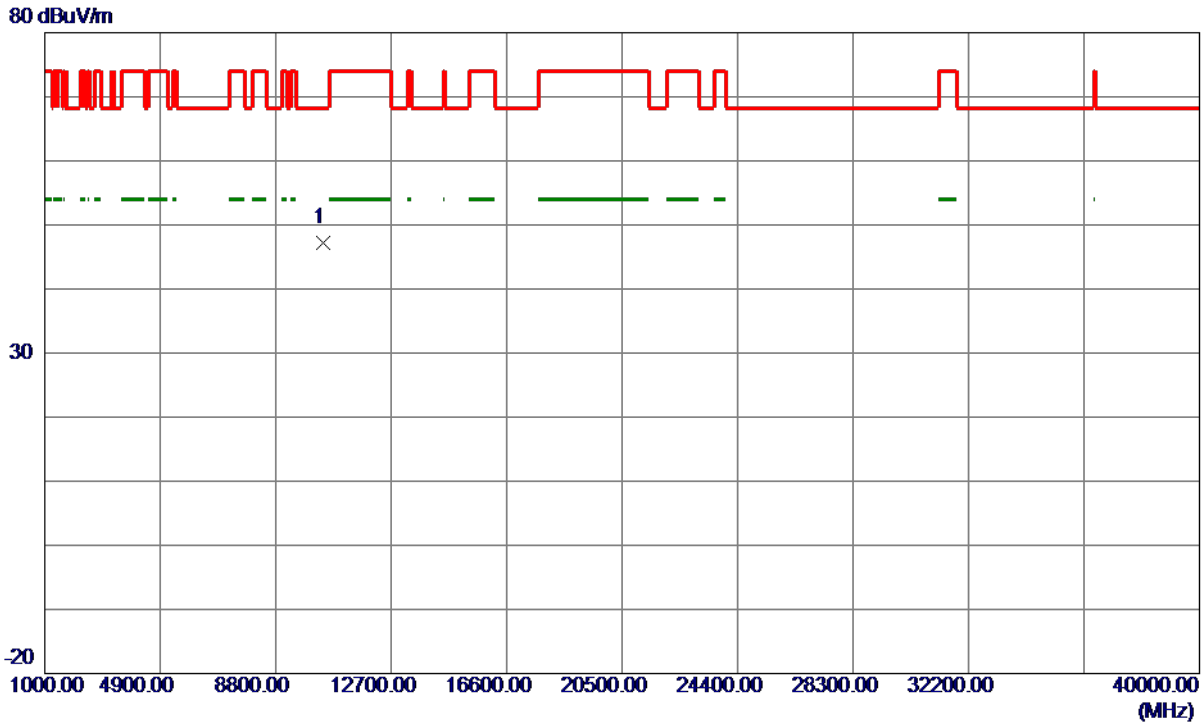

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10392.8000	34.29	12.96	47.25	68.30	-21.05	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Vertical

130 dBuV/m

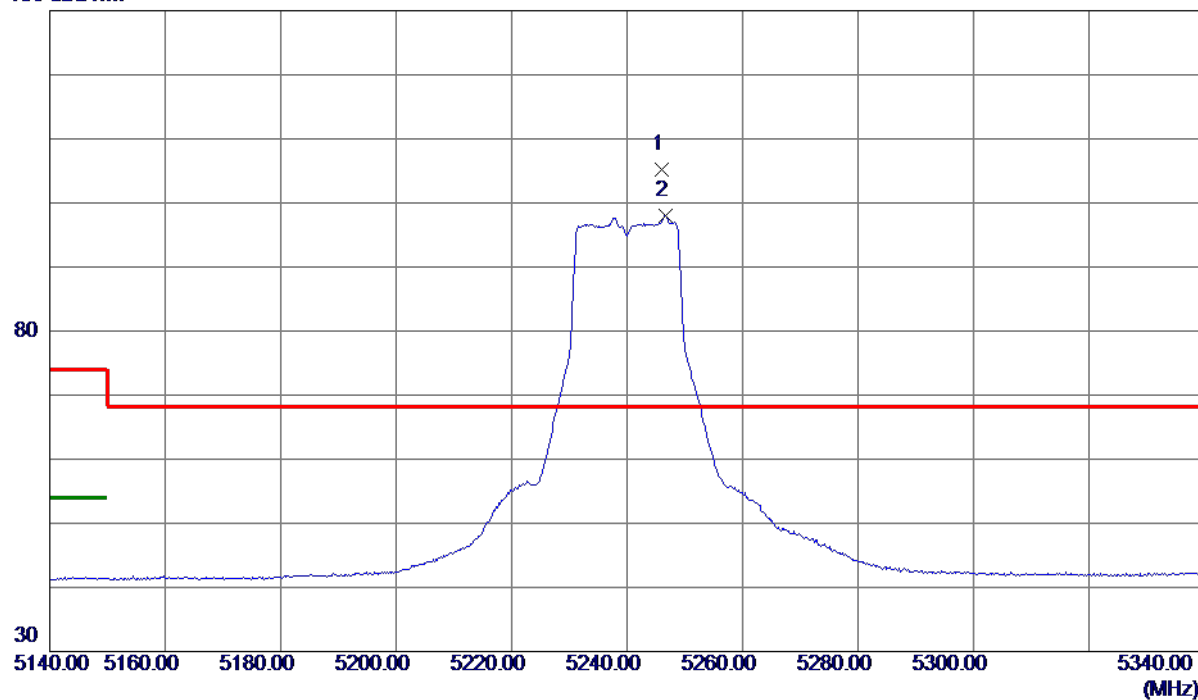


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5246.0000	90.17	15.11	105.28	68.30	36.98	Peak	No Limit
2	5246.6000	82.93	15.11	98.04	999.00	-900.96	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Vertical

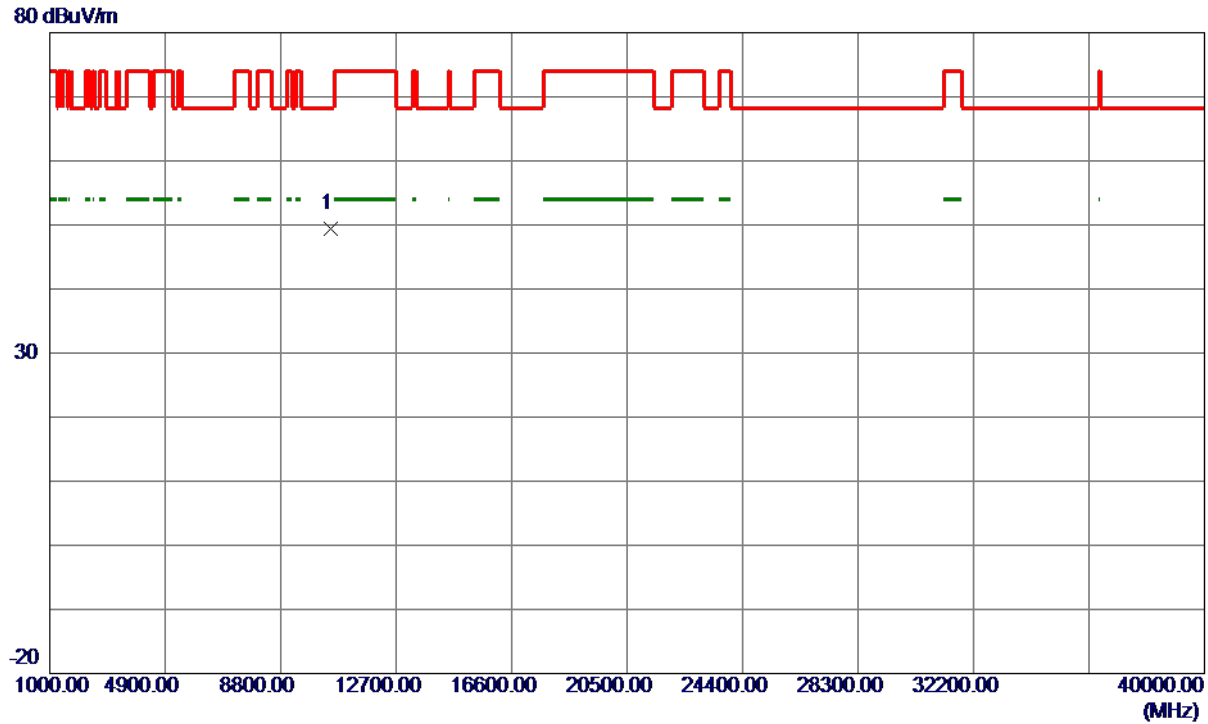

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10477.0400	36.23	13.13	49.36	68.30	-18.94	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Horizontal

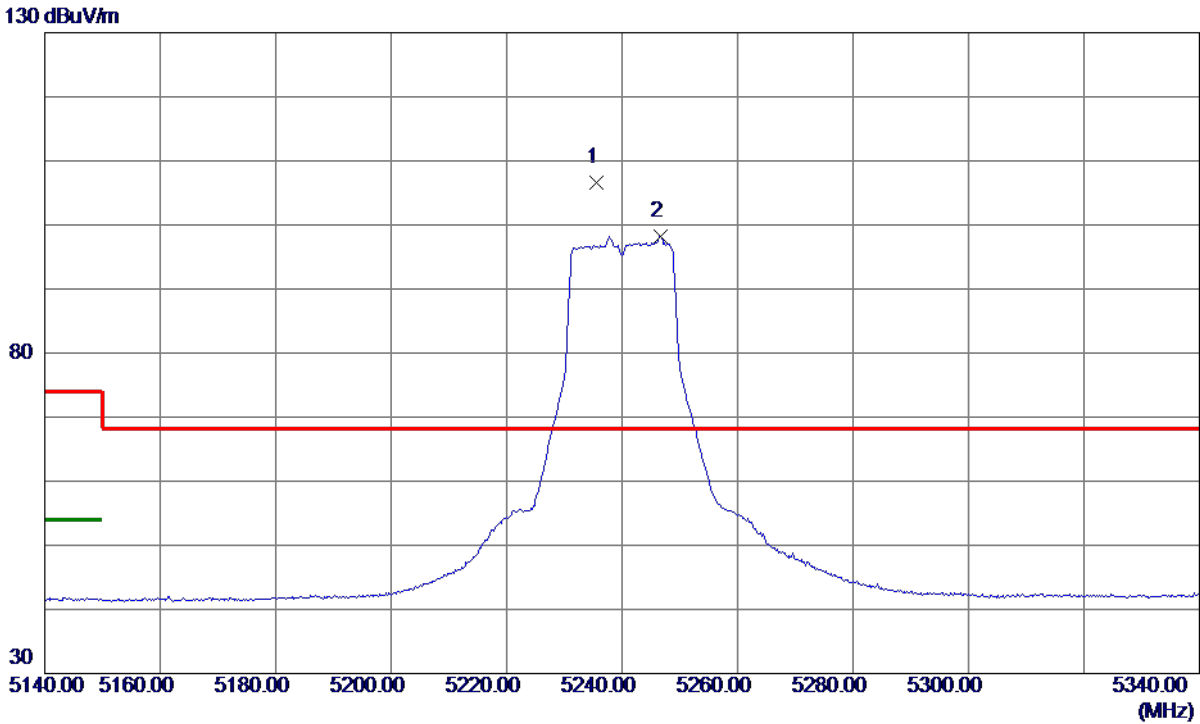


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5235.6000	91.42	15.09	106.51	68.30	38.21	Peak	No Limit
2	5246.6000	83.09	15.11	98.20	999.00	-900.80	AVG	No Limit

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Horizontal

80 dBuV/m

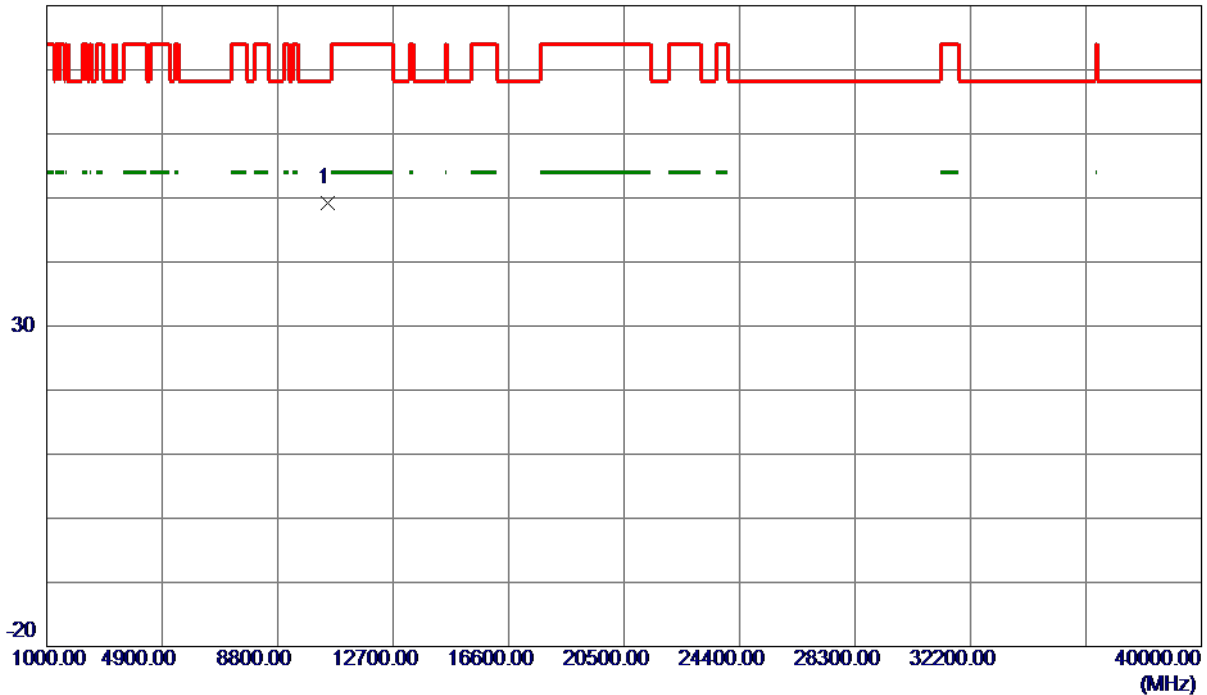

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10470.6800	36.05	13.12	49.17	68.30	-19.13	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Vertical

130 dBuV/m

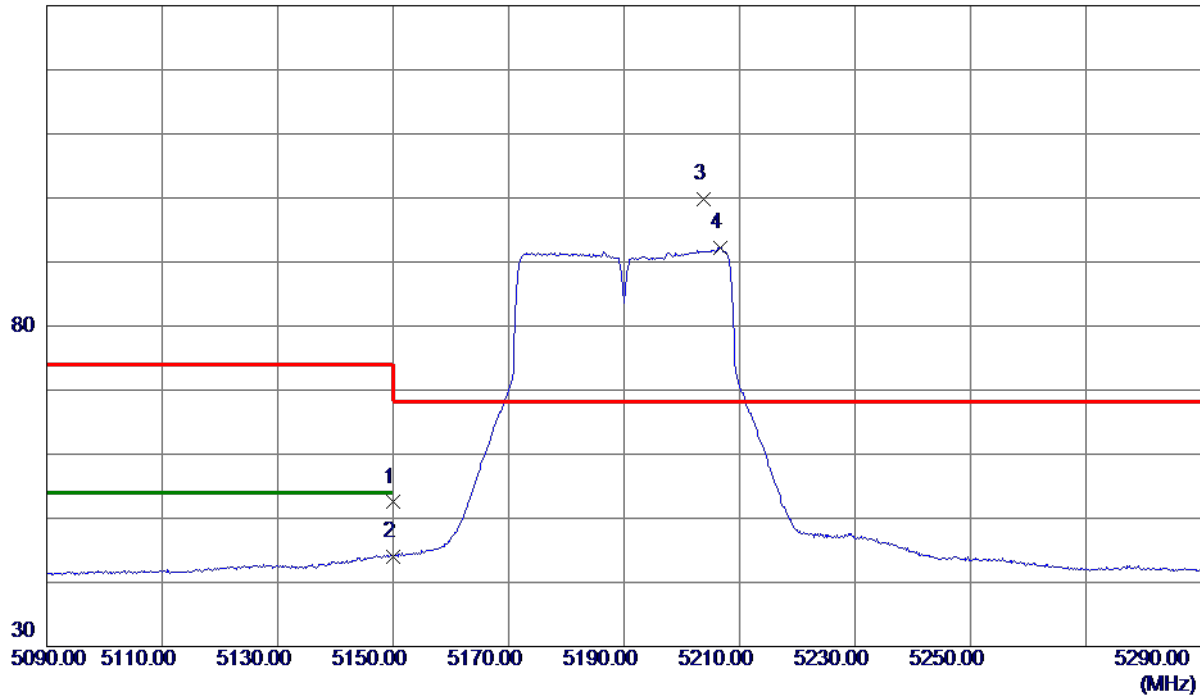

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	37.59	14.91	52.50	74.00	-21.50	Peak	
2	5150.0000	29.14	14.91	44.05	54.00	-9.95	AVG	
3 *	5203.8000	84.87	15.02	99.89	68.30	31.59	Peak	No Limit
4	5206.6000	77.23	15.03	92.26	999.00	-906.74	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Vertical

80 dBuV/m

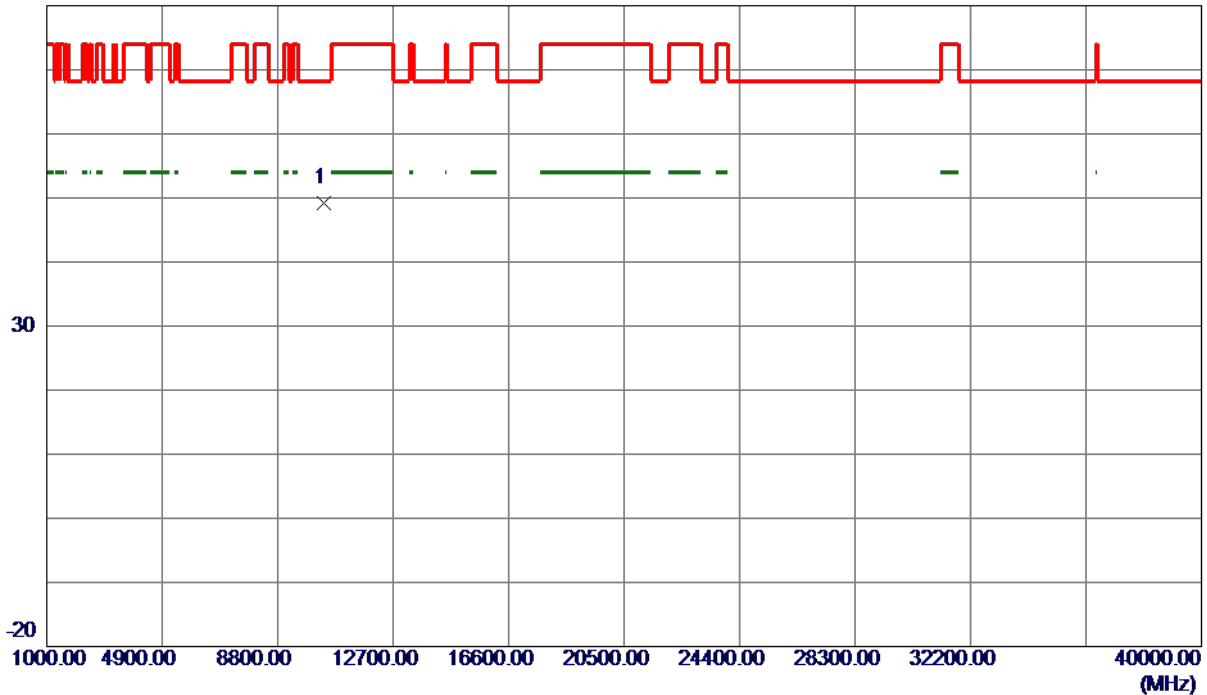

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10376.2200	36.19	12.92	49.11	68.30	-19.19	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

130 dBuV/m

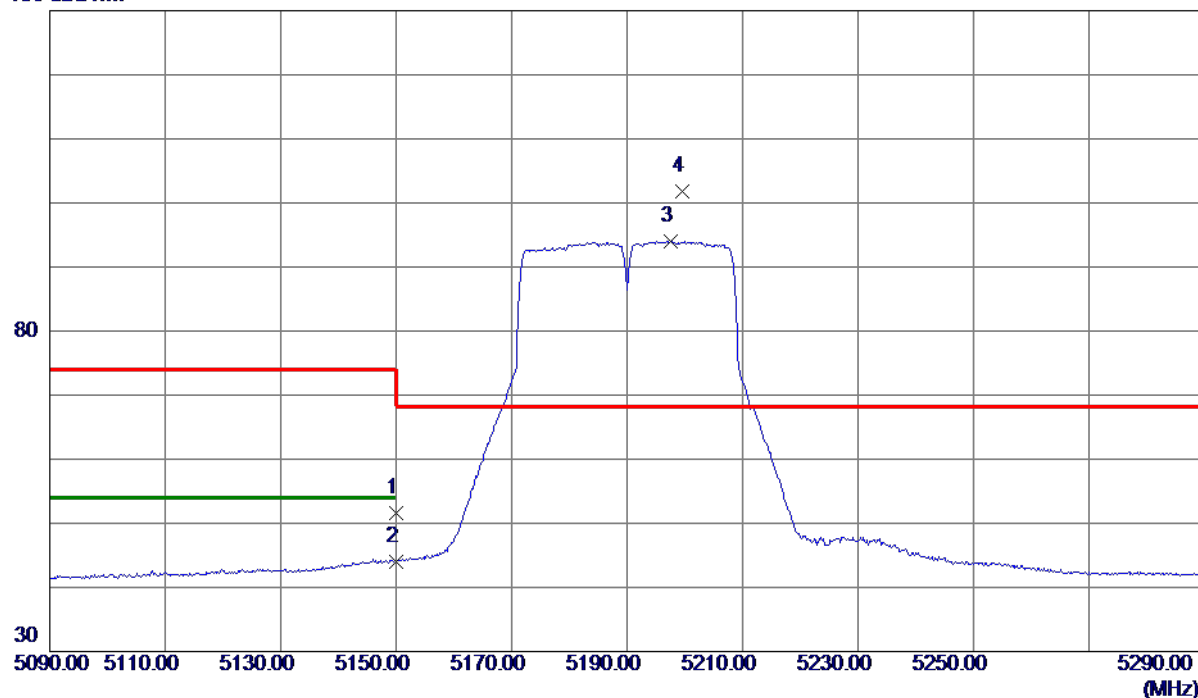

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	36.69	14.91	51.60	74.00	-22.40	Peak	
2	5150.0000	29.10	14.91	44.01	54.00	-9.99	AVG	
3	5197.6000	79.05	15.01	94.06	999.00	-904.94	AVG	No Limit
4 *	5199.6000	86.80	15.01	101.81	68.30	33.51	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

80 dBuV/m

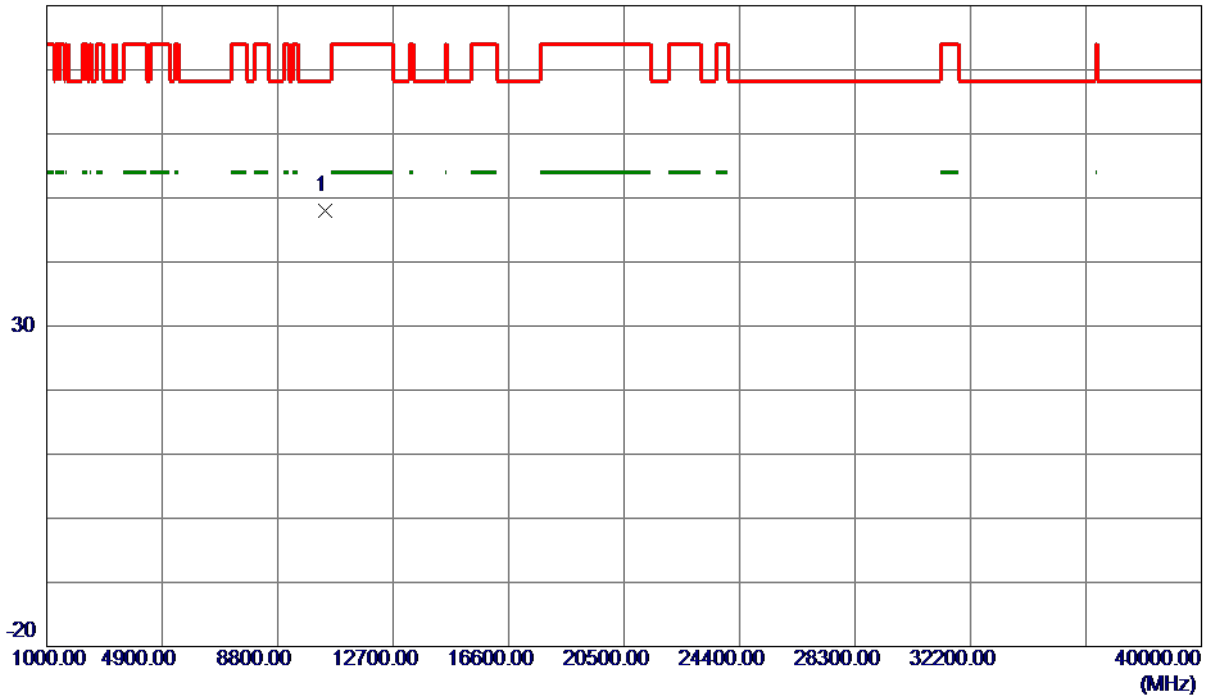

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10386.6800	34.97	12.94	47.91	68.30	-20.39	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Vertical

130 dBuV/m

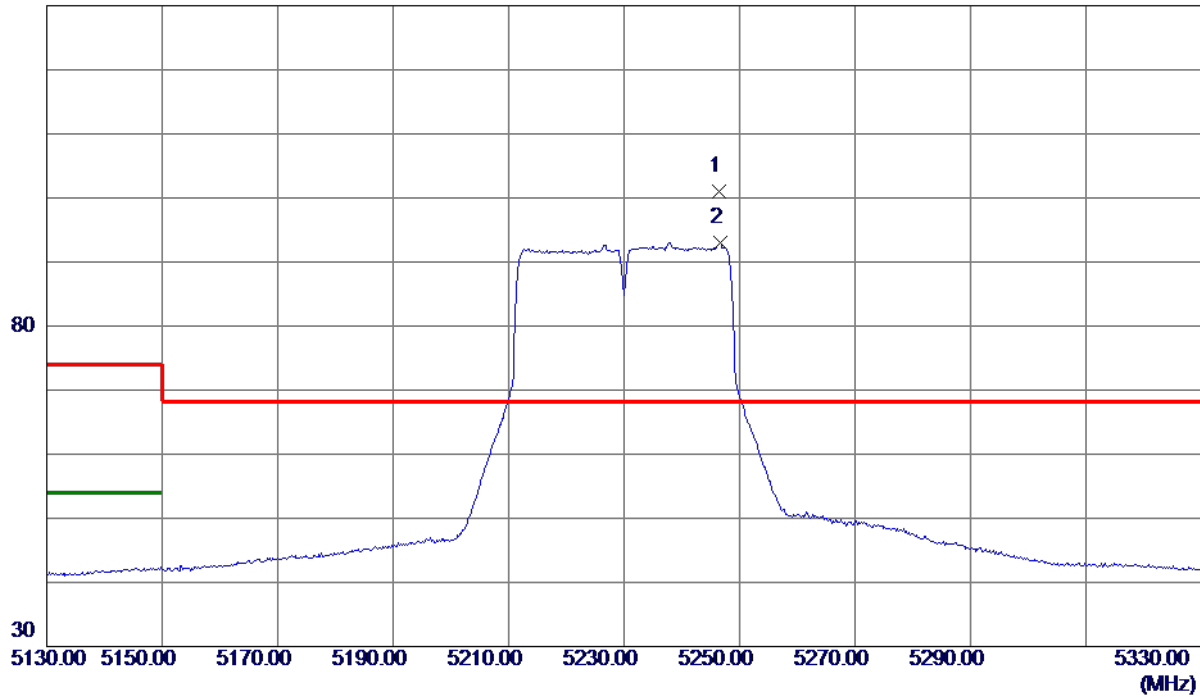


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5246.4000	85.83	15.11	100.94	68.30	32.64	Peak	No Limit
2	5246.6000	77.99	15.11	93.10	999.00	-905.90	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Vertical

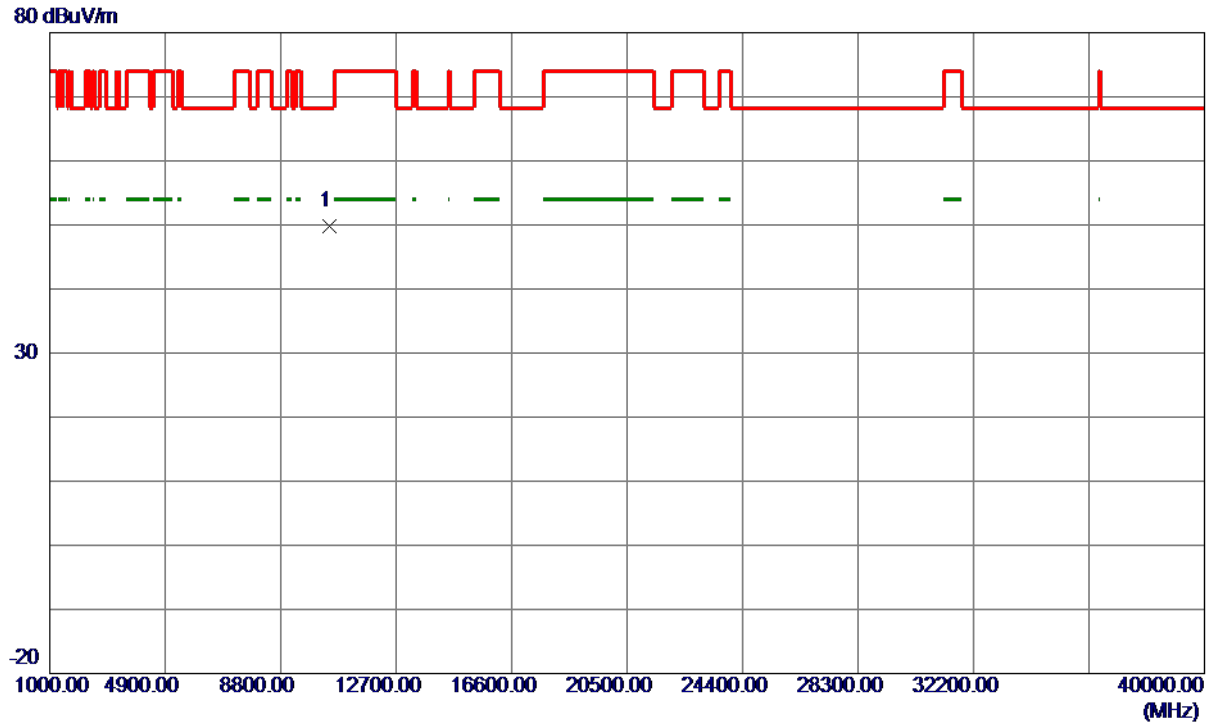

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10459.8200	36.72	13.09	49.81	68.30	-18.49	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Horizontal

130 dBuV/m

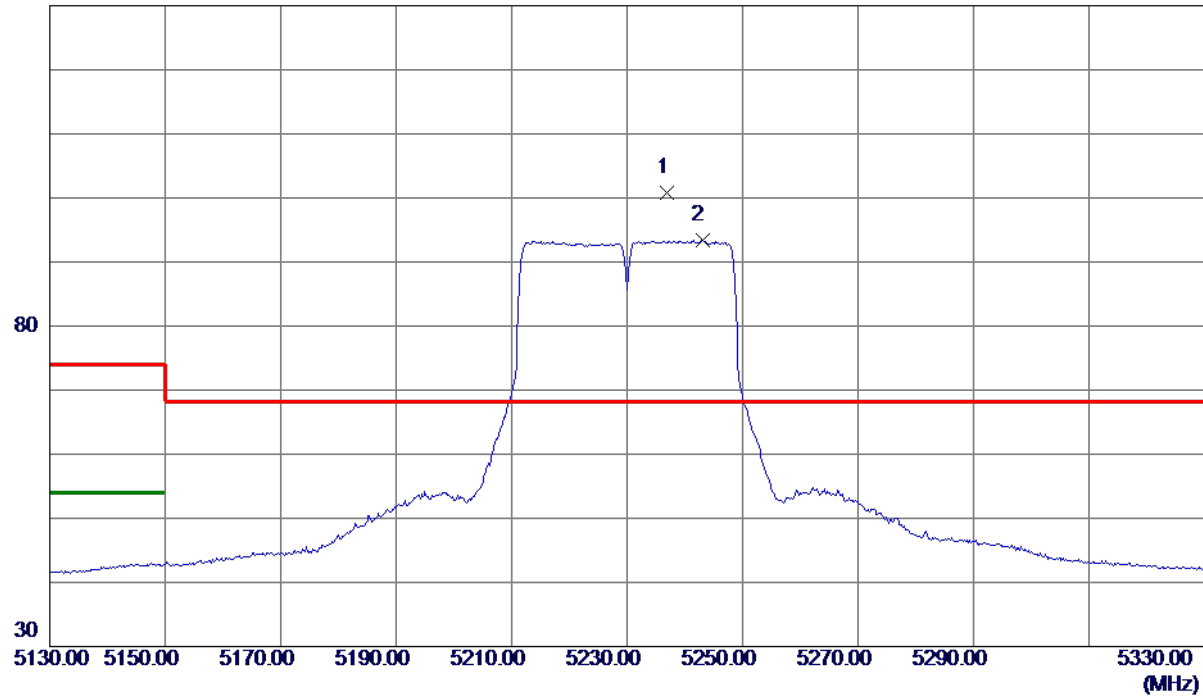

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5236.8000	85.72	15.09	100.81	68.30	32.51	Peak	No Limit
2	5243.0000	78.30	15.10	93.40	999.00	-905.60	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Horizontal

80 dBuV/m

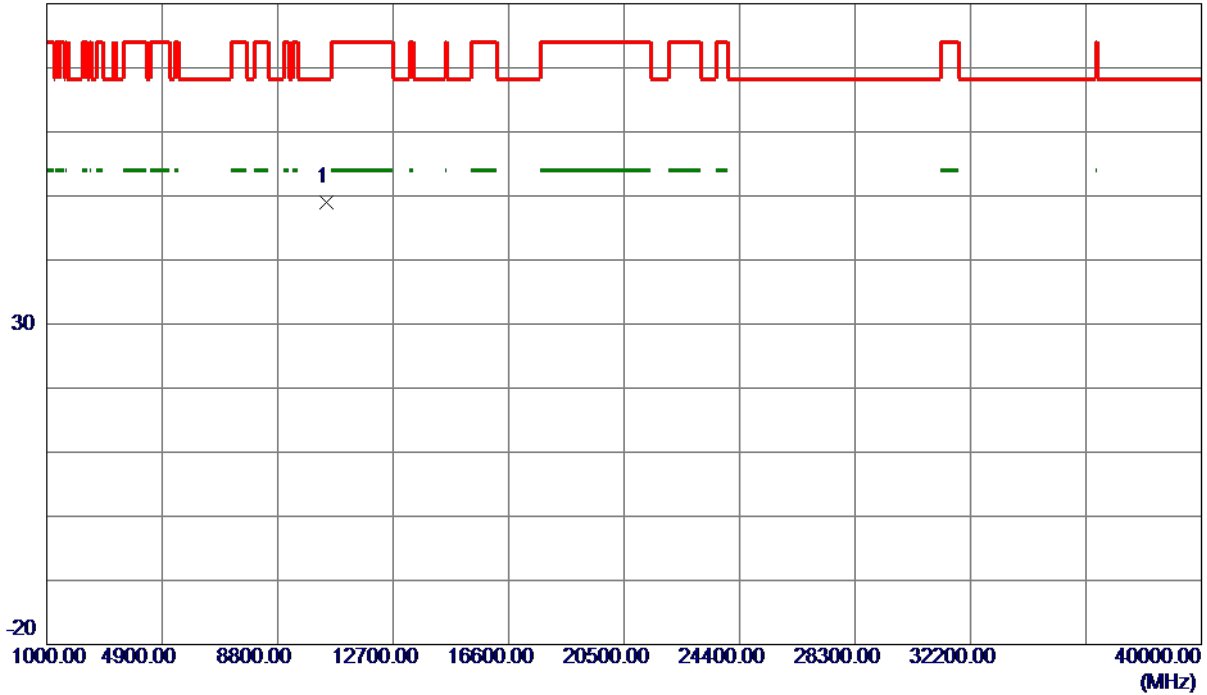

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10467.5000	35.92	13.11	49.03	68.30	-19.27	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

130 dBuV/m

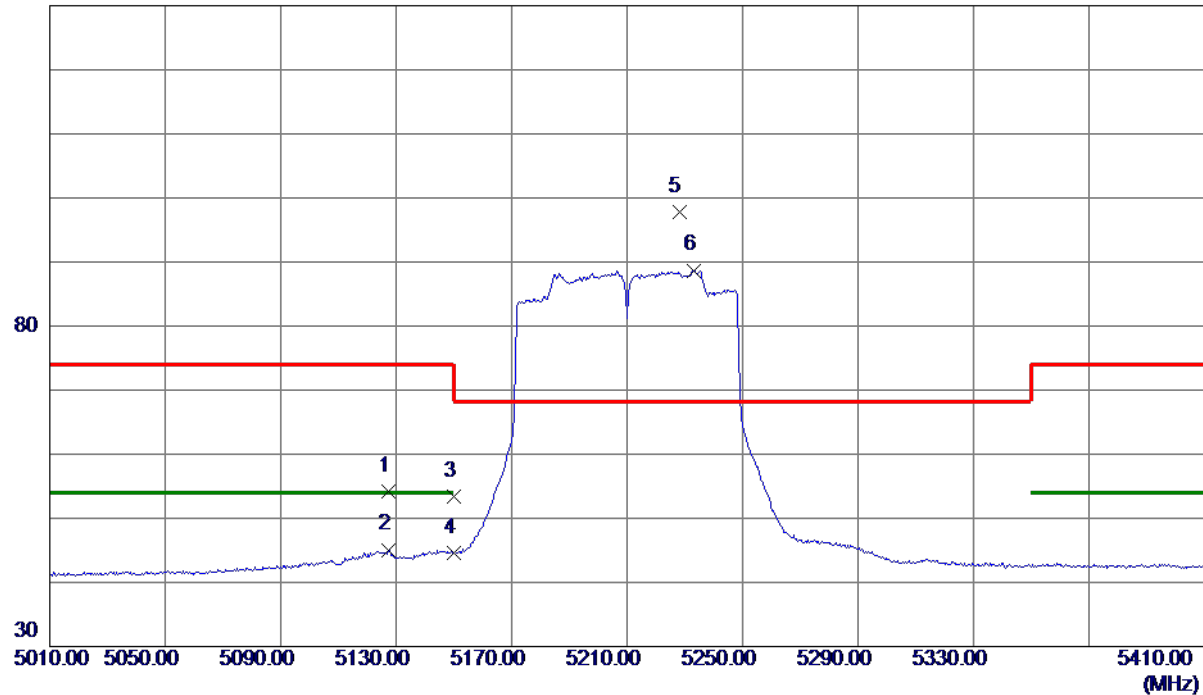

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5127.2000	39.27	14.86	54.13	74.00	-19.87	Peak	
2	5127.2000	30.24	14.86	45.10	54.00	-8.90	AVG	
3	5150.0000	38.53	14.91	53.44	74.00	-20.56	Peak	
4	5150.0000	29.62	14.91	44.53	54.00	-9.47	AVG	
5 *	5228.0000	82.77	15.07	97.84	68.30	29.54	Peak	No Limit
6	5233.2000	73.62	15.08	88.70	999.00	-910.30	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

80 dBuV/m

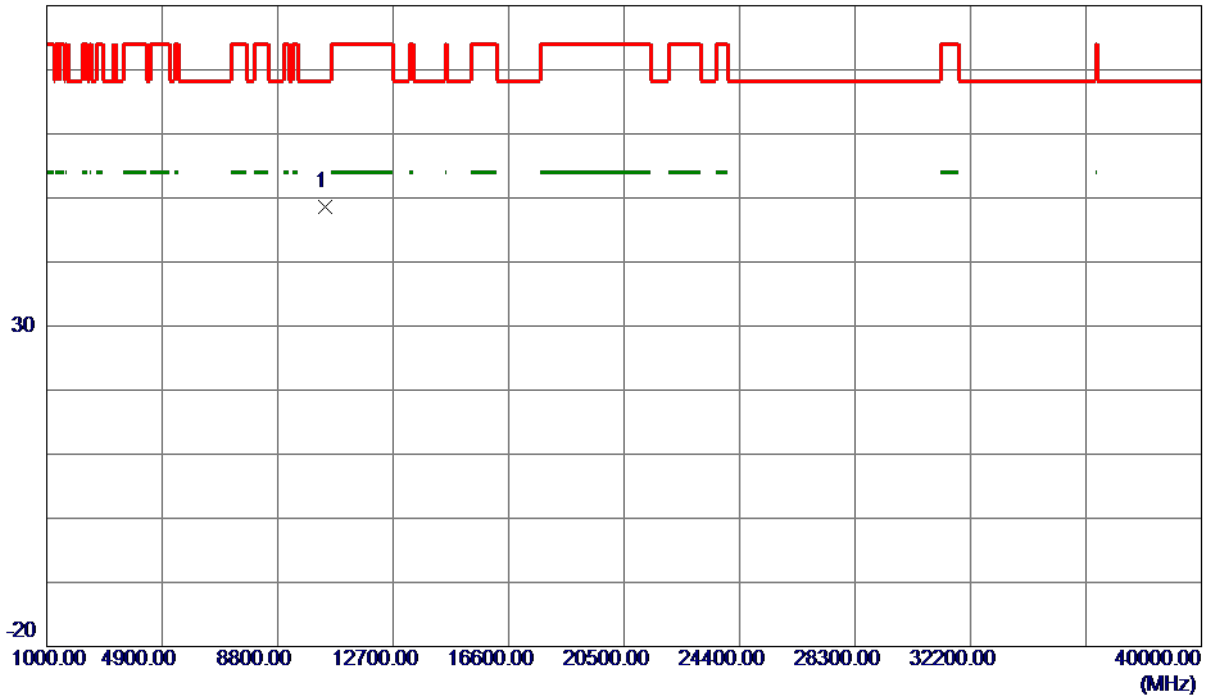

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10412.3800	35.65	13.00	48.65	68.30	-19.65	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

130 dBuV/m

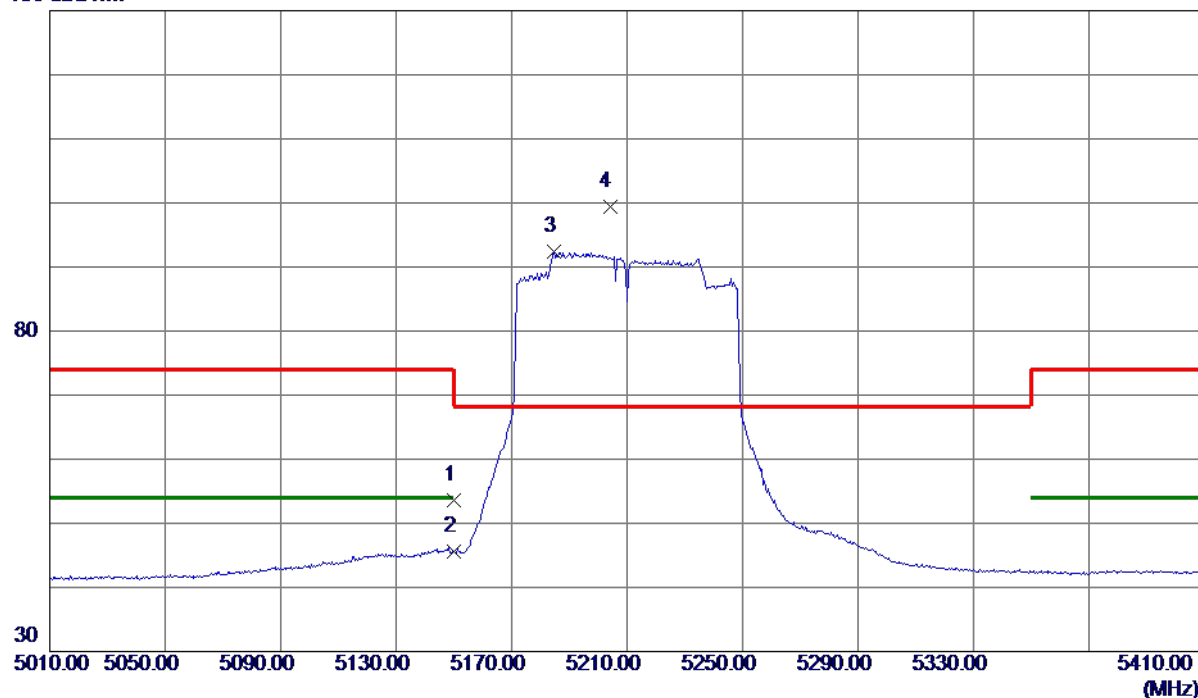

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	38.60	14.91	53.51	74.00	-20.49	Peak	
2	5150.0000	30.77	14.91	45.68	54.00	-8.32	AVG	
3	5184.8000	77.41	14.98	92.39	999.00	-906.61	AVG	No Limit
4 *	5204.0000	84.40	15.02	99.42	68.30	31.12	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

80 dBuV/m

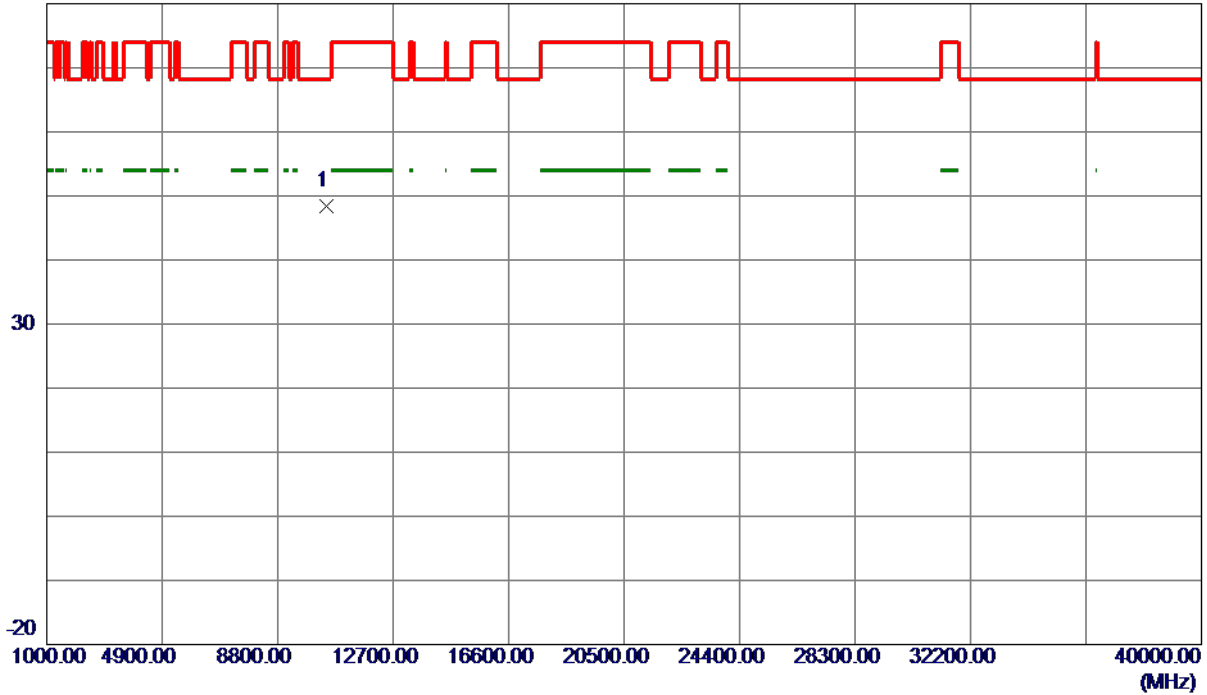


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10427.5000	35.37	13.03	48.40	68.30	-19.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT160) Mode 5250 MHz

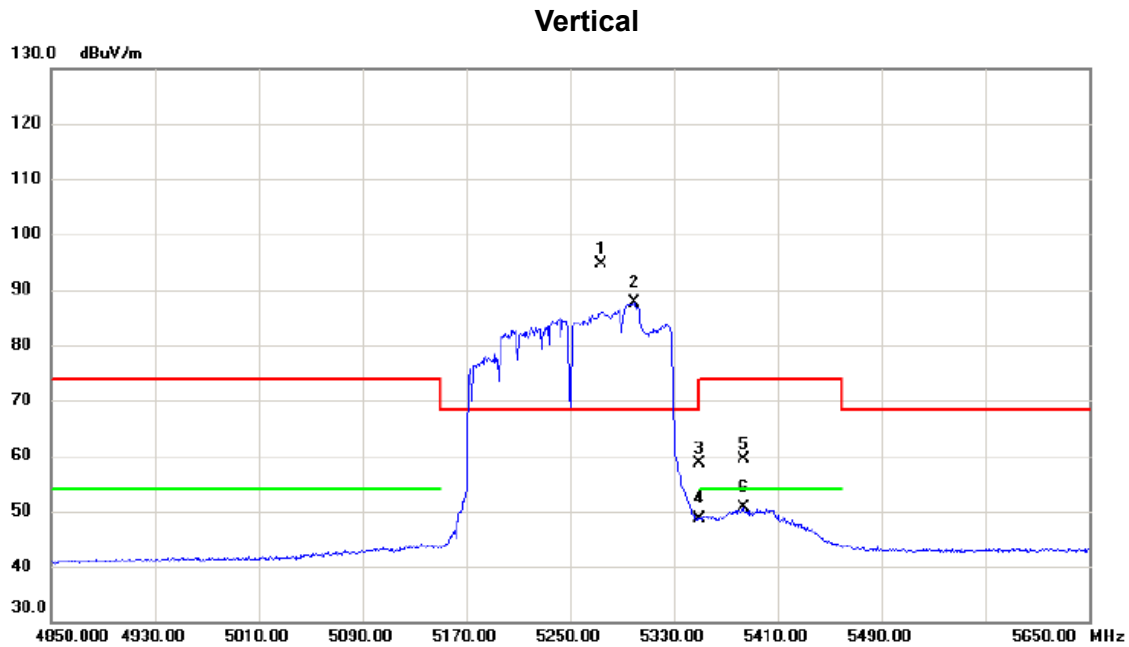


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5274.000	79.55	15.17	94.72	68.30	26.42	peak	No Limit
2	X	5299.600	72.40	15.23	87.63	68.30	19.33	AVG	No Limit
3		5350.000	43.21	15.32	58.53	74.00	-15.47	peak	
4		5350.000	33.36	15.32	48.68	54.00	-5.32	AVG	
5		5383.600	43.88	15.40	59.28	74.00	-14.72	peak	
6		5383.600	35.33	15.40	50.73	54.00	-3.27	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT160) Mode 5250 MHz

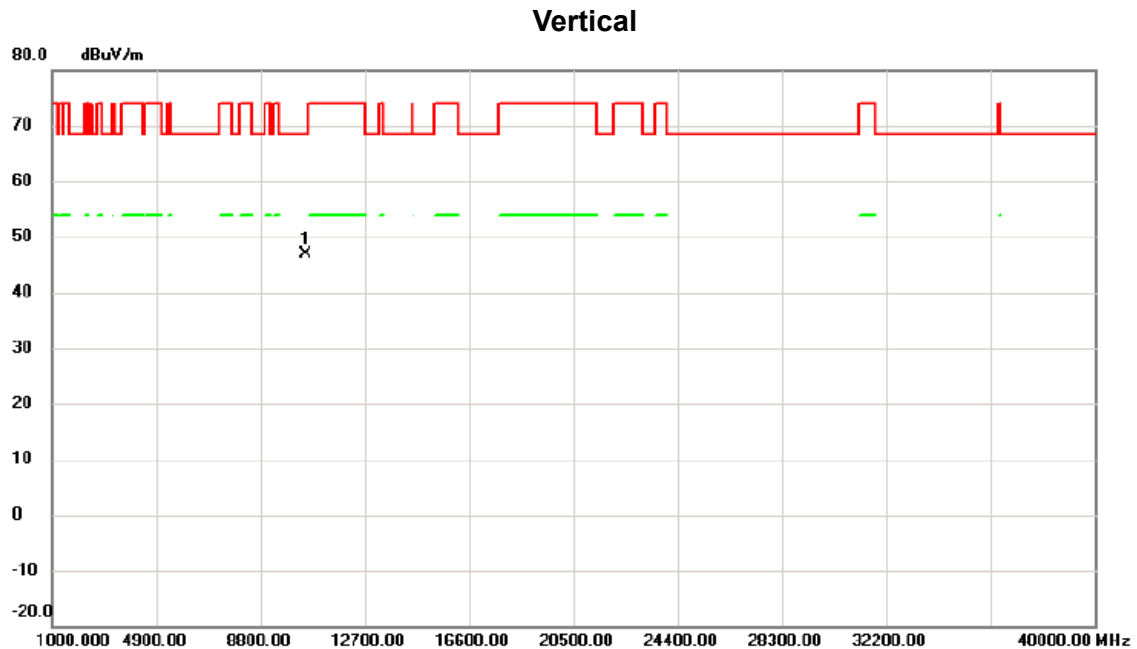


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10500.650	33.76	13.18	46.94	68.30	-21.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT160) Mode 5250 MHz

Horizontal

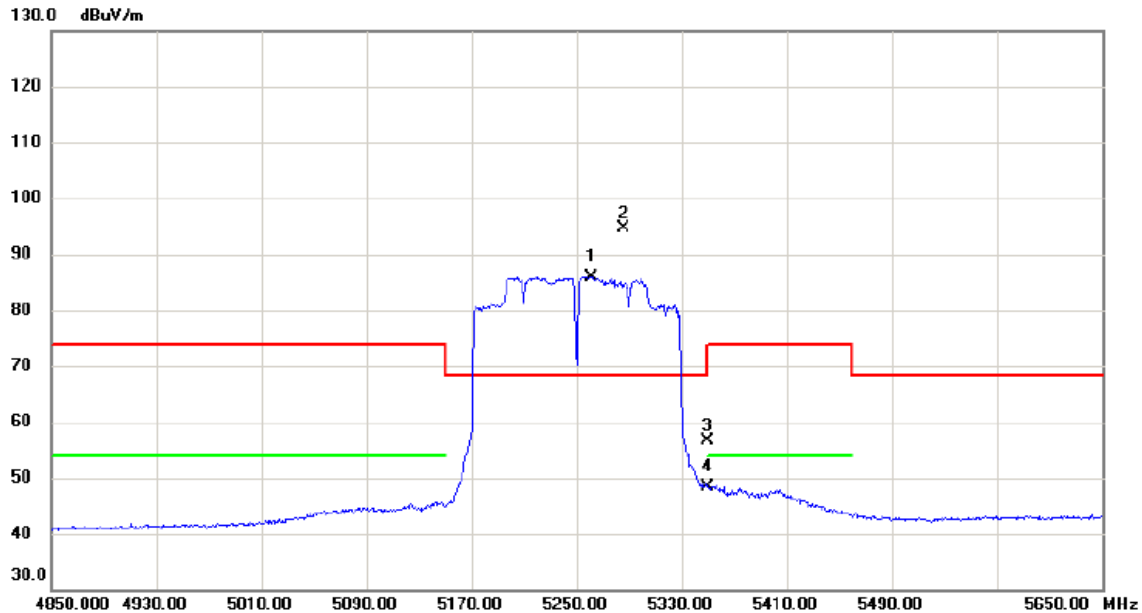


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5261.200	70.83	15.14	85.97	68.30	17.67	AVG	No Limit
2	*	5286.000	79.53	15.19	94.72	68.30	26.42	peak	No Limit
3		5350.000	41.26	15.32	56.58	74.00	-17.42	peak	
4		5350.000	33.12	15.32	48.44	54.00	-5.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT160) Mode 5250 MHz

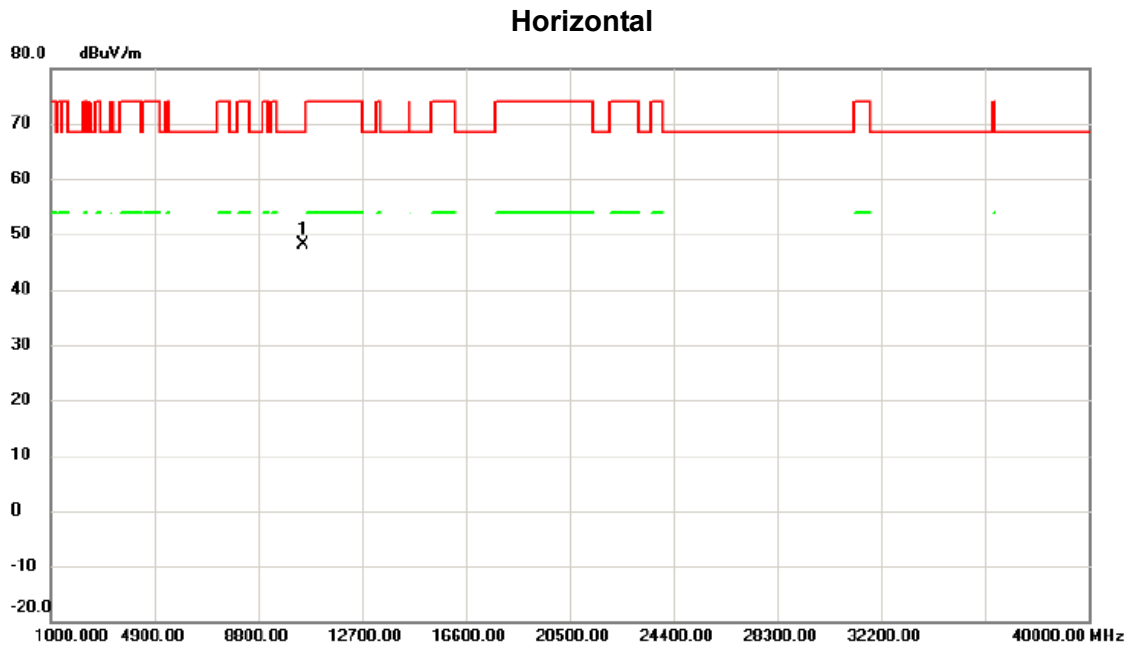

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10501.410	34.99	13.18	48.17	68.30	-20.13	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Vertical

130 dBuV/m

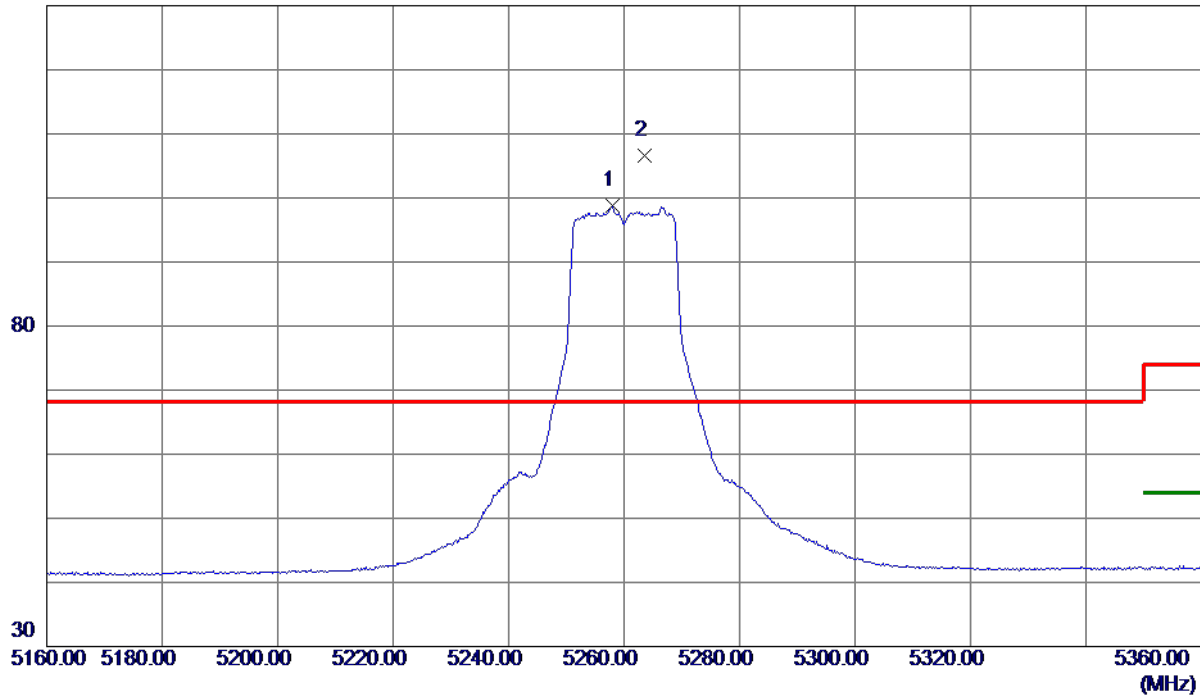

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5258.0000	83.61	15.13	98.74	999.00	-900.26	AVG	No Limit
2 *	5263.6000	91.40	15.15	106.55	68.30	38.25	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Vertical

80 dBuV/m

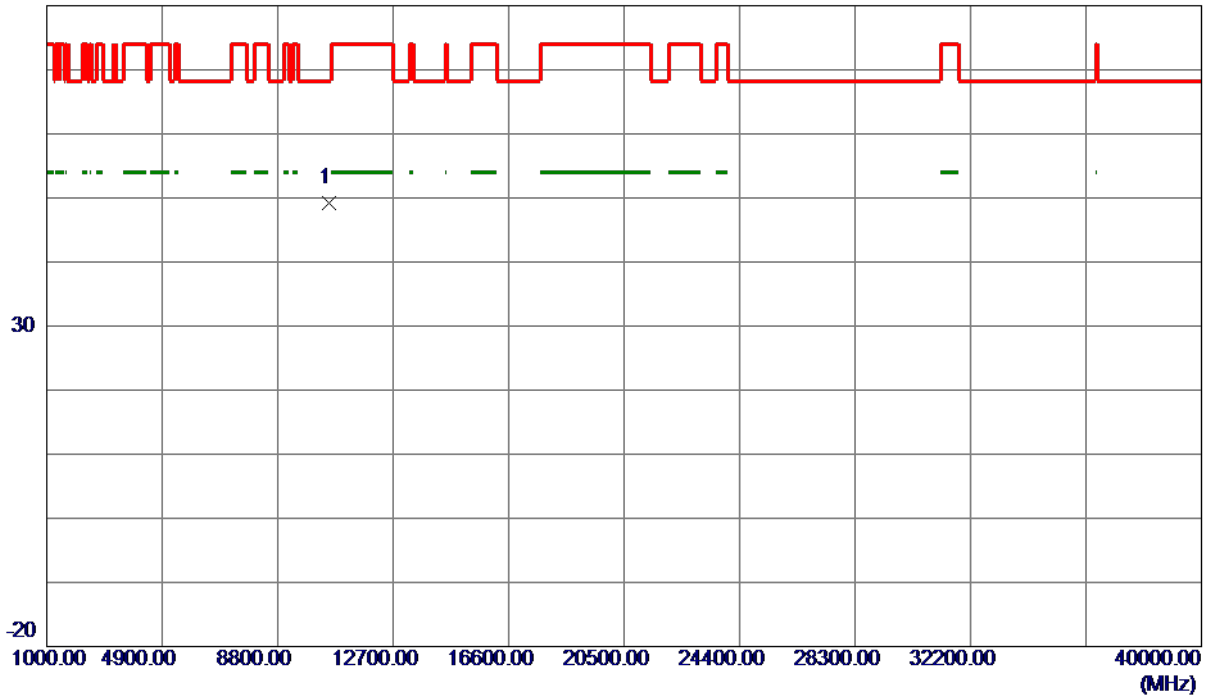

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10518.9800	36.04	13.19	49.23	68.30	-19.07	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Horizontal

130 dBuV/m

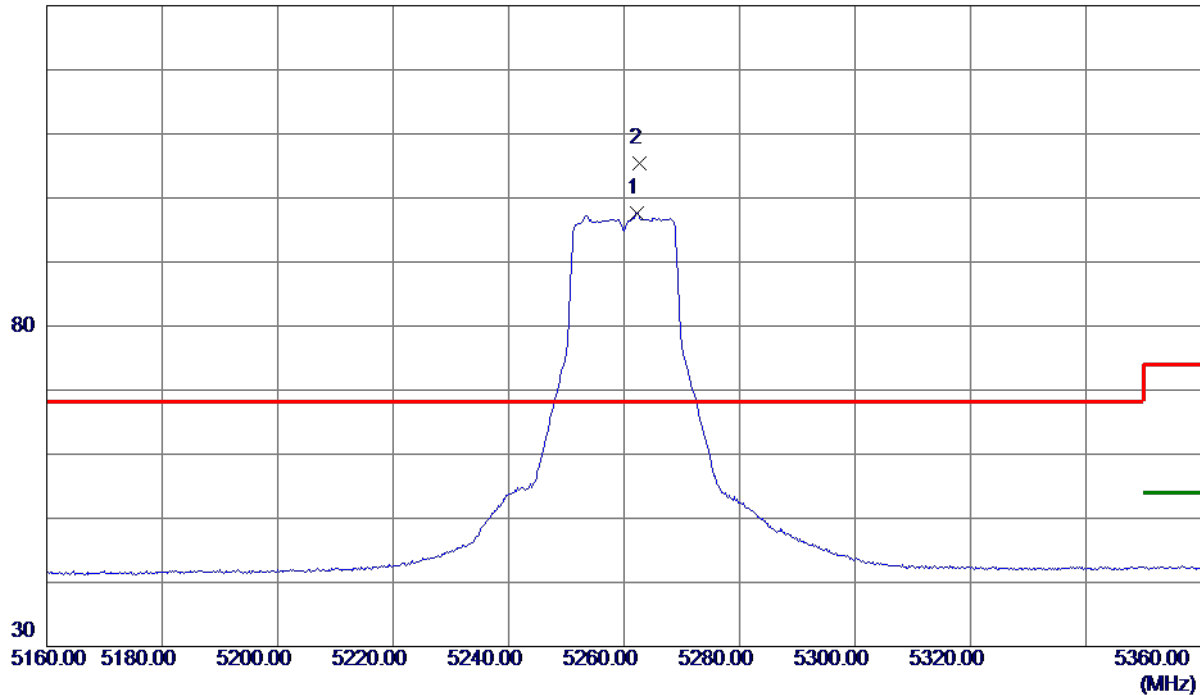

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5262.2000	82.49	15.14	97.63	999.00	-901.37	AVG	No Limit
2 *	5262.6000	90.27	15.14	105.41	68.30	37.11	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Horizontal

80 dBuV/m

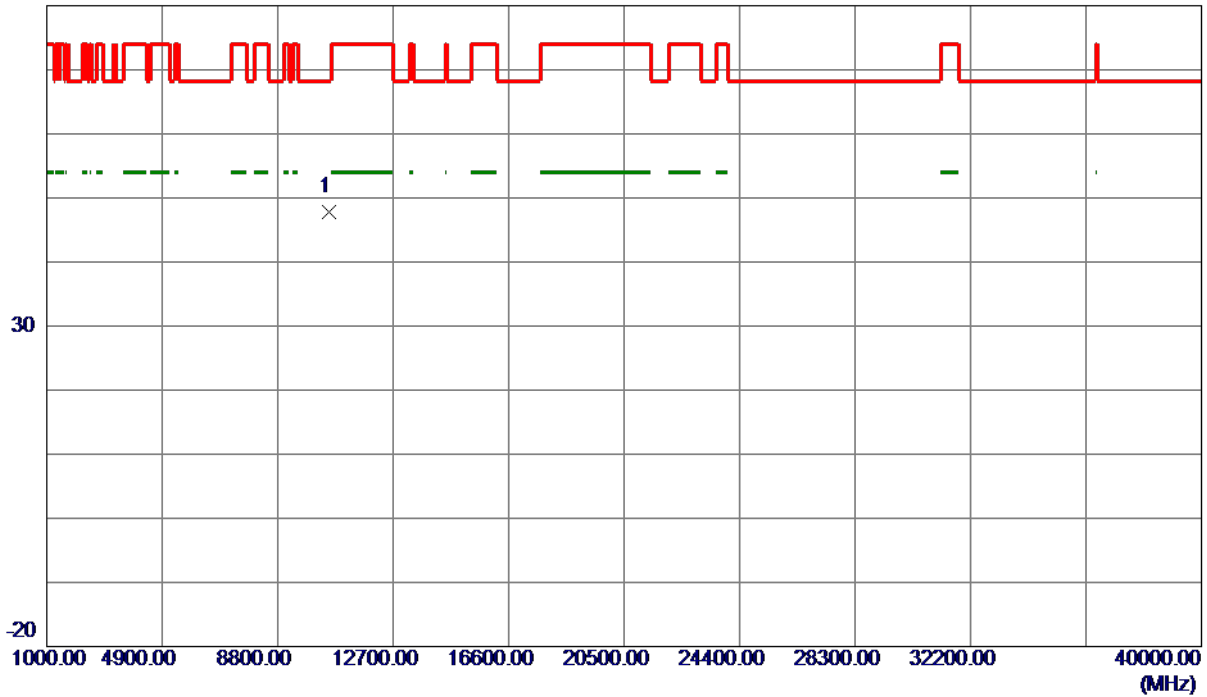

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10524.2000	34.65	13.19	47.84	68.30	-20.46	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Vertical

130 dBuV/m

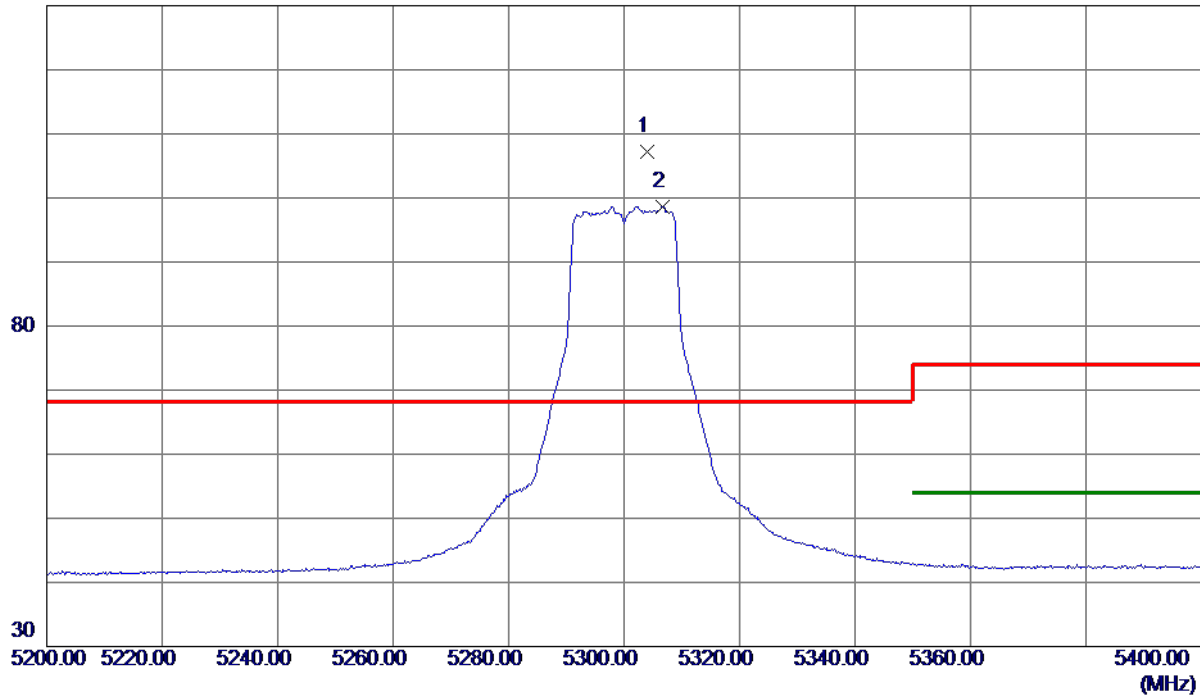


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5304.0000	92.04	15.23	107.27	68.30	38.97	Peak	No Limit
2	5306.6000	83.43	15.23	98.66	999.00	-900.34	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Vertical

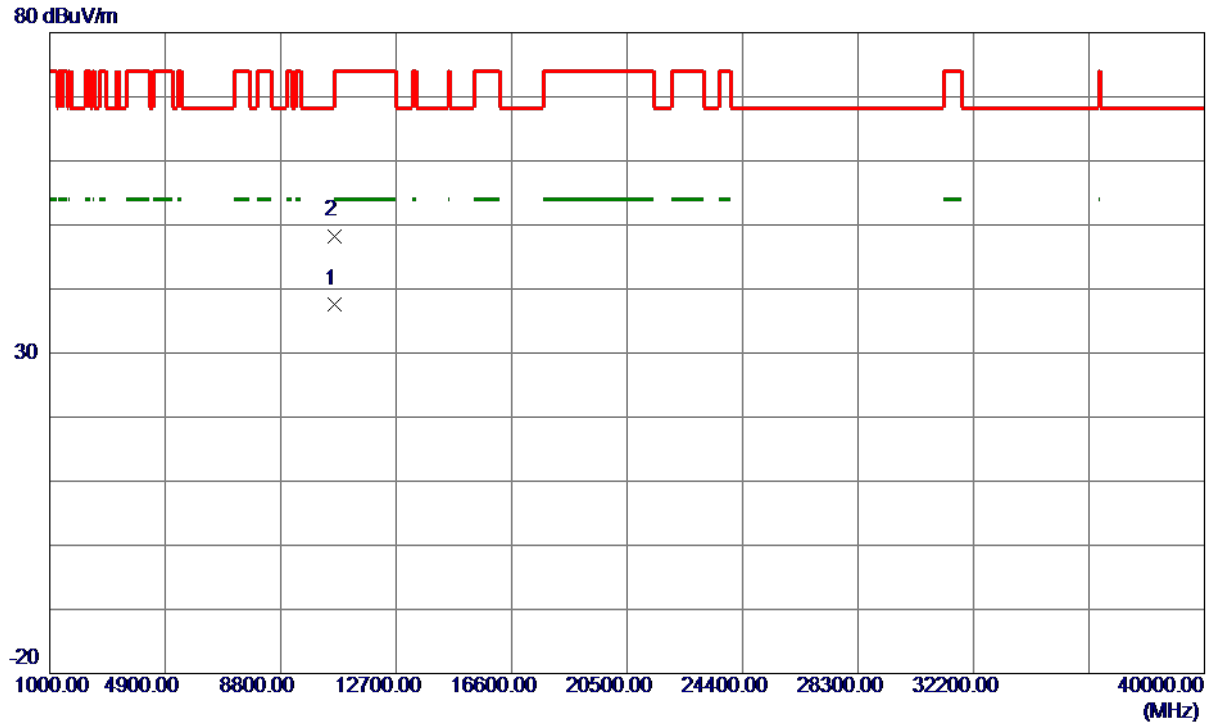

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10605.4000	24.32	13.24	37.56	54.00	-16.44	AVG	
2	10607.1800	35.06	13.24	48.30	74.00	-25.70	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Horizontal

130 dBuV/m

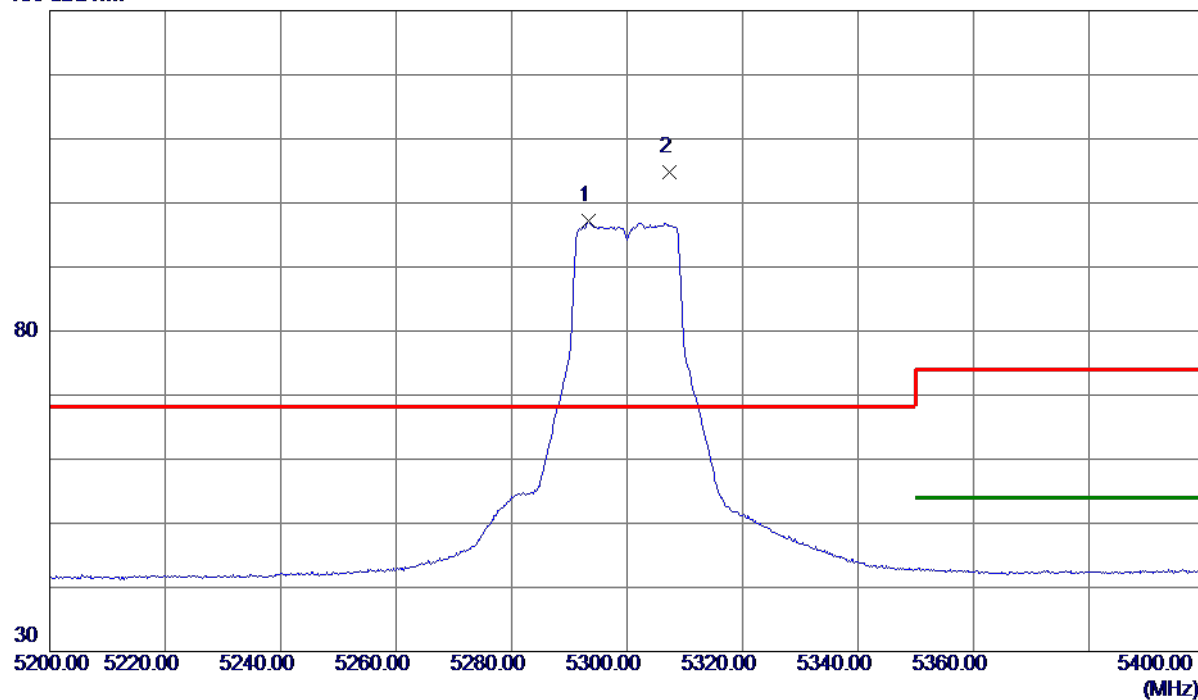

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5293.4000	81.93	15.21	97.14	999.00	-901.86	AVG	No Limit
2 *	5307.4000	89.47	15.24	104.71	68.30	36.41	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Horizontal

80 dBuV/m

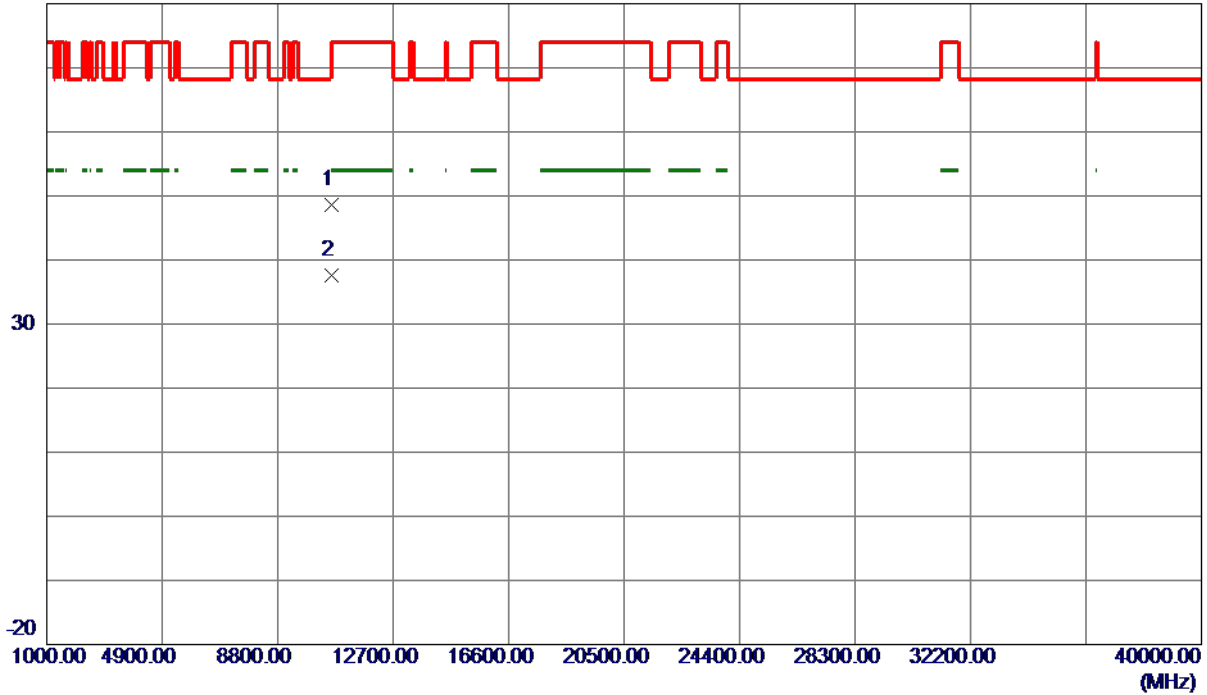


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10603.1200	35.34	13.24	48.58	74.00	-25.42	Peak	
2 *	10609.2600	24.39	13.24	37.63	54.00	-16.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

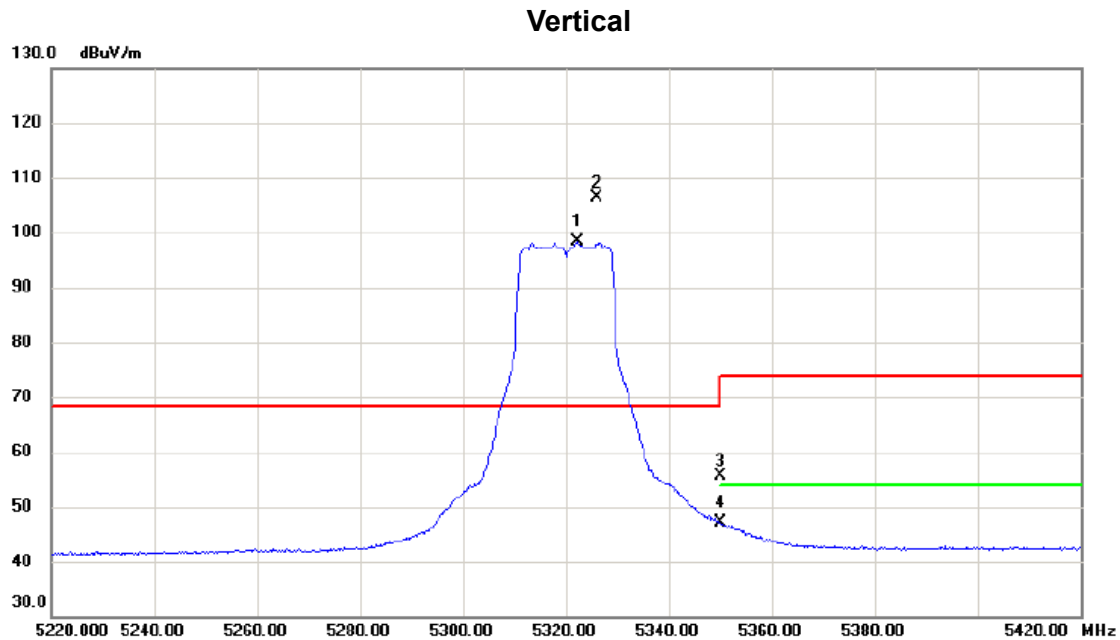

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5322.400	83.04	15.26	98.30	68.30	30.00	AVG	No Limit
2	*	5326.000	91.05	15.27	106.32	68.30	38.02	peak	No Limit
3		5350.000	40.34	15.32	55.66	74.00	-18.34	peak	
4		5350.000	31.70	15.32	47.02	54.00	-6.98	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Vertical

80 dBuV/m

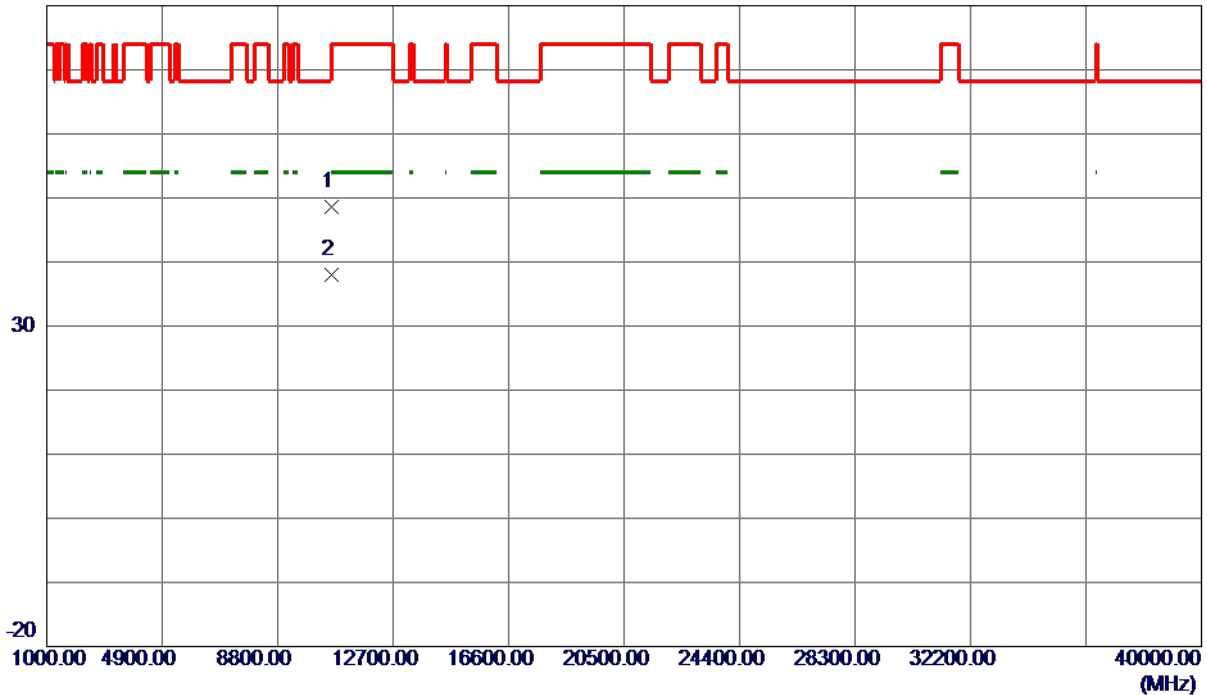


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10633.1200	35.36	13.26	48.62	74.00	-25.38	Peak	
2 *	10633.4000	24.65	13.26	37.91	54.00	-16.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

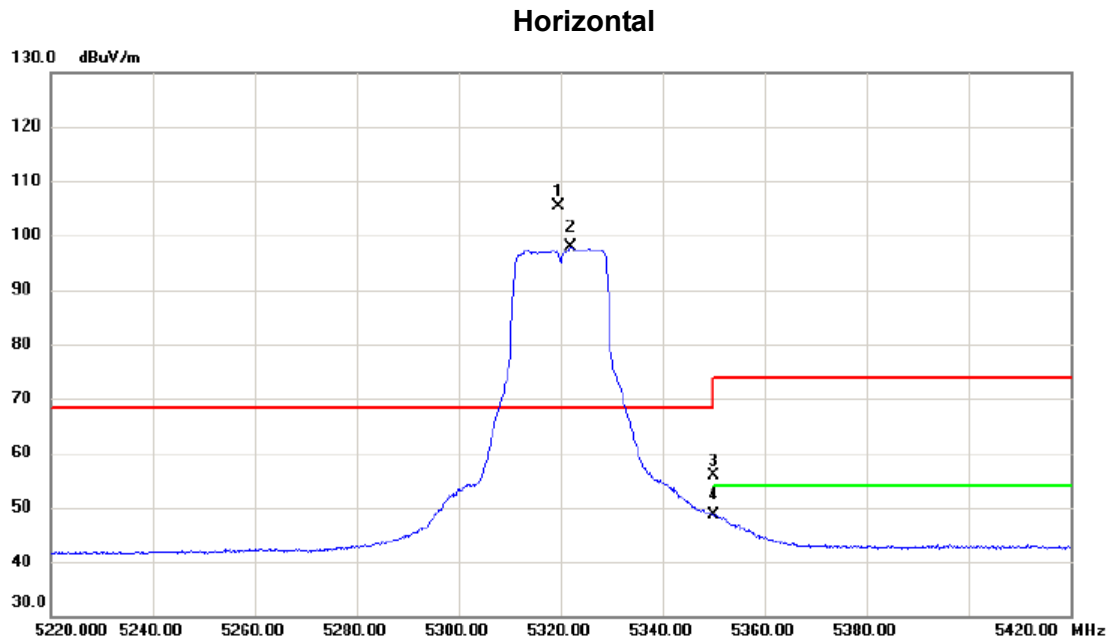

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5319.600	90.13	15.26	105.39	68.30	37.09	peak	No Limit
2	X	5322.000	82.62	15.26	97.88	68.30	29.58	AVG	No Limit
3		5350.000	40.44	15.32	55.76	74.00	-18.24	peak	
4		5350.000	33.33	15.32	48.65	54.00	-5.35	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Horizontal

80 dBuV/m

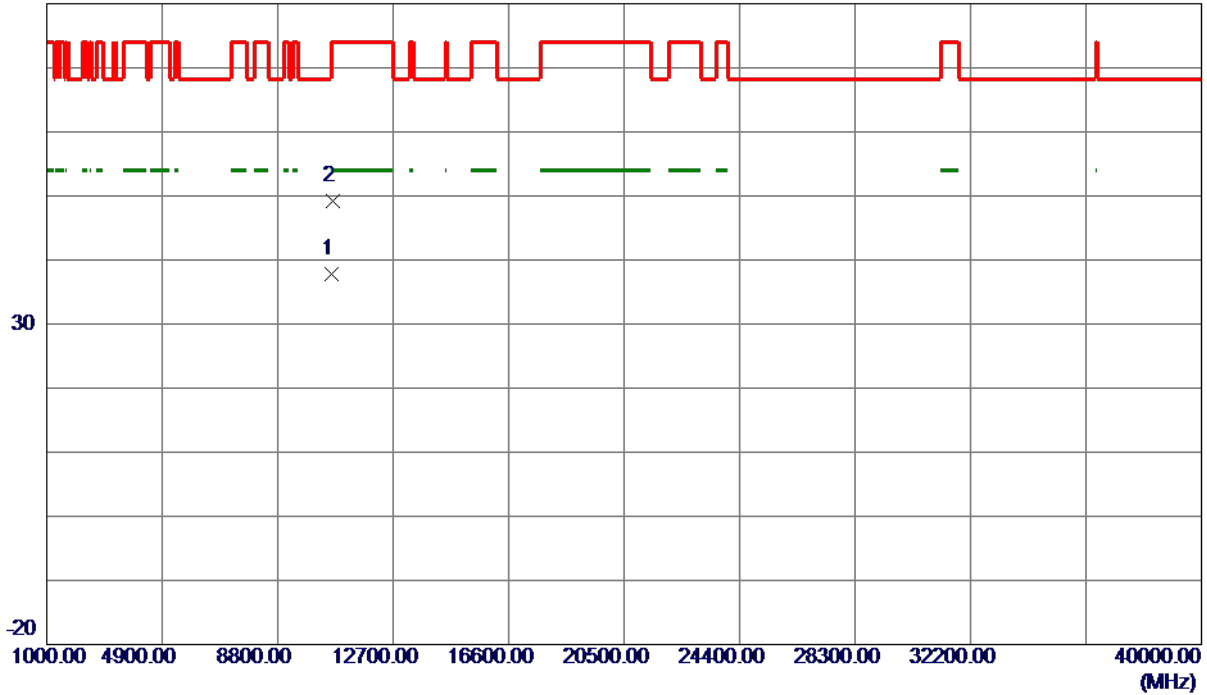


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10634.6000	24.50	13.26	37.76	54.00	-16.24	AVG	
2	10648.1800	35.87	13.27	49.14	74.00	-24.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Vertical

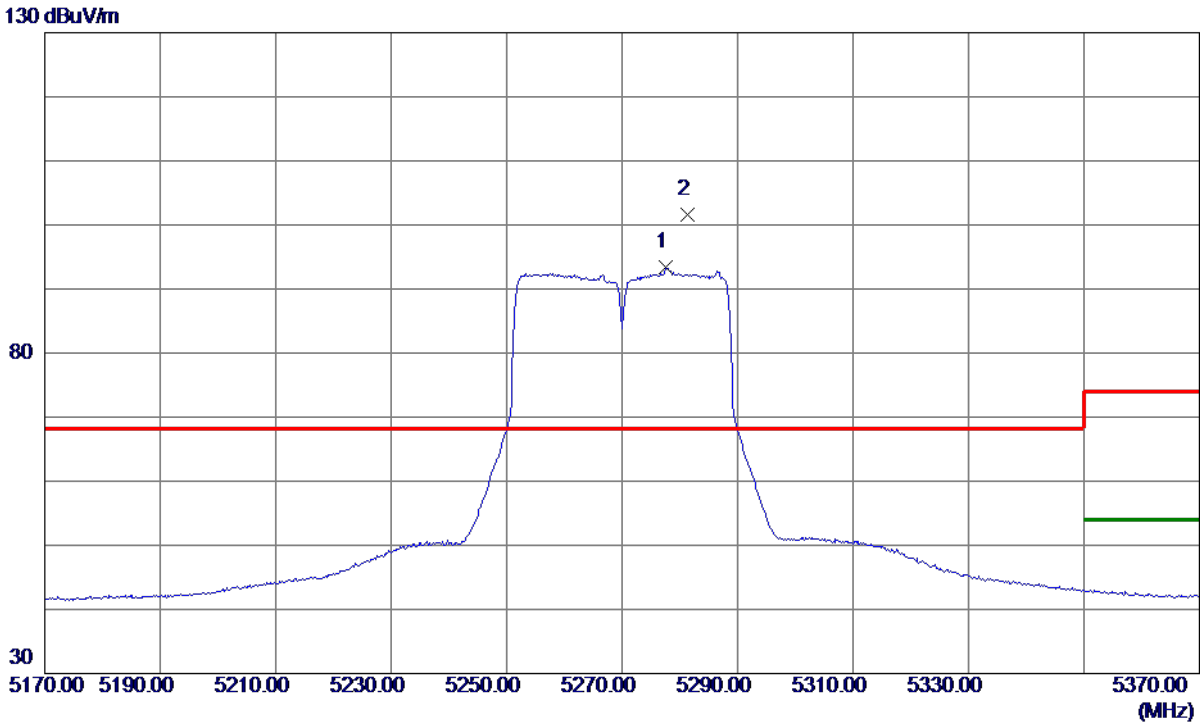


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5277.6000	78.23	15.17	93.40	999.00	-905.60	AVG	No Limit
2 *	5281.4000	86.43	15.18	101.61	68.30	33.31	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Vertical

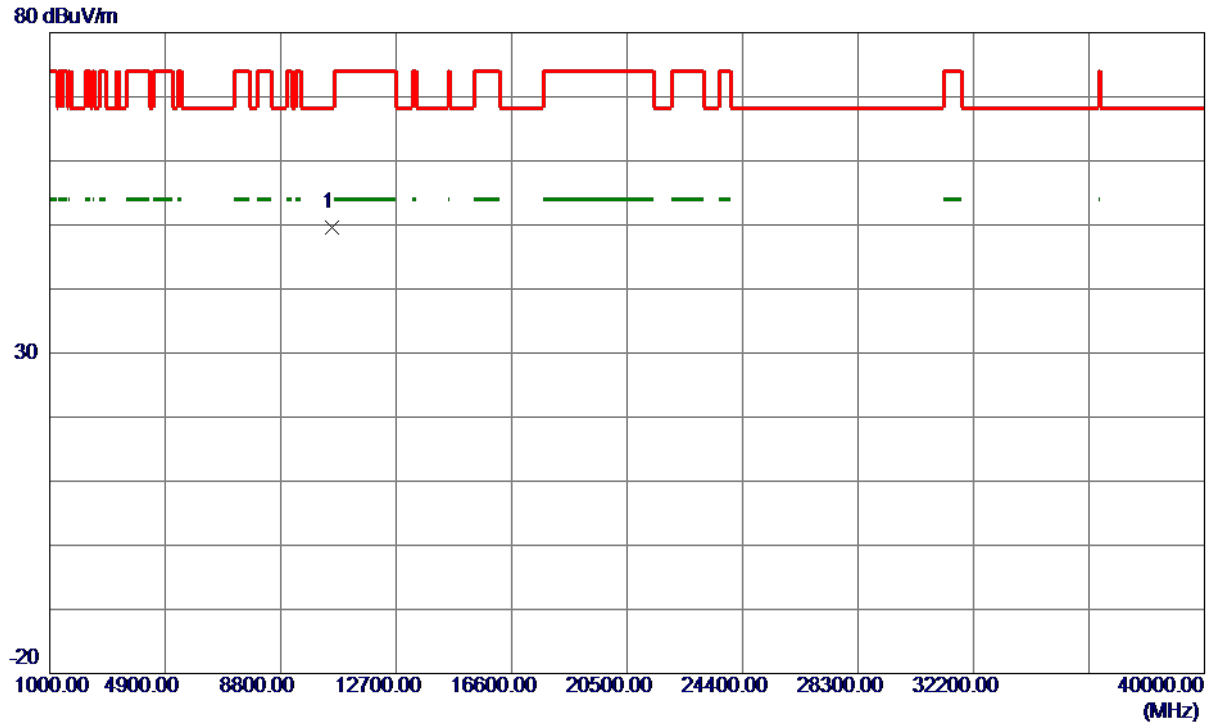


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10536.4000	36.40	13.20	49.60	68.30	-18.70	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Horizontal

130 dBuV/m

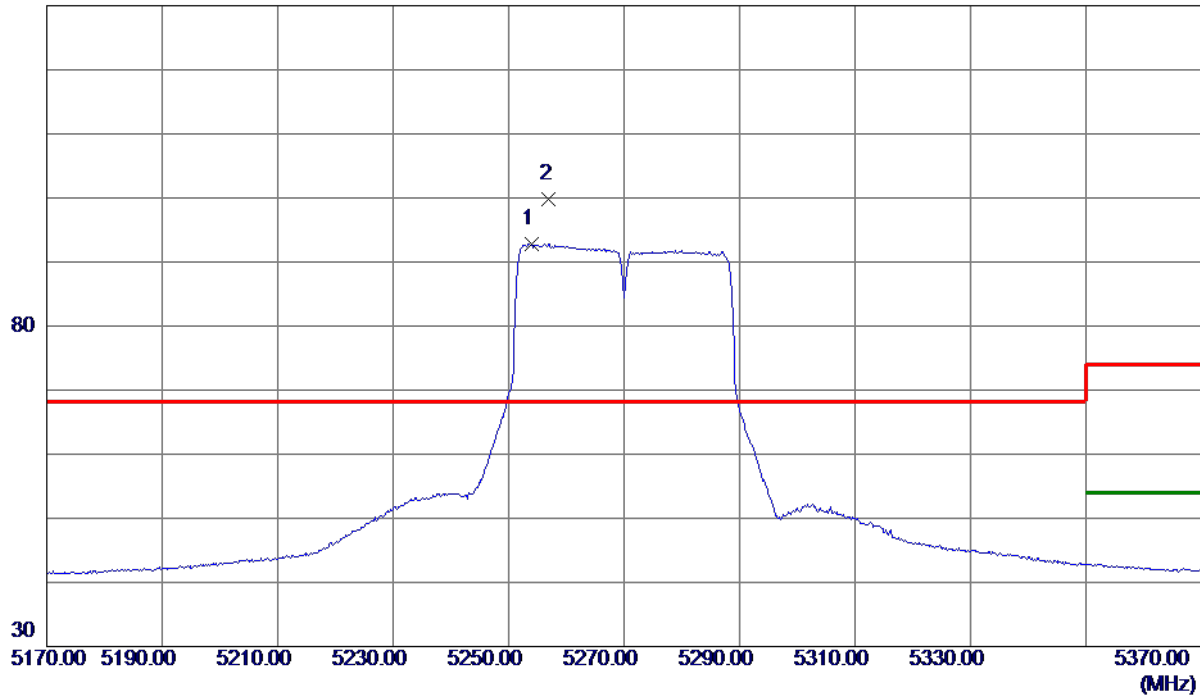

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5254.0000	77.64	15.13	92.77	999.00	-906.23	AVG	No Limit
2 *	5257.0000	84.75	15.13	99.88	68.30	31.58	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Horizontal

80 dBuV/m

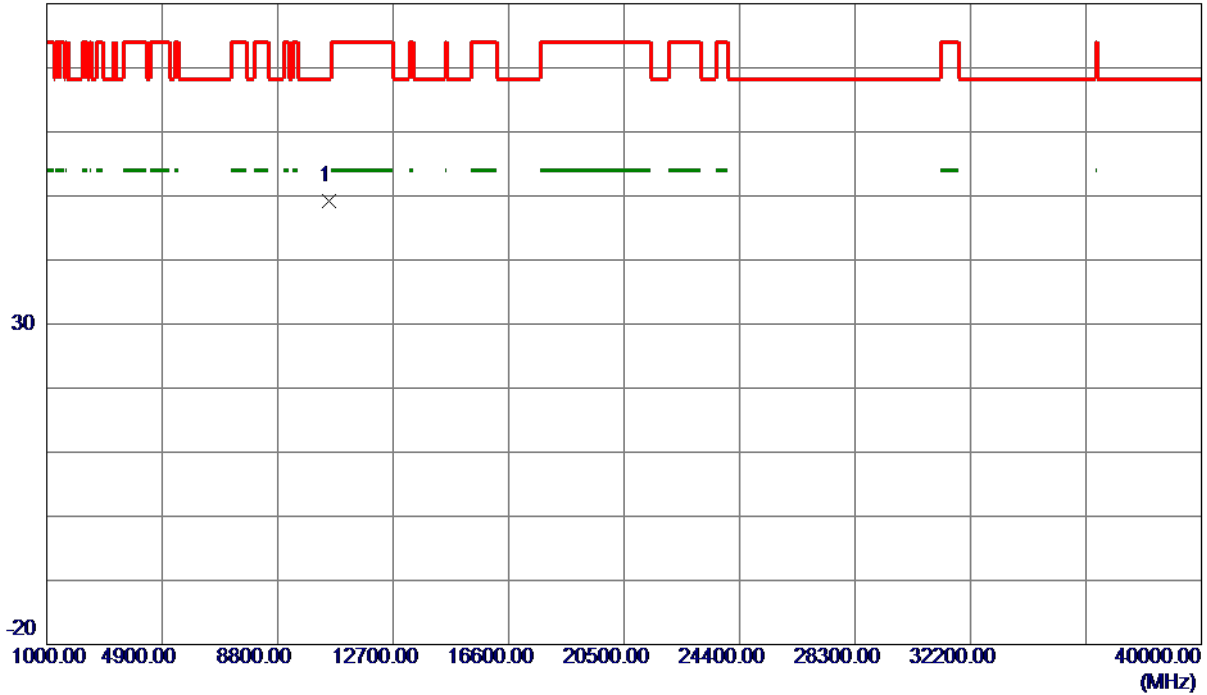


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10531.6400	35.94	13.19	49.13	68.30	-19.17	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Vertical

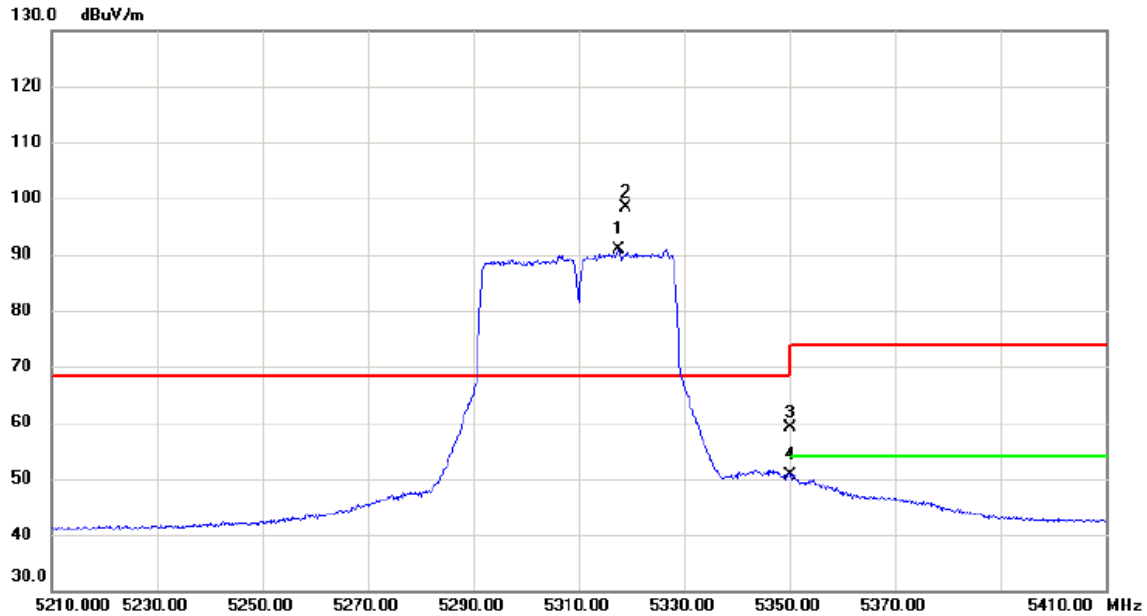

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5317.600	75.70	15.26	90.96	68.30	22.66	AVG	No Limit
2	*	5318.800	83.23	15.26	98.49	68.30	30.19	peak	No Limit
3		5350.000	43.77	15.32	59.09	74.00	-14.91	peak	
4		5350.000	35.28	15.32	50.60	54.00	-3.40	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Vertical

80 dBuV/m

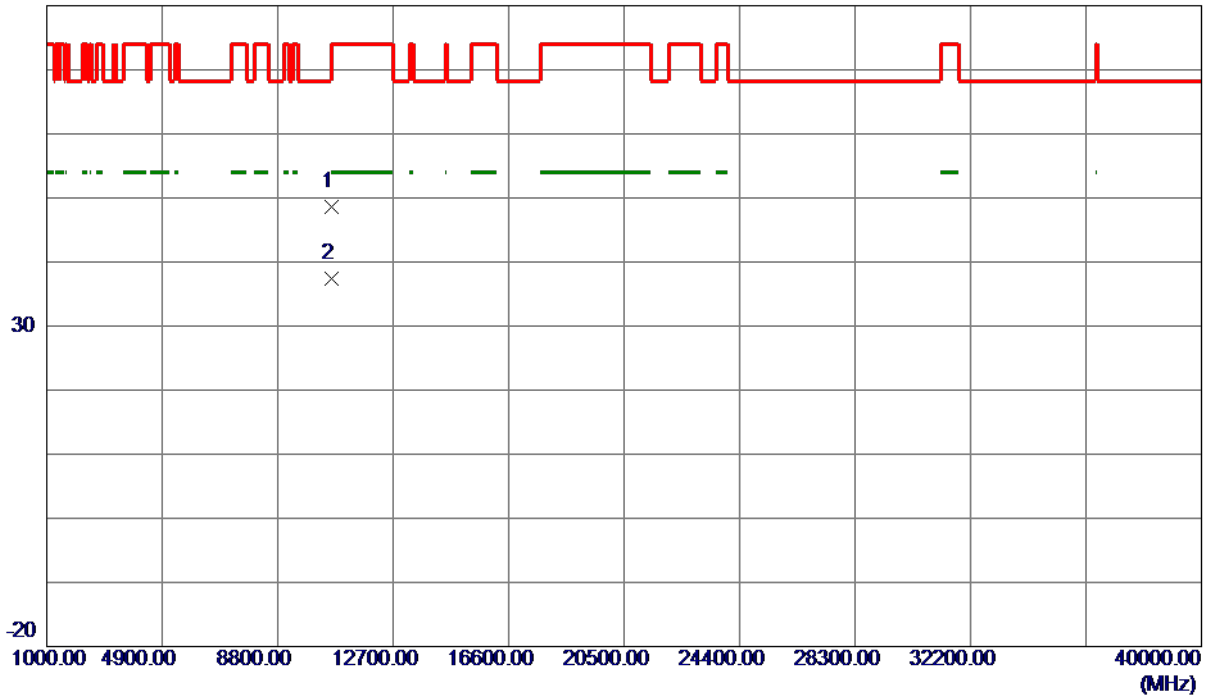


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10611.6800	35.28	13.25	48.53	74.00	-25.47	Peak	
2 *	10616.0000	24.23	13.25	37.48	54.00	-16.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

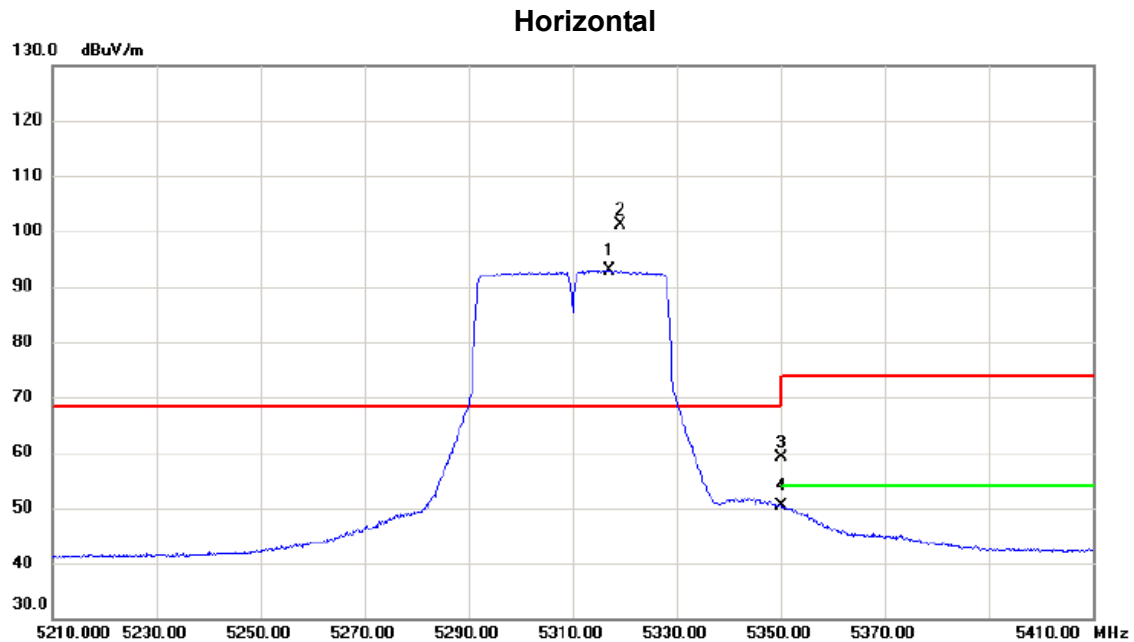

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5317.200	77.72	15.25	92.97	68.30	24.67	AVG	No Limit
2	*	5319.200	85.98	15.26	101.24	68.30	32.94	peak	No Limit
3		5350.000	43.74	15.32	59.06	74.00	-14.94	peak	
4		5350.000	35.15	15.32	50.47	54.00	-3.53	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Horizontal

80 dBuV/m

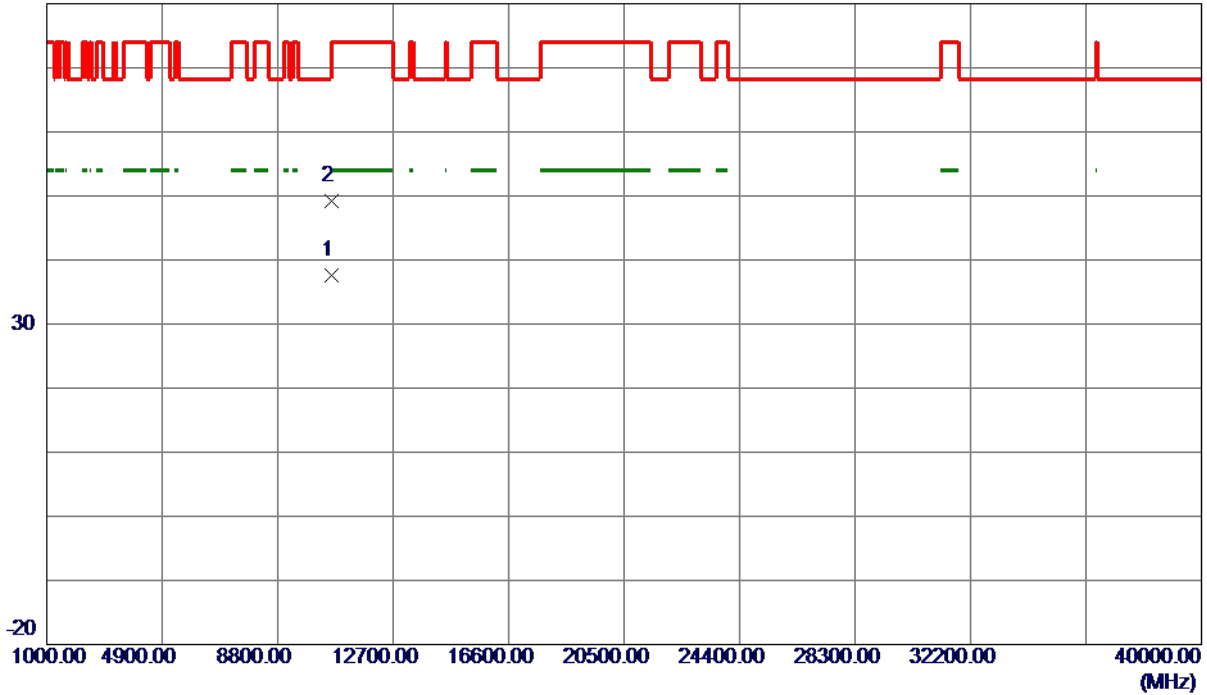


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10624.0400	24.26	13.25	37.51	54.00	-16.49	AVG	
2	10624.5000	35.94	13.25	49.19	74.00	-24.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

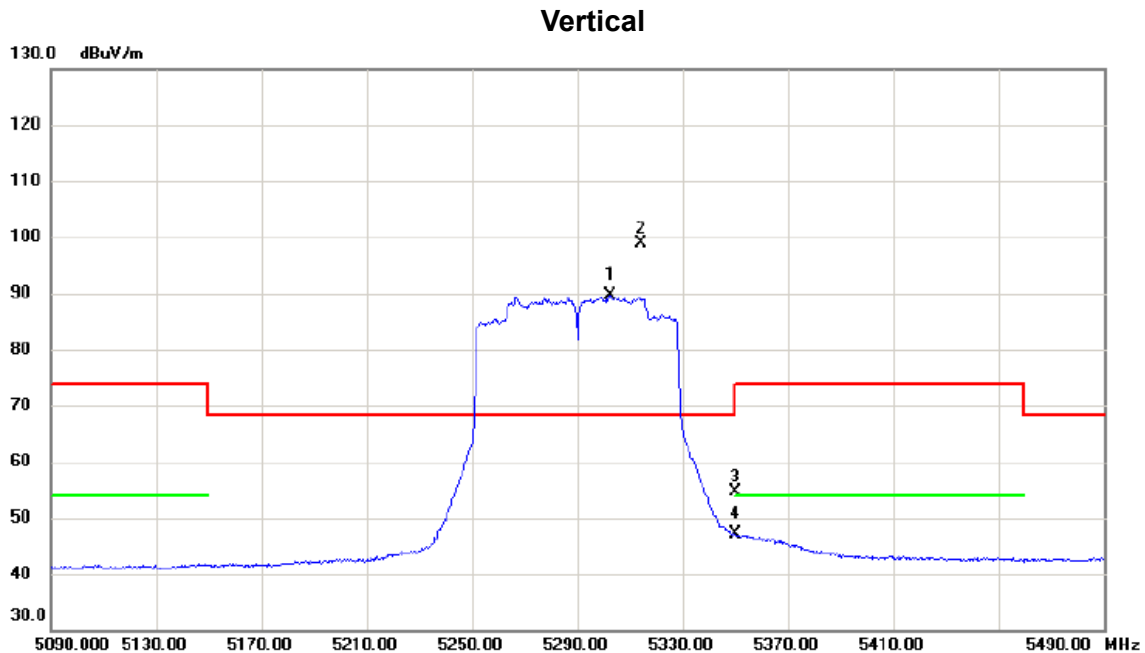

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5302.400	74.36	15.22	89.58	68.30	21.28	AVG	No Limit
2	*	5314.400	83.59	15.25	98.84	68.30	30.54	peak	No Limit
3		5350.000	39.22	15.32	54.54	74.00	-19.46	peak	
4		5350.000	31.74	15.32	47.06	54.00	-6.94	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Vertical

80 dBuV/m

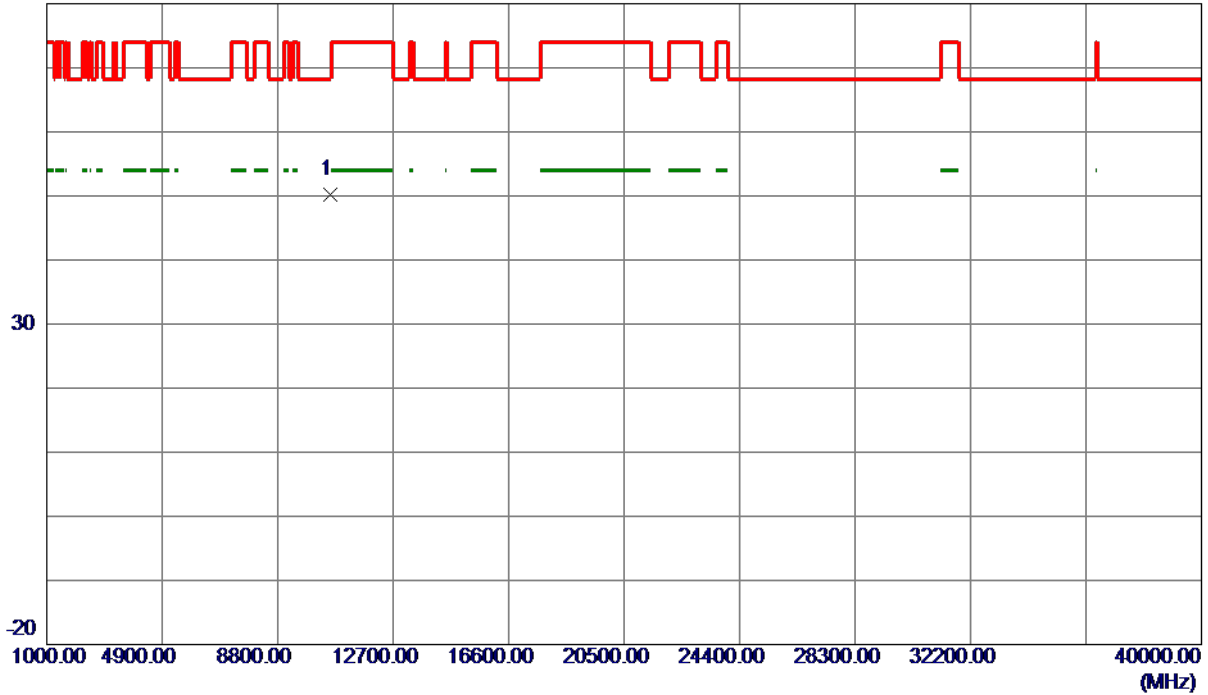


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.1200	36.91	13.23	50.14	68.30	-18.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Horizontal

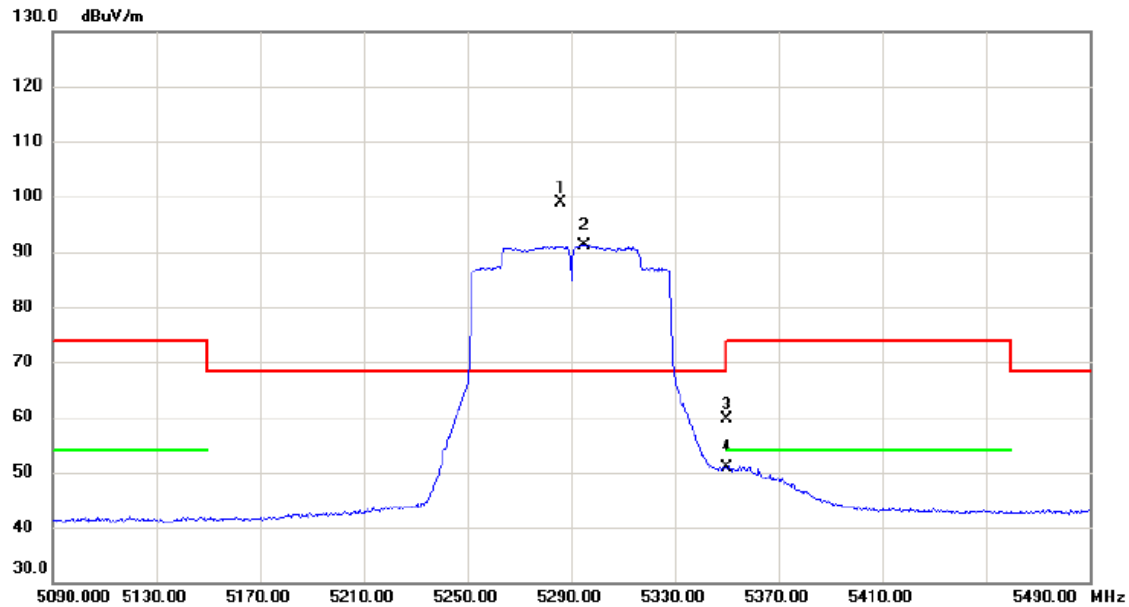

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5286.000	83.74	15.19	98.93	68.30	30.63	peak	No Limit
2	X	5294.800	76.02	15.22	91.24	68.30	22.94	AVG	No Limit
3		5350.000	44.41	15.32	59.73	74.00	-14.27	peak	
4		5350.000	35.63	15.32	50.95	54.00	-3.05	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Horizontal

80 dBuV/m

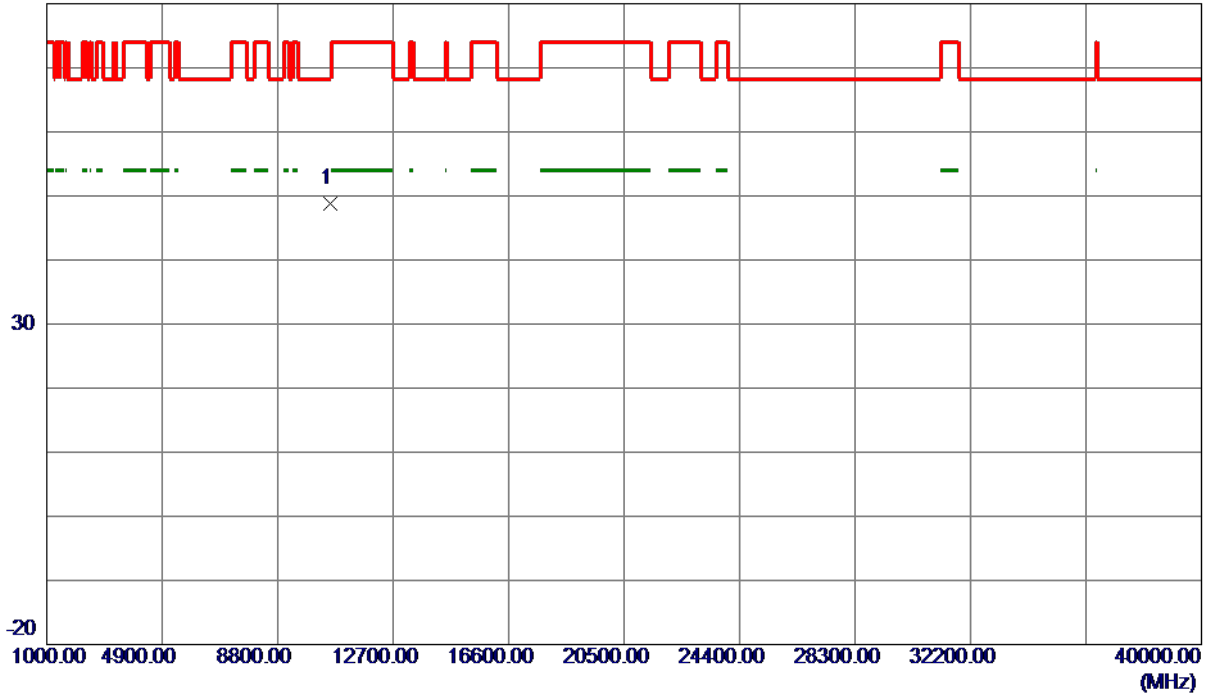

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10578.0050	35.61	13.22	48.83	68.30	-19.47	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Vertical

130 dBuV/m

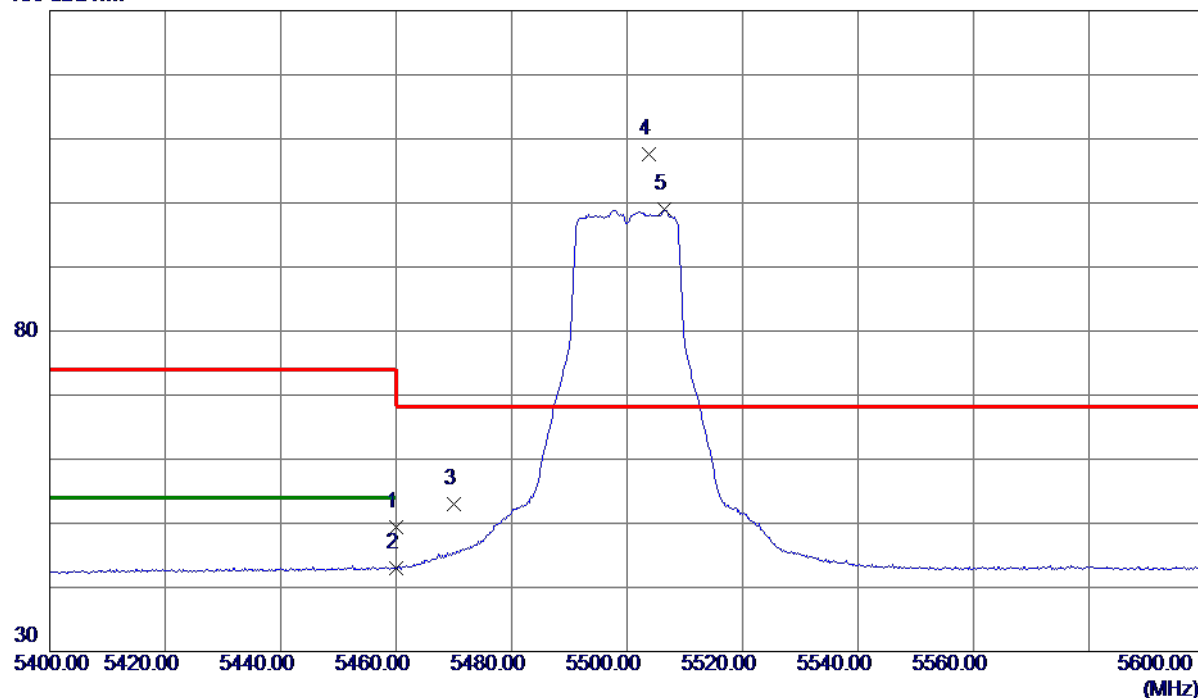

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	33.76	15.55	49.31	74.00	-24.69	Peak	
2	5460.0000	27.47	15.55	43.02	54.00	-10.98	AVG	
3	5470.0000	37.34	15.57	52.91	68.30	-15.39	Peak	
4 *	5503.8000	91.95	15.65	107.60	68.30	39.30	Peak	No Limit
5	5506.4000	83.25	15.66	98.91	999.00	-900.09	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Vertical

80 dBuV/m

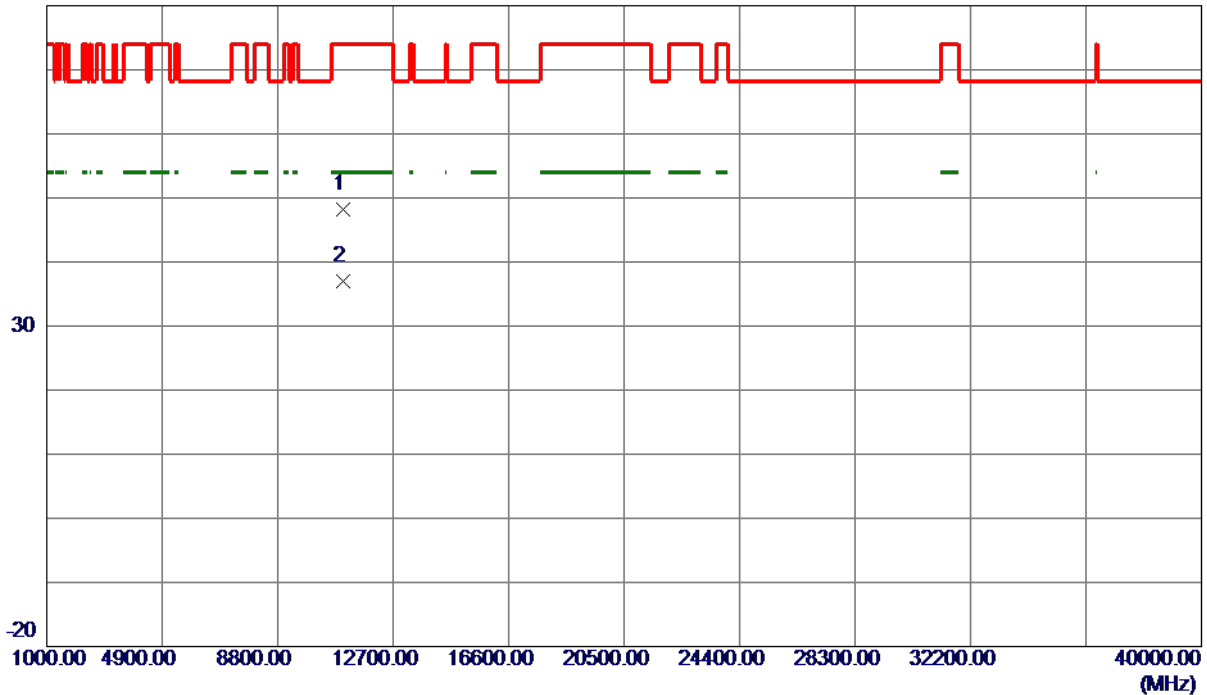

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	34.76	13.49	48.25	74.00	-25.75	Peak	
2 *	11000.0000	23.42	13.49	36.91	54.00	-17.09	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Horizontal

130 dBuV/m

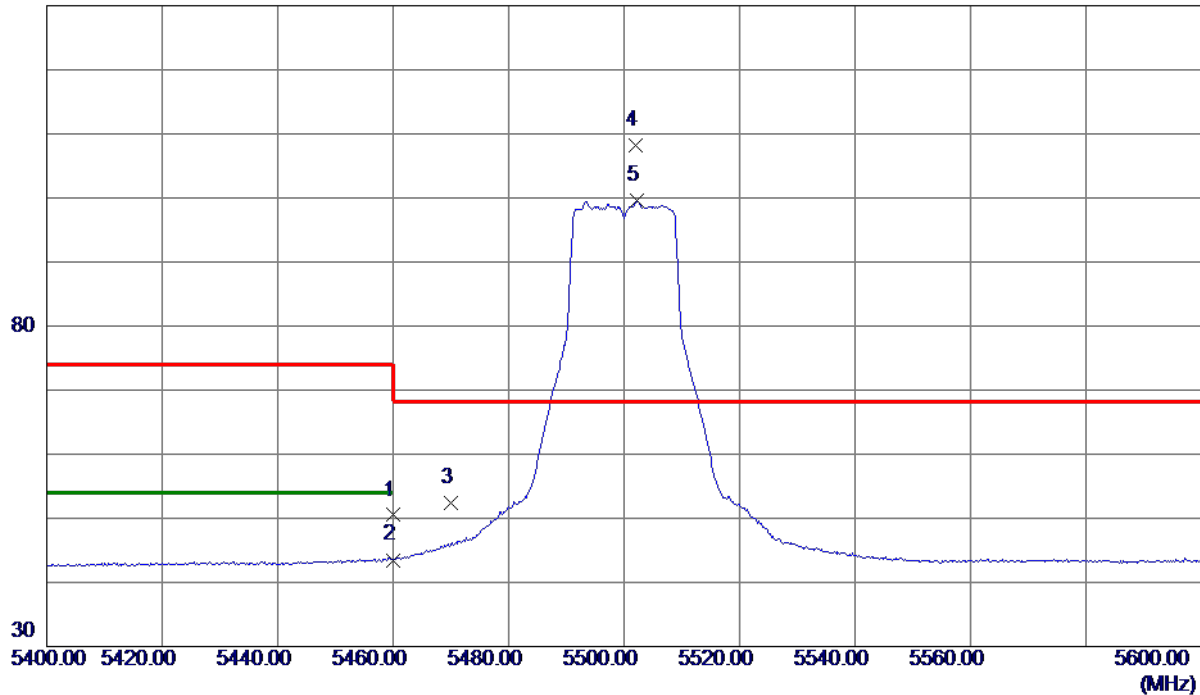


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	34.95	15.55	50.50	74.00	-23.50	Peak	
2	5460.0000	27.95	15.55	43.50	54.00	-10.50	AVG	
3	5470.0000	36.78	15.57	52.35	68.30	-15.95	Peak	
4 *	5502.0000	92.59	15.64	108.23	68.30	39.93	Peak	No Limit
5	5502.2000	83.97	15.64	99.61	999.00	-899.39	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Horizontal

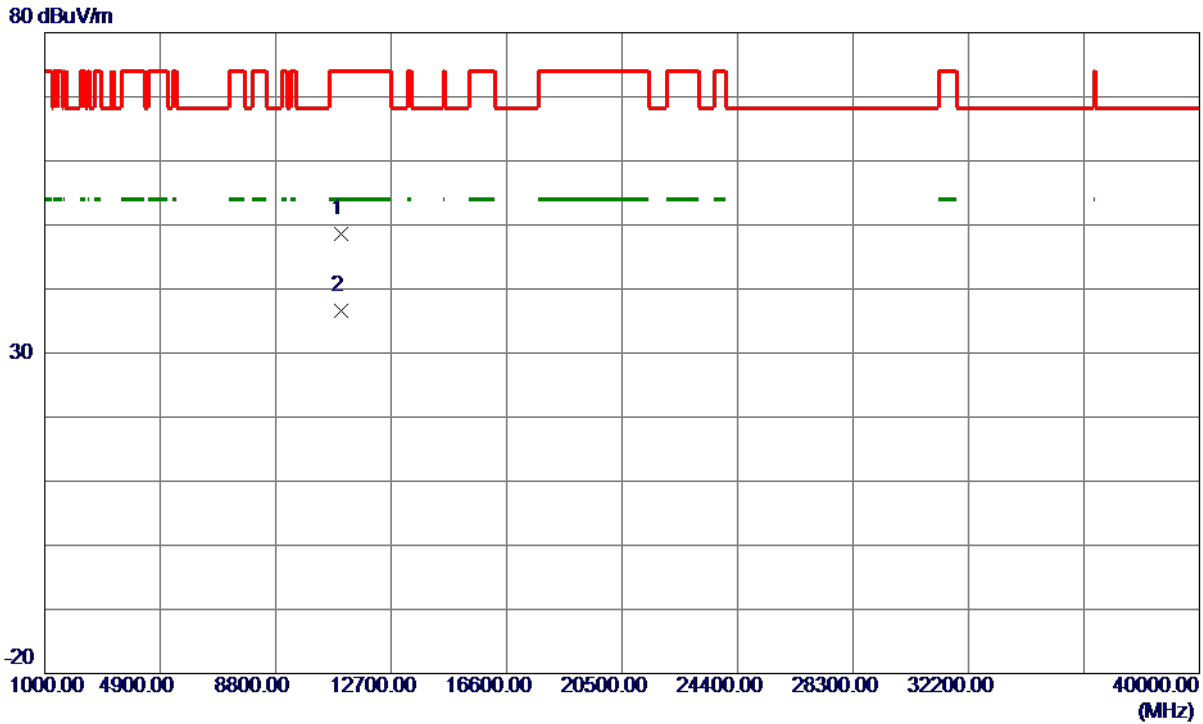

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	35.03	13.49	48.52	74.00	-25.48	Peak	
2 *	11000.0000	23.09	13.49	36.58	54.00	-17.42	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5580 MHz

Vertical

130 dBuV/m

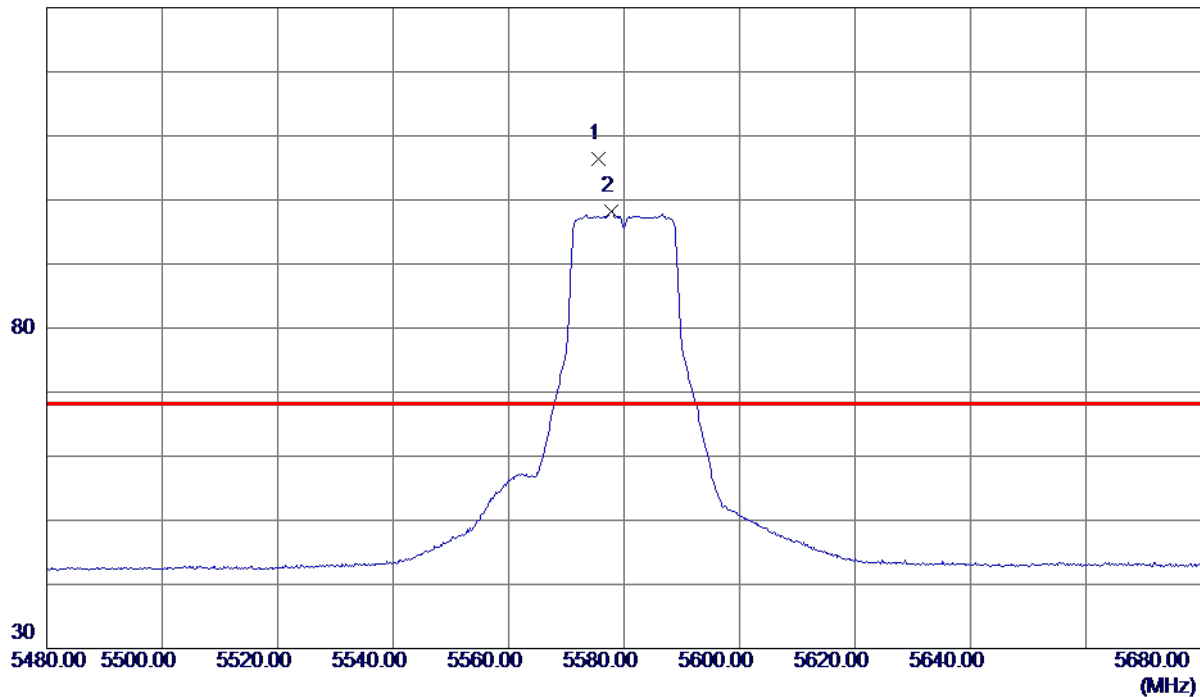

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5575.6000	90.50	15.93	106.43	68.30	38.13	Peak	No Limit
2	5577.8000	82.19	15.94	98.13	999.00	-900.87	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5580 MHz

Vertical

80 dBuV/m

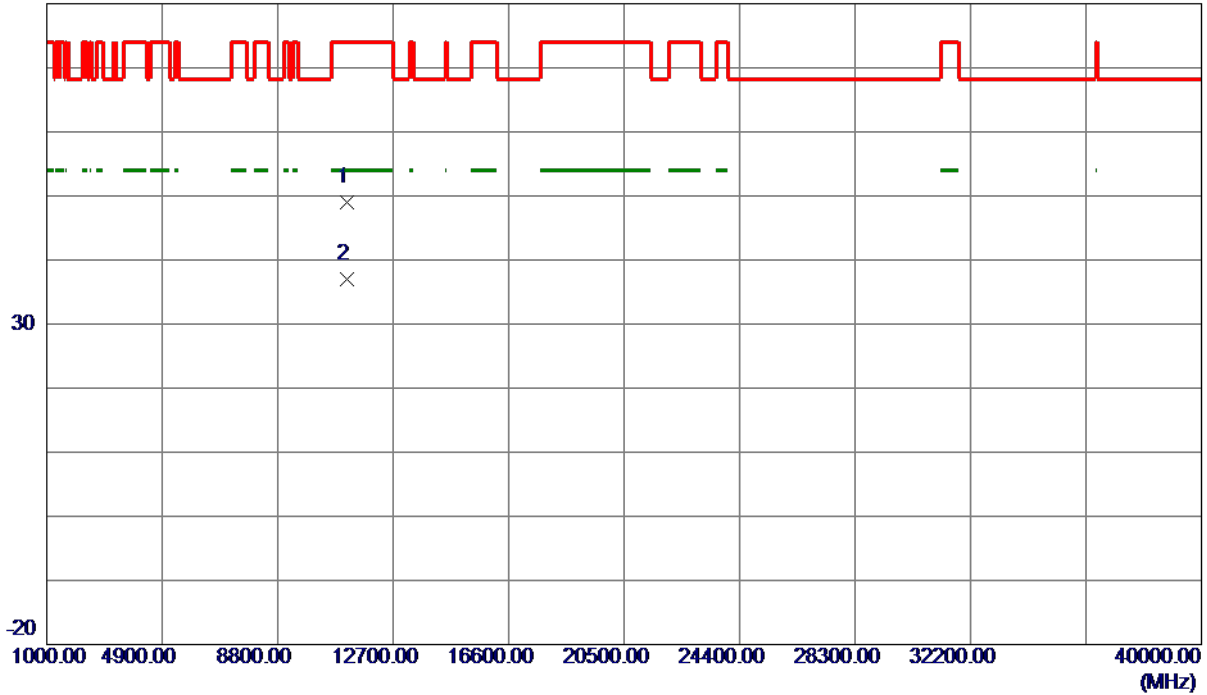

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	35.26	13.68	48.94	74.00	-25.06	Peak	
2 *	11160.0000	23.35	13.68	37.03	54.00	-16.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.