

FCC Test Report

Report No.: AGC01110240643FR03

FCC ID	:	2AOKB-A3305J
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Speaker
BRAND NAME	:	ANKER
MODEL NAME	:	A3305
APPLICANT	:	Anker Innovations Limited
DATE OF ISSUE	:	Nov. 20, 2024
STANDARD(S)	:	FCC Part 15 Subpart E §15.407
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 20, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	
2.4 Related Submittal(S) / Grant (S)	9
2.5 Test Methodology	9
2.6 Special Accessories	9
2.7 Equipment Modifications	9
2.8 Antenna Requirement	9
2.9 Description of Test Software	10
3. Test Environment	11
3.1 Address of The Test Laboratory	11
3.2 Test Facility	11
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	13
4. System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	17
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB&26dB Bandwidth Measurement	24
8.1 Provisions Applicable	24
8.2 Measurement Procedure	24
8.3 Measurement Setup (Block Diagram of Configuration)	24
8.4 Measurement Results	



9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Result	
10. Conducted Band Edge and Out-of-Band Emissions	43
10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	
11. Radiated Spurious Emission	
11.1 Measurement Limit	
11.2 Measurement Procedure	53
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	63
12.1 Measurement limit	63
12.2 Block Diagram of Line Conducted Emission Test	
12.3 Preliminary Procedure of Line Conducted Emission Test	64
12.4 Final Procedure of Line Conducted Emission Test	64
12.5 Test Result of Line Conducted Emission Test	64
Appendix I: Photographs of Test Setup	67
Appendix II: Photographs of EUT	67



1. General Information

Applicant	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Manufacturer	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Factory	N/A
Address	N/A
Product Designation	Wireless Speaker
Brand Name	ANKER
Test Model	A3305
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Aug. 23, 2024
Date of Test	Aug. 23, 2024 to Nov. 20, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-5G WLAN-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

XCI-li

Cici Li (Project Engineer)

Nov. 20, 2024

Reviewed By

Calvin Liu (Reviewer)

Nov. 20, 2024

Approved By

101

Angela Li (Authorized Officer)

Nov. 20, 2024



2. Product Information

2.1 Product Technical Description

Equipment Type	 Outdoor access points Fixed P2P access points Client devices 			
Operation Frequency	U-NII 1:5150MHz~5250MHz U-NII 2A: 5250MHz~5350MHz U-NII 2C:5470MHz~5725MHz U-NII 3: 5725MHz~5850MHz			
TPC Function	🗌 Yes 🛛 No			
Hardware Version	V0.3			
Software Version	3.0.1			
Test Frequency Range	For 802.11a/n-HT20: 5180~5240MHz / 5745~5825MHz			
RF Output Power	U-NII 1: 802.11a:8.92dBm,802.11n(HT20):8.66dBm; U-NII 3: 802.11a:10.17dBm,802.11n(HT20):10.17dBm			
Modulation	802.11a/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM			
Data Rate	802.11a:6/9/12/18/24/36/48/54Mbps; 802.11n: up to 300Mbps			
Number of channels	4 channels of U-NII-1 Band; 5 channels of U- NII 3 Band			
Antenna Designation	FPC Antenna			
Antenna Gain	1.78dBi			
Power Supply	DC 3.6V by battery or DC 5V by adapter			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



2.2 Table of Carrier Frequency

For 5180~5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

For 5745~5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		



2.3 IEEE 802.11n Modulation Scheme

MCS Nss Mo				N _{CBPS}		N _{DBPS}		Data rate (Mbps)		
Index	INSS	Modulation	R	N _{BPSC}					800nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for **FCC ID: 2AOKB-A3305J** filing to comply with the FCC Part 15 requirements.

2.5 Test Methodology

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 789033	789033 D02 General U-NII Test Procedures New Rules v02r01

2.6 Special Accessories

Refer to section 4.4.

2.7 Equipment Modifications

Not available for this EUT intended for grant.

2.8 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 1.78dBi.



2.9 Description of Test Software

For IEEE 802.11 mode:

The test utility software used during testing was "ActionsSerialUtility".

Software Setting Diagram

	T COM4 - 已连接·	1500000 bps - Actions 串口工具 - □ ×	
10x U	(Porfe) 文件 编辑 工具	直看	电气工
IOX_O	Androit 🗃 🖬 🗠 🖻		(192.16
	> 2132711/1/N	ONE /27E recv cmd: btrf bt_hci_rese	
	[14:02:09.613]	btrf bt_hci_rese 2132716/I/NONE /27E recv cmd: t	
	[14:02:09.613]	f bt hci rese	S
omiexe	MPTo [14:02:09.613]	t	EN 300
	[14:02:09.613]	bt_rf_cmd_process 2, btrf ,bt_hci_reset	V2.2.2
	[14:02:09.613]	2132717/I/NONE / 3 hci_tx_p 0x200acc2c hci_rx_p 0x200acbd0 hci_rx_len	
in the second se	0x200acbcc		100
TP	[14:02:09.613]	01 03 0c 00	
d32.exe	jeen [14:02:09.613]	2132717/I/NONE / 3 Non Long range	飞易通
GJEIGAG	[14:02:09.613]	HciRxBuffLen 7	06-0
	[14:02:09.613]	04 0e 04 05 03 0c 00	0000
	[14:02:09.613]	success:0 length:0 param:	
	[14:02:09.613]	success	
	[14:02:09.613]	2132719/I/NONE / 3 ret = 0x0000	
ocm43	Reviel [14:02:09.613]		SRRC_K
	Chang [14:02:09.613]	eshell	
		signal 0 3-DH5 PRBS9 1	
		IONE /27E recv cmd: btrf bt_edr_tx_s	
		btrf bt_edr_tx_s 2140574/I/NONE /27E ! recv cmd: ignal 0 3-DH5 PR	
nf-3.1	Realite man of the state of the second state of the	ignal 0 3-DH5 PR 2140579/I/NONE /27E ; recv cmd: BS9 1	A3305
	Blueto [14:02:17.240]	3-DH5 PR	資料
	[14:02:17.240]	BS9 1	
THE O		<pre>bt_rf_cmd_process 6, btrf ,bt_edr_tx_signal</pre>	
		cmd_bt_edr_tx_signal 2140579/I/NONE / 3 hci_tx_p 0x2005e490 hci_rx_p 0x200acbd0 hci_rx_len	
erf8113	[14:02:17.240] BOOL 0x200acbcc	2140579/1/NOME / 3 i ncl_tx_p 0x20050470 ncl_rx_p 0x200acha0 ncl_rx_ten	夏培養
enana	[14:02:17.240]	01 87 fc 1c 00 e8 03 01 00 00 05 55 55 55 55 00 00 01 01 0f 04 fd 03 00 00	-H520
	00 00 ff ff ff		HIJEO
-	[14:02:17.240]	2140579/I/NONE / 3 Non Long range	-
	[14:02:17.240]	HciRxBuffLen 21	
	E14-00-15 0401	04 0e 12 05 87 fc 00 00 00 ff ff ff ff 00 00 00 00 00 00	COTT
anLink	downlo [14:02:17.240]	success:0 length:0 param:	CRT-X
	[14:02:17.240]	success	
	[14:02:17.240]	2140582/I/NONE / 3 ret = 0x0000	
1	[14:02:17.240]		
	[14:02:17.240]	eshell	
gic iPerf	tf all re		adb sh

U-NII 1:5150MHz~5250MHz

Test Mode	Channel	Power Index		
802.11a	L/M/H	31		
802.11n(HT20)	L/M/H	31		

U-NII 3: 5725MHz~5850MHz

Test Mode	Channel	Power Index
802.11a	L/M/H	31
802.11n(HT20)	L/M/H	31



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20% - 75%
Pressure range (kPa)	86 - 106
Power supply	DC 3.6V by battery or DC 5V by adapter

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	Uc = ±2.9 dB
Uncertainty of Radiated Emission below 1GHz	Uc = ±3.9 dB
Uncertainty of Radiated Emission above 1GHz	$Uc = \pm 4.9 dB$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	$U_{c} = \pm 2.7 \%$
Uncertainty of Duty Cycle	U _c = ±2 %



3.5 List of Equipment Used

RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\square	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31			
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23			
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27			
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04			
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10			
\square	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30			
\square	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23			
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23			
\boxtimes	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22			
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08			
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08			

• A	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	ant Manutacturer Model No I Serial No I				Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		



• Tes	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A			
\boxtimes	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0			
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box	RISYM	USB-TTL		
2	Adapter	HUAWEI	HW-200440C00	Input(AC): 100V-240V 50/60Hz 2.4A Output(DC): USB-C(5V/3A;9V/3A;10V/4A;11V/6A;12V/3A ;15V/3A;20V4.4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)	

☑ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	USB Cable				0.93m unshielded

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.407(a/1/3)	RF Output Power	Pass
3	§15.407(e)	6 dB Bandwidth	Pass
4	§15.403(i)	99% Occupied Bandwidth	Pass
5	§15.407(a/1/3)	Power Spectral Density	Pass
6	§15.407(g)	Frequency Stability	Pass (See Note 1)
7	§15.407(c)	Transmission Discontinuation Requirement	Pass (See Note 2)
8	§15.407(b)(1/4)	Conducted Band Edge and Out-of-Band Emissions	Pass
9	§15.209,§15.407(b)(1/4)	Radiated Spurious Emission	Pass
10	§15.207	AC Power Line Conducted Emission	Pass

Note:

- 1. Refer to the manufacturer's declaration in the user manual.
- 2. The device operates without the transmission of information.



5. Description of Test Modes

EUT Configure Mode	Applicable To				Description
	RE > 1G	RE < 1G	PLC	APCM	Doonpilon
А	\boxtimes	\boxtimes	\boxtimes	\boxtimes	Powered by Adapter with WIFI(5G) Link
В					Powered by Battery with WIFI(5G) Link
С					Powered by USB with WIFI(5G) Link
Where, RE > 1G: Radiated Emission above 1GHz			PLC: Pow	ver Line Conducted Emission	

RE > 1G: Radiated Emission above 1GHz PLC: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz **APCM: Antenna Port Conducted Measurement**

NOTE 1: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when

positioned on X-plane.

NOTE 2: "--"means no effect.

Radiated Emission Test (Above 1GHz): •

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (IF EUT with antenna diversity architecture).

Support 802.11ax, device debugging is tested in Full RU state

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0



<u>Radiated Emission Test (Below 1GHz):</u>

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).
- The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
A	802.11a	5180-5240	36 to 48	36	OFDM	6.0

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
А	802.11a	5180-5240	36 to 48	36	OFDM	6.0

Band edge Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

Support 802.11ax, device debugging is tested in Full RU state

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
A	802.11a	5180-5240	36 to 48	36	OFDM	6.0



• Antenna Port Conducted Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

Support 802.11ax, device debugging is tested in Full RU state

Following channel(s) was (were) select	ed for the final test as listed below.
--	--

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
А	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n (20MHz)	5160-5240	36 to 48	36, 40, 48	OFDM	MCS0
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
A	802.11n (20MHz)	0740-0620	149 to 165	149, 157, 165	OFDM	MCS0



6. Duty Cycle Measurement

5GHz WLAN (NII) operation is possible in 20MHz and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Operating mode	Data rates (Mbps)	Data rates (Mbps) Duty Cycle (%) Dut					
Band U-NII1:5150MHz-5250MHz							
802.11a	6	90.69	0.42				
802.11n_HT20	MCS0 91.45		0.39				
Band U-NII 3: 5725MHz-5850MHz							
802.11a	6	91.28	0.27				
802.11n_HT20	MCS0	91.45	0.39				

Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.
- 3. Involving the test items of duty cycle compensation coefficient, the final results have been added and calculated by the software and presented.

The test plots as follows:



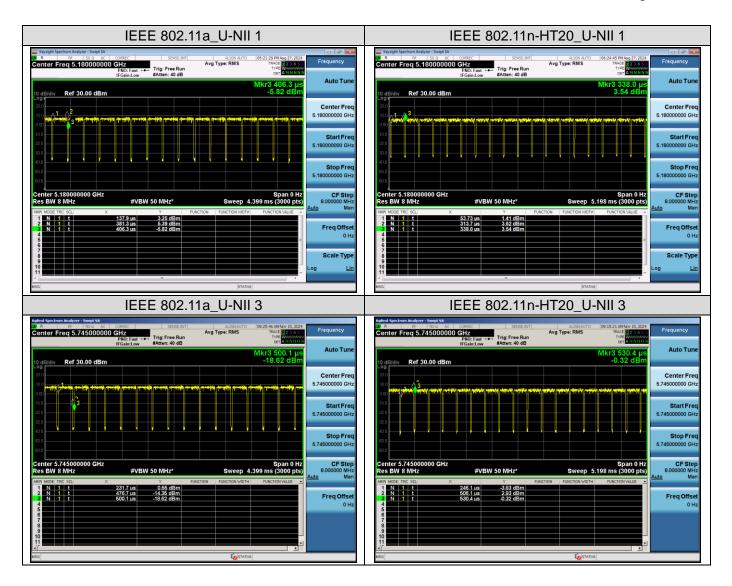



7. RF Output Power Measurement

7.1 Provisions Applicable

Operation Band		EUT Category	LIMIT		
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p < 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)		
0 1 11 1		Fixed point-to-point Access Point	1 Watt (30 dBm)		
		Indoor Access Point	1 Watt (30 dBm)		
	\boxtimes	Client devices	250mW (23.98 dBm)		
U-NII-2A	/		250mW (23.98 dBm) or 11 dBm+10 log B*		
U-NII-2C	/		/		250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-3	/		1 Watt (30 dBm)		


Note: Where B is the 26dB emission bandwidth in MHz.

7.2 Measurement Procedure

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 12.3.3.1
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

7.3 Measurement Setup (Block Diagram of Configuration)

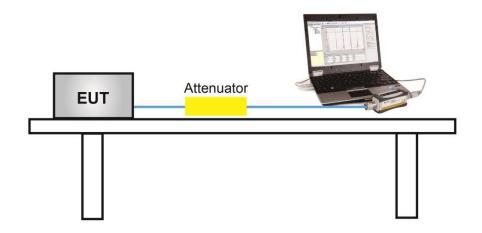



7.4 Measurement Result

	Test Data of Conducted Output Power for band 5.15-5.25 GHz						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail			
	5180	8.92	23.98	Pass			
802.11a	5200	8.41	23.98	Pass			
	5240	8.52	23.98	Pass			
	5180	8.19	23.98	Pass			
802.11n20	5200	8.40	23.98	Pass			
	5240	8.66	23.98	Pass			

Test Data of Conducted Output Power for band 5.725-5.850 GHz							
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail			
	5745	9.57	30	Pass			
802.11a	5785	9.86	30	Pass			
	5825	10.17	30	Pass			
	5745	6.75	30	Pass			
802.11n20	5785	9.92	30	Pass			
	5825	10.17	30	Pass			



8. 6dB&26dB Bandwidth Measurement

8.1 Provisions Applicable

The minimum 6dB bandwidth shall be at least 500 kHz.

8.2 Measurement Procedure

• -6dB bandwidth (DTS bandwidth) Test setting:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on operation frequency individually.
- 3. Set RBW = 100kHz.
- 4. Set the VBW \geq 3*RBW. Detector = Peak. Trace mode = max hold.
- 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.

• 99% occupied bandwidth test setting:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


-26dB Bandwidth test setting:

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set the VBW > RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.

5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

8.3 Measurement Setup (Block Diagram of Configuration)

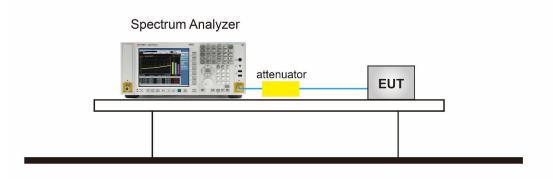





8.4 Measurement Results

Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	5180	16.260	17.560	N/A	Pass	
802.11a	5200	16.257	17.699	N/A	Pass	
	5240	16.250	17.723	N/A	Pass	
	5180	17.592	18.872	N/A	Pass	
802.11n20	5200	17.607	18.903	N/A	Pass	
	5240	17.613	18.905	N/A	Pass	


Test Data of Occupied Bandwidth and DTS Bandwidth for band 5.725-5.85 GHz						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	5745	16.279	15.158	0.5	Pass	
802.11a	5785	16.279	15.158	0.5	Pass	
	5825	16.287	15.160	0.5	Pass	
	5745	17.617	17.618	0.5	Pass	
802.11n20	5785	17.615	17.057	0.5	Pass	
	5825	17.621	17.005	0.5	Pass	






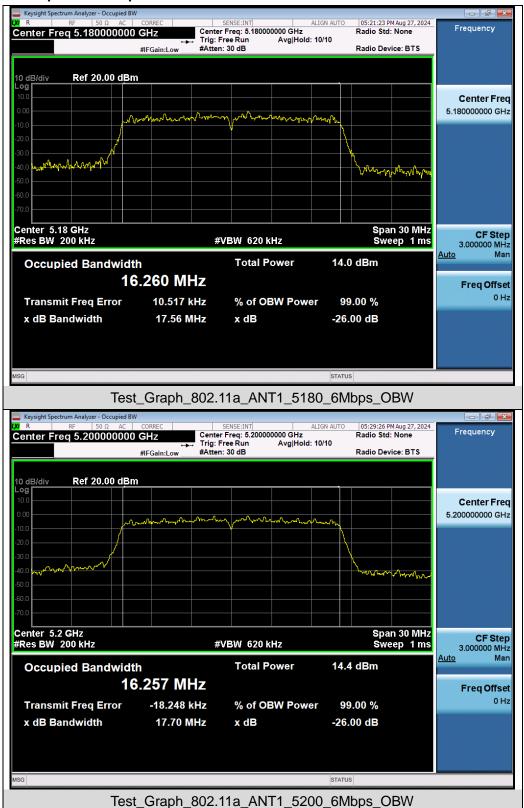


Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz






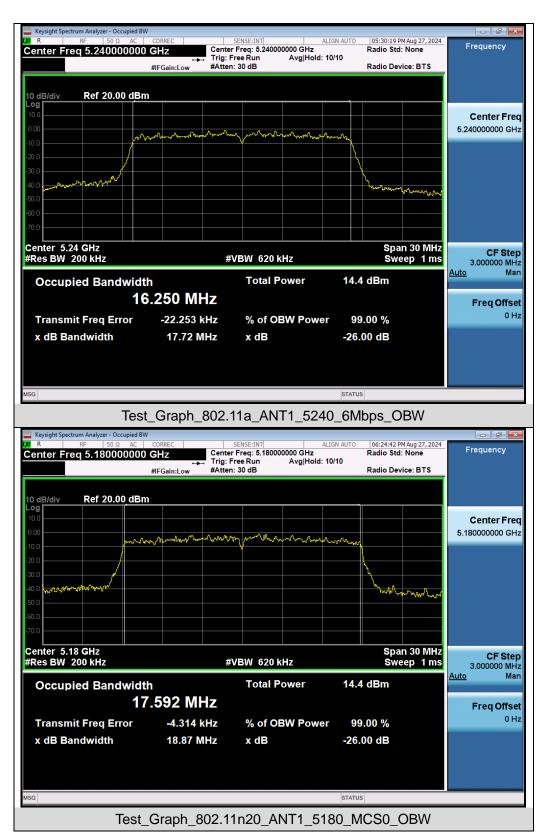



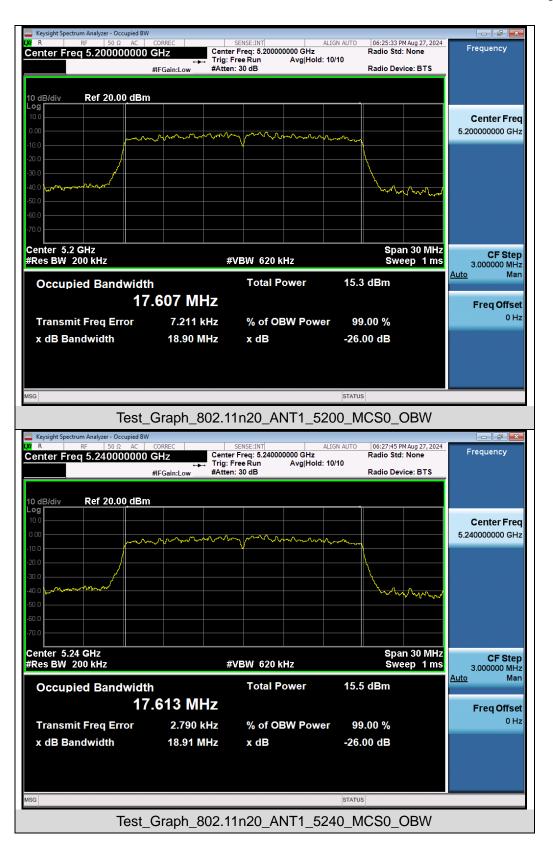




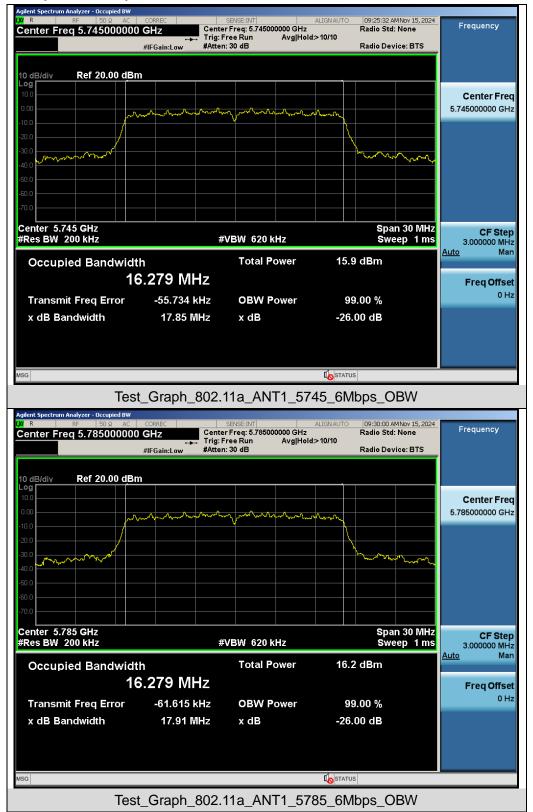



Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.745-5.825 GHz



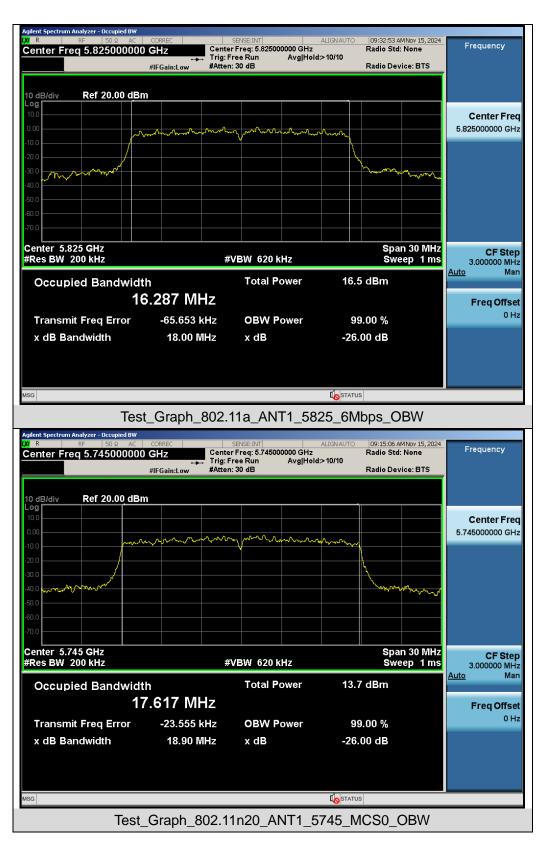




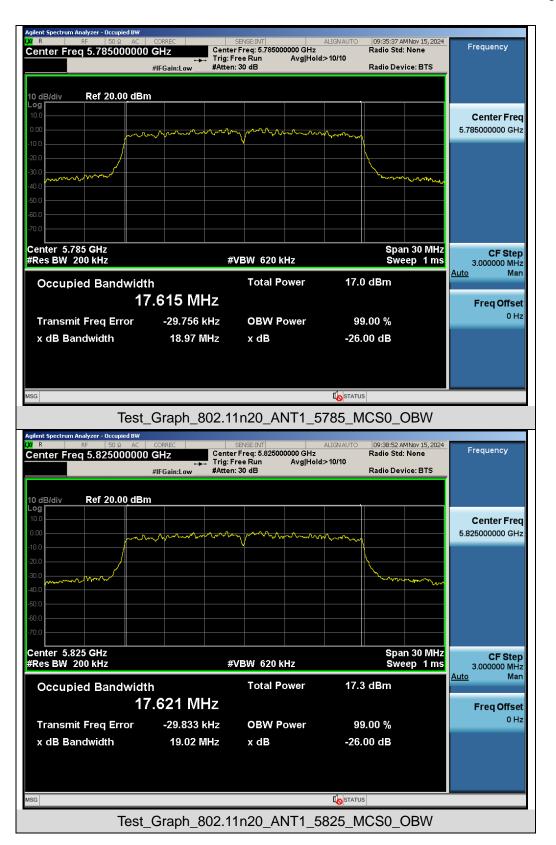






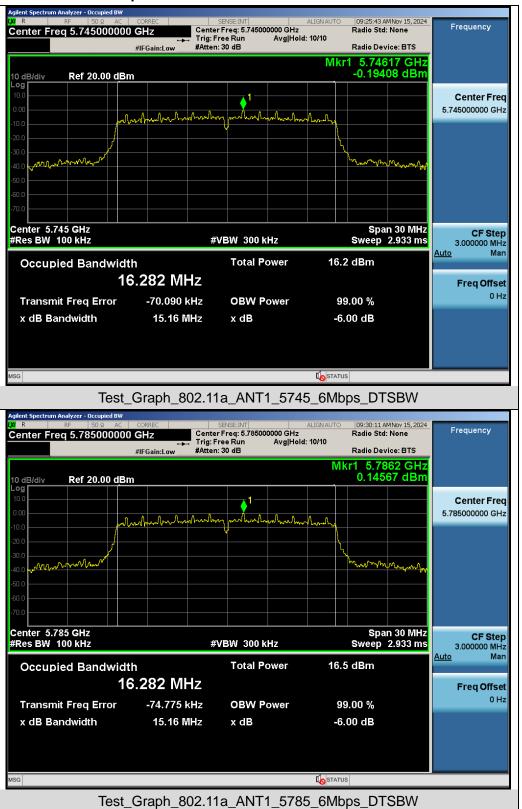


Test Graphs of DTS Bandwidth for band 5.725-5.85 GHz



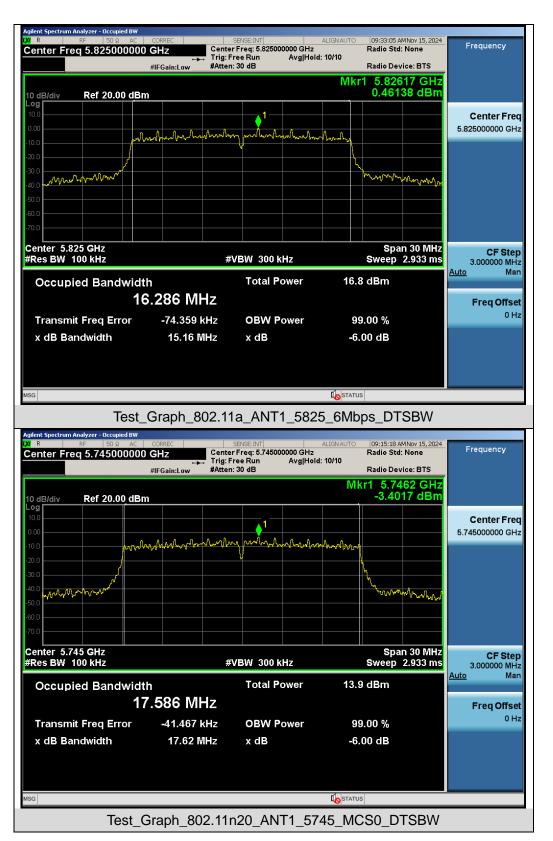



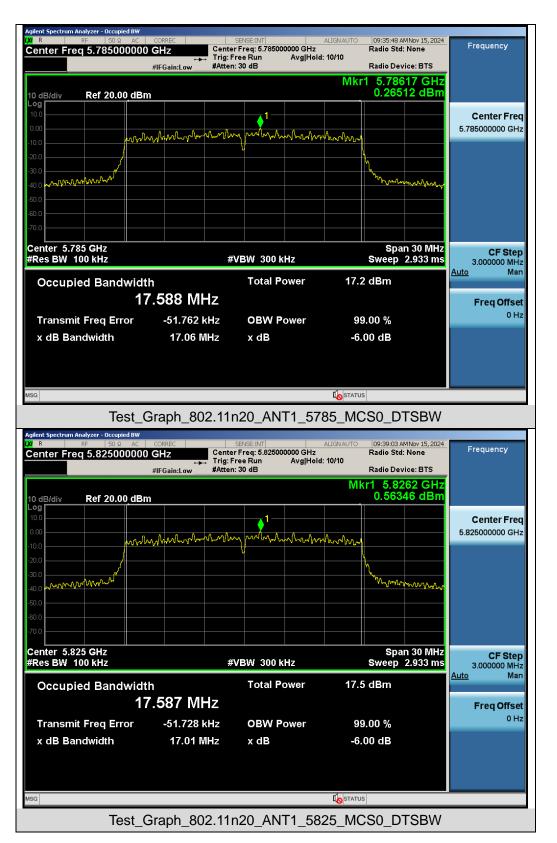



9. Power Spectral Density Measurement

9.1 Provisions Applicable


Operation Band	EUT Category		LIMIT	
U-NII-1		Outdoor Access Point	17dBm/ MHz	
		Fixed point-to-point Access Point	17dBm/ MHz	
		Indoor Access Point	17dBm/ MHz	
	\boxtimes	Client devices	11dBm/ MHz	
U-NII-2A	/		11dBm/ MHz	
U-NII-2C	/		11dBm/ MHz	
U-NII-3	/		30 dBm/500kHz	

9.2 Measurement Procedure

⊠For Average power spectral density test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 2. Span was set to encompass the entire 26dB EBW of the signal.
- 3. RBW = 1MHz.
- 4. If measurement bandwidth of Maximum PSD is specified in 500 kHz, RBW = 100KHz
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 100 kHz, add a constant factor 10*log(500kHz/100kHz) = 6.99 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- Add [10 log (1/D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.

9.3 Measurement Setup (Block Diagram of Configuration)

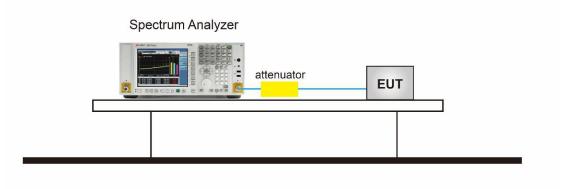




9.4 Measurement Result

Test Data of Conducted Output Power Density for band 5.15-5.25 GHz								
Test Mode	Test Channel (MHz)	Average Power Density (dBm/MHz)	Limits (dBm/MHz)	Pass or Fail				
802.11a	5180	-1.615	11	Pass				
	5200	-1.833	11	Pass				
	5240	-1.875	11	Pass				
802.11n20	5180	-2.080	11	Pass				
	5200	-2.188	11	Pass				
	5240	-2.051	11	Pass				

Test Data of Conducted Output Power Density for band 5.725-5.85 GHz								
Test Mode	Test Channel (MHz)	Average Power Density (dBm/100kHz)	Average Power Density (dBm/500kHz)	Limits (dBm/500kHz)	Pass or Fail			
802.11a	5745	-8.842	-1.852	30	Pass			
	5785	-8.425	-1.435	30	Pass			
	5825	-8.160	-1.170	30	Pass			
802.11n20	5745	-12.049	-5.059	30	Pass			
	5785	-8.127	-1.137	30	Pass			
	5825	-8.313	-1.323	30	Pass			







Test Graphs of Conducted Output Power Spectral Density for band 5.15-5.25 GHz













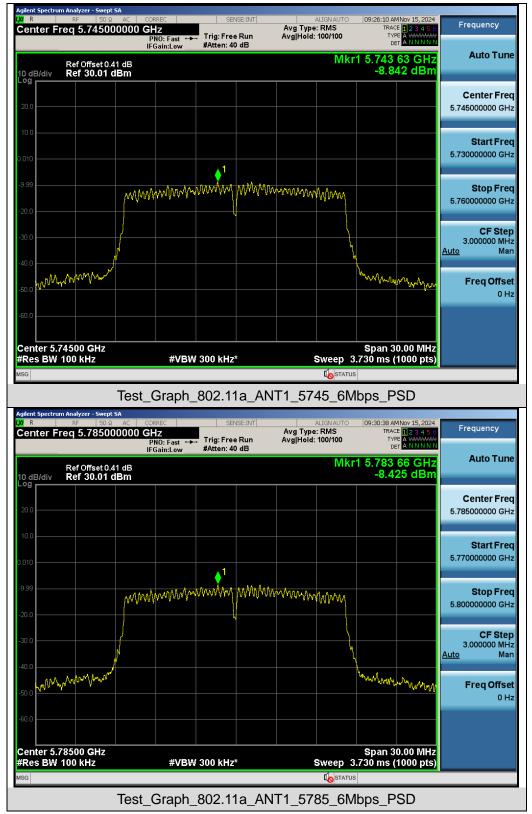


Test Graphs of Conducted Output Power Spectral Density for band 5.725-5.85 GHz



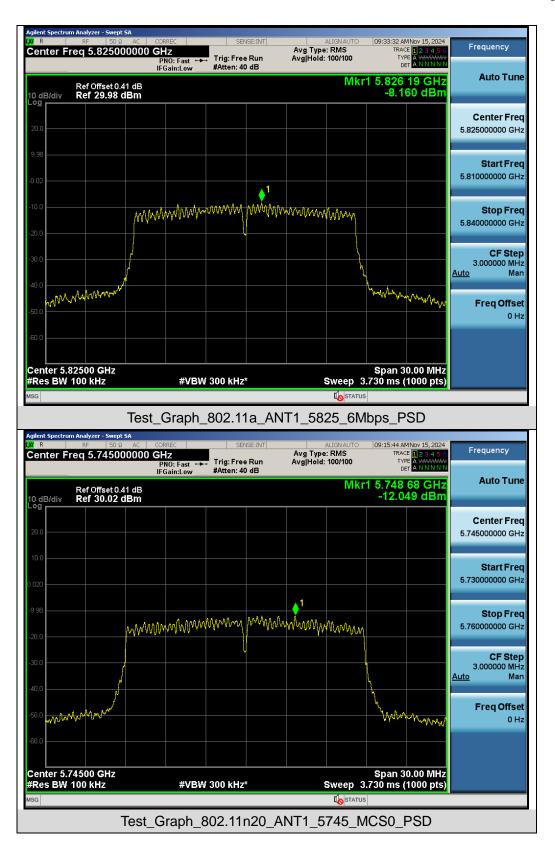



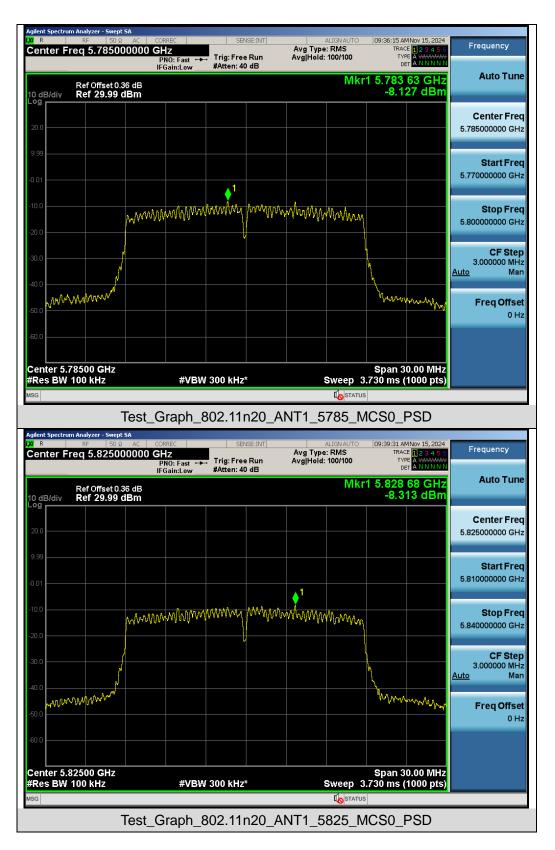



10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable

	Applicable to		Limit	
Restricted	789033 D02 General UNII Test	Field strength at 3m (dBuV/m)		
bands	Procedures New Rules v02r01	PK: 74	AV: 54	
	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)	
Out of the	FCC 15.407(b)(1)			
restricted bands	15.407(b)(2)	PK: -27	PK: 68.2	
	15.407(b)(3)			
	15.407(b)(4)	See Note 2		

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000 \sqrt{30 P}}{3} \quad \mu V/m, \text{ where P is the eirp (Watts)}$$

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at 5 MHz above or below the band edge.

10.2 Measurement Procedure

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
- 4. RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.(Test frequency below 1GHz)
- 5. RBW = 1 MHz; VBW= 3 MHz; Sweep = auto; Detector function = peak.(Test frequency Above 1GHz)
- 6. Set SPA Trace 1 Max hold, then View.
- 7. Mark the maximum useless stray point and compare it with the limit value to record the result.

10.3 Measurement Setup (Block Diagram of Configuration)

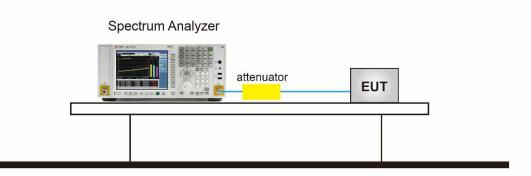

Any report havi

g/Inspection

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com




10.4 Measurement Results

Test Graphs of Spurious Emissions outside of the 5.15-5.25 GHz band for transmitters operating in the

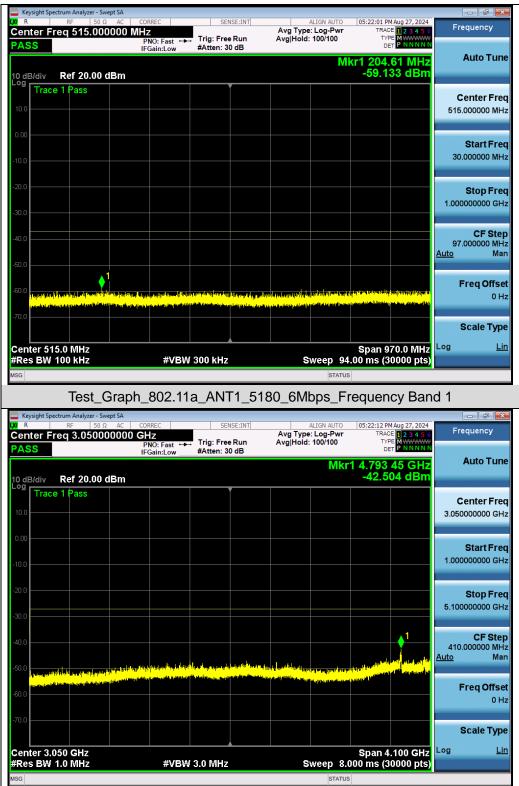


5.15-5.25 GHz band




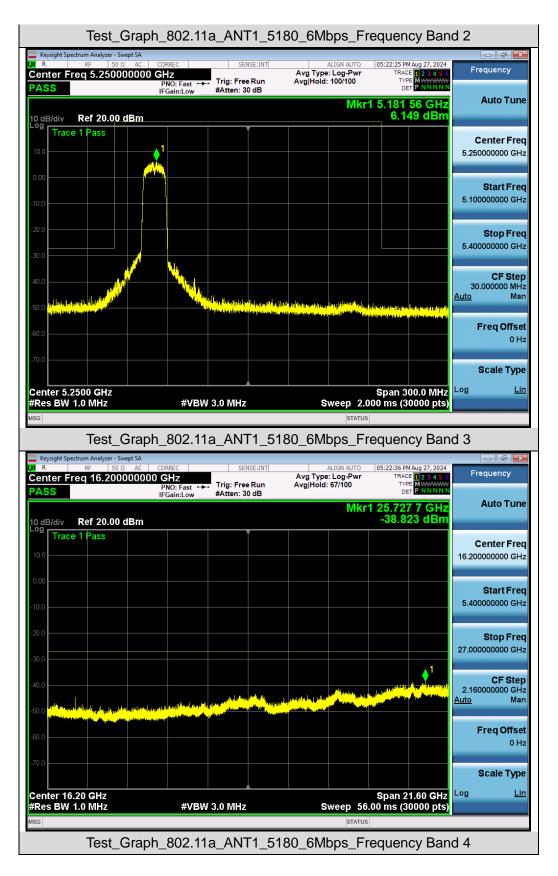



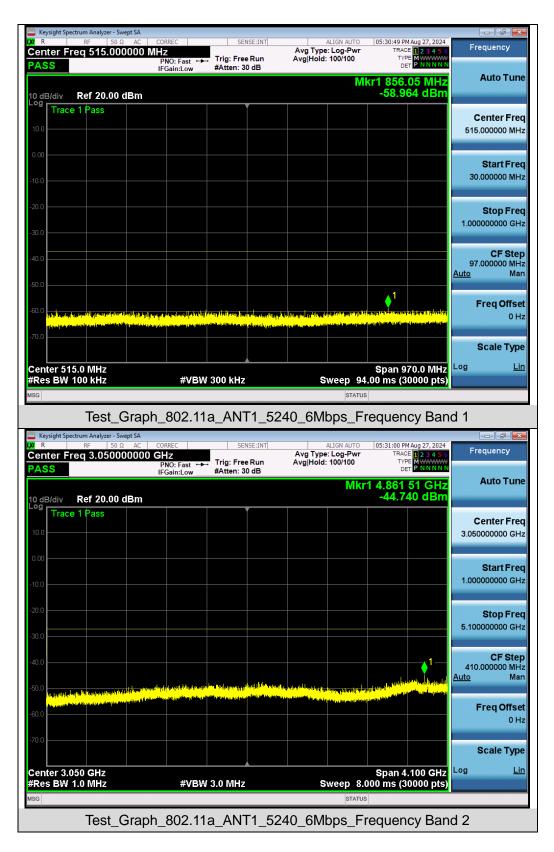



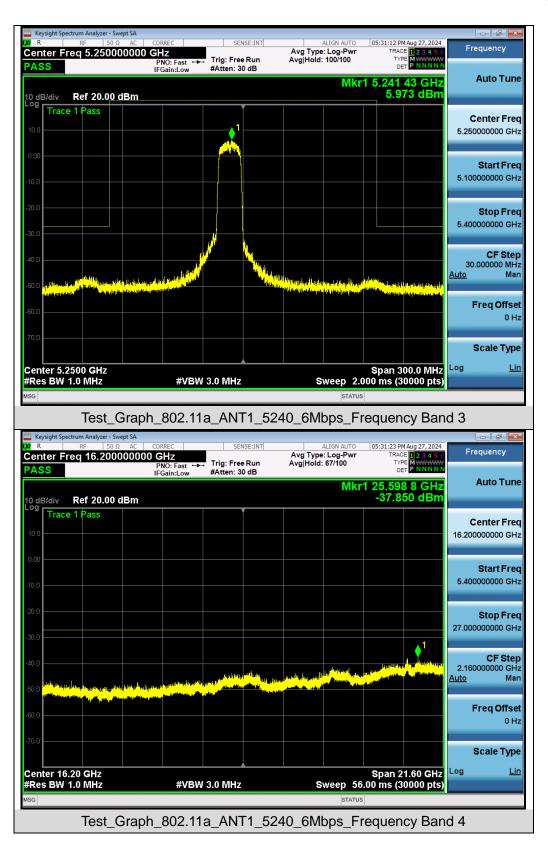





Test Graphs of Spurious Emissions outside of the 5.725-5.85 GHz band for transmitters operating in the 5.725-5.85 GHz band






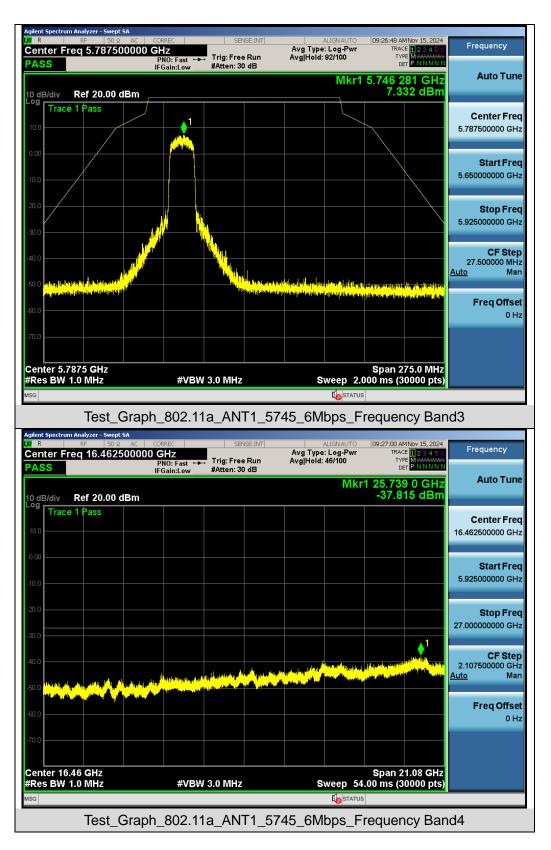



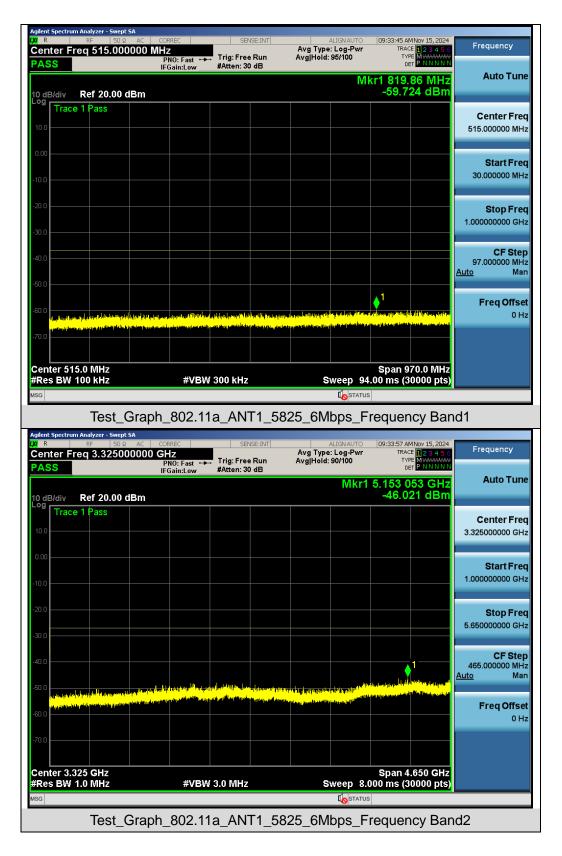



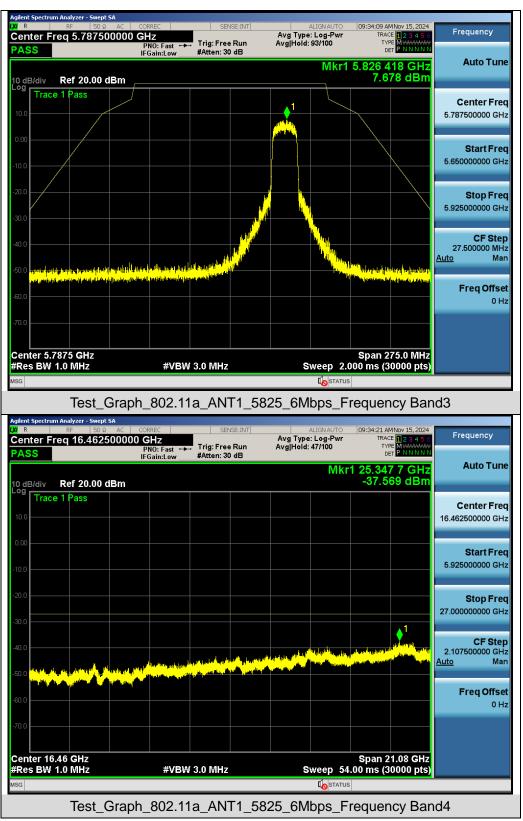

Note: The test data already include the cable loss and antenna gain which added by test software.



11. Radiated Spurious Emission

11.1 Measurement Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

	Applicable to		Limit		
Restricted	789033 D02 General UNII Test	Field strength at 3m (dBuV/m)			
bands	Procedures New Rules v02r01	PK: 74	AV: 54		
	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)		
Out of the	FCC 15.407(b)(1)				
restricted bands	15.407(b)(2)	PK: -27	PK: 68.2		
	15.407(b)(3)				
	15.407(b)(4)	See Note 2			

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30 P}}{3} \quad \mu V/m, \text{ where P is the eirp (Watts).}$$

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at 5 MHz above or below the band edge.



11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.Section G) Unwanted emissions measurement.

Procedure for Unwanted Emissions Measurements Below 1000MHz:

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

<u>Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz:</u>

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

• Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.


• VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

- <u>Procedures for Average Unwanted Emissions Measurements Above 1000MHz:</u>
 - RBW = 1 MHz
 - VBW = 3 MHz Detector = power averaging (rms), set span/(# of points in sweep) \ge RBW/2.
 - Averaging type = power averaging (RMS)
 - The correction factor shall be offset is $10 \log (1/x)$, where x is the duty cycle.




11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

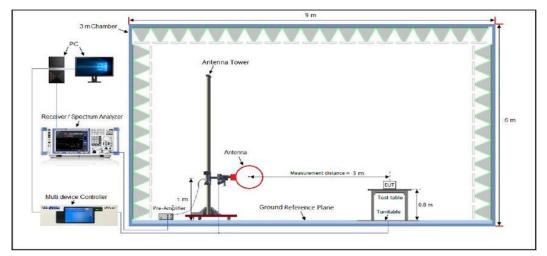

Radiated Emission Test Setup 30MHz-1000MHz

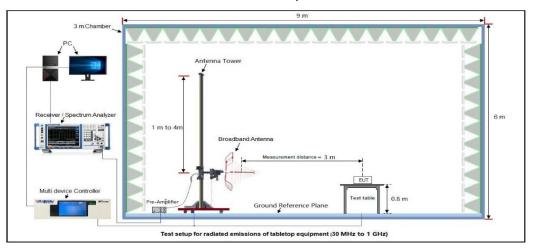

Radiated Emission Test Setup Above 1000MHz

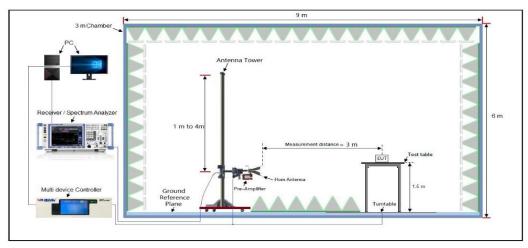

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

		Ra	diated Emi	ssion lest Res	suits at 30M	IHZ-1GHZ		
EUT Name		Wireles	s Speaker		Model Na	me	A3305	
Temperatu	re	22.6°C			Relative H	Humidity	58.3%	
Pressure		960hPa	a		Test Volta	age	DC 3.6	V by battery
Test Mode		802.11	n20_5825M	lHz	Antenna		Horizor	ntal
72.0	dBuV/m							
32	entrong With and an experimental processing of the second se	(mtruleyour, carried						
-8 30.	.000 40	50 60 7	70 80	(NHz)	300	400 500) 600 70(0 1000.000
N	o. Mk.	Freq.	Reading Level	Factor	Measure- ment dBuV/m	Limit dBuV/m	Over	Detector
		MHz	dBuV	dB	abuv/m	aBuv/m	dB	Detector
	1 187	.0956	17.19	13.02	30.21	43.50 -	13.29	peak
	2 321	.0607	15.61	16.53	32.14	46.00 -	13.86	peak

Radiated Emission Test Results at 30MHz-1GHz

Result: Pass

3

4

5

6 *

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

24.71

24.30

23.35

30.64

33.94

32.36

34.45

39.80

46.00

46.00

46.00

46.00

-12.06

-13.64

-11.55

-6.20

peak

peak

peak

peak

9.23

8.06

11.10

9.16

451.1349

533.8320

645.1195

890.7278



UT Nam	ne			Wire	less	Spea	ker		Model	Nam	е		A33	05	
emperat	ture		:	22.6	22.6°C			Relativ	Relative Humidity			58.3%			
ressure	•		:	960h	ηPa				Test Vo	Test Voltage			DC	3.6V	by batt
Test Mode			802.	11n2	0_582	25MF	Ηz	Antenr	na			Vert	ical		
	72.0 dB	3u∀/m											Lim	it:	_
														rgin:	_
												з Х	4 X	Mayhow	5
	32	_		_				2 X	My have briderender		. Inthe	1 minut	www.	VM VHINKI	
			بالمتعامية	1	humb .	water and the second		where a source we shall	March reprinter	North March	Amen Ma				
	Anna	PARAMAN	vprauluralista	AWA	M- OWM	Mary Angel	hurbourd	vn ····							
-{	B 30.000	41	0 50	60	70	80		(MHz)		300	400	500	600	700	1000.000
-							ina				100				
	No.	Mk	F	req.		Readi Leve	<u> </u>	Correct Factor	Measure ment		Limit	С	ver		
-									mont						etector
				1Hz		- dBul	V	dB	dBuV/m		IBuV/m		dB	1)6	
-	4			/Hz	,	dBu\		dB	dBuV/m		IBuV/m		dB		
	1		56.7	7917		7.3	3	17.07	24.40	4	0.00	-1	5.60	þ	eak
	1			7917			3			4		-1		þ	
	-		56.7	7917 1898	}	7.3	3 1	17.07	24.40	4	0.00	-1 -1	5.60	p	eak
	2		56.7 184.4	7917 1898 7447	}	7.3 13.3	3 1 8	17.07 18.37	24.40 31.68	4	0.00	-1 -1 -9	5.60 1.82	q q	oeak Deak
-	2	*	56.7 184.4 490.7	7917 1898 7447 3613	}	7.3 13.3 12.3	3 1 8 2	17.07 18.37 23.96	24.40 31.68 36.34	4 4 4 4	0.00 3.50 6.00	-1 -1 -9 -7	5.60 1.82 9.66	q q q	oeak oeak oeak
-	2 3 4	*	56.7 184.4 490.7 642.8	7917 1898 7447 3613 0878	}	7.3 13.3 12.3 12.0	3 1 8 2 6	17.07 18.37 23.96 26.39	24.40 31.68 36.34 38.41	4 4 4 4	0.00 3.50 6.00 6.00	-1 -1 -9 -7 -1	5.60 1.82).66 7.59	q q q	oeak oeak oeak oeak

Result: Pass

Note:

- 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.
- 2. All test modes had been pre-tested, Refer to Chapter 5 of the report for details.



EUT Name	Wireless Speaker	Model Name	A3305
Temperature	22.6°C	Relative Humidity	58.3%
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	802.11n20_5745MHz	Antenna	Horizontal/Vertical

Radiated Emissions Test Results Above 1GHz

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.000	46.62	9.14	55.76	68.20	-12.44	peak
17235.000	41.41	10.22	51.63	74.00	-22.37	peak
17235.000	33.28	10.22	43.50	54.00	-10.50	AVG
Davasarda						
Remark:						
Factor = Anter	nna Factor + Cabl	e Loss – Pre-a	amplifier.			

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.000	45.57	9.14	54.71	68.20	-13.49	peak
17235.000	42.49	10.22	52.71	74.00	-21.29	peak
17235.000	32.26	10.22	42.48	54.00	-11.52	AVG
Remark:						
Factor = Anten	na Factor + Cab	le Loss – Pre-ar	nplifier.			

Result: Pass



EUT Name	Wireless Speaker	Model Name	A3305				
Temperature	22.6°C	Relative Humidity	58.3%				
Pressure	960hPa	Test Voltage	DC 3.6V by battery				
Test Mode	802.11n20_5785MHz	Antenna	Horizontal/Vertical				

Radiated Emissions Test Results Above 1GHz

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.000	47.22	9.14	56.36	68.20	-11.84	peak
17355.000	42.81	10.22	53.03	74.00	-20.97	peak
17355.000	31.79	10.22	42.01	54.00	-11.99	AVG
Remark:						
Factor = Anter	nna Factor + Cab	le Loss – Pre-a	mplifier.			

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.000	46.75	9.14	55.89	68.20	-12.31	peak
17355.000	42.31	10.22	52.53	74.00	-21.47	peak
17355.000	32.56	10.22	42.78	54.00	-11.22	AVG
Remark:						
Factor = Anten	na Factor + Cabl	le Loss – Pre-a	mplifier.			

Result: Pass



EUT Name	Wireless Speaker	Model Name	A3305			
Temperature	22.6°C	Relative Humidity	58.3%			
Pressure	960hPa	Test Voltage	DC 3.6V by battery			
Test Mode	802.11n20_5825MHz	Antenna	Horizontal/Vertical			

Radiated Emissions Test Results Above 1GHz

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.000	47.17	9.27	56.44	68.20	-11.76	peak
17475.000	42.24	10.38	52.62	74.00	-21.38	peak
17475.000	32.59	10.38	42.97	54.00	-11.03	AVG
Domorly						
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	amplifier.			

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.000	46.37	9.27	55.64	68.20	-12.56	peak
17475.000	41.45	10.38	51.83	74.00	-22.17	peak
17475.000	31.92	10.38	42.30	54.00	-11.70	AVG
Remark:						
Factor = Anter	na Factor + Cab	le Loss – Pre-a	mplifier.			

Result: Pass


Note:

- 1. The amplitude of other spurious emissions from 1GHz to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Amplifier gain, Margin=Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All test modes had been pre-tested. Refer to Chapter 5 of the report for details.




	Test Result for Dand edge Linis.	sion at Restricted ban	43
EUT Name	Wireless Speaker	Model Name	A3305
Temperature	24.3°C	Relative Humidity	53.0%
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	802.11a_5180MHz	Antenna	Horizontal

Test Result for Band edge Emission at Restricted bands

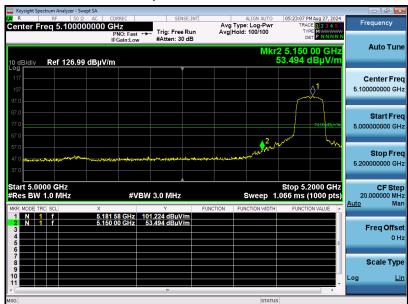

Test Graph for Peak Measurement

Test Graph for Average Measurement

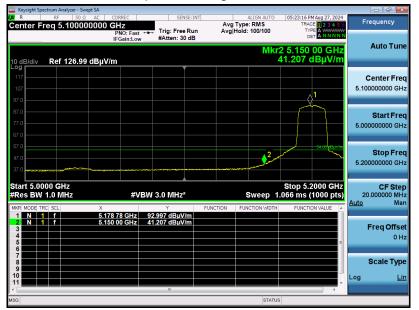


Result: Pass




	Test Result for Band edge Emis	sion at Restricted ban	as
EUT Name	Wireless Speaker	Model Name	A3305
Temperature	24.3°C	Relative Humidity	53.0%
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	802.11a_5180MHz	Antenna	Vertical
	T (A) (B) I		

adam Englandan of Depthicted ha

Test Graph for Peak Measurement

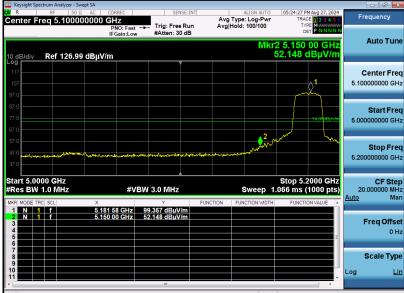

Test Graph for Average Measurement

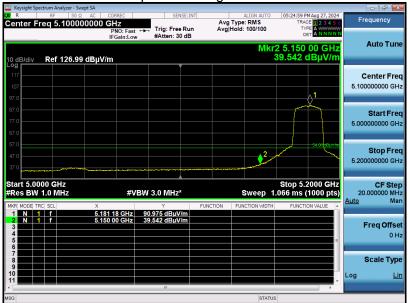

Result: Pass

Note:

- The factor had been edited in the "Input Correction" of the Spectrum Analyzer. 1.
- All test modes had been pre-tested, Refer to Chapter 5 of the report for details. 2.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



12. AC Power Line Conducted Emission Test

12.1 Measurement limit


Frequency	Maximum RF Line Voltage				
Frequency	Q.P (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

12.2 Block Diagram of Line Conducted Emission Test

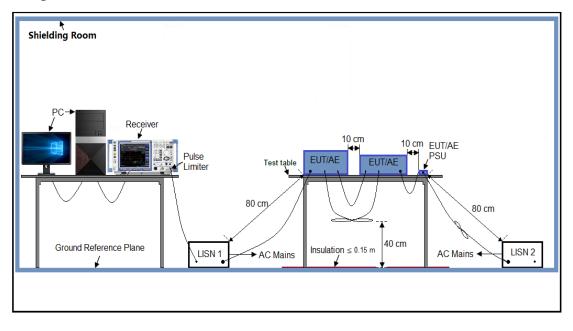



12.3 Preliminary Procedure of Line Conducted Emission Test

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.

12.5 Test Result of Line Conducted Emission Test



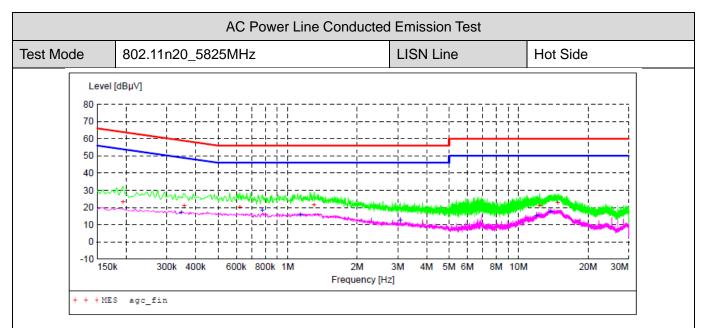

MEASUREMENT RESULT: "agc fin"

2024/9/2 13:55

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.194000	23.10	6.1	64	40.8	-	L1
0.358000 0.622000	21.10 20.00	6.1 6.2	59 56	37.7 36.0	-	L1 L1
1.302000	21.30	6.2	56	34.7	-	L1
12.354000 14.810000	20.80 22.80	6.8 6.8	60 60	39.2 37.2	-	L1 L1

MEASUREMENT RESULT: "agc fin2"


2024/9/2 13:5 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.346000	16.90	6.1	49	32.2	AV	L1
0.778000	18.20	6.2	46	27.8	AV	ь1
1.138000	15.80	6.2	46	30.2	AV	ь1
3.074000	12.60	6.3	46	33.4	AV	L1
11.986000	15.00	6.8	50	35.0	AV	ь1
13.766000	17.60	6.8	50	32.4	AV	L1

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



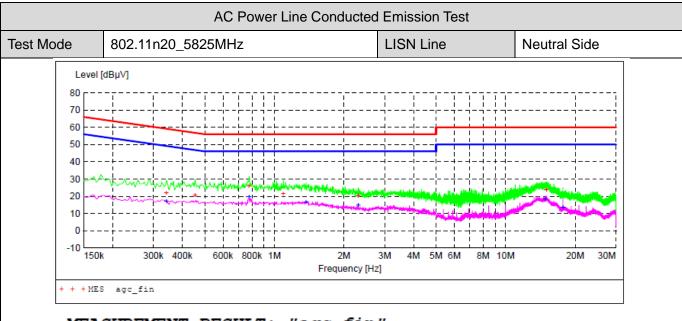

MEASUREMENT RESULT: "agc fin"

2024/9/2 13:53 Margin Frequency Level Transd Limit Detector Line dB dBµV MHz dBµV dB 0.342000 21.70 6.1 59 37.5 QP Ν 0.454000 20.50 6.1 57 36.3 Ν QP 0.778000 25.80 6.2 56 30.2 Ν QP 1.094000 21.30 6.2 56 34.7 QP Ν 20.00 6.3 56 2.306000 36.0 QP Ν 6.9 15.002000 23.60 60 36.4 QP Ν

MEASUREMENT RESULT: "agc fin2"

2024/9/2 13:5						
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.342000	17.00	6.1	49	32.2	AV	N
0.778000	19.50	6.2	46	26.5	AV	Ν
1.370000	16.40	6.2	46	29.6	AV	N
2.306000	14.80	6.3	46	31.2	AV	N
14.794000	18.20	6.8	50	31.8	AV	Ν
17.662000	13.60	7.0	50	36.4	AV	N

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



Report No.: AGC01110240643FR03 Page 67 of 67

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01110240643AP02

Appendix II: Photographs of EUT

Refer to the Report No.: AGC01110240643AP03

----End of Report----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.