



LTE Band 26 (Channel Bandwidth 3MHz)



CH 26805 (825.5MHz)

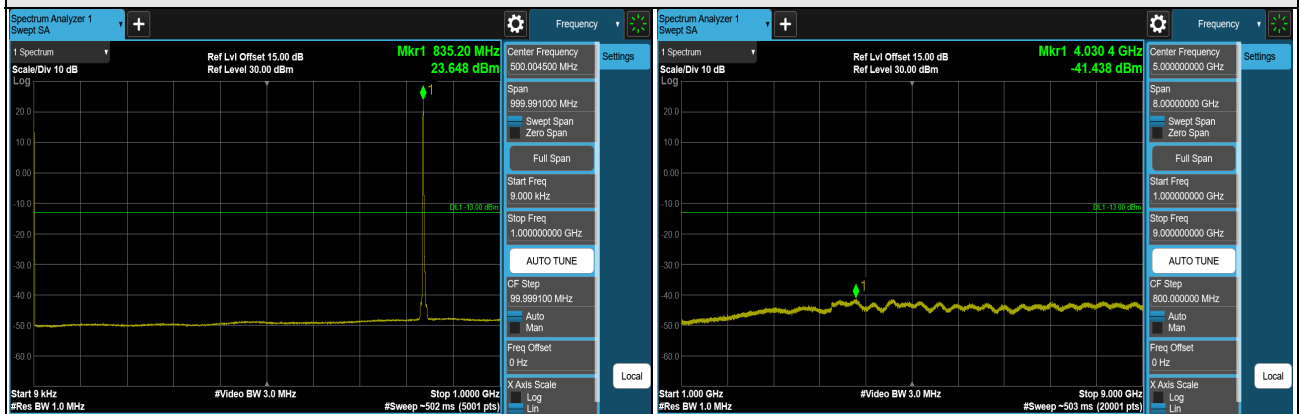


CH 26915 (836.5MHz)

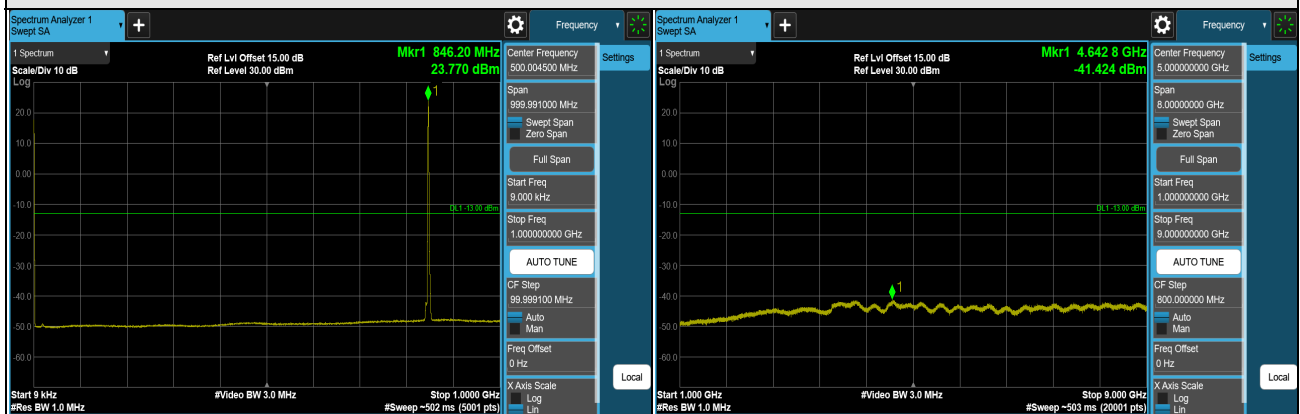


CH 27025 (847.5MHz)

*The 9kHz signal over the limit is from Spectrum.


LTE Band 26 (Channel Bandwidth 5MHz)

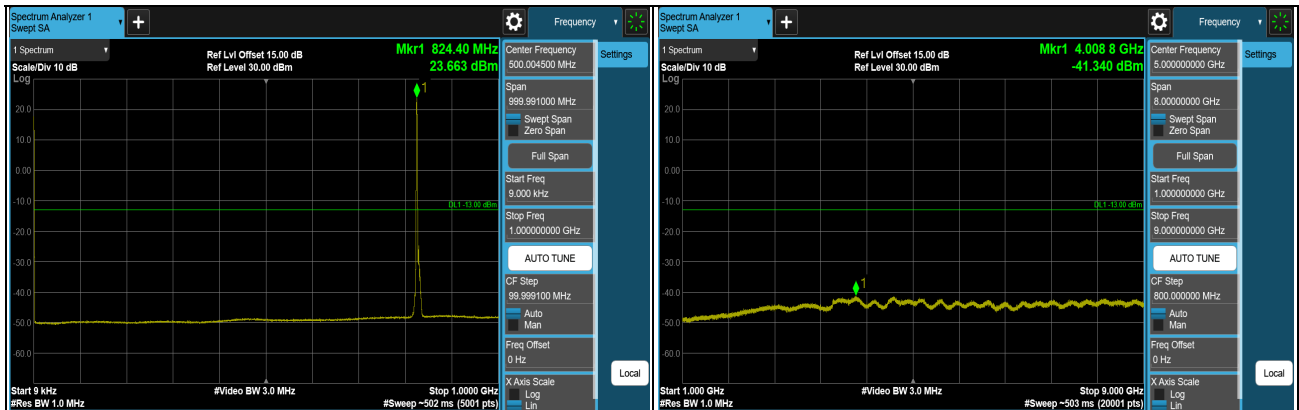

CH 26815 (826.5MHz)

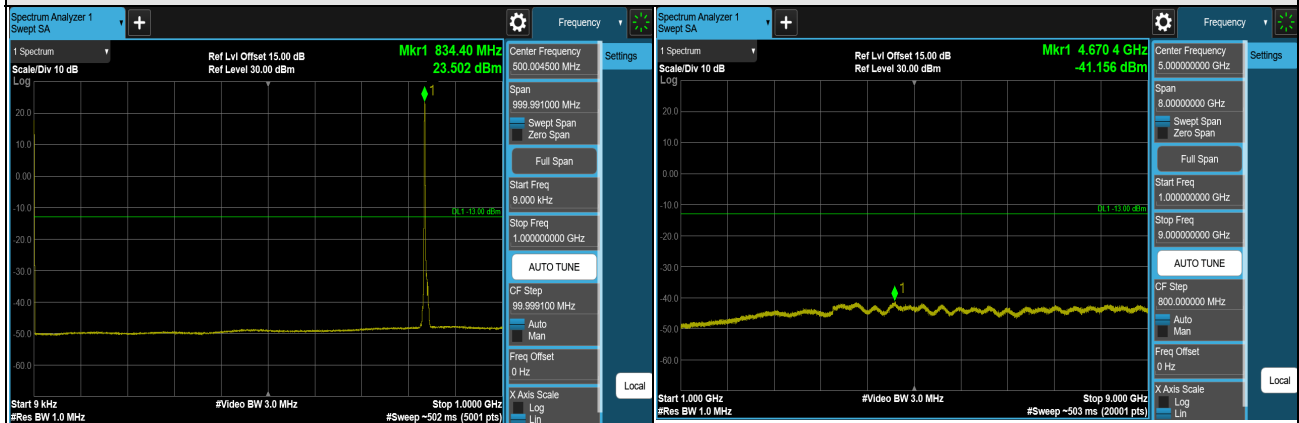


CH 26915 (836.5MHz)

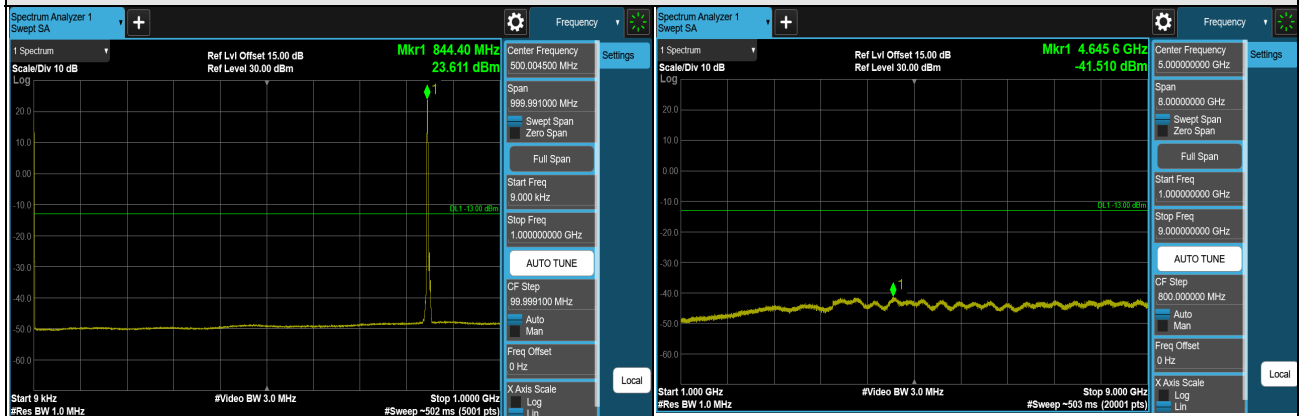

CH 27015 (846.5MHz)

*The 9kHz signal over the limit is from Spectrum.

LTE Band 26 (Channel Bandwidth 10MHz)

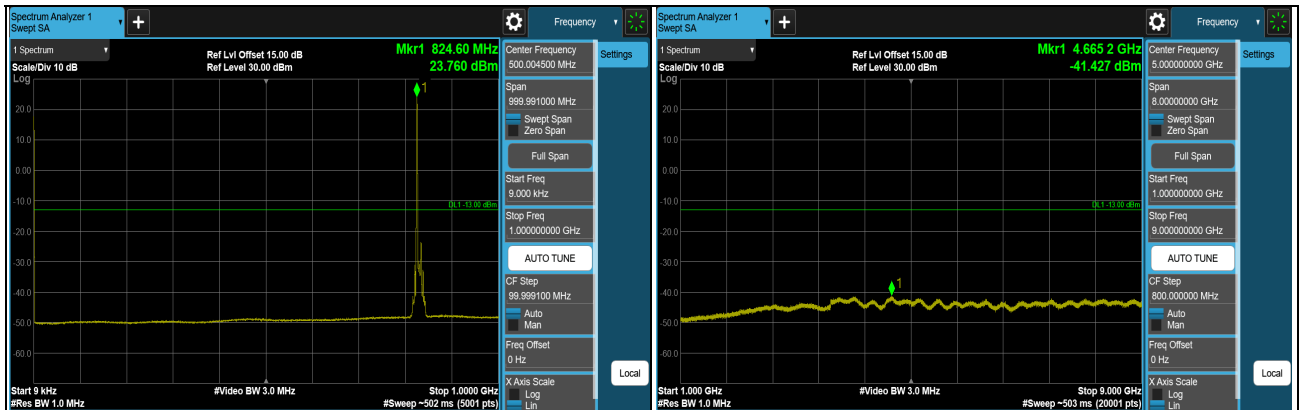

CH 26840 (829MHz)




CH 26915 (836.5MHz)



CH 26990 (844MHz)

*The 9kHz signal over the limit is from Spectrum.


LTE Band 26 (Channel Bandwidth 15MHz)

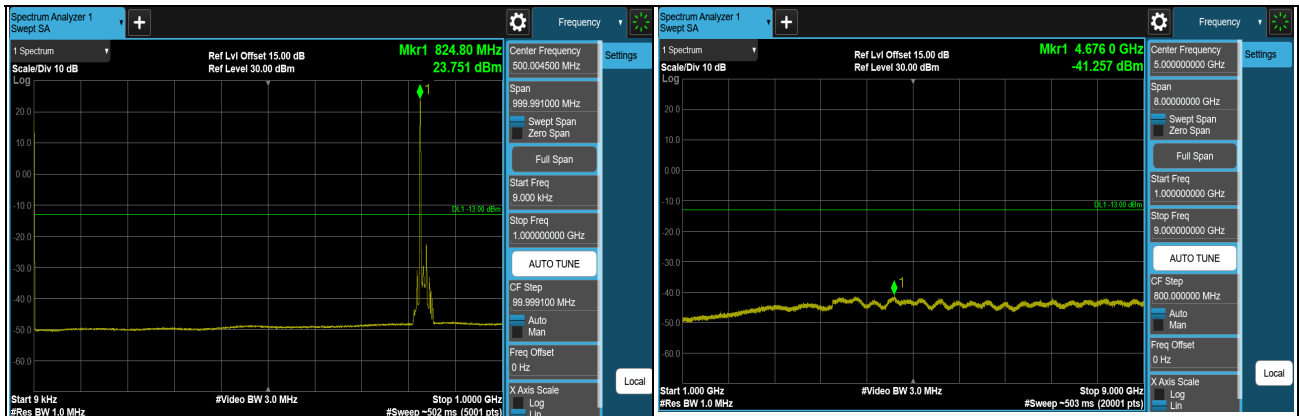

CH 26865 (831.5MHz)



CH 26915 (836.5MHz)

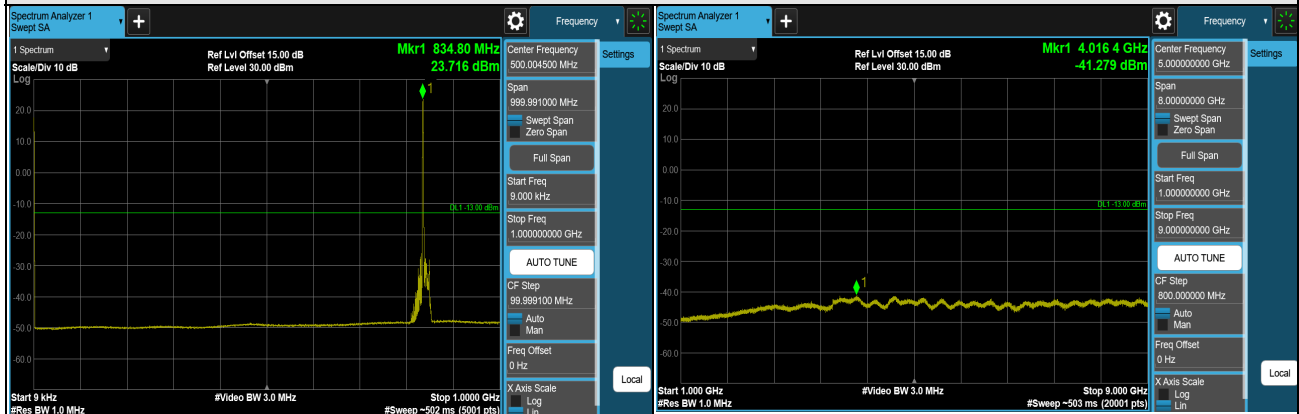

CH 26965 (841.5MHz)

*The 9kHz signal over the limit is from Spectrum.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.8.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m (below or equal 1GHz) and/or 1.5m (above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
 - $\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 - $\text{ERP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

For radiated emission 30MHz to 1GHz

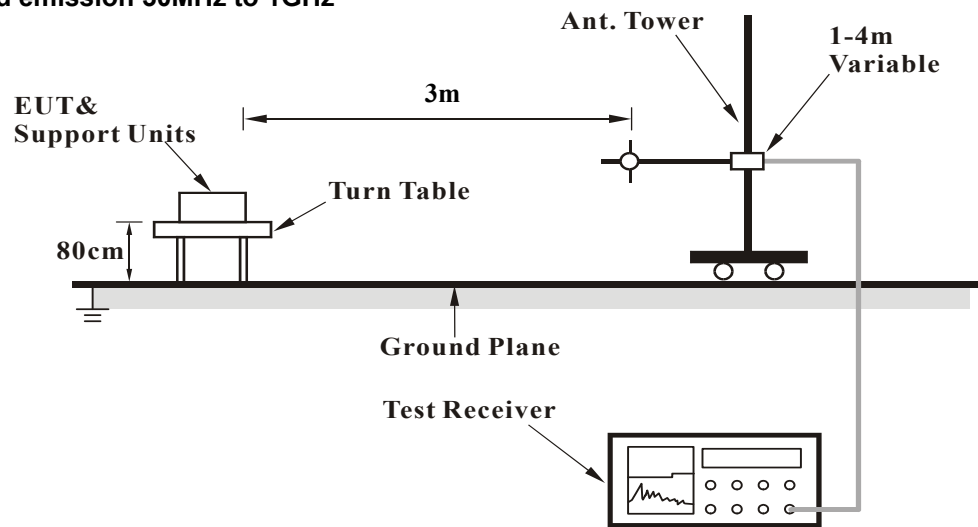

For radiated emission above 1GHz

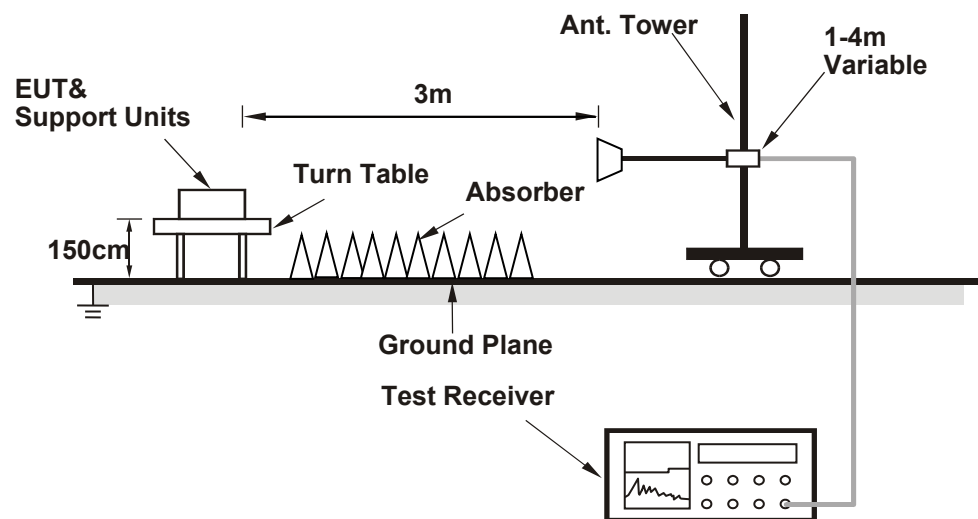

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz


GRPS

Mode	TX channel 189 (836.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.92	-37.36	-13.00	-24.36	1.50 H	18	74.74	-112.10
2	122.15	-52.98	-13.00	-39.98	1.50 H	122	59.59	-112.57
3	163.86	-49.16	-13.00	-36.16	1.50 H	259	61.52	-110.68
4	392.78	-63.59	-13.00	-50.59	1.00 H	221	43.98	-107.57
5	493.66	-61.37	-13.00	-48.37	1.50 H	88	44.00	-105.37
6	734.22	-61.49	-13.00	-48.49	1.50 H	18	39.38	-100.87

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

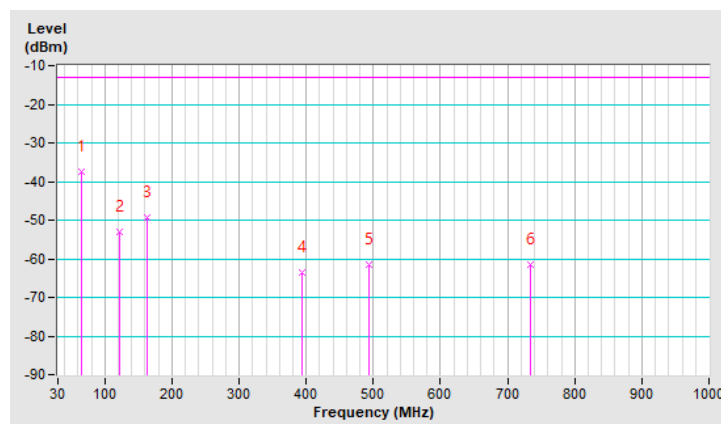


Mode	TX channel 189 (836.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.95	-34.21	-13.00	-21.21	2.00 V	276	77.39	-111.60
2	95.96	-56.03	-13.00	-43.03	1.01 V	237	59.95	-115.98
3	142.52	-53.40	-13.00	-40.40	1.01 V	66	57.33	-110.73
4	164.83	-48.56	-13.00	-35.56	1.01 V	110	62.10	-110.66
5	297.72	-65.19	-13.00	-52.19	1.01 V	9	44.73	-109.92
6	774.96	-52.17	-13.00	-39.17	1.51 V	316	48.27	-100.44

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

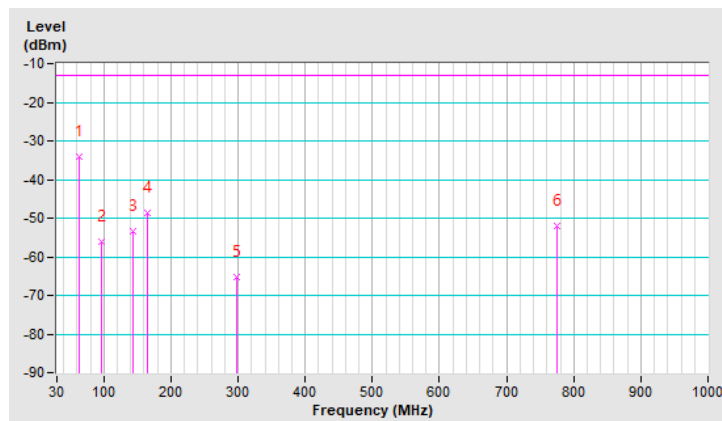


EDGE

Mode	TX channel 189 (836.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.10	-44.74	-13.00	-31.74	1.00 H	55	66.25	-110.99
2	140.58	-54.06	-13.00	-41.06	1.50 H	115	56.86	-110.92
3	170.65	-58.20	-13.00	-45.20	1.00 H	267	52.73	-110.93
4	370.47	-64.56	-13.00	-51.56	1.00 H	207	43.52	-108.08
5	464.56	-64.27	-13.00	-51.27	1.50 H	127	41.46	-105.73
6	865.17	-60.04	-13.00	-47.04	1.99 H	2	39.41	-99.45

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

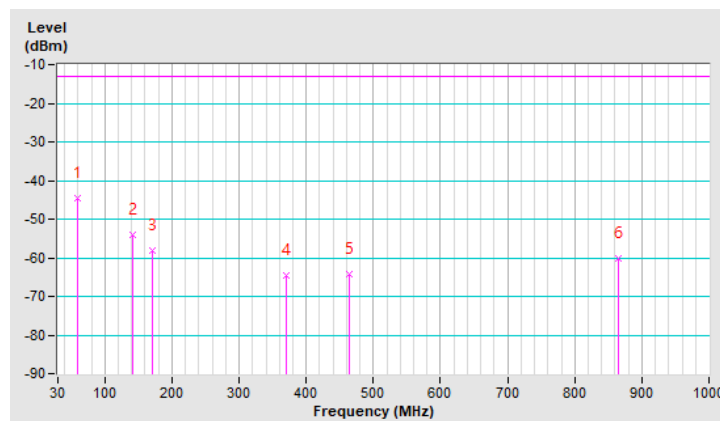


Mode	TX channel 189 (836.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	-36.50	-13.00	-23.50	1.51 V	2	75.32	-111.82
2	72.68	-49.29	-13.00	-36.29	1.01 V	120	64.25	-113.54
3	131.85	-59.18	-13.00	-46.18	1.01 V	96	52.46	-111.64
4	170.65	-57.68	-13.00	-44.68	1.01 V	28	53.25	-110.93
5	383.08	-65.03	-13.00	-52.03	2.00 V	171	42.73	-107.76
6	763.32	-51.95	-13.00	-38.95	1.01 V	325	48.49	-100.44

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

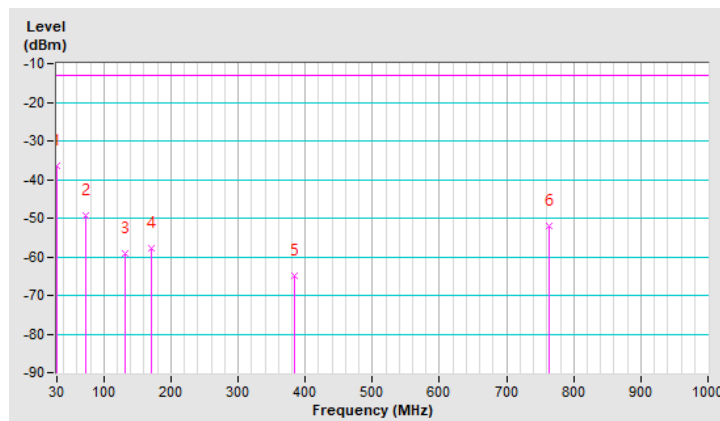


WCDMA

Mode	TX channel 4233 (846.6MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.95	-37.08	-13.00	-24.08	2.00 H	25	74.52	-111.60
2	141.55	-53.62	-13.00	-40.62	1.50 H	101	57.17	-110.79
3	163.86	-49.80	-13.00	-36.80	1.50 H	256	60.88	-110.68
4	371.44	-66.14	-13.00	-53.14	1.00 H	145	41.91	-108.05
5	476.20	-60.95	-13.00	-47.95	1.00 H	99	44.59	-105.54
6	575.14	-62.13	-13.00	-49.13	1.50 H	289	41.49	-103.62

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

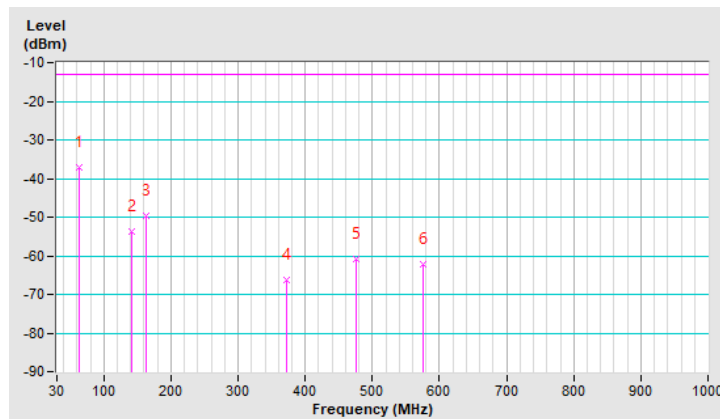


Mode	TX channel 4233 (846.6MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.98	-37.73	-13.00	-24.73	2.00 V	252	73.97	-111.70
2	101.78	-56.25	-13.00	-43.25	1.50 V	212	58.52	-114.77
3	143.49	-55.33	-13.00	-42.33	1.50 V	58	55.34	-110.67
4	164.83	-52.55	-13.00	-39.55	1.00 V	284	58.11	-110.66
5	774.96	-52.17	-13.00	-39.17	1.00 V	50	48.27	-100.44
6	958.29	-55.18	-13.00	-42.18	1.00 V	258	42.58	-97.76

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

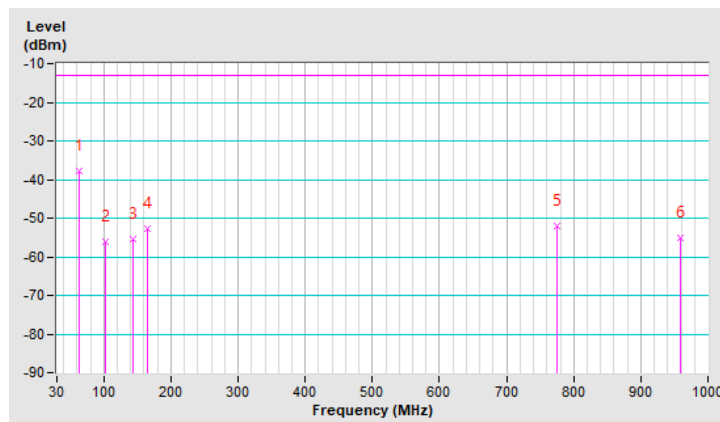


LTE Band 5 (Channel Bandwidth 10MHz)

Mode	TX channel 20525 (836.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	-42.35	-13.00	-29.35	1.50 H	116	69.47	-111.82
2	63.95	-38.20	-13.00	-25.20	1.00 H	20	73.40	-111.60
3	165.80	-50.54	-13.00	-37.54	2.00 H	262	60.16	-110.70
4	388.90	-63.20	-13.00	-50.20	1.00 H	236	44.44	-107.64
5	476.20	-64.07	-13.00	-51.07	1.00 H	296	41.47	-105.54
6	577.08	-63.63	-13.00	-50.63	1.00 H	2	39.94	-103.57

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

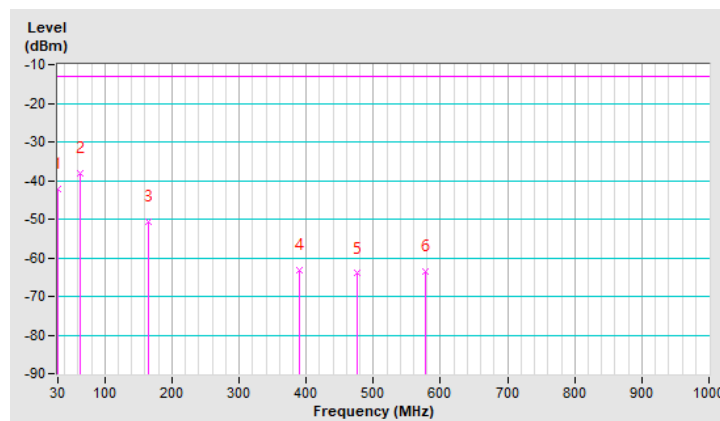


Mode	TX channel 20525 (836.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.95	-36.91	-13.00	-23.91	1.50 V	50	74.69	-111.60
2	142.52	-53.52	-13.00	-40.52	1.00 V	72	57.21	-110.73
3	223.03	-65.08	-13.00	-52.08	1.00 V	38	48.70	-113.78
4	430.61	-66.38	-13.00	-53.38	1.50 V	103	40.22	-106.60
5	459.71	-65.09	-13.00	-52.09	1.00 V	287	40.72	-105.81
6	542.16	-63.93	-13.00	-50.93	2.00 V	138	40.58	-104.51

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

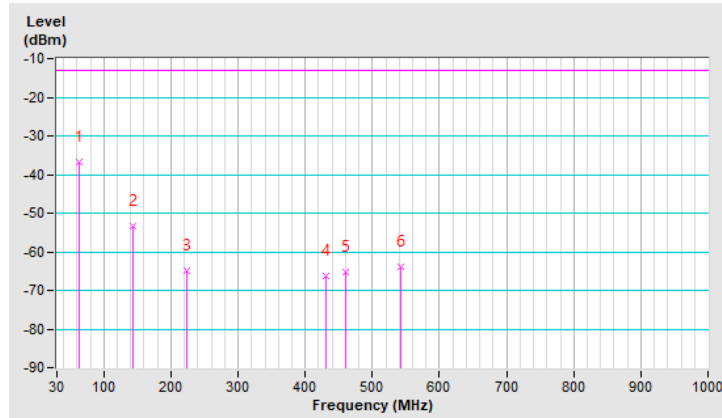


LTE Band 26 (Channel Bandwidth 15MHz)

Mode	TX channel 26915 (836.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.92	-43.75	-13.00	-30.75	2.00 H	8	68.35	-112.10
2	141.55	-53.75	-13.00	-40.75	1.00 H	124	57.04	-110.79
3	220.12	-67.18	-13.00	-54.18	1.00 H	127	46.65	-113.83
4	388.90	-63.03	-13.00	-50.03	1.50 H	219	44.61	-107.64
5	489.78	-64.04	-13.00	-51.04	1.50 H	202	41.35	-105.39
6	762.35	-52.58	-13.00	-39.58	1.00 H	48	47.87	-100.45

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

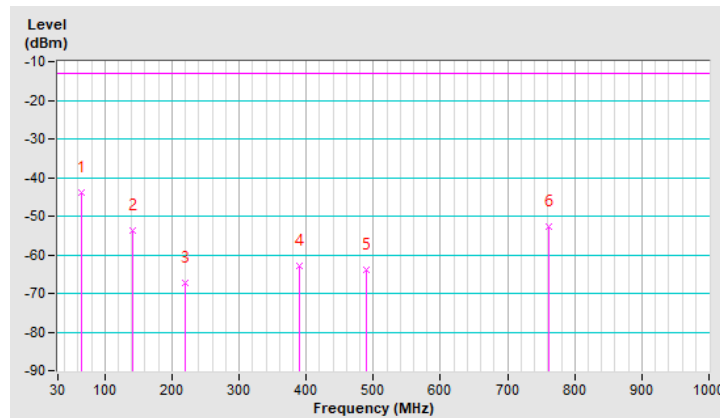


Mode	TX channel 26915 (836.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.95	-37.48	-13.00	-24.48	1.50 V	60	74.12	-111.60
2	143.49	-53.61	-13.00	-40.61	1.00 V	42	57.06	-110.67
3	164.83	-48.39	-13.00	-35.39	1.00 V	77	62.27	-110.66
4	223.03	-67.50	-13.00	-54.50	1.50 V	262	46.28	-113.78
5	410.24	-66.34	-13.00	-53.34	2.00 V	143	40.89	-107.23
6	769.14	-51.26	-13.00	-38.26	1.00 V	48	49.15	-100.41

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

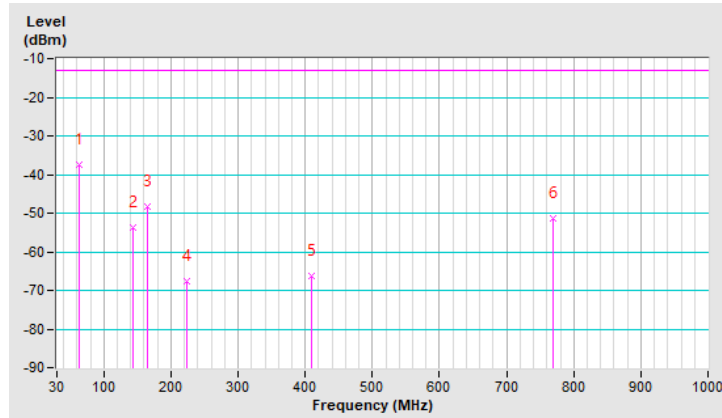

Above 1GHz
GPRS

Mode	TX channel 128 (824.2MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-44.34	-13.00	-31.34	1.51 H	190	59.60	-103.94
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-38.23	-13.00	-25.23	1.44 V	238	65.71	-103.94

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 189 (836.4MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-43.85	-13.00	-30.85	1.50 H	187	60.10	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-37.95	-13.00	-24.95	1.46 V	237	66.00	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 251 (848.8MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-44.55	-13.00	-31.55	1.55 H	185	59.40	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-38.03	-13.00	-25.03	1.51 V	242	65.92	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

EDGE

Mode	TX channel 128 (824.2MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-45.44	-13.00	-32.44	1.50 H	187	58.50	-103.94
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-39.09	-13.00	-26.09	1.46 V	245	64.85	-103.94

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 189 (836.4MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-44.71	-13.00	-31.71	1.52 H	184	59.24	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-38.72	-13.00	-25.72	1.44 V	235	65.23	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 251 (848.8MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-45.33	-13.00	-32.33	1.53 H	189	58.62	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-38.97	-13.00	-25.97	1.50 V	247	64.98	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

WCDMA Band 5

Mode	TX channel 4132 (826.4MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1652.80	-59.43	-13.00	-46.43	2.21 H	167	44.50	-103.93
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1652.80	-58.83	-13.00	-45.83	1.51 V	248	45.10	-103.93

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 4183 (836.6MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-59.15	-13.00	-46.15	2.18 H	170	44.80	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-58.45	-13.00	-45.45	1.57 V	169	45.50	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 4233 (846.6MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.20	-58.85	-13.00	-45.85	2.22 H	172	45.10	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.20	-55.75	-13.00	-42.75	1.57 V	67	48.20	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 5 (Channel Bandwidth 1.4MHz)

Mode	TX channel 20407 (824.7MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-59.21	-13.00	-46.21	1.45 H	348	44.73	-103.94
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-54.97	-13.00	-41.97	1.34 V	68	48.97	-103.94

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-59.20	-13.00	-46.20	1.44 H	351	44.75	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-54.92	-13.00	-41.92	1.37 V	71	49.03	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 20643 (848.3MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-59.16	-13.00	-46.16	1.43 H	350	44.79	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-54.95	-13.00	-41.95	1.39 V	74	49.00	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

LTE Band 5 (Channel Bandwidth 5MHz)

Mode	TX channel 20425 (826.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-59.23	-13.00	-46.23	1.39 H	351	44.70	-103.93
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-54.89	-13.00	-41.89	1.41 V	70	49.04	-103.93

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-59.16	-13.00	-46.16	1.42 H	348	44.79	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-54.97	-13.00	-41.97	1.37 V	69	48.98	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 20625 (846.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-59.18	-13.00	-46.18	1.40 H	347	44.77	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-54.94	-13.00	-41.94	1.37 V	72	49.01	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

LTE Band 5 (Channel Bandwidth 10MHz)

Mode	TX channel 20450 (829.0MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-59.20	-13.00	-46.20	1.41 H	345	44.74	-103.94
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-54.99	-13.00	-41.99	1.42 V	75	48.95	-103.94

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-58.95	-13.00	-45.95	1.45 H	349	45.00	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-54.45	-13.00	-41.45	1.36 V	69	49.50	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 20600 (844.0MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-59.25	-13.00	-46.25	1.42 H	351	44.70	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-55.00	-13.00	-42.00	1.36 V	71	48.95	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 26 (Channel Bandwidth 1.4MHz)

Mode	TX channel 26797 (824.7MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-58.69	-13.00	-45.69	2.08 H	336	45.25	-103.94
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-58.24	-13.00	-45.24	1.59 V	62	45.70	-103.94

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 26915 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-58.80	-13.00	-45.80	2.16 H	333	45.15	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-58.21	-13.00	-45.21	1.58 V	58	45.74	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 27033 (848.3MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-58.73	-13.00	-45.73	2.12 H	334	45.22	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-58.23	-13.00	-45.23	1.49 V	56	45.72	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

LTE Band 26 (Channel Bandwidth 5MHz)

Mode	TX channel 26815 (826.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-58.83	-13.00	-45.83	2.10 H	329	45.10	-103.93
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-58.08	-13.00	-45.08	1.52 V	61	45.85	-103.93

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 26915 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-58.83	-13.00	-45.83	2.11 H	329	45.12	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-58.24	-13.00	-45.24	1.50 V	58	45.71	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 27015 (846.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-58.69	-13.00	-45.69	2.13 H	333	45.26	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-58.00	-13.00	-45.00	1.52 V	60	45.95	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

LTE Band 26 (Channel Bandwidth 15MHz)

Mode	TX channel 26865 (831.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1663.00	-58.58	-13.00	-45.58	2.17 H	330	45.37	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1663.00	-58.08	-13.00	-45.08	1.53 V	62	45.87	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 26915 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-58.35	-13.00	-45.35	2.75 H	332	45.60	-103.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-57.75	-13.00	-44.75	1.56 V	58	46.20	-103.95

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 26965 (841.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	21deg. C, 67%RH	Input Power	4.0Vdc
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1683.00	-58.85	-13.00	-45.85	2.16 H	334	45.09	-103.94
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1683.00	-57.99	-13.00	-44.99	1.57 V	58	45.95	-103.94

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---