

TEST REPORT


Applicant	MTRLC LLC
Address	PO Box 121147 Boston, MA 02112-1147, United States.

Manufacturer or Supplier	MTRLC LLC
Address	PO Box 121147 Boston, MA 02112-1147, United States.
Product	16x4 DOCSIS 3.0 Cable Modem plus AC1900 Router
Brand Name	Motorola
Model	MG7550
Additional Model & Model Difference	MG7550XY(X can be A, B, C, D or blank, and Y can be A, B, C, D or blank)
Date of tests	Mar. 05, 2016 ~ Mar. 25, 2016

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart E, Section 15.407**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Blue Zheng Project Engineer/ EMC Department	Approved by Chris Chen Manager / EMC Department
	 Date: Mar. 25, 2016

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
2.3 DUTY CYCLE OF TEST SIGNAL	11
2.4 DESCRIPTION OF SUPPORT UNITS	12
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3. TEST TYPES AND RESULTS	13
3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	13
3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	13
3.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	14
3.1.3 TEST INSTRUMENTS.....	15
3.1.4 TEST PROCEDURES	16
3.1.5 DEVIATION FROM TEST STANDARD	16
3.1.6 TEST SETUP.....	17
3.1.7 EUT OPERATING CONDITION	17
3.1.8 TEST RESULTS	18
3.2 CONDUCTED EMISSION MEASUREMENT	38
3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	38
3.2.2 TEST INSTRUMENTS.....	38
3.2.3 TEST PROCEDURES	39
3.2.4 DEVIATION FROM TEST STANDARD	39
3.2.5 TEST SETUP.....	39
3.2.6 EUT OPERATING CONDITIONS	39
3.2.7 TEST RESULTS	40
3.3 TRANSMIT POWER MEASUREMENT	42
3.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT	42
3.3.2 TEST SETUP.....	42



Test Report No.: RF160223N035-2

3.3.3	TEST INSTRUMENTS.....	43
3.3.4	TEST PROCEDURE.....	43
3.3.5	DEVIATION FROM TEST STANDARD	45
3.3.6	EUT OPERATING CONDITIONS	45
3.3.7	TEST RESULTS	46
3.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	64
3.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	64
3.4.2	TEST SETUP.....	64
3.4.3	TEST INSTRUMENTS.....	64
3.4.4	TEST PROCEDURES	64
3.4.5	DEVIATION FROM TEST STANDARD	65
3.4.6	EUT OPERATING CONDITIONS	65
3.4.7	TEST RESULTS	66
3.5	FREQUENCY STABILITY	76
3.5.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	76
3.5.2	TEST SETUP.....	76
3.5.3	TEST INSTRUMENTS.....	76
3.5.4	TEST PROCEDURE.....	77
3.5.5	DEVIATION FROM TEST STANDARD	77
3.5.6	EUT OPERATING CONDITION	77
3.5.7	TEST RESULTS	78
4.	PHOTOGRAPHS OF THE TEST CONFIGURATION	79
5.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	80



Test Report No.: RF160223N035-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160223N035-2	Original release	Mar. 25, 2016

1. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407 UNDER NEW RULE)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit.
15.407(b)(1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RSMA not a standard connector.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GMHz	3.55dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	4.84dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	16x4 DOCSIS 3.0 Cable Modem plus AC1900 Router
MODEL NO.	MG7550
ADDITIONAL MODEL & MODEL DIFFERENCE	MG7550XY(X can be A, B, C, D or blank, and Y can be A, B, C, D or blank)
FCC ID	2AF5PMG7550
POWER SUPPLY	DC 12V Form AC 100-240V 50/60Hz
MODULATION TYPE	CCK, DQPSK, DBPSK, 256QAM, 64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 150Mbps 802.11ac: up to 433Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz; 5745 ~ 5825MHz
NUMBER OF CHANNEL	9 for 802.11a, 802.11n (20MHz) 4 for 802.11n (40MHz) 2 for 802.11ac (80MHz)
OUTPUT POWER	28.12 dBm for 5180 ~ 5240MHz (Maximum Average Power) 28.27 dBm for 5745 ~ 5825MHz (Maximum Average Power)
ANTENNA TYPE	Wire antenna with 2.8dBi gain
DATA CABLE	WLAN Line, Unshielded, Non-detachable, 1.0m
I/O PORTS	Refer to user's manual

NOTE:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 3 completed transmitters and 3 receivers.

MODULATION MODE	TX FUNCTION
802.11a	3TX/3RX
802.11n (20MHz)	3TX/3RX
802.11n (40MHz)	3TX/3RX
802.11ac (80MHz)	3TX/3RX

The EUT has beamforming mode, the directional gain = 2.8dBi + 10log(3) = 7.57dBi

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT has been tested with all conditions. But only the worst case was



Test Report No.: RF160223N035-2

shown in test report.

4. The EUT can be powered by adapter as list as following:

ADAPTER	
BRAND:	Gongjin
MODEL:	S36B52-120A250-04
INPUT:	AC 100-240V, 50/60Hz, Max 1.0A
OUTPUT:	DC 12V/2.5A
DC CABLE:	Unshielded, Non-detachable, 1.5m

2.2 DESCRIPTION OF TEST MODES

9 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz
149	5745 MHz	157	5785 MHz
153	5765 MHz	161	5805 MHz
165	5825 MHz	--	--

4 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz
151	5755 MHz	159	5795 MHz

2 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
42	5210MHz	155	5775MHz



2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	Powered by adapter with WIFI function

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

NOTE: "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240 5745-5825	36 to 48 149 to 165	36, 40, 48 149,157,165	OFDM	BPSK	6.0
-	802.11n (20MHz)		36 to 48 149 to 165	36, 40, 48 149,157,165	OFDM	BPSK	6.5
-	802.11n (40MHz)		38 to 46 151 to 159	38, 46 151,159	OFDM	BPSK	13.5
-	802.11ac (80MHz)		42 155	42 155	OFDM	BPSK	29.3

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240 5745-5825	36 to 48 149 to 165	36	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240 5745-5825	36 to 48 149 to 165	36	OFDM	BPSK	6.0



ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240 5745-5825	36 to 48 149 to 165	36, 40, 48 149,157,165	OFDM	BPSK	6.0
-	802.11n (20MHz)		36 to 48 149 to 165	36, 40, 48 149,157,165	OFDM	BPSK	6.5
-	802.11n (40MHz)		38 to 46 151 to 159	38, 46 151,159	OFDM	BPSK	13.5
-	802.11ac (80MHz)		42 155	42 155	OFDM	BPSK	29.3

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	24deg. C, 51%RH	AC 120V by Adapter	Sen He
RE<1G	24deg. C, 51%RH	AC 120V by Adapter	Sen He
PLC	24deg. C, 51%RH	AC 120V by Adapter	Blue zheng
APCM	25deg. C, 60%RH	AC 120V by Adapter	Blue zheng




2.3 DUTY CYCLE OF TEST SIGNAL

802.11a: Duty cycle = $2.063/2.168 = 0.95$, Duty factor = $10 * \log(1/0.95) = 0.22$

802.11n (20MHz): Duty cycle = $1.918/2.02 = 0.95$, Duty factor = $10 * \log(1/0.87) = 0.22$

802.11n (40MHz): Duty cycle = $0.943/1.04 = 0.91$, Duty factor = $10 * \log(1/0.91) = 0.41$

802.11ac (80MHz): Duty cycle = $0.462/0.492 = 0.94$ = $10 * \log(1/0.94) = 0.27$

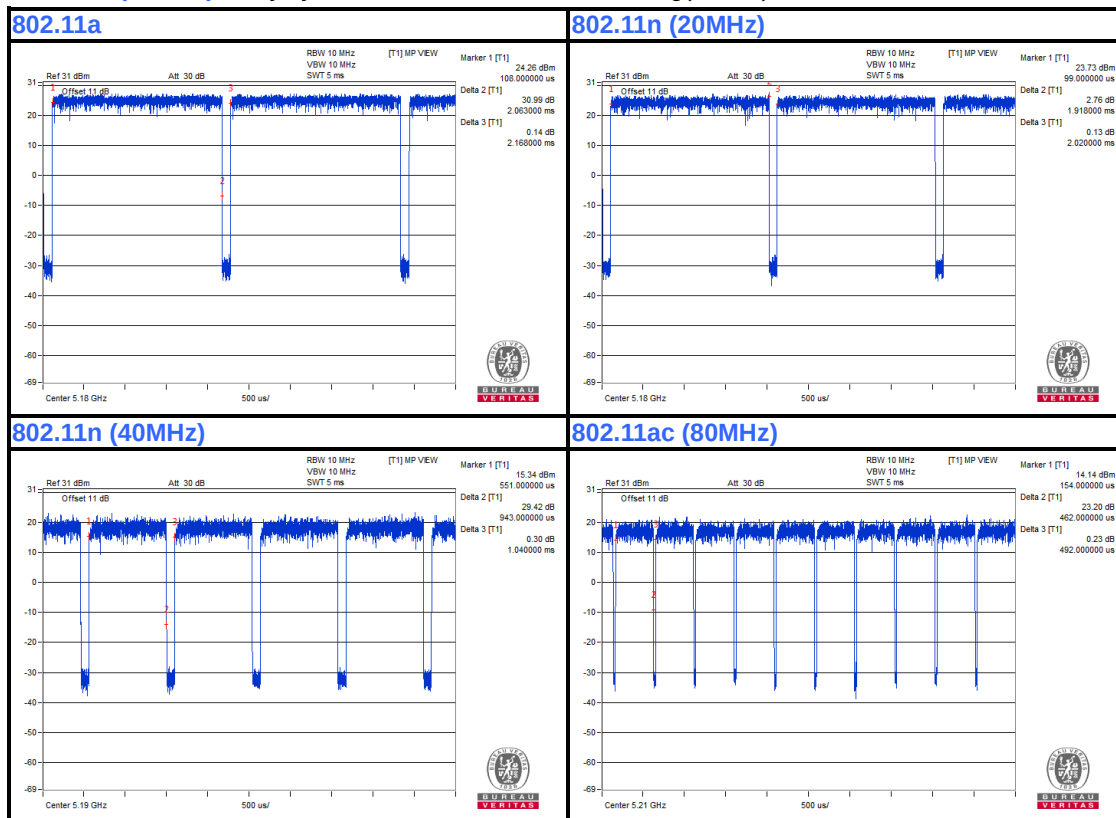

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedures New Rules v01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3. TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.



3.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01	FIELD STRENGTH AT 3m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.3 (dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK: -27 (dBm/MHz) ^{*1} PK: -17 (dBm/MHz) ^{*2}	PK: 68.3 (dBμV/m) ^{*1} PK: 78.3 (dBμV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

**3.1.3 TEST INSTRUMENTS**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr 27,15	Apr 26,16
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Apr 23,15	Apr 22,16
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 16, 15	Jul. 15, 16
Horn Antenna	ETS-Lindgren	3117	00062558	May 30,14	May 29,16
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier (0.5~18GHz)	SCHWARZBECK	BBV 9718	9718-266	Mar 26,15	Mar 25,17
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Mar 26,15	Mar 25,17
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	April. 19,14	April. 18,16
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Jan. 21,14	Jan. 20,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,16

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The FCC Site Registration No. is 494399.

3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

3.1.5 DEVIATION FROM TEST STANDARD


No deviation.



BUREAU
VERITAS

Test Report No.: RF160223N035-2

3.1.6 TEST SETUP

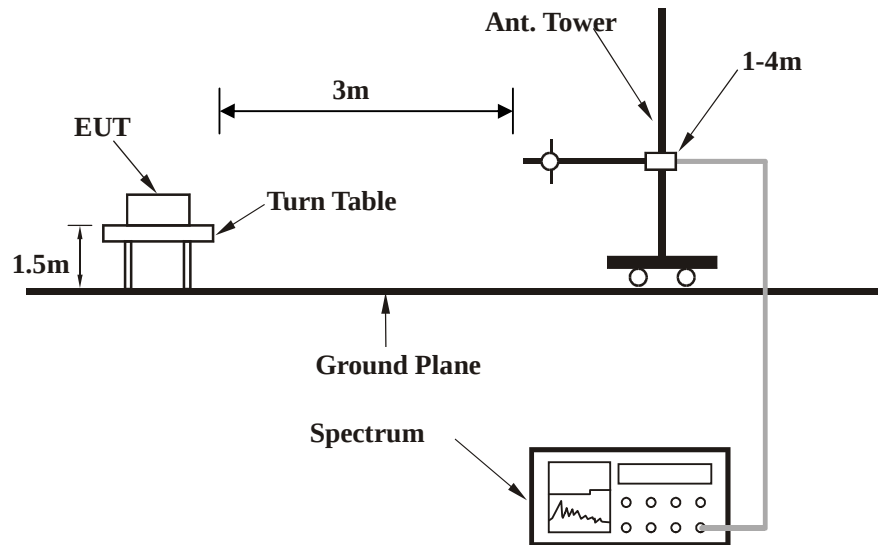

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.7 EUT OPERATING CONDITION

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner was connected with the EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable the EUT under transmission condition continuously at specific channel frequency.



**BUREAU
VERITAS**

Test Report No.: RF160223N035-2

3.1.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	35.1 QP	40.0	-4.9	1.00 H	0	47.43	-12.31
2	148.09	29.2 QP	43.5	-14.3	1.00 H	0	47.08	-17.85
3	249.30	28.5 QP	46.0	-17.5	1.00 H	0	44.38	-15.88
4	374.42	33.9 QP	46.0	-12.1	1.00 H	0	45.71	-11.81
5	624.65	35.3 QP	46.0	-10.7	1.00 H	0	40.07	-4.77
6	874.88	39.5 QP	46.0	-6.5	1.00 H	0	40.12	-0.58

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

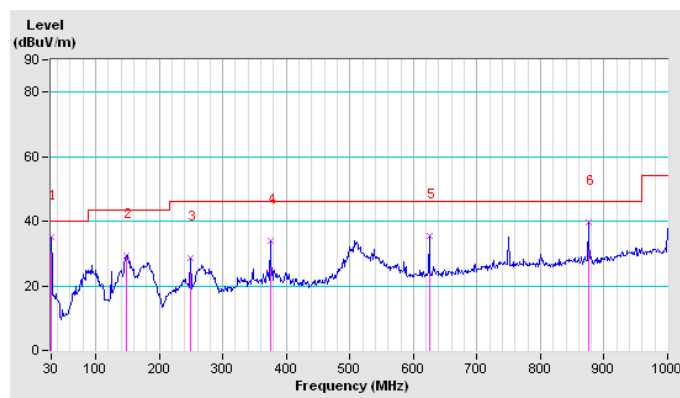


CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	33.3 QP	40.0	-6.7	1.00 V	0	45.59	-12.31
2	66.55	29.5 QP	40.0	-10.5	1.00 V	0	54.18	-24.66
3	249.30	31.1 QP	46.0	-14.9	1.00 V	0	46.95	-15.88
4	374.42	32.4 QP	46.0	-13.6	1.00 V	0	44.17	-11.81
5	624.65	36.8 QP	46.0	-9.2	1.00 V	0	41.55	-4.77
6	874.88	39.8 QP	46.0	-6.2	1.00 V	0	40.39	-0.58

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

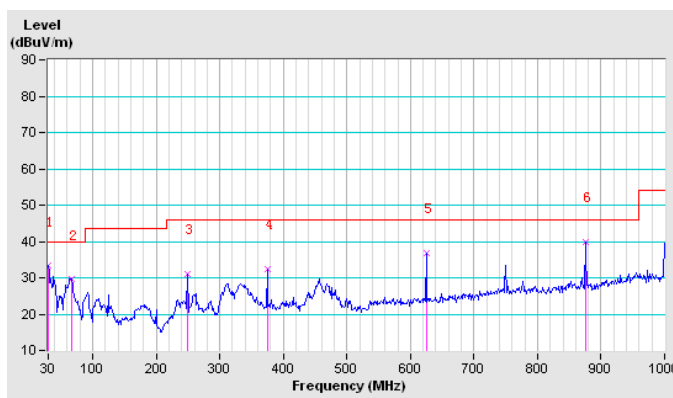

Band 1 (5180-5240MHz):

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	1.02 H	84	56.46	8.96
2	5150.00	51.6 AV	54.0	-2.4	1.02 H	84	42.64	8.96
3	*5180.00	108.1 PK			1.18 H	94	99.11	9.03
4	*5180.00	98.4 AV			1.18 H	94	89.39	9.03
5	#10360.00	61.2 PK	88.1	-26.9	1.02 H	211	42.23	18.97
6	#10360.00	47.3 AV	78.4	-31.1	1.02 H	211	28.28	18.97
7	15540.00	63.4 PK	74.0	-10.6	1.00 H	6	42.89	20.51
8	15540.00	50.9 AV	54.0	-3.1	1.00 H	6	30.36	20.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.8 PK	74.0	-6.2	1.24 V	84	58.88	8.96
2	5150.00	52.0 AV	54.0	-2.0	1.24 V	84	43.02	8.96
3	*5180.00	107.2 PK			1.64 V	236	98.12	9.03
4	*5180.00	99.3 AV			1.64 V	236	90.29	9.03
5	#10360.00	64.2 PK	87.2	-23.0	1.03 V	312	45.24	18.97
6	#10360.00	53.2 AV	79.3	-26.1	1.03 V	312	34.20	18.97
7	15540.00	62.0 PK	74.0	-12.0	1.00 V	125	41.52	20.51
8	15540.00	52.1 AV	54.0	-1.9	1.00 V	125	31.55	20.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	107.0 PK			1.21 H	316	97.96	9.07
2	*5200.00	99.0 AV			1.21 H	316	89.92	9.07
3	#10400.00	60.8 PK	87.0	-26.2	1.02 H	163	41.75	19.02
4	#10400.00	48.6 AV	79.0	-30.4	1.02 H	163	29.61	19.02
5	15600.00	61.4 PK	74.0	-12.6	1.04 H	2	40.76	20.64
6	15600.00	47.9 AV	54.0	-6.1	1.04 H	2	27.29	20.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.8 PK			2.01 V	209	99.68	9.07
2	*5200.00	100.3 AV			2.01 V	209	91.21	9.07
3	#10400.00	64.9 PK	88.8	-23.9	1.01 V	47	45.85	19.02
4	#10400.00	63.4 AV	80.3	-16.9	1.01 V	47	44.40	19.02
5	15600.00	63.0 PK	74.0	-11.0	1.02 V	36	42.37	20.64
6	15600.00	51.8 AV	54.0	-2.2	1.02 V	36	31.15	20.64

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.7 PK			1.82 H	219	99.56	9.16
2	*5240.00	100.1 AV			1.82 H	219	90.89	9.16
3	#10480.00	60.7 PK	88.7	-28.0	1.01 H	42	41.63	19.11
4	#10480.00	48.8 AV	80.1	-31.3	1.01 H	42	29.66	19.11
5	15720.00	63.2 PK	74.0	-10.8	1.00 H	8	42.32	20.89
6	15720.00	51.4 AV	54.0	-2.6	1.00 H	8	30.53	20.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.6 PK			1.87 V	243	100.48	9.16
2	*5240.00	101.8 AV			1.87 V	243	92.68	9.16
3	#10480.00	61.8 PK	89.6	-27.8	1.02 V	211	42.73	19.11
4	#10480.00	51.6 AV	81.8	-30.2	1.02 V	211	32.52	19.11
5	15720.00	65.8 PK	74.0	-8.2	1.03 V	62	44.91	20.89
6	15720.00	53.2 AV	54.0	-0.8	1.03 V	62	32.32	20.89

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.1 PK	74.0	-11.9	1.27 H	243	53.17	8.96
2	5150.00	51.5 AV	54.0	-2.5	1.27 H	243	42.50	8.96
3	*5180.00	107.5 PK			1.08 H	44	98.46	9.03
4	*5180.00	99.6 AV			1.08 H	44	90.59	9.03
5	#10360.00	59.4 PK	87.5	-28.1	1.00 H	222	40.44	18.97
6	#10360.00	47.9 AV	79.6	-31.7	1.00 H	222	28.97	18.97
7	15540.00	58.4 PK	74.0	-15.6	1.00 H	41	37.91	20.51
8	15540.00	50.0 AV	54.0	-4.0	1.00 H	41	29.51	20.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.05 V	91	56.88	8.96
2	5150.00	53.2 AV	54.0	-0.8	1.05 V	91	44.25	8.96
3	*5180.00	108.7 PK			1.16 V	142	99.71	9.03
4	*5180.00	100.9 AV			1.16 V	142	91.87	9.03
5	#10360.00	60.2 PK	88.7	-28.5	1.02 V	62	41.23	18.97
6	#10360.00	49.5 AV	80.9	-31.4	1.02 V	62	30.50	18.97
7	15540.00	64.2 PK	74.0	-9.8	1.00 V	23	43.69	20.51
8	15540.00	52.8 AV	54.0	-1.2	1.00 V	23	32.24	20.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	107.6 PK			1.42 H	284	98.57	9.07
2	*5200.00	99.5 AV			1.42 H	284	90.40	9.07
3	#10400.00	59.6 PK	87.6	-28.0	1.01 H	227	40.60	19.02
4	#10400.00	49.1 AV	79.5	-30.4	1.01 H	227	30.08	19.02
5	15600.00	60.2 PK	74.0	-13.8	1.00 H	88	39.57	20.64
6	15600.00	51.4 AV	54.0	-2.6	1.00 H	88	30.76	20.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.6 PK			1.19 V	226	99.55	9.07
2	*5200.00	100.4 AV			1.19 V	226	91.35	9.07
3	#10400.00	58.4 PK	88.6	-30.2	1.01 V	41	39.40	19.02
4	#10400.00	49.3 AV	80.4	-31.1	1.01 V	41	30.30	19.02
5	15600.00	63.5 PK	74.0	-10.5	1.01 V	360	42.83	20.64
6	15600.00	53.2 AV	54.0	-0.8	1.01 V	360	32.54	20.64

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.6 PK			1.24 H	223	99.47	9.16
2	*5240.00	98.7 AV			1.24 H	223	89.50	9.16
3	#10480.00	60.1 PK	88.6	-28.5	1.07 H	84	41.03	19.11
4	#10480.00	49.2 AV	78.7	-29.3	1.07 H	84	30.11	19.11
5	15720.00	63.2 PK	74.0	-10.8	1.00 H	21	42.31	20.89
6	15720.00	50.7 AV	54.0	-3.3	1.00 H	21	29.77	20.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.4 PK			1.02 V	351	100.26	9.16
2	*5240.00	101.4 AV			1.02 V	351	92.28	9.16
3	#10480.00	61.5 PK	89.4	-27.9	1.00 V	41	42.41	19.11
4	#10480.00	48.7 AV	81.4	-32.7	1.00 V	41	29.55	19.11
5	15720.00	65.4 PK	74.0	-8.6	1.02 V	62	44.53	20.89
6	15720.00	53.3 AV	54.0	-0.7	1.02 V	62	32.44	20.89

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



**BUREAU
VERITAS**

Test Report No.: RF160223N035-2

802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.4 PK	74.0	-6.6	1.00 H	136	58.40	8.96
2	5150.00	50.9 AV	54.0	-3.1	1.00 H	136	41.92	8.96
3	*5190.00	103.5 PK			1.84 H	162	94.47	9.05
4	*5190.00	92.4 AV			1.84 H	162	83.36	9.05
5	#10380.00	56.1 PK	83.5	-27.4	1.00 H	66	37.11	18.99
6	#10380.00	46.2 AV	72.4	-26.2	1.00 H	66	27.22	18.99
7	15570.00	58.7 PK	74.0	-15.3	1.01 H	216	38.16	20.58
8	15570.00	47.6 AV	54.0	-6.4	1.01 H	216	26.97	20.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	73.3 PK	74.0	-0.7	1.52 V	66	64.29	8.96
2	5150.00	51.8 AV	54.0	-2.2	1.52 V	66	42.82	8.96
3	*5190.00	104.6 PK			1.62 V	84	95.57	9.05
4	*5190.00	93.2 AV			1.62 V	84	84.17	9.05
5	#10380.00	55.2 PK	84.6	-29.4	1.02 V	126	36.21	18.99
6	#10380.00	46.9 AV	73.2	-26.3	1.02 V	126	27.91	18.99
7	15570.00	59.4 PK	74.0	-14.6	1.00 V	28	38.82	20.58
8	15570.00	48.6 AV	54.0	-5.4	1.00 V	28	28.05	20.58

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: RF160223N035-2

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	108.7 PK			1.42 H	216	99.53	9.14
2	*5230.00	97.3 AV			1.42 H	216	88.14	9.14
3	#10460.00	55.3 PK	88.7	-33.4	1.01 H	284	36.24	19.09
4	#10460.00	46.4 AV	77.3	-30.9	1.01 H	284	27.33	19.09
5	15690.00	59.2 PK	74.0	-14.8	1.00 H	122	38.37	20.83
6	15690.00	47.6 AV	54.0	-6.4	1.00 H	122	26.79	20.83
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	110.0 PK			1.21 V	351	100.88	9.14
2	*5230.00	98.6 AV			1.21 V	351	89.48	9.14
3	#10460.00	58.4 PK	90.0	-31.6	1.02 V	22	39.31	19.09
4	#10460.00	47.6 AV	78.6	-31.0	1.02 V	22	28.53	19.09
5	15690.00	64.0 PK	74.0	-10.0	1.04 V	216	43.12	20.83
6	15690.00	53.1 AV	54.0	-0.9	1.04 V	216	32.28	20.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



802.11ac 80MHz

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	73.6 PK	74.0	-0.4	1.03 H	216	64.66	8.96
2	5150.00	53.2 AV	54.0	-0.8	1.03 H	216	44.25	8.96
3	*5210.00	98.8 PK			1.14 H	62	89.67	9.09
4	*5210.00	85.6 AV			1.14 H	62	76.53	9.09
5	#10420.00	56.5 PK	78.8	-22.3	1.03 H	245	37.43	19.04
6	#10420.00	44.1 AV	65.6	-21.5	1.03 H	245	25.06	19.04
7	15630.00	60.1 PK	74.0	-13.9	1.00 H	24	39.44	20.70
8	15630.00	47.2 AV	54.0	-6.8	1.00 H	24	26.51	20.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.4 PK	74.0	-3.6	1.01 V	122	61.46	8.96
2	5150.00	51.4 AV	54.0	-2.6	1.01 V	122	42.44	8.96
3	*5210.00	97.5 PK			1.08 V	9	88.37	9.09
4	*5210.00	84.8 AV			1.08 V	9	75.67	9.09
5	#10420.00	55.9 PK	77.5	-21.6	1.01 V	161	36.84	19.04
6	#10420.00	43.9 AV	64.8	-20.9	1.01 V	161	24.90	19.04
7	15630.00	60.0 PK	74.0	-14.0	1.01 V	203	39.29	20.70
8	15630.00	46.8 AV	54.0	-7.2	1.01 V	201	26.12	20.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band 4 (5745-5825MHz):

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	62.8 PK	68.3	-5.5	1.02 H	21	52.16	10.68
2	#5725.00	76.8 PK	78.3	-1.5	1.01 H	25	66.10	10.72
3	*5745.00	107.6 PK			1.82 H	94	96.81	10.81
4	*5745.00	101.5 AV			1.82 H	94	90.66	10.81
5	11490.00	58.4 PK	74.0	-15.6	1.00 H	184	41.10	17.32
6	11490.00	46.7 AV	54.0	-7.3	1.00 H	181	29.40	17.32
7	#17235.00	60.1 PK	87.6	-27.5	1.02 H	241	37.04	23.06
8	#17235.00	48.5 AV	81.5	-33.0	1.02 H	241	25.41	23.06
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	66.5 PK	68.3	-1.8	1.07 V	41	55.82	10.68
2	#5725.00	77.6 PK	78.3	-0.7	1.36 V	247	66.86	10.72
3	*5745.00	111.5 PK			1.27 V	312	100.71	10.81
4	*5745.00	104.7 AV			1.27 V	312	93.88	10.81
5	11490.00	61.5 PK	74.0	-12.5	1.04 V	42	44.20	17.32
6	11490.00	48.6 AV	54.0	-5.4	1.04 V	42	31.30	17.32
7	#17235.00	62.4 PK	91.5	-29.1	1.01 V	126	39.35	23.06
8	#17235.00	49.8 AV	84.7	-34.9	1.01 V	126	26.72	23.06

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	113.6 PK			1.74 H	52	102.63	10.99
2	*5785.00	107.2 AV			1.74 H	52	96.18	10.99
3	11570.00	62.5 PK	74.0	-11.5	1.00 H	43	45.05	17.45
4	11570.00	50.0 AV	54.0	-4.0	1.00 H	43	32.57	17.45
5	#17355.00	63.4 PK	93.6	-30.3	1.01 H	52	40.22	23.13
6	#17355.00	49.5 AV	87.2	-37.7	1.01 H	52	26.34	23.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	108.6 PK			1.15 V	243	97.63	10.99
2	*5785.00	101.7 AV			1.15 V	243	90.75	10.99
3	11570.00	60.2 PK	74.0	-13.8	1.01 V	214	42.75	17.45
4	11570.00	48.5 AV	54.0	-5.5	1.01 V	214	31.02	17.45
5	#17355.00	61.3 PK	88.6	-27.3	1.00 V	2	38.12	23.13
6	#17355.00	48.7 AV	81.7	-33.0	1.00 V	2	25.59	23.13

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	109.2 PK			1.21 H	62	98.04	11.16
2	*5825.00	102.5 AV			1.21 H	62	91.31	11.16
3	#5850.00	75.6 PK	78.3	-2.7	1.01 H	2	64.35	11.27
4	#5860.10	61.5 PK	68.3	-6.8	1.02 H	214	50.20	11.32
5	11650.00	54.2 PK	74.0	-19.8	1.01 H	242	36.58	17.63
6	11650.00	47.3 AV	54.0	-6.7	1.01 H	242	29.66	17.63
7	#17475.00	58.5 PK	89.2	-30.7	1.02 H	216	35.26	23.20
8	#17475.00	48.3 AV	82.5	-34.2	1.02 H	216	25.06	23.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	111.5 PK			1.58 V	94	100.36	11.16
2	*5825.00	104.9 AV			1.58 V	94	93.71	11.16
3	#5850.00	77.7 PK	78.3	-0.6	1.52 V	126	66.42	11.27
4	#5860.00	66.3 PK	68.3	-2.0	1.21 V	329	54.93	11.32
5	11650.00	63.4 PK	74.0	-10.6	1.00 V	174	45.77	17.63
6	11650.00	49.3 AV	54.0	-4.7	1.00 V	174	31.62	17.63
7	#17475.00	61.3 PK	91.5	-30.2	1.02 V	216	38.05	23.20
8	#17475.00	50.0 AV	84.9	-34.9	1.02 V	216	26.81	23.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



**BUREAU
VERITAS**

Test Report No.: RF160223N035-2

802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	60.8 PK	68.3	-7.5	1.02 H	51	50.10	10.68
2	#5725.00	74.1 PK	78.3	-4.2	1.02 H	69	63.38	10.72
3	*5745.00	106.8 PK			1.69 H	81	96.03	10.81
4	*5745.00	100.0 AV			1.69 H	81	89.21	10.81
5	11490.00	57.6 PK	74.0	-16.4	1.01 H	55	40.30	17.32
6	11490.00	46.2 AV	54.0	-7.8	1.01 H	55	28.89	17.32
7	#17235.00	59.4 PK	86.8	-27.4	1.01 H	17	36.36	23.06
8	#17235.00	48.5 AV	80.0	-31.5	1.01 H	17	25.40	23.06
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	62.3 PK	68.3	-6.0	1.02 V	214	51.62	10.68
2	#5725.00	77.6 PK	78.3	-0.7	1.01 V	74	66.89	10.72
3	*5745.00	107.2 PK			1.01 V	253	96.43	10.81
4	*5745.00	101.5 AV			1.01 V	253	90.73	10.81
5	11490.00	61.4 PK	74.0	-12.6	1.00 V	2	44.10	17.32
6	11490.00	48.6 AV	54.0	-5.4	1.00 V	2	31.30	17.32
7	#17235.00	61.7 PK	87.2	-25.5	1.00 V	125	38.68	23.06
8	#17235.00	50.2 AV	81.5	-31.3	1.00 V	125	27.15	23.06

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	107.9 PK			1.03 H	312	96.95	10.99
2	*5785.00	101.6 AV			1.03 H	312	90.56	10.99
3	11570.00	57.6 PK	74.0	-16.4	1.01 H	42	40.17	17.45
4	11570.00	45.0 AV	54.0	-9.0	1.01 H	42	27.54	17.45
5	#17355.00	58.4 PK	87.9	-29.5	1.01 H	2	35.29	23.13
6	#17355.00	48.3 AV	81.6	-33.3	1.01 H	2	25.13	23.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	110.2 PK			1.51 V	288	99.22	10.99
2	*5785.00	103.4 AV			1.51 V	288	92.42	10.99
3	11570.00	61.0 PK	74.0	-13.0	1.02 V	217	43.55	17.45
4	11570.00	47.5 AV	54.0	-6.5	1.02 V	217	30.01	17.45
5	#17355.00	63.4 PK	90.2	-26.8	1.02 V	61	40.29	23.13
6	#17355.00	53.2 AV	83.4	-30.2	1.02 V	61	30.08	23.13

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	107.6 PK			1.21 H	202	96.48	11.16
2	*5825.00	98.8 AV			1.21 H	202	87.60	11.16
3	#5850.00	75.2 PK	78.3	-3.1	1.04 H	23	63.94	11.27
4	#5860.10	56.2 PK	68.3	-12.1	1.00 H	16	44.92	11.32
5	11650.00	55.7 PK	74.0	-18.3	1.00 H	217	38.05	17.63
6	11650.00	48.5 AV	54.0	-5.5	1.00 H	217	30.83	17.63
7	#17475.00	60.5 PK	87.6	-27.1	1.00 H	314	37.28	23.20
8	#17475.00	49.7 AV	78.8	-29.1	1.00 H	314	26.52	23.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	109.8 PK			1.91 V	42	98.68	11.16
2	*5825.00	101.4 AV			1.91 V	42	90.28	11.16
3	#5850.00	77.8 PK	78.3	-0.5	1.02 V	216	66.57	11.27
4	#5860.00	57.2 PK	68.3	-11.1	1.02 V	14	45.91	11.32
5	11650.00	57.6 PK	74.0	-16.4	1.01 V	29	39.98	17.63
6	11650.00	49.2 AV	54.0	-4.8	1.01 V	29	31.58	17.63
7	#17475.00	62.7 PK	89.8	-27.1	1.00 V	4	39.49	23.20
8	#17475.00	51.3 AV	81.4	-30.2	1.00 V	4	28.06	23.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



**BUREAU
VERITAS**

Test Report No.: RF160223N035-2

802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	64.2 PK	68.3	-4.1	1.01 H	223	53.52	10.68
2	#5725.00	75.1 PK	78.3	-3.2	1.03 H	328	64.38	10.73
3	*5755.00	103.6 PK			1.05 H	42	92.76	10.86
4	*5755.00	93.2 AV			1.05 H	42	82.38	10.86
5	11510.00	53.5 PK	74.0	-20.5	1.00 H	274	36.15	17.31
6	11510.00	46.2 AV	54.0	-7.8	1.00 H	274	28.91	17.31
7	#17265.00	61.0 PK	83.6	-22.6	1.02 H	41	37.92	23.09
8	#17265.00	48.3 AV	73.2	-24.9	1.02 H	41	25.17	23.09
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	67.5 PK	68.3	-0.8	1.01 V	22	56.82	10.68
2	#5725.00	77.3 PK	78.3	-1.0	1.04 V	52	66.52	10.73
3	*5755.00	105.6 PK			1.81 V	62	94.77	10.86
4	*5755.00	94.7 AV			1.81 V	62	83.88	10.86
5	11510.00	56.9 PK	74.0	-17.1	1.02 V	211	39.59	17.31
6	11510.00	47.6 AV	54.0	-6.4	1.02 V	211	30.31	17.31
7	#17265.00	61.3 PK	85.6	-24.3	1.02 V	211	38.21	23.09
8	#17265.00	49.2 AV	74.7	-25.5	1.02 V	211	26.15	23.09

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	104.2 PK			1.24 H	84	93.18	11.03
2	*5795.00	94.0 AV			1.24 H	84	82.99	11.03
3	#5850.00	61.8 PK	78.3	-16.5	1.07 H	46	50.55	11.29
4	#5860.00	62.5 PK	68.3	-5.8	1.02 H	22	51.20	11.32
5	11590.00	54.9 PK	74.0	-19.1	1.00 H	122	37.36	17.49
6	11590.00	45.2 AV	54.0	-8.8	1.00 H	122	27.73	17.49
7	#17385.00	60.1 PK	84.2	-24.1	1.02 H	36	36.98	23.14
8	#17385.00	48.6 AV	74.0	-25.4	1.02 H	36	25.48	23.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	105.4 PK			1.92 V	221	94.38	11.03
2	*5795.00	96.4 AV			1.92 V	221	85.41	11.03
3	#5850.00	62.4 PK	78.3	-15.9	1.02 V	211	51.12	11.30
4	#5860.00	63.6 PK	68.3	-4.7	1.24 V	41	52.30	11.32
5	11590.00	57.4 PK	74.0	-16.6	1.02 V	284	39.92	17.49
6	11590.00	46.3 AV	54.0	-7.7	1.02 V	284	28.81	17.49
7	#17385.00	61.4 PK	85.4	-24.0	1.01 V	222	38.28	23.14
8	#17385.00	49.3 AV	76.4	-27.1	1.01 V	222	26.19	23.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



802.11ac 80MHz

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	66.7 PK	68.3	-1.6	1.24 H	207	56.06	10.68
2	#5725.00	72.4 PK	78.3	-5.9	1.06 H	22	61.69	10.72
3	*5755.00	99.6 PK			1.31 H	42	88.76	10.86
4	*5755.00	87.4 AV			1.31 H	42	76.55	10.86
5	11550.00	54.6 PK	74.0	-19.4	1.01 H	211	37.22	17.40
6	11550.00	44.2 AV	54.0	-9.8	1.01 H	211	26.81	17.40
7	#17325.00	60.1 PK	74.0	-13.9	1.00 H	4	36.98	23.12
8	#17325.00	48.2 AV	54.0	-5.8	1.00 H	4	25.08	23.12
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	67.3 PK	68.3	-1.0	1.17 V	46	56.58	10.68
2	#5725.00	71.7 PK	78.3	-6.6	1.28 V	94	60.94	10.72
3	*5755.00	97.6 PK			1.03 V	62	86.68	10.94
4	*5755.00	86.2 AV			1.03 V	62	75.27	10.94
5	11550.00	53.2 PK	74.0	-20.8	1.00 V	336	35.82	17.40
6	11550.00	44.0 AV	54.0	-10.0	1.00 V	336	26.61	17.40
7	#17325.00	61.4 PK	77.6	-16.2	1.02 V	42	38.28	23.12
8	#17325.00	47.9 AV	66.2	-18.3	1.02 V	42	24.79	23.12

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

3.2 CONDUCTED EMISSION MEASUREMENT

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	100962	Mar. 05,16	Mar. 04,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	April 25,16	Apr. 24,17
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	April 25,15	Apr. 24,16
Test software	ADT	ADT_Conc_V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.2.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

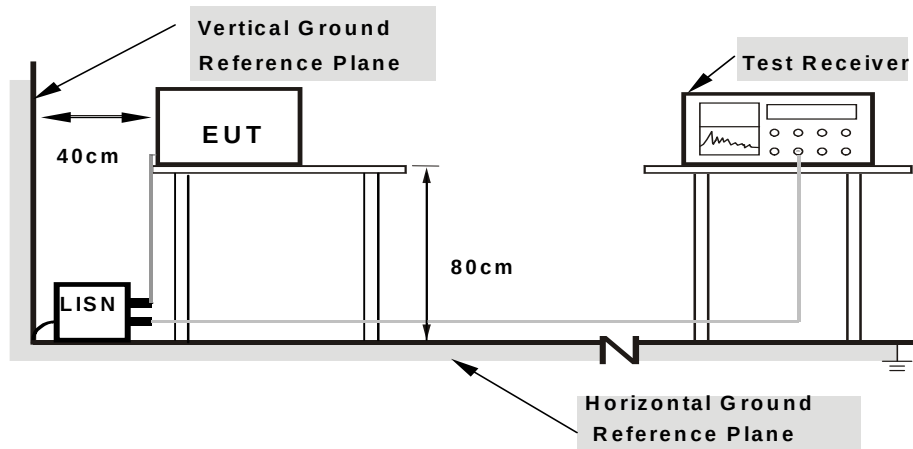

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.6


3.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: WIFI LINK

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.82	36.57	22.98	46.39	32.80	66.00	56.00	-19.61	-23.20
2	0.16172	9.81	30.25	4.91	40.06	14.72	65.38	55.38	-25.31	-40.65
3	0.18906	9.80	28.19	14.64	37.99	24.44	64.08	54.08	-26.09	-29.64
4	0.21641	9.80	25.56	13.93	35.36	23.73	62.96	52.96	-27.60	-29.23
5	17.85938	10.32	23.25	18.30	33.57	28.62	60.00	50.00	-26.43	-21.38
6	22.47266	10.51	18.61	13.61	29.12	24.12	60.00	50.00	-30.88	-25.88


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

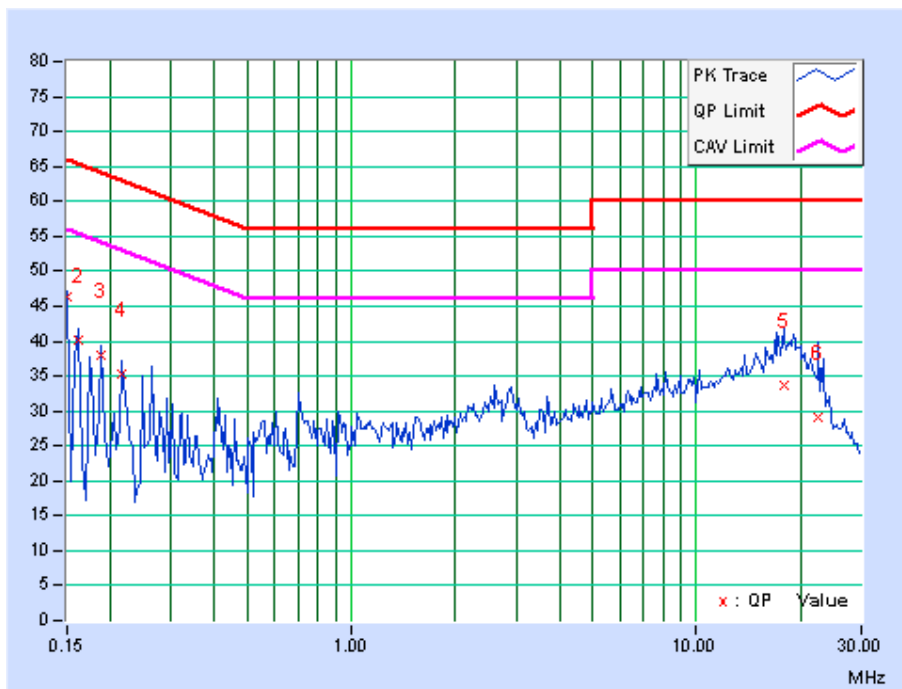

PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177340	9.50	32.78	22.61	42.28	32.11	64.61	54.61	-22.33	-22.50
2	0.239840	9.51	23.62	8.19	33.13	17.70	62.10	52.10	-28.97	-34.40
3	0.357030	9.53	28.94	23.24	38.47	32.77	58.80	48.80	-20.33	-16.03
4	18.43359	10.04	30.32	25.43	40.36	35.47	60.00	50.00	-19.64	-14.53
5	19.85938	10.07	30.41	25.68	40.48	35.75	60.00	50.00	-19.52	-14.25
6	23.14844	10.25	25.59	20.27	35.84	30.52	60.00	50.00	-24.16	-19.48

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

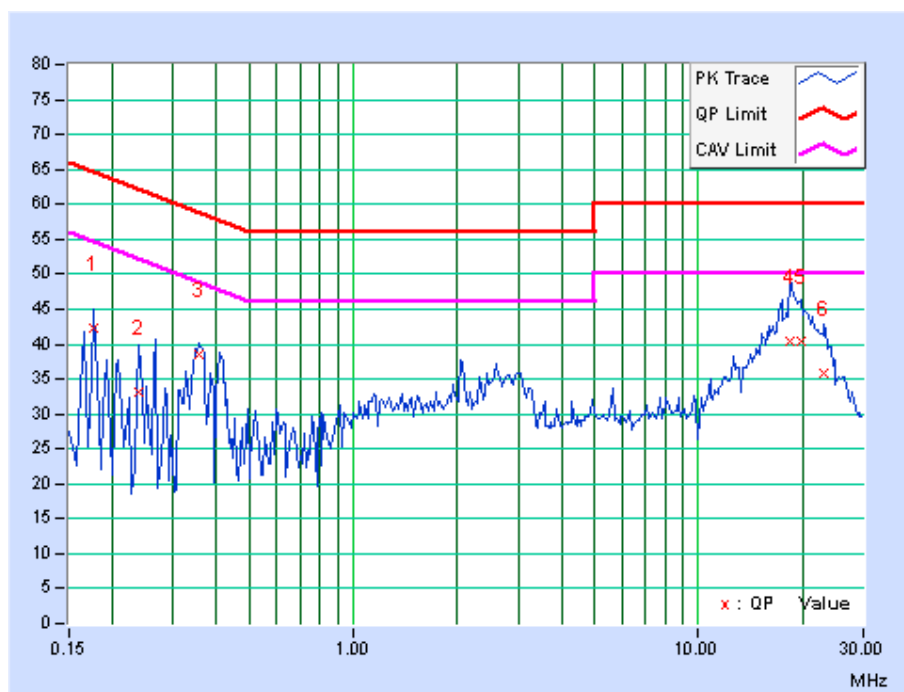

3.3 TRANSMIT POWER MEASUREMENT

3.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1 U-NII-3		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW (21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)

Per KDB 662911 D01 Multiple Transmitter Output v02r01 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for NANT $\leq$ 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths $\geq$ 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT $\geq$ 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

3.3.2 TEST SETUP

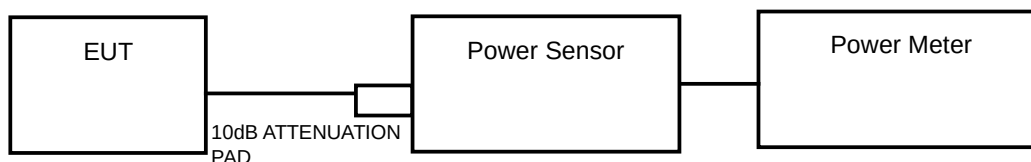

3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Feb. 18,16	Feb. 17,17
Power Sensor	Keysight	U2021XA	MY55060018	Feb. 18,16	Feb. 17,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 27,15	Oct. 26,16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.04,15	Sep. 03,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Oct. 17, 15	Oct. 16, 16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 05,15	Nov. 04,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 05,15	Nov. 04,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 15	Apr. 21, 16

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.3.4 TEST PROCEDURE

For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (80MHz)

- 1) Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- 2) Set sweep trigger to "free run".
- 3) Set RBW = 1 MHz.
- 4) Set VBW $\geq$ 3 MHz
- 5) Number of points in sweep $\geq$ 2 Span / RBW.
- 6) Sweep time $\leq$ (number of points in sweep) * T
- 7) Detector = RMS.
- 8) Trace mode = max hold.
- 9) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.



FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = RMS.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

FOR 6dB BANDWIDTH

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW) ≥ 3 RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Report No.: RF160223N035-2

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

3.3.7 TEST RESULTS

POWER OUTPUT:

802.11a

Channel Number	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)			Total Max. power output	LIMIT (dBm)	PASS /FAIL
		Chain0	Chain1	Chain2	dBm		
36	5180	23.09	23.16	23.03	27.86	30.00	PASS
40	5200	22.48	23.30	23.16	27.77	30.00	PASS
48	5240	23.10	23.52	23.34	28.09	30.00	PASS
149	5745	20.56	20.75	20.60	25.41	30.00	PASS
157	5785	22.89	23.25	22.92	27.79	30.00	PASS
165	5825	22.30	22.46	22.08	27.05	30.00	PASS

802.11n (20MHz)

Channel Number	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)			Total Max. power output	LIMIT (dBm)	PASS /FAIL
		Chain0	Chain1	Chain2	dBm		
36	5180	22.81	23.60	23.58	28.12	30.00	PASS
40	5200	22.85	23.38	23.30	27.95	30.00	PASS
48	5240	22.91	23.27	23.28	27.93	30.00	PASS
149	5745	20.27	20.28	19.91	24.93	30.00	PASS
157	5785	23.53	23.57	23.40	28.27	30.00	PASS
165	5825	21.73	21.81	21.42	26.43	30.00	PASS

802.11n (40MHz)

Channel Number	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)			Total Max. power output	LIMIT (dBm)	PASS /FAIL
		Chain0	Chain1	Chain2	dBm		
38	5190	19.20	19.45	19.49	24.15	30.00	PASS
46	5230	23.02	23.35	23.23	27.97	30.00	PASS
151	5755	20.91	21.12	20.85	25.73	30.00	PASS
159	5795	21.78	21.65	21.83	26.53	30.00	PASS

802.11ac (80MHz)

Channel Number	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)			Total Max. power output	LIMIT (dBm)	PASS /FAIL
		Chain0	Chain1	Chain2	dBm		
42	5210	20.68	21.25	21.09	25.78	30.00	PASS
155	5775	20.86	21.37	20.67	25.75	30.00	PASS



**BUREAU
VERITAS**

Test Report No.: RF160223N035-2

26dB BANDWIDTH & 6dB BANDWIDTH:

Note: 26dB BANDWIDTH For U-NII-1, U-NII-2A, U-NII-2C band
6dB BANDWIDTH U-NII-3C band

802.11a

Channel Number	Freq. (MHz)	26dB DOWN BANDWIDTH (MHz)			LIMIT(MHz)	PASS /FAIL
		Chain0	Chain1	Chain2	Minimum	
36	5180	29.53	36.67	35.77	0.5	PASS
40	5200	29.89	36.41	36.42	0.5	PASS
48	5240	29.84	36.80	35.66	0.5	PASS

Channel Number	Freq. (MHz)	6dB DOWN BANDWIDTH (MHz)			LIMIT(MHz)	PASS /FAIL
		Chain0	Chain1	Chain2	Minimum	
149	5745	16.45	16.41	16.40	0.5	PASS
157	5785	16.41	16.41	16.41	0.5	PASS
165	5825	16.45	16.42	16.41	0.5	PASS

802.11n (20MHz)

Channel Number	Freq. (MHz)	26dB DOWN BANDWIDTH (MHz)			LIMIT(MHz)	PASS /FAIL
		Chain0	Chain1	Chain2	Minimum	
36	5180	36.44	39.20	40.29	0.5	PASS
40	5200	35.47	41.41	41.06	0.5	PASS
48	5240	36.98	40.58	41.22	0.5	PASS

Channel Number	Freq. (MHz)	6dB DOWN BANDWIDTH (MHz)			LIMIT(MHz)	PASS /FAIL
		Chain0	Chain1	Chain2	Minimum	
149	5745	17.70	17.69	17.69	0.5	PASS
157	5785	17.66	17.68	17.67	0.5	PASS
165	5825	17.69	17.70	17.68	0.5	PASS

802.11n (40MHz)

Channel Number	Freq. (MHz)	26dB DOWN BANDWIDTH (MHz)			LIMIT(MHz)	PASS /FAIL
		Chain0	Chain1	Chain2	Minimum	
38	5190	40.76	46.90	41.47	0.5	PASS
46	5230	73.71	90.05	94.94	0.5	PASS

Channel Number	Freq. (MHz)	6dB DOWN BANDWIDTH (MHz)			LIMIT(MHz)	PASS /FAIL
		Chain0	Chain1	Chain2	Minimum	
151	5755	36.46	36.48	36.44	0.5	PASS
159	5795	36.46	36.48	36.44	0.5	PASS

802.11ac (80MHz)

Channel Number	Freq. (MHz)	26dB DOWN BANDWIDTH (MHz)			LIMIT(MHz)	PASS /FAIL
		Chain0	Chain1	Chain2	Minimum	
42	5210	120.25	121.53	101.17	0.5	PASS

Channel Number	Freq. (MHz)	6dB DOWN BANDWIDTH (MHz)			LIMIT(MHz)	PASS /FAIL
		Chain0	Chain1	Chain2	Minimum	
155	5775	76.40	76.52	76.21	0.5	PASS




BUREAU
VERITAS

Test Report No.: RF160223N035-2

26dB bandwidth Test Plot

802.11a

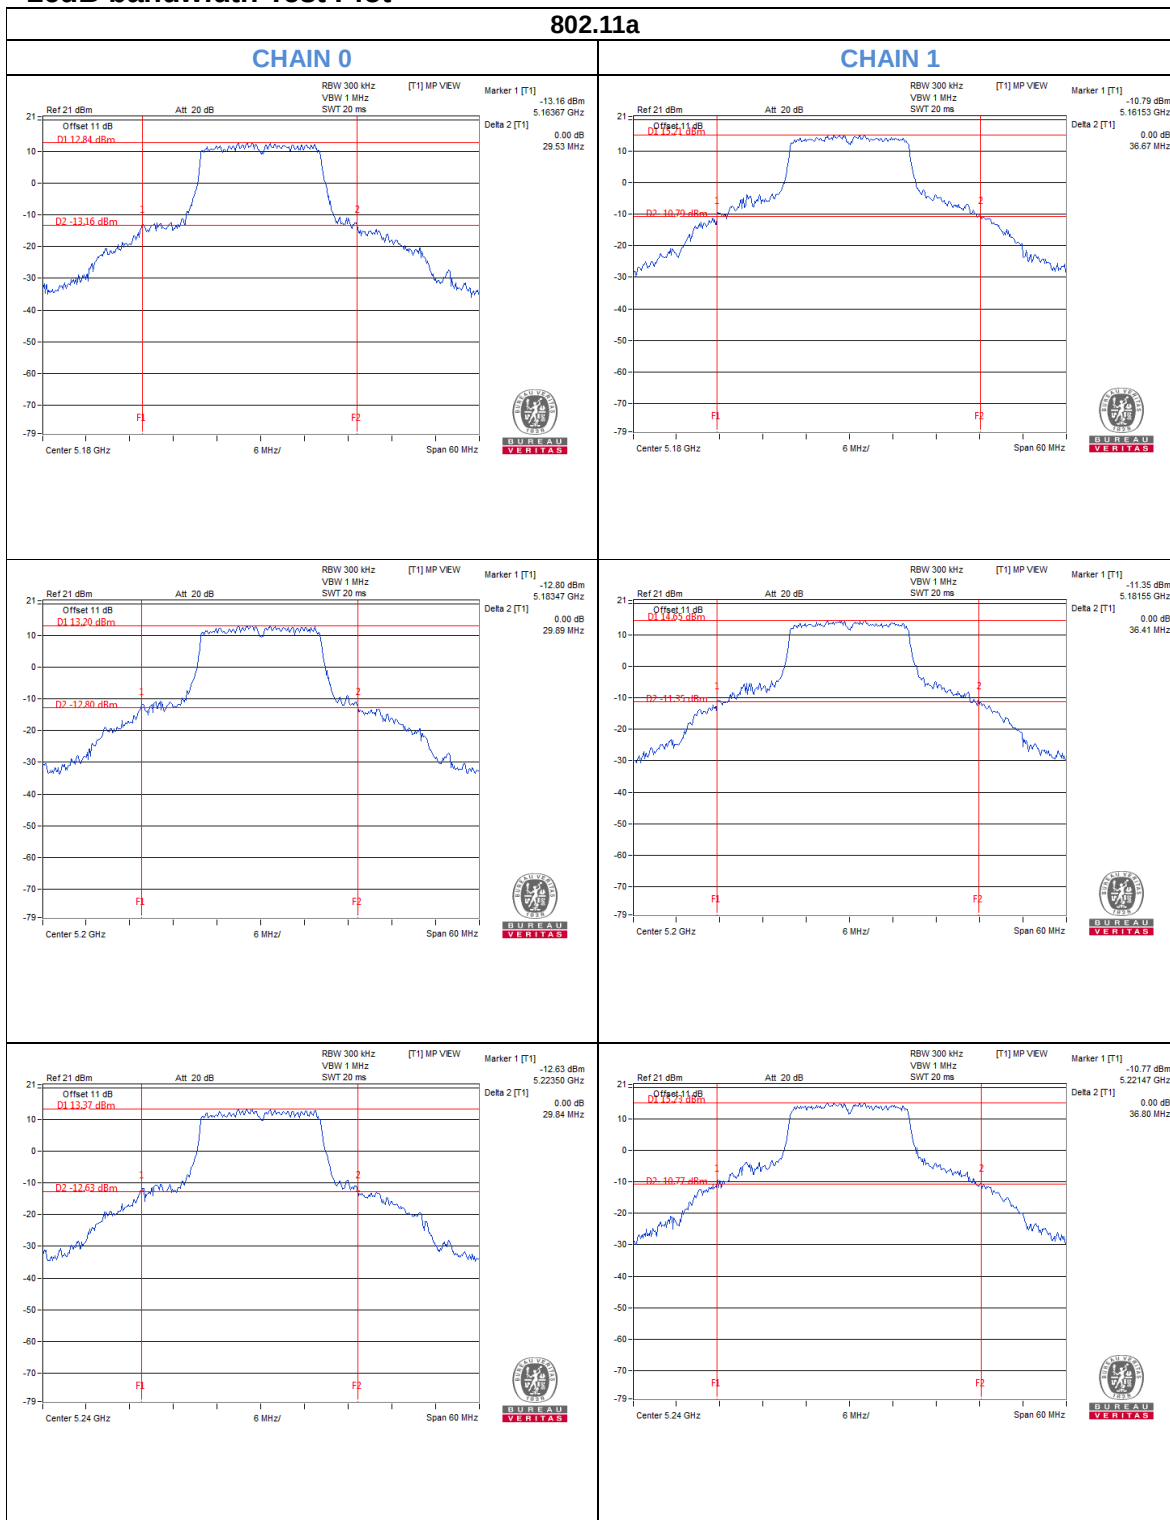

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com






BUREAU
VERITAS

Test Report No.: RF160223N035-2

26dB bandwidth Test Plot

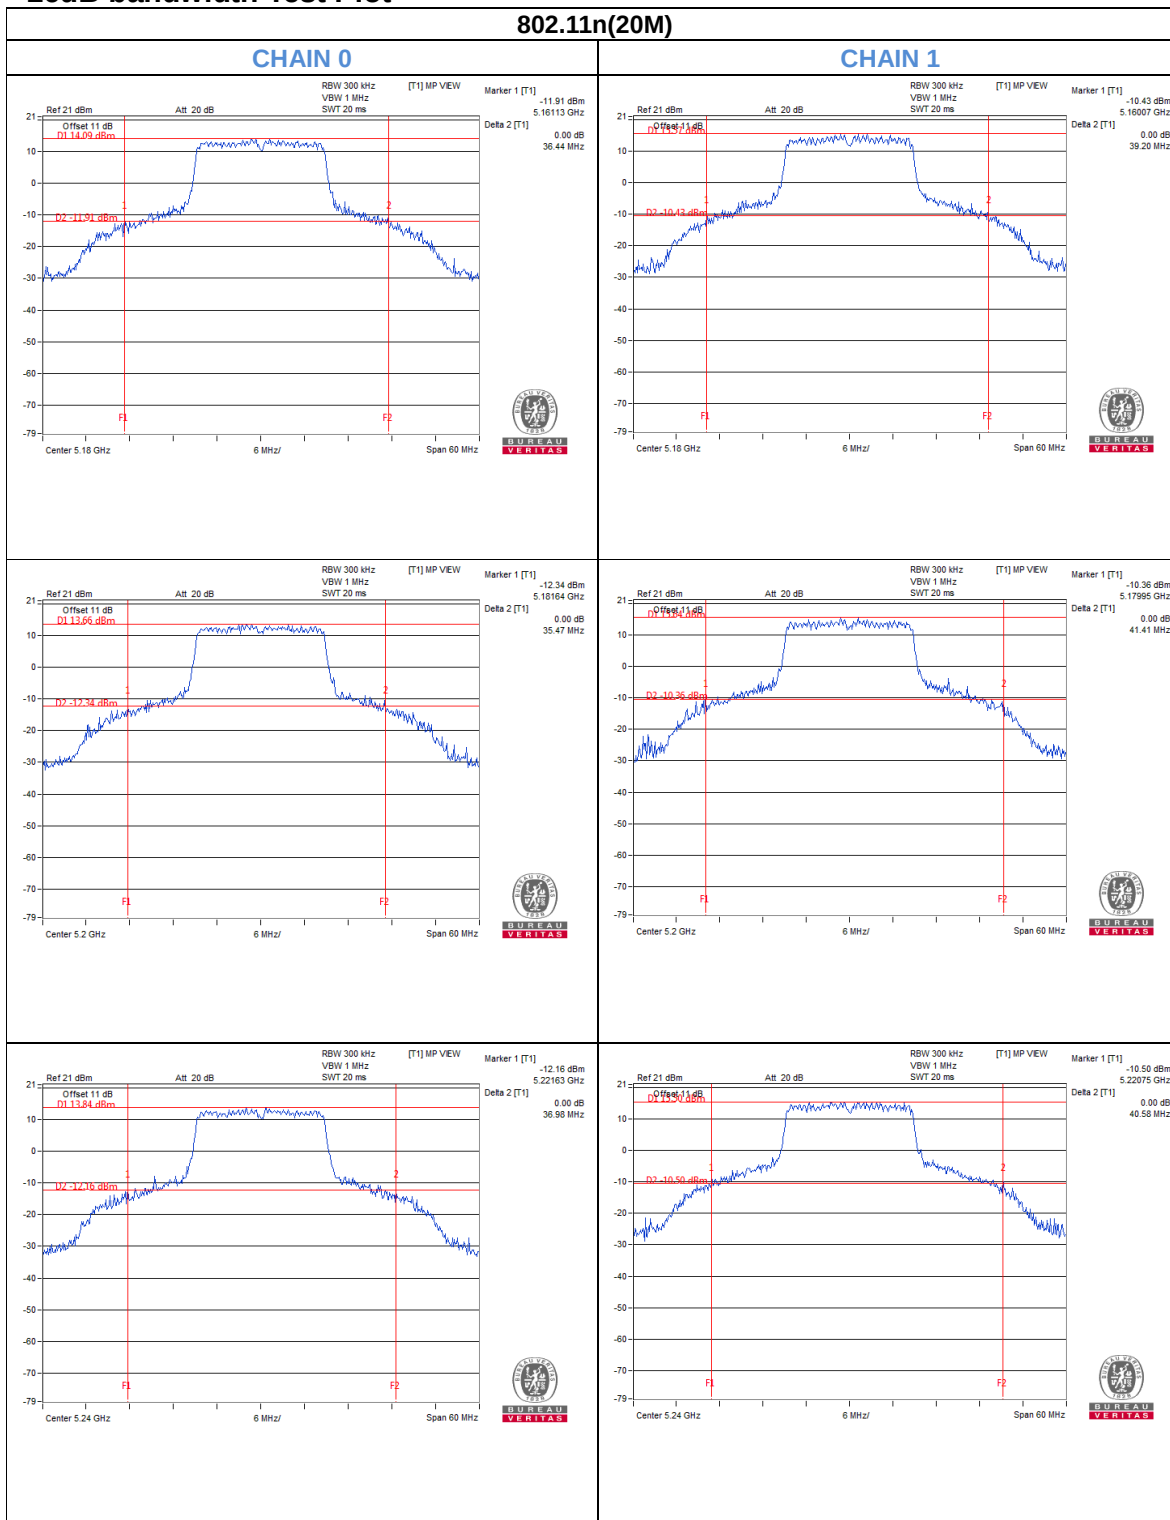

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF160223N035-2

802.11n(20M)

CHAIN 2

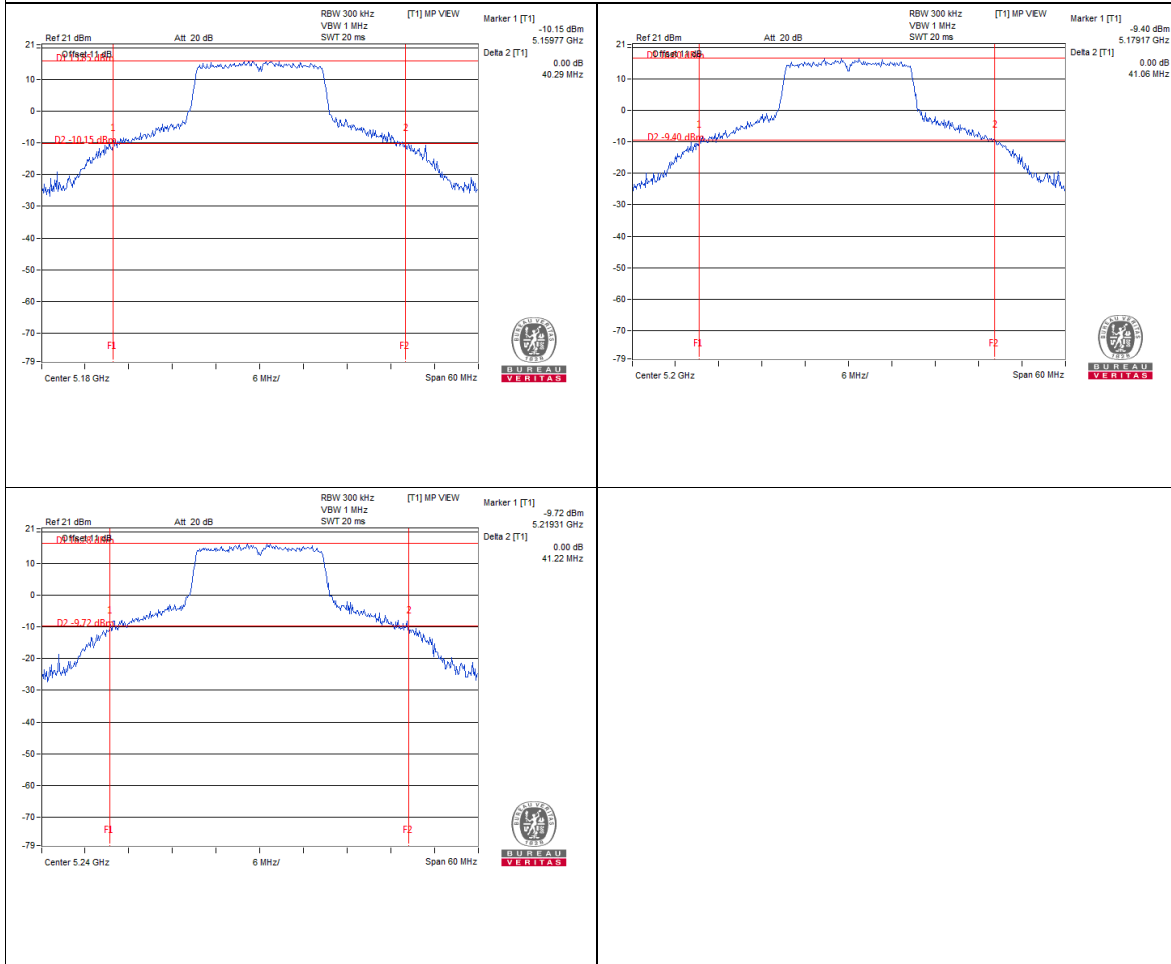

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF160223N035-2

26dB bandwidth Test Plot

802.11n(40M)

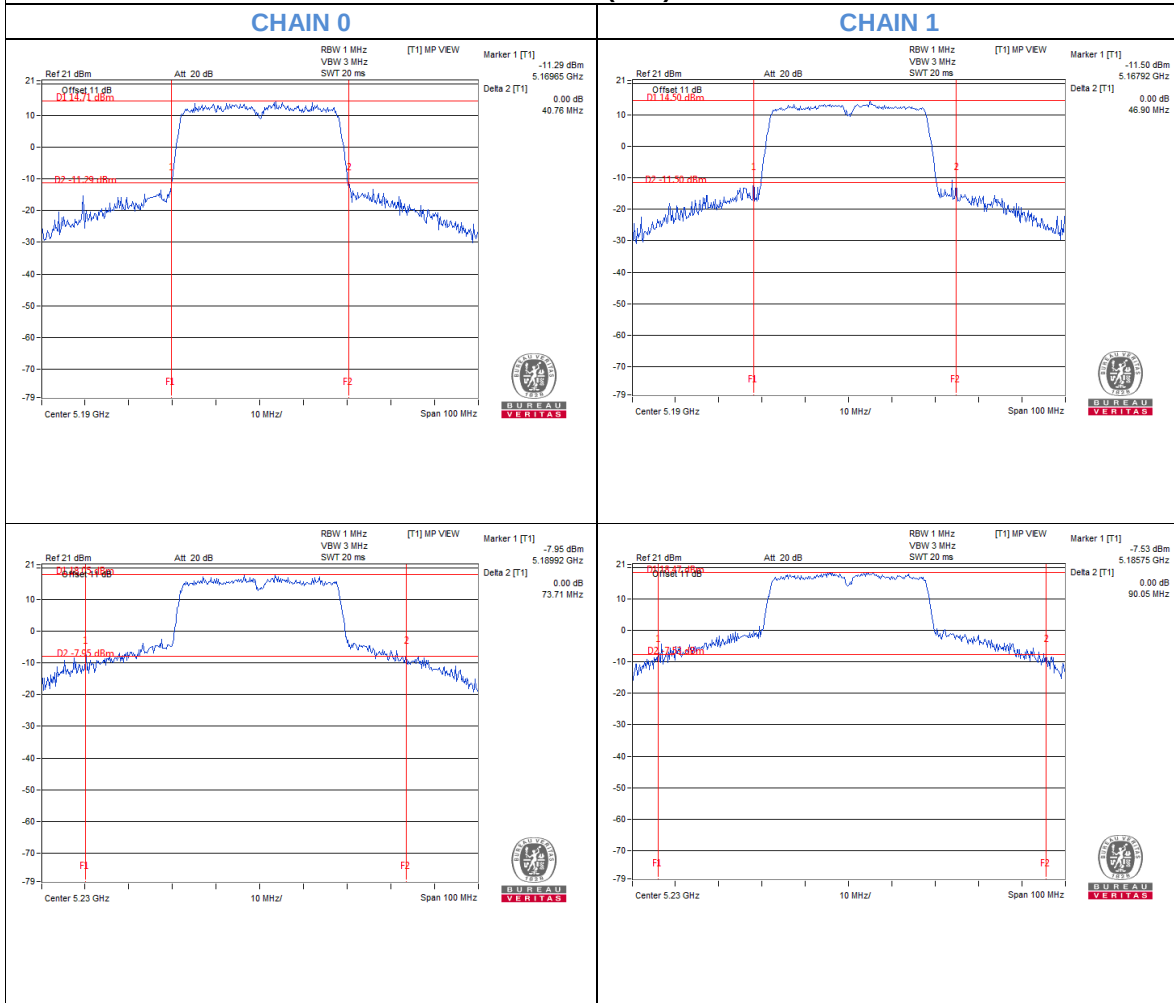

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF160223N035-2

802.11n(40M)

CHAIN 2

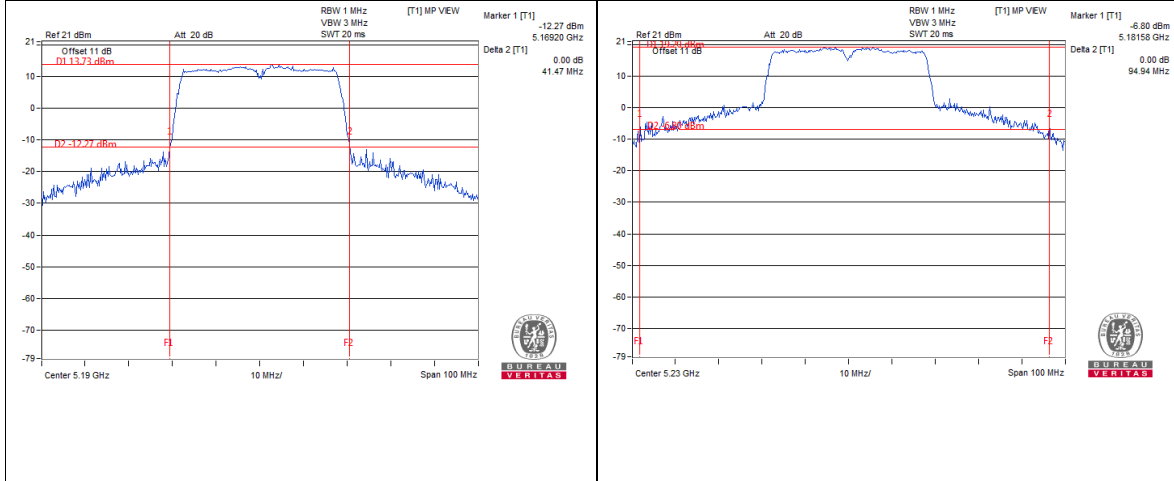


26dB bandwidth Test Plot

802.11ac(80MHz)

CHAIN 0

CHAIN 1

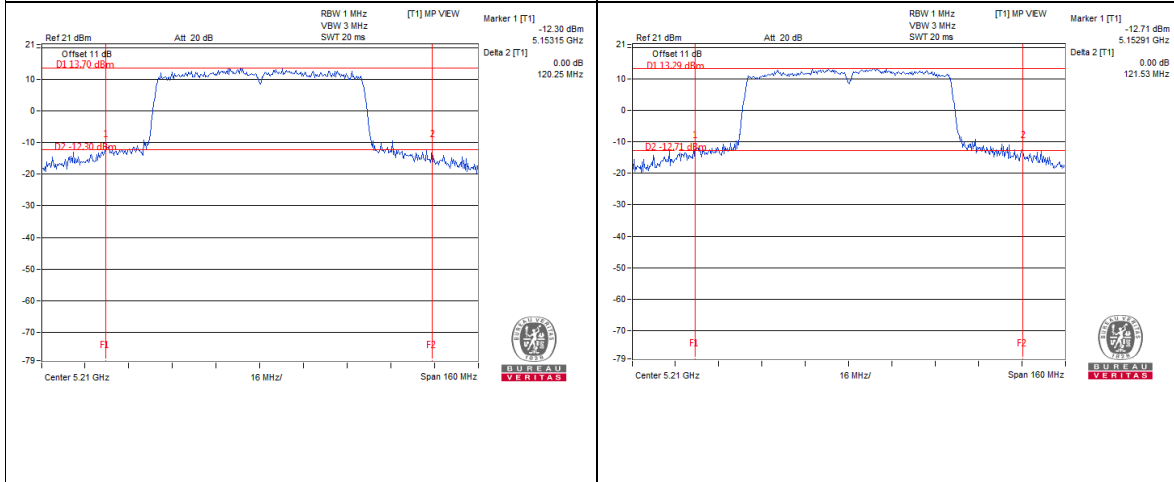

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: RF160223N035-2

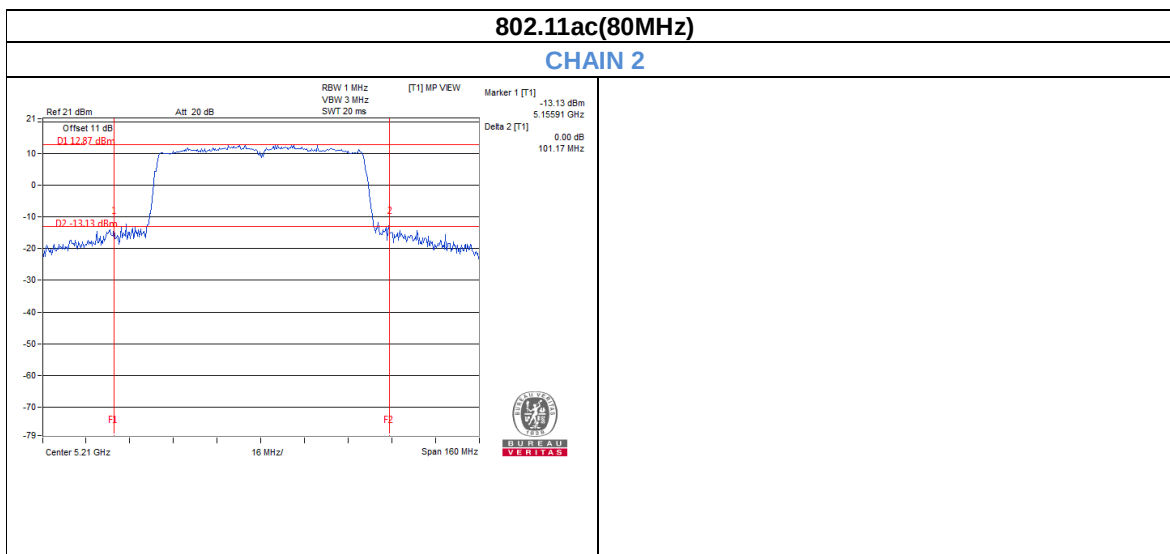

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF160223N035-2

6dB bandwidth Test Plot

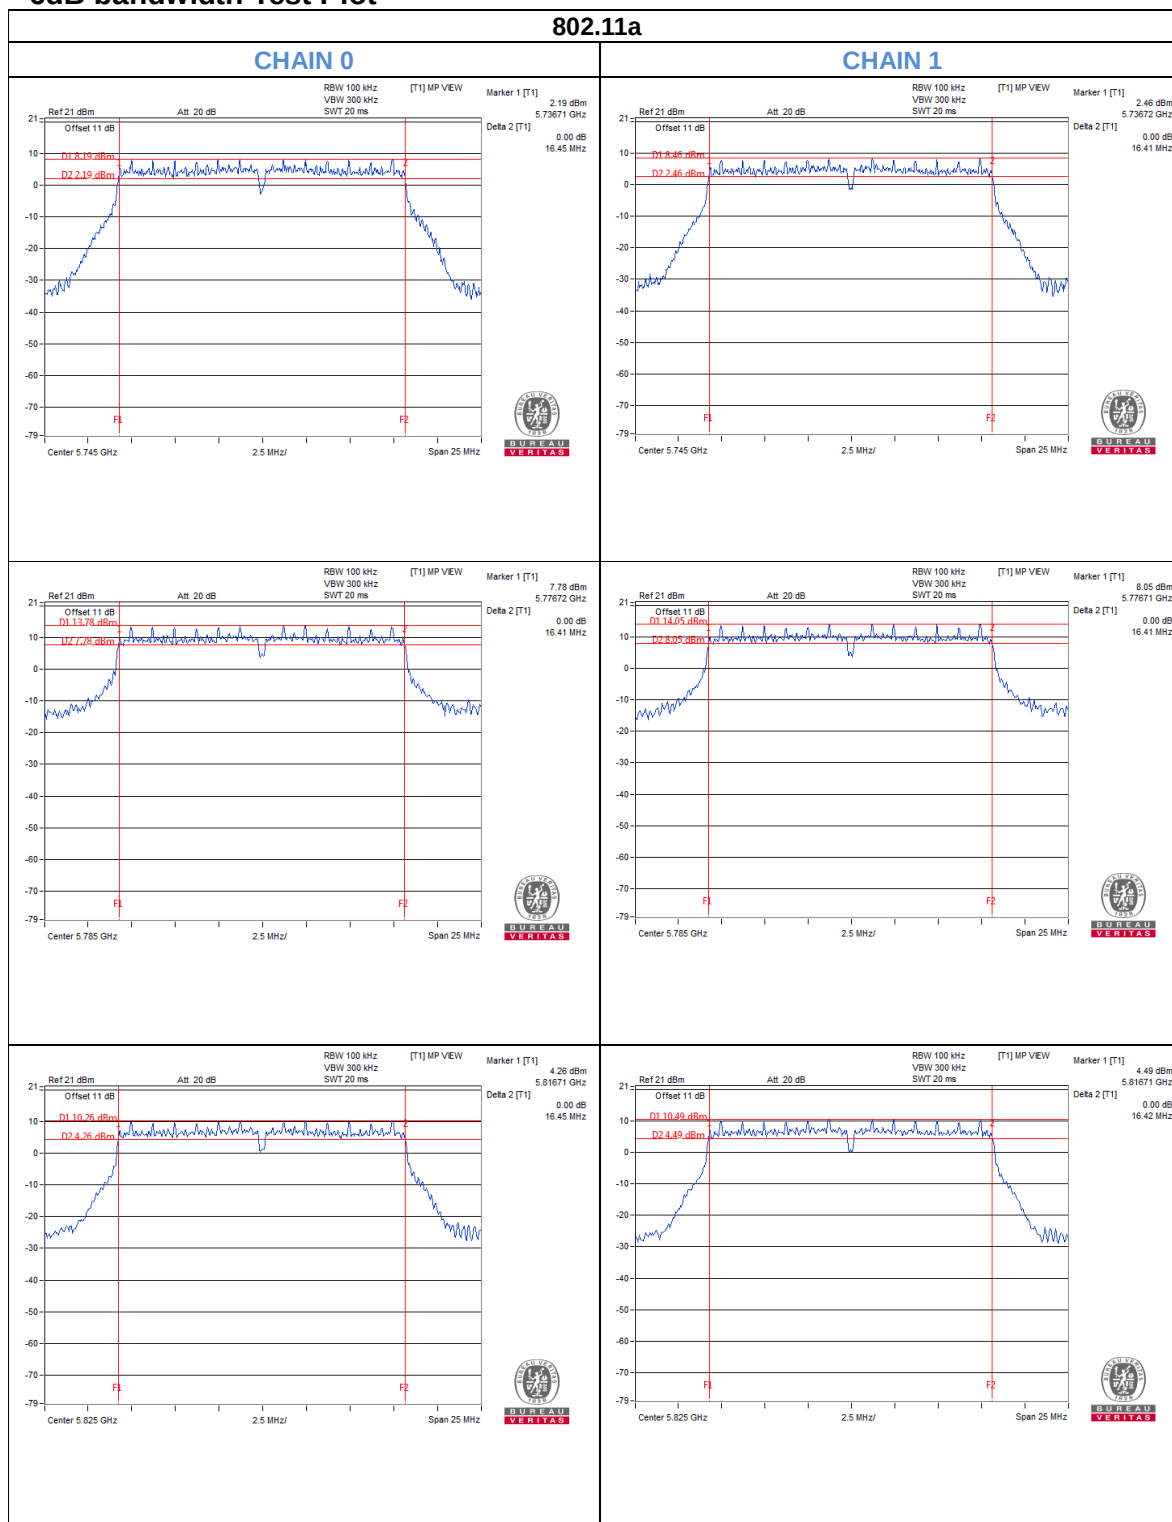

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF160223N035-2

802.11a

CHAIN 2

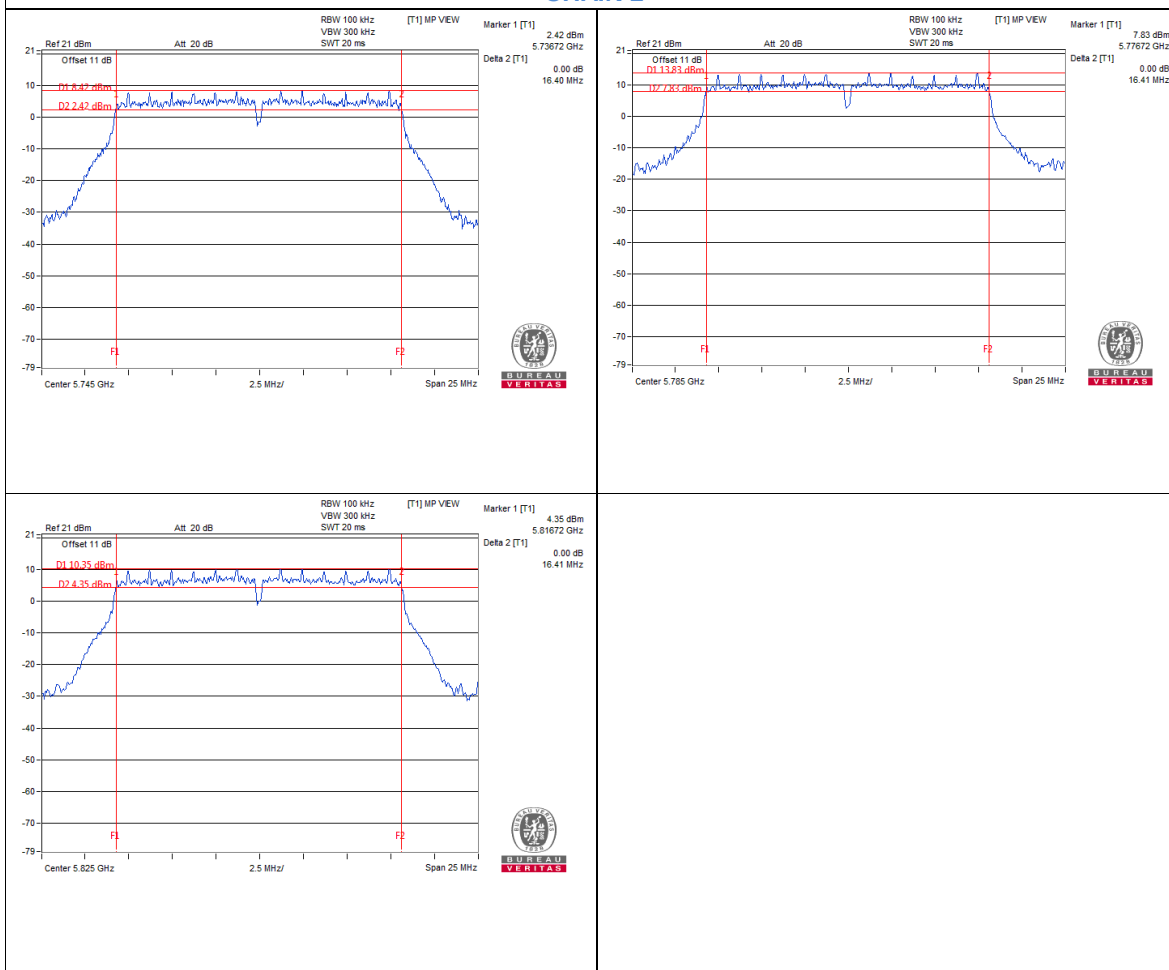

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com






BUREAU
VERITAS

Test Report No.: RF160223N035-2

802.11n(20MHz)

CHAIN 2

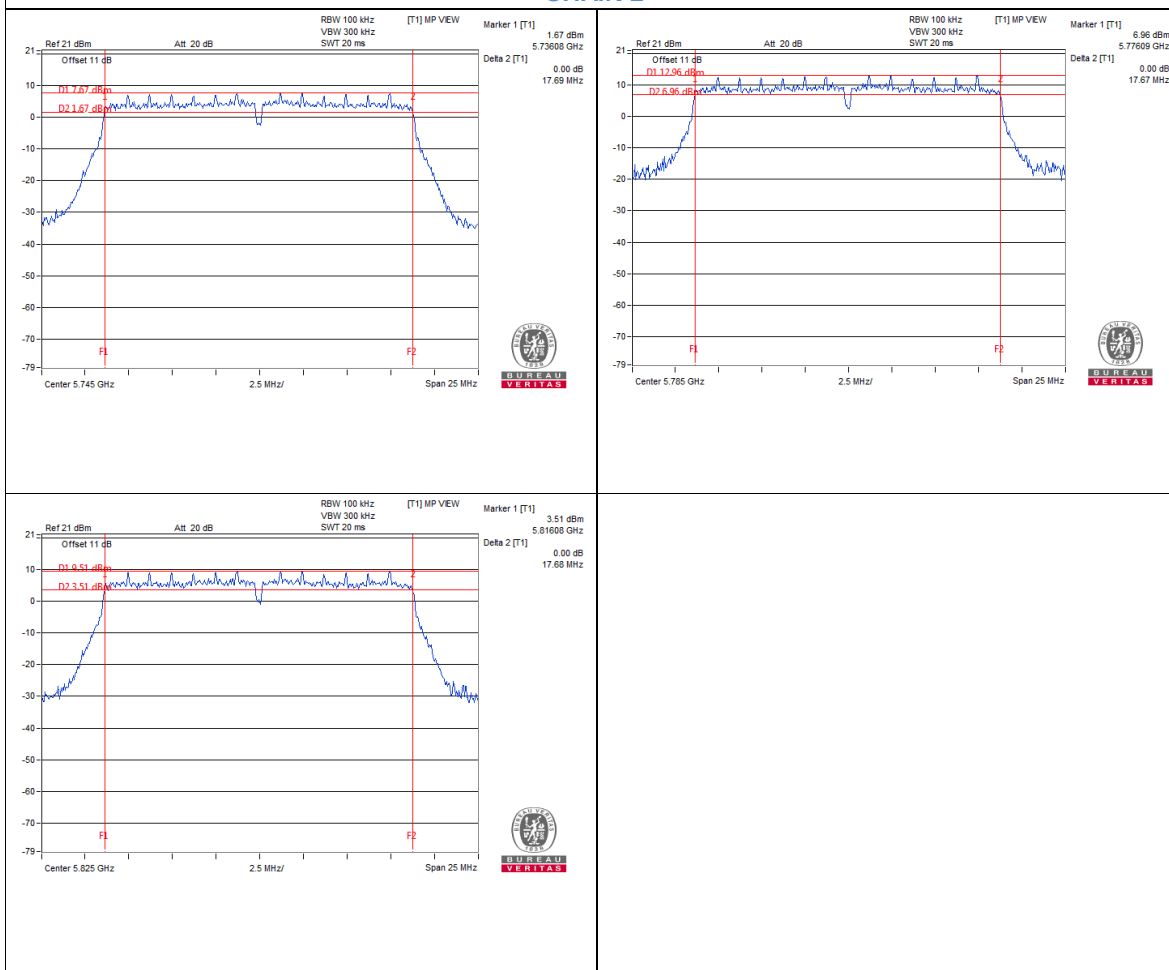

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF160223N035-2

6dB bandwidth Test Plot

802.11n(40MHz)

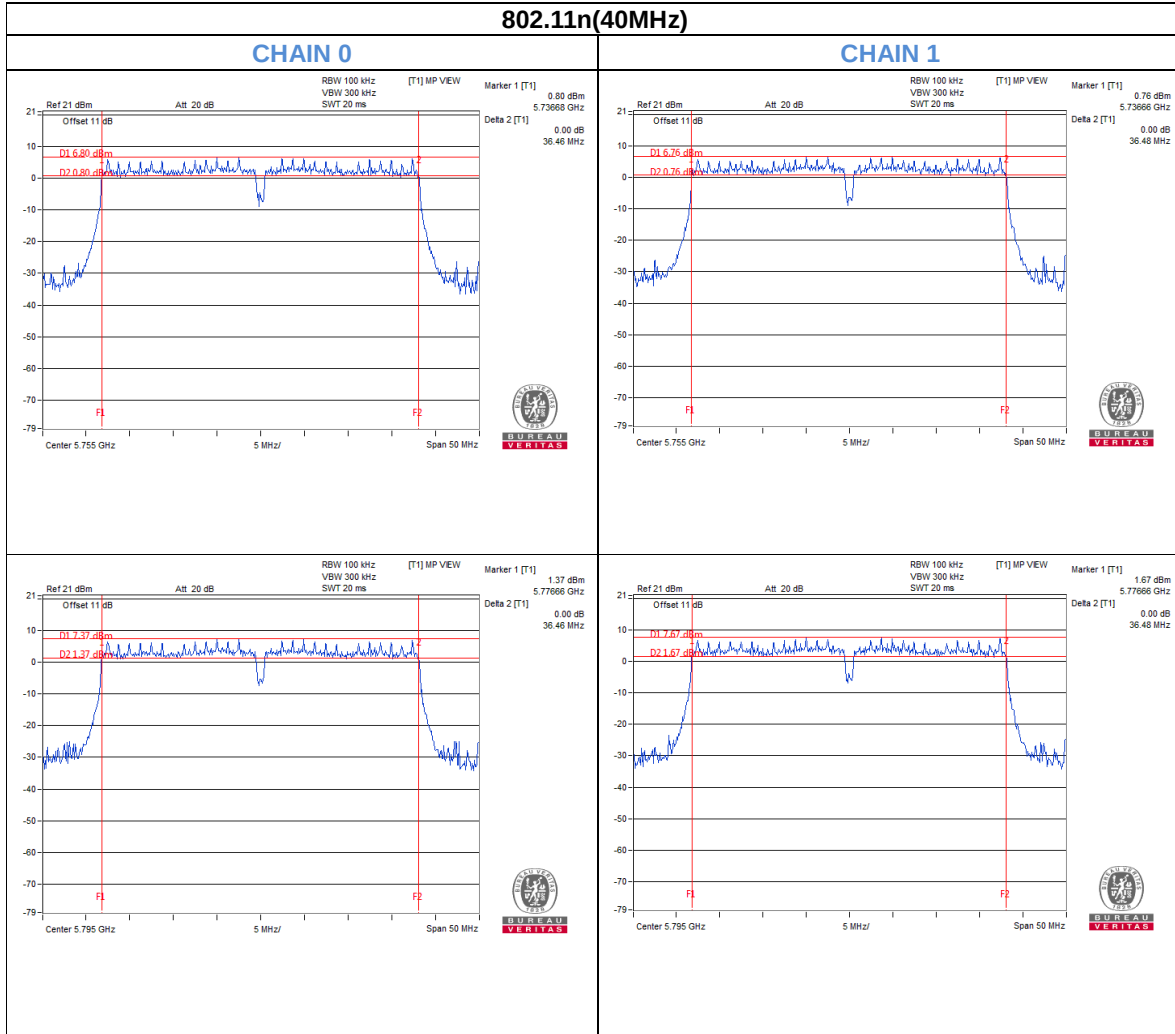

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com





BUREAU
VERITAS

Test Report No.: RF160223N035-2

802.11n(40MHz)

CHAIN 2

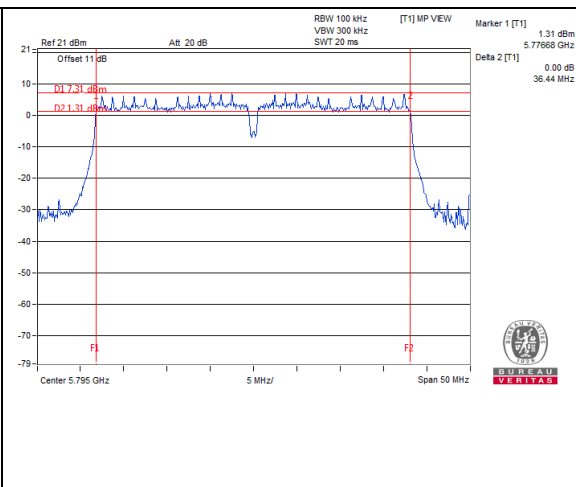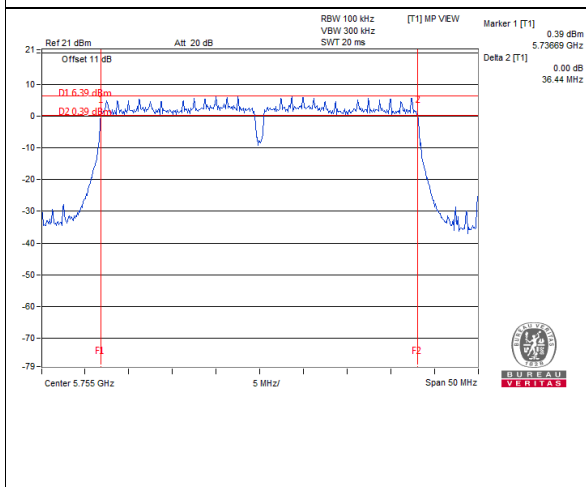

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China



Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF160223N035-2

6dB bandwidth Test Plot

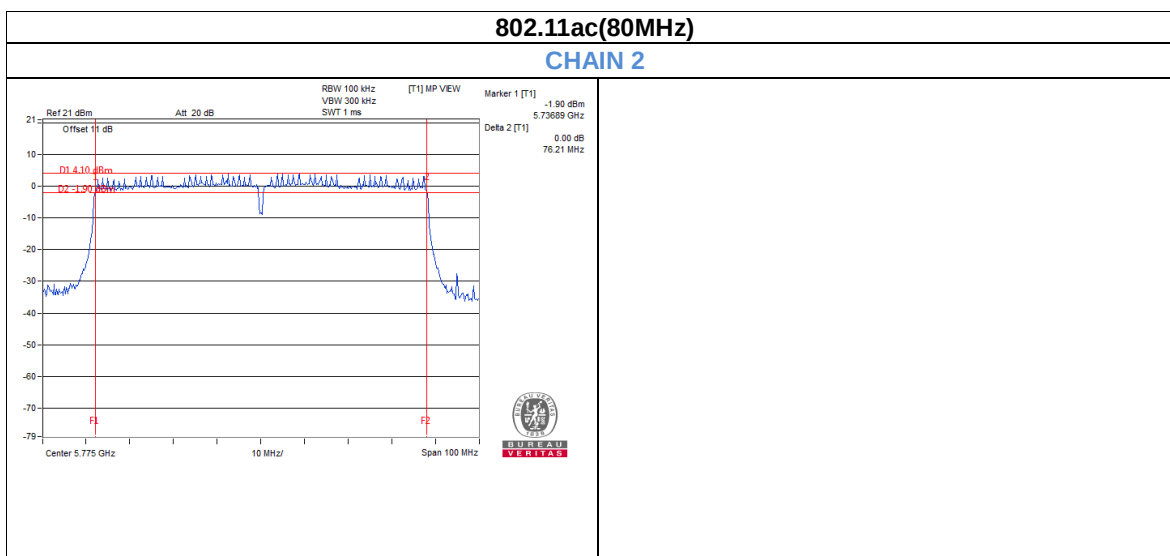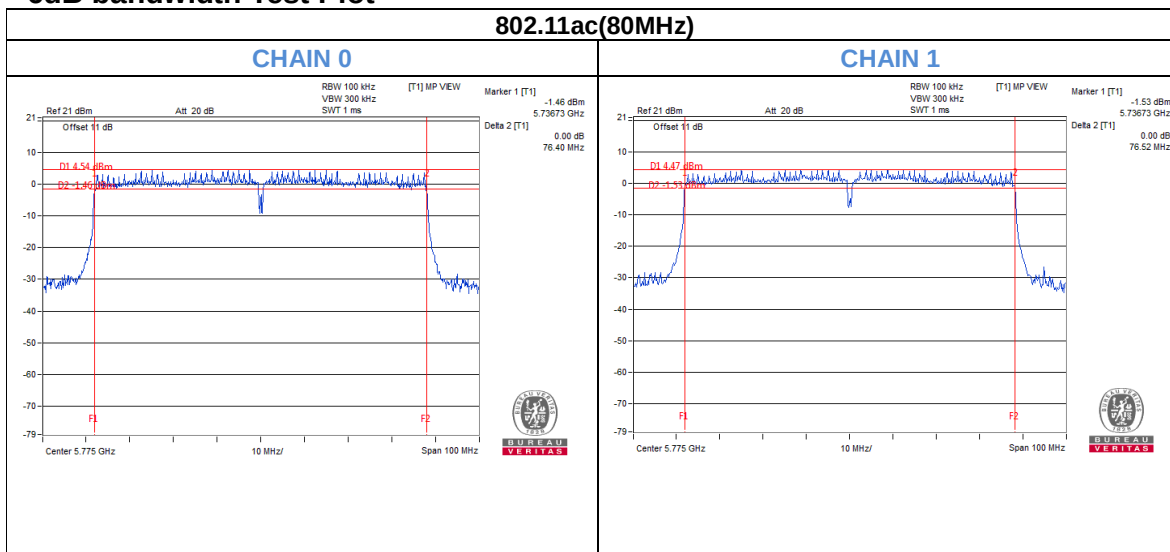


3.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-3	√	All Category	30dBm/500kHz

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.4.4 TEST PROCEDURES

For U-NII-1, U-NII-2A, U-NII-2C, U-NII-3 band:

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz(Band 1) & 300KHz(Band 4), Set VBW = 3MHz(Band 1) & 1MHz(Band 4),, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz(Band 1) & 300KHz(Band 4), Set VBW = 3MHz(Band 1) & 1MHz(Band 4),, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

Same as 3.3.6

3.4.7 TEST RESULTS

802.11a

U-NII-1 (5180-5240MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm/MHz)			TOTAL POWER DENSITY (dBm/MHz)	MAX. LIMIT (dBm/MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
36	5180	9.45	9.49	9.64	14.30	15.43	PASS
40	5200	9.73	9.89	9.97	14.64	15.43	PASS
48	5240	9.88	10.13	10.17	14.83	15.43	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1 Band:**
Directional gain = $2.8\text{dBi} + 10\log(3) = 7.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (7.57 - 6) = 15.43\text{dBm/MHz}$.

802.11a

U-NII-3(5745-5825MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm/500KHz)			TOTAL POWER DENSITY (dBm/500KHz)	MAX. LIMIT (dBm/500KHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
149	5745	1.24	1.18	1.13	5.95	28.43	PASS
157	5785	3.72	3.84	3.75	8.54	28.43	PASS
165	5825	3.06	2.86	2.78	7.67	28.43	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1 Band:**
Directional gain = $2.8\text{dBi} + 10\log(3) = 7.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (7.57 - 6) = 28.43\text{dBm/MHz}$.

802.11n(20M)

U-NII-1 (5180-5240MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm/MHz)			TOTAL POWER DENSITY (dBm/MHz)	MAX. LIMIT (dBm/MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
36	5180	9.54	9.54	10.09	14.50	15.43	PASS
40	5200	9.47	9.51	9.68	14.33	15.43	PASS
48	5240	9.27	9.48	9.52	14.20	15.43	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1 Band:**
Directional gain = 5dBi + 10log(3) = 7.57dBi > 6dBi , so the power density limit shall be reduced to 17-(7.57-6) = 15.43dBm/MHz.

802.11n(20M)

U-NII-3(5745-5825MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm/500KHz)			TOTAL POWER DENSITY (dBm/500KHz)	MAX. LIMIT (dBm/500KHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
149	5745	0.33	0.39	0.42	5.15	28.43	PASS
157	5785	2.54	2.55	2.76	7.39	28.43	PASS
165	5825	1.70	1.78	1.72	6.50	28.43	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1 Band:**
Directional gain = 2.8dBi + 10log(3) = 7.57dBi > 6dBi , so the power density limit shall be reduced to 30-(7.57-6) = 28.43dBm/MHz.

802.11n (40MHz)
U-NII-3 (5180-5240MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm/MHz)			TOTAL POWER DENSITY (dBm/MHz)	MAX. LIMIT (dBm/MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
38	5190	1.92	2.46	2.61	7.11	15.43	PASS
46	5230	6.03	6.45	6.55	11.12	15.43	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1 Band:**
Directional gain = 5dBi + 10log(3) = 7.57dBi > 6dBi , so the power density limit shall be reduced to 17-(7.57-6) = 15.43dBm/MHz.

U-NII-3 (5745-5825MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm/500KHz)			TOTAL POWER DENSITY (dBm/500KHz)	MAX. LIMIT (dBm/500KHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
151	5755	-4.63	-5.12	-4.12	0.17	28.43	PASS
159	5795	-4.76	-3.65	-3.73	0.75	28.43	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1 Band:**
Directional gain = 2.8dBi + 10log(3) = 7.57dBi > 6dBi , so the power density limit shall be reduced to 30-(7.57-6) =28.43dBm/MHz.

802.11ac (80MHz)
U-NII-3 (5180-5240MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm/MHz)			TOTAL POWER DENSITY (dBm/MHz)	MAX. LIMIT (dBm/MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
42	5210	1.76	2.26	2.13	6.82	15.43	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1 Band:**
Directional gain = 5dBi + 10log(3) = 7.57dBi > 6dBi , so the power density limit shall be reduced to 17-(7.57-6) = 15.43dBm/MHz.

U-NII-3 (5745-5825MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm/500KHz)			TOTAL POWER DENSITY (dBm/500KHz)	MAX. LIMIT (dBm/500KHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
155	5775	-6.72	-6.77	-7.10	-2.09	28.43	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1 Band:**
Directional gain = 2.8dBi + 10log(3) = 7.57dBi > 6dBi , so the power density limit shall be reduced to 30-(7.57-6) = 28.43dBm/MHz.




BUREAU
VERITAS

Test Report No.: RF160223N035-2

BAND 1

U-NII-1 5180-5240MHz

CHAIN 0

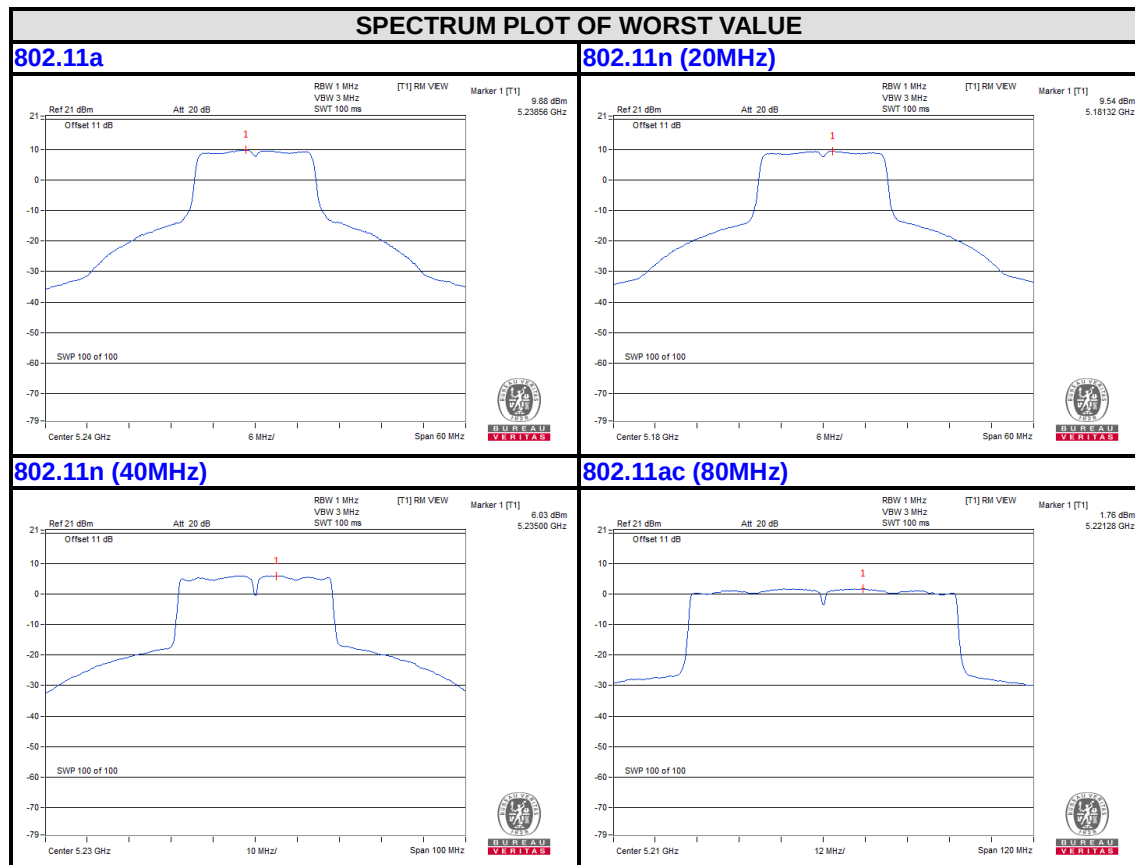




**BUREAU
VERITAS**
CHAIN 1


Test Report No.: RF160223N035-2

SPECTRUM PLOT OF WORST VALUE


802.11a

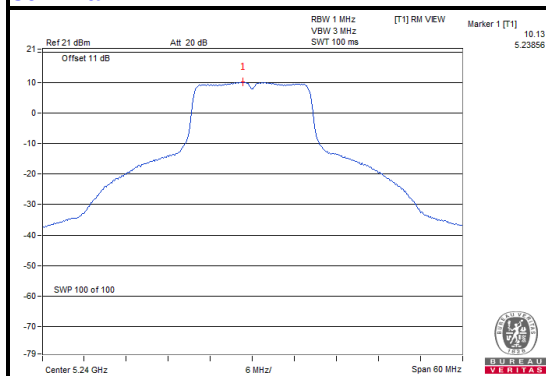


802.11n (20MHz)

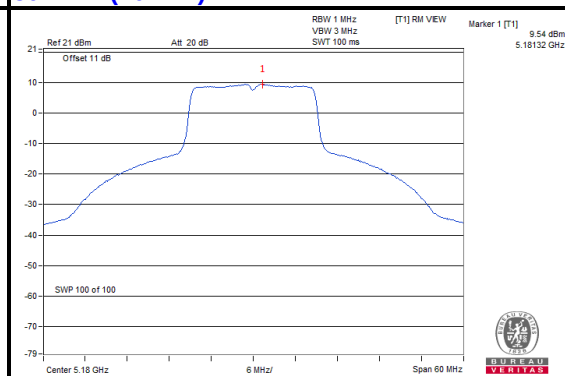

802.11n (40MHz)

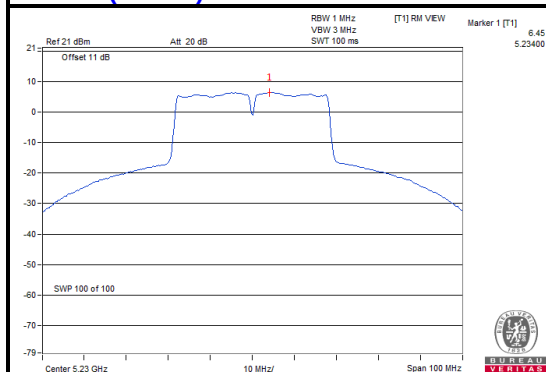

802.11ac (80MHz)

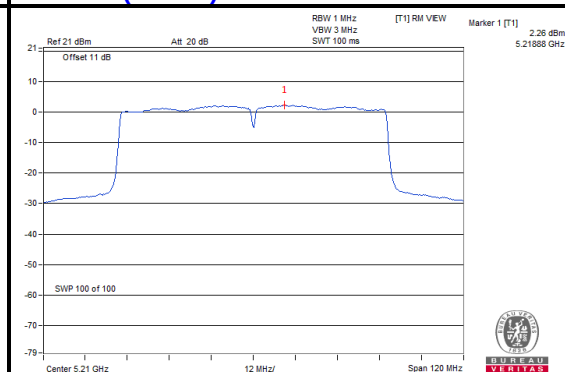




**BUREAU
VERITAS**
CHAIN 2


Test Report No.: RF160223N035-2

SPECTRUM PLOT OF WORST VALUE


802.11a

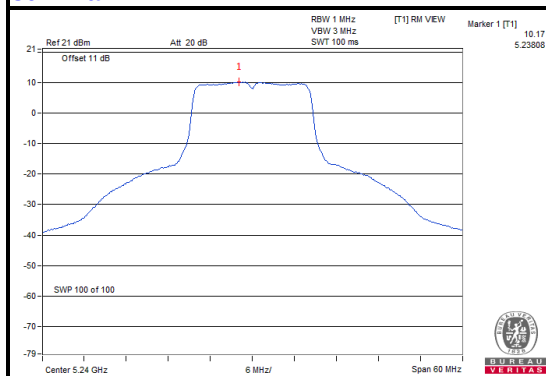


802.11n (20MHz)

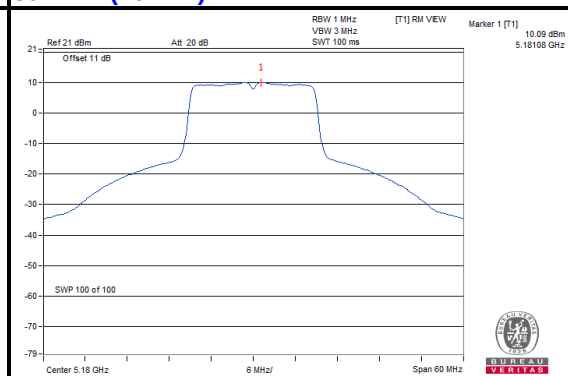

802.11n (40MHz)

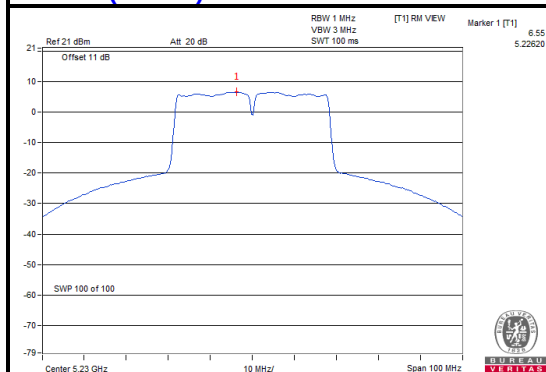

802.11ac (80MHz)

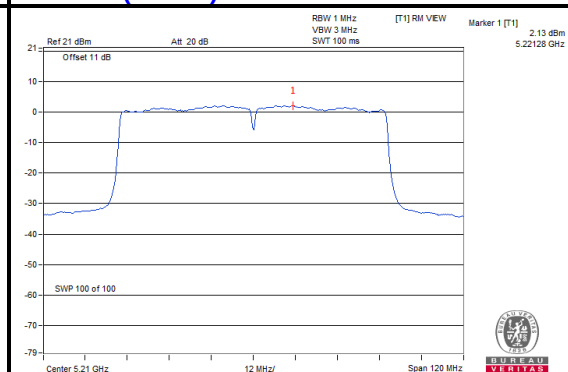




BUREAU
VERITAS

Test Report No.: RF160223N035-2

BAND4
U-NII-3 5745-5825MHz
CHAIN 0

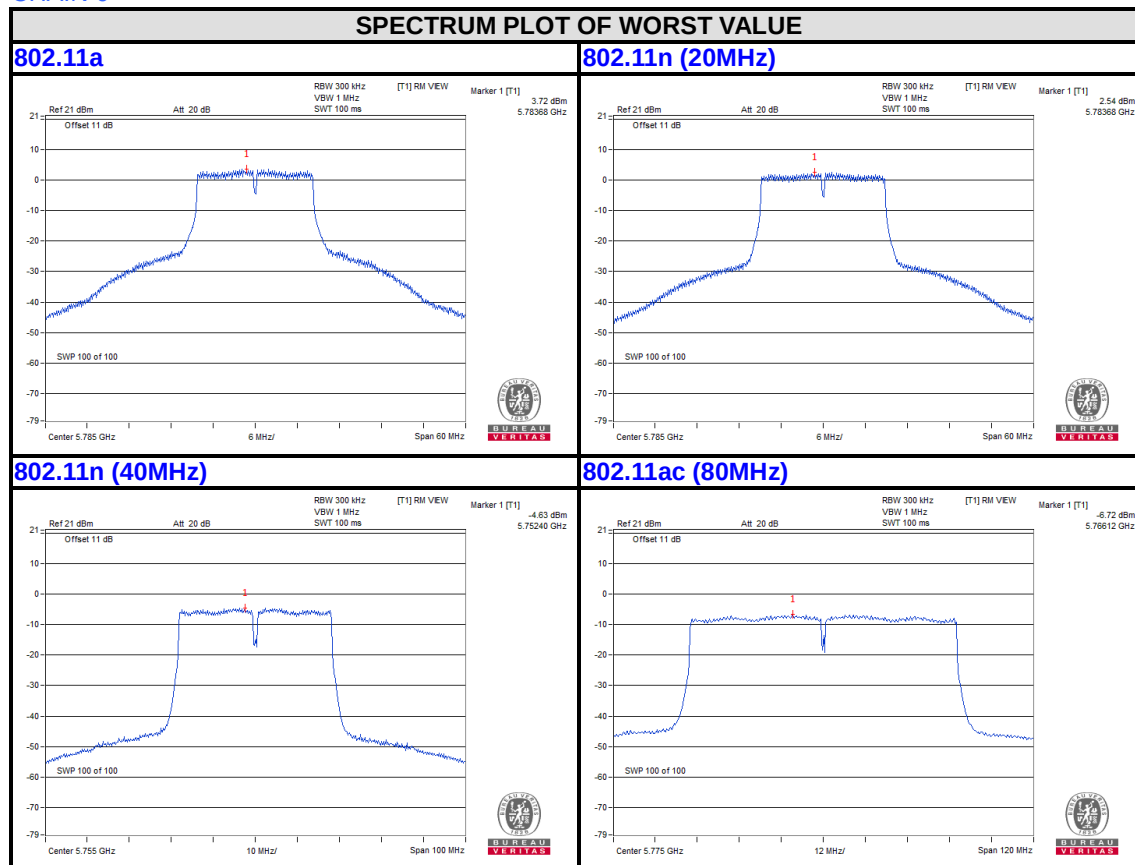

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF160223N035-2


CHAIN 1

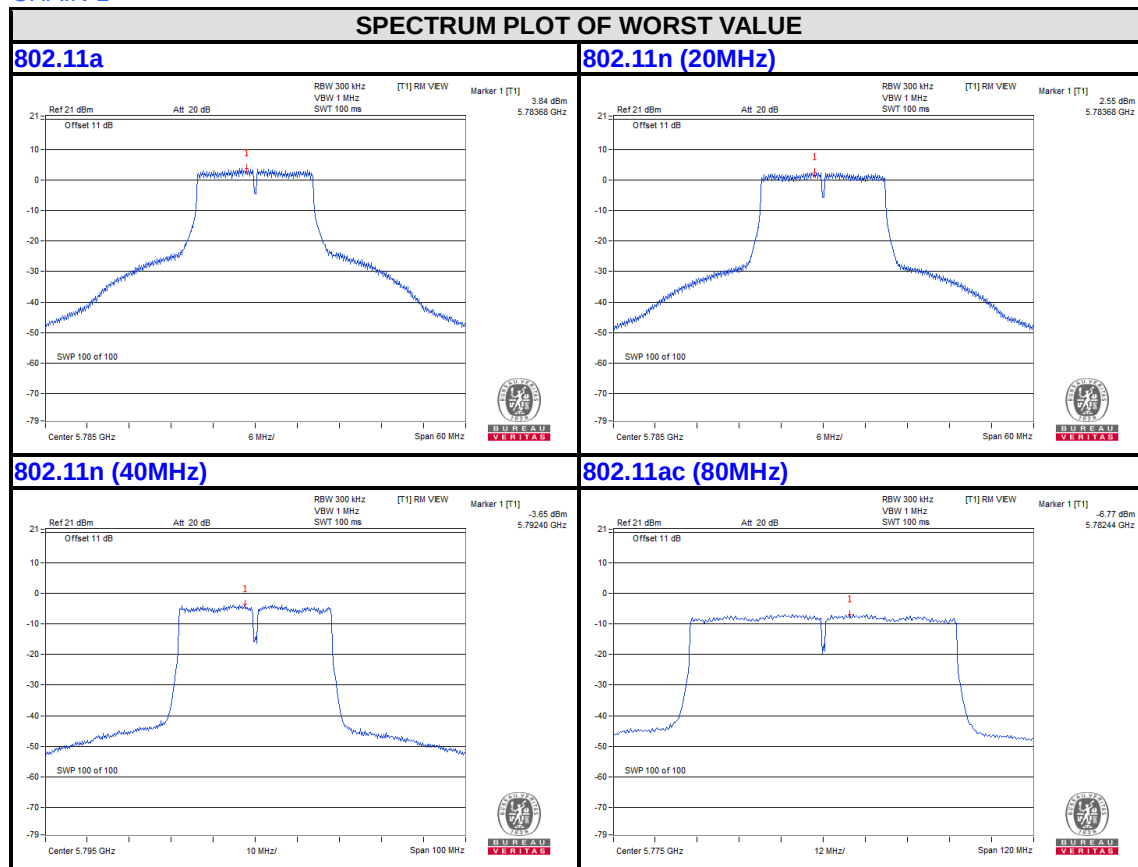



BUREAU
VERITAS
CHAIN 2

Test Report No.: RF160223N035-2

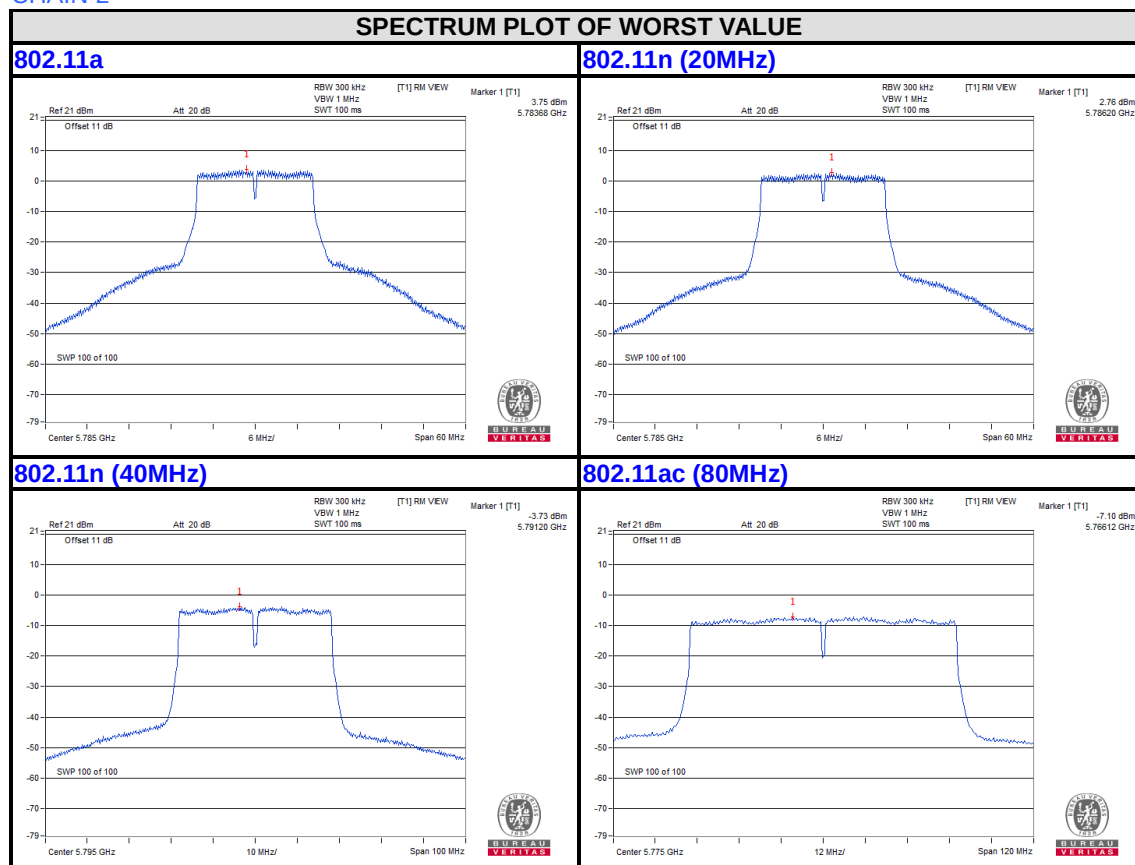

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




3.5 FREQUENCY STABILITY

3.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation.

3.5.2 TEST SETUP

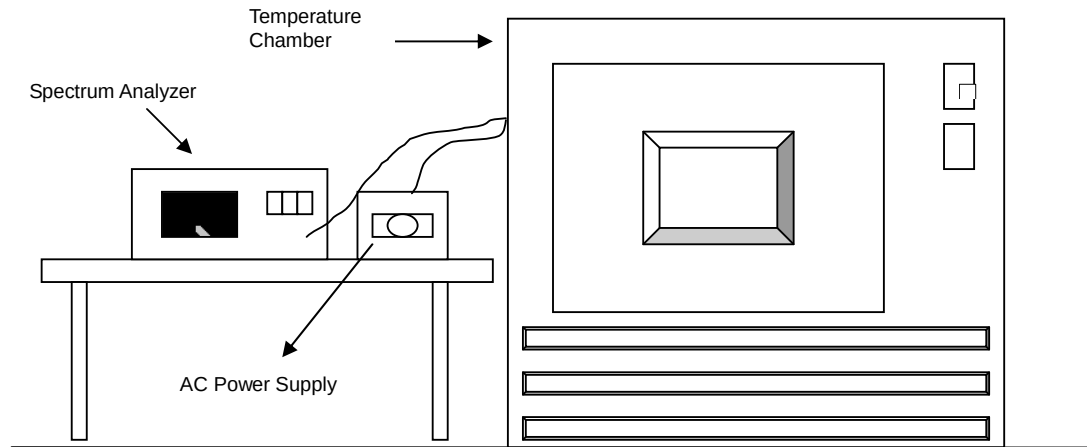

3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.



3.5.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



3.5.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)
50	138	5179.987	-0.00025	5179.9898	-0.00020	5179.9892	-0.00021	5179.987	-0.00025
40	120	5180.0095	0.00018	5180.0106	0.00020	5180.0095	0.00018	5180.011	0.00021
30	102	5180.0188	0.00036	5180.0203	0.00039	5180.0207	0.00040	5180.022	0.00042
20	138	5180.0157	0.00030	5180.0202	0.00039	5180.0199	0.00038	5180.0193	0.00037
10	120	5180.0067	0.00013	5180.006	0.00012	5180.0081	0.00016	5180.0049	0.00009
0	102	5179.9722	-0.00054	5179.9739	-0.00050	5179.973	-0.00052	5179.9731	-0.00052
-10	138	5180.0214	0.00041	5180.0218	0.00042	5180.0221	0.00043	5180.0224	0.00043
-20	120	5180.0263	0.00051	5180.0258	0.00050	5180.0234	0.00045	5180.0238	0.00046
-30	102	5180.009	0.00017	5180.0078	0.00015	5180.0062	0.00012	5180.0096	0.00019

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)
20	138	5180.0164	0.00032	5180.0193	0.00037	5180.0194	0.00037	5180.02	0.00039
	120	5180.0157	0.00030	5180.0202	0.00039	5180.0199	0.00038	5180.0193	0.00037
	102	5180.0166	0.00032	5180.0199	0.00038	5180.0193	0.00037	5180.0188	0.00036



Test Report No.: RF160223N035-2

4. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF160223N035-2

5. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---