



REPORT No.: SZ20040206W02

TEST REPORT

APPLICANT : Tiinlab Acoustic Technology Limited

PRODUCT NAME : 1MORE ColorBuds True Wireless
In-Ear Headphones

MODEL NAME : ESS6001T

BRAND NAME : 1MORE

FCC ID : 2ASDIESS6001T

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2020-04-20

TEST DATE : 2020-04-23 to 2020-05-07

ISSUE DATE : 2020-05-20

Edited by:

Peng Mi (Rapporteur)

Approved by:

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. The Channel Number and Frequency	6
1.4. Test Standards and Results	7
1.5. Environmental Conditions	8
2. 47 CFR Part 15C Requirements	9
2.1. Antenna requirement	9
2.2. Hopping Mechanism	9
2.3. Number of Hopping Frequency	10
2.4. Duty Cycle Of Test Signal	15
2.5. Maximum Peak Conducted Output Power	17
2.6. Maximum Average Conducted Output Power	30
2.7. 20dB Bandwidth	33
2.8. Carried Frequency Separation	46
2.9. Time of Occupancy (Dwell time)	51
2.10. Conducted Spurious Emissions	64
2.11. Conducted Emission	89
2.12. Restricted Frequency Bands	91
2.13. Radiated Emission	110
Annex A Test Uncertainty	132
Annex B Testing Laboratory Information	133



REPORT No.: SZ20040206W02

Change History		
Version	Date	Reason for change
1.0	2020-05-20	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Tiinlab Acoustic Technology Limited
Applicant Address:	Tianliao Building 1403, Zone A Tianliao Industrial Park, Taoyuan Str., Nanshan Dist., Shenzhen, P.R. China
Manufacturer:	Tiinlab Acoustic Technology Limited
Manufacturer Address:	Tianliao Building 1403, Zone A Tianliao Industrial Park, Taoyuan Str., Nanshan Dist., Shenzhen, P.R. China

1.2. Equipment Under Test (EUT) Description

Product Name:	1MORE ColorBuds True Wireless In-Ear Headphones	
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	V0.3	
Software Version:	V0.04.30	
Equipment Type:	Bluetooth classic	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	2402MHz – 2480MHz	
Antenna Type:	LDS Antenna	
Antenna Gain:	Left:-1.03dBi Right: -1.27dBi	
Accessory Information:	Battery cell (Headphones)	
	Brand Name:	N/A
	Model No.:	AECR1064
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	55mAh
	Rated Voltage:	3.84V
	Charge Limit:	4.40 V



Accessory Information:	Battery cell (Charging Case)	
	Brand Name:	N/A
	Model No.:	682723
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	410mAh
	Rated Voltage:	3.80V
	Charge Limit:	4.35 V

Note 1: We use the dedicated software to control the EUT into the test mode, and then use MT8852B base station to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3.The Channel Number and Frequency

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The Lowest Channel 0, Middle 39 and Highest 78 were selected for test in the report.



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a)1 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Apr 26, 2020	Ouyang Feng	PASS	No deviation
4	N/A	Duty Cycle	Apr 23, 2020	Ouyang Feng	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Apr 23, 2020	Ouyang Feng	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Apr 23, 2020	Ouyang Feng	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Apr 26, 2020	Ouyang Feng	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Apr 26, 2020	Ouyang Feng	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Apr 26, 2020	Ouyang Feng	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Apr 26, 2020	Ouyang Feng	PASS	No deviation
11	15.207	Conducted Emission	N/A	N/A	N/A ^{Note1}	N/A
12	15.247(d)	Restricted Frequency Bands	Apr 24&May 07, 2020	Li Zihao Gao Jianrou	PASS	No deviation



13	15.209, 15.247(d)	Radiated Emission	Apr 24&May 07, 2020	Li Zihao Gao Jianrou	PASS	No deviation
----	----------------------	----------------------	------------------------	-------------------------	------	--------------

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB558074 D01 v05r02.

Note 3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 2.0dB means the cable loss is 2.0dB.

Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Hopping Mechanism

2.2.1. Requirement

According to FCC §15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC §15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

2.2.2. Result: Compliant

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".


2.3. Number of Hopping Frequency

2.3.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.3.2. Test Description

Test Setup:

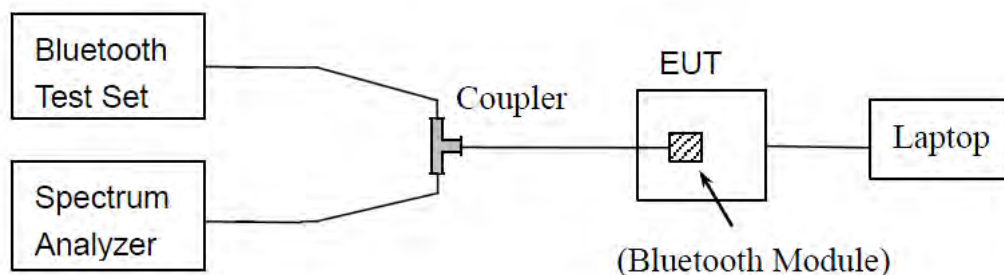

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.3.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

2.3.4. Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

Left



A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS

B. Test Plots:

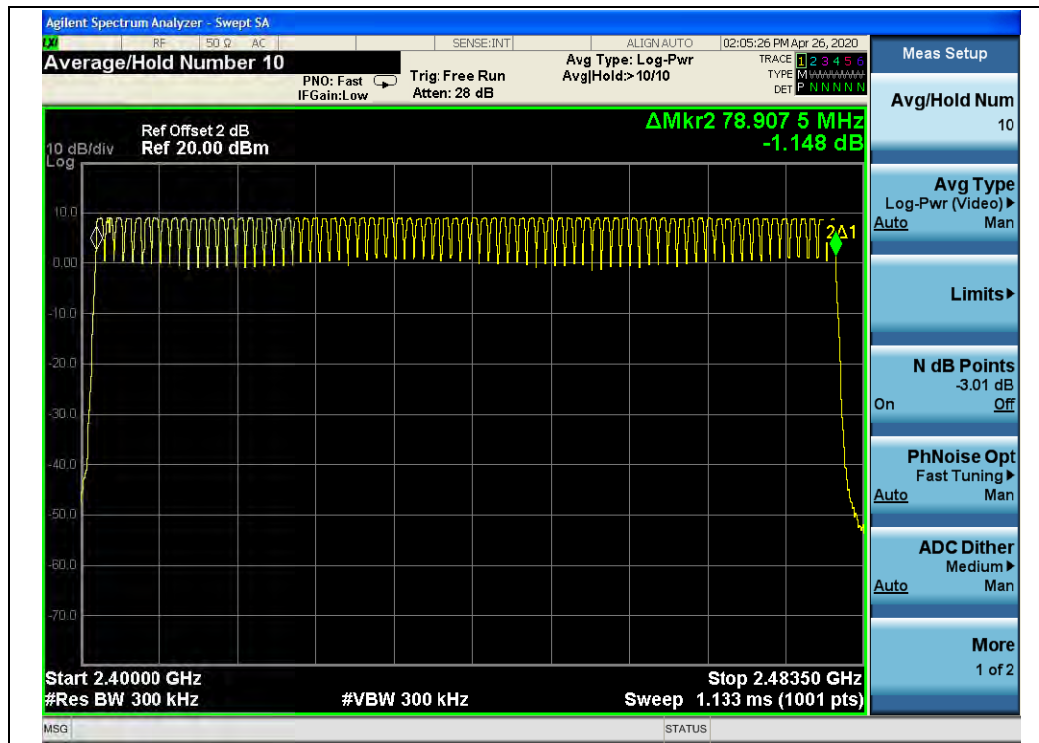

(GFSK)

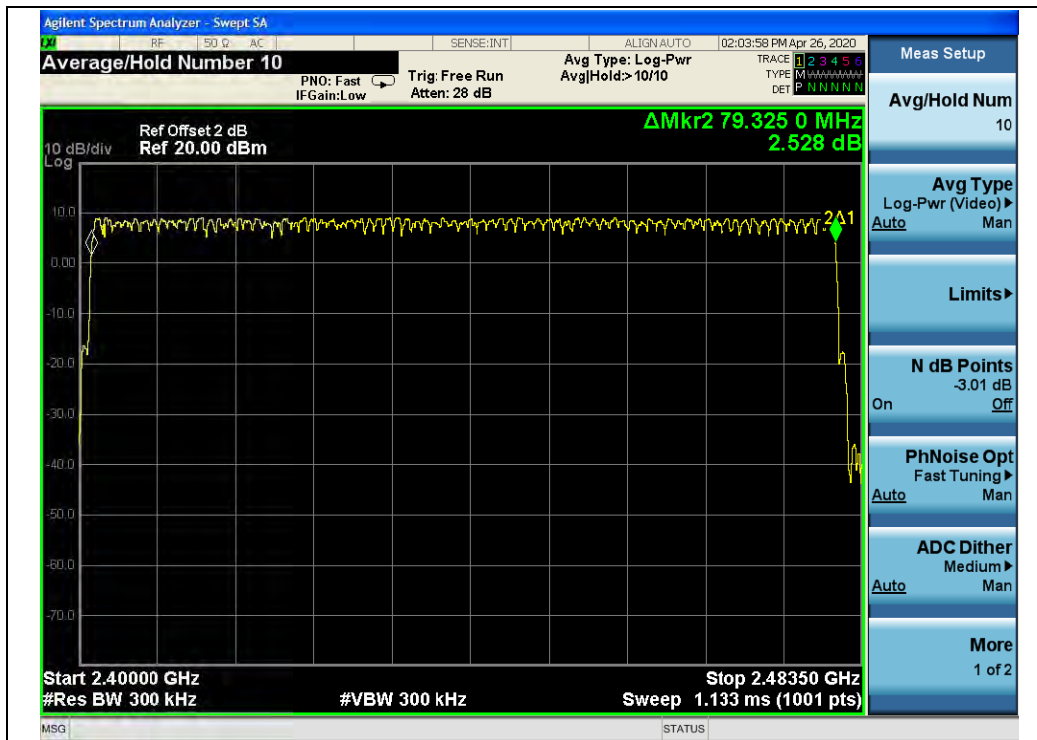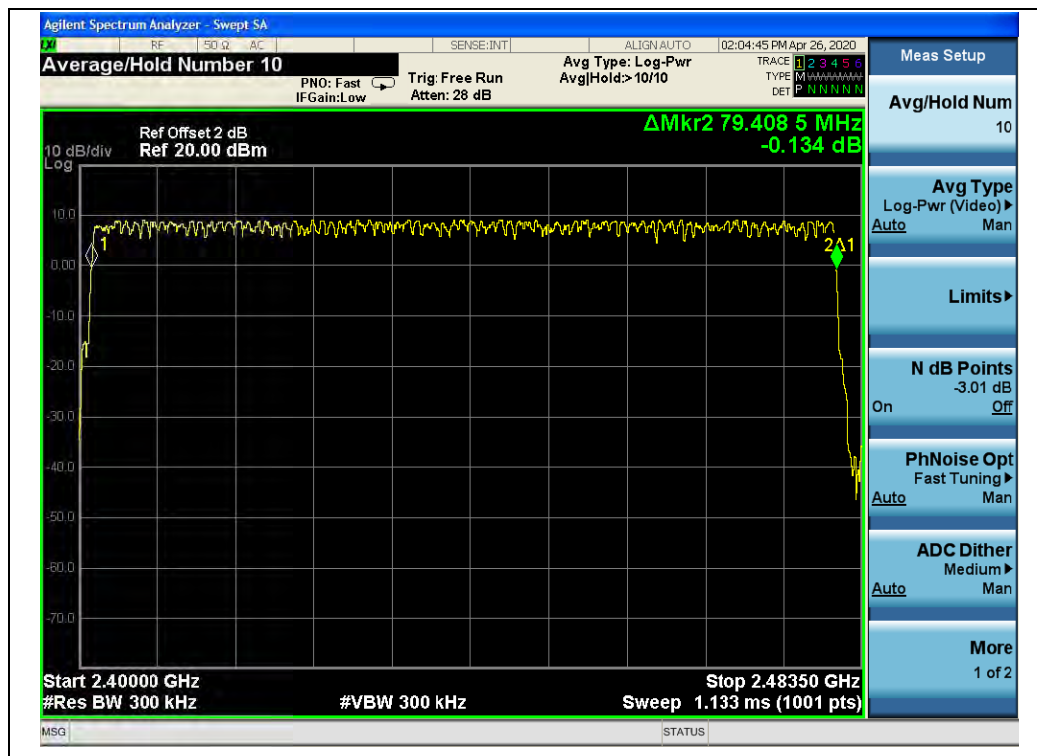 $(\pi/4\text{-DQPSK})$ 

(8- DPSK)



Right



A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS

B. Test Plots:



(GFSK)

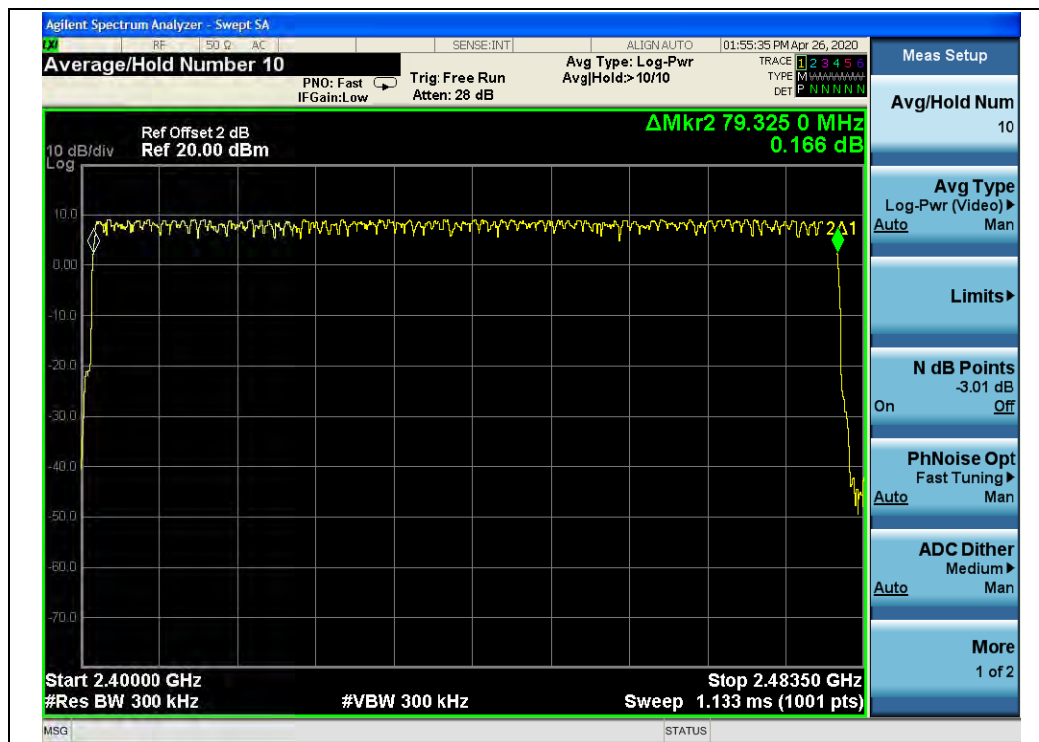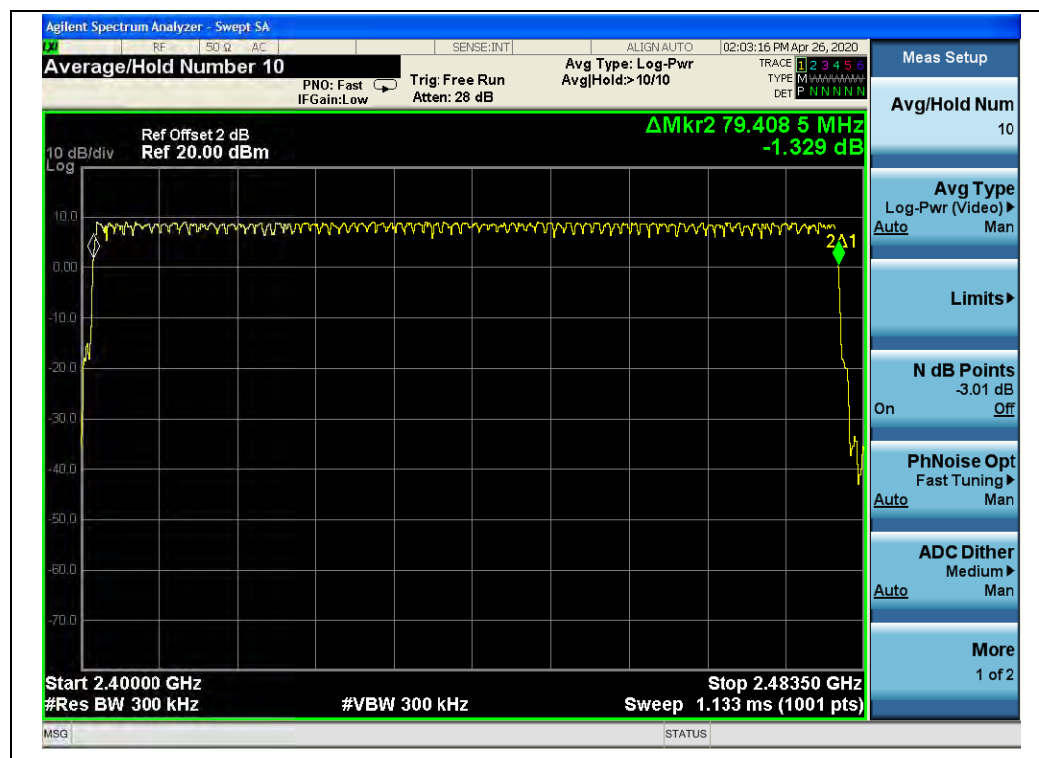 $(\pi/4\text{-DQPSK})$  (8- DPSK)

2.4. Duty Cycle Of Test Signal


2.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.4.2. Test Description

Test Setup:

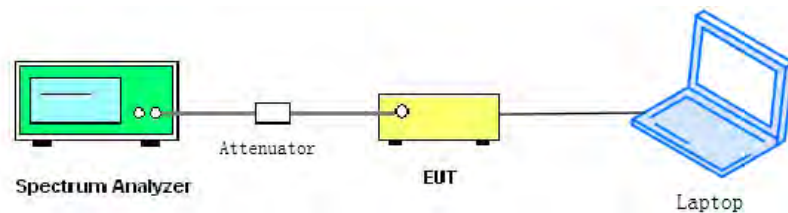

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

**2.4.3. Test Result****Left**

Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
GFSK	76.80	1.15
$\pi/4$ -DQPSK	77.20	1.12
8-DPSK	77.20	1.12

Right

Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
GFSK	76.80	1.15
$\pi/4$ -DQPSK	77.33	1.12
8-DPSK	77.33	1.12


2.5. Maximum Peak Conducted Output Power

2.5.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.5.2. Test Description

A. Test Setup:

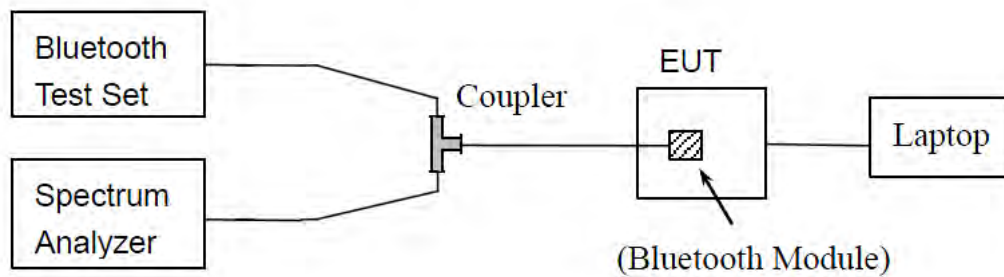

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.5.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module.


Left

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	9.72	0.009	20.96	0.125	PASS
39	2441	9.54	0.009			PASS
78	2480	9.37	0.009			PASS


B. Test Plots:

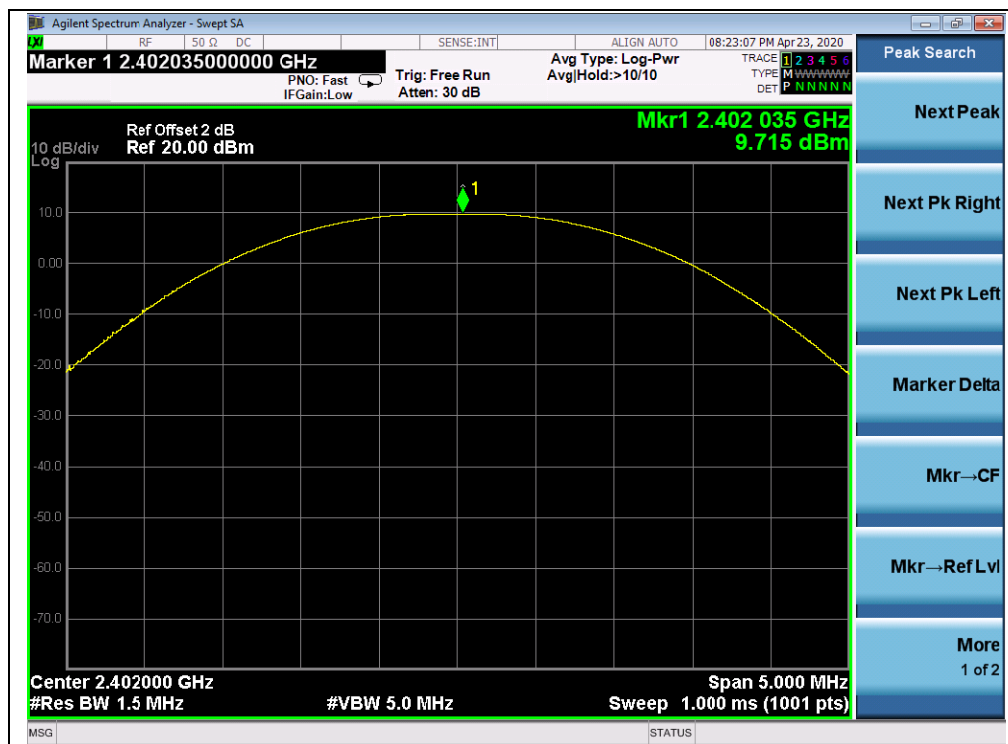

(GFSK, Channel 0, 2402MHz)

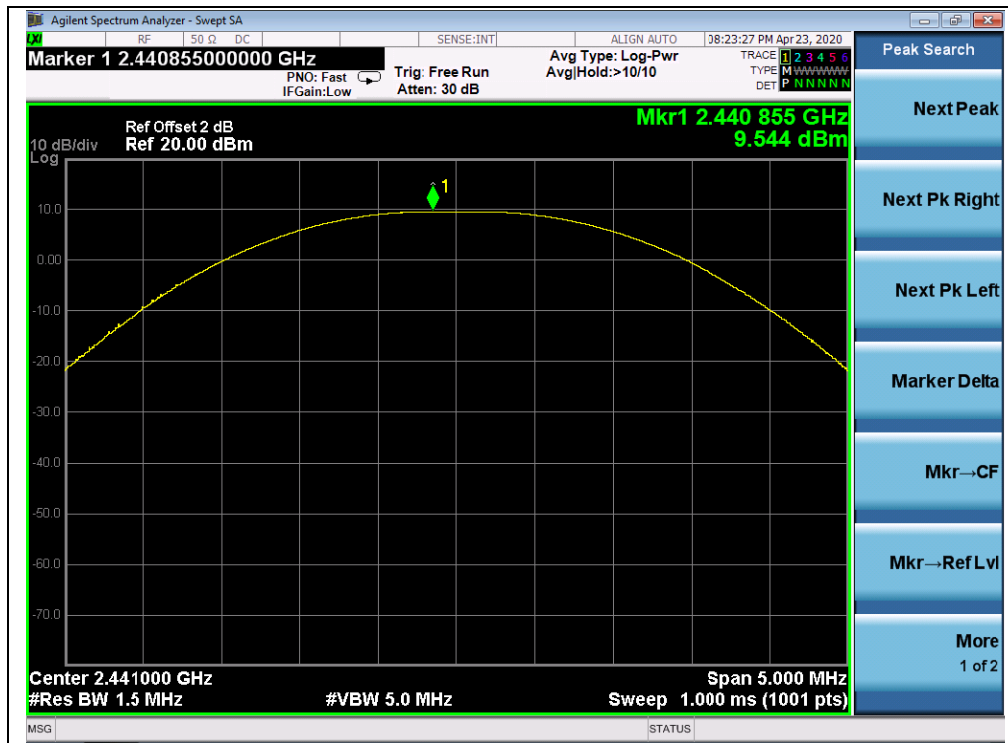

(GFSK, Channel 39, 2441MHz)

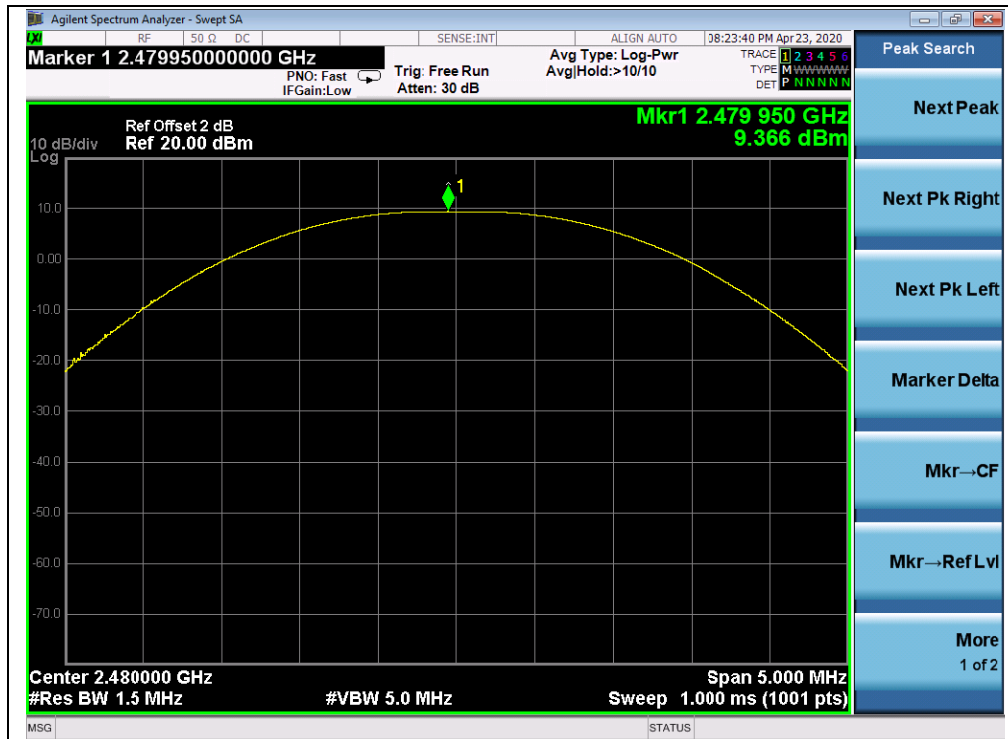

(GFSK, Channel 78, 2480MHz)




$\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	11.90	0.015	20.96	0.125	PASS
39	2441	11.85	0.015			PASS
78	2480	11.58	0.014			PASS


B. Test Plots:

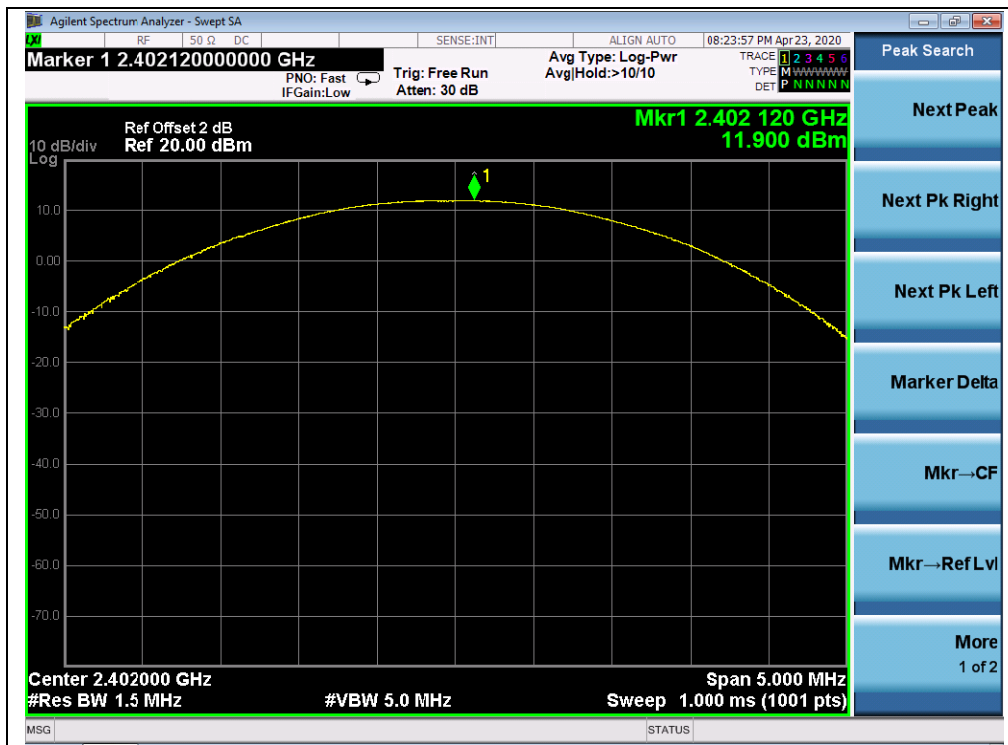

($\pi/4$ -DQPSK, Channel 0, 2402MHz)

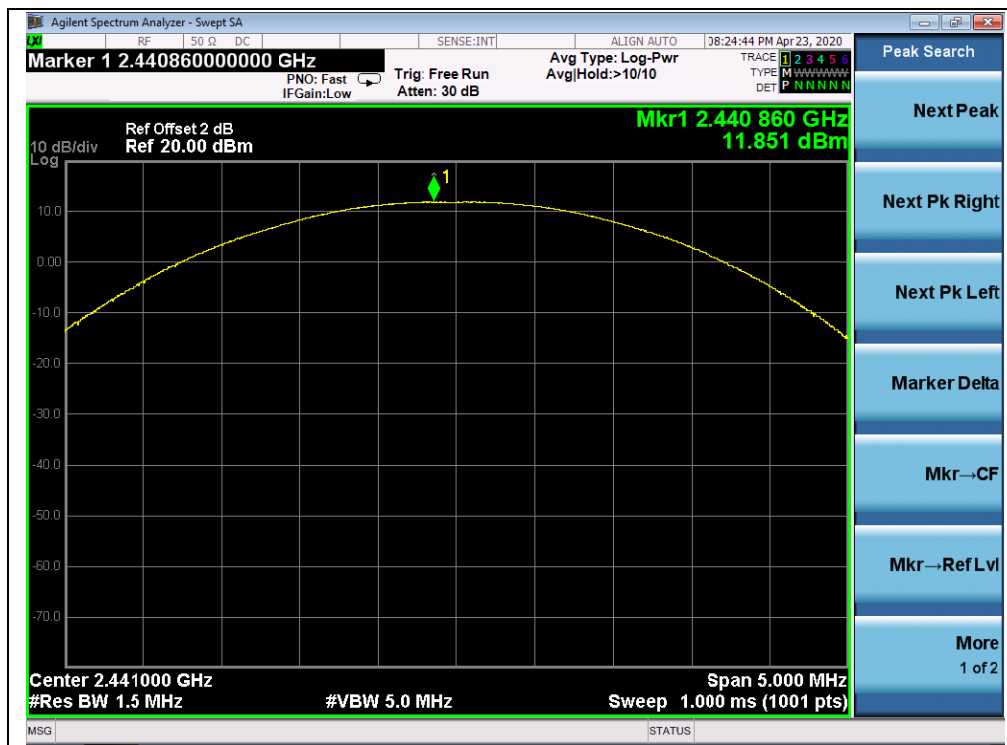

(π/4-DQPSK, Channel 39, 2441MHz)

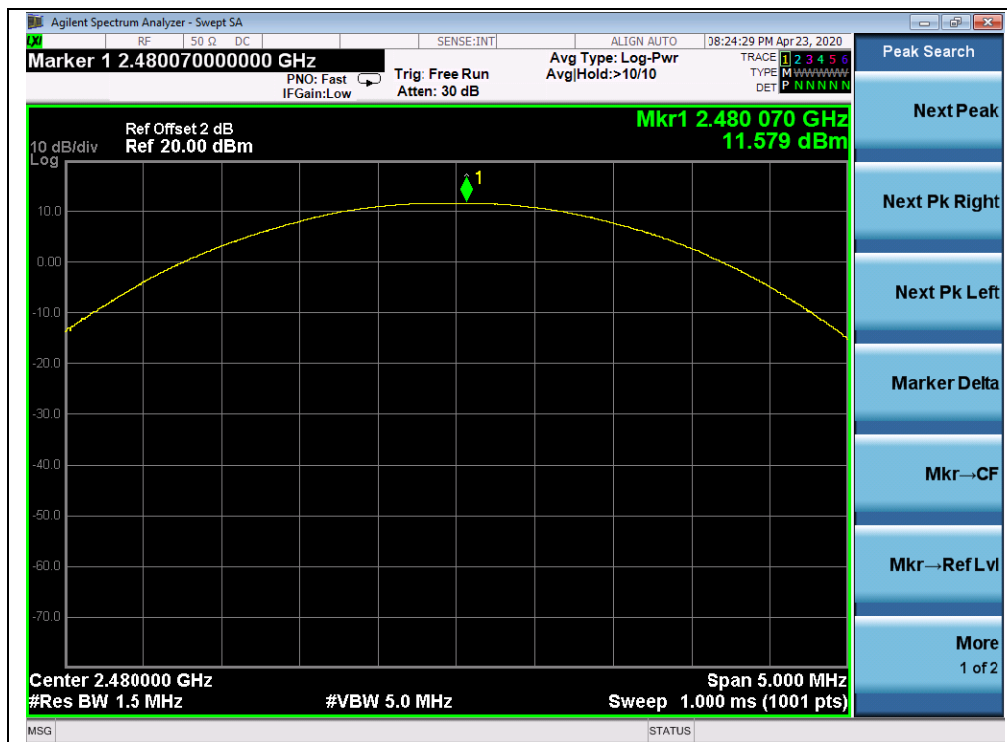

(π/4-DQPSK, Channel 78, 2480MHz)




8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	11.82	0.015	20.96	0.125	PASS
39	2441	11.91	0.016			PASS
78	2480	11.65	0.015			PASS


B. Test Plots:

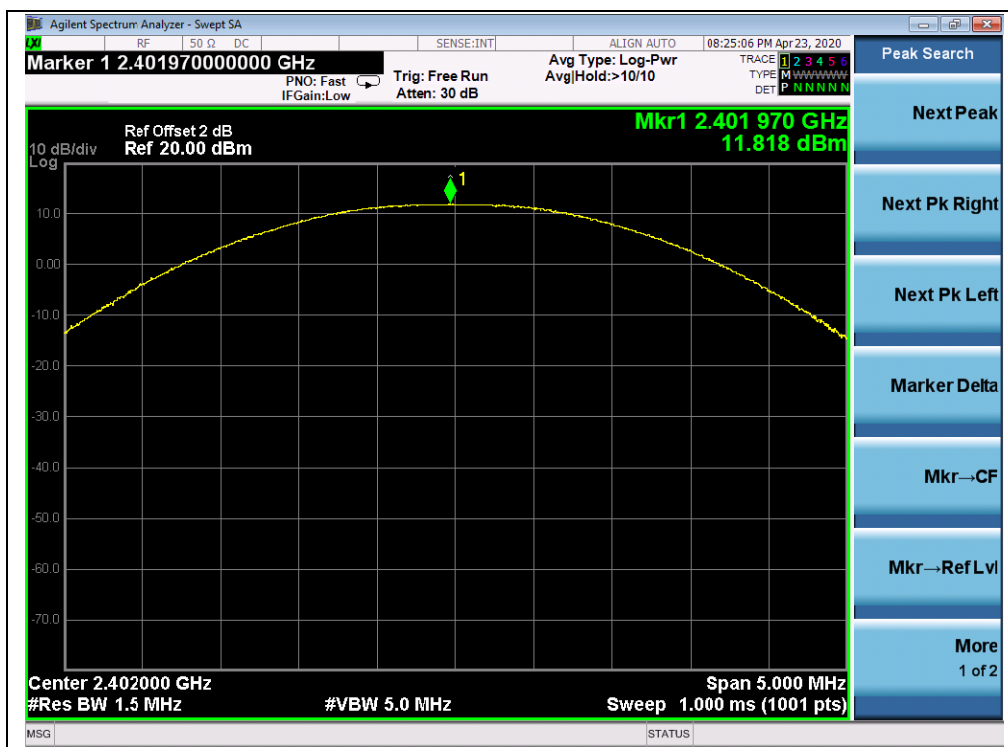

(8-DPSK, Channel 0, 2402MHz)

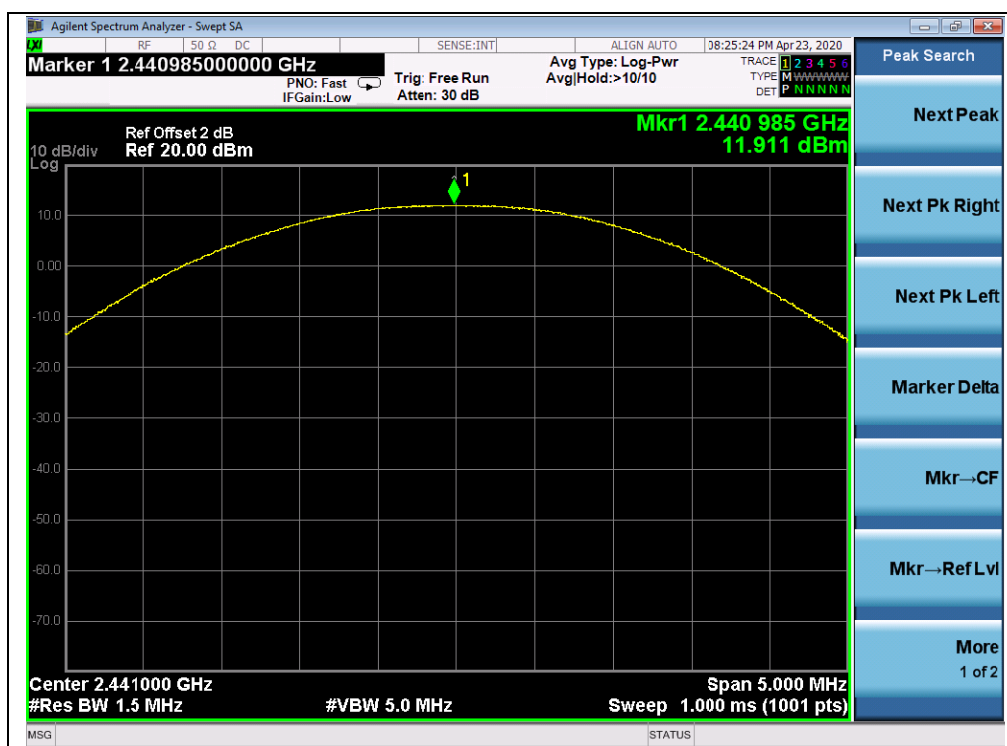

(8-DPSK, Channel 39, 2441MHz)

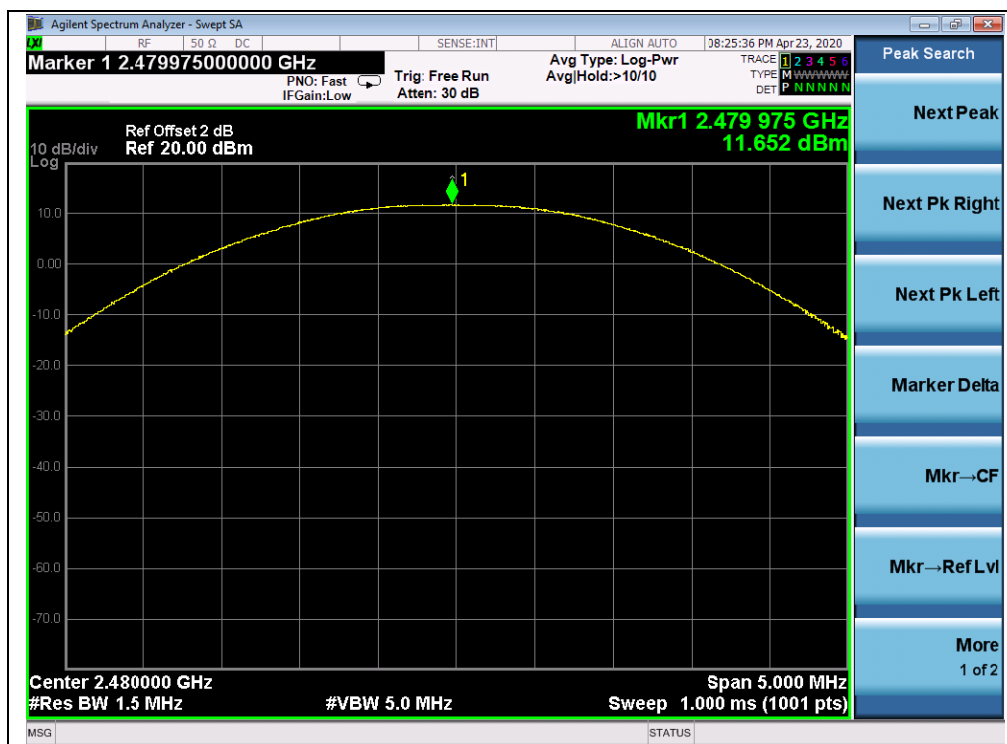

(8-DPSK, Channel 78, 2480MHz)




Right
GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	9.88	0.010	20.96	0.125	PASS
39	2441	9.85	0.010			PASS
78	2480	9.57	0.009			PASS


B. Test Plots:

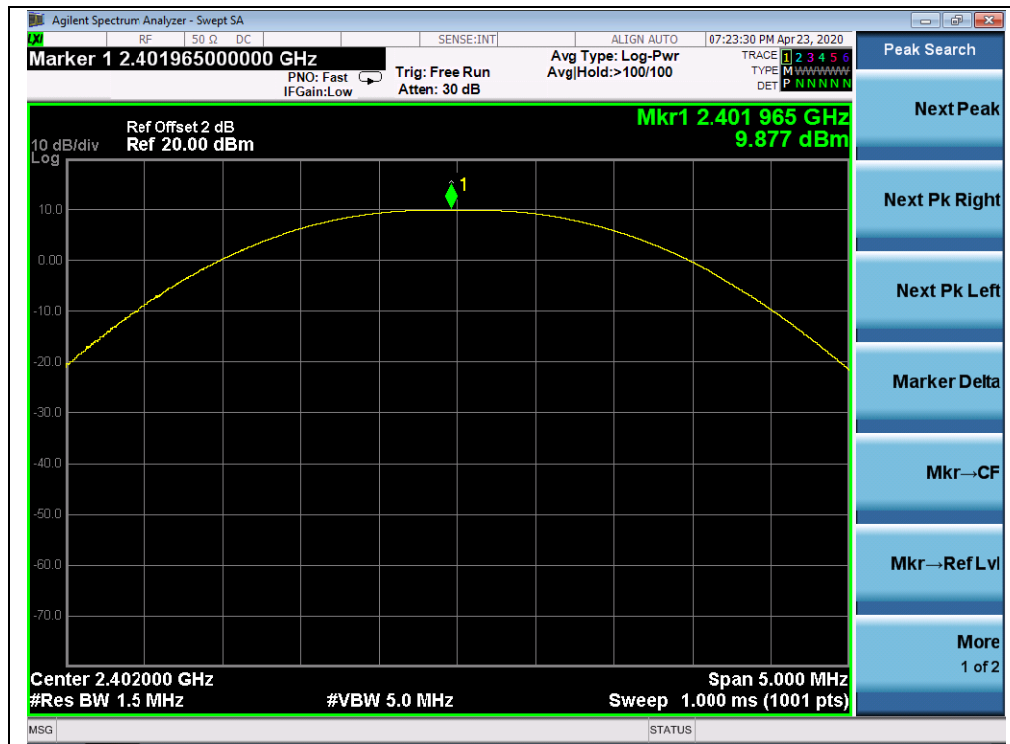

(GFSK, Channel 0, 2402MHz)

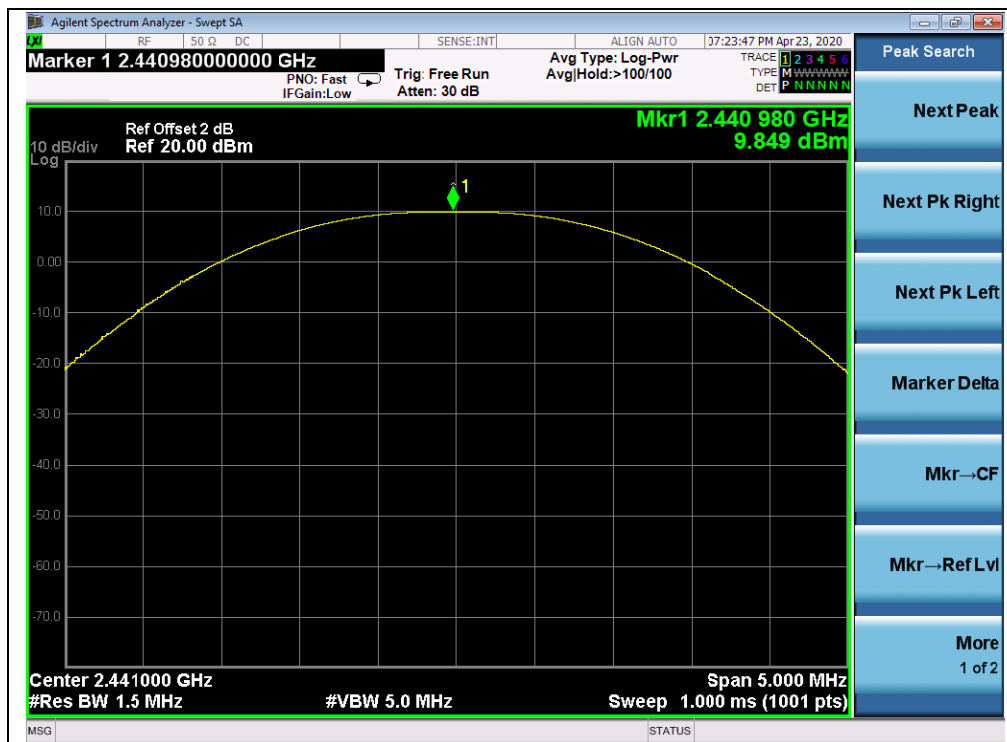

(GFSK, Channel 39, 2441MHz)

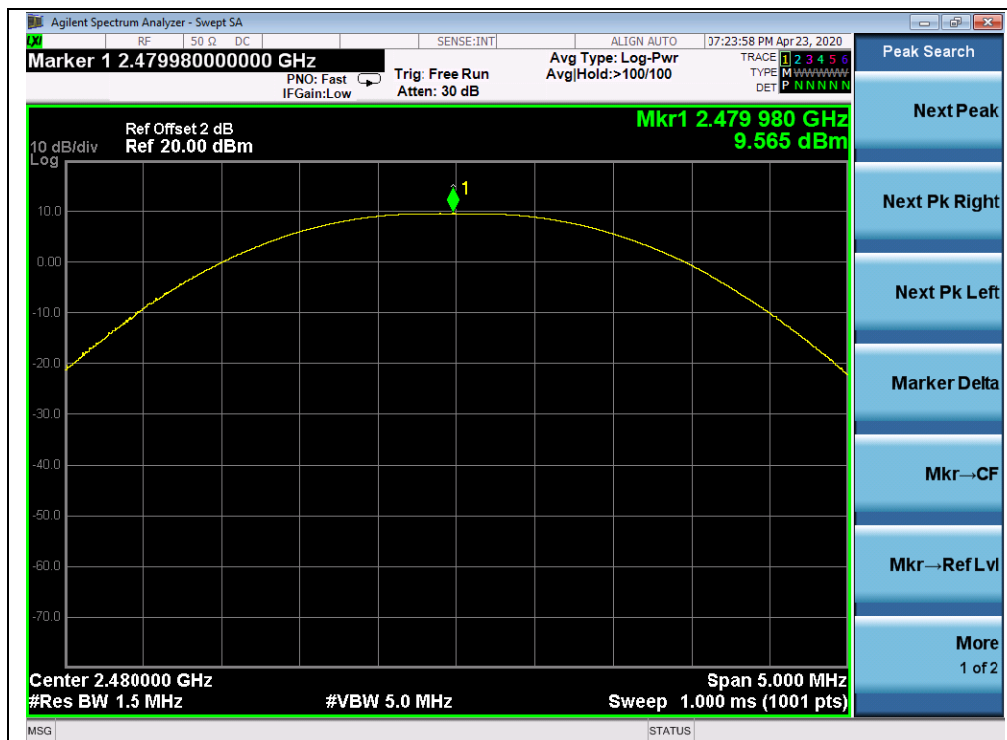

(GFSK, Channel 78, 2480MHz)




$\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	11.93	0.016	20.96	0.125	PASS
39	2441	11.97	0.016			PASS
78	2480	11.71	0.015			PASS


B. Test Plots:

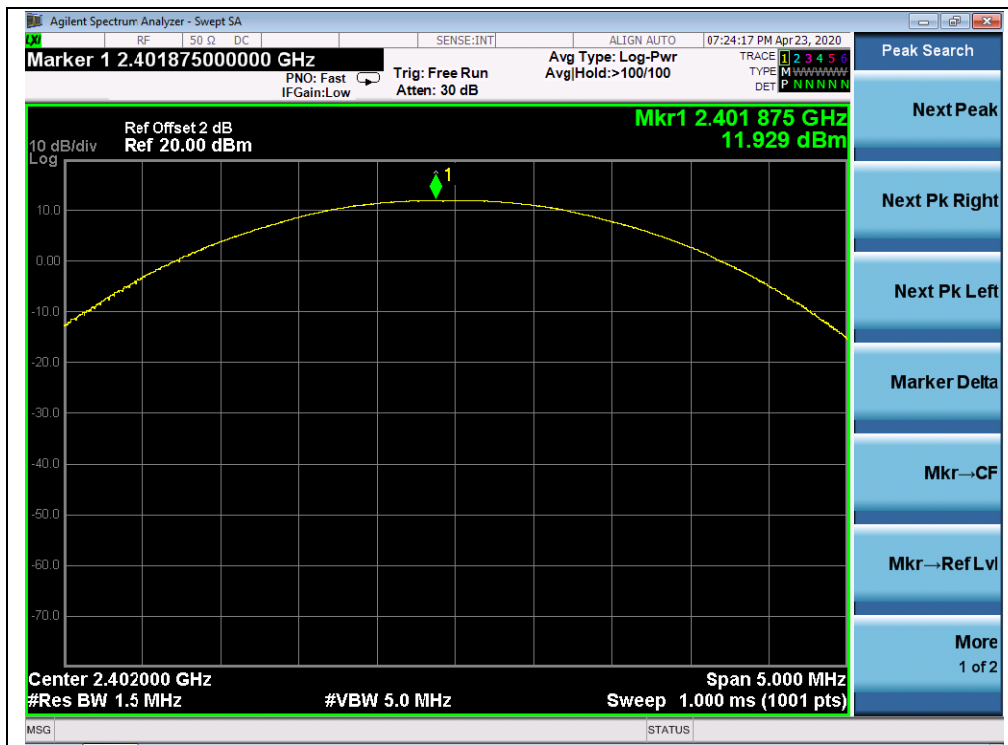

($\pi/4$ -DQPSK, Channel 0, 2402MHz)

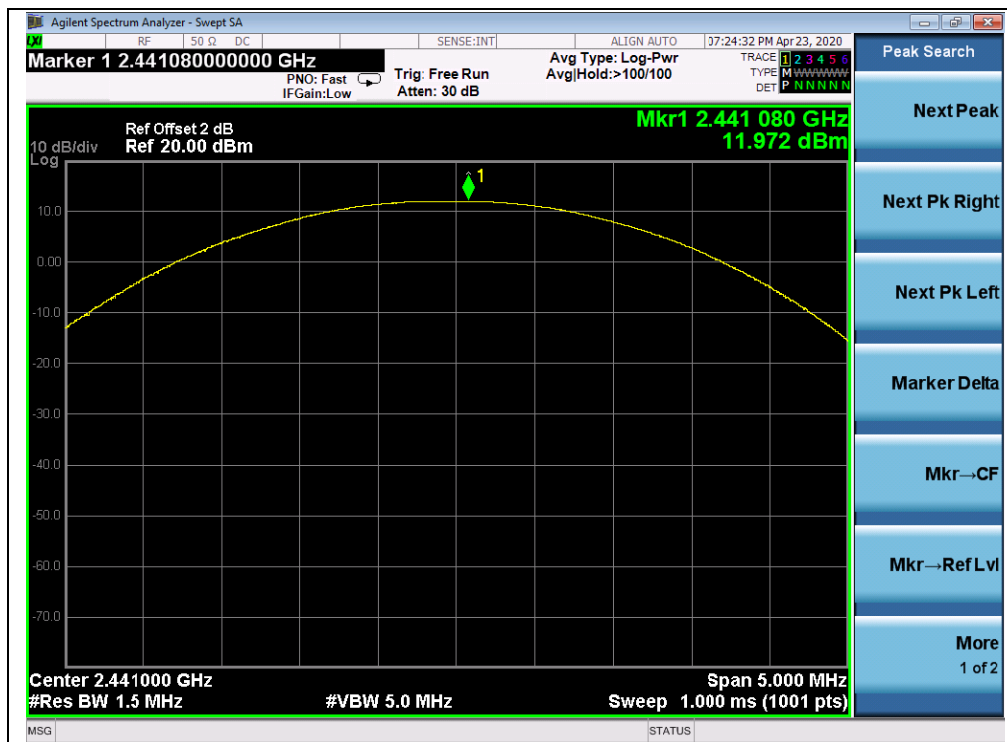

(π/4-DQPSK, Channel 39, 2441MHz)

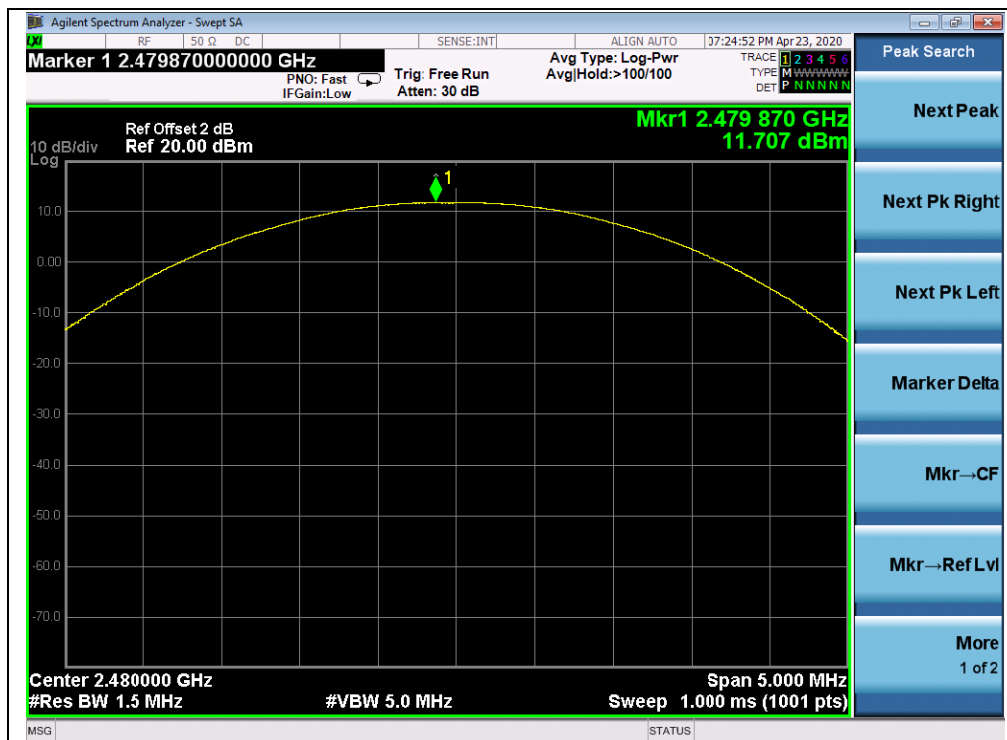

(π/4-DQPSK, Channel 78, 2480MHz)




8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	11.97	0.016	20.96	0.125	PASS
39	2441	12.04	0.016			PASS
78	2480	11.72	0.015			PASS


B. Test Plots:

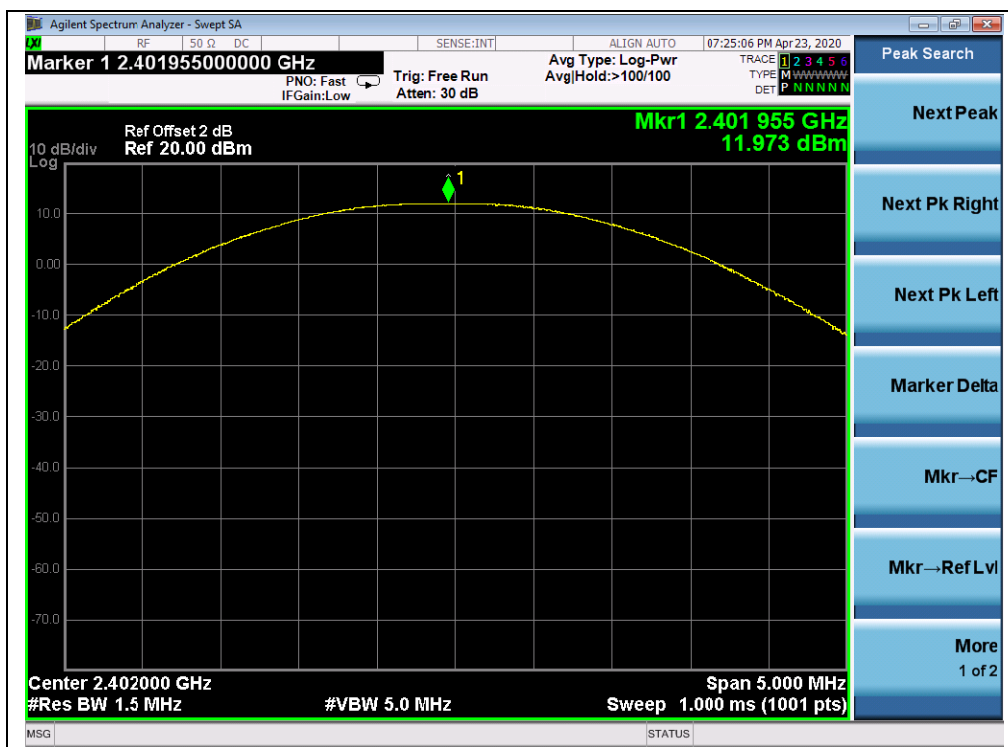

(8-DPSK, Channel 0, 2402MHz)

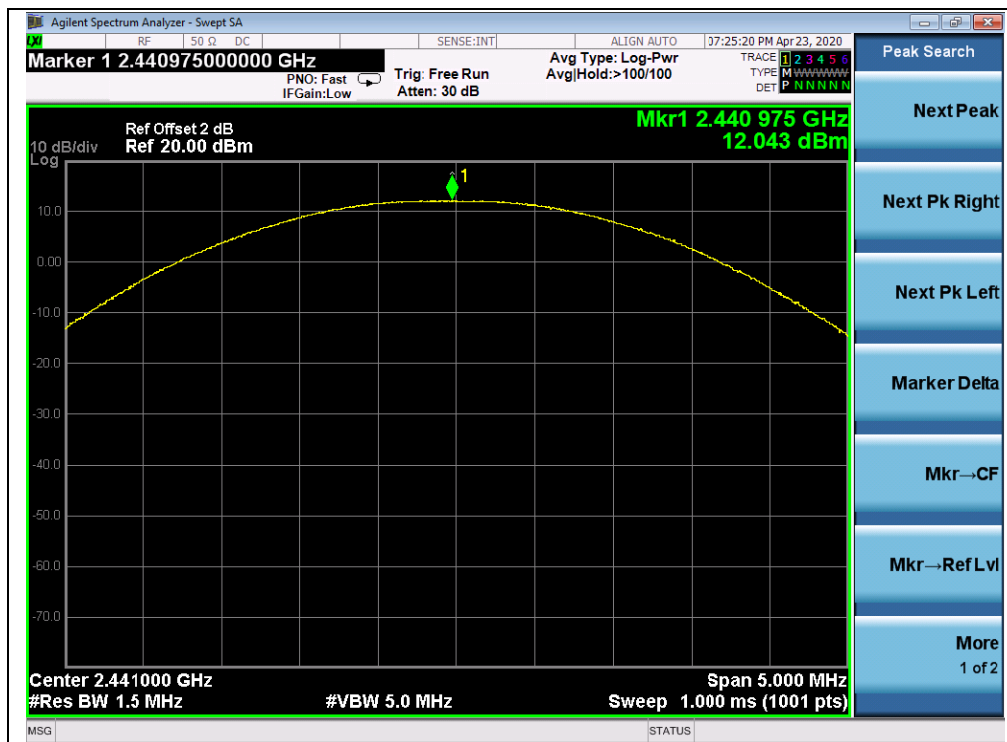

(8-DPSK, Channel 39, 2441MHz)

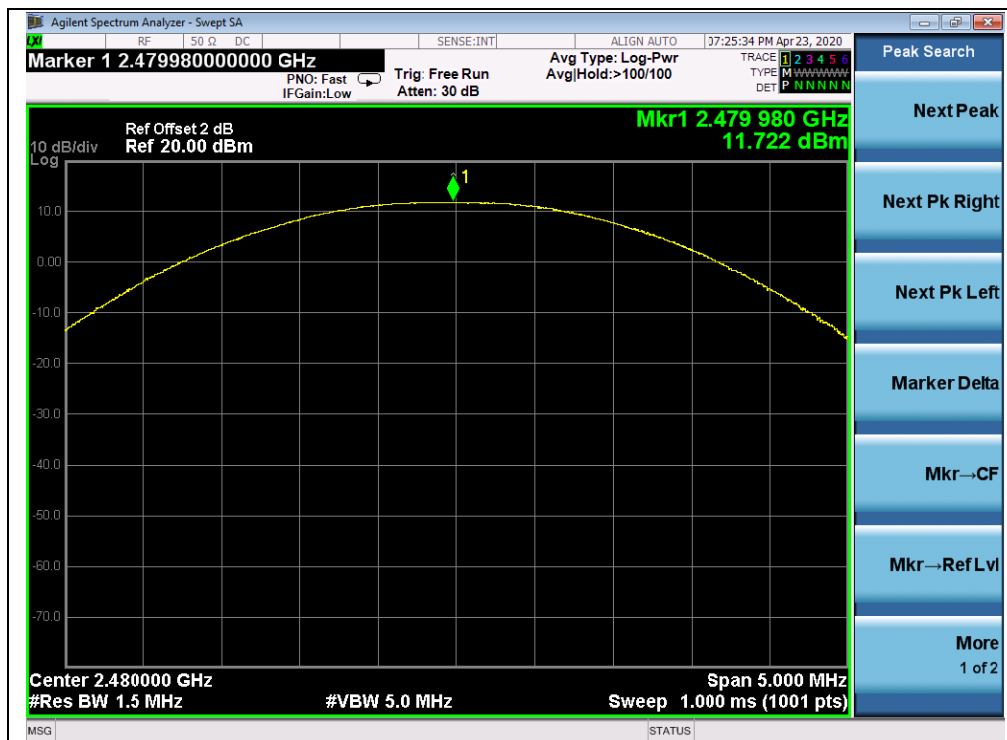

(8-DPSK, Channel 78, 2480MHz)

2.6. Maximum Average Conducted Output Power


2.6.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

2.6.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

Test Setup:

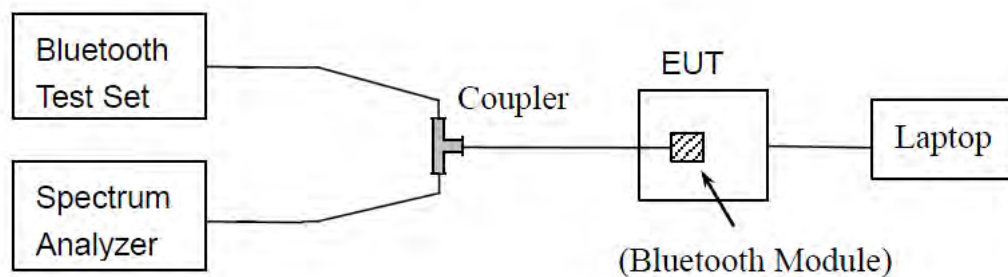

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.6.3. Test procedure

KDB 558074 Section 8.3.2 was used in order to prove compliance.

2.6.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module.

Left

GFSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	
0	2402	8.33	1.15	9.48	0.009	20.96	0.125	PASS
39	2441	8.26		9.41	0.009			PASS
78	2480	8.09		9.24	0.008			PASS

$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	
0	2402	8.10	1.12	9.22	0.008	20.96	0.125	PASS
39	2441	8.27		9.39	0.009			PASS
78	2480	8.03		9.15	0.008			PASS

8-DPSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	dBm
0	2402	8.14	1.12	9.26	0.008	20.96	0.125	PASS
39	2441	8.34		9.46	0.009			PASS
78	2480	7.99		9.11	0.008			PASS



Right

GFSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	dBm
0	2402	8.43	1.15	9.58	0.009	20.96	0.125	PASS
39	2441	8.60		9.75	0.009			PASS
78	2480	8.41		9.56	0.009			PASS

 $\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	dBm
0	2402	8.13	1.12	9.25	0.008	20.96	0.125	PASS
39	2441	8.25		9.37	0.009			PASS
78	2480	7.89		9.01	0.008			PASS

8-DPSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	dBm
0	2402	8.08	1.12	9.20	0.008	20.96	0.125	PASS
39	2441	7.93		9.05	0.008			PASS
78	2480	9.01		10.13	0.010			PASS


2.7.20dB Bandwidth

2.7.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.7.2. Test Description

Test Setup:

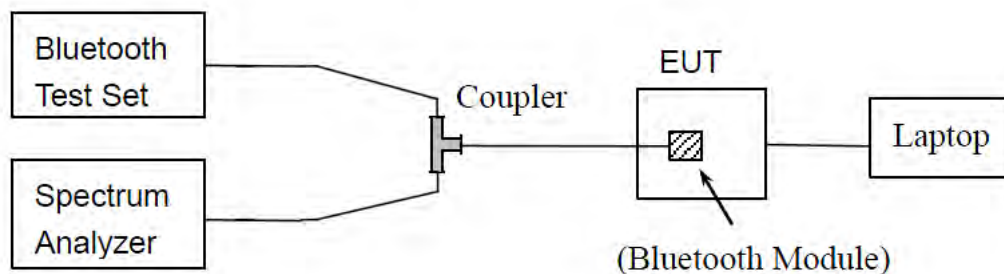

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

Left

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	0.960	PASS
39	2441	0.959	PASS
78	2480	0.957	PASS

B. Test Plots:



(GFSK, Channel 0, 2402MHz)



(GFSK, Channel 39, 2441MHz)



(GFSK, Channel 78, 2480MHz)

 $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.344	PASS
39	2441	1.351	PASS
78	2480	1.344	PASS

B. Test Plots:



(π/4-DQPSK, Channel 0, 2402MHz)



(π/4-DQPSK, Channel 39, 2441MHz)



(π/4-DQPSK, Channel 78, 2480MHz)



8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.333	PASS
39	2441	1.340	PASS
78	2480	1.339	PASS

B. Test Plots:



(8-DPSK, Channel 0, 2402MHz)



(8-DPSK, Channel 39, 2441MHz)



(8-DPSK, Channel 78, 2480MHz)



Right
GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	0.962	PASS
39	2441	0.960	PASS
78	2480	0.960	PASS

B. Test Plots:



(GFSK, Channel 0, 2402MHz)



(GFSK, Channel 39, 2441MHz)



(GFSK, Channel 78, 2480MHz)

 $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.349	PASS
39	2441	1.347	PASS
78	2480	1.342	PASS

B. Test Plots:



(π/4-DQPSK, Channel 0, 2402MHz)



(π/4-DQPSK, Channel 39, 2441MHz)



(π/4-DQPSK, Channel 78, 2480MHz)



8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.318	PASS
39	2441	1.317	PASS
78	2480	1.318	PASS

B. Test Plots:



(8-DPSK, Channel 0, 2402MHz)



(8-DPSK, Channel 39, 2441MHz)



(8-DPSK, Channel 78, 2480MHz)


2.8. Carried Frequency Separation

2.8.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.8.2. Test Description

Test Setup:

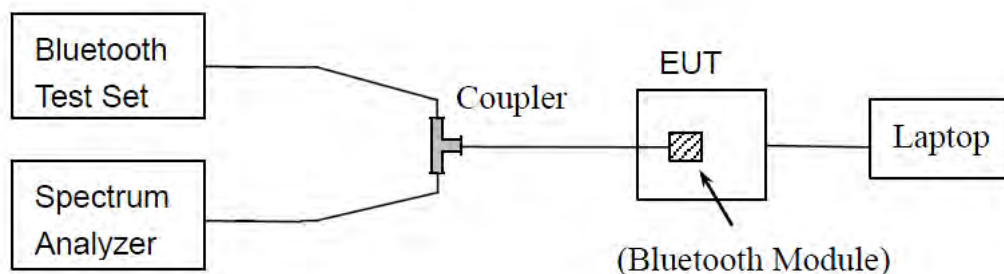

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.8.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


2.8.4. Test Result

The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed below), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING.


Left

Test Mode	Measured Channel Numbers	Carried Frequency Separation	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	0.948	0.960	two-thirds of the 20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	0.963	1.351		PASS
8-DPSK	39 and 40	1.002	1.340		PASS

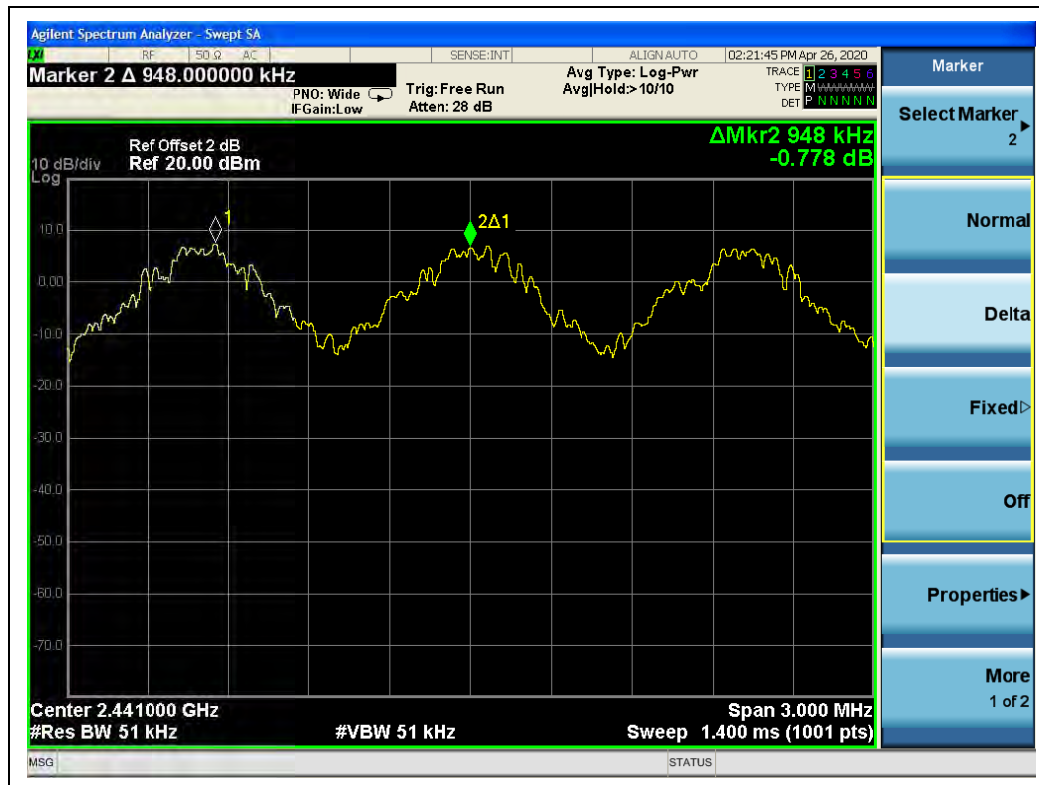

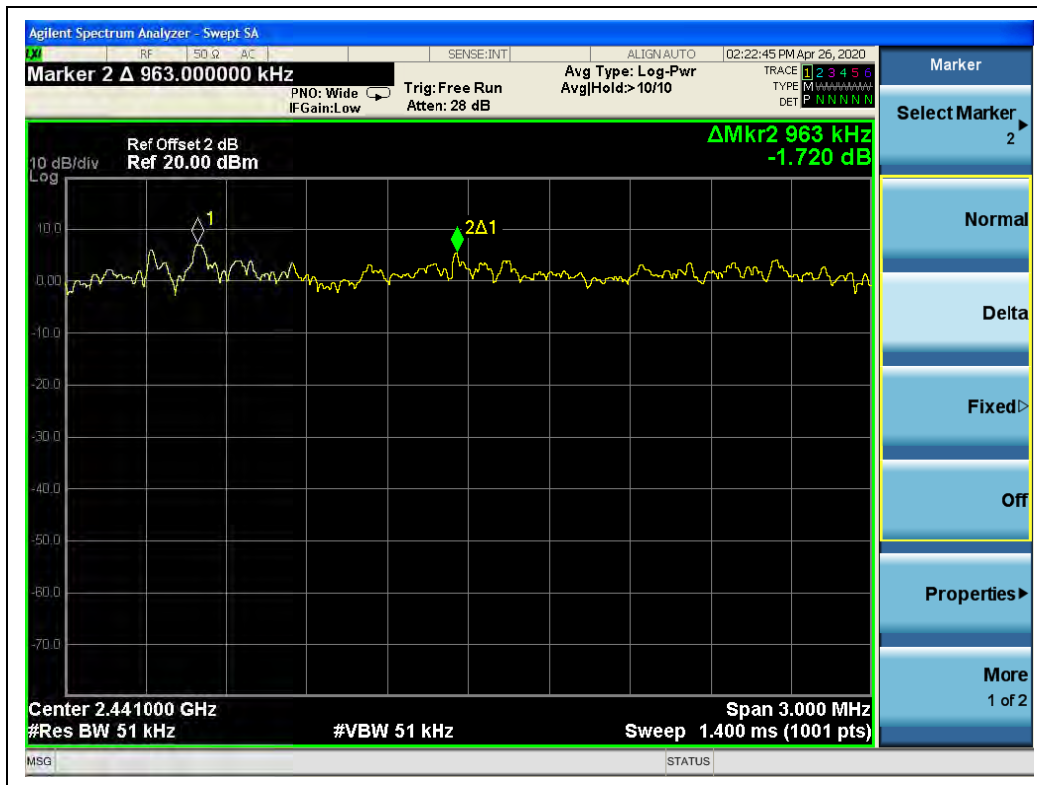

($\pi/4$ -DQPSK)

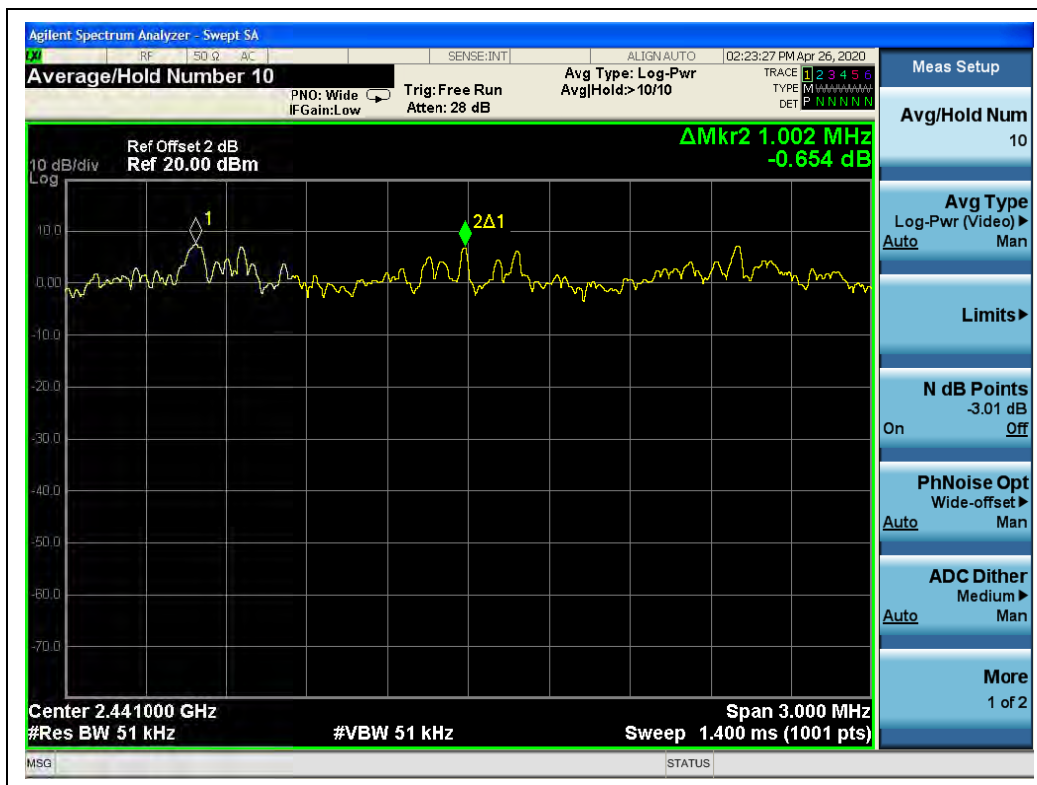

(8-DPSK)





Right

Test Mode	Measured Channel Numbers	Carried Frequency Separation	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.014	0.962	two-thirds of the 20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	0.999	1.349		PASS
8-DPSK	39 and 40	1.011	1.318		PASS



(GFSK)

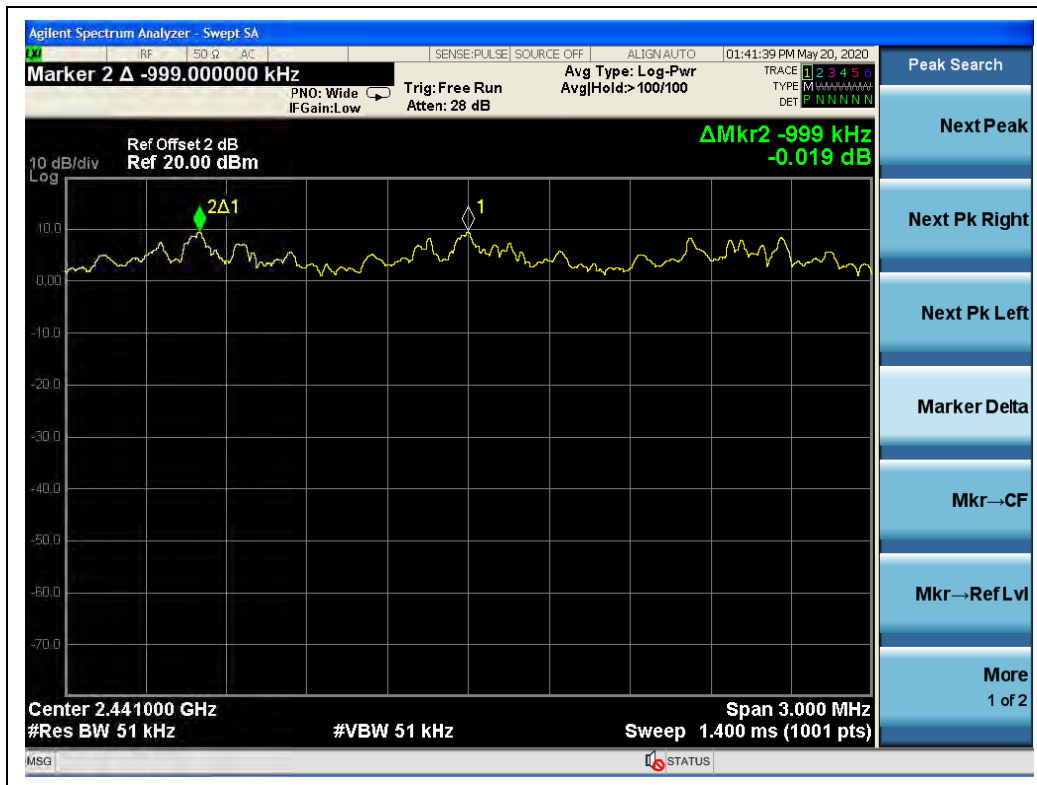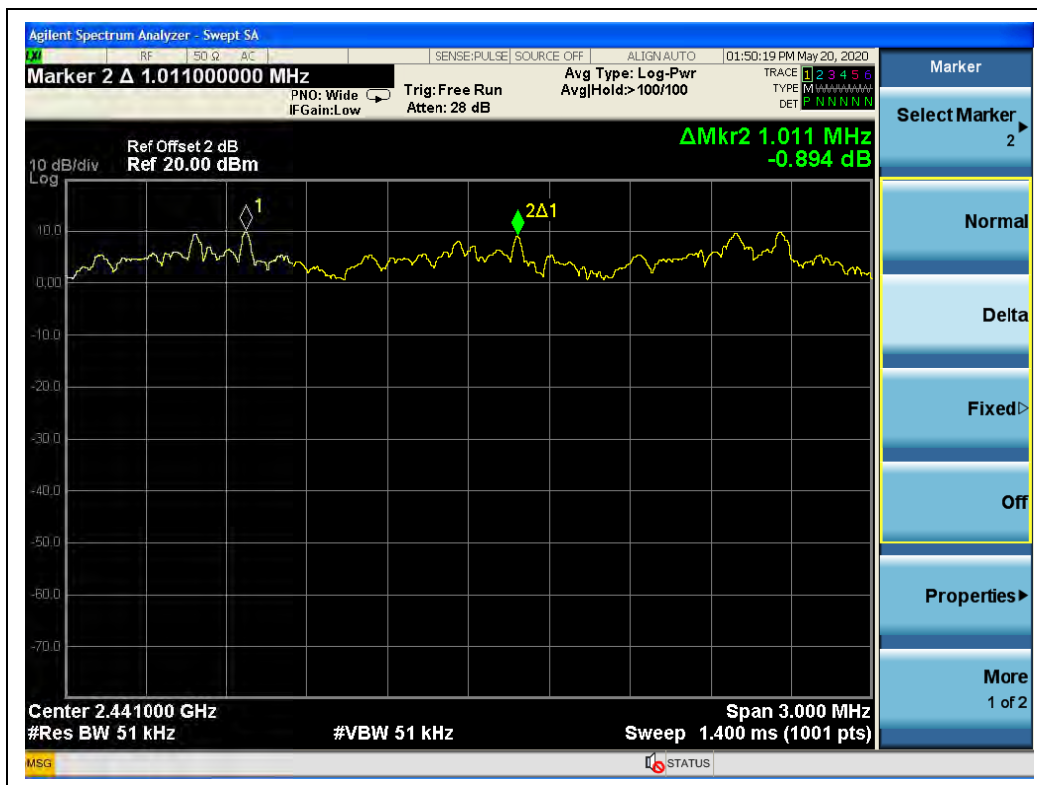
 $(\pi/4\text{-DQPSK})$

 (8-DPSK)


2.9. Time of Occupancy (Dwell time)

2.9.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.9.2. Test Description

Test Setup:

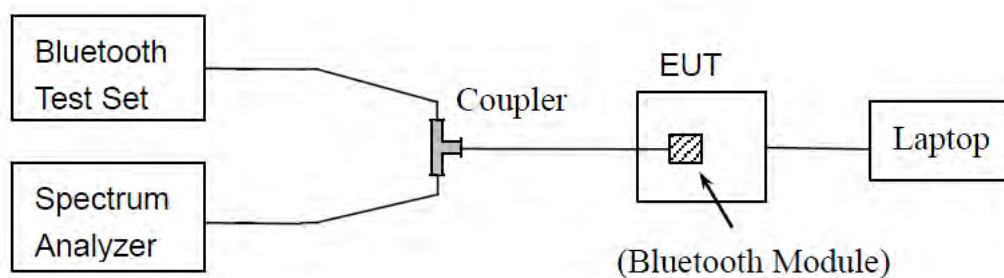

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.9.3. Test Procedure

Option 1:

DH1: Dwell time equal to Pulse time (ms) * (1600 / 2 / 79) * 31.6 Millisecond
DH3: Dwell time equal to Pulse time (ms) * (1600 / 4 / 79) * 31.6 Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (1600 / 6 / 79) * 31.6 Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) * (800 / 2 / 20) * (0.4 * 20) Millisecond
DH3: Dwell time equal to Pulse time (ms) * (800 / 4 / 20) * (0.4 * 20) Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (800 / 6 / 20) * (0.4 * 20) Millisecond



2.9.4. Test Result


Left

GFSK Mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.380	121.60	60.80	0.4	PASS
DH3	1.620	259.20	129.60		PASS
DH5	2.880	307.20	153.60		PASS


B. Test Plots:

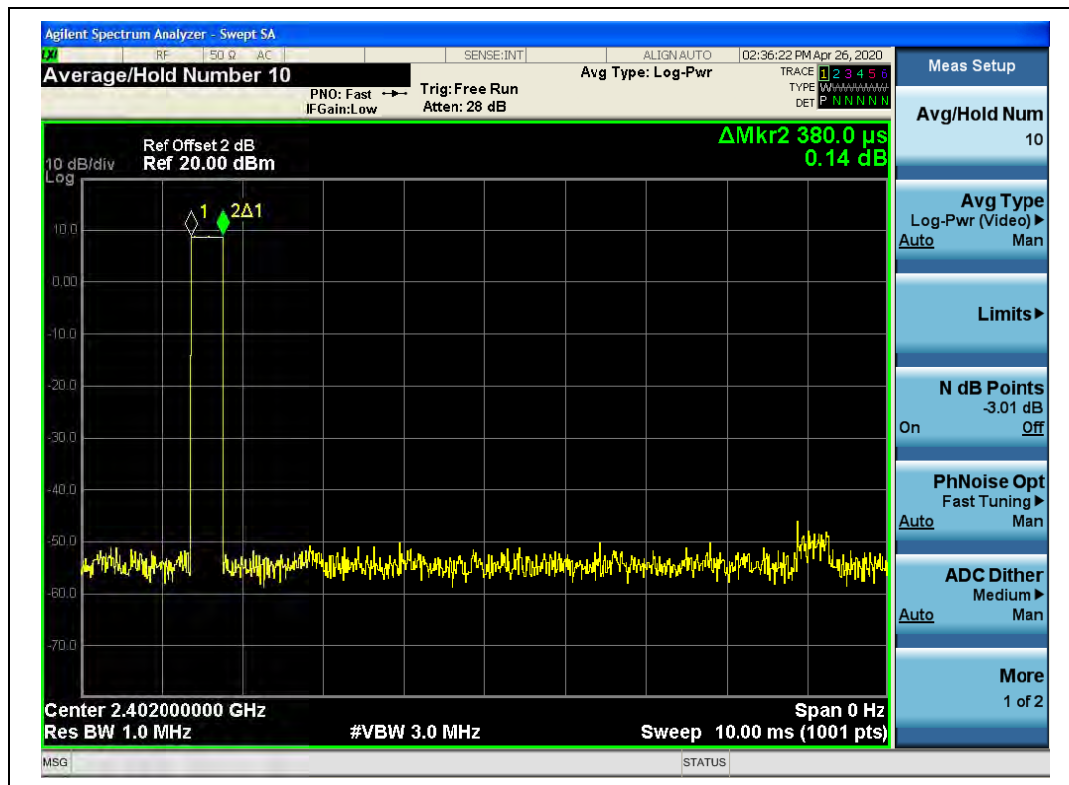

(DH1, GFSK)

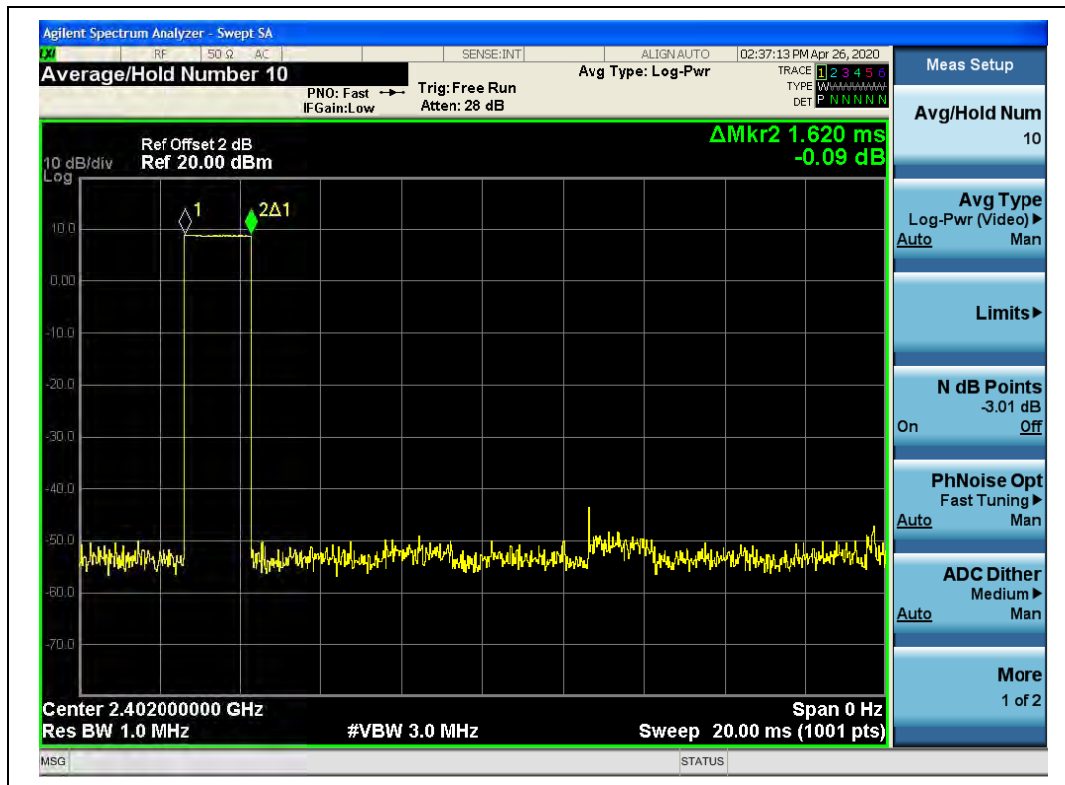

(DH3, GFSK)

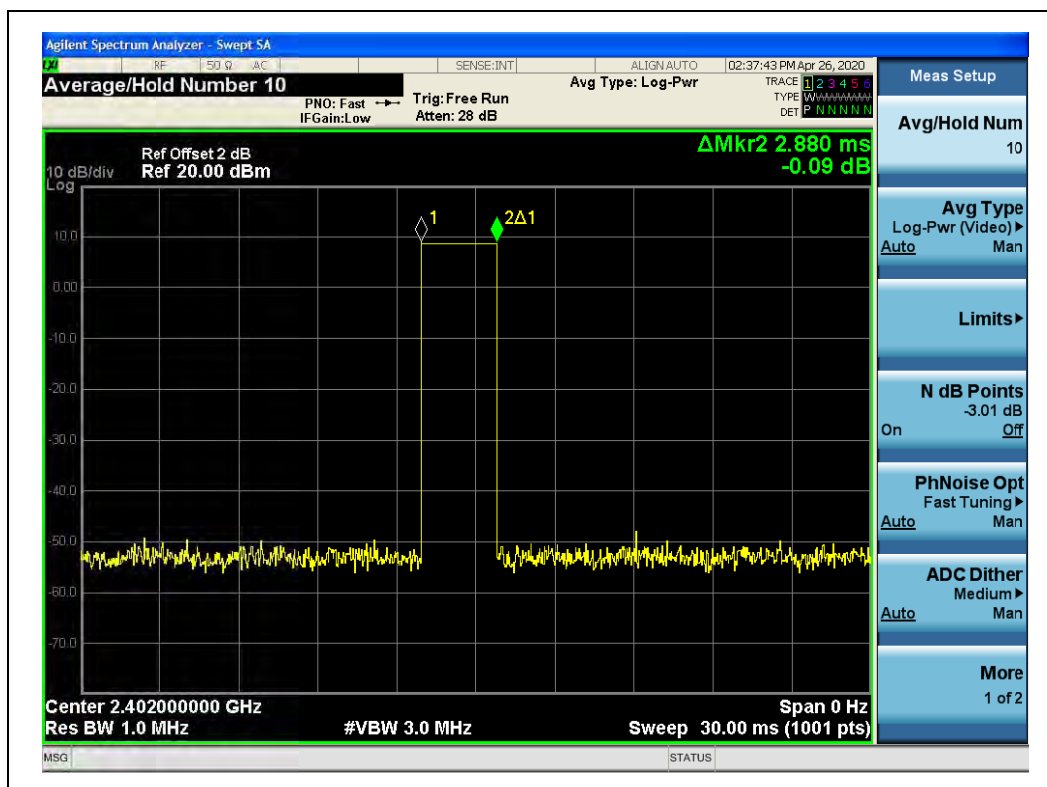

(DH5, GFSK)






$\pi/4$ -DQPSK Mode

A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.390	124.80	62.40	0.4	PASS
DH3	1.640	262.40	131.20		PASS
DH5	2.880	307.20	153.60		PASS

B. Test Plots:

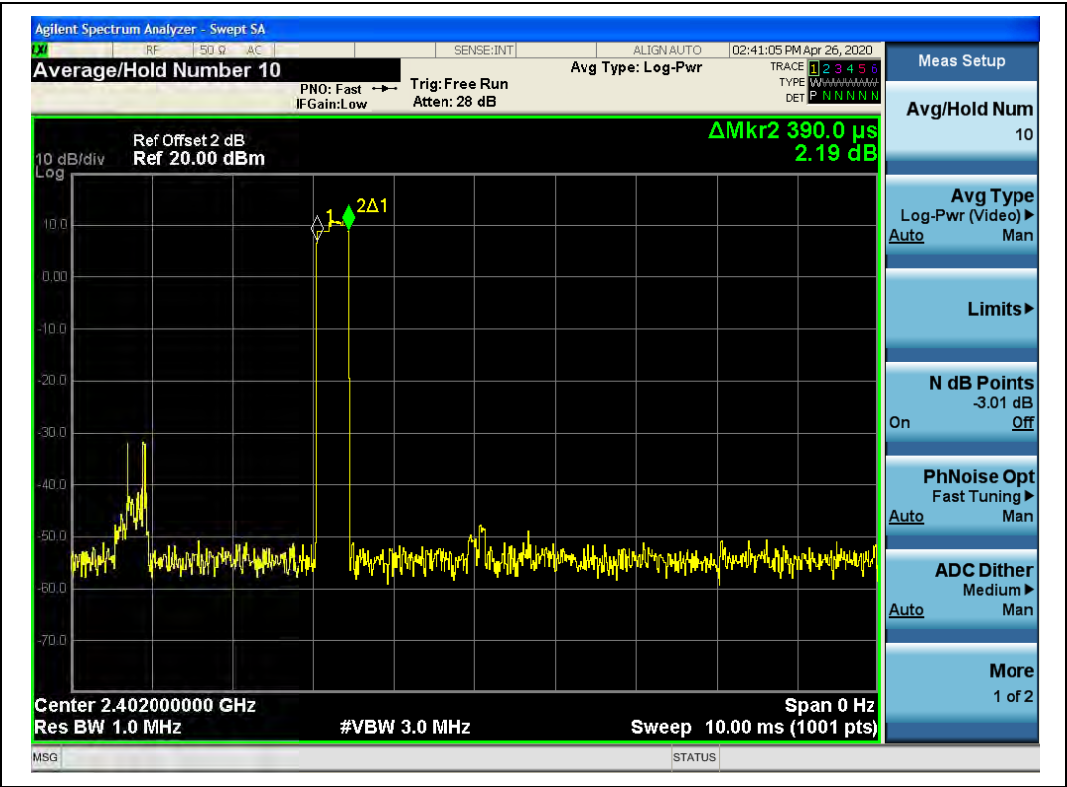(DH1, $\pi/4$ -DQPSK)

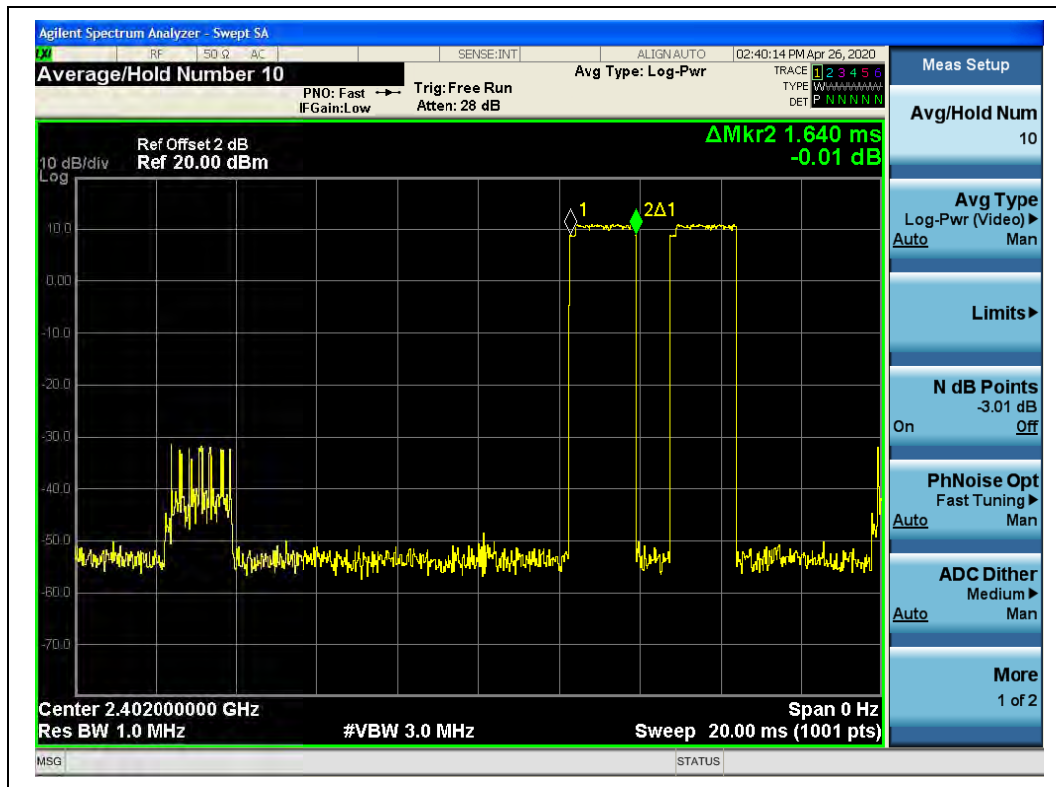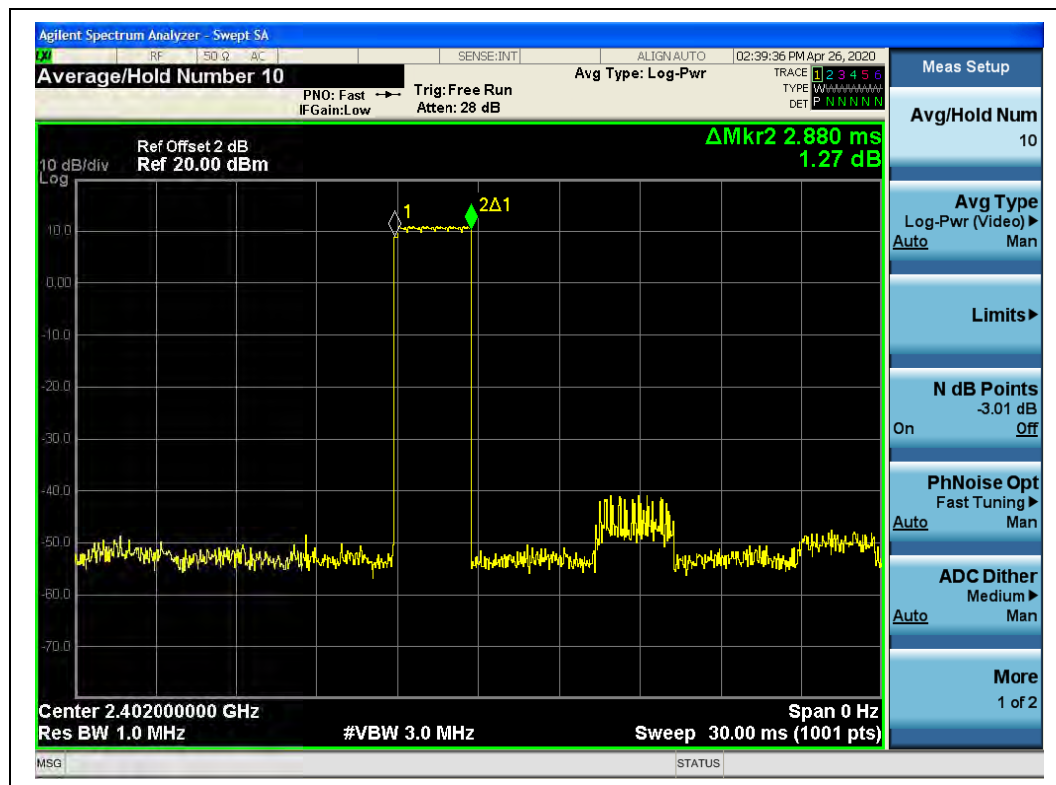
(DH3, $\pi/4$ -DQPSK)

(DH5, $\pi/4$ -DQPSK)




8-DPSK mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.390	124.80	62.40	0.4	PASS
DH3	1.620	259.20	129.60		PASS
DH5	2.880	307.20	153.60		PASS


B. Test Plots:

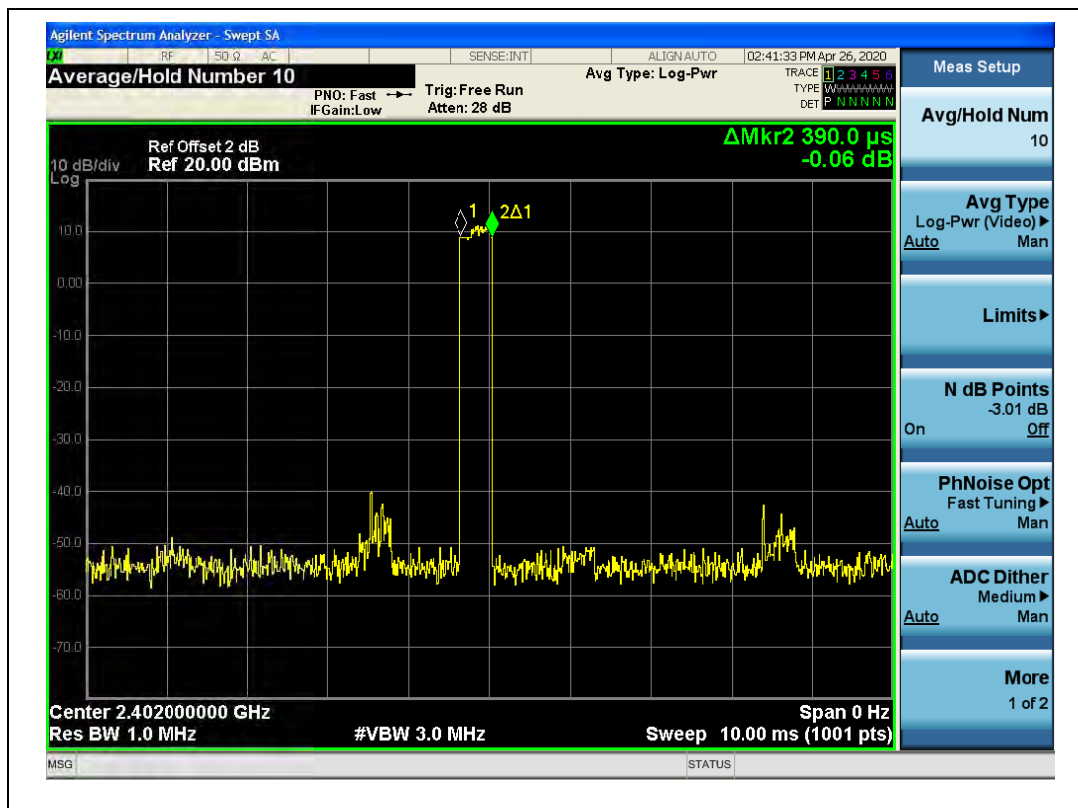

(DH1, 8-DPSK)

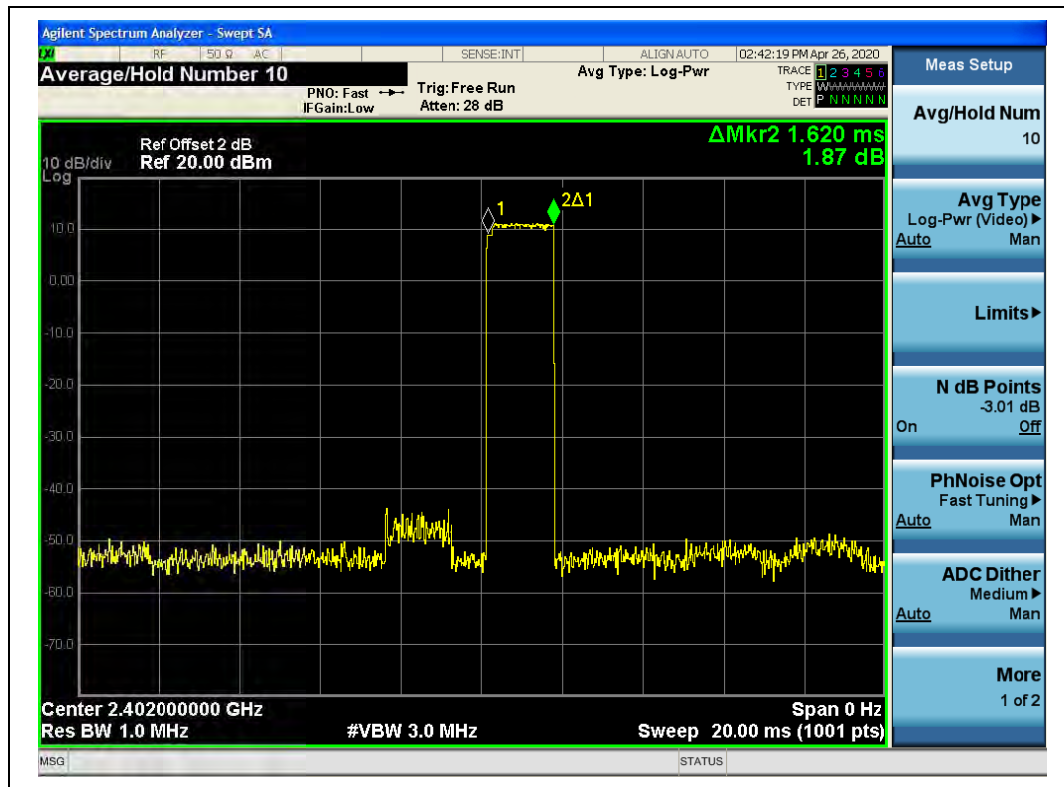

(DH3, 8-DPSK)

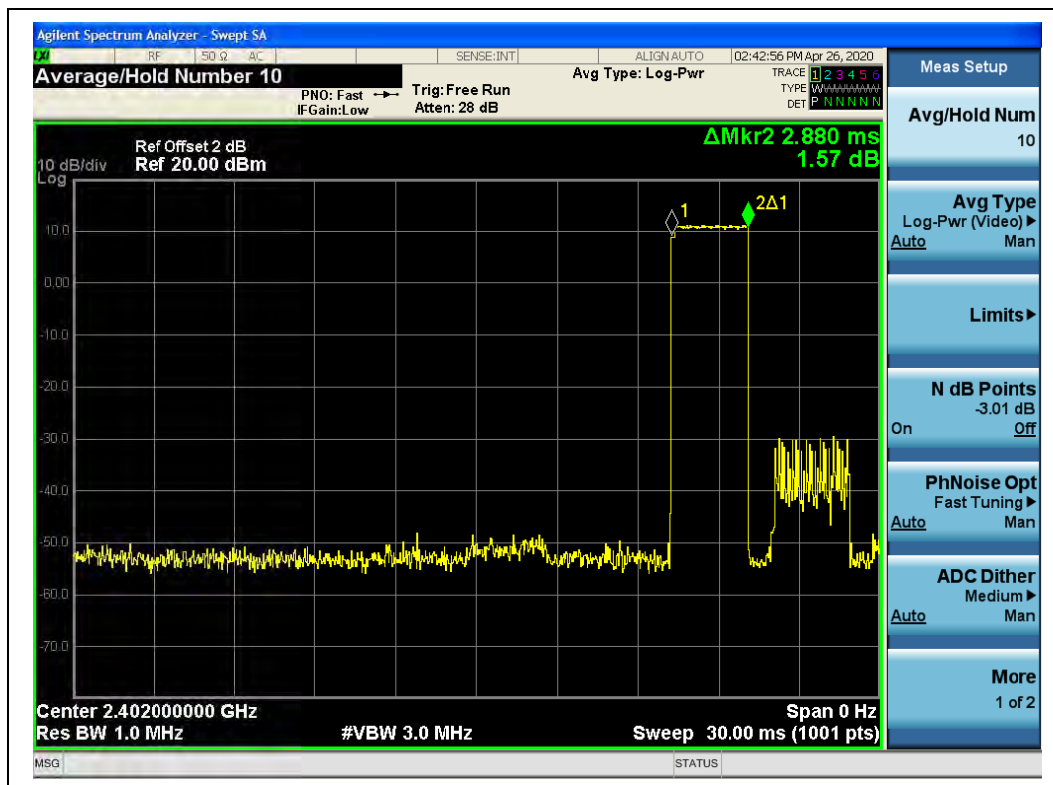

(DH5, 8-DPSK)




GFSK Mode

A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.380	121.60	60.80	0.4	PASS
DH3	1.640	262.40	131.20		PASS
DH5	2.880	307.20	153.60		PASS


B. Test Plots:

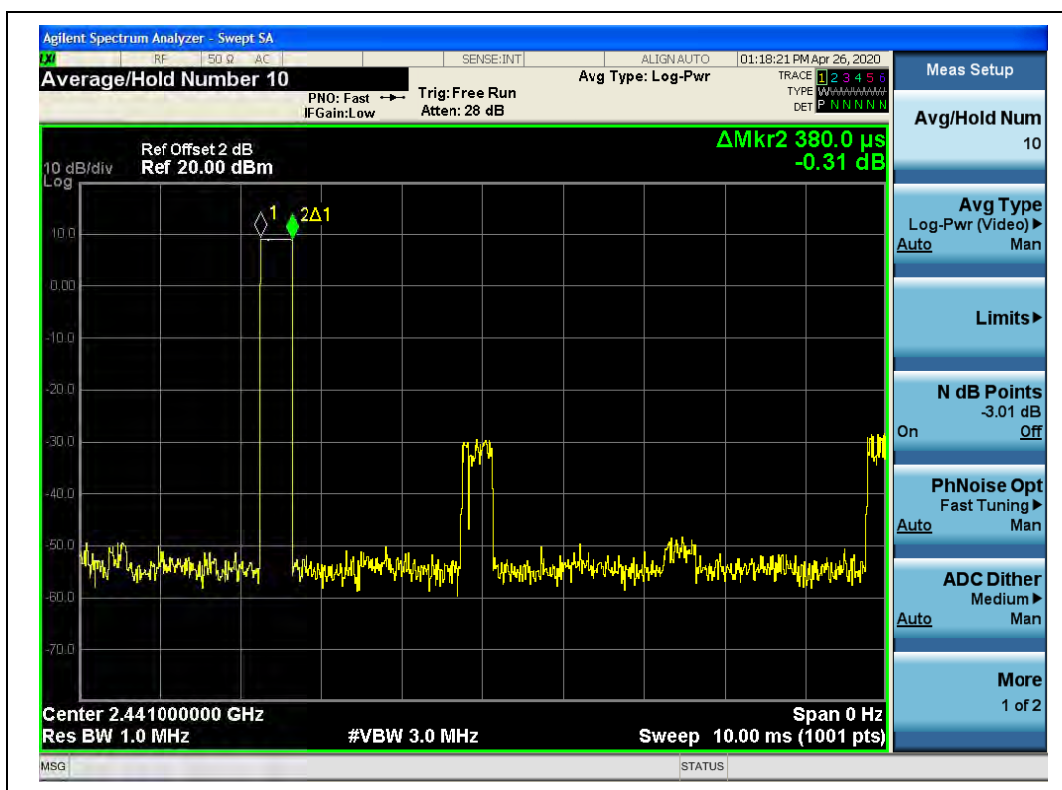

(DH1, GFSK)



(DH3, GFSK)

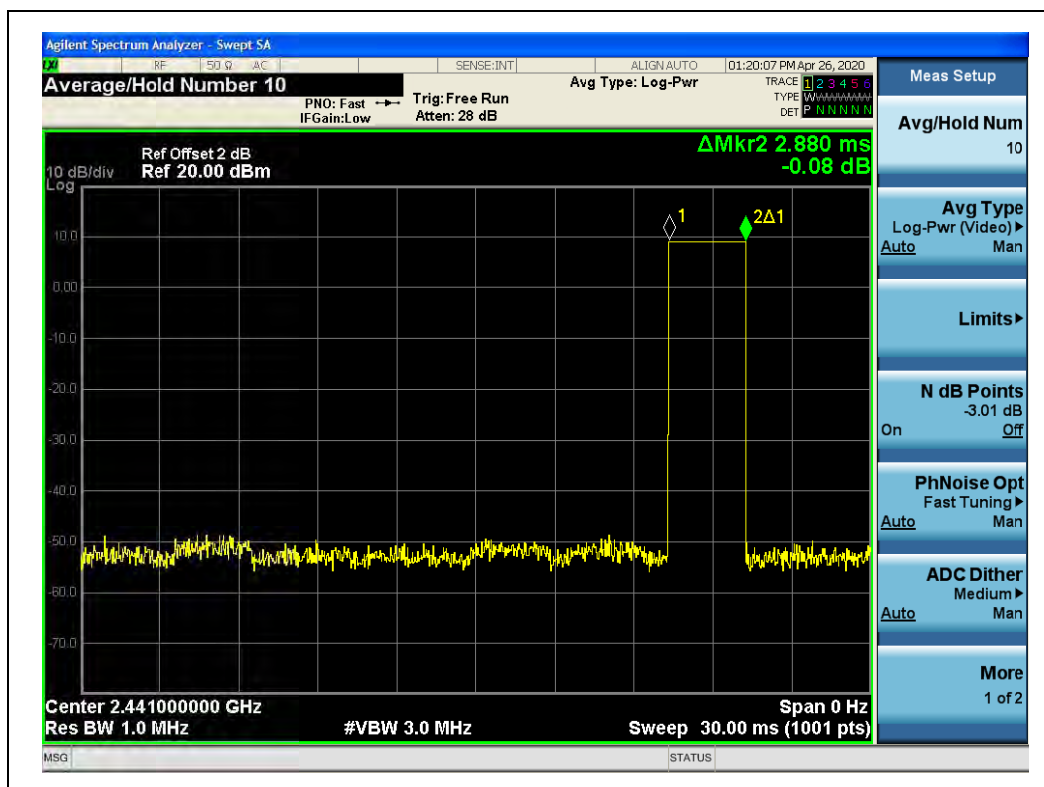

(DH5, GFSK)



A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.390	124.80	62.40	0.4	PASS
DH3	1.620	259.20	129.60		PASS
DH5	2.880	307.20	153.60		PASS

Agilent Spectrum Analyzer - Swept SA

RF 50 Q AC SENSE:INT ALIGN: AUTO 01:20:45 PM Apr 26, 2020

Average/Hold Number 10

PNO: Fast → Trig: Free Run
IF Gain: Low Atten: 28 dB

Avg Type: Log-Pwr

TRACE 1 2 3 4 5 6
TYPE W W W W W W W W
DET P N N N N N

Ref Offset 2 dB
Ref 20.00 dBm

Δ Mkr2 390.0 μ s
-0.19 dB

10 dB/div Log

Center 2.441000000 GHz
Res BW 1.0 MHz

#VBW 3.0 MHz

Span 0 Hz
Sweep 10.00 ms (1001 pts)

Meas Setup

Avg/Hold Num 10

Avg Type Log-Pwr (Video) ▶
Auto Man

Limits ▶

N dB Points -3.01 dB
On Off



PhNoise Opt Fast Tuning ▶
Auto Man

ADC Dither Medium ▶
Auto Man

More 1 of 2

MSG STATUS

(DH1, $\pi/4$ -DQPSK)

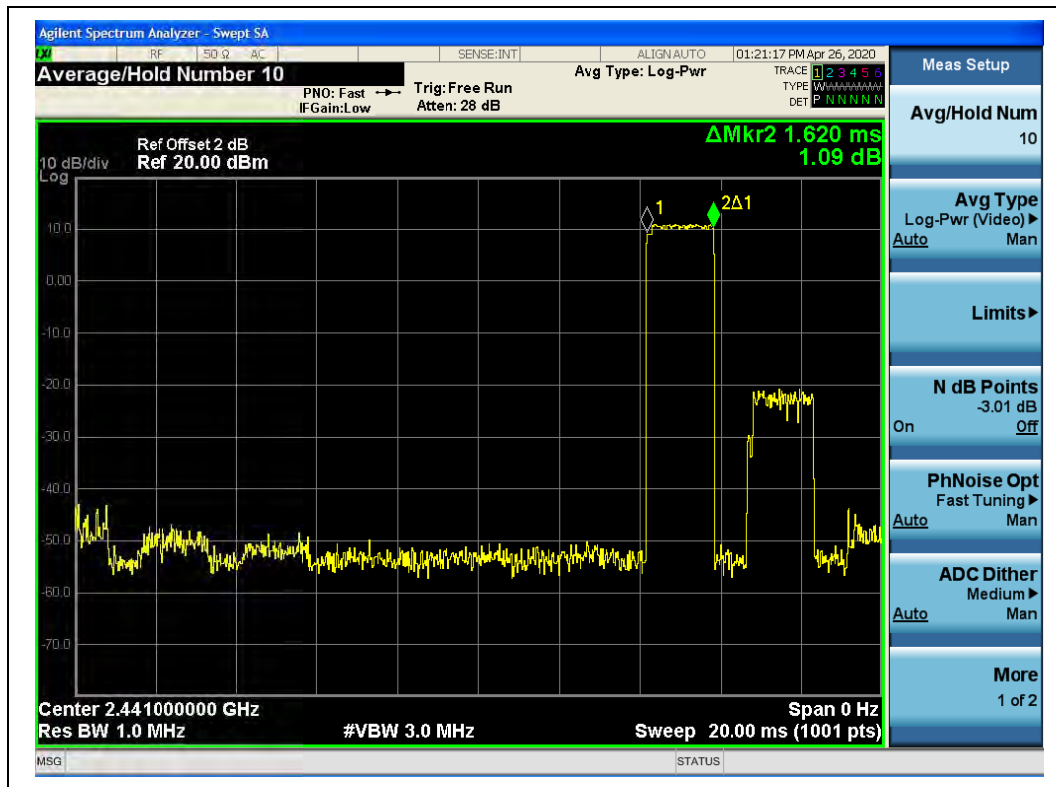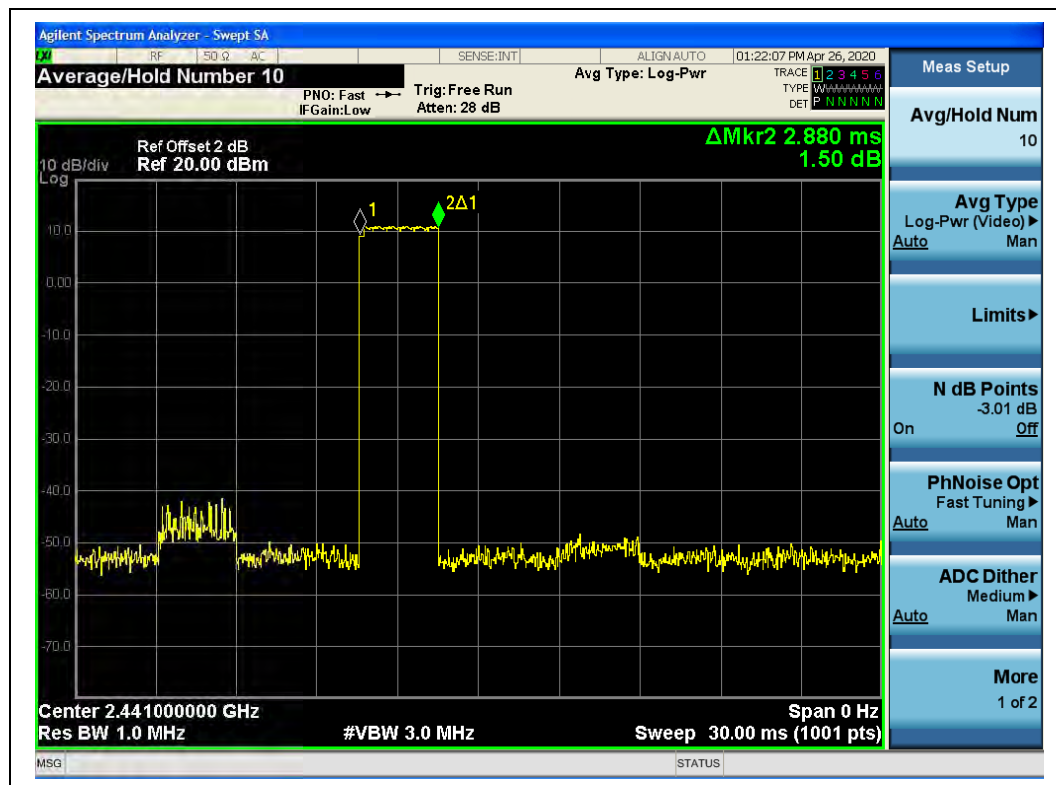
(DH3, $\pi/4$ -DQPSK)

(DH5, $\pi/4$ -DQPSK)




8-DPSK mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.380	121.60	60.80	0.4	PASS
DH3	1.640	262.40	131.20		PASS
DH5	2.880	307.20	153.60		PASS


B. Test Plots:

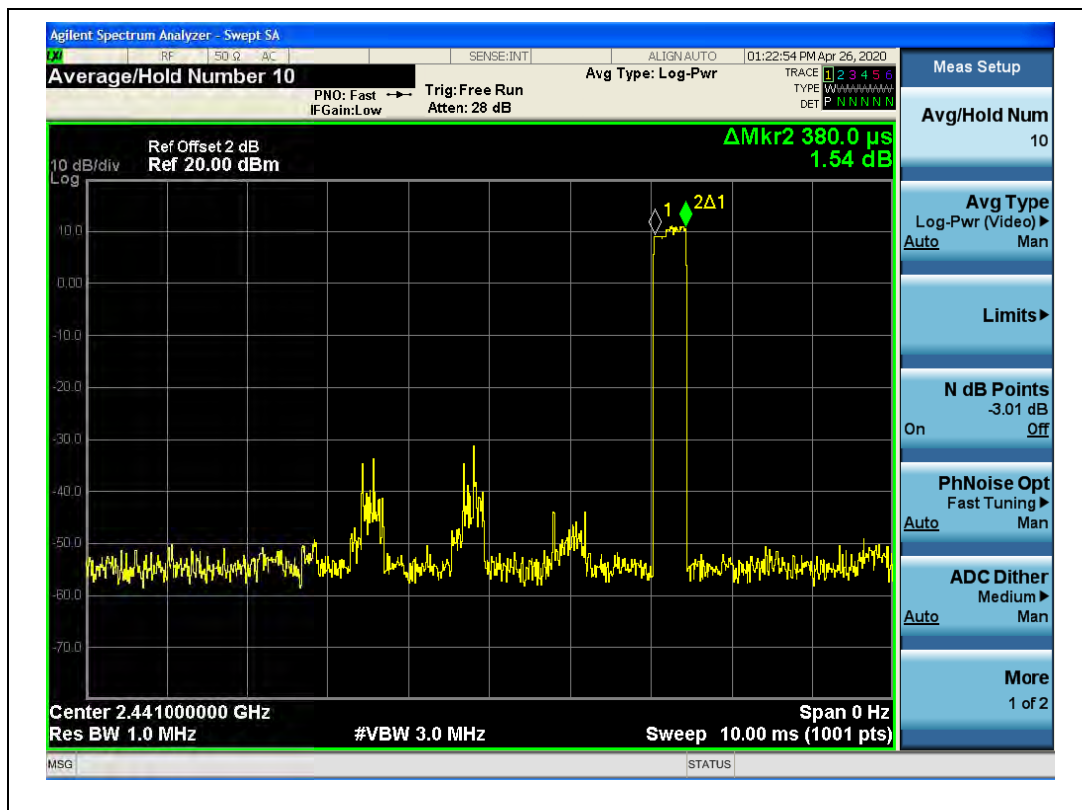

(DH1, 8-DPSK)

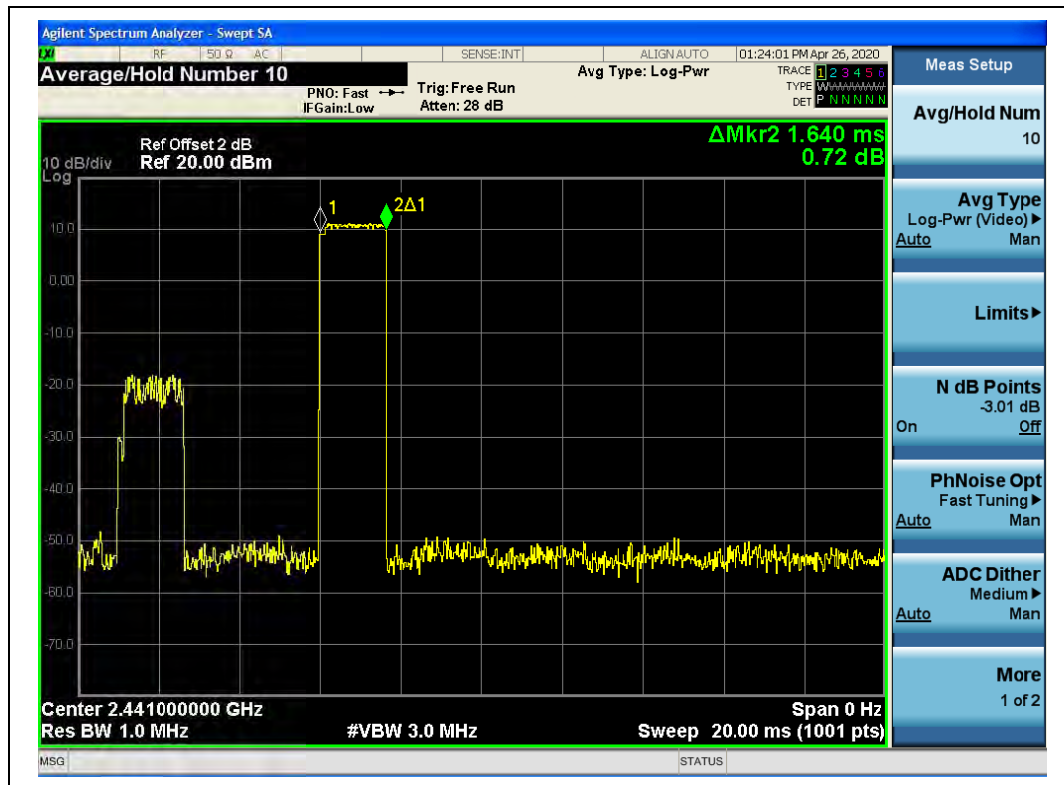

(DH3, 8-DPSK)

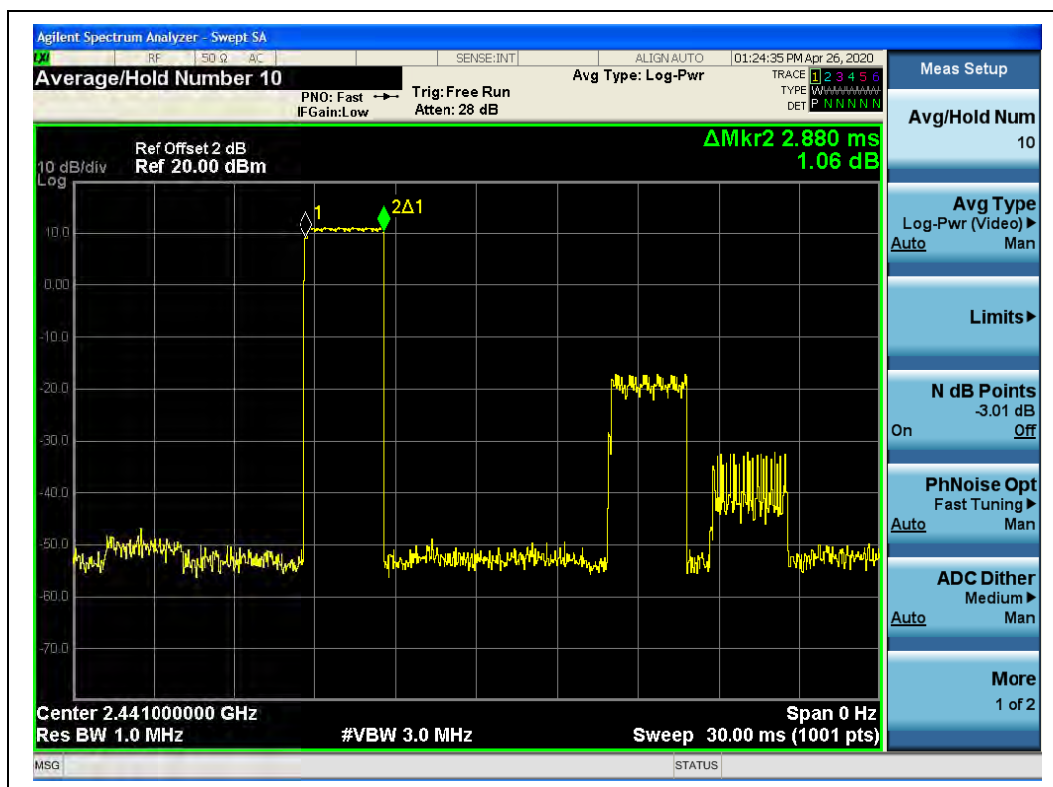

(DH5, 8-DPSK)


2.10. Conducted Spurious Emissions

2.10.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.10.2. Test Description

Test Setup:

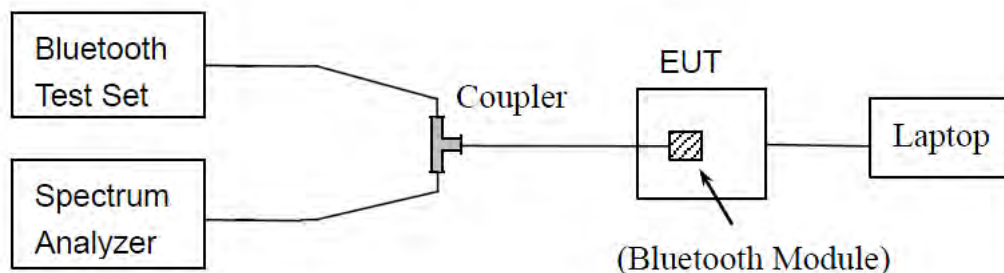

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.10.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


Left

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-39.41	8.30	-11.70	PASS
39	2441	-41.34	8.42	-11.58	PASS
78	2480	-42.95	7.98	-12.02	PASS

B. Test Plots:

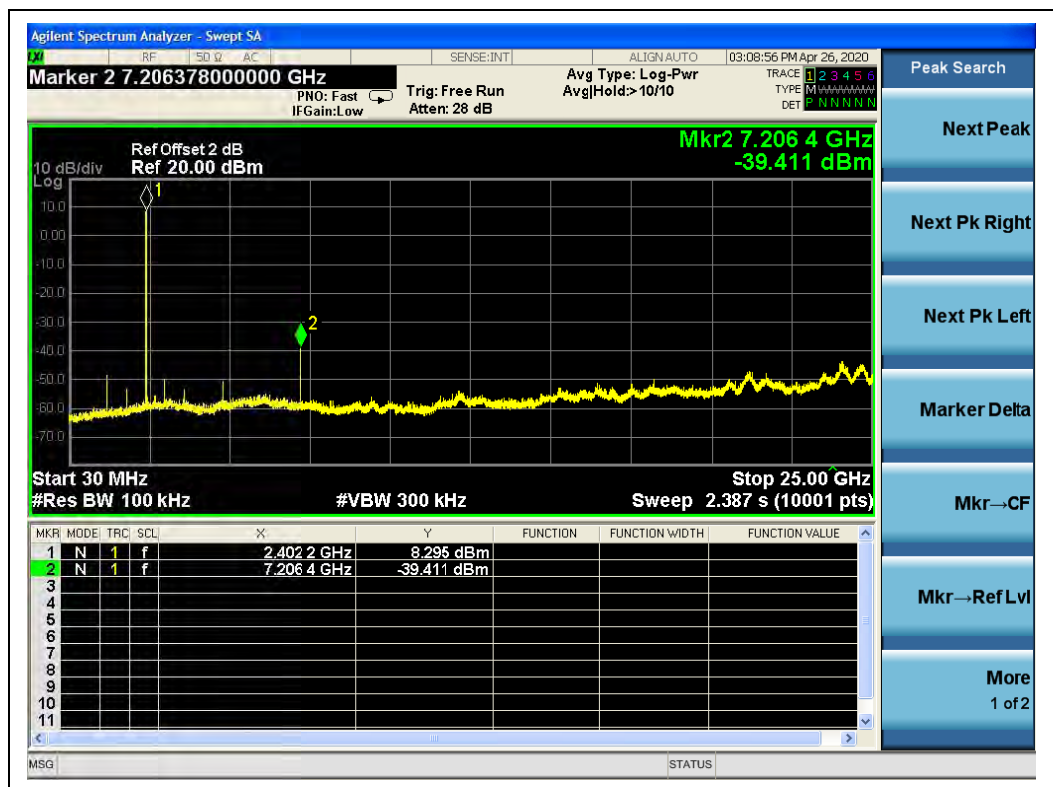


(Channel = 0, 30MHz to 25GHz, GFSK Mode)

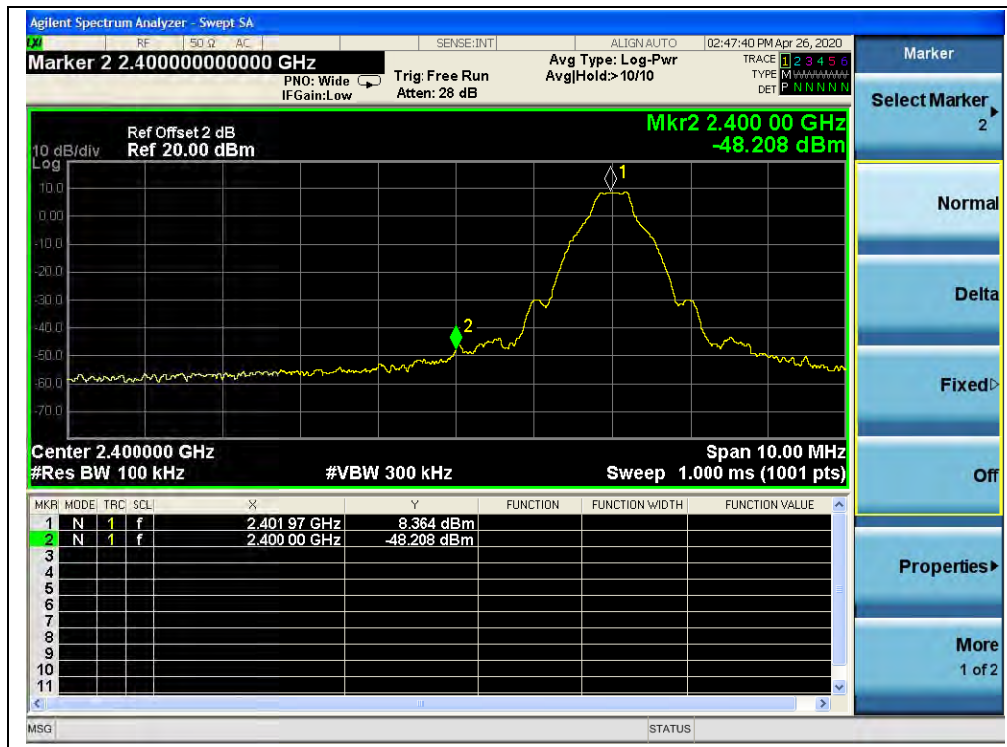


(Channel = 0, Band edge, GFSK Mode)




(Channel = 0, Band edge with hopping on, GFSK Mode)

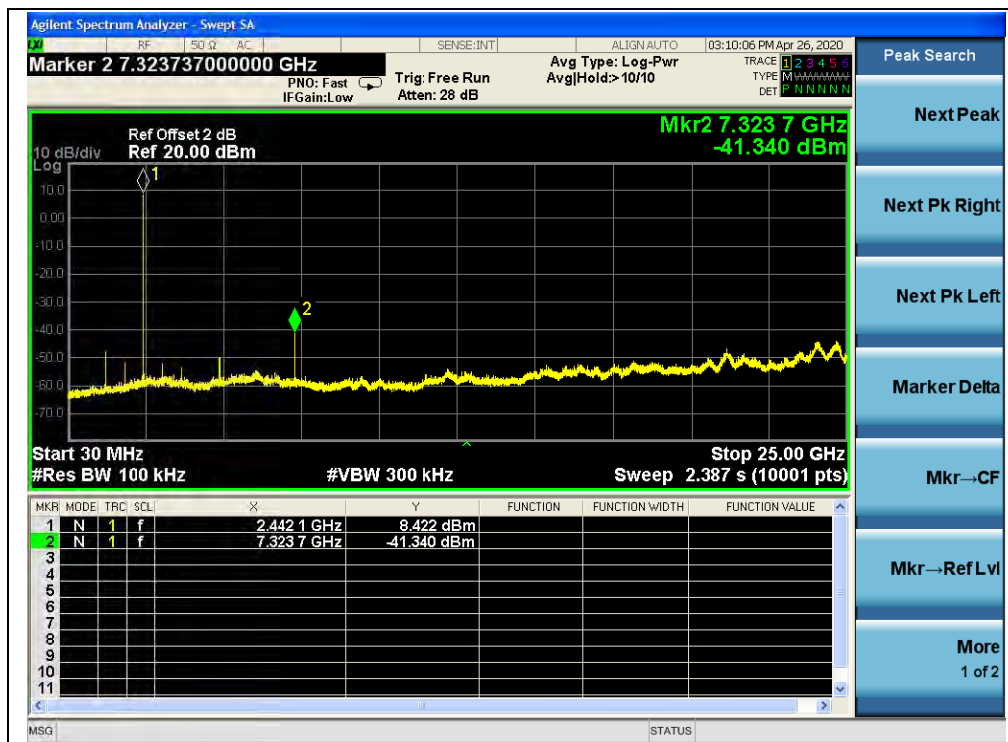


(Channel = 39, 30MHz to 25GHz, GFSK Mode)

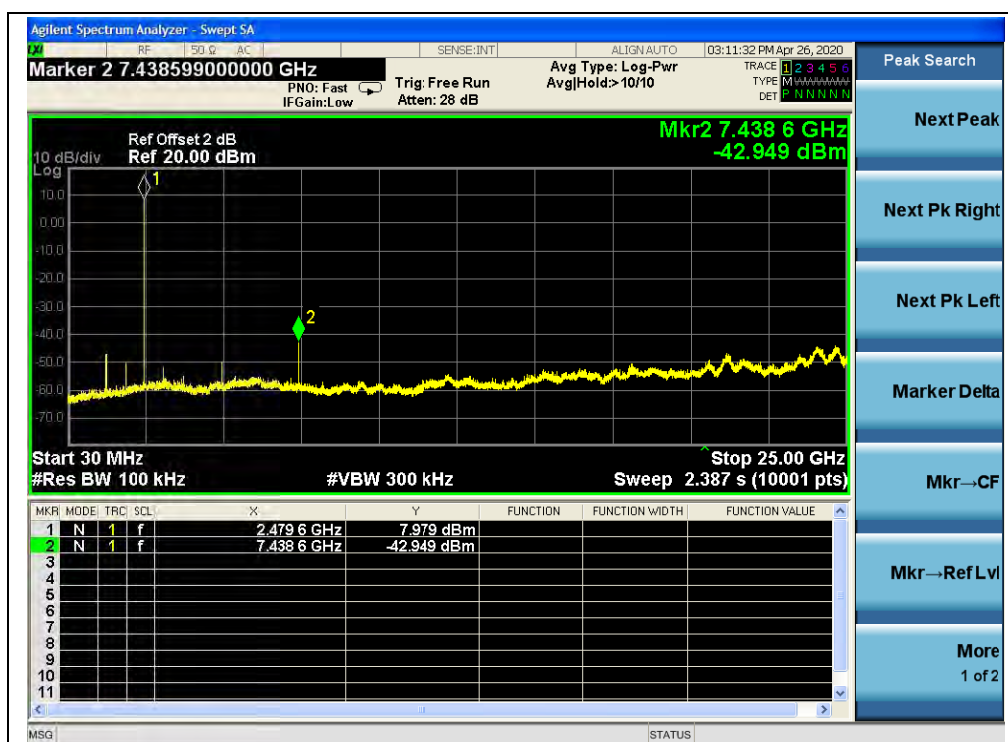

(Channel = 78, 30MHz to 25GHz, GFSK Mode)

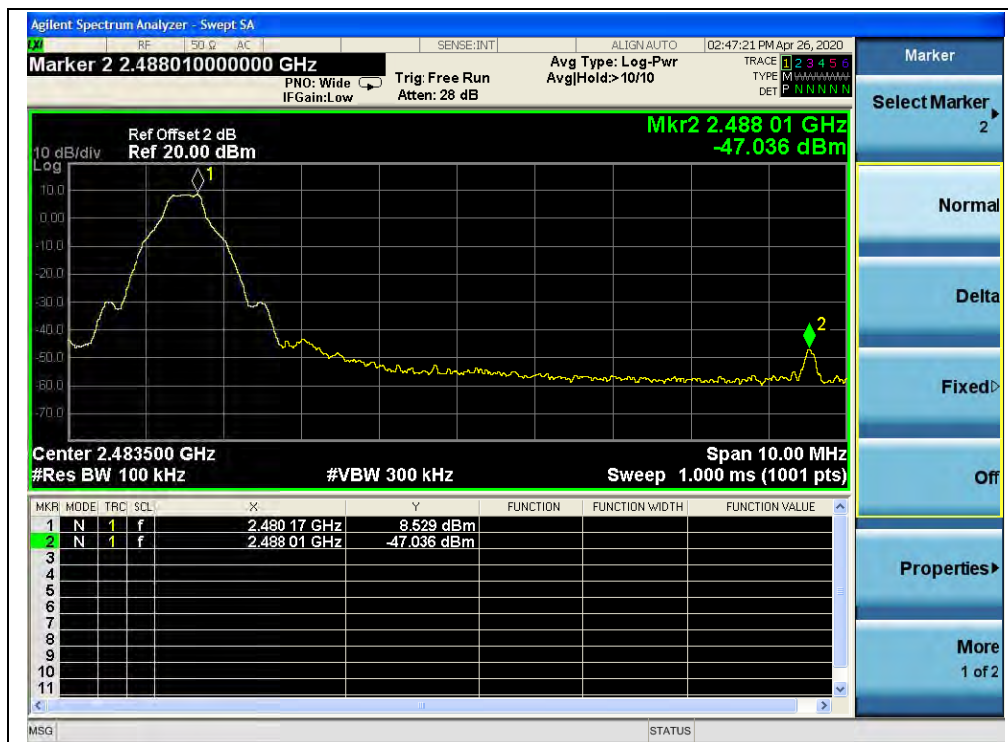

(Channel = 78, Band edge, GFSK Mode)

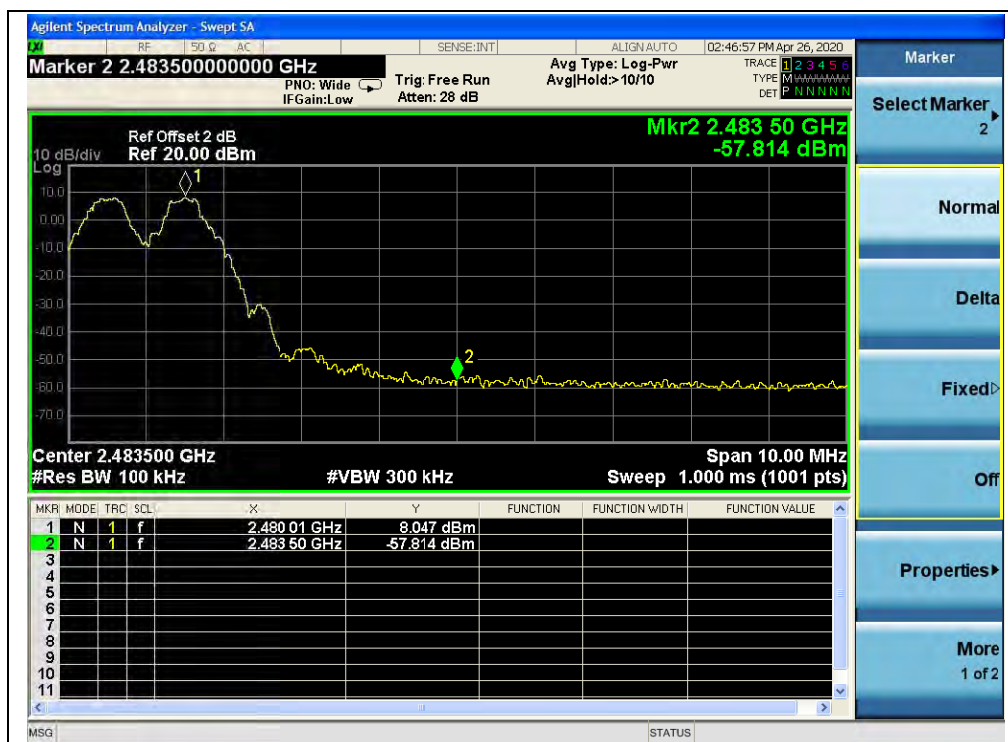

(Channel = 78, Band edge with hopping on, GFSK Mode)




$\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-40.45	5.36	-14.64	PASS
39	2441	-42.65	6.52	-13.48	PASS
78	2480	-43.74	8.13	-11.87	PASS

B. Test Plots:

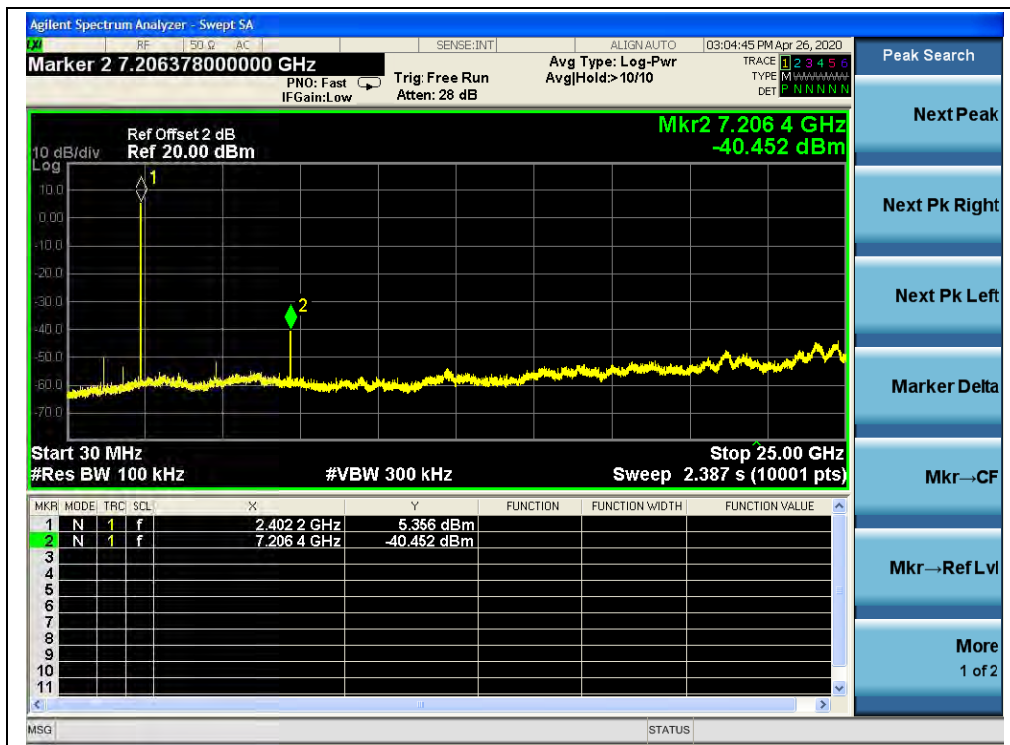



(Channel = 0, 30MHz to 25GHz, $\pi/4$ -DQPSK)

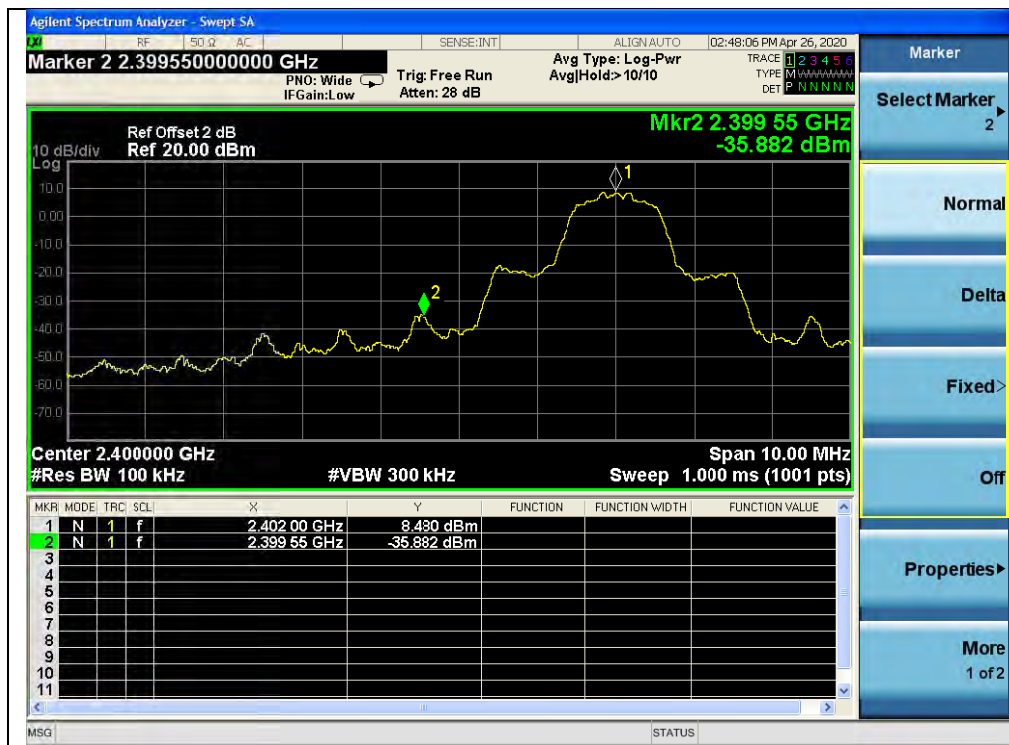

(Channel = 0, Band edge, $\pi/4$ -DQPSK)




(Channel = 0, Band edge with hopping on, $\pi/4$ -DQPSK)

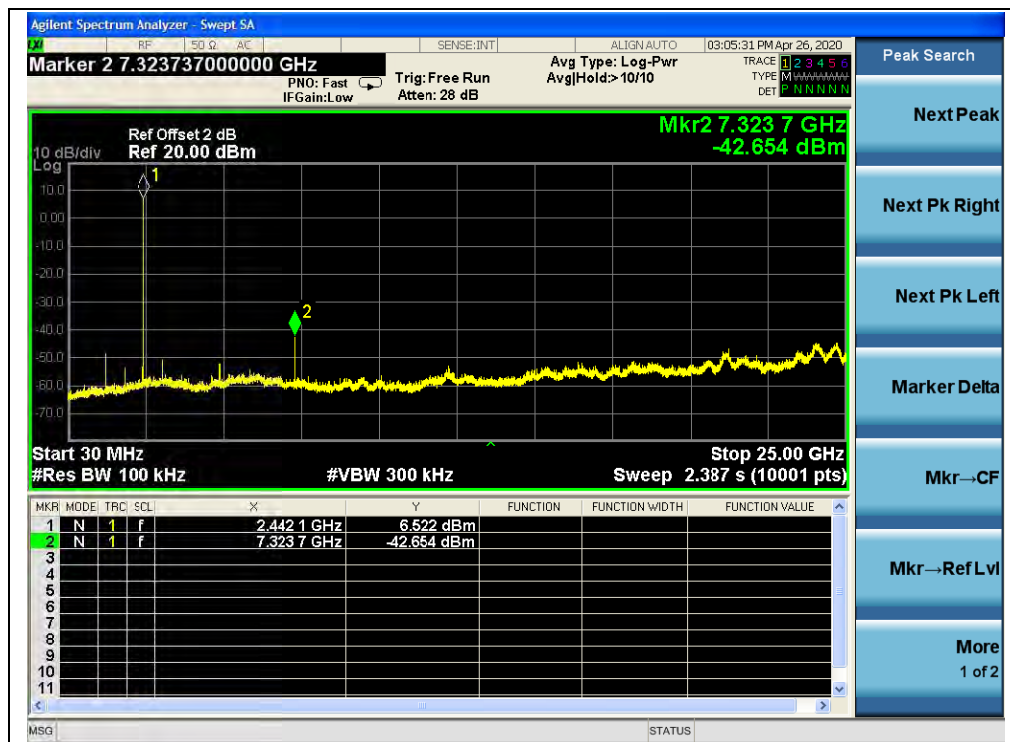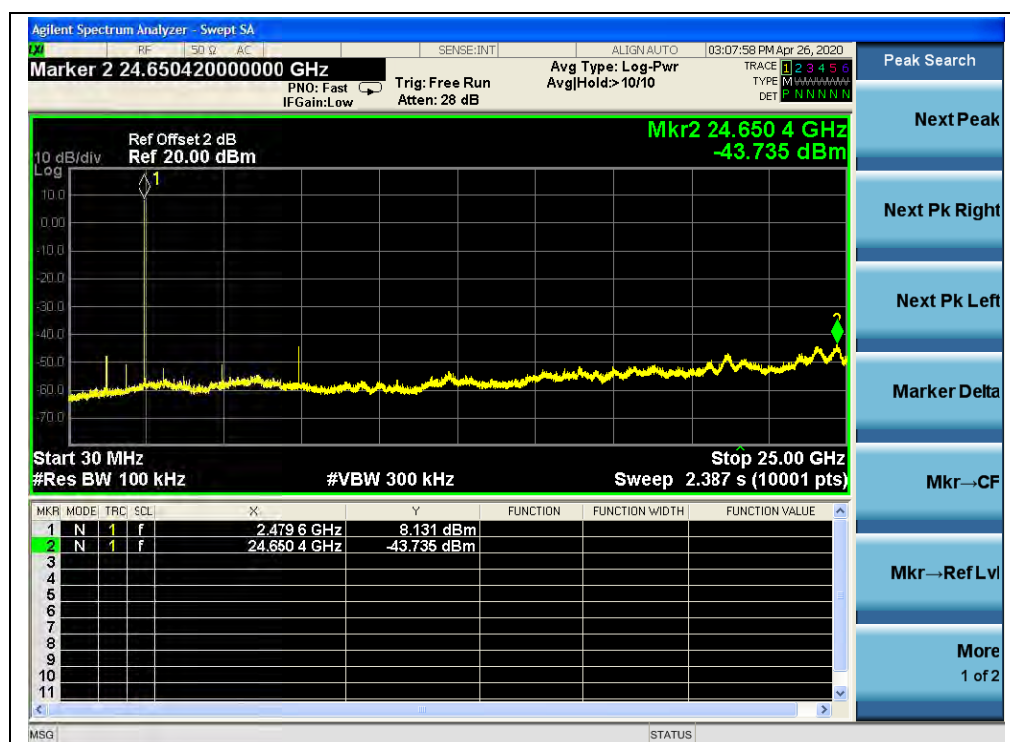(Channel = 39, 30MHz to 25GHz, $\pi/4$ -DQPSK)(Channel = 78, 30MHz to 25GHz, $\pi/4$ -DQPSK)



(Channel = 78, Band edge, $\pi/4$ -DQPSK)

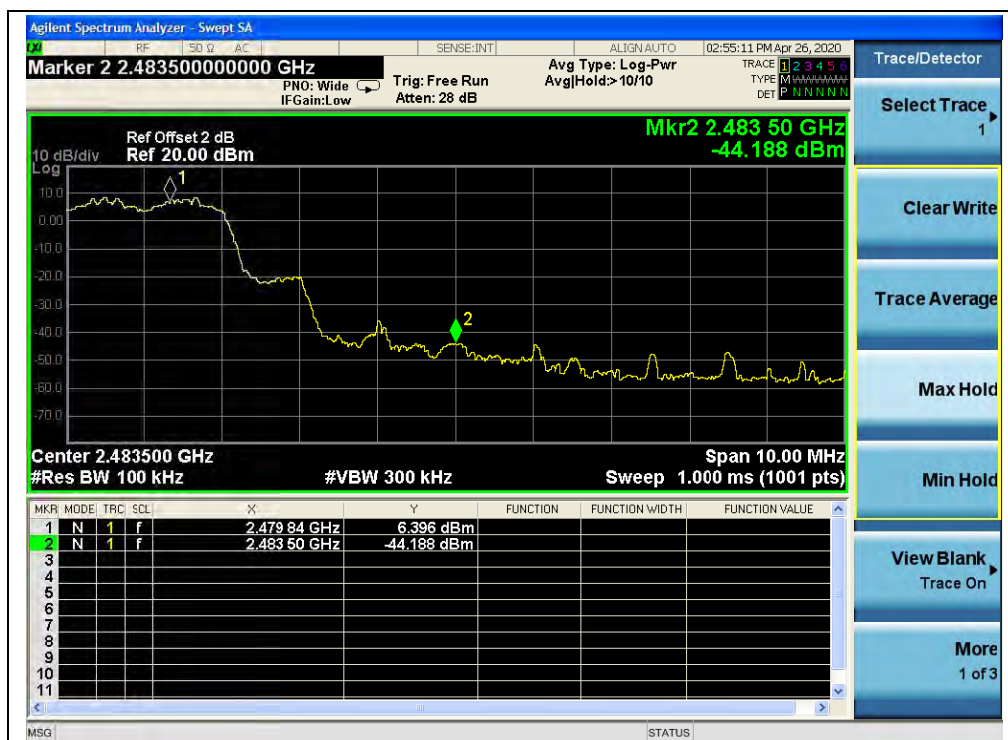

(Channel = 78, Band edge with hopping on, $\pi/4$ -DQPSK)




8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-42.91	6.01	-13.99	PASS
39	2441	-42.99	5.75	-14.25	PASS
78	2480	-43.98	7.06	-12.94	PASS

B. Test Plots:

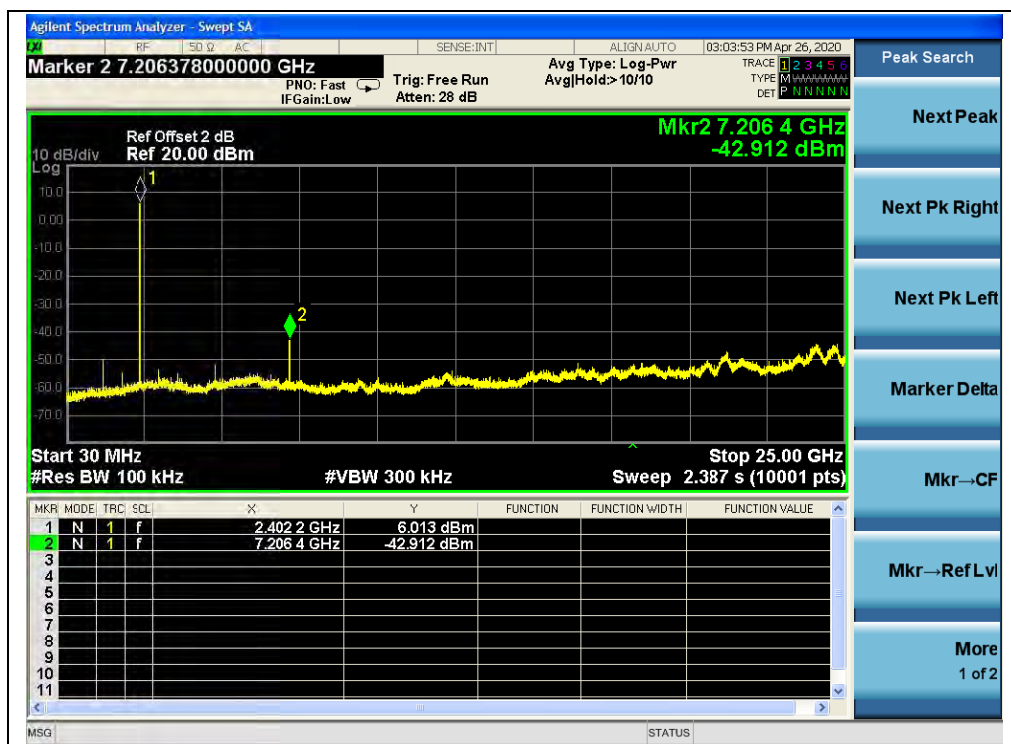


(Channel = 0, 30MHz to 25GH, 8-DPSK)




(Channel = 0, Band edge, 8-DPSK)



(Channel = 0, Band edge with hopping on, 8-DPSK)



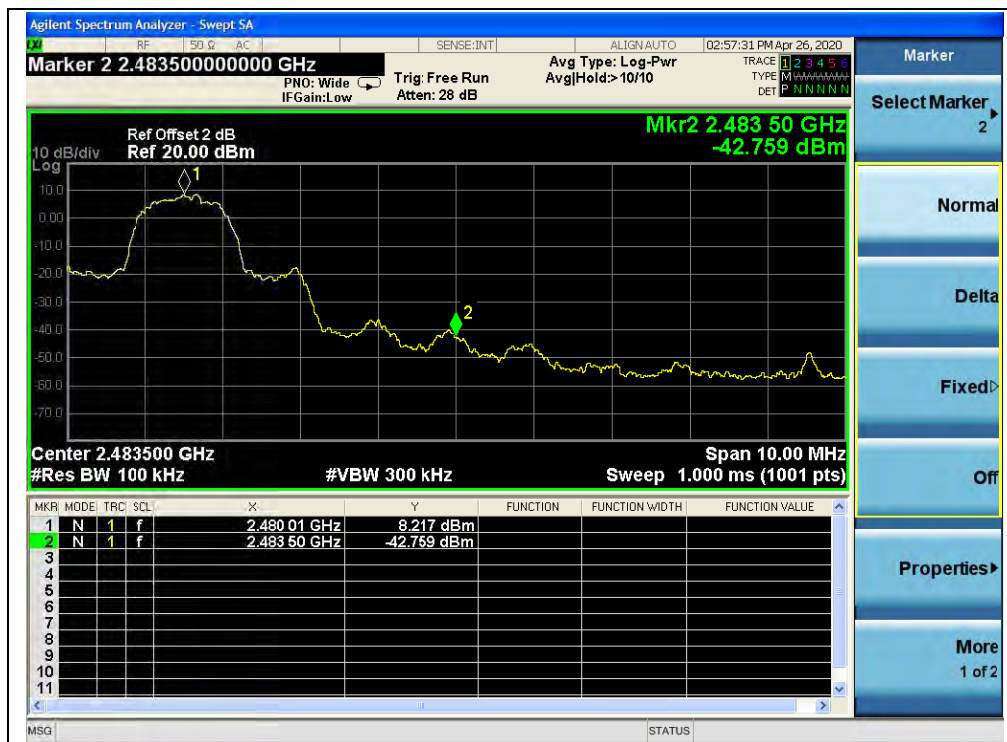

(Channel = 78, Band edge, 8-DPSK)



(Channel = 78, Band edge with hopping on, 8-DPSK)




Right

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-41.17	8.10	-11.90	PASS
39	2441	-41.90	8.33	-11.67	PASS
78	2480	-42.51	8.41	-11.59	PASS

B. Test Plots:

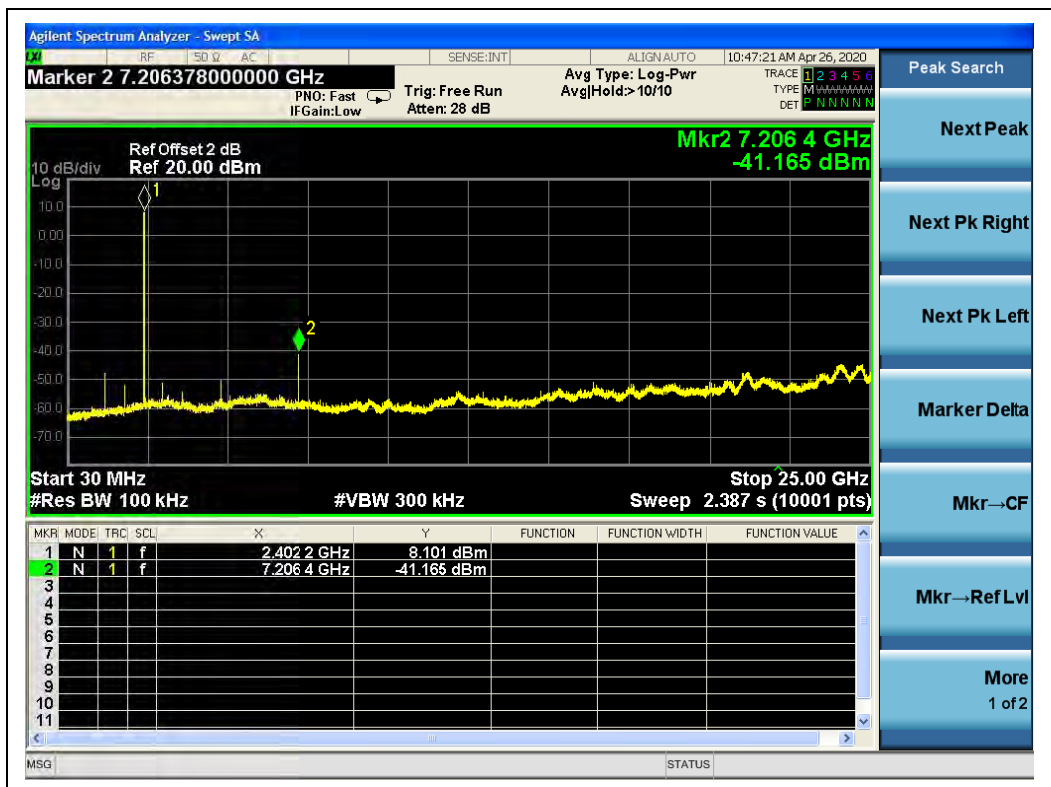


(Channel = 0, 30MHz to 25GHz, GFSK Mode)

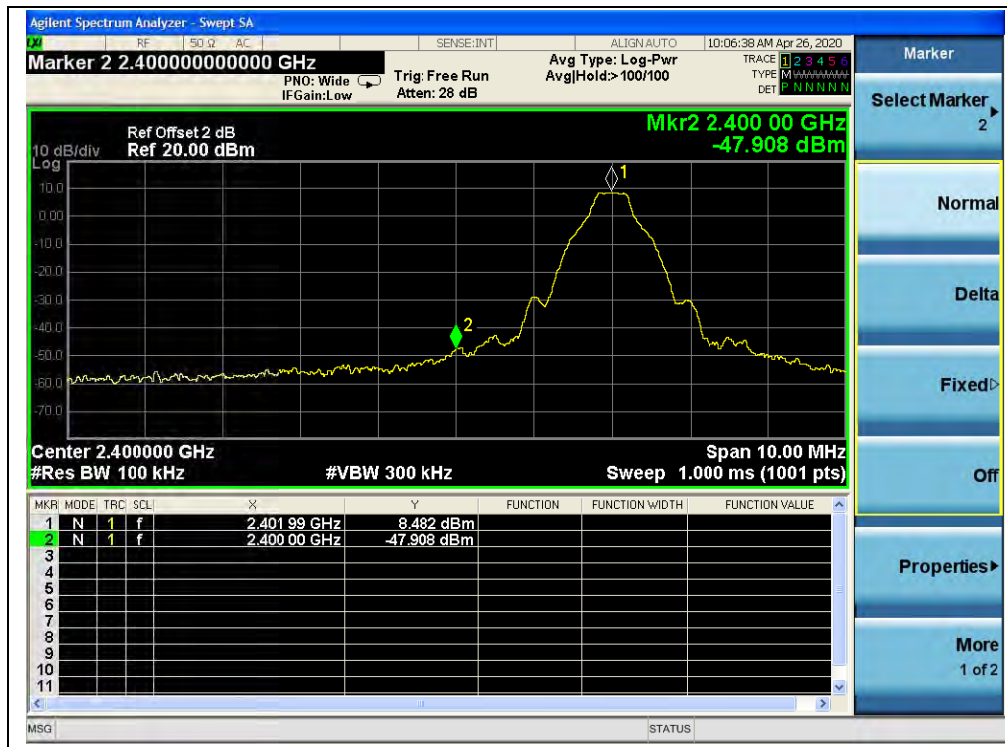


(Channel = 0, Band edge, GFSK Mode)




(Channel = 0, Band edge with hopping on, GFSK Mode)

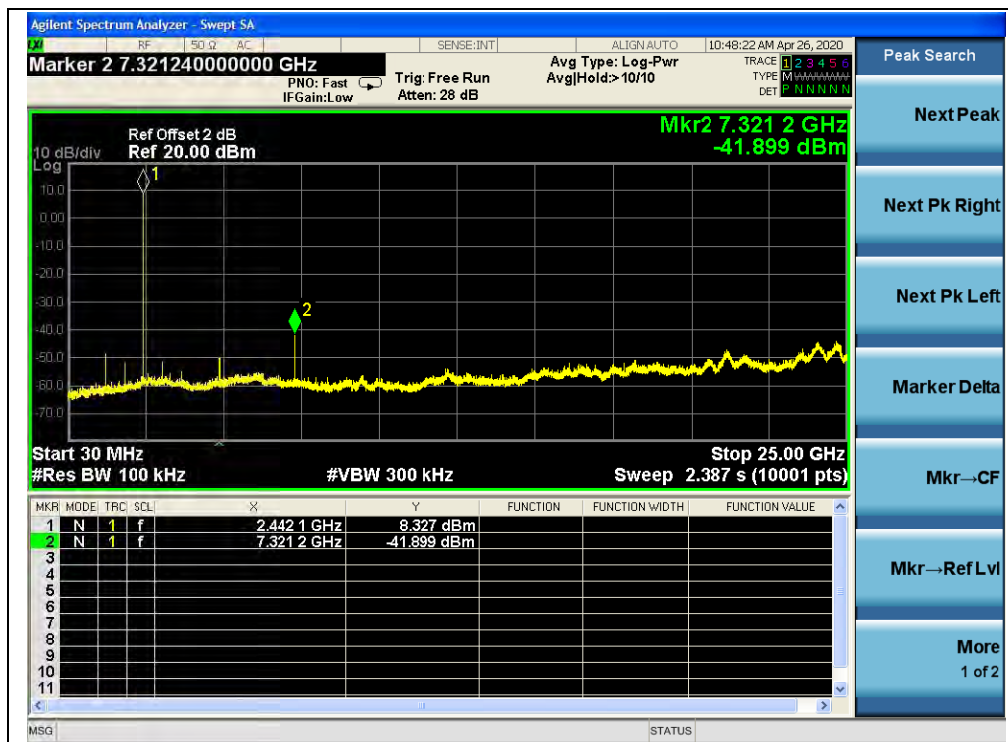


(Channel = 39, 30MHz to 25GHz, GFSK Mode)

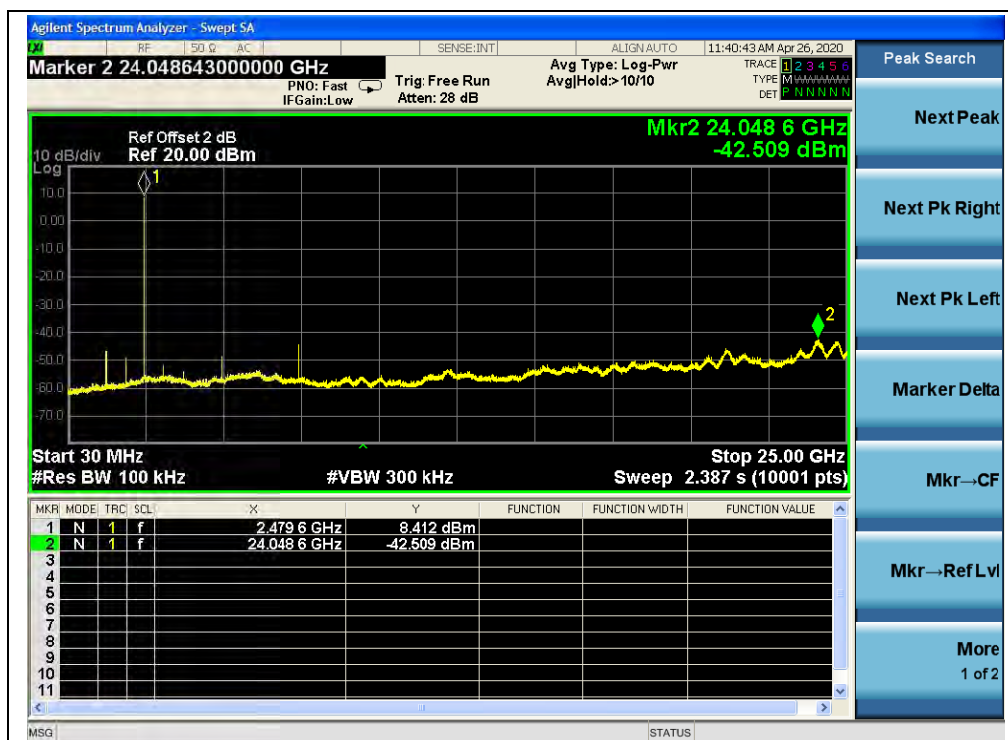

(Channel = 78, 30MHz to 25GHz, GFSK Mode)

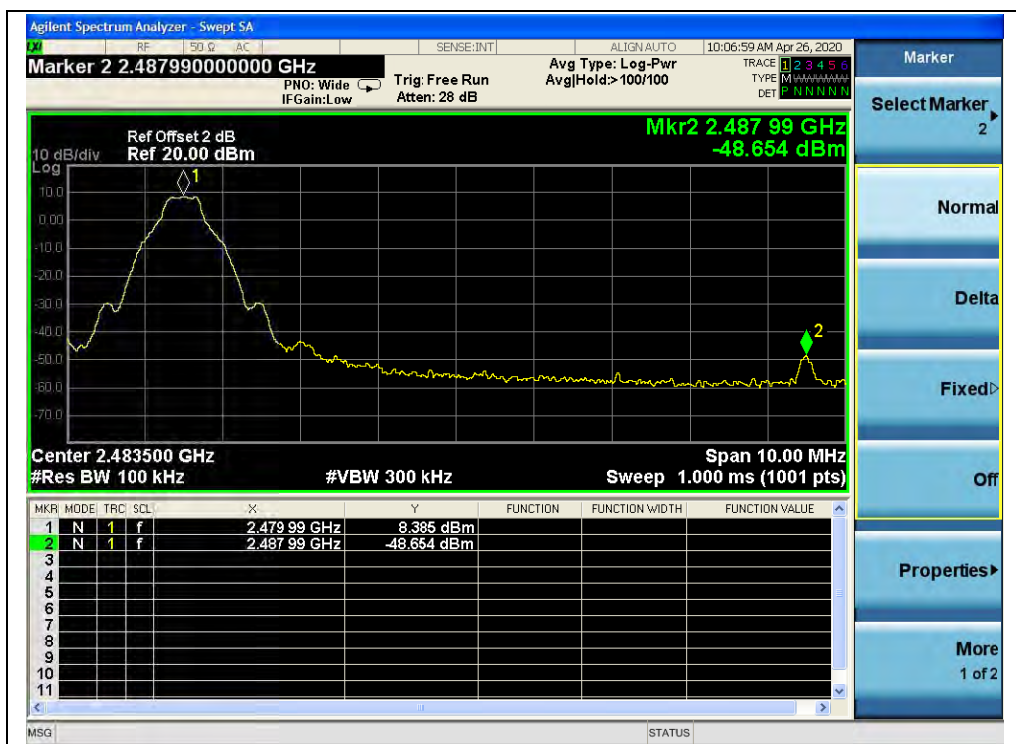

(Channel = 78, Band edge, GFSK Mode)

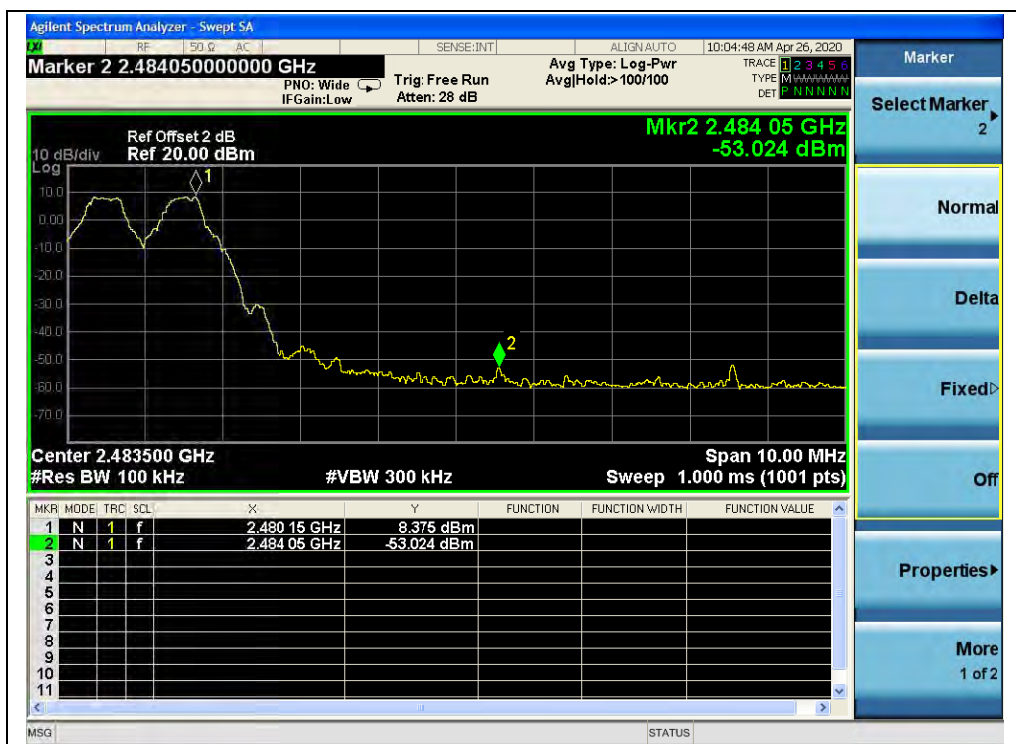

(Channel = 78, Band edge with hopping on, GFSK Mode)




$\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-40.23	6.22	-13.78	PASS
39	2441	-41.30	5.67	-14.33	PASS
78	2480	-44.46	7.89	-12.11	PASS


B. Test Plots:

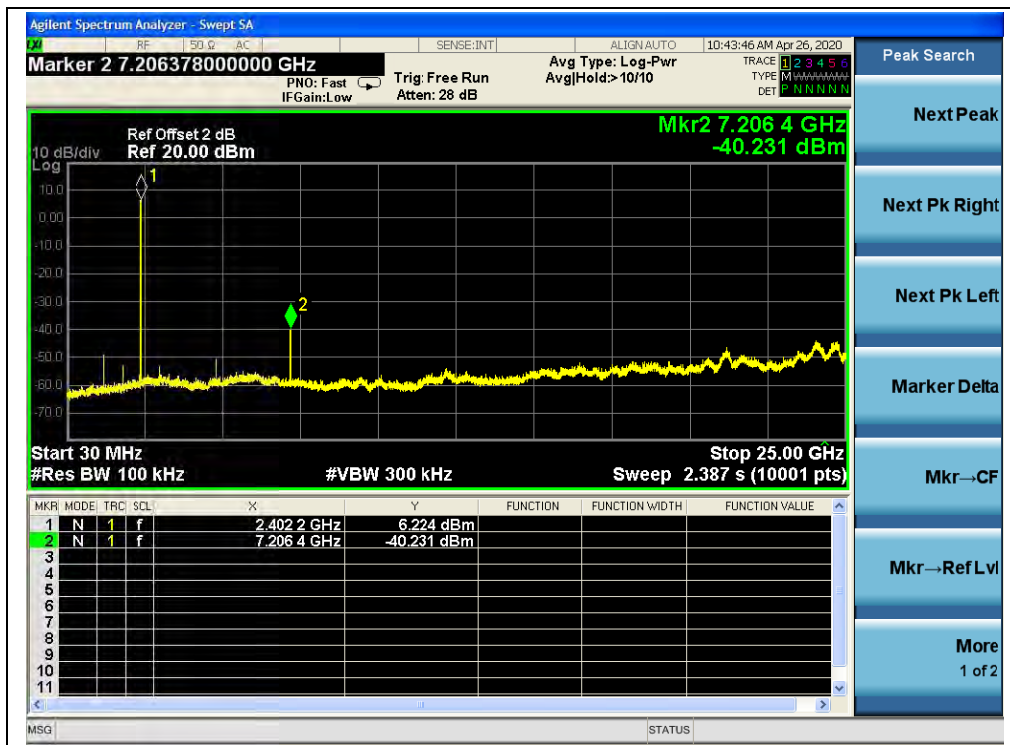


(Channel = 0, 30MHz to 25GHz, $\pi/4$ -DQPSK)




(Channel = 0, Band edge, $\pi/4$ -DQPSK)

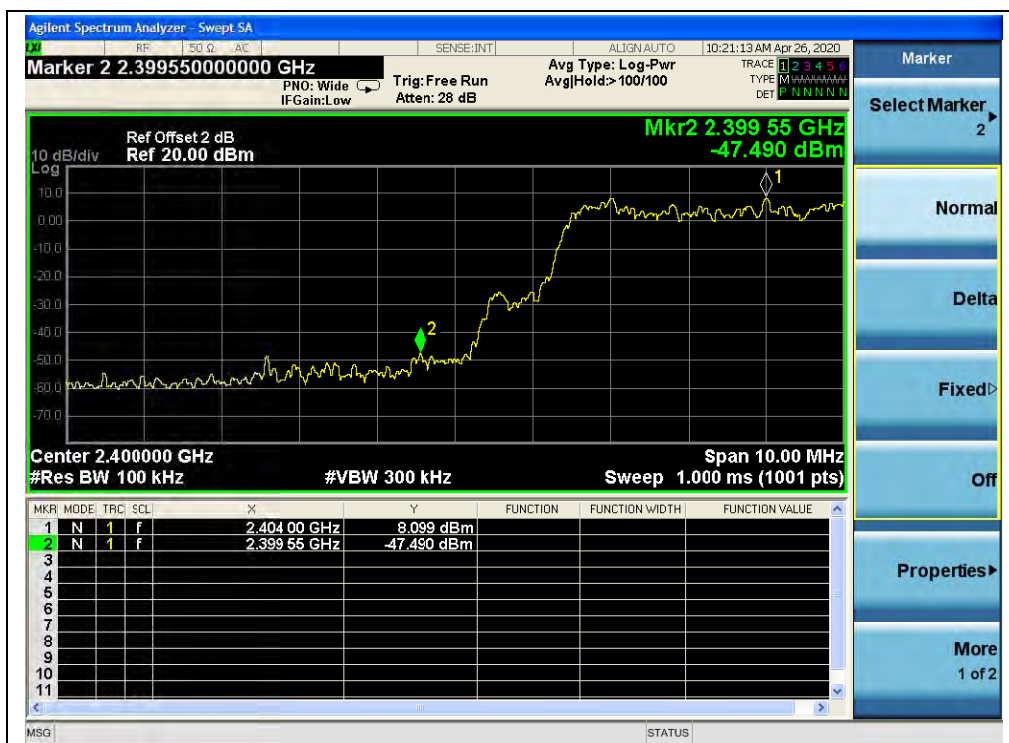

(Channel = 0, Band edge with hopping on, $\pi/4$ -DQPSK)

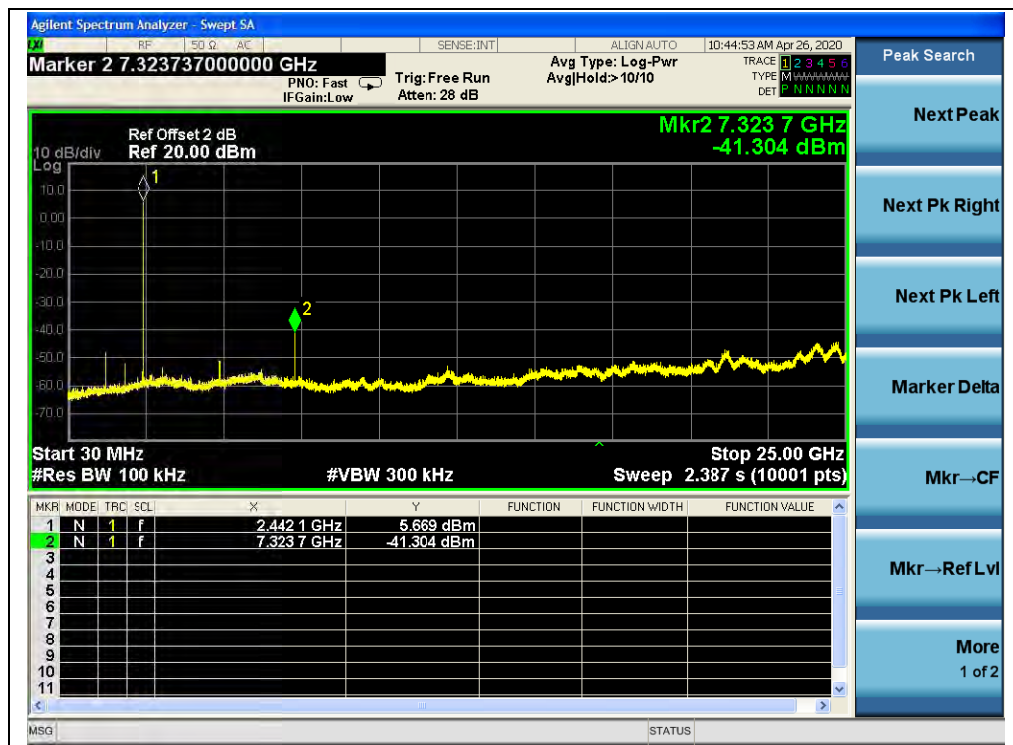


(Channel = 39, 30MHz to 25GHz, $\pi/4$ -DQPSK)

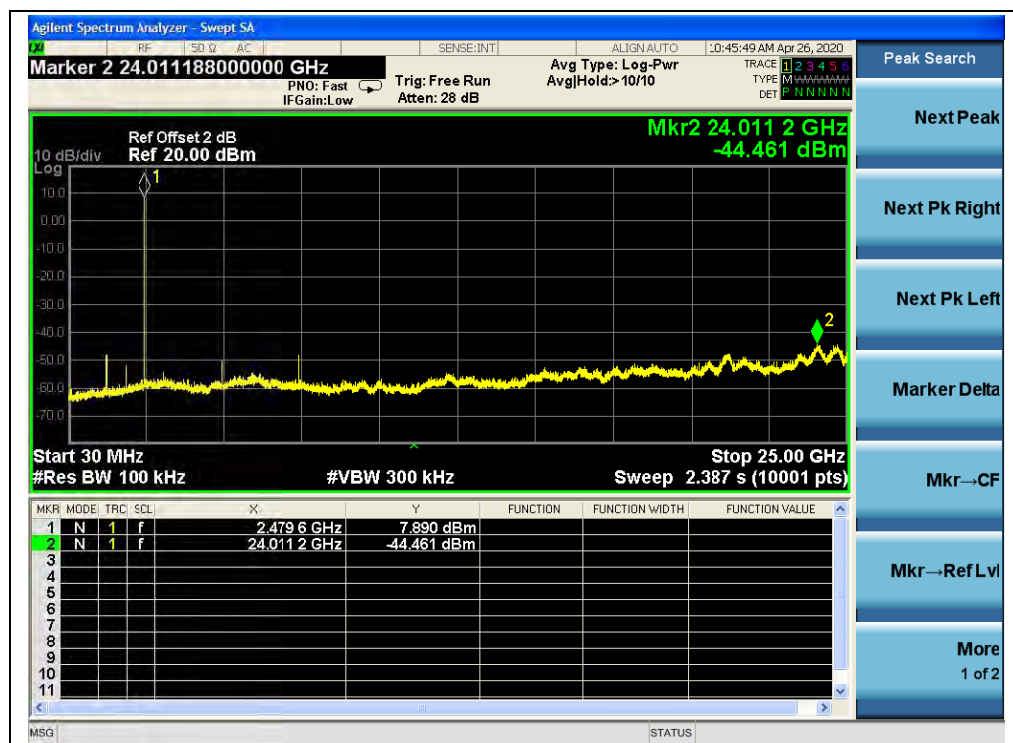

(Channel = 78, 30MHz to 25GHz, $\pi/4$ -DQPSK)



(Channel = 78, Band edge, $\pi/4$ -DQPSK)

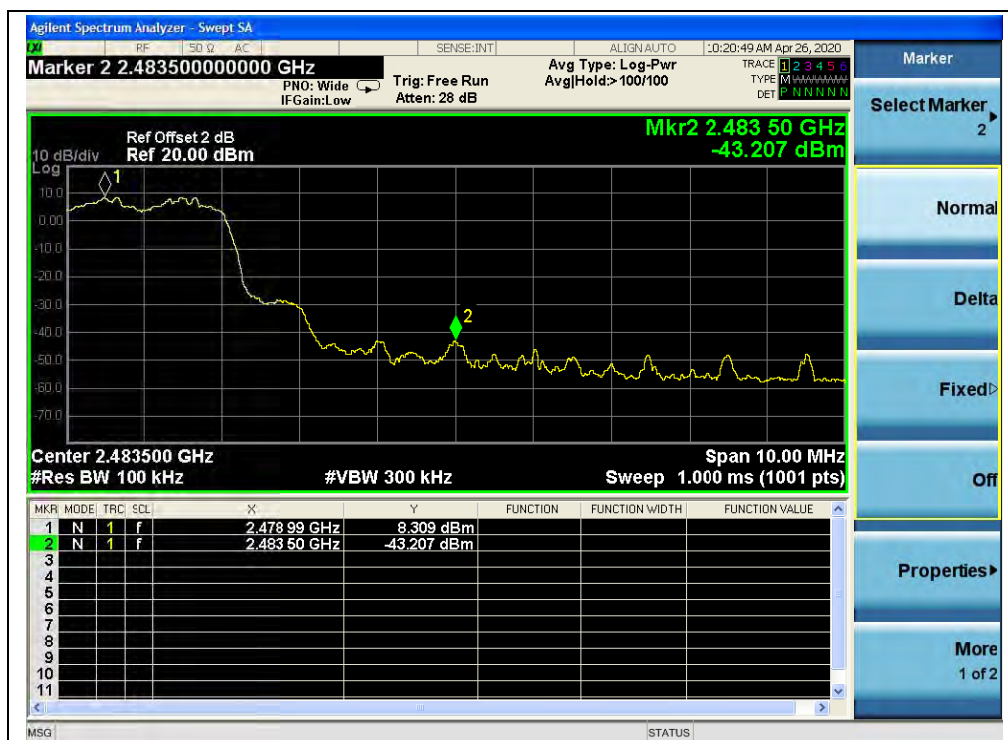

(Channel = 78, Band edge with hopping on, $\pi/4$ -DQPSK)




8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-40.00	7.94	-12.06	PASS
39	2441	-43.87	6.57	-13.43	PASS
78	2480	-43.68	5.64	-14.36	PASS


B. Test Plots:

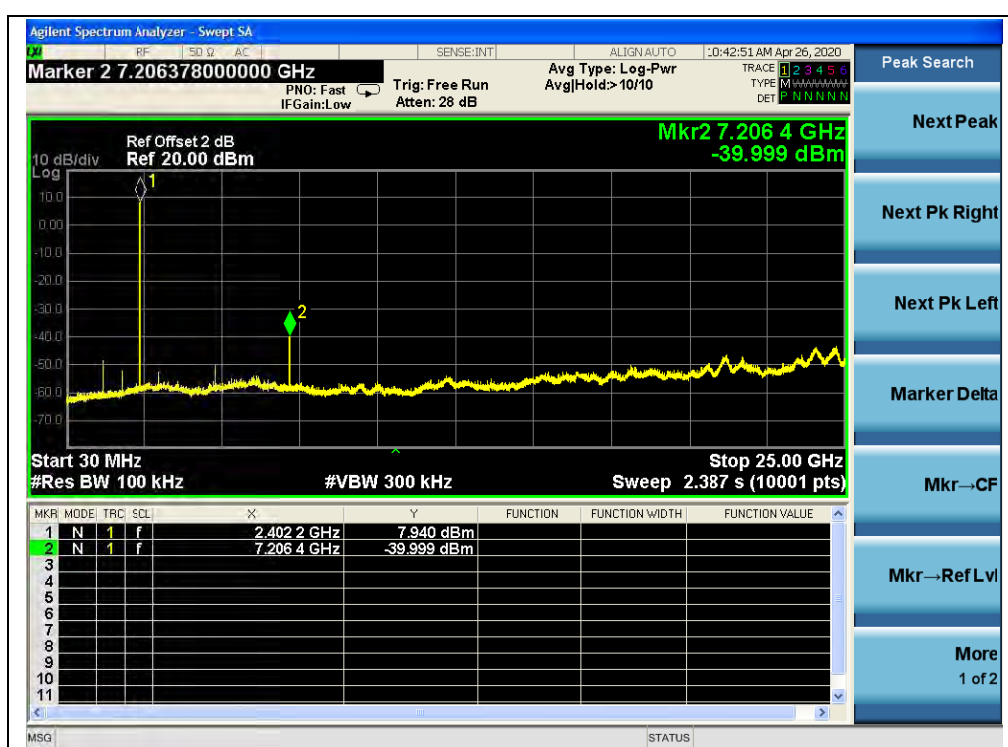


(Channel = 0, 30MHz to 25GH, 8-DPSK)




(Channel = 0, Band edge, 8-DPSK)

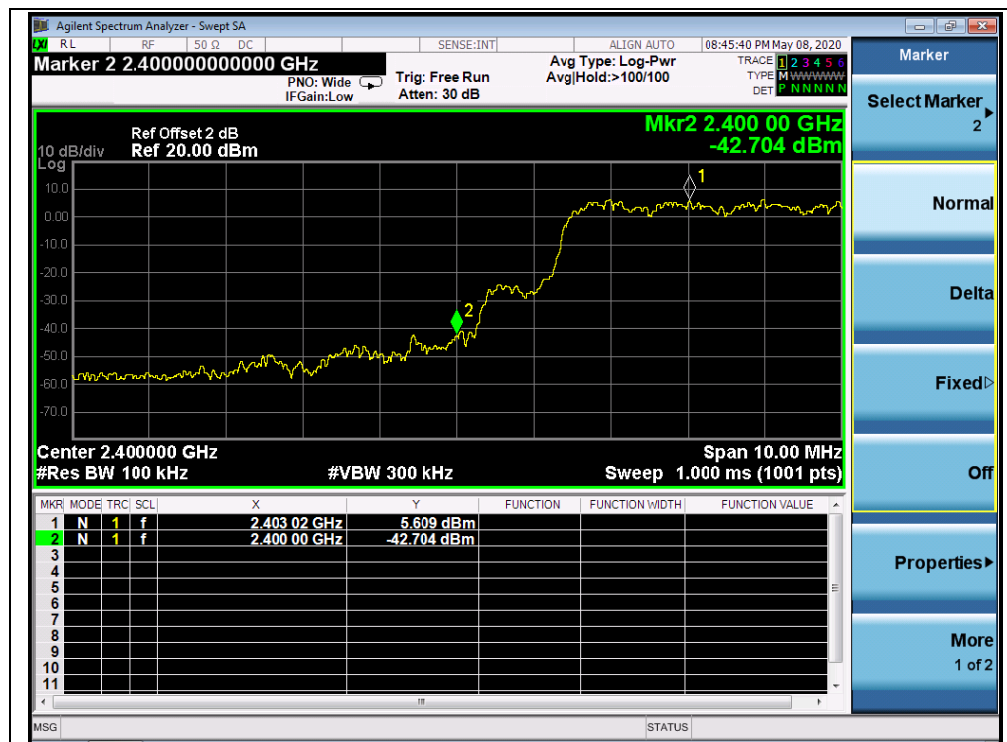


(Channel = 0, Band edge with hopping on, 8-DPSK)

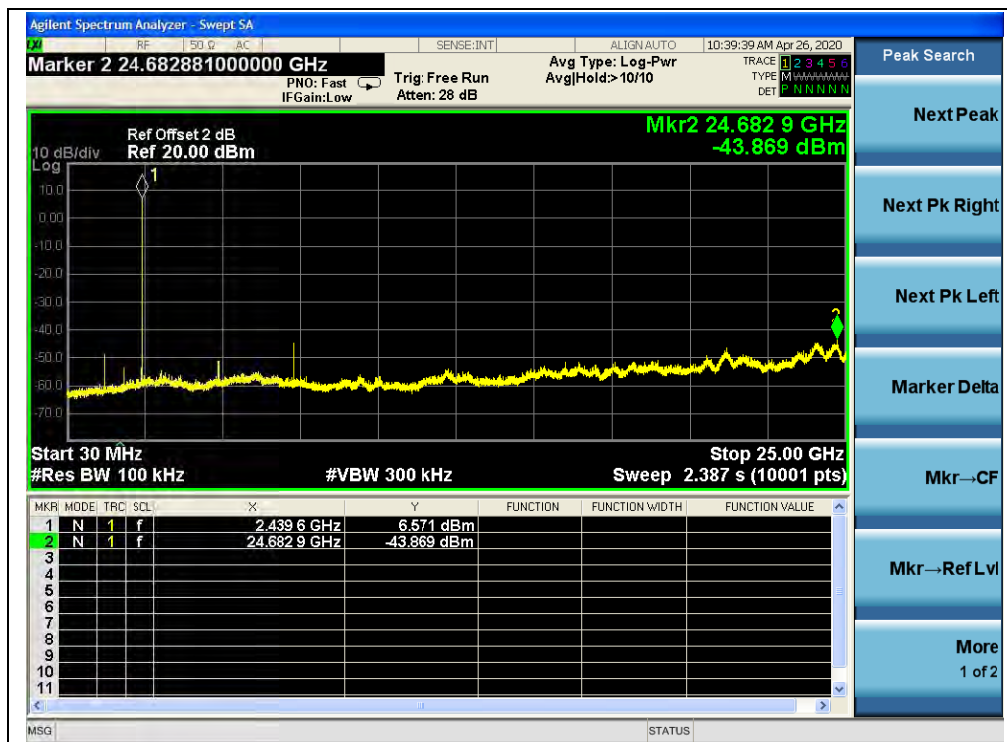

(Channel = 39, 30MHz to 25GHz, 8-DPSK)

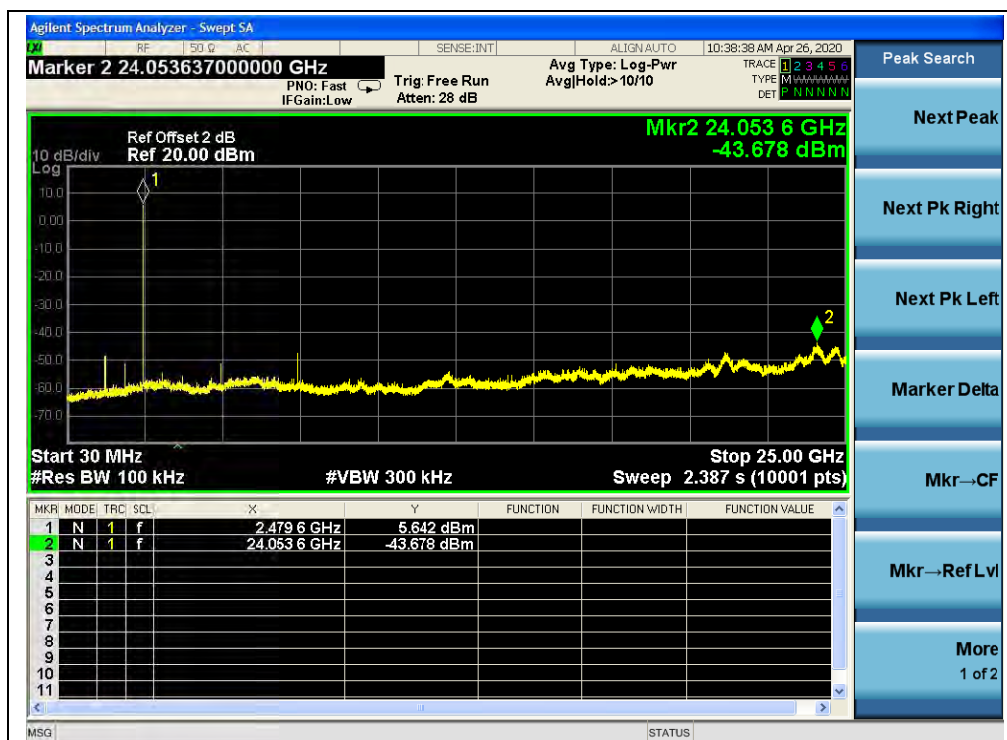

(Channel = 78, 30MHz to 25GH, 8-DPSK)

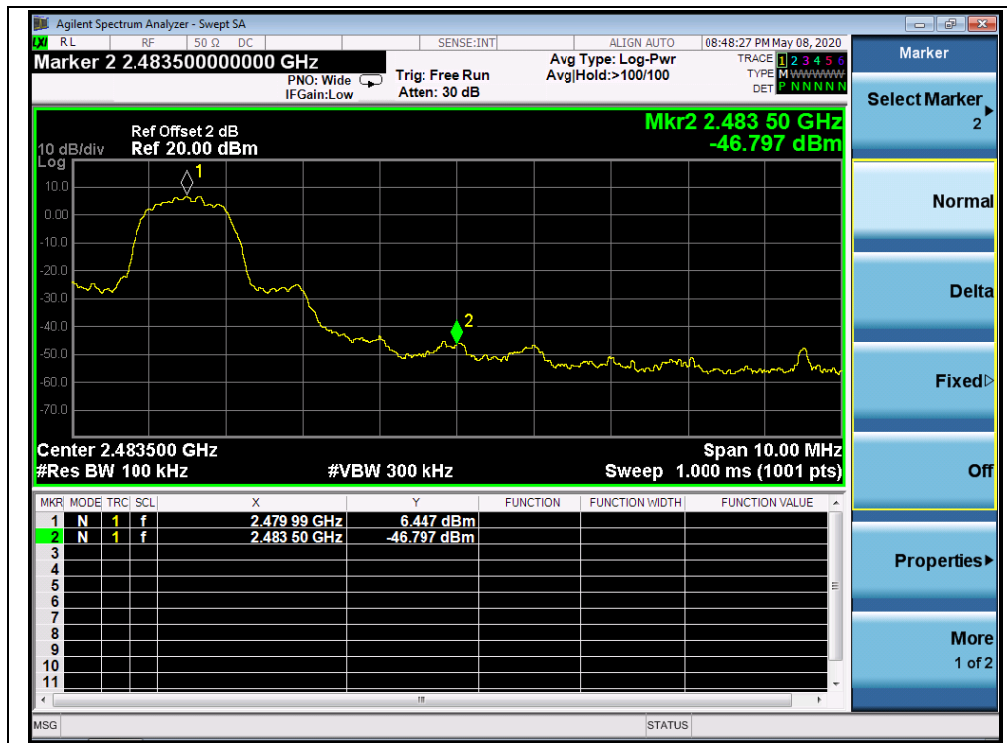

(Channel = 78, Band edge, 8-DPSK)



(Channel = 78, Band edge with hopping on, 8-DPSK)

2.11. Conducted Emission

2.11.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5- 30		60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.11.2. Test Description

Test Setup:

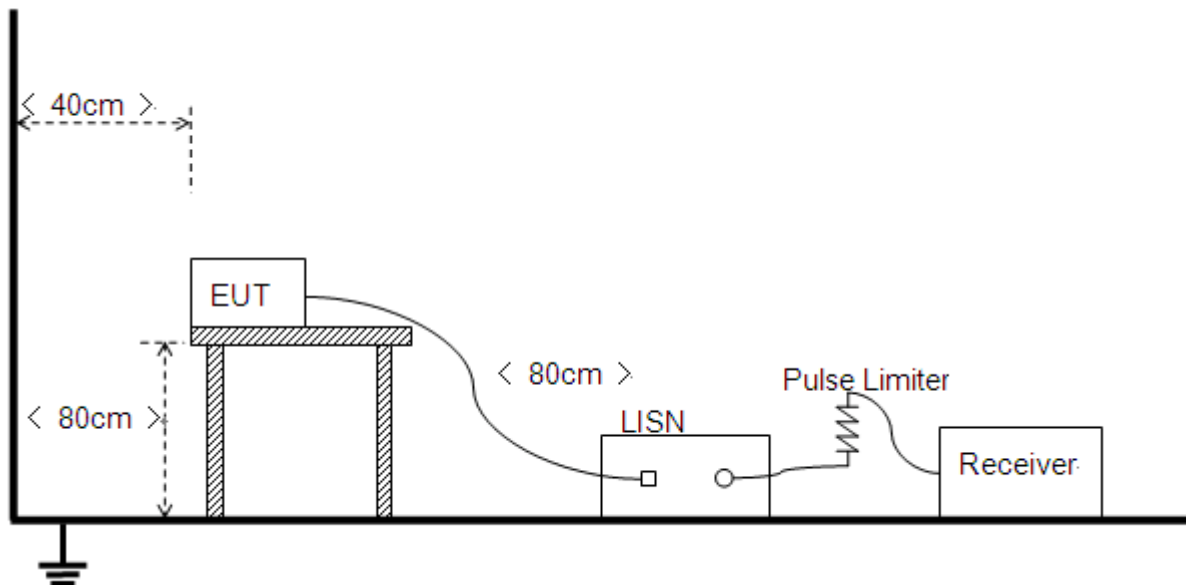

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



REPORT No.: SZ20040206W02

2.11.3. Test Result

Note: This test case does not apply this kind of EUT.


2.12. Restricted Frequency Bands

2.12.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.12.2. Test Description

Test Setup:

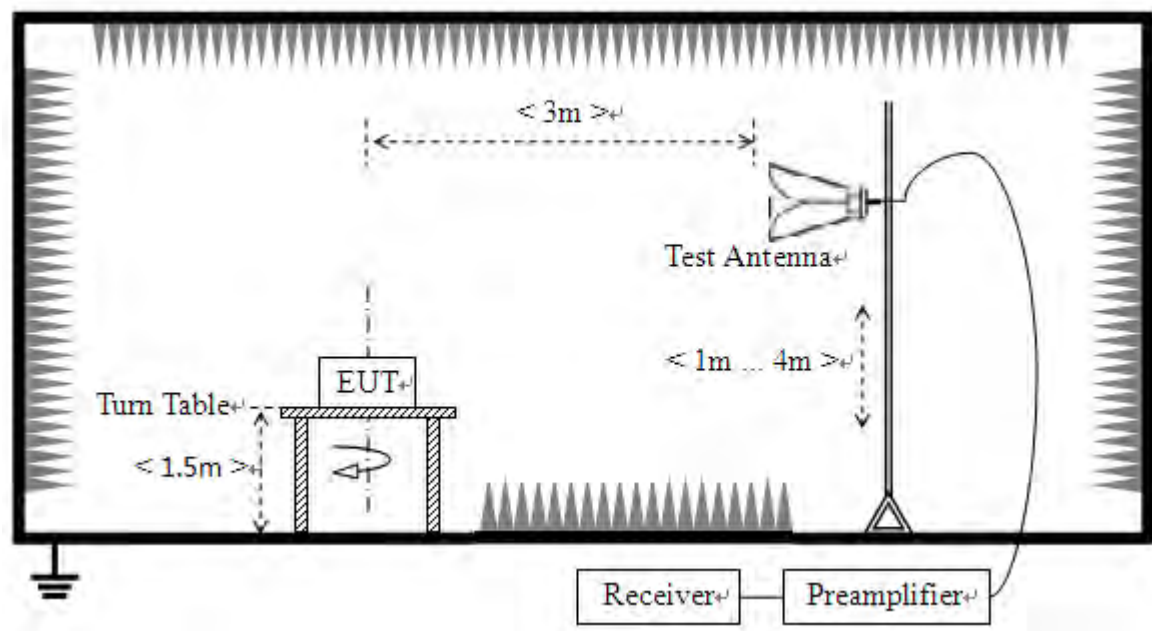

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.12.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.12.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Left


GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2377.55	PK	46.20	-29.67	32.56	49.09	74	PASS
0	2374.85	AV	44.97	-29.67	32.56	47.86	54	PASS
78	2485.36	PK	50.35	-29.67	32.56	53.24	74	PASS
78	2485.41	AV	48.97	-29.67	32.56	51.86	54	PASS




B. Test Plots:

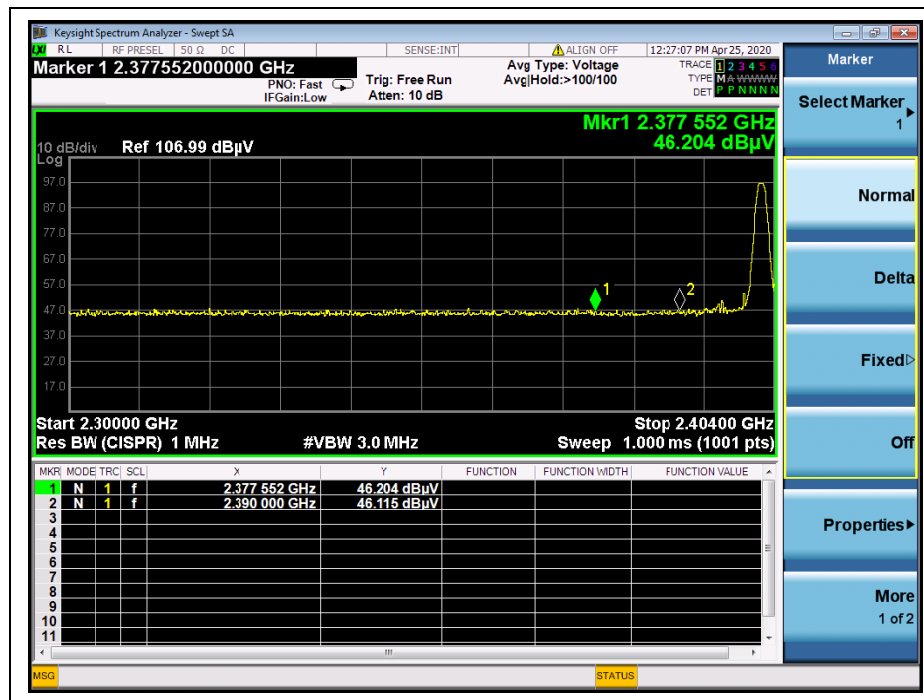


(PEAK, Channel = 0, GFSK)

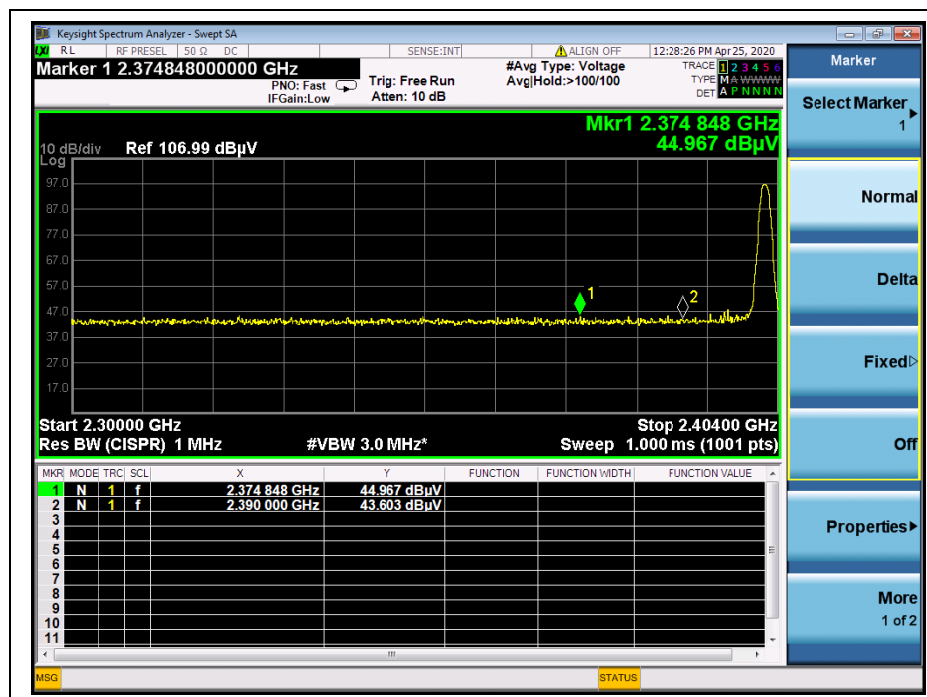

(AVERAGE, Channel = 0, GFSK)

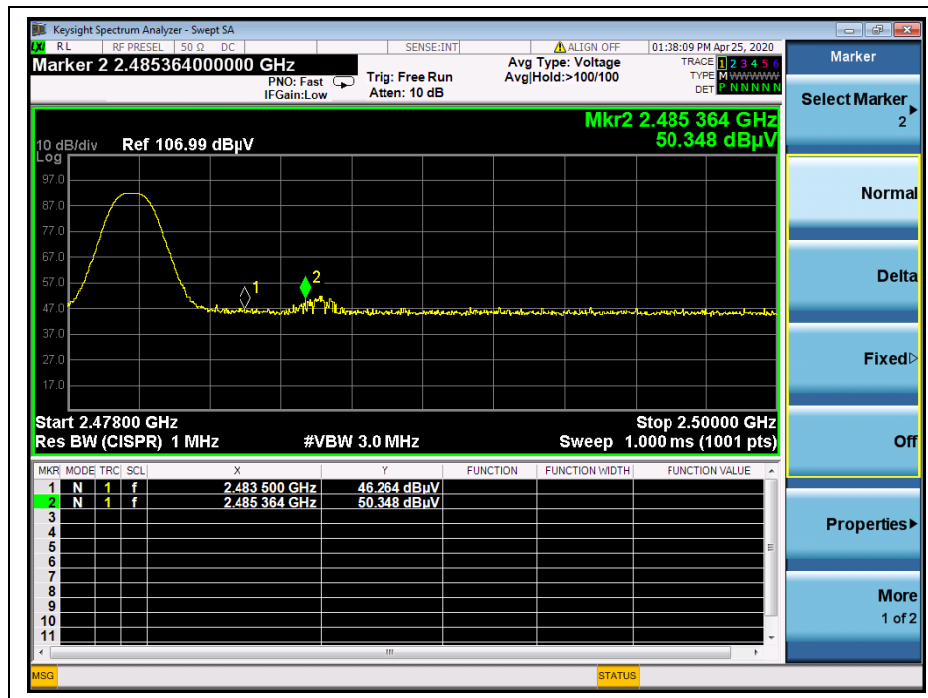

(PEAK, Channel = 78, GFSK)

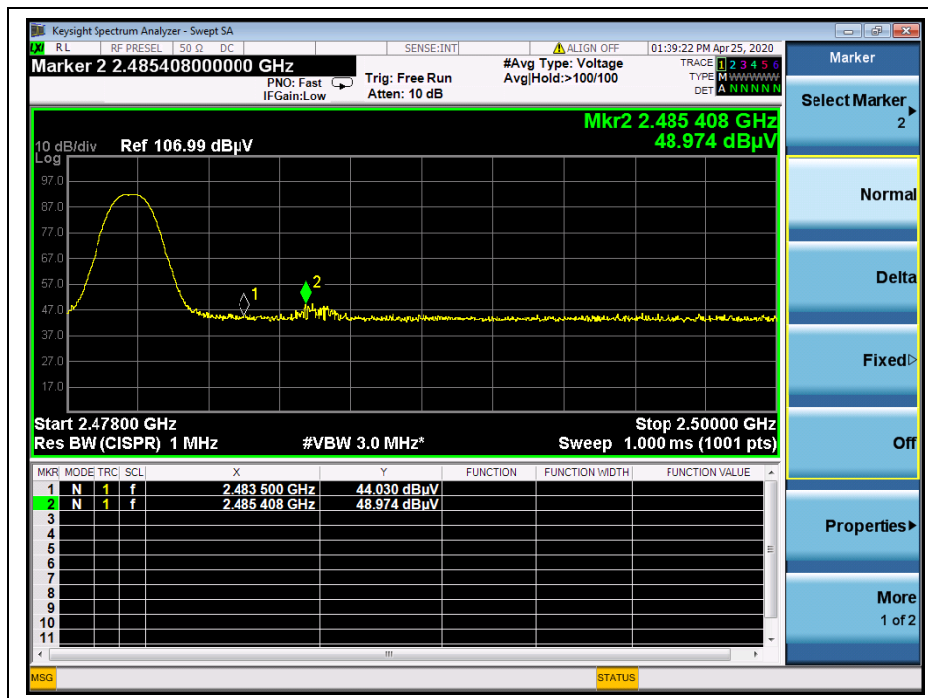

(AVERAGE, Channel = 78, GFSK)




$\pi/4$ -DQPSK Mode



A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2384.42	PK	46.57	-29.67	32.56	49.46	74	PASS
0	2385.35	AV	44.48	-29.67	32.56	47.37	54	PASS
78	2485.69	PK	50.02	-29.67	32.56	52.91	74	PASS
78	2485.94	AV	47.62	-29.67	32.56	50.51	54	PASS

B. Test Plots:

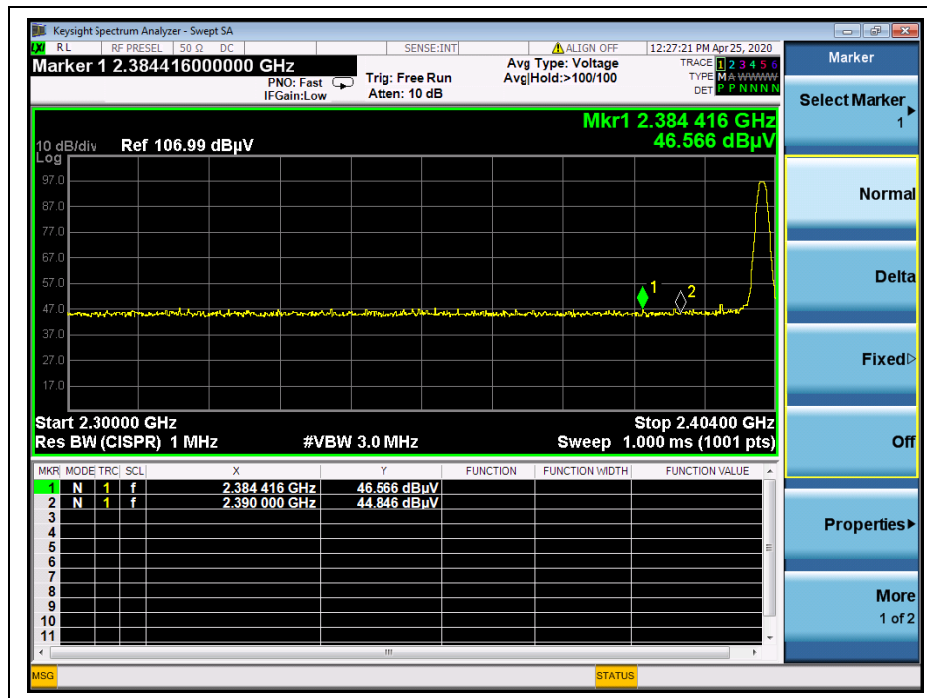

(PEAK, Channel = 0, $\pi/4$ -DQPSK)

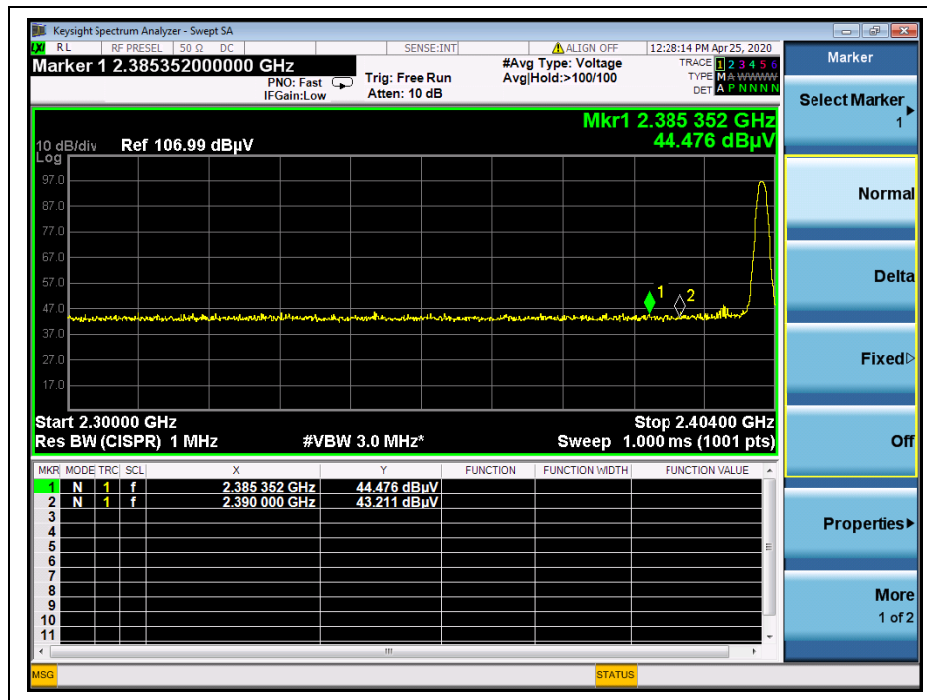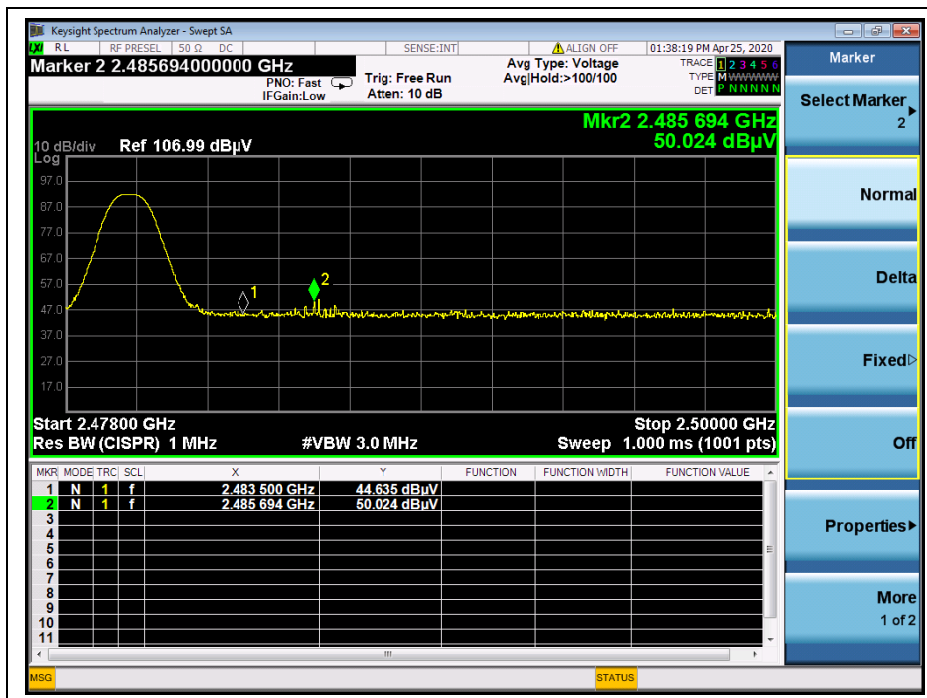(AVERAGE, Channel = 0, $\pi/4$ -DQPSK)(PEAK, Channel = 78, $\pi/4$ -DQPSK)

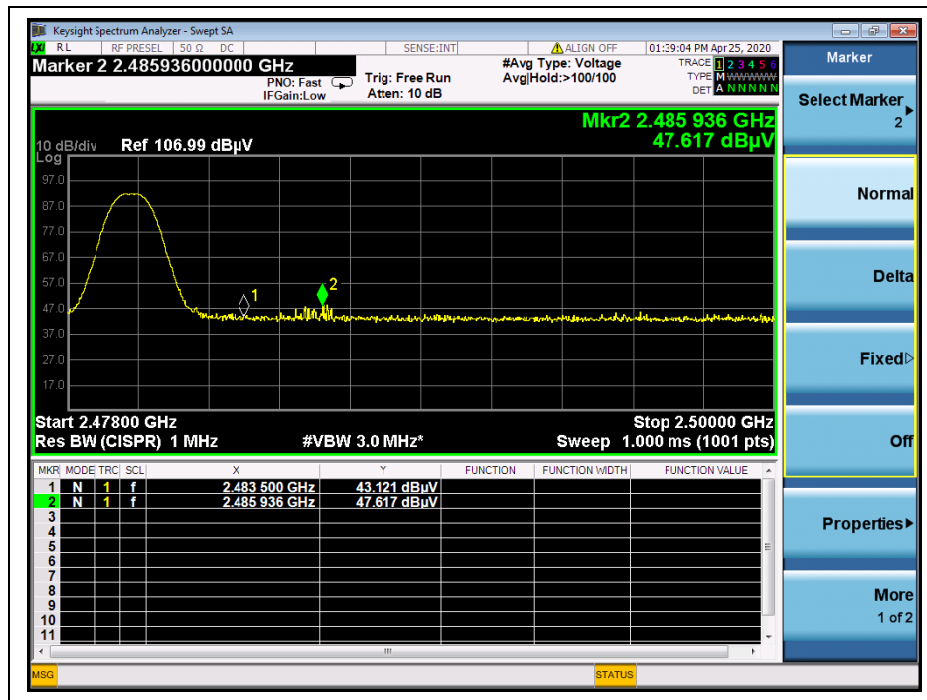(AVERAGE, Channel = 78, $\pi/4$ -DQPSK)




8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2382.02	PK	46.35	-29.67	32.56	49.24	74	PASS
0	2387.02	AV	45.64	-29.67	32.56	48.53	54	PASS
78	2485.45	PK	48.42	-29.67	32.56	51.31	74	PASS
78	2486.13	AV	47.96	-29.67	32.56	50.85	54	PASS


B. Test Plots:

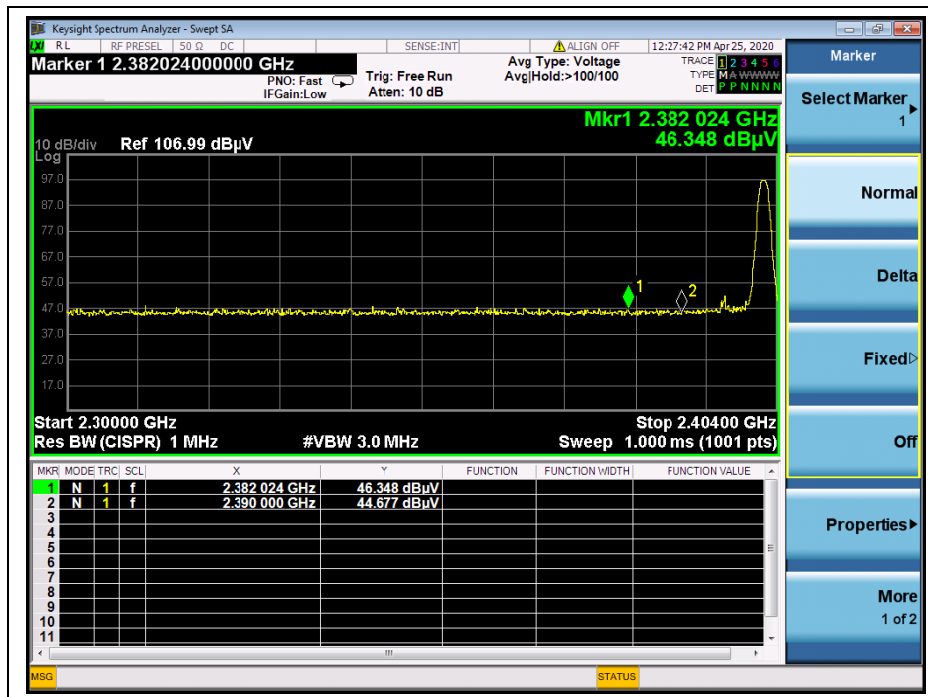


(PEAK, Channel = 0, 8-DPSK)

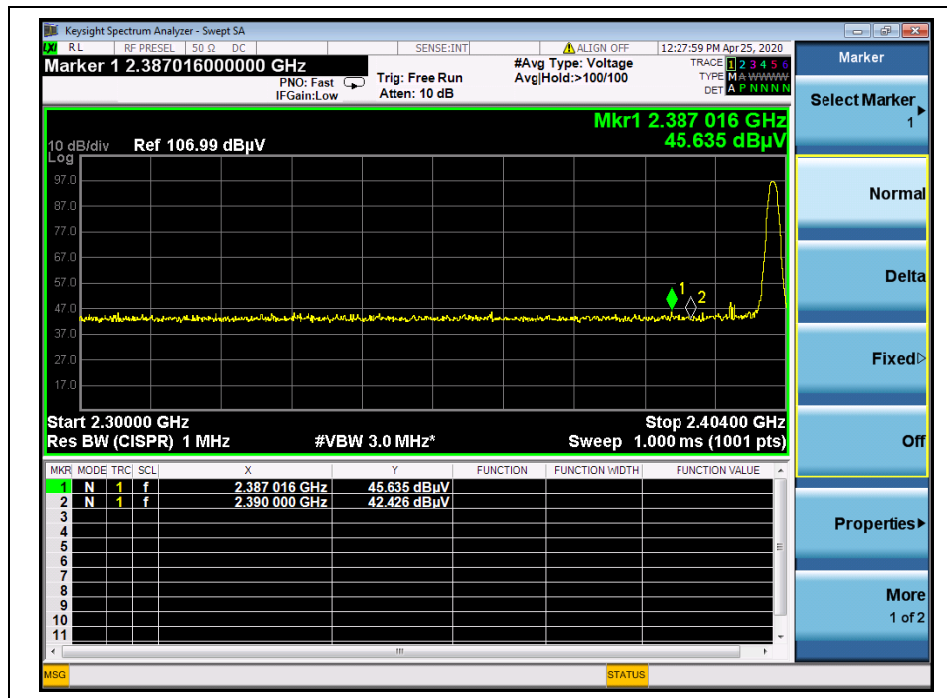

(AVERAGE, Channel = 0, 8-DPSK)

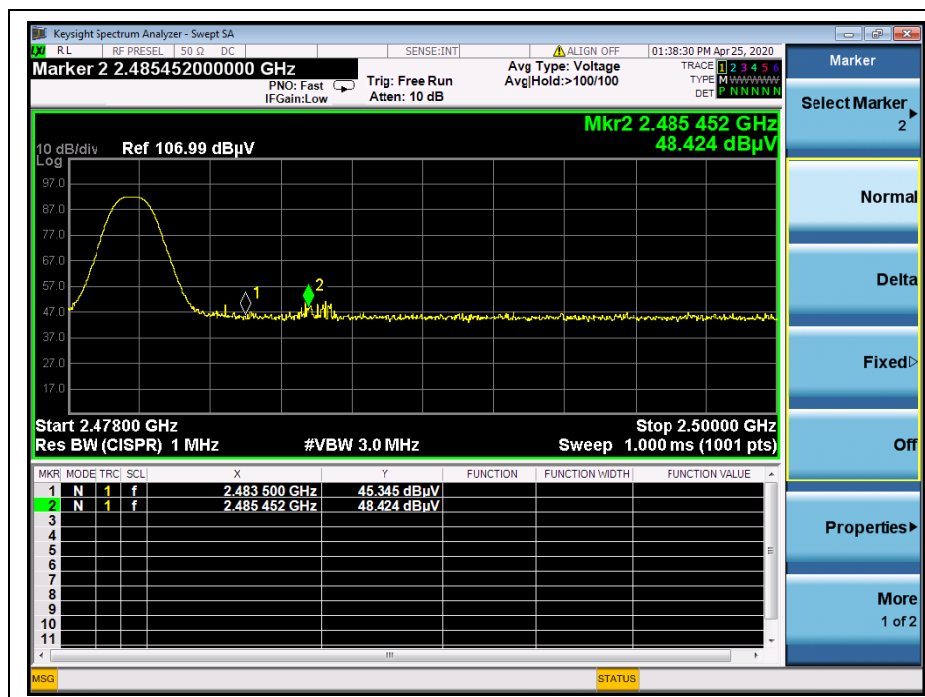

(PEAK, Channel = 78, 8-DPSK)

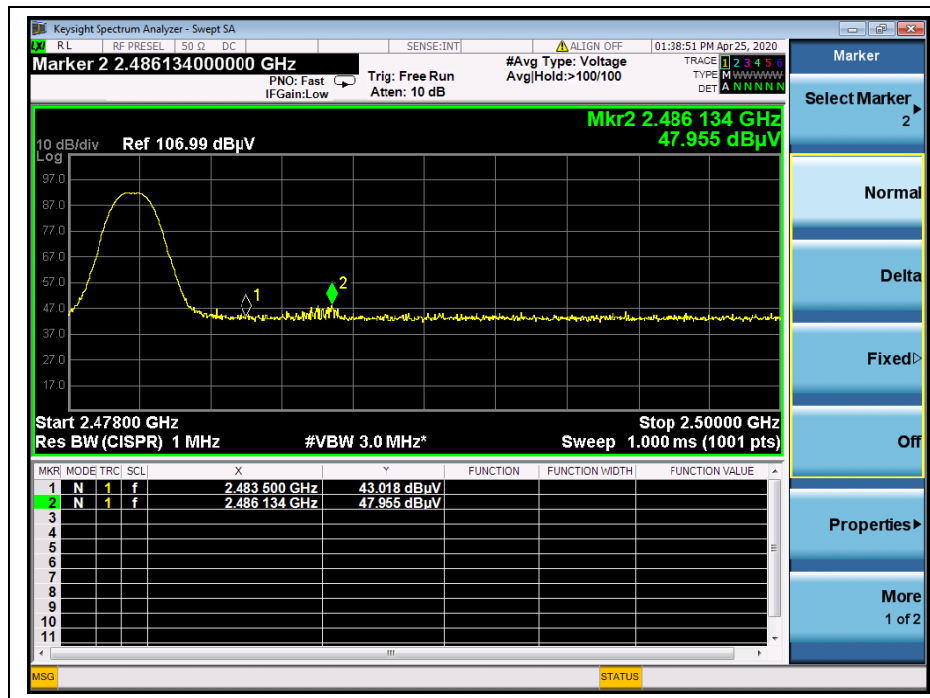

(AVERAGE, Channel = 78, 8-DPSK)




Right

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2384.86	PK	47.40	-29.67	32.56	50.29	74	PASS
0	2390.00	AV	34.07	-29.67	32.56	36.96	54	PASS
78	2485.26	PK	48.02	-29.67	32.56	50.91	74	PASS
78	2483.50	AV	35.06	-29.67	32.56	37.95	54	PASS


B. Test Plots:

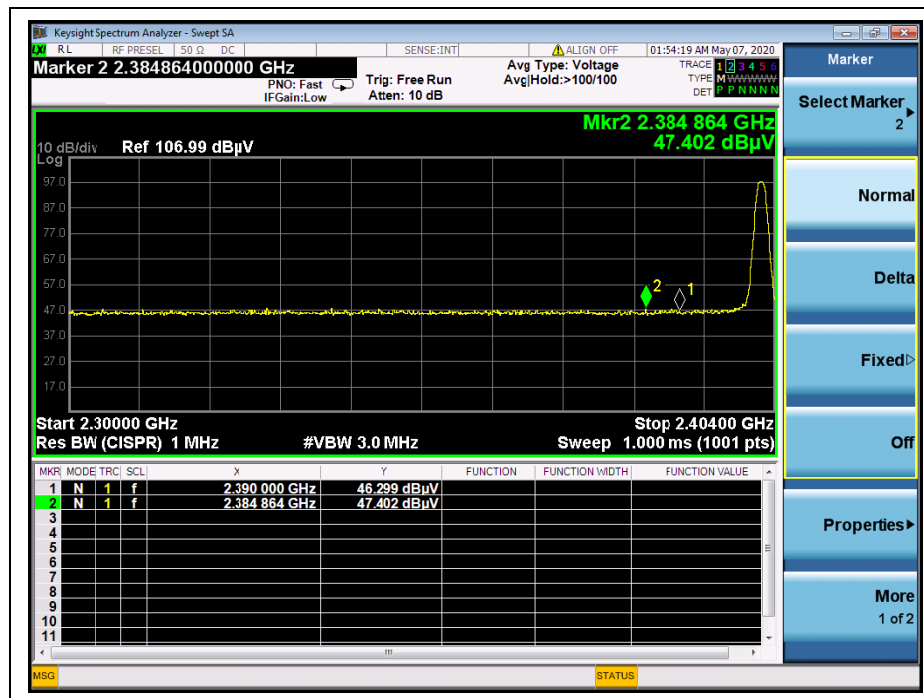


(PEAK, Channel = 0, GFSK)

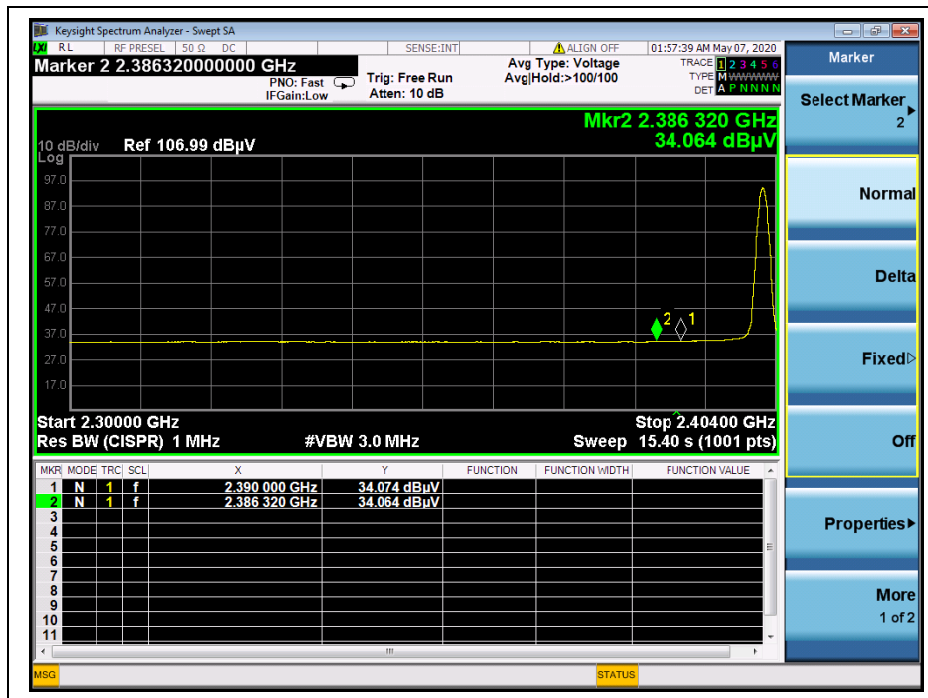

(AVERAGE, Channel = 0, GFSK)

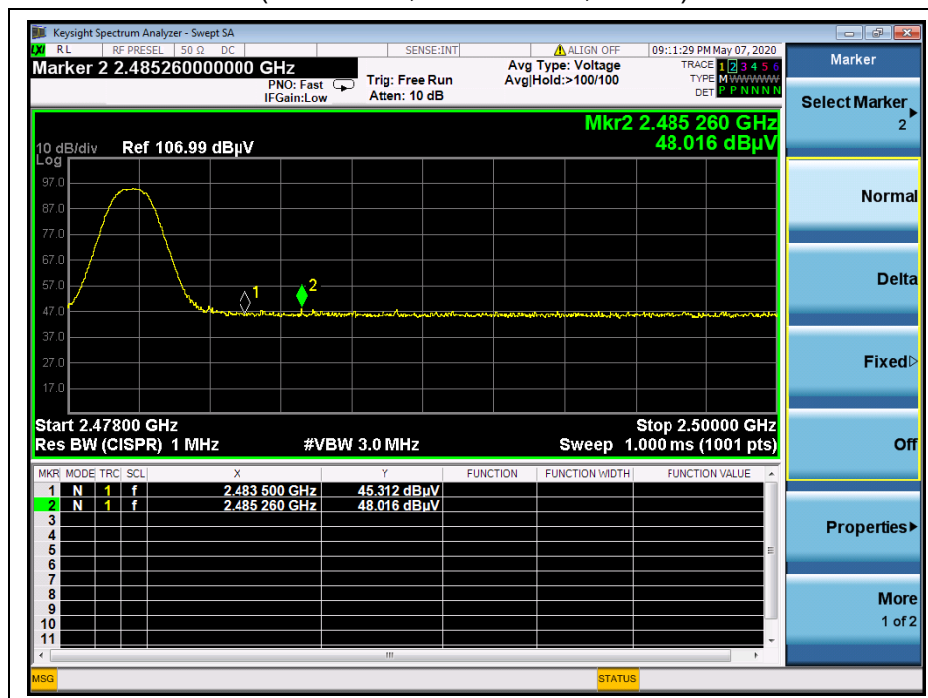

(PEAK, Channel = 78, GFSK)

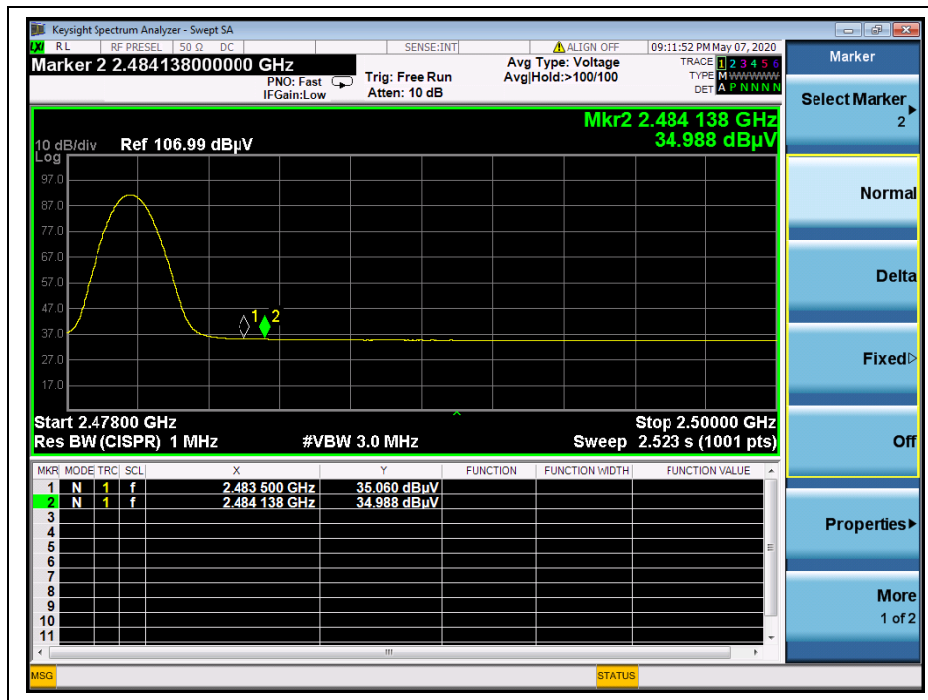

(AVERAGE, Channel = 78, GFSK)




$\pi/4$ -DQPSK Mode



A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2325.79	PK	47.86	-29.67	32.56	50.75	74	PASS
0	2390.00	AV	34.74	-29.67	32.56	37.63	54	PASS
78	2486.10	PK	49.87	-29.67	32.56	52.76	74	PASS
78	2483.50	AV	36.85	-29.67	32.56	39.74	54	PASS

B. Test Plots:

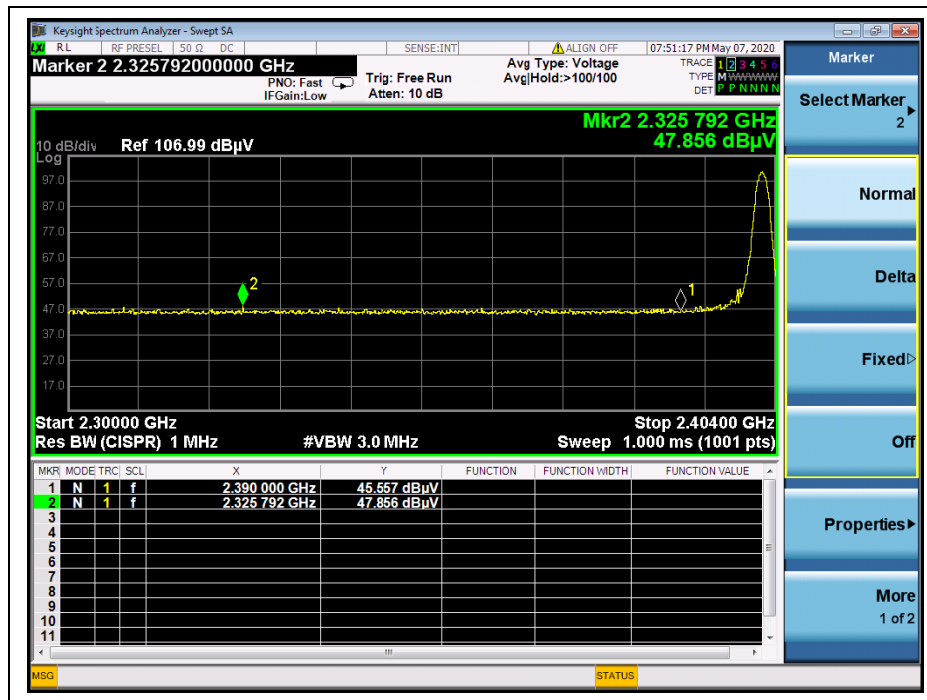

(PEAK, Channel = 0, $\pi/4$ -DQPSK)

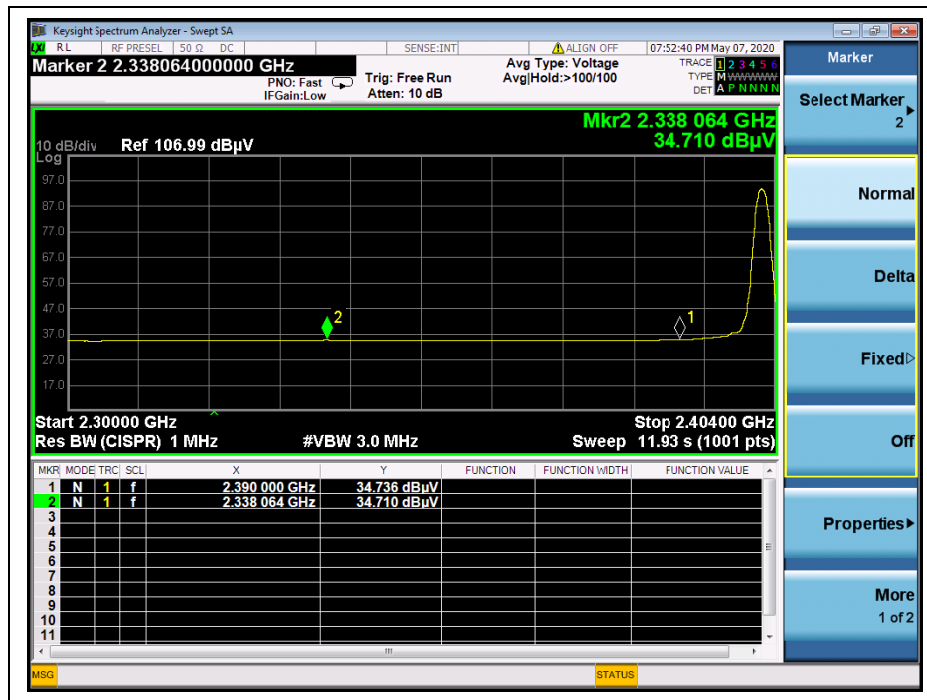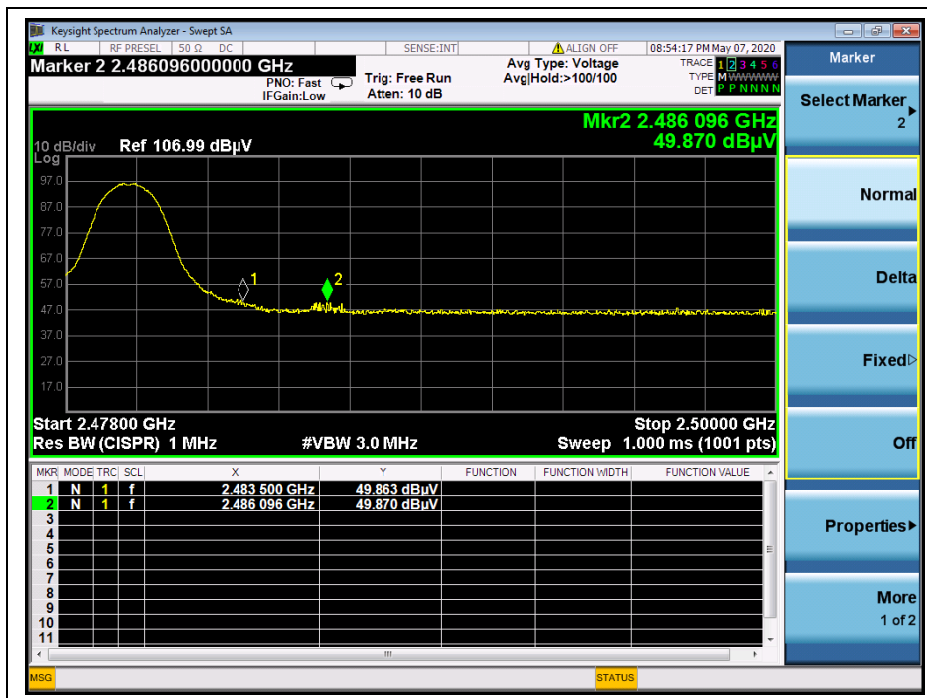(AVERAGE, Channel = 0, $\pi/4$ -DQPSK)(PEAK, Channel = 78, $\pi/4$ -DQPSK)

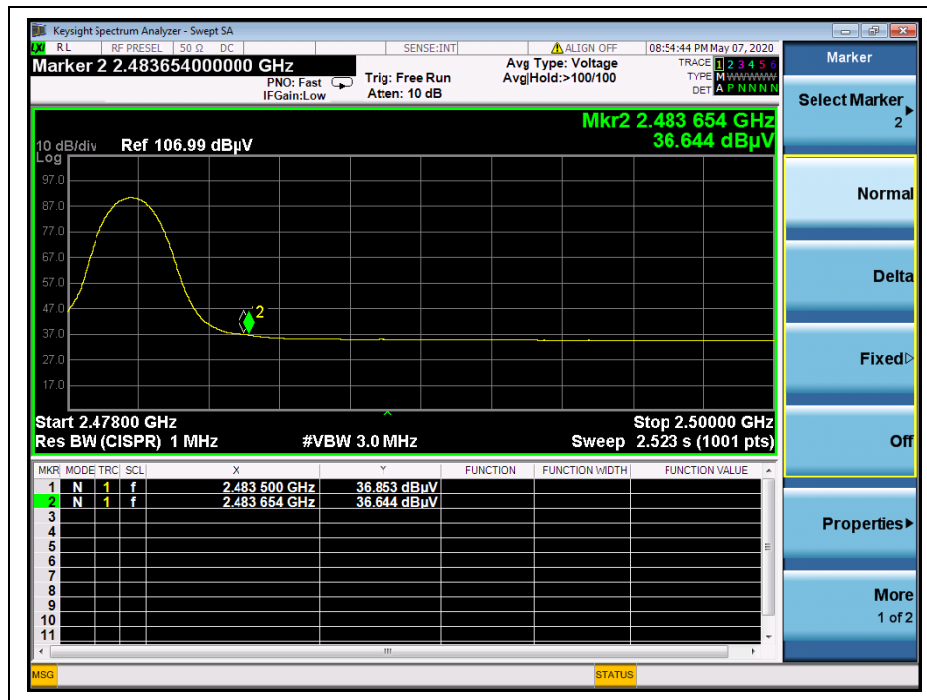(AVERAGE, Channel = 78, $\pi/4$ -DQPSK)




8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2365.42	PK	47.76	-29.67	32.56	50.65	74	PASS
0	2390.00	AV	34.87	-29.67	32.56	37.76	54	PASS
78	2486.10	PK	51.10	-29.67	32.56	53.99	74	PASS
78	2483.50	AV	36.42	-29.67	32.56	39.31	54	PASS


B. Test Plots:

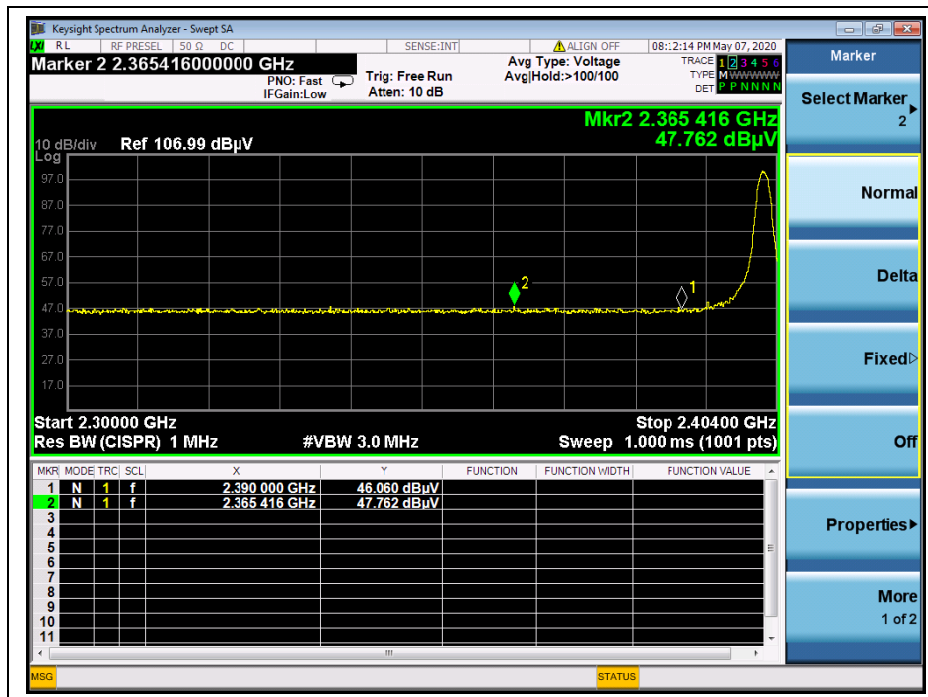


(PEAK, Channel = 0, 8-DPSK)

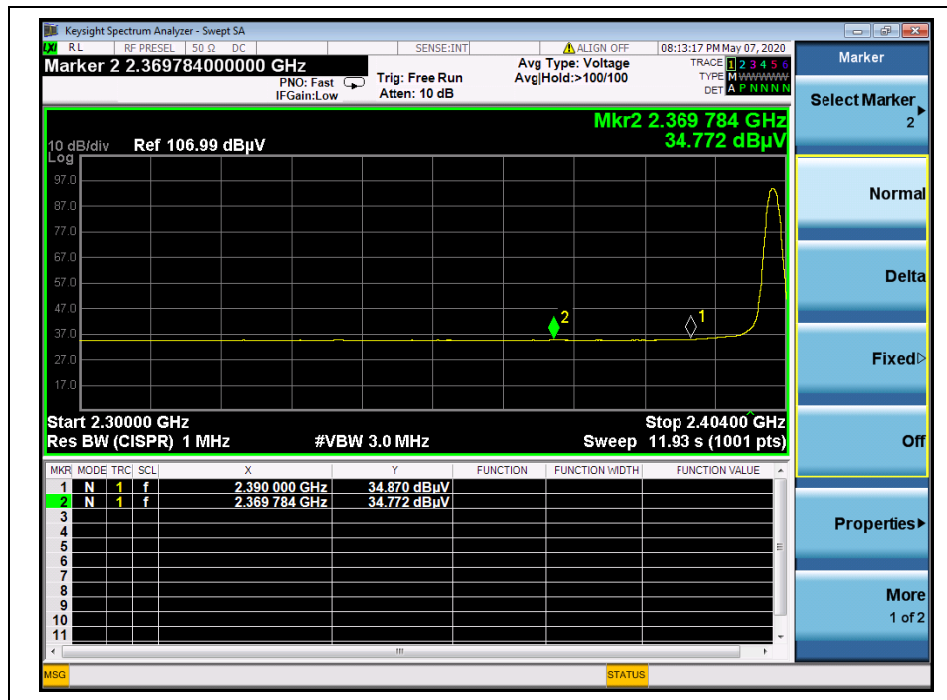

(AVERAGE, Channel = 0, 8-DPSK)

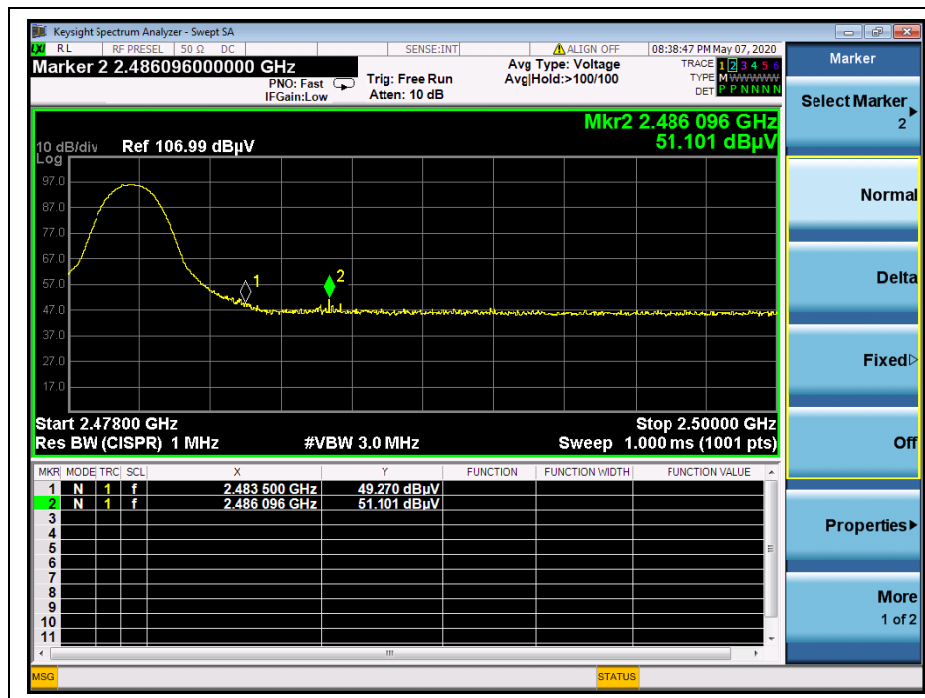

(PEAK, Channel = 78, 8-DPSK)

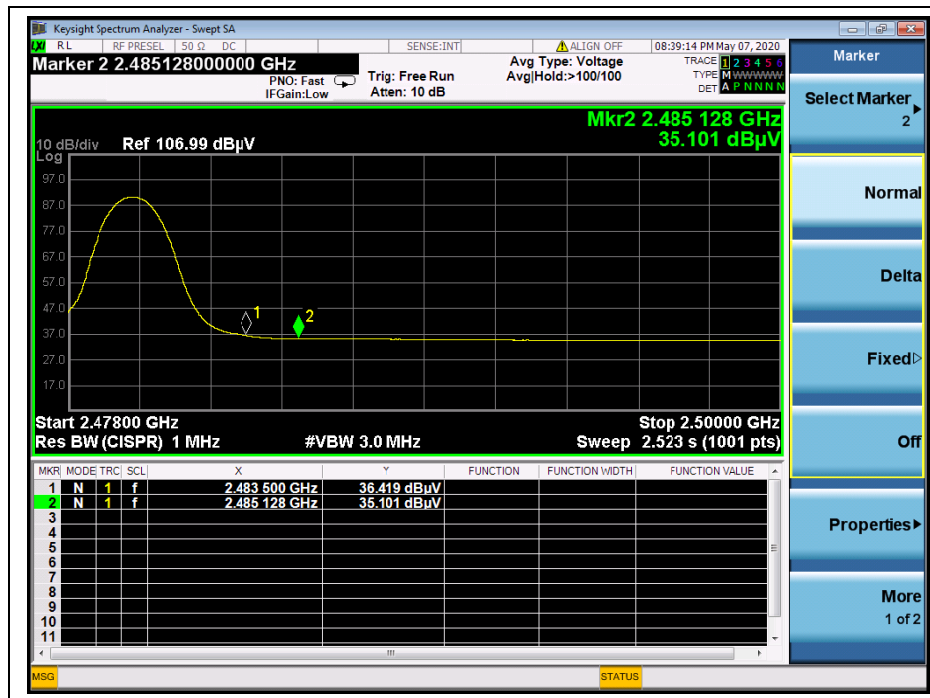

(AVERAGE, Channel = 78, 8-DPSK)

2.13. Radiated Emission

2.13.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.13.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

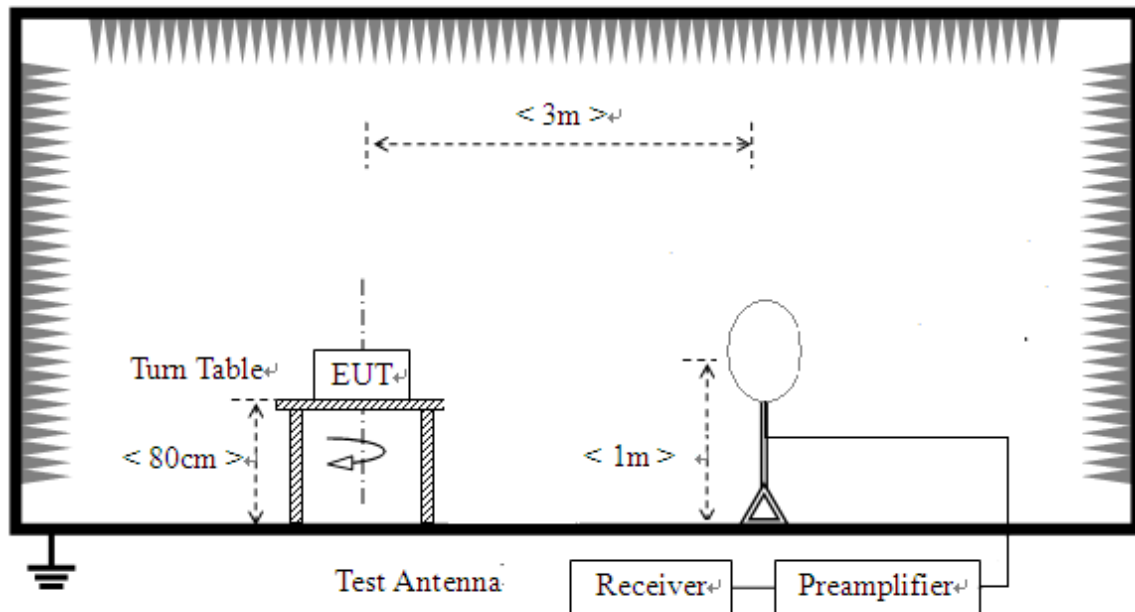

- 2) For radiated emissions from 30MHz to 1GHz

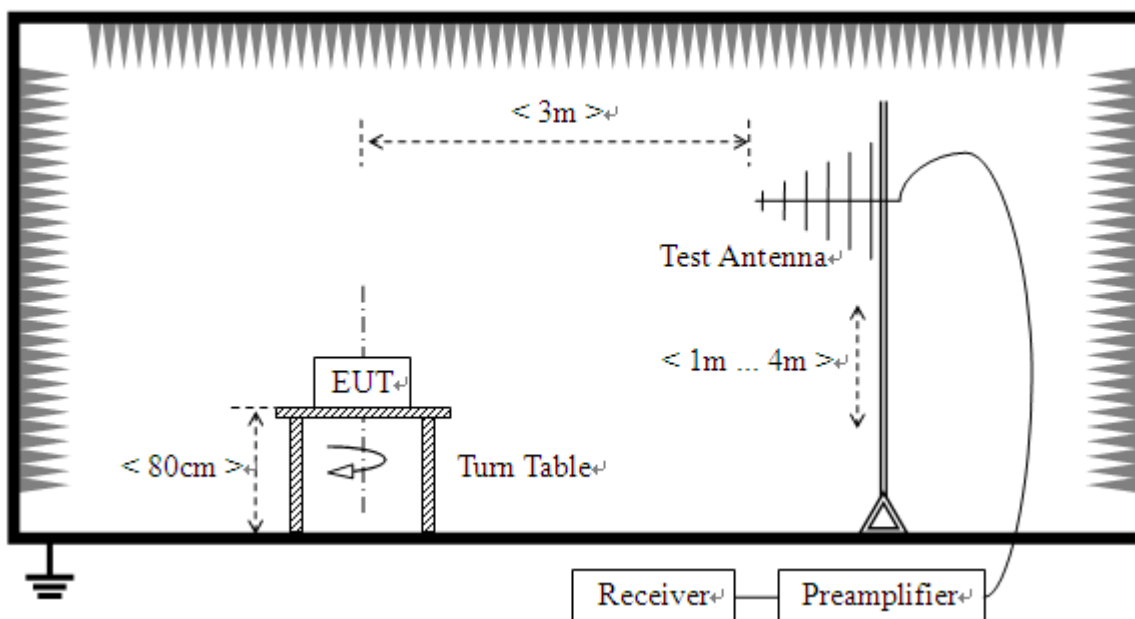

3) For radiated emissions above 1GHz

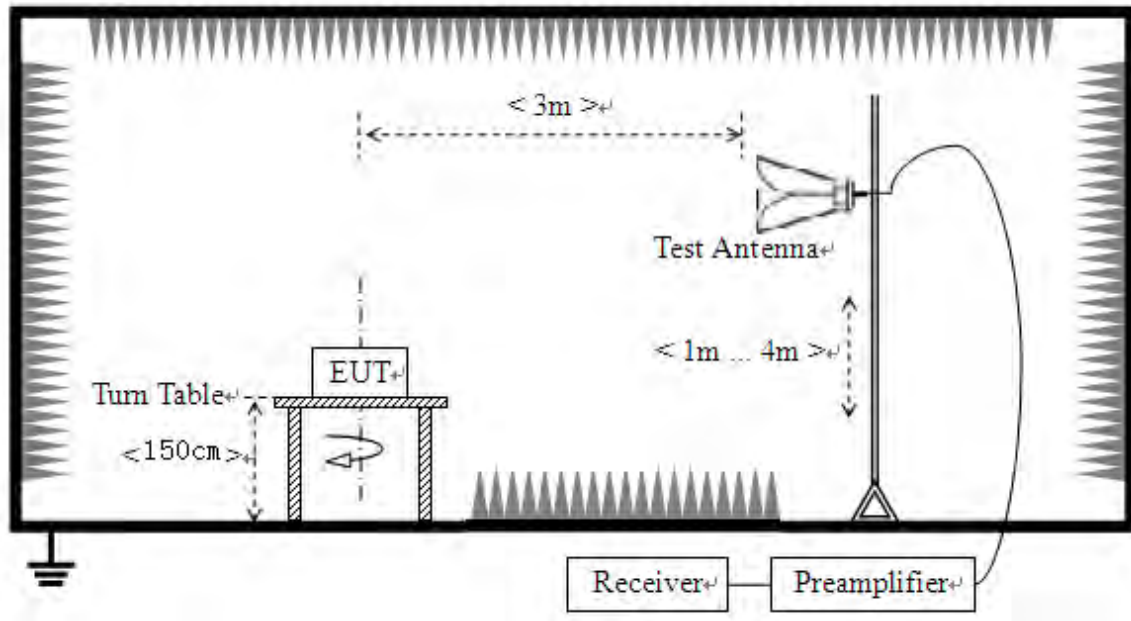

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

2.13.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.13.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




Left GFSK Mode

Plots for Channel = 0

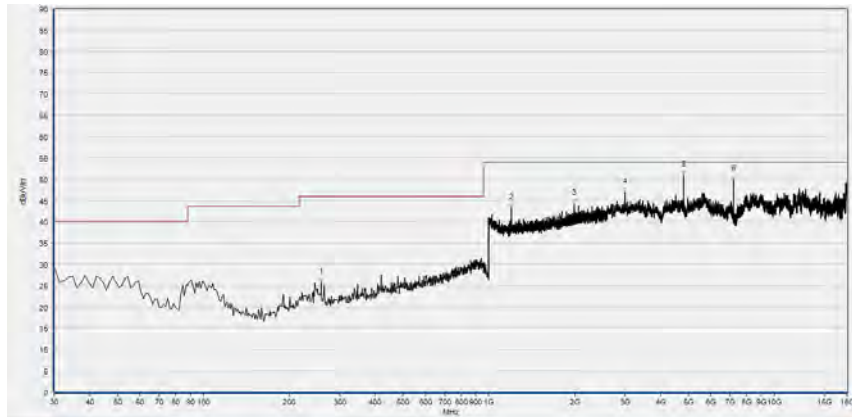

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
258.235	25.86	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1200.400	43.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1996.238	44.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3003.273	46.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4804.001	50.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7206.838	49.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 0)

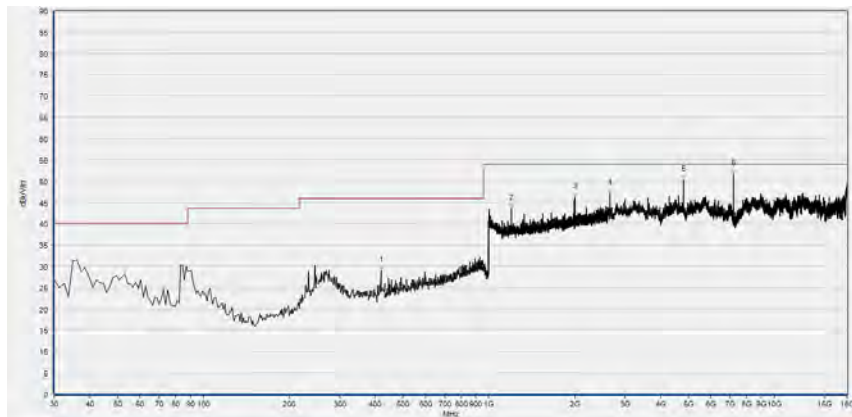

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
419.700	28.94	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1200.400	43.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1999.440	46.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2656.010	47.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4804.001	50.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7206.500	52.69	N/A	43.33	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, GFSK, channel 0)

Plot for Channel = 39

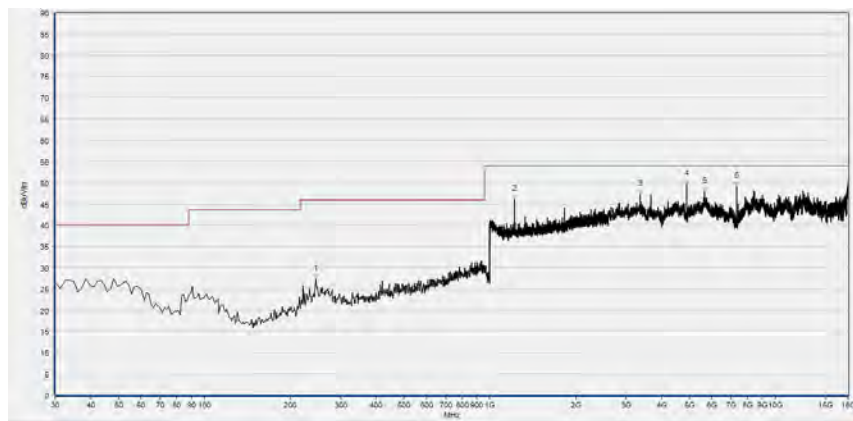

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
246.095	27.30	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1220.248	46.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3364.539	47.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.415	49.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5646.954	47.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7324.459	49.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 39)

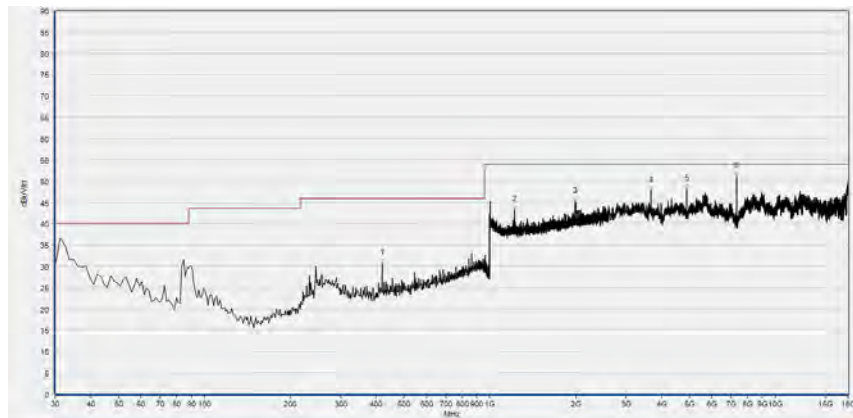

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
419.700	30.59	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1220.248	43.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1995.598	45.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3661.393	47.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4882.415	48.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7323.500	52.67	N/A	43.24	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, GFSK, channel 39)

Plot for Channel = 78

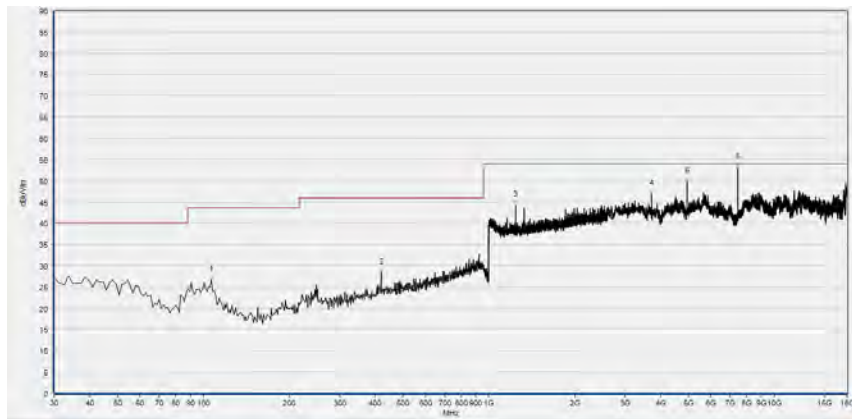

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.483	26.58	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
419.700	28.35	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1240.096	44.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3720.204	47.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4960.829	49.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7439.400	54.57	N/A	44.39	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 78)

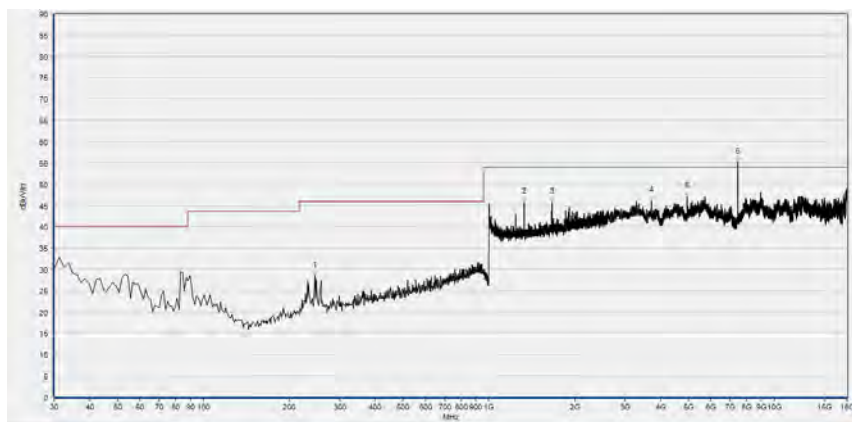


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
246.095	28.55	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1332.293	45.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1663.305	45.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3720.204	46.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4960.829	47.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7440.500	56.59	N/A	47.96	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, GFSK, channel 78)

 **$\pi/4$ -DQPSK Mode**

Plots for Channel = 0

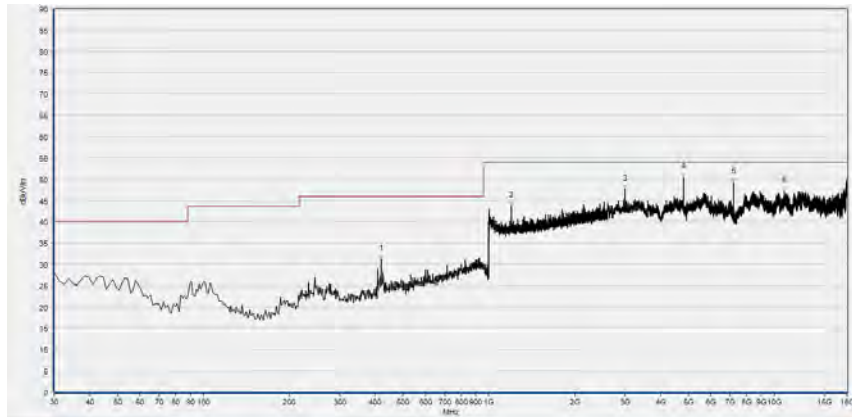


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
419.700	31.14	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1201.040	43.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3003.273	47.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4804.001	50.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7206.838	49.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10869.904	47.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

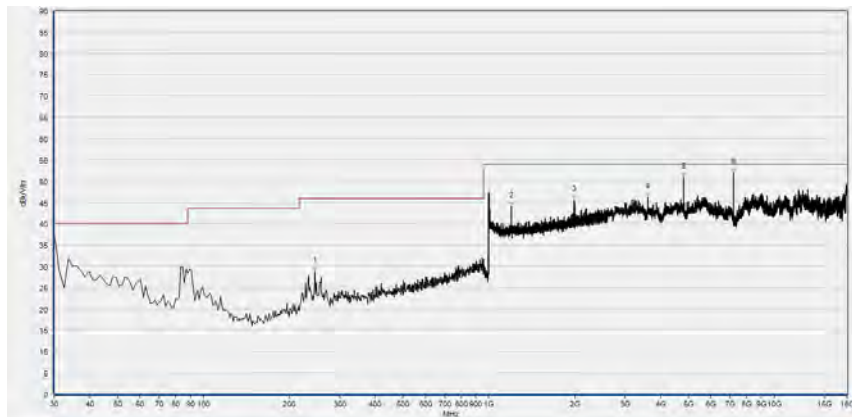(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 0)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
246.095	28.79	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1201.040	44.14	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1994.958	45.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3602.582	46.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4804.001	50.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7205.400	52.02	N/A	40.60	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 0)

Plot for Channel = 39

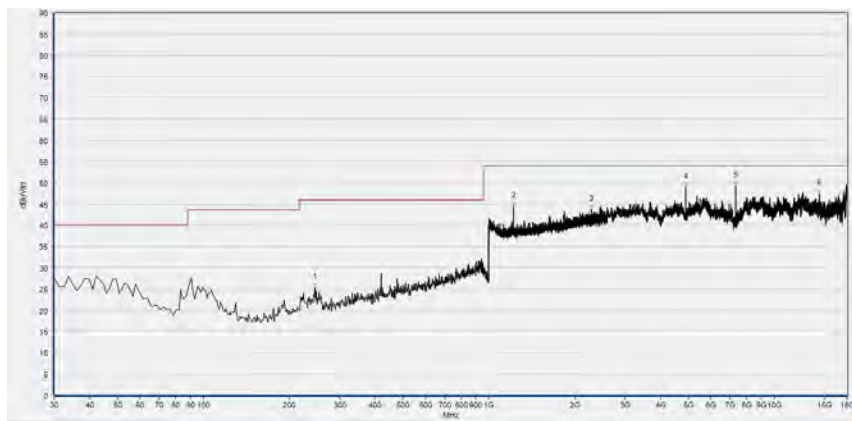


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
246.095	25.30	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1220.248	44.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2288.195	43.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.415	48.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7324.459	49.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14418.149	47.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

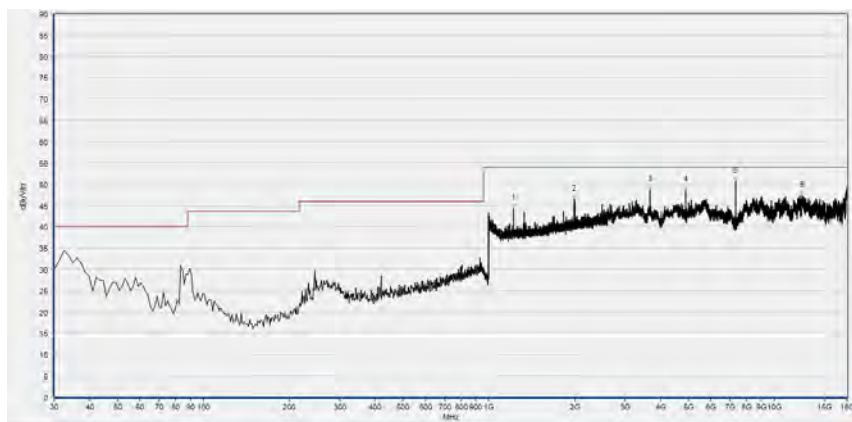(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 39)


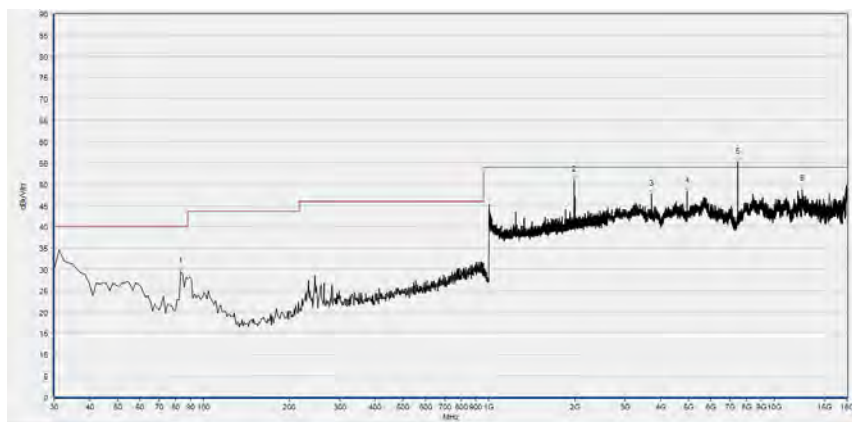
Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1220.248	44.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1991.757	46.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3661.393	48.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4882.415	48.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7324.459	50.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12519.404	47.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 39)

Plot for Channel = 78

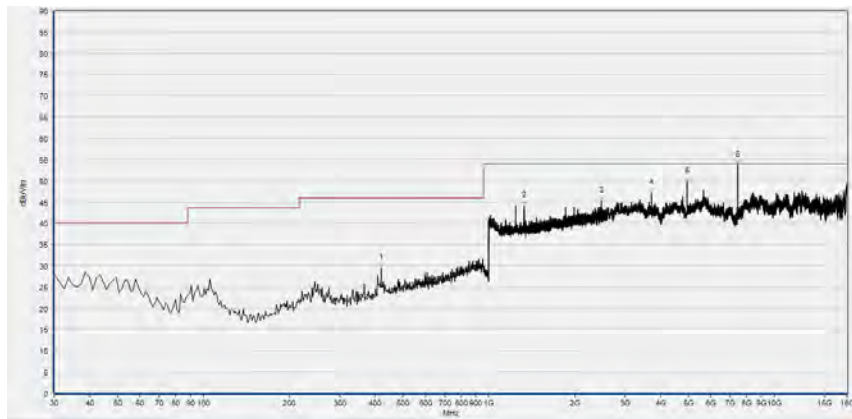

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
419.700	29.48	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1331.653	44.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2480.272	45.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3720.204	47.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4960.829	49.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7440.500	54.86	N/A	44.99	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 78)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
83.417	29.42	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1992.397	50.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3720.204	47.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4960.829	48.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7440.500	56.83	N/A	47.58	74.00	N/A	54.00	Vertical	PASS
12555.810	48.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 78)


**8-DPSK Mode**

Plots for Channel = 0

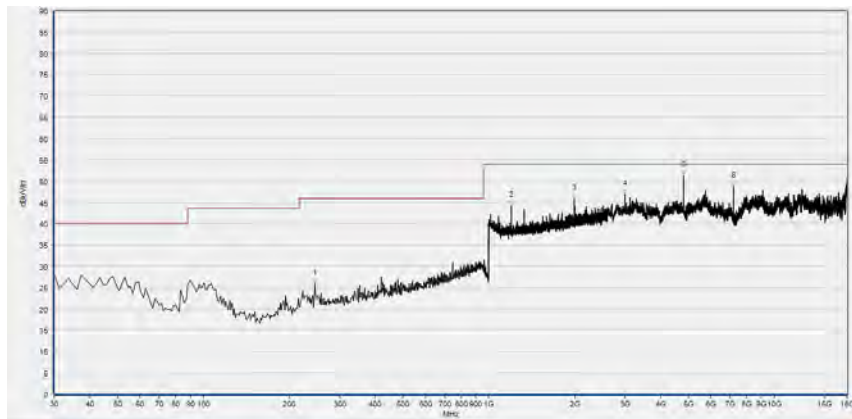

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
246.095	26.00	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1200.400	44.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1991.757	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3003.273	47.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4804.400	51.76	N/A	41.29	74.00	N/A	54.00	Horizontal	PASS
7206.838	48.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 0)

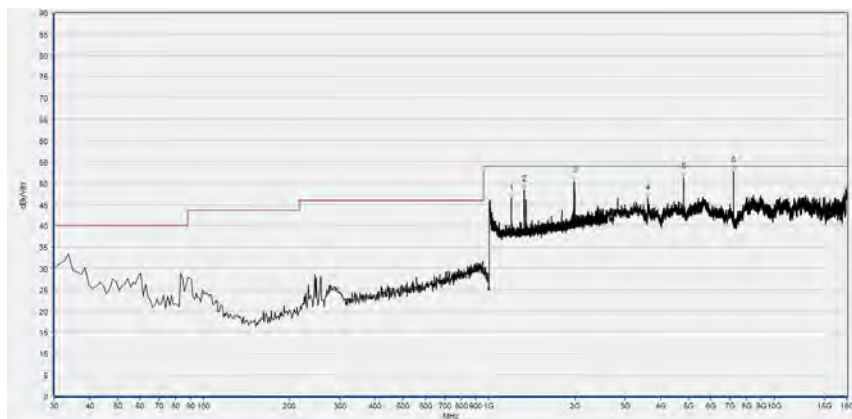

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1200.400	46.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1331.653	48.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1991.116	50.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3602.582	46.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4804.600	51.00	N/A	40.49	74.00	N/A	54.00	Vertical	PASS
7206.300	53.27	N/A	43.61	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 0)

Plot for Channel = 39

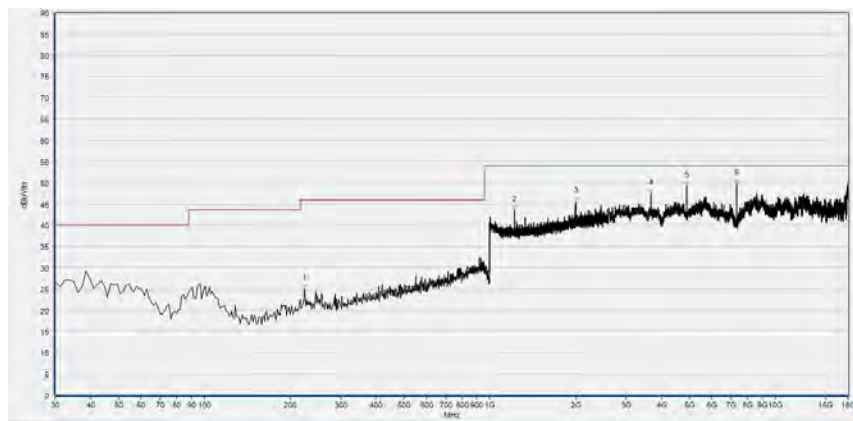

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
224.243	24.91	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1220.888	43.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1999.440	45.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3661.393	47.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.415	49.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7321.658	49.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 39)

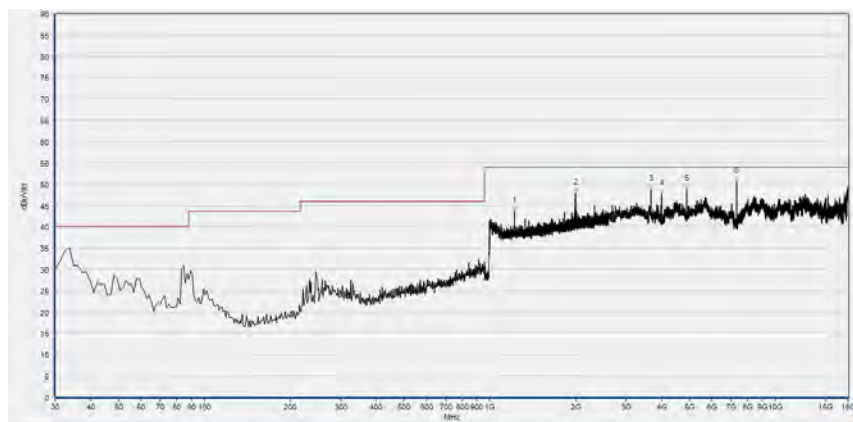

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1220.248	43.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1997.519	47.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3661.393	48.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3994.654	47.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4882.415	48.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7321.658	50.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 39)

Plot for Channel = 78

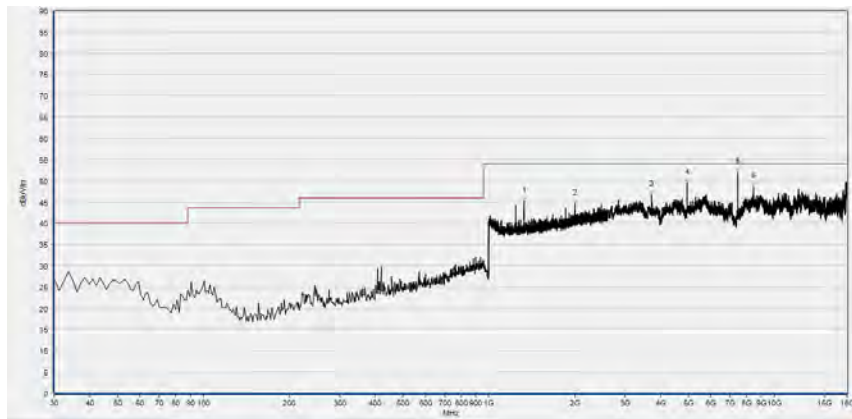

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1327.171	45.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1999.440	44.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3720.204	46.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4960.829	49.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7440.500	54.20	N/A	44.61	74.00	N/A	54.00	Horizontal	PASS
8447.463	48.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 78)

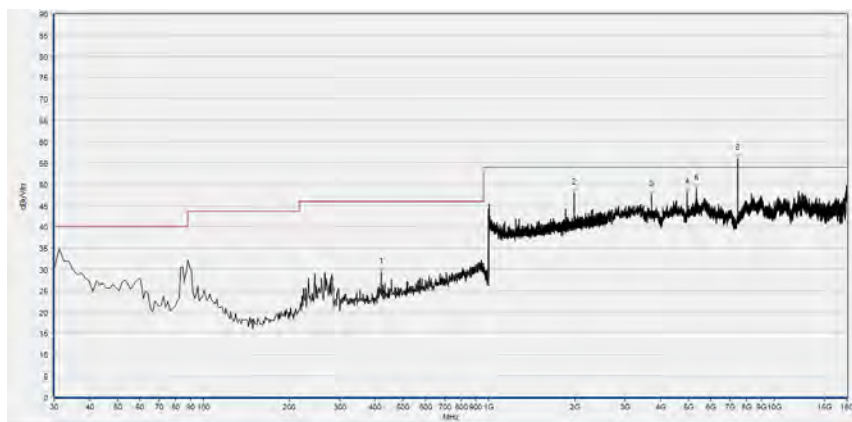


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
419.700	29.35	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1993.037	47.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3720.204	47.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4960.829	48.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5327.696	48.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7440.500	56.61	N/A	47.46	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 78)




Right GFSK Mode

Plots for Channel = 0

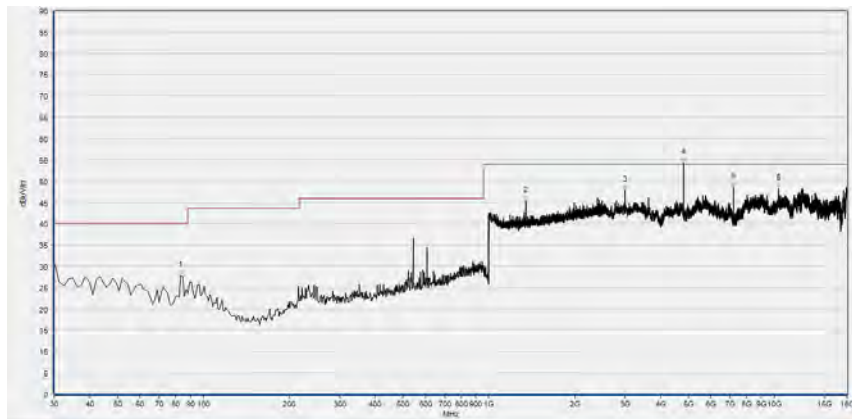

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
83.417	27.83	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
1349.580	45.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3003.273	47.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4803.600	54.32	N/A	45.54	74.00	N/A	54.00	Horizontal	PASS
7204.037	48.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10340.607	48.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 0)

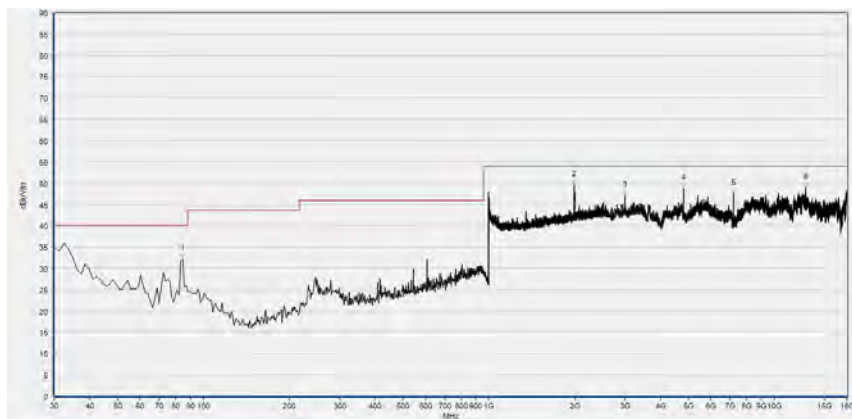

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
84.631	32.12	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1994.958	49.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3003.273	47.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4804.001	48.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7206.838	47.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12900.273	48.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, GFSK, channel 0)

Plot for Channel = 39

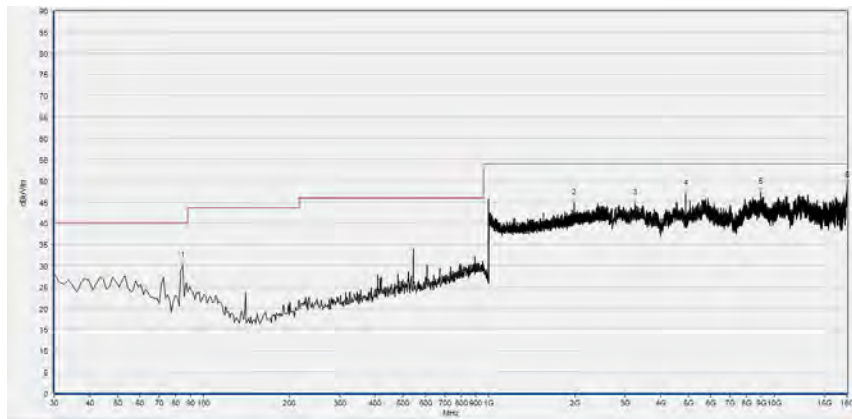

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
84.631	30.07	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
1993.677	44.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3255.319	44.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.415	46.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8940.353	47.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17988.798	48.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 39)

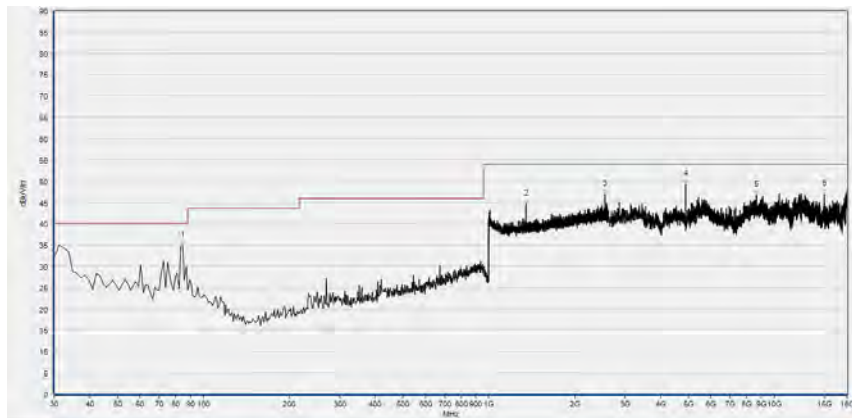

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
84.631	34.81	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1350.220	44.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2545.578	46.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4882.415	49.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8640.698	46.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15000.655	46.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, GFSK, channel 39)

Plot for Channel = 78

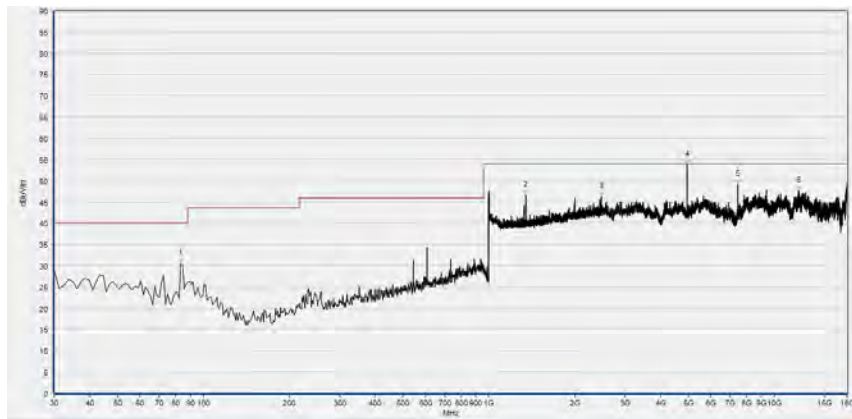

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
83.417	30.55	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
1349.580	46.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2480.272	46.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4960.200	53.82	N/A	46.13	74.00	N/A	54.00	Horizontal	PASS
7439.280	49.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12132.933	47.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 78)

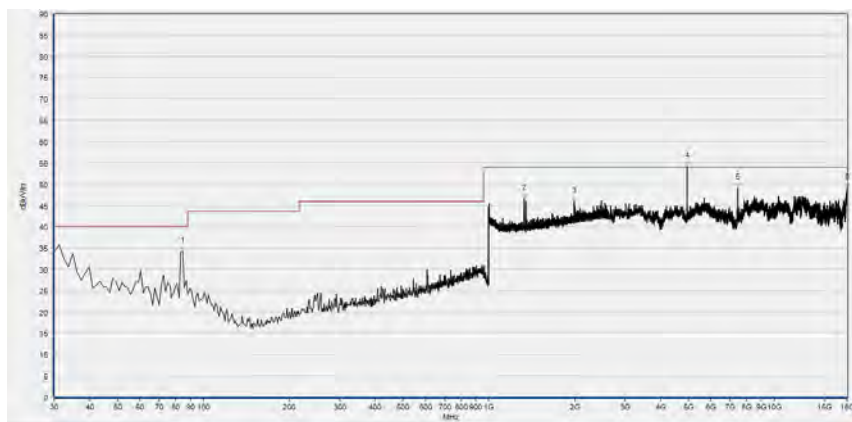


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
84.631	34.16	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1331.653	46.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1991.757	45.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4960.200	54.01	N/A	46.63	74.00	N/A	54.00	Vertical	PASS
7439.280	49.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17955.192	49.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, GFSK, channel 78)

 **$\pi/4$ -DQPSK Mode**

Plots for Channel = 0

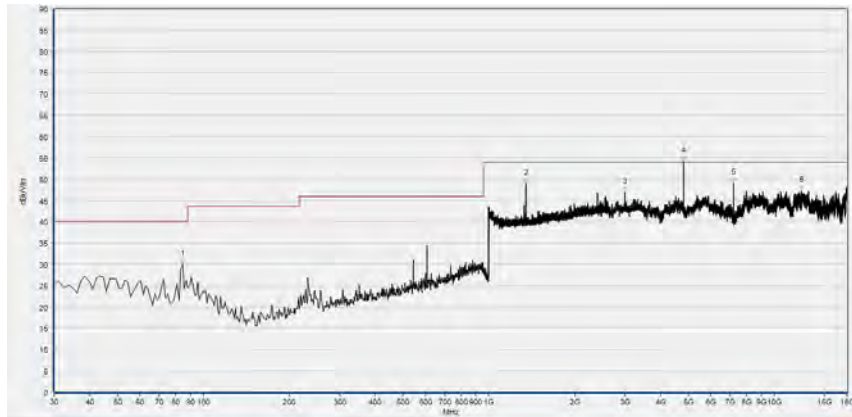


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
84.631	30.06	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
1350.220	48.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3003.273	46.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4804.400	54.05	N/A	43.87	74.00	N/A	54.00	Horizontal	PASS
7204.037	49.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12480.196	47.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

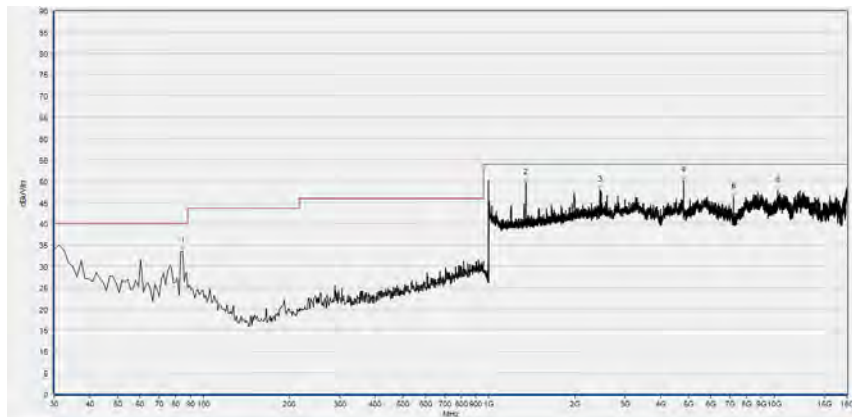(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 0)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
84.631	33.47	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1349.580	49.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2455.942	47.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4804.001	50.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7206.838	46.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10284.597	47.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 0)

Plot for Channel = 39

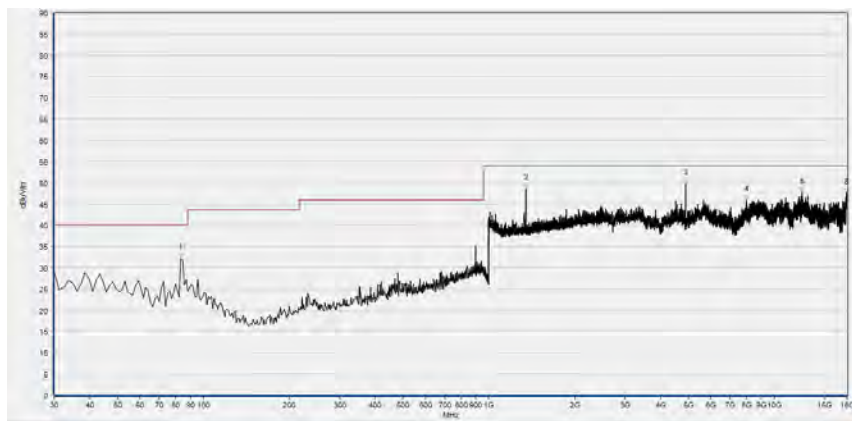


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
83.417	32.25	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
1350.220	48.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.415	49.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7971.377	45.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12536.207	47.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17927.187	47.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

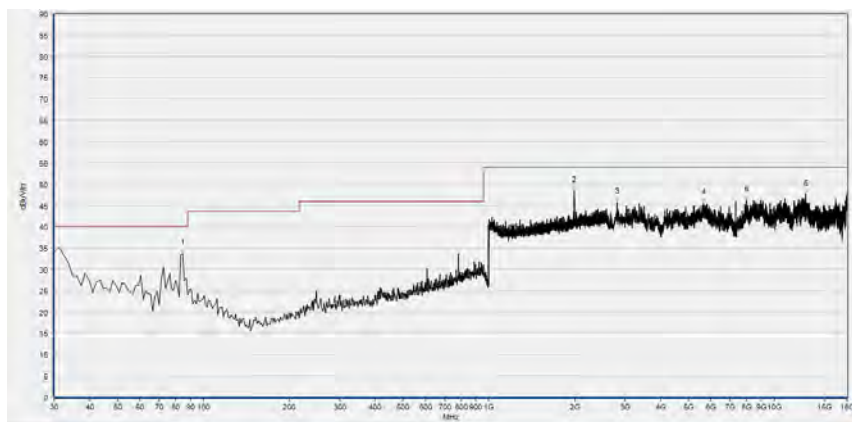(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 39)


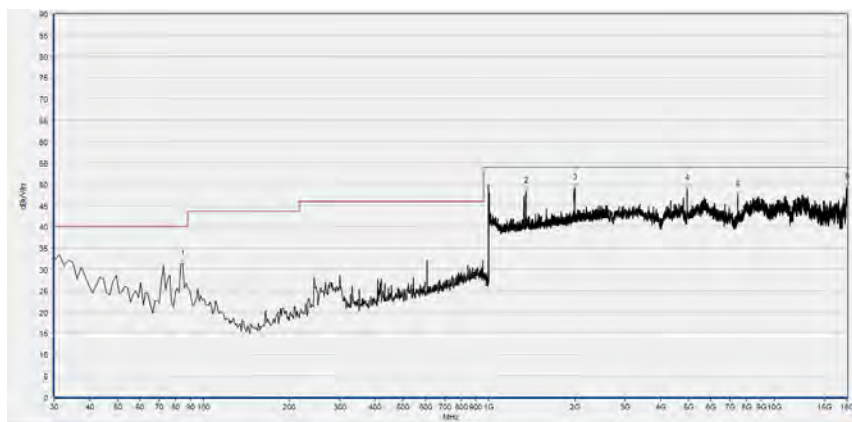
Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
84.631	33.68	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1995.598	48.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2807.238	45.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5649.755	45.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7996.581	46.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12919.876	47.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 39)

Plot for Channel = 78

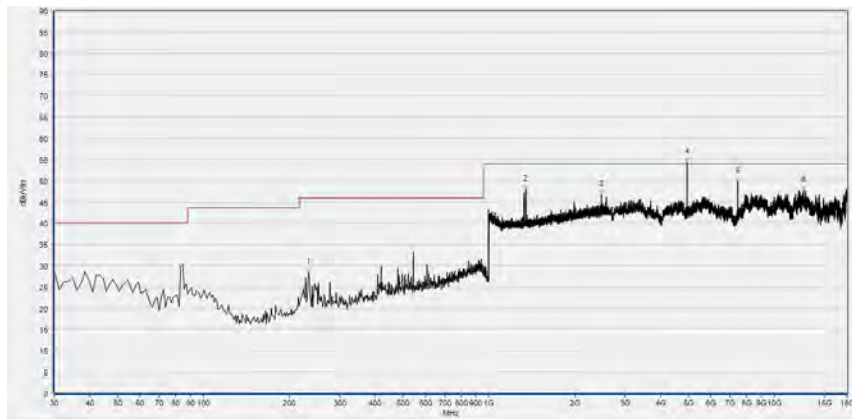

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
233.955	28.46	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1349.580	48.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2479.632	46.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4960.829	54.26	N/A	47.63	74.00	N/A	54.00	Horizontal	PASS
7439.280	49.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12679.033	47.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 78)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
84.631	31.22	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1350.220	48.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2000.080	49.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4960.829	49.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7439.280	47.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17969.194	49.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 78)


**8-DPSK Mode**

Plots for Channel = 0

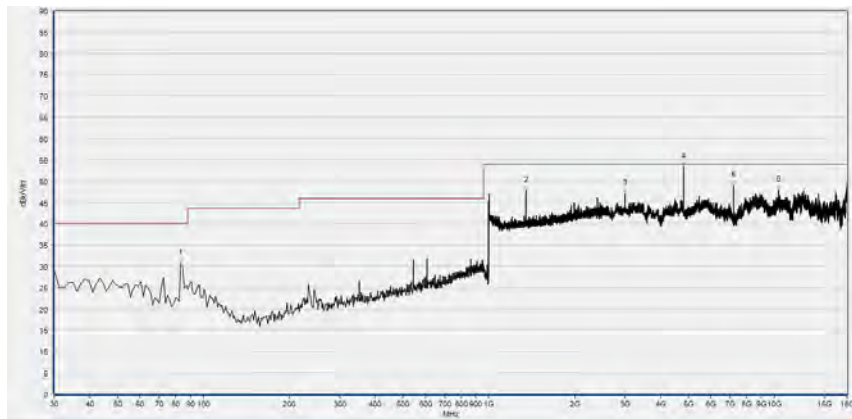

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
83.417	30.64	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
1350.220	47.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3003.273	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4804.001	53.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7204.037	49.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10365.812	47.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 0)

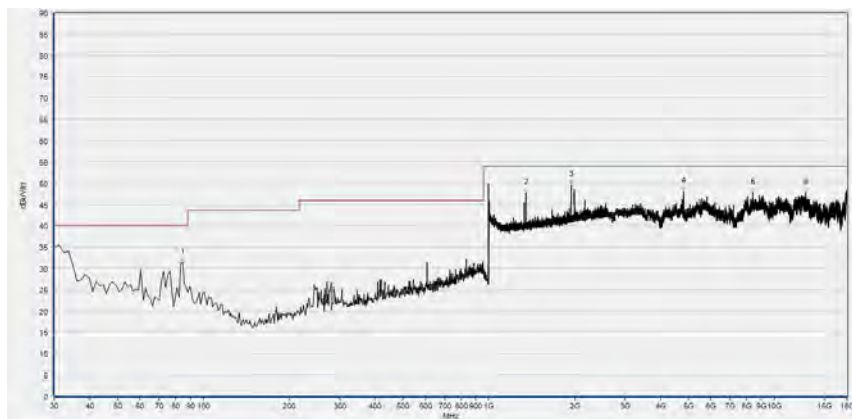

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
84.631	31.27	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1350.220	47.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1941.817	49.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4804.001	48.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8416.658	47.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12897.472	47.79	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 0)

Plot for Channel = 39

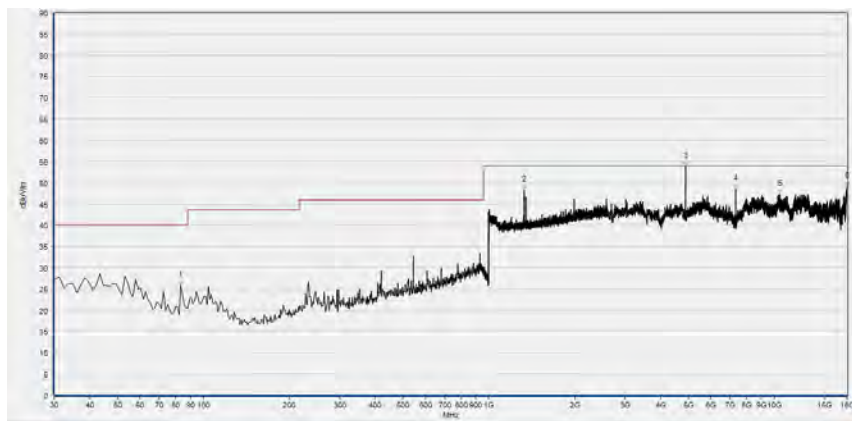

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
83.417	25.87	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
1332.293	48.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.400	53.87	N/A	43.69	74.00	N/A	54.00	Horizontal	PASS
7324.459	48.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10444.226	47.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17980.396	49.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 39)

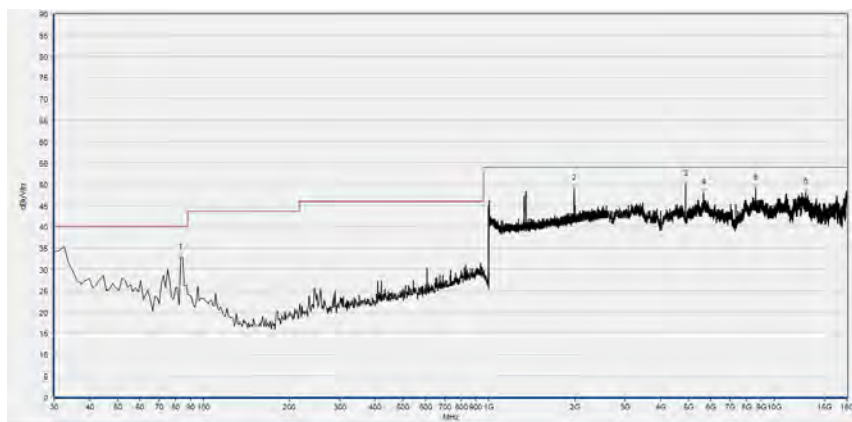

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
83.417	32.65	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1994.318	49.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4882.415	49.99	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5655.356	47.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8593.090	48.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12889.071	48.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 39)

Plot for Channel = 78

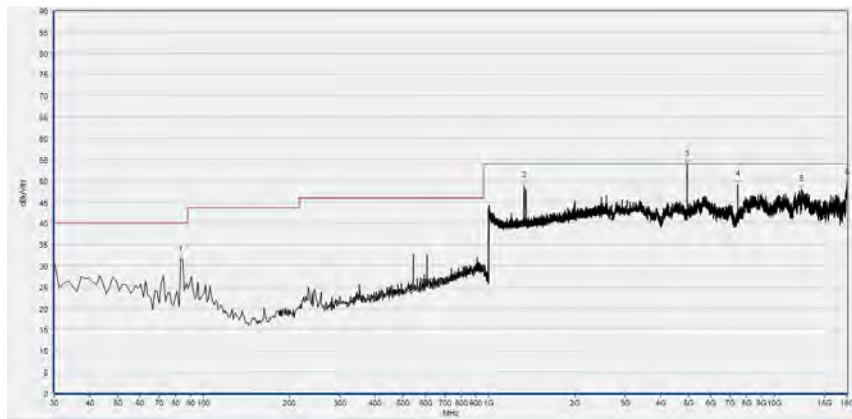

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
83.417	31.27	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
1332.293	48.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4959.700	53.79	N/A	46.90	74.00	N/A	54.00	Horizontal	PASS
7439.280	49.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12482.997	47.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17966.394	49.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 78)

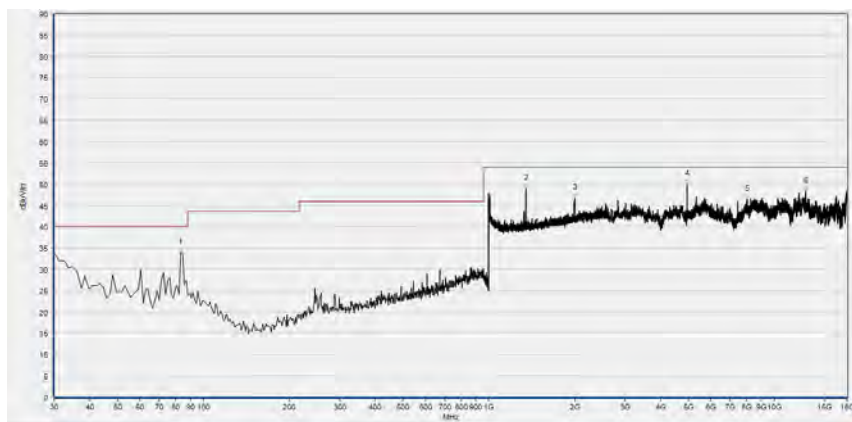

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
83.417	33.89	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1350.220	48.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1998.159	46.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4960.829	49.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8030.187	46.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12897.472	48.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 78)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77 dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2020.04.01	2021.03.31
Directional coupler	17041703	DTO-5-30	ShangHai Huaxiang	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0

**4.3 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2019.07.29	2020.07.28
Test Antenna - Bi-Log	9163-520	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1520-022	FMZB1520	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2019.07.29	2020.07.28
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2019.07.29	2020.07.28
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2019.12.01	2020.12.01
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

_____ END OF REPORT _____