

SAR Test Report

Report No.: AGC10211220601FH01

FCC ID : 2AYVXFIRTSS6001

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: 4G Mobile Phone

BRAND NAME : GYRO

MODEL NAME : S6001

APPLICANT FIRTS COMMUNICATIONS AND TECHNOLOGIES DE MEXICO, S.A. DE

· C.V

DATE OF ISSUE : Aug. 03, 2022

IEEE Std. 1528:2013

STANDARD(S)FCC 47 CFR Part 2§2.1093

: IEEE 5td COE 1 ™ 2005

IEEE Std C95.1 ™-2005 IEC 62209-1: 2016

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.





Page 2 of 160

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 03, 2022	Valid	Initial Release



Page 3 of 160

Test Report			
Applicant Name	FIRTS COMMUNICATIONS AND TECHNOLOGIES DE MEXICO, S.A. DE C.V		
Applicant Address	Av Chapultepec #480, Cuauhtemoc, C.P. 06700, Piso 12 Colony Spaces; Ciudad de Mexico; Mexico		
Manufacturer Name	TENCH (HK) INFORMATION CO., LTD		
Manufacturer Address	Room 501 5/F, Huafeng International Robotics Industrial Park, Hangcheng Avenue, Xixiang Street, Baoan District, Shenzhen, China		
Factory Name	TENCH (HK) INFORMATION CO., LTD		
Factory Address	Room 501 5/F, Huafeng International Robotics Industrial Park, Hangcheng Avenue, Xixiang Street, Baoan District, Shenzhen, China		
Product Designation	4G Mobile Phone		
Brand Name	GYRO		
Model Name	S6001		
EUT Voltage	DC3.8V by battery		
Applicable Standard	IEEE Std. 1528:2013 FCC 47 CFR Part 2§2.1093 IEEE Std C95.1 ™-2005 IEC 62209-1: 2016		
Test Date	Jul. 21, 2022 to Jul. 29, 2022		
Report Template	AGCRT-US-4G/SAR (2021-04-20)		

Note: The results of testing in this report apply to the product/system which was tested only.

Prepared By

Thea Huang (Project Engineer)

Jul. 29, 2022

Colvin Liu

Reviewed By

Calvin Liu (Reviewer)

Aug. 03, 2022

Approved By

Max Zhang

Aug. 03, 2022

Aug. 03, 2022






TABLE OF CONTENTS

1. SUMMARY OF MAXIMUM SAR VALUE	5
2. GENERAL INFORMATION	6
2.1. EUT DESCRIPTION	6
3. SAR MEASUREMENT SYSTEM	8
3.1. THE SATIMO SYSTEM USED FOR PERFORMING COMPLIANCE TESTS CONSISTS OF FOLLOWING ITEMS 3.2. COMOSAR E-FIELD PROBE	
3.3. Robot	9
3.4. VIDEO POSITIONING SYSTEM	
3.6. SAM TWIN PHANTOM	
4. SAR MEASUREMENT PROCEDURE	12
4.1. SPECIFIC ABSORPTION RATE (SAR)	
4.2. SAR MEASUREMENT PROCEDURE	13
4.3. RF Exposure Conditions	15
5. TISSUE SIMULATING LIQUID	17
5.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID	
5.2. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	
6. SAR SYSTEM CHECK PROCEDURE	
6.1. SAR System Check Procedures	22
6.2. SAR SYSTEM CHECK	
7. EUT TEST POSITION	25
7.1. DEFINE TWO IMAGINARY LINES ON THE HANDSET	
7.2. CHEEK POSITION	
7.4. Body Worn Position	
8. SAR EXPOSURE LIMITS	28
9. TEST FACILITY	29
10. TEST EQUIPMENT LIST	30
11. MEASUREMENT UNCERTAINTY	31
12. CONDUCTED POWER MEASUREMENT	34
13. TEST RESULTS	59
13.1. SAR Test Results Summary	59
APPENDIX A. SAR SYSTEM CHECK DATA	86
APPENDIX B. SAR MEASUREMENT DATA	100
APPENDIX C. TEST SETUP PHOTOGRAPHS	152
APPENDIX D. CALIBRATION DATA	160
APPENDIX E. EUT PHOTOGRAPHS	160



Page 5 of 160

1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

THO MAXIMA TOOLING	, H			
Frequency Band	Head	Body-worn(with 10mm separation)	Hotspot(with 10mm separation)	SAR Test Limit (W/kg)
GSM 850	0.237	0.683	0.347	
PCS 1900	0.198	0.507	0.507	
UMTS Band II	0.316	0.764	0.764	
UMTS Band V	0.195	0.136	0.136	
LTE Band 4	0.515	0.589	0.589	
LTE Band 5	0.301	0.350	0.350	
LTE Band 7	0.576	1.376	1.376	1.6
LTE Band 12	0.323	0.499	0.499	1.0
LTE Band 13	0.246	0.261 0.261		
LTE Band 66	0.382	0.789 0.789		
WIFI 2.4G	0.098	0.106	0.106	
Bluetooth(BR/EDR)	0.002	0.004 0.004		
Simultaneous Reported SAR	1.511			
SAR Test Result	PASS			

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/kg) specified in IEEE Std. 1528:2013; FCC 47CFR § 2.1093; IEEE/ANSI C95.1:2005 and the following specific FCC Test Procedures:

- KDB 447498 D04 Interim General RF Exposure Guidance v01
- KDB 648474 D04 Handset SAR v01r03
- KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04
- KDB 941225 D01 3G SAR Procedures v03r01
- KDB 941225 D06 Hotspot Mode v02r01
- KDB 248227 D01 802 11 Wi-Fi SAR v02r02
- KDB 941225 D05 SAR for LTE Devices v02r05



Page 6 of 160

2. GENERAL INFORMATION

2.1. EUT Description

Product Designation	2.1. EUT Description				
Test Model	General Information				
Hardware Version					
Software Version					
Device Category Portable Uncontrolled Antenna Type Internal Uncontrolled Uncontrolled Uncontrolled Internal Internal Internal Internal GSM and GPRS& EGPRS Internal GSM and GPRS& EGPRS GSM 850 ⊠PCS 1900 (U.S. Bands) GPRS & EGPRS Type Class B GPRS & EGPRS Type Class B Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx) TX Frequency Range GSM 850 : 820-850MHz; PCS 1900 : 1850-1910MHz; RX Frequency Range GSM 850 : 869-894MHz; PCS 1900 : 1930-1990MHz Release Version Rel-6 Rel-					
RF Exposure Environment	Software Version				
Antenna Type Internal GSM and GPRS& EGPRS Support Band ⊠GSM 850 ⊠PCS 1900 (U.S. Bands) GPRS & EGPRS Type Class B Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx) TX Frequency Range GSM 850 : 8850: 8850: 8850: 8850-894MHz; PCS 1900: 1850-1910MHz; RX Frequency Range GSM 850 : 869-894MHz; PCS 1900: 1930-1990MHz Release Version Rel-6 Type of modulation GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS Antenna Gain GSM850: 32.18dBm; PCS1900: 12.2dBi Max. Average Power GSM850: 32.18dBm; PCS1900: 12.904dBm WCDMA WCDMA Support Band ☑UMTS FDD Band II ☑UMTS FDD Band V HS Type HSPA(HSUPA/HSDPA) TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA : QPSK/16QAM Antenna Gain Band II: 12.2dBi; Band V: 0.6dBi Max. Average Power Band II: 12.2dBi; Band V: 0.6dBi Bluetooth Bluetooth Version ☑V2.0 ☑V2.1 ☑V2.1+EDR ☑V3.0 □V3.0+HS ☑V4.2 Operation					
GSM and GPRS& EGPRS Support Band ☑GSM 850 ☑PCS 1900 (U.S. Bands) GPRS & EGPRS Type Class B GPRS & EGPRS Class Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx) TX Frequency Range GSM 850 : 820-850MHz; PCS 1900: 1850-1910MHz; RX Frequency Range GSM 850 : 869-894MHz; PCS 1900: 1930-1990MHz Release Version Rel-6 Type of modulation GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS Antenna Gain GSM850: 0.6dBi; PCS1900: 1.2dBi Max. Average Power GSM850: 32.18dBm; PCS1900: 29.04dBm WCDMA Support Band Support Band ☑UMTS FDD Band II ☑UMTS FDD Band V HS Type HSPA(HSUPA/HSDD)A TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz RX Frequency Range FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA: QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth UV2.0 □V2.1 □V2.1 □V2.1+EDR □V3.0 □V3.0+HS □V4.2 Operatio					
Support Band ☑GSM 850 ☑PCS 1900 (U.S. Bands) GPRS & EGPRS Type Class B Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx) TX Frequency Range GSM 850 : 869-894MHz; PCS 1900: 1850-1910MHz; RX Frequency Range GSM 850 : 869-894MHz; PCS 1900: 1930~1990MHz Release Version Rel-6 Type of modulation GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS Antenna Gain GSM850: 0.6dBi; PCS1900: 1.2dBi Max. Average Power GSM850: 32.18dBm; PCS1900: 29.04dBm WCDMA Support Band MS INTERPRETARIES FDD Band III ☑UMTS FDD Band V HS Type HSPA(HSUPA/HSDPA) TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz RF Fequency Range FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA: QPSK/16QAM Antenna Gain Band II: 12dBi; Band V: 0.6dBi Max. Average Power Band II: 12dBi; Band V: 0.6dBi Bluetooth Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Version □V2.0 □V2.1 □V2.1 □V2.1+EDR □V3.0 □V3.0+HS □V4.2		Internal			
GPRS & EGPRS Type Class 12 Class 12 (1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx) GPRS & EGPRS Class Class 12 (1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx) TX Frequency Range GSM 850 : 820-850MHz; PCS 1900: 1930-1910MHz; RX Frequency Range GSM 850 : 869-894MHz; PCS 1900: 1930-1990MHz Release Version Rel-6 Type of modulation GSMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS Antenna Gain GSM850: 0.6dBi; PCS1900: 1.2dBi Max. Average Power GSM850: 0.6dBi; PCS1900: 29.04dBm WCDMA Support Band SUMTS FDD Band III SUMTS FDD Band V HS Type HSPA(HSUPA/HSDPA) TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz RX Frequency Range FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz Release Version Type of modulation Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 2.233dBm; Band V: 22.42dBm Bluetooth Bluetooth Version SV2.0 V2.1 V2.1+EDR V3.0 V3.0+HS V4.2 Operation Frequency 2402-2480MHz BR SGFSK, EDR Sm / 4-DQPSK, SBDPSK BLE SGFSK 1Mbps <td>GSM and GPRS& EGPRS</td> <td></td>	GSM and GPRS& EGPRS				
GPRS & EGPRS Class Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx) TX Frequency Range GSM 850 : 820-850MHz; PCS 1900: 1850-1910MHz; RX Frequency Range GSM 850 : 869-894MHz; PCS 1900: 1930-1990MHz Release Version Rel-6 Type of modulation GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS Antenna Gain GSM850: 0.6dBi; PCS1900: 1.2dBi Max. Average Power GSM850: 32.18dBm; PCS1900: 29.04dBm WCDMA GSM850: 32.18dBm; PCS1900: 29.04dBm WCDMA Support Band Support Band △UMTS FDD Band III △UMTS FDD Band V HS Type HSPA(HSUPA/HSDPA) TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA: QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Version Operation Frequency 2402-2480MHz Type of modulation BR △GFSK, EDR △π /4-DQPSK, △8DPSK BLE △GFSK 1Mbps □GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; </td <td></td> <td></td>					
TX Frequency Range GSM 850 : 820-850MHz; PCS 1900: 1850-1910MHz; RX Frequency Range GSM 850 : 869-894MHz; PCS 1900: 1930-1990MHz Release Version Rel-6 Type of modulation GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS Antenna Gain GSM850: 0.6dBi; PCS1900: 1.2dBi Max. Average Power GSM850: 32.18dBm; PCS1900: 29.04dBm WCDMA SUDMTS FDD Band II					
RX Frequency Range GSM 850 : 869~894MHz; PCS 1900: 1930~1990MHz Release Version Rel-6 Type of modulation GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS Antenna Gain GSM850: 0.6dBi; PCS1900: 1.2dBi Max. Average Power GSM850: 32.18dBm; PCS1900: 29.04dBm WCDMA Support Band ☑UMTS FDD Band III ☑UMTS FDD Band V HS Type HSPA(HSUPA/HSDPA) TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz RX Frequency Range FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA : QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band III: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Bluetooth Version □V2.0 □V2.1 □V2.1+EDR □V3.0 □V3.0+HS □V4.2 Operation Frequency 2402-2480MHz Type of modulation BR ☑GFSK, EDR ☑π /4-DQPSK, ☑8DPSK BLE ☑GFSK 1Mbps □GFSK 2Mbps Beak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI Specification </td <td>GPRS & EGPRS Class</td> <td></td>	GPRS & EGPRS Class				
Release Version Rel-6 Type of modulation GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS Antenna Gain GSM850: 0.6dBi; PCS1900: 1.2dBi Max. Average Power GSM850: 32.18dBm; PCS1900: 29.04dBm WCDMA WCDMA Support Band □UMTS FDD Band II □UMTS FDD Band V HS Type HSPA(HSUPA/HSDPA) TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz RX Frequency Range FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA: QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth □V2.0 □V2.1 □V2.1+EDR □V3.0 □V3.0+HS □V4.2 Operation Frequency 2402~2480MHz Type of modulation □R □ GFSK, EDR □ //4-DQPSK, □ 8DPSK BLE □ GFSK 1Mbps □ GFSK 2Mbps Peak Power BR BEDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI □R □ GFSK 2MBPS WIFI Specification □R □ R □ R □ R □ R □ R □ R □ R □ R □ R	TX Frequency Range				
Type of modulation		·			
Antenna Gain GSM850: 0.6dBi; PCS1900: 1.2dBi Max. Average Power GSM850: 32.18dBm; PCS1900: 29.04dBm WCDMA Support Band Support Band ⊠UMTS FDD Band II ⊠UMTS FDD Band V HS Type HSPA(HSUPA/HSDPA) TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz RX Frequency Range FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA : QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Version Bluetooth Version □V2.0 □V2.1 □V2.1 □V2.1+EDR □V3.0 □V3.0+HS □V4.2 Operation Frequency 2402-2480MHz Type of modulation BR □GFSK, EDR □π/4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI WIFI Specification □802.11a □802.11b □802.11g □802.11n(20) □802.11n(40) Operation Frequency 2412-2462MHz Avg. Burst Power 11b: 16.65d	Release Version				
Max. Average Power GSM850: 32.18dBm; PCS1900: 29.04dBm WCDMA Support Band ⊠UMTS FDD Band II ☑UMTS FDD Band V HS Type HSPA(HSUPA/HSDPA) TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz RX Frequency Range FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA: QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Version UV2.0 UV2.1 UV2.1+EDR UV3.0 UV3.0+HS ☑V4.2 Operation Frequency 2402-2480MHz Type of modulation BR ☑GFSK, EDR ☑π /4-DQPSK, ☑8DPSK BLE ☑GFSK 1Mbps ☐GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI WIFI Specification ☐802.11a ☑802.11b ☑802.11g ☑802.11n(20) ☐802.11n(40) Operation Frequency 2412-2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	Type of modulation	GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS			
WCDMA Support Band ☑UMTS FDD Band II ☑UMTS FDD Band V HS Type HSPA(HSUPA/HSDPA) TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz RX Frequency Range FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA: QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Version □ V2.0 □ V2.1 □ V2.1+EDR □ Vy3.0+HS ☑ V4.2 Operation Frequency 2402~2480MHz Type of modulation BR ☑GFSK, EDR ☑π /4-DQPSK, ☑8DPSK BLE ☑GFSK 1Mbps □GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI WIFI Specification □ 802.11a ☑802.11b ☑802.11g ☑802.11n(20) □802.11n(40) Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm		GSM850: 0.6dBi; PCS1900: 1.2dBi			
Support Band		GSM850: 32.18dBm; PCS1900: 29.04dBm			
HS Type HSPA(HSUPA/HSDPA) TX Frequency Range FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz RX Frequency Range FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA: QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Bluetooth Version □V2.0 □V2.1 □V2.1+EDR □V3.0 □V3.0+HS □V4.2 Operation Frequency 2402-2480MHz Type of modulation BR □GFSK, EDR □π/4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI □802.11a □802.11b □802.11g □802.11n(20) □802.11n(40) Operation Frequency 2412-2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	WCDMA				
TX Frequency Range RX Frequency Range RS FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz Release Version Rel-9 Type of modulation Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Bluetooth Bluetooth Version Operation Frequency Type of modulation PR SPSK, EDR □π/4-DQPSK, □80PSK BLE □GFSK 1Mbps □GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; WIFI WIFI Specification □802.11a □802.11b □802.11g □802.11n(20) □802.11n(40) Operation Frequency Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	Support Band	☐ ☑UMTS FDD Band II ☑UMTS FDD Band V			
RX Frequency Range FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA: QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Bluetooth Version □V2.0 □V2.1 □V2.1+EDR □V3.0 □V3.0+HS □V4.2 Operation Frequency 2402~2480MHz Type of modulation BR □GFSK, EDR □π/4-DQPSK, □8DPSK BLE □GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI □802.11a □802.11b □802.11g □802.11n(20) □802.11n(40) Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm					
Release Version Rel-9 Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA : QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Version □V2.0 □V2.1 □V2.1+EDR □V3.0 □V3.0+HS □V4.2 Operation Frequency 2402~2480MHz Type of modulation BR □GFSK, EDR □π/4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI WIFI Specification □802.11a □802.11b □802.11g □802.11n(20) □802.11n(40) Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm					
Type of modulation HSDPA: QPSK/16QAM/64QAM, HSUPA : QPSK/16QAM Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Version Operation Frequency Q402~2480MHz Type of modulation BR GFSK, EDR T/4-DQPSK, 8DPSK BLE GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain WIFI WIFI Specification B802.11a 802.11b 802.11g 802.11n(20) 802.11n(40) Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm					
Antenna Gain Band II: 1.2dBi; Band V: 0.6dBi Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Version □ V2.0 □ V2.1 □ V2.1+EDR □ V3.0 □ V3.0+HS □ V4.2 Operation Frequency 2402~2480MHz Type of modulation BR □ GFSK, EDR □ π /4-DQPSK, □ 8DPSK BLE □ GFSK 1Mbps □ GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI WIFI Specification □ 802.11a □ 802.11b □ 802.11g □ 802.11n(20) □ 802.11n(40) Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	Release Version	Rel-9			
Max. Average Power Band II: 22.33dBm; Band V: 22.42dBm Bluetooth Bluetooth Version □ V2.0 □ V2.1 □ V2.1+EDR □ V3.0 □ V3.0+HS □ V4.2 Operation Frequency 2402~2480MHz Type of modulation BR □ GFSK, EDR □ π /4-DQPSK, □ 8DPSK BLE □ GFSK 1Mbps □ GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain WIFI WIFI Specification WIFI Specification □ 802.11a □ 802.11b □ 802.11g □ 802.11n(20) □ 802.11n(40) Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm		HSDPA: QPSK/16QAM/64QAM, HSUPA: QPSK/16QAM			
Bluetooth Version	Antenna Gain	Band II: 1.2dBi; Band V: 0.6dBi			
Bluetooth Version □V2.0 □V2.1 □V2.1+EDR □V3.0 □V3.0+HS □V4.2 Operation Frequency 2402~2480MHz Type of modulation BR □GFSK, EDR □π/4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI WIFI Specification □802.11a □802.11b □802.11g □802.11n(20) □802.11n(40) Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	Max. Average Power	Band II: 22.33dBm; Band V: 22.42dBm			
Operation Frequency 2402~2480MHz Type of modulation BR	Bluetooth				
Type of modulation BR ☑GFSK, EDR ☑π /4-DQPSK, ☑8DPSK BLE ☑GFSK 1Mbps ☐GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI WIFI Specification ☐802.11a ☑802.11b ☑802.11g ☑802.11n(20) ☐802.11n(40) Operation Frequency Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	Bluetooth Version				
Type of modulation BLE ☑GFSK 1Mbps ☐GFSK 2Mbps Peak Power BR&EDR: 5.34dBm; BLE: -0.63dBm; Antenna Gain 1.5dBi WIFI Specification ○ B02.11a ☑802.11b ☑802.11g ☑802.11n(20) ☐802.11n(40) ○ Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	Operation Frequency	2402~2480MHz			
Antenna Gain 1.5dBi WIFI WIFI Specification □802.11a □802.11b □802.11g □802.11n(20) □802.11n(40) Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	Type of modulation				
WIFI WIFI Specification □802.11a	Peak Power	BR&EDR: 5.34dBm; BLE: -0.63dBm;			
WIFI Specification □802.11a ⊠802.11b ⊠802.11g ⊠802.11n(20) □802.11n(40) Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	Antenna Gain	1.5dBi			
Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	WIFI				
Operation Frequency 2412~2462MHz Avg. Burst Power 11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm	WIFI Specification	□802.11a ⊠802.11b ⊠802.11g ⊠802.11n(20) □802.11n(40)			
	Operation Frequency				
Antenna Gain 1.5dBi	Avg. Burst Power	11b: 16.65dBm,11g:15.89dBm,11n(20):15.77dBm			
	Antenna Gain	1.5dBi			



Page 7 of 160

EUT Description(Continue)


EUT Description (C	ontinue)		
LTE			
	☑FDD Band 4 ☑FDD Band 5 ☑FDD Band 7 ☑FDD Band 12 ☑FDD Band 13		
Support Band	⊠FDD Band 66 (U.S. Bands)		
	⊠FDD Band 28 (Non-U.S. Bands)		
	Band 4:1710-1755MHz;Band 5:824-849MHz; Band 7:2500-2570MHz;		
TX Frequency Range	Band 12:699-716MHz; Band 13: 777-787MHz; Band 66:1700-1780MHz; (U.S. Bands)		
	Band 28:703-748 MHz; (Non-U.S. Bands)		
	Band 4:2110-2155MHz; Band 5:869-894MHz; Band 7:2620-2690MHz;		
RX Frequency Range	Band 12: 729-746 MHz; Band 13: 746-756MHz;Band 66:2110-2200MHz; (U.S. Bands)		
	Band 28: 758-803 MHz; (Non-U.S. Bands)		
Release Version	Rel-12		
Type of modulation	Downlink: QPSK/16QAM/64QAM, Uplink: QPSK/16QAM		
	Band 4: 1.2dBi; Band 5: 0.6dBi; Band 7: 1.5dBi; Band 12: 0.5dBi;		
Antenna Gain	Band 13: 0.5dBi; Band 66: 1.2dBi; (Non-U.S. Bands)		
	Band 28: 0.5dBi; (Non-U.S. Bands)		
May Averege Dower	Band 4: 22.29dBm; Band 5: 22.34dBm; Band 7:22.82dBm; Band 12: 22.59dBm;		
Max. Average Power	Band 13: 22.24dBm; Band 66: 22.53dBm;		
Accessories			
	Brand name: GYRO		
Battery	Model No. : S6001		
	Voltage and Capacitance: 3.8 V & 3000mAh		
Farnhana	Brand name: N/A		
Earphone	Model No.: N/A		

Note:1.CMU200 can measure the average power and Peak power at the same time

2. The sample used for testing is end product.

3. The test sample has no any deviation to the test method of standard mentioned in page 1.


Product	Type	
Product		☐ Identical Prototype





3. SAR MEASUREMENT SYSTEM

3.1. The SATIMO system used for performing compliance tests consists of following items

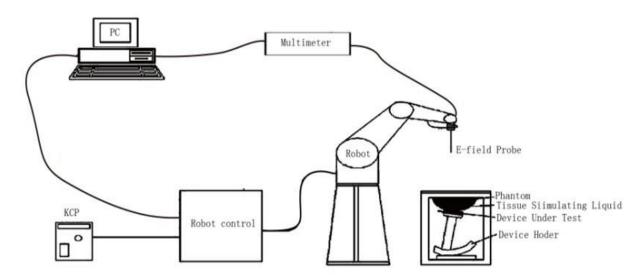

The COMOSAR system for performing compliance tests consists of the following items:

- The PC. It controls most of the bench devices and stores measurement data. A computer running WinXP and the Opensar software.
- The E-Field probe. The probe is a 3-axis system made of 3 distinct dipoles. Each dipole returns a voltage in function of the ambient electric field.
- The Keithley multimeter measures each probe dipole voltages.
- The SAM phantom simulates a human head. The measurement of the electric field is made inside the phantom.
- The liquids simulate the dielectric properties of the human head tissues.
- The network emulator controls the mobile phone under test.
- The validation dipoles are used to measure a reference SAR. They are used to periodically check the bench to make sure that there is no drift of the system characteristics over time.
- •The phantom, the device holder and other accessories according to the targeted measurement.



Page 9 of 160

3.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SATIMO conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528 and relevant KDB files.) The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

isotropic E-Field	Probe Specification		
Model	SSE2		
Manufacture	MVG		
Identification No.	SN 13/22 EPGO368		
Frequency	0.15GHz-6GHz Linearity:±0.09dB(0.15GHz-6GHz)		
Dynamic Range	0.01W/kg-100W/kg Linearity:±0.09dB		
Dimensions	Overall length:330mm Length of individual dipoles:2mm Maximum external diameter:8mm Probe Tip external diameter:2.5mm Distance between dipoles/ probe extremity:1mm		
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precisin of better 30%.		

3.3. Robot

The COMOSAR system uses the KUKA robot from SATIMO SA (France). For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used.

The XL robot series have many features that are important for our application:

☐ High precision (repeatability 0.02 mm)

☐ High reliability (industrial design)

☐ Jerk-free straight movements

 $\hfill \square$ Low ELF interference (the closed metallic

construction shields against motor control fields)

☐ 6-axis controller






Page 10 of 160

3.4. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link.

During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.




3.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles. The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity

 $\epsilon r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

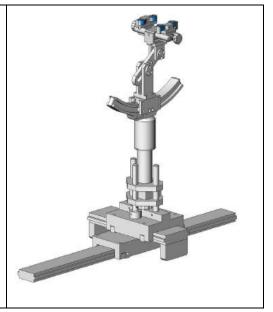



Page 11 of 160


3.6. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

□ Left head

☐ Right head

☐ Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.



Page 12 of 160

4. SAR MEASUREMENT PROCEDURE

4.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element(dv) of given mass density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \frac{dT}{dt}\Big|_{t=0}$$

Where

SAR is the specific absorption rate in watts per kilogram;

E is the r.m.s. value of the electric field strength in the tissue in volts per meter;

σ is the conductivity of the tissue in siemens per metre;

ρ is the density of the tissue in kilograms per cubic metre;

c_h is the heat capacity of the tissue in joules per kilogram and Kelvin;

 $\frac{dT}{dt} \mid t=0$ is the initial time derivative of temperature in the tissue in kelvins per second



Page 13 of 160

4.2. SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface is 2.7mm This distance cannot be smaller than the distance os sensor calibration points to probe tip as `defined in the probe properties,

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in SATIMO software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in db) is specified in the standards for compliance testing. For example, a 2db range is required in IEEE Standard 1528 and IEC62209 standards, whereby 3db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan) If one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximum are detected, the number of Zoom Scan has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100MHz to 6GHz

	≤3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
	≤2 GHz: ≤15 mm 2 – 3 GHz: ≤12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scan are used to assess the peak spatial SAR value within a cubic average volume containing 1g abd 10g of simulated tissue. The Zoom Scan measures points(refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1g and 10g and displays these values next to the job's label.



Page 14 of 160

Zoom Scan Parameters extracted from KDB865664 d01 SAR Measurement 100MHz to 6GHz


Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}			\leq 2 GHz: \leq 8 mm 2 - 3 GHz: \leq 5 mm	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
	uniform grid: Δz _{Zoom} (n)		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
Maximum zoom scan spatial resolution, normal to phantom surface	graded	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	grid	grid Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δz	Zoom(n-1)
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the same settings. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

^{*} When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.





4.3. RF Exposure Conditions


Test Configuration and setting:

The EUT is a model of GSM Portable Mobile Station (MS). It supports GSM/GPRS/EGPRS, WCDMA/HSPA, LTE, BT, WIFI, and support hot spot mode.

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator were established by air link. The distance between the EUT and the antenna is larger than 50cm, and the output power radiated from the emulator antenna is at least 30db smaller than the output power of EUT.

For WLAN testing, the EUT is configured with the WLAN continuous TX tool through engineering command.

Antenna Location: (the back view)

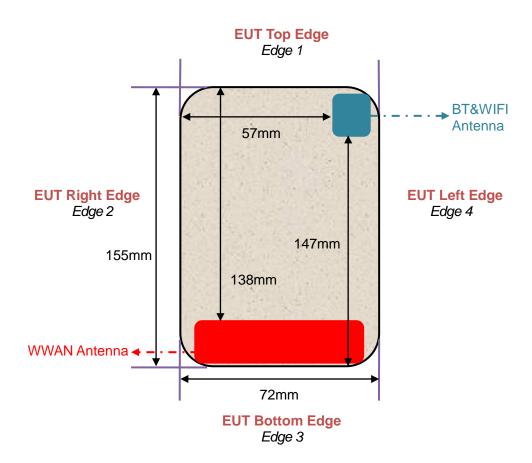



Page 16 of 160

For WWAN mode:

Test Configurations	Antenna to edges/surface	SAR required	Note
Head			
Left Touch		Yes	
Left Tilt		Yes	
Right Touch		Yes	
Right Tilt		Yes	
Body			
Back	<25mm	Yes	
Front	<25mm	Yes	
Hotspot			
Back	<25mm	Yes	
Front	<25mm	Yes	
Edge 1 (Top)	57mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR
Edge 2 (Right)	1mm	Yes	
Edge 3 (Bottom)	1mm	Yes	
Edge 4 (Left)	1mm	Yes	

For WLAN mode:

Test Configurations	Antenna to edges/surface	SAR required	Note			
Head	Head					
Left Touch		Yes				
Left Tilt		Yes				
Right Touch		Yes				
Right Tilt		Yes				
Body						
Back	<25mm	Yes				
Front <25mm		Yes				
Hotspot						
Back	<25mm	Yes				
Front	<25mm	Yes				
Edge 1 (Top)	1mm	Yes				
Edge 2 (Right)	57mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR			
Edge 3 (Bottom)	147mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR			
Edge 4 (Left)	1mm	Yes				



Page 17 of 160

5. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 10% are listed in 6.2

5.1. The composition of the tissue simulating liquid

Ingredient (% Weight) Frequency (MHz)	Water	Nacl	Polysorbate 20	DGBE	1,2 Propanediol	Triton X-100
750 Head	35	2	0.0	0.0	63	0.0
835 Head	50.36	1.25	48.39	0.0	0.0	0.0
1750 Head	52.64	0.36	0.0	47	0.0	0.0
1900 Head	54.9	0.18	0.0	44.92	0.0	0.0
2450 Head	71.88	0.16	0.0	7.99	0.0	19.97
2600 Head	55.242	0.306	0	44.452	0	0



Page 18 of 160

5.2. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1 have been incorporated in the following table. The body tissue dielectric parameters recommended by the IEC 62209-2 have been incorporated in the following table.

Target Frequency	he	ead		body
(MHz)	εr	σ (S/m)	εr	σ (S/m)
300	45.3	0.87	45.3	0.87
450	43.5	0.87	43.5	0.87
750	41.9	0.89	41.9	0.89
835	41.5	0.90	41.5	0.90
900	41.5	0.97	41.5	0.97
915	41.5	1.01	41.5	1.01
1450	40.5	1.20	40.5	1.20
1610	40.3	1.29	40.3	1.29
1750	40.1	1.37	40.1	1.37
1800 – 2000	40.0	1.40	40.0	1.40
2300	39.5	1.67	39.5	1.67
2450	39.2	1.80	39.2	1.80
2600	39.0	1.96	39.0	1.96
3000	38.5	2.40	38.5	2.40

($\epsilon r = relative permittivity$, $\sigma = conductivity$ and $\rho = 1000 \text{ kg/m}3$



Page 19 of 160

5.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using SATIMO Dielectric Probe Kit and R&S Network Analyzer ZVL6.

Tissue Stimulant Measurement for 750MHz									
	Fr.	Dielectric Para	Tissue						
	(MHz)	εr 41.9 (37.71-46.09)	δ[s/m] 0.89(0.801-0.979)	Temp [°C]	Test time				
	704	41.57	0.88						
	709	709 41.57	0.88						
Head	707.5	41.24	0.89		Jul. 22, 2022				
	710	41.24	0.89	21.2					
	711	41.24	0.89						
	750	40.96	0.90						
	782	40.75	0.91						

Tissue Stimulant Measurement for 835MHz									
	Fr.	Dielectric Para	ameters (±10%)	Tissue					
	(MHz)	εr 41.5 (37.35-45.65)	δ[s/m] 0.90(0.81-0.99)	Temp [°C]	Test time				
	824.2	42.45	0.91						
	826.4	3.4 42.45	0.91						
Head	835	42.10	0.92						
	836.4	41.92	0.93	20.9	Jul. 21, 2022				
	836.6 41.92		0.93						
	846.6	41.76	0.94						
	848.8	41.76	0.94						

Tissue Stimulant Measurement for 835MHz									
	Fr.	Dielectric Para	ameters (±10%)	Tissue					
	(MHz)	εr 41.5 (37.35-45.65)	δ[s/m] 0.90(0.81-0.99)	Temp [°C]	Test time				
Head	829	42.12	0.90						
	835	41.91	0.91	24.0	II. 25, 2022				
	836.5	41.75	0.92	21.9	Jul. 25, 2022				
	844	41.54	0.93						





Tissue Stimulant Measurement for 1750MHz									
	Fr.	Dielectric Para	ameters (±10%)	Tissue					
	(MHz)	εr 40.1 (36.09-44.11)	δ[s/m]1.37(1.233-1.507)	Temp [°C]	Test time				
	1712.4	40.35	1.36						
	1720 1732.4 1732.5	1720 40.22	1.37	21.4	Jul. 24, 2022				
		40.09	1.38						
Head		40.09	1.38						
	1745	39.83	1.39						
	1750	39.83	1.39						
	1752.6 39.83		1.39						
	1755	39.64	1.40						
	1770	39.37	1.41						

Tissue Stimulant Measurement for 1900MHz									
	Fr.	Dielectric Para	Tissue						
	(MHz)	εr40.00(36.00-44.00)	δ[s/m]1.40(1.26-1.54)	Temp [°C]	Test time				
	1850.2	39.67	1.35						
Head	1852.4 1880	1852.4 39.67	1.35		Jul. 23, 2022				
1100.0		39.25	1.36	21.0					
	1900	39.18	1.37	21.0					
	1907.6 39.01		1.38						
	1909.8	39.01	1.38						

Tissue Stimulant Measurement for 2450MHz										
	Fr.	Dielectric Para	Tissue	To ad dian a						
	(MHz)	εr39.2(35.28-43.12)	Temp [°C]	Test time						
	2402	39.54	1.80							
l	2412	39.21	1.81							
Head	2437 2441 2450	38.99	1.82		Jul. 28, 2022					
		38.99	1.82	21.2						
		38.75	1.83							
	2462	38.42	1.84							
	2480	38.27	1.85							

Tissue Stimulant Measurement for 2600MHz									
	Fr.	Dielectric Parameters (±10%)		Tissue	T				
	(MHz)	εr39(35.1-42.9)	δ[s/m]1.96(1.764-2.156)	Temp [°C]	Test time				
Head	2510	39.68	1.90						
	2535 39.45		1.91	21.9	Jul. 29, 2022				
	2560	39.23	1.92						



Page 21 of 160

2600	38.94	1.93	



Page 22 of 160


6. SAR SYSTEM CHECK PROCEDURE

6.1. SAR System Check Procedures

SAR system check is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

Each SATIMO system is equipped with one or more system check kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system check and system validation. System kit includes a dipole, and dipole device holder.


The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system check setup is shown as below.

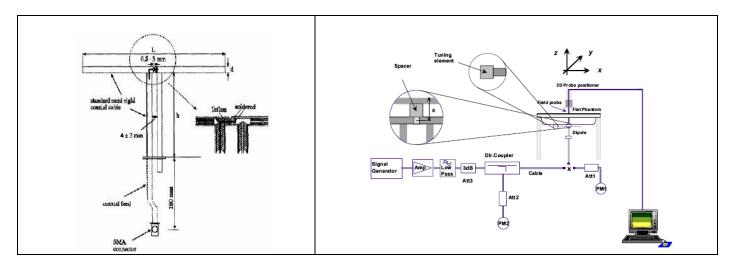



Page 23 of 160

6.2. SAR System Check 6.2.1. Dipoles



The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of IEEE. the table below provides details for the mechanical and electrical Specifications for the dipoles.

Frequency	L (mm)	h (mm)	d (mm)
750MHz	176	100	6.35
835MHz	161.0	89.8	3.6
1800MHz	71.6	41.7	3.6
1900MHz	68	39.5	3.6
2450MHz	51.5	30.4	3.6
2600MHz	48.5	28.8	3.6



Page 24 of 160

6.2.2. System Check Result

System Per	System Performance Check at 750MHz&835MHz &1800MHz &1900MHz &2450MHz&2600MHz for Head										
	Validation Kit: SN 22/16 DIP 0G750-417& SN 15/16 DIP 0G835-399& SN 46/11 DIP 1G800-186& SN 29/15										
DIP 1G900-3	<u>389& SN</u>	29/15 DI	<u>P 2G450-393& S</u>	N 22/16 DIP 2G6	00-407						
Fraguenay		get	Reference	ce Result	Tes	ted	Tissue				
Frequency	Value	(W/kg)	(± 1	0%)	Value(W/kg)	Temp.	Test time			
[MHz]	1g	10g	1g	10g	1g	10g	[°C]				
750	8.33	5.44	7.497-9.163	4.896-5.984	8.72	5.82	21.2	Jul. 22, 2022			
835	9.67	6.14	8.703-10.637	5.526-6.754	9.99	5.88	20.9	Jul. 21, 2022			
835	9.67	6.14	8.703-10.637	5.526-6.754	9.53	6.07	21.9	Jul. 25, 2022			
1800	37.76	19.60	33.984-41.536	17.640-21.560	35.48	18.58	21.4	Jul. 24, 2022			
1900	41.26	20.86	37.134-45.386	18.774-22.946	41.85	21.41	21.0	Jul. 23, 2022			
2450	54.32	24.25	48.888-59.752	21.825-26.675	52.95	23.84	21.2	Jul. 28, 2022			
2600	54.94	23.77	49.446-60.434	21.393-26.147	52.58	23.56	21.9	Jul. 29, 2022			

Note:

⁽¹⁾ We use a CW signal of 18dBm for system check, and then all SAR value are normalized to 1W forward power. The result must be within ±10% of target value.




Page 25 of 160


7. EUT TEST POSITION

This EUT was tested in Right Cheek, Right Tilted, Left Cheek, Left Tilted, Body back, Body front and 4 edges.

7.1. Define Two Imaginary Lines on the Handset

- (1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width wt of the handset at the level of the acoustic output, and the midpoint of the width wb of the handset.
- (2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

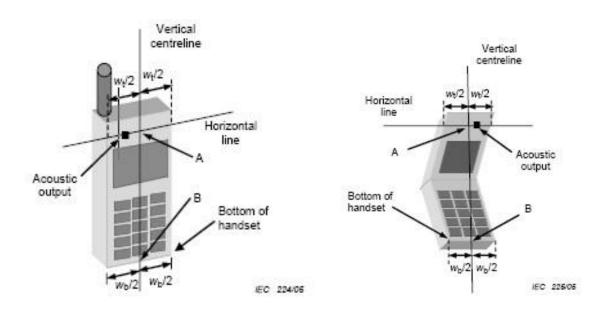







7.2. Cheek Position

- (1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center picec in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost








7.3. Tilt Position

- (1) To position the device in the "cheek" position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.











Page 27 of 160

7.4. Body Worn Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to 10mm.







Page 28 of 160

8. SAR EXPOSURE LIMITS

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit (W/kg)
Spatial Peak SAR (1g cube tissue for brain or body)	1.60
Spatial Average SAR (Whole body)	0.08
Spatial Peak SAR (Limbs)	4.0



Page 29 of 160

9. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA



Page 30 of 160

10. TEST EQUIPMENT LIST

Equipment description	Manufacturer/ Model	Identification No.	Software version	Current calibration date	Next calibration date
SAR Probe	MVG	SN 13/22 EPGO368	N/A	Apr. 13, 2022	Apr. 12, 2023
Phantom	SATIMO	SN_4511_SAM90	N/A	Validated. No cal required.	Validated. No cal required.
Liquid	SATIMO	N/A	N/A	Validated. No cal required.	Validated. No cal required.
Comm Tester	Agilent-8960	GB46310822	A.13.07	Aug. 18,2021	Aug. 17,2022
Comm Tester	R&S- CMW500	121209	V3.7.40	Aug. 18,2021	Aug. 17,2022
Multimeter	Keithley 2000	4114939	N/A	Aug. 18,2021	Aug. 17,2022
SAR Software	MVG-OpenSAR	N/A	OpenSAR V4_02_35	N/A	N/A
Dipole	SATIMO SID750	SN 22/16 DIP 0G750-417	N/A-	Apr. 28, 2022	Apr. 27, 2025
Dipole	SATIMO SID835	SN 15/16 DIP 0G835-399	N/A	Apr. 28, 2022	Apr. 27, 2025
Dipole	SATIMO SID1800	SN 46/11 DIP 1G800-186	N/A	Apr. 28, 2022	Apr. 27, 2025
Dipole	SATIMO SID1900	SN 29/15 DIP 1G900-389	N/A	Apr. 28, 2022	Apr. 27, 2025
Dipole	SATIMO SID2450	SN 29/15 DIP 2G450-393	N/A	Apr. 28, 2022	Apr. 27, 2025
Dipole	SATIMO SID2600	SN 22/16 DIP 2G600-407	N/A	Apr. 28, 2022	Apr. 27, 2025
Signal Generator	Agilent-E4438C	US41461365	V5.03	Aug. 18,2021	Aug. 17,2022
Vector Analyzer	Agilent / E4440A	MY44303916	N/A	Mar. 28, 2022	Mar. 27, 2023
Network Analyzer	Rhode & Schwarz ZVL6	SN101443	3.2	Oct. 28,2021	Oct. 27,2022
Attenuator	Warison /WATT-6SR1211	S/N:WRJ34AYM2F1	N/A	June 08,2022	June 07,2023
Attenuator	Mini-circuits / VAT-10+	31405	N/A	June 08,2022	June 07,2023
Amplifier	AS0104-55_55	1004793	N/A	June 09,2022	June 08,2023
Directional Couple	Werlatone/ C5571-10	SN99463	N/A	Mar. 10,2022	Mar. 09,2024
Directional Couple	Werlatone/ C6026-10	SN99482	N/A	Mar. 10,2022	Mar. 09,2024
Power Sensor	NRP-Z21	1137.6000.02	N/A	Sep. 07,2021	Sep. 06,2022
Power Sensor	NRP-Z23	100323	N/A	Feb. 16,2022	Feb. 15,2023
Power Viewer	R&S	V2.3.1.0	N/A	N/A	N/A
Calibration standard parts for network sub - port	R&S/ ZV-Z132	N/A	V2.3.1.0	Dec. 07, 2021	Dec. 06, 2022

Note: Per KDB 865664 Dipole SAR Validation, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

- 1. There is no physical damage on the dipole;
- 2. System validation with specific dipole is within 10% of calibrated value;
- 3. Return-loss is within 20% of calibrated measurement;
- 4. Impedance is within 5Ω of calibrated measurement.



Page 31 of 160

11. MEASUREMENT UNCERTAINTY

11. MEASUREMENT UNCERTAINTY									
SATIMO Uncertainty- SN 13/22 EPGO368 Measurement uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System		(, , , , ,	2.0	<u>I</u>	1	1	(, , , , ,	(, , , ,	
Probe calibration	E.2.1	7.000	N	1	1	1	7.000	7.000	∞
Axial Isotropy	E.2.2	0.175	R	√3	√0.5	√0.5	0.071	0.071	∞
Hemispherical Isotropy	E.2.2	0.175	R	√3	√0.5	√0.5	0.071	0.071	∞
Boundary effect	E.2.3	1.000	R	√3	1	1	0.577	0.577	∞
Linearity	E.2.4	0.990	R	√3	1	1	0.572	0.572	∞
System detection limits	E.2.4	1.000	R	√3	1	1	0.577	0.577	∞
Modulation response	E2.5	3.000	R	√3	1	1	1.732	1.732	∞
Readout Electronics	E.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	E.2.7	0.000	R	√3	1	1	0.000	0.000	∞
Integration Time	E.2.8	1.400	R	√3	1	1	0.808	0.808	∞
RF ambient conditions-Noise	E.6.1	3.000	R	√3	1	1	1.732	1.732	∞
RF ambient conditions-reflections	E.6.1	3.000	R	√3	1	1	1.732	1.732	∞
Probe positioner mechanical tolerance	E.6.2	1.400	R	√3	1	1	0.808	0.808	∞
Probe positioning with respect to phantom shell	E.6.3	1.400	R	√3	1	1	0.808	0.808	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.300	R	√3	1	1	1.328	1.328	∞
Test sample Related									
Test sample positioning	E.4.2	2.6	N	1	1	1	2.600	2.600	∞
Device holder uncertainty	E.4.1	3	N	1	1	1	3.000	3.000	∞
Output power variation—SAR drift measurement	E.2.9	5	R	√3	1	1	2.887	2.887	∞
SAR scaling	E.6.5	5	R	$\sqrt{3}$	1	1	2.887	2.887	∞
Phantom and tissue parameter	rs								
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	√3	1	1	2.309	2.309	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.900	1.596	∞
Liquid conductivity measurement	E.3.3	4	R	√3	0.78	0.71	3.120	2.840	8
Liquid permittivity measurement	E.3.3	5	N	1	0.78	0.71	1.150	1.300	М
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	√3	0.23	0.26	1.126	1.025	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	N	1	0.23	0.26	0.332	0.375	М
Combined Standard Uncertainty			RSS				10.529	10.344	
Expanded Uncertainty (95% Confidence interval)			K=2				21.058	20.688	



	SA	TIMO Unce	rtainty- SI	N 13/22 EF	PGO368				
System Validation uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component Measurement System	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Probe calibration	E.2.1	7.000	N	1	1	1	7.000	7.000	∞
Axial Isotropy	E.2.1	0.175	R		1	1	0.101	0.101	
			R	√3 √3					∞
Hemispherical Isotropy	E.2.2	0.175		√3 √3	0	0	0.000	0.000	∞
Boundary effect	E.2.3	1.000	R	√3 √3	1	1	0.577	0.577	∞
Linearity	E.2.4	0.990	R	√3	1	1	0.572	0.572	∞
System detection limits	E.2.4	1.0	R	√3 	1	1	0.58	0.58	∞
Modulation response	E2.5	3.0	R	√3	0	0	0.00	0.00	∞
Readout Electronics	E.2.6	0.021	N -	1	1	1	0.021	0.021	∞
Response Time	E.2.7	0.0	R	√3	0	0	0.00	0.00	∞
Integration Time	E.2.8	1.4	R	√3	0	0	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.0	R	√3	1	1	1.73	1.73	∞
RF ambient conditions-reflections	E.6.1	3.0	R	√3	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	√3	1	1	1.33	1.33	8
System validation source									
Deviation of experimental dipole from numerical dipole	E.6.4	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	8,6.6.4	5.0	R	√3	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2.0	R	√3	1	1	1.15	1.15	∞
Phantom and set-up									•
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4.0	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	8
Liquid conductivity (temperature uncertainty)	E.3.3	2.5	R	√3	0.78	0.71	1.13	1.02	8
Liquid conductivity (measured)	E.3.3	4	N	1	0.78	0.71	3.12	2.84	М
Liquid permittivity (temperature uncertainty)	E.3.4	2.5	R	√3	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	E.3.4	5	N	1	0.23	0.26	1.15	1.30	М
Combined Standard Uncertainty			RSS				10.462	10.276	
Expanded Uncertainty (95% Confidence interval)			K=2				20.924	20.551	



Page 33 of 160

SATIMO Uncertainty- SN 13/22 EPGO368									
System Check uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System					•		,	,	
Probe calibration drift	E.2.1.3	0.500	N	1	1	1	0.50	0.50	∞
Axial Isotropy	E.2.2	0.175	R	√3	0	0	0.00	0.00	∞
Hemispherical Isotropy	E.2.2	0.175	R	√3	0	0	0.00	0.00	∞
Boundary effect	E.2.3	1.000	R	√3	0	0	0.00	0.00	×
Linearity	E.2.4	0.990	R	√3	0	0	0.00	0.00	∞
System detection limits	E.2.4	1.0	R	√3	0	0	0.00	0.00	∞
Modulation response	E2.5	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	E.2.6	0.021	N	1	0	0	0.00	0.00	×
Response Time	E.2.7	0	R	√3	0	0	0.00	0.00	×
Integration Time	E.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.0	R	√3	0	0	0.00	0.00	∞
RF ambient conditions-reflections	E.6.1	3.0	R	√3	0	0	0.00	0.00	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	√3	0	0	0.00	0.00	∞
System check source (dipole)						_			
Deviation of experimental dipoles	E.6.4	2.0	N	1	1	1	2.00	2.00	∞
Input power and SAR drift measurement	8,6.6.4	5.0	R	√3	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameter	rs								
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4	R	√3	0.78	0.71	3.12	2.84	∞
Liquid permittivity measurement	E.3.3	5	N	1	0.78	0.71	1.15	1.30	М
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	√3	0.23	0.26	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	N	1	0.23	0.26	0.33	0.38	М
Combined Standard Uncertainty			RSS				5.562	5.203	
Expanded Uncertainty (95% Confidence interval)			K=2				11.124	10.406	



Page 34 of 160

12. CONDUCTED POWER MEASUREMENT GSM BAND

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1	>			•
	824.2	32.14	-9	23.14
GSM 850	836.6	32.10	-9	23.10
	848.8	32.18	-9	23.18
CDDC 050	824.2	32.16	-9	23.16
GPRS 850 (1 Slot)	836.6	31.99	-9	22.99
(1000)	848.8	32.06	-9	23.06
CDDC 050	824.2	30.15	-6	24.15
GPRS 850 (2 Slot)	836.6	30.07	-6	24.07
(2 0101)	848.8	29.97	-6	23.97
ODD0 050	824.2	28.19	-4.26	23.93
GPRS 850 (3 Slot)	836.6	28.17	-4.26	23.91
(3 300)	848.8	28.07	-4.26	23.81
GPRS 850 (4 Slot)	824.2	25.98	-3	22.98
	836.6	25.93	-3	22.93
(4 301)	848.8	25.92	-3	22.92
50000 050	824.2	25.20	-9	16.20
EGPRS 850 (1 Slot)	836.6	26.43	-9	17.43
(1 301)	848.8	24.75	-9	15.75
50000.000	824.2	25.06	-6	19.06
EGPRS 850 (2 Slot)	836.6	25.22	-6	19.22
(2 3101)	848.8	24.88	-6	18.88
50DD0 05-	824.2	24.03	-4.26	19.77
EGPRS 850	836.6	24.16	-4.26	19.90
(3 Slot)	848.8	23.79	-4.26	19.53
5000	824.2	21.03	-3	18.03
EGPRS 850	836.6	21.59	-3	18.59
(4 Slot)	848.8	21.16	-3	18.16



Page 35 of 160

GSM BAND CONTINUE

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1	>			•
	1850.2	29.04	-9	20.04
PCS1900	1880	28.88	-9	19.88
	1909.8	28.94	-9	19.94
GPRS1900	1850.2	29.03	-9	20.03
(1 Slot)	1880	28.76	-9	19.76
(10101)	1909.8	28.80	-9	19.80
CDDC4000	1850.2	27.02	-6	21.02
GPRS1900 (2 Slot)	1880	26.61	-6	20.61
(2 3101)	1909.8	26.40	-6	20.40
00004000	1850.2	25.45	-4.26	21.19
GPRS1900 (3 Slot)	1880	25.02	-4.26	20.76
(3 3101)	1909.8	24.82	-4.26	20.56
GPRS1900 (4 Slot)	1850.2	23.42	-3	20.42
	1880	22.99	-3	19.99
(4 3101)	1909.8	22.74	-3	19.74
505504000	1850.2	25.43	-9	16.43
EGPRS1900 (1 Slot)	1880	24.41	-9	15.41
(1 3101)	1909.8	23.85	-9	14.85
505504000	1850.2	24.85	-6	18.85
EGPRS1900 (2 Slot)	1880	24.48	-6	18.48
(2 3101)	1909.8	24.08	-6	18.08
E00004005	1850.2	23.34	-4.26	19.08
EGPRS1900	1880	23.20	-4.26	18.94
(3 Slot)	1909.8	22.56	-4.26	18.30
500004005	1850.2	21.29	-3	18.29
EGPRS1900	1880	21.01	-3	18.01
(4 Slot)	1909.8	20.28	-3	17.28

Note 1:

The Frame Power (Source-based time-averaged Power) is scaled the maximum burst average power based on time slots. The calculated methods are show as following:

Frame Power = Max burst power (1 Up Slot) - 9 dB

Frame Power = Max burst power (2 Up Slot) - 6 dB

Frame Power = Max burst power (3 Up Slot) - 4.26 dB

Frame Power = Max burst power (4 Up Slot) - 3 dB

Note 2

SAR is not required for GPRS (1 Slot) Mode because its output power is less than of Voice Mode



Page 36 of 160

UMTS BAND HSDPA Setup Configuration:

- •The EUT was connected to Base Station Agilent-8960 referred to the Setup Configuration.
- •The RF path losses were compensated into the measurements.
- ·A call was established between EUT and Based Station with following setting:
- (1) Set Gain Factors(β c and β d) parameters set according to each
- (2) Set RMC 12.2Kbps+HSDPA mode.
- (3) Set Cell Power=-86dBm
- (4) Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
- (5) Select HSDPA Uplink Parameters
- (6) Set Delta ACK, Delta NACK and Delta CQI=8
- (7) Set Ack Nack Repetition Factor to 3
- (8) Set CQI Feedback Cycle (k) to 4ms
- (9) Set CQI Repetition Factor to 2
- (10) Power Ctrl Mode=All Up bits
- •The transmitted maximum output power was recorded.

Table C.10.2.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	βc (Note5)	βd	βd (SF)	βc/βd	βHS (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15(Note 4)	15/15(Note 4)	64	12/15(Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: \triangle ACK, \triangle NACK and \triangle CQI = 30/15 with β_{hs} = 30/15 * β_c .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause

5.13.1AA, \triangle ACK and \triangle NACK = 30/15 with β_{hs} = 30/15 * β_c , and \triangle CQI = 24/15 with β_{hs} = 24/15 * β_c .

Note 3: CM = 1 for $\beta c/\beta d$ =12/15, hs/ c=24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the c/d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to c = 11/15 and d = 15/15.



Page 37 of 160

HSUPA Setup Configuration:

- · The EUT was connected to Base Station Agilent-8960 referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- · A call was established between EUT and Base Station with following setting *:
- (1) Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
- (2) Set the Gain Factors (βc and βd) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
- (3) Set Cell Power = -86 dBm
- (4) Set Channel Type = 12.2k + HSPA
- (5) Set UE Target Power
- (6) Power Ctrl Mode= Alternating bits
- (7) Set and observe the E-TFCI
- (8) Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- · The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub- test	βс	βd	βd (SF)	βc/βd	βHS (Note 1)	βес	βed (Note 4) (Note 5)	βed (SF)	βed (Code s)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TF CI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/22 5	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	βed1: 47/15 βed2: 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, \triangle ACK, \triangle NACK and \triangle CQI = 30/15 with β_{hs} = 30/15 * β_c . For sub-test 5, \triangle ACK, \triangle NACK and \triangle CQI = 5/15 with β_{hs} = 5/15 * β_c .

Note 2: CM = 1 for $\beta c/\beta d$ =12/15, hs/ c=24/15. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the c/ d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to c = 10/15 and d = 15/15. Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to

TS25.306 Table 5.1g.

Note 5: βed cannot be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 38 of 160

UMTS BAND II

Mode	Frequency	Avg. Burst Power
Wiode	(MHz)	(dBm)
WCDNA 4000	1852.4	22.33
WCDMA 1900 RMC	1880	22.01
RIVIC	1907.6	22.10
110004	1852.4	19.82
HSDPA Subtest 1	1880	19.62
Subtest	1907.6	19.42
110004	1852.4	19.83
HSDPA	1880	19.33
Subtest 2	1907.6	19.52
LICEDA	1852.4	20.03
HSDPA	1880	19.73
Subtest 3	1907.6	19.29
110004	1852.4	20.08
HSDPA	1880	19.51
Subtest 4	1907.6	19.14
LICLIDA	1852.4	20.19
HSUPA	1880	19.66
Subtest 1	1907.6	19.49
LICLIDA	1852.4	20.13
HSUPA	1880	19.80
Subtest 2	1907.6	19.77
1101104	1852.4	20.31
HSUPA Subtest 3	1880	20.14
Sublest 3	1907.6	19.95
LICLIDA	1852.4	20.29
HSUPA Subtest 4	1880	20.16
Sublest 4	1907.6	20.06
LICLIDA	1852.4	19.77
HSUPA	1880	19.26
Subtest 5	1907.6	19.38



Page 39 of 160

UMTS BAND V

Mode	Frequency	Avg. Burst Power
ivioue	(MHz)	(dBm)
WCDMA 850	826.4	22.32
RMC	836.4	22.41
RIVIC	846.6	22.42
LICDDA	826.4	19.60
HSDPA Subtest 1	836.4	19.47
Sublest 1	846.6	20.03
LIODDA	826.4	19.62
HSDPA	836.4	19.56
Subtest 2	846.6	20.13
LIODDA	826.4	20.05
HSDPA	836.4	19.69
Subtest 3	846.6	19.96
LIODDA	826.4	19.67
HSDPA	836.4	20.06
Subtest 4	846.6	19.87
LIQUIDA	826.4	20.12
HSUPA	836.4	20.16
Subtest 1	846.6	20.39
LICLIDA	826.4	20.42
HSUPA	836.4	20.01
Subtest 2	846.6	20.42
LICUDA	826.4	20.57
HSUPA	836.4	19.85
Subtest 3	846.6	20.33
LICUDA	826.4	20.34
HSUPA	836.4	19.56
Subtest 4	846.6	20.12
LICUDA	826.4	19.85
HSUPA	836.4	20.10
Subtest 5	846.6	20.34



Page 40 of 160

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)							
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CM≤3.5	MAX(CM-1,0)							
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH,									
E-DPDCH and E-DPCCH the MPR is based on the r	relative CM difference.								

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



Page 41 of 160

LTE Band

LTE (TDD) Considerations

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band 66 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

	Norm	al cyclic prefix i	n downlink	Ex	tended cyclic prefix	in downlink		
Special subframe	DwPTS	Up	PTS	DwPTS	UpPTS			
configuration		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_{\rm s}$			$7680 \cdot T_{\rm s}$				
1	$19760 \cdot T_{\rm s}$			20480·T _s	$2192 \cdot T_{\rm s}$	$2560 \cdot T_{\rm s}$		
2	$21952 \cdot T_{\rm s}$	$2192 \cdot T_{\rm s}$	$2560 \cdot T_{\rm s}$	23040 · T _s	$2192 \cdot I_{\rm S}$	2300·1 _s		
3	$24144 \cdot T_{\rm s}$			25600·T _s				
4	$26336 \cdot T_{\rm s}$			$7680 \cdot T_{\rm s}$				
5	$6592 \cdot T_{\rm s}$			$20480 \cdot T_{\rm s}$	$4384 \cdot T_s$	$5120 \cdot T_{\rm s}$		
6	$19760 \cdot T_{\rm s}$			$23040 \cdot T_{\rm s}$	4364·1 ₈	$J120 \cdot I_{s}$		
7	$21952 \cdot T_{\rm s}$	$4384 \cdot T_{\rm s}$	$5120 \cdot T_{\mathrm{s}}$	12800 · T _s				
8	$24144 \cdot T_{\rm s}$			-	-	-		
9	9 13168· <i>T</i> _s			-	-	-		

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink	Downlink-to-Uplink	Subframe number									
configuration	Switch-point periodicity	0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	C
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 42 of 160

Calculated Duty Cycle

Uplink-	Downlink-to-				Su	bframe	e Num	ber				Calculated
Downlink Configuration	Uplink Switch- point Periodicity	0	1	2	3	4	5	6	7	8	9	Duty Cycle(%)
0	5ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5ms	D	S	U	U	U	D	S	U	U	D	53.33

Note: Calculated Duty Cycle = Extended cyclic prefix in uplink x (Ts) x # of S + # of U Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0: Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$ where

 $Ts = 1/(15000 \times 2048)$ seconds



Page 43 of 160

LTE Band

Bandwidth Modulation RB size offset	LTE Band		Conducte	ed Power	of LTE Band 4(d	Bm)		
1.4MHz O	Domelyssielth	Meduletien	DD cine	RB	Townst MDD	Channel	Channel	Channel
1 3 0 22.09 21.73 21.93 5 0 22.05 21.79 21.89 2 0 0 22.03 21.84 21.83 3 2 0 21.88 21.91 21.81 3 0 21.88 21.91 21.81 3 0 21.88 21.92 21.77 6 0 1 20.84 20.66 20.56 20 1 21.82 20.92 21.89 3 1 21.90 20.88 21.93 5 1 21.83 21.03 21.99 20.92 21.93 20.10 22.08 21.00 3 2 1 20.99 20.95 20.00 21.00 4 0 2 20.35 20.10 20.32 20.00 20.35 20.10 20.32 20.00 20.05 20.10 20.32 20.00 20.00 21.86	Bandwidth	wodulation	KB Size	offset	larget MPR	19957	20175	20393
APSK GPSK S				0	0	21.94	21.70	21.94
1.4MHz 1.4MHz A			1	3	0	22.09	21.73	21.93
1.4MHz 1.4MHz 3				5	0	22.05	21.79	21.89
1.4MHz 1.4MHz		QPSK		0	0	22.03	21.84	21.83
1.4MHz 16QAM			3	2	0	21.88	21.91	21.81
1.4MHz 16QAM				3	0	21.88	21.92	21.77
Target MPR 1 1 21.82 20.92 21.89	1.4MHz		6	0	1	20.84	20.66	20.56
Target MPR Size S				0	1	21.82	20.92	21.89
Target MPR Tar			1	3	1	21.90	20.88	21.93
Bandwidth Modulation RB size RB offset Target MPR Target M				5	1	21.83	21.03	21.99
Bandwidth Modulation RB size RB offset Target MPR Target M		16QAM		0	1	21.00	21.00	21.06
Bandwidth Modulation RB size RB offset Target MPR Channel Channel Channel 19965 20175 20385			3	2	1	20.99	20.99	20.95
Bandwidth Modulation RB size RB offset Target MPR Channel 19965 Channel 20175 Channel 20385 A PSK 0 0 21.86 21.95 22.08 1 7 0 22.07 21.93 22.11 14 0 21.91 22.03 22.11 20.83 4 1 20.98 20.80 20.83 3MHz 15 0 1 20.97 20.81 20.75 15 0 1 20.92 20.84 20.74 1 7 1 21.32 21.61 21.21 1 7 1 21.41 21.63 21.09 14 1 21.28 21.57 21.06 16QAM 0 2 20.38 20.08 20.17 4 2 20.38 20.07 20.29 7 2 20.32 20.00 20.21				3	1	21.02	21.12	21.04
RB size Offset Target MPR 19965 20175 20385			6	0	2	20.35	20.10	20.32
MHz O	Bandwidth	Modulation	RB size		Target MPR	Channel	Channel	Channel
MHz 1	Danawia	oudidion		offset	- Tangot IIII TK	19965	20175	20385
3MHz QPSK 0 1 20.98 20.80 20.83 8 4 1 20.97 20.81 20.83 7 1 20.75 20.81 20.75 15 0 1 20.92 20.84 20.74 1 7 1 21.32 21.61 21.21 1 7 1 21.41 21.63 21.09 14 1 21.28 21.57 21.06 0 2 20.38 20.08 20.17 8 4 2 20.38 20.07 20.29 7 2 20.32 20.00 20.21				0	0	21.86	21.95	22.08
3MHz QPSK 8			1	7	0	22.07	21.93	22.11
3MHz 8				14	0	21.91	22.03	22.11
3MHz This is a second of the latest angle o		QPSK		0	1	20.98	20.80	20.83
3MHz 15 0 1 20.92 20.84 20.74 16QAM 0 1 21.32 21.61 21.21 1 7 1 21.41 21.63 21.09 14 1 21.28 21.57 21.06 0 2 20.38 20.08 20.17 8 4 2 20.38 20.07 20.29 7 2 20.32 20.00 20.21			8		1	20.97	20.81	20.83
3MHz 1 0 1 21.32 21.61 21.21 7 1 21.41 21.63 21.09 14 1 21.28 21.57 21.06 0 2 20.38 20.08 20.17 8 4 2 20.38 20.07 20.29 7 2 20.32 20.00 20.21				7	1	20.75	20.81	20.75
1 0 1 21.32 21.61 21.21 7 1 21.41 21.63 21.09 14 1 21.28 21.57 21.06 0 2 20.38 20.08 20.17 8 4 2 20.38 20.07 20.29 7 2 20.32 20.00 20.21				,	ı	20.73	20.0	20.73
16QAM 14 1 21.28 21.57 21.06 0 2 20.38 20.08 20.17 8 4 2 20.38 20.07 20.29 7 2 20.32 20.00 20.21	3MH-		15					
16QAM 0 2 20.38 20.08 20.17 8 4 2 20.38 20.07 20.29 7 2 20.32 20.00 20.21	3MHz		15	0	1	20.92	20.84	20.74
8 4 2 20.38 20.07 20.29 7 2 20.32 20.00 20.21	3MHz			0	1	20.92 21.32	20.84 21.61	20.74 21.21
7 2 20.32 20.00 20.21	3MHz			0 0 7	1 1 1	20.92 21.32 21.41	20.84 21.61 21.63	20.74 21.21 21.09
	3MHz	16QAM		0 0 7 14	1 1 1	20.92 21.32 21.41 21.28	20.84 21.61 21.63 21.57	20.74 21.21 21.09 21.06
15 0 2 20.07 20.04 19.98	3MHz	16QAM	1	0 0 7 14 0	1 1 1 1 2	20.92 21.32 21.41 21.28 20.38	20.84 21.61 21.63 21.57 20.08	20.74 21.21 21.09 21.06 20.17
	3MHz	16QAM	1	0 0 7 14 0 4	1 1 1 1 2 2	20.92 21.32 21.41 21.28 20.38 20.38	20.84 21.61 21.63 21.57 20.08 20.07	20.74 21.21 21.09 21.06 20.17 20.29



Page 44 of 160

		Conducte	ed Power	of LTE Band 4(d	Bm)		
Donalis i dela	Madulation	DD oi-o	RB	Toward MDD	Channel	Channel	Channel
Bandwidth	Modulation	RB size	offset	Target MPR	19975	20175	20375
			0	0	22.08	22.03	21.73
		1	13	0	21.90	22.12	21.88
			24	0	21.84	22.16	21.83
	QPSK		0	1	21.05	20.81	20.90
		12	6	1	21.05	20.81	20.89
			13	1	20.81	20.86	20.87
5MHz		25	0	1	20.87	20.77	20.77
JIVITIZ			0	1	20.44	21.07	20.43
		1	13	1	20.30	20.94	20.54
			24	1	20.34	21.07	20.53
	16QAM		0	2	20.29	19.97	19.81
		12	6	2	20.29	20.03	19.81
			13	2	20.06	19.94	19.91
		25	0	2	19.97	20.00	19.95
Bandwidth	Modulation	RB size	RB	Target MPR	Channel	Channel	Channel
Banawiatii	Modulation	ND 3120	offset	rarget iiii ix	20000	20175	20350
			0	0	22.16	21.97	22.14
		1	25	0	21.95	22.04	22.08
			49	0	22.00	22.11	22.05
	QPSK		0	1	20.88	20.91	20.88
		25	13	1	20.89	20.82	20.89
			25	1	20.97	20.75	20.90
10MHz		50	0	1	20.99	20.71	20.79
10141112			0	1	21.65	21.11	20.67
		1	25	1	21.43	21.08	20.74
			49	1	21.36	21.09	20.61
	16QAM		0	2	20.11	20.13	20.08
		25	13	2	20.12	20.14	20.09
			25	2	20.20	20.06	20.13
		50	0	2	19.98	20.08	20.03



Page 45 of 160

		Conducto	ed Power	of LTE Band 4(d	Bm)		
5			RB		Channel	Channel	Channel
Bandwidth	Modulation	RB size	offset	Target MPR	20025	20175	20325
			0	0	22.01	21.95	22.02
		1	38	0	21.86	22.19	22.07
			74	0	21.81	22.29	21.98
	QPSK		0	1	20.78	20.87	20.84
		36	18	1	20.86	20.87	20.84
			39	1	21.11	20.88	20.85
15MHz		75	0	1	20.93	20.79	20.79
ISMITZ			0	1	21.74	21.16	21.48
		1	38	1	21.66	21.12	21.68
			74	1	21.43	21.17	21.50
	16QAM		0	2	20.12	20.04	19.95
		36	18	2	20.13	20.05	19.95
			39	2	20.13	20.05	19.95
		75	0	2	19.95	20.06	20.03
Bandwidth	Modulation	RB size	RB	Target MPR	Channel	Channel	Channel
Banawiani	Modulation	112 0120	offset	Target III IX	20050	20175	20300
		_	0	0	22.26	21.95	22.06
		1	50	0	22.12	22.02	22.16
			99	0	22.06	22.01	22.09
	QPSK		0	1	20.93	20.90	20.85
		50	25	1	20.93	20.92	20.86
			50	1	21.00	21.05	20.83
20MHz		100	0	1	20.84	20.87	20.85
2011112			0	1	21.34	21.41	21.56
		1	50	1	21.13	21.24	21.77
			99	1	21.26	21.27	21.64
	16QAM		0	2	20.14	20.16	20.00
		50	25	2	20.14	20.16	20.01
			50	2	20.10	20.00	20.01
		100	0	2	19.92	20.04	20.16



Page 46 of 160

		Conducte	ed Power	of LTE Band 5(d	Bm)		
Don duvidala	Madulation	DD oi-o	RB	Toward MDD	Channel	Channel	Channel
Bandwidth	Modulation	RB size	offset	Target MPR	20407	20525	20643
			0	0	22.14	22.21	22.13
		1	3	0	22.00	22.04	22.20
			5	0	21.96	22.12	21.99
	QPSK		0	0	22.14	22.12	22.03
		3	2	0	22.13	22.10	22.02
			3	0	22.13	22.14	22.11
1.4MHz		6	0	1	21.49	20.90	21.10
1.4111112			0	1	21.99	22.12	21.17
		1	3	1	22.00	22.05	21.21
			5	1	21.95	22.07	21.05
	16QAM		0	1	21.52	21.25	21.27
		3	2	1	21.51	21.25	21.27
			3	1	21.54	21.17	21.22
		6	0	2	20.63	20.54	20.73
Bandwidth	Modulation	RB size	RB	Target MPR	Channel	Channel	Channel
Barrawiani	modulation		offset	- Iai got iiii ix	20415	20525	20635
			0	0	22.07	22.18	22.22
			7	0	21.90	22.12	22.14
			14	0	21.92	22.11	22.14
	QPSK		0	1	21.45	21.00	21.07
		8	4	1	21.44	21.16	21.07
			7	1	21.01	21.00	20.99
3MHz		15	0	1	21.30	21.07	21.00
O 12			0	1	21.53	21.94	21.10
		1	7	1	21.61	21.66	21.07
			14	1	21.19	21.69	20.96
	16QAM		0	2	20.67	20.14	20.39
		8	4	2	20.62	20.15	20.39
			7	2	20.19	20.44	20.65
		15	0	2	20.46	20.50	20.10



Page 47 of 160

		Conducto	ed Power	of LTE Band 5(d	Bm)		
			RB		Channel	Channel	Channel
Bandwidth	Modulation	RB size	offset	Target MPR	20425	20525	20625
			0	0	22.13	22.14	22.03
		1	13	0	21.92	22.45	22.13
			24	0	22.15	22.20	21.88
	QPSK		0	1	21.33	21.17	21.39
		12	6	1	21.32	21.17	21.38
			13	1	20.95	20.99	20.99
5MHz		25	0	1	20.82	20.98	21.07
SIVITIZ			0	1	20.64	21.24	21.35
		1	13	1	20.35	21.24	21.17
			24	1	20.34	21.59	21.16
	16QAM		0	2	20.41	20.10	20.30
		12	6	2	20.40	20.11	20.46
			13	2	19.99	20.41	20.28
		25	0	2	20.17	20.34	20.14
Bandwidth	Modulation	RB size	RB	Target MPR	Channel	Channel	Channel
Barrawiatii	Modulation		offset	Target III IX	20450	20525	20600
			0	0	22.06	22.25	22.16
		1	25	0	22.04	22.34	22.08
			49	0	21.97	22.20	21.98
	QPSK		0	1	20.98	21.13	20.93
		25	13	1	20.98	21.14	20.93
			25	1	21.09	21.31	21.00
10MHz		50	0	1	21.11	21.10	20.90
TOWN IZ			0	1	21.63	21.12	21.04
		1	25	1	21.24	21.39	20.76
			49	1	21.26	21.34	20.81
	16QAM		0	2	20.03	20.23	20.50
		25	13	2	20.03	20.24	20.50
			25	2	20.17	20.54	20.33
		50	0	2	20.42	20.56	20.30




Page 48 of 160

		Cond	lucted Power	of LTE Ba	and 7 (dBm)			
5		·	RB	Target	Channel	Channel	Channel	
Bandwidth	Modulation	RB size	offset	MPR	20775	21100	21425	
			0	0	21.98	22.23	22.14	
		1	12	0	21.99	22.14	21.90	
			24	0	21.90	22.26	21.80	
	QPSK		0	1	20.83	21.06	21.17	
		12	6	1	20.78	21.06	21.17	
			13	1	20.83	21.08	21.01	
5MHz		25	0	1	20.94	21.01	21.36	
SIVITZ			0	1	20.26	21.16	21.35	
		1	12	1	20.49	21.28	21.33	
			24	1	20.41	21.32	21.24	
	16QAM		0	2	20.11	20.46	20.36	
		12	6	2	19.96	20.48	20.33	
				13	2	20.04	20.48	20.28
		25	0	2	20.72	20.51	20.44	
Bandwidth	Modulation	RB size	RB Target	Channel	Channel	Channel		
Danuwium	Wodulation	ND SIZE	offset	MPR	20800	21100	21400	
			0	0	22.08	22.17	22.45	
		1	24	0	21.72	22.29	22.35	
			49	0	21.74	22.42	22.21	
	QPSK		0	1	20.83	21.07	21.30	
		25	12	1	20.82	21.08	21.31	
			25	1	20.77	21.04	21.20	
10MHz		50	0	1	20.96	21.22	21.26	
IUIVIIIZ			0	1	21.13	21.36	21.05	
		1	24	1	21.26	21.48	21.06	
			49	1	21.11	21.27	20.91	
	16QAM		0	2	19.96	20.45	20.52	
		25	12	2	19.97	20.46	20.55	
			25	2	20.07	20.36	20.40	
		50	0	2	20.11	20.39	20.47	



Page 49 of 160

		Co	nducted Pov	ver of LTE	Band 7 (dBm)		
			RB	Target	Channel	Channel	Channel
Bandwidth	Modulation	RB size	offset	MPR	20825	21100	21375
			0	0	21.96	22.29	22.63
		1	37	0	21.97	22.23	22.61
			74	0	21.97	22.45	22.49
	QPSK		0	1	21.07	21.16	21.58
		37	16	1	21.07	21.16	21.59
			35	1	21.07	21.16	21.58
15MHz		75	0	1	21.00	21.43	21.52
IOIVIEZ			0	1	21.37	21.65	22.04
		1	37	1	21.64	21.70	22.07
			74	1	21.53	21.78	21.94
	16QAM		0	2	20.12	20.45	20.57
		37	16	2	20.13	20.46	20.58
			35	2	20.14	20.31	20.59
		75	0	2	20.19	20.34	20.62
Bandwidth	Modulation		Target	Channel	Channel	Channel	
Dalluwiulli	Woddiation	KD SIZE	offset	MPR	20850	21100	21350
			0	0	22.21	22.71	22.61
		1	49	0	22.14	22.68	22.59
			99	0	22.23	22.82	22.32
	QPSK		0	1	20.90	21.09	21.57
		50	25	1	21.04	21.10	21.59
			49	1	20.91	21.27	21.40
20MHz		100	0	1	20.89	21.10	21.37
20141112			0	1	21.11	21.75	22.10
		1	49	1	21.11	21.66	22.22
			99	1	21.22	21.68	21.96
	16QAM		0	2	20.22	20.45	20.56
		50	25	2	20.22	20.47	20.59
			49	2	20.37	20.33	20.51
		100	0	2	20.18	20.29	20.67





		Conducte	d Power o	of LTE Band 12(d	dBm)			
D	Mark Ladian	DD .: .	RB	Tarrest MDD	Channel	Channel	Channel	
Bandwidth	Modulation	RB size	offset	Target MPR	23017	23095	23173	
			0	0	22.00	22.38	21.93	
		1	3	0	21.96	22.31	21.93	
			5	0	21.88	22.29	21.89	
	QPSK		0	0	22.09	22.17	21.95	
		3	2	0	22.07	22.27	22.16	
			3	0	22.00	22.18	21.95	
1.4MHz		6	0	1	20.02	20.97	20.71	
1.4WITZ			0	1	21.44	22.15	21.06	
		1	3	1	21.54	21.77	20.77	
			5	1	21.39	21.76	20.75	
	16QAM		0	1	21.06	21.07	21.36	
		3	2	1	21.06	20.97	21.35	
			3	1	21.12	21.01	20.95	
		6	0	2	20.25	20.57	20.73	
Bandwidth	Modulation	RB size	RB	Target MPR	Channel	Channel	Channel	
Banawiatii	Woddiation	ND 3120	offset	rarget wir ix	23025	23095	23165	
			0	0	22.02	22.13	21.98	
		1	7	0	21.87	22.16	21.99	
			14	0	22.38	22.26	22.03	
	QPSK		0	1	20.88	21.51	21.37	
		8	4	1	20.88	21.51	21.37	
			7	1	21.50	21.25	20.94	
3MHz		15	0	1	20.89	21.07	21.36	
JIII IZ			0	1	21.18	22.26	21.25	
		1	7	1	21.02	21.93	21.26	
			14	1	21.63	21.77	20.81	
	16QAM		0	2	20.26	20.48	20.57	
		8	4	2	20.42	20.48	20.58	
			1	7	2	20.55	20.19	20.63
			,		20.00	20.13	20.00	


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




Page 51 of 160

		Conducte	d Power o	of LTE Band 12(d	dBm)		
5 1			RB		Channel	Channel	Channel
Bandwidth	Modulation	RB size	offset	Target MPR	23035	23095	23155
			0	0	22.07	22.17	21.79
		1	13	0	22.40	22.12	21.89
			24	0	22.03	22.01	21.81
	QPSK		0	1	20.96	21.48	21.43
		12	6	1	20.99	21.47	21.44
			13	1	21.43	21.25	21.44
5MHz		25	0	1	21.39	21.24	21.28
SIVITIZ			0	1	20.25	21.50	20.97
		1	13	1	20.82	21.15	21.12
			24	1	20.64	21.13	20.47
	16QAM		0	2	20.19	20.53	20.25
		12	6	2	20.20	20.53	20.11
			13	2	20.47	20.33	20.28
		25	0	2	20.82	20.04	20.49
Bandwidth	Modulation	RB size	RB	Target MPR	Channel	Channel	Channel
Barrawiatir	Modulation	IND SIZE	offset	Target III IX	23060	23095	23130
			0	0	21.92	22.59	22.27
		1	25	0	21.87	22.19	22.11
			49	0	21.91	22.08	22.30
	QPSK		0	1	21.48	21.44	21.26
		25	13	1	21.47	21.60	21.27
			25	1	21.57	21.14	21.49
10MHz		50	0	1	21.40	21.24	21.00
. Oitii IZ			0	1	21.06	21.50	21.12
		1	25	1	21.63	21.52	20.85
			49	1	21.47	21.90	20.63
	16QAM		0	2	20.49	20.63	20.16
		25	13	2	20.49	20.63	20.18
			25	2	20.58	20.59	20.55
		50	0	2	20.59	20.21	20.46





		Conducte	d Power o	of LTE Band 13(c	dBm)			
Danish state	Madulatian	DD ai-a	RB	Towns MDD	Channel	Channel	Channel	
Bandwidth	Modulation	RB size	offset	Target MPR	23205	23230	23255	
			0	0	22.18	22.12	22.00	
		1	13	0	22.12	22.24	22.06	
			24	0	22.05	22.10	22.04	
	QPSK		0	1	21.22	21.23	21.09	
		12	6	1	21.25	21.15	21.06	
			13	1	21.10	20.96	21.08	
5MHz		25	0	1	21.08	21.15	20.97	
SIVITIZ			0	1	20.74	21.29	20.78	
		1	13	1	20.48	21.39	20.68	
			24	1	20.64	21.16	20.65	
	16QAM		0	2	20.56	20.17	20.45	
		12	6	2	20.60	20.19	20.43	
			13	2	20.08	20.70	20.33	
		25	0	2	20.21	20.07	20.34	
Bandwidth	Modulation	Modulation RB size	RB	Target MPR		Channel		
Banaman	oudidion	ND GIZO	offset larget wir it		23230			
			0	0		22.10		
		1	25	0		22.18		
			49	0	22.12			
	QPSK		0	1		21.16		
		25	13	1		21.15		
			25	1		20.99		
10MHz		50	0	1		21.21		
			0	1		21.35		
		1	25	1		21.48		
			49	1		21.38		
	16QAM		0	2		20.15		
		25	13	2		20.18		
			25	2		20.49		
		50	0	2		20.06		





		Conducte	d Power o	of LTE Band 66(d	dBm)		
D	Maria de Carr	DD .: .	RB	Tarrest MDD	Channel	Channel	Channel
Bandwidth	Modulation	RB size	offset	offset Target MPR	131979	132422	132665
			0	0	22.10	22.06	22.09
		1	2	0	22.25	22.11	22.15
			5	0	22.22	22.19	22.07
	QPSK		0	0	22.23	22.24	22.02
		3	1	0	22.22	22.22	22.12
			3	0	22.22	22.21	22.12
1.4MHz		6	0	1	21.06	21.10	21.00
1.4171112			0	1	22.18	21.69	21.56
		1	2	1	22.15	21.64	21.46
			5	1	22.21	21.66	21.51
	16QAM		0	1	21.45	21.22	21.05
		3	1	1	21.45	21.10	21.05
			3	1	21.47	21.10	21.12
		6	0	2	20.47	20.23	20.20
Bandwidth	dwidth Modulation	RB size	RB	Target MPR	Channel	Channel	Channel
Banawian	Modulation	IND SIZE	offset	rarget iiii r	131987	132422	132657
			0	0	21.99	22.12	21.95
		1	8	0	22.14	22.08	22.29
			14	0	22.15	22.15	22.11
	QPSK		0	1	21.07	21.09	21.03
		8	4	1	21.07	21.09	21.03
			7	1	21.11	21.05	20.96
3MHz		15	0	1	21.20	21.16	21.12
0			0	1	21.57	21.76	21.25
		1	8	1	21.61	21.71	21.25
			14	1	21.49	21.79	21.22
	16QAM		0	2	20.51	20.14	20.43
		8	4	2	20.51	20.32	20.43
			7	2	20.57	20.12	20.36
		15	0	2	20.23	20.39	20.17



Page 54 of 160

		Conducte	d Power o	of LTE Band 66(d	dBm)				
D	Mar I Jadian	DD at a	RB	Taxaaa MDD	Channel	Channel	Channel		
Bandwidth	Modulation	RB size	offset	Target MPR	131997	132422	132647		
			0	0	22.04	22.23	22.15		
		1	12	0	22.11	22.38	22.09		
			24	0	22.09	22.26	22.11		
	QPSK		0	1	21.23	21.15	21.16		
		12	6	1	21.23	21.16	21.15		
			13	1	21.01	21.06	21.04		
5MHz		25	0	1	21.12	20.98	21.09		
SIVITIZ			0	1	20.77	21.48	21.00		
		1	12	1	20.55	21.31	21.04		
			24	1	20.70	21.32	20.94		
	16QAM		0	2	20.36	20.20	20.18		
		12	6	2	20.36	20.21	20.18		
				13	2	20.29	20.10	20.11	
		25	0	2	20.33	20.18	20.25		
Bandwidth	Modulation	RB size	RB	Target MPR	Channel	Channel	Channel		
Banawian	Modulation	IND SIZE	offset	rarget iiii re	132022	132422	132622		
			0	0	21.99	22.15	22.09		
		1	24	0	22.12	22.34	22.22		
			49	0	22.11	22.34	22.15		
	QPSK		0	1	20.93	21.13	21.16		
		25	12	1	20.93	21.14	21.15		
			25	1	21.06	21.20	21.11		
10MHz		50	25 0	1	21.06 21.08	21.20 21.02	21.11 21.32		
10MHz		50							
10MHz		50	0	1	21.08	21.02	21.32		
10MHz			0	1	21.08 21.61	21.02 21.68	21.32 20.88		
10MHz	16QAM		0 0 24	1 1 1	21.08 21.61 21.50	21.02 21.68 21.72	21.32 20.88 21.11		
10MHz	16QAM		0 0 24 49	1 1 1	21.08 21.61 21.50 21.48	21.02 21.68 21.72 21.76	21.32 20.88 21.11 20.96		
10MHz	16QAM	1	0 0 24 49 0	1 1 1 1 2	21.08 21.61 21.50 21.48 20.34	21.02 21.68 21.72 21.76 20.25	21.32 20.88 21.11 20.96 20.39		



Page 55 of 160

		Conducte	d Power o	of LTE Band 66(d	dBm)		
5			RB		Channel	Channel	Channel
Bandwidth	Modulation	RB size	offset	Target MPR	132047	132422	132597
			0	0	22.03	22.18	22.00
		1	38	0	22.07	22.38	22.02
			74	0	22.01	22.32	22.02
	QPSK		0	1	21.04	21.10	21.06
		38	18	1	21.03	21.00	21.05
			37	1	21.01	20.99	21.05
15MHz		75	0	1	21.20	20.97	21.17
13141112			0	1	21.89	21.72	21.83
		1	38	1	21.72	21.68	21.70
	400 484		74	1	21.65	21.79	21.71
	16QAM		0	2	20.34	20.09	20.29
		38	18	2	20.35	20.10	20.29
			37	2	20.25	20.11	20.30
		75	0	2	20.26	20.21	20.18
Bandwidth	Modulation	n RB size	RB	Target MPR	Channel	Channel	Channel
	oudidion	112 0.20	offset		132072	132422	132572
			0	0	22.19	22.49	22.09
		1	49	0	22.44	22.53	22.15
			99	0	22.29	22.44	22.16
	QPSK		0	1	21.10	21.19	20.92
		50	25	1	21.10	21.10	21.02
			50	1	21.11	21.11	21.17
20MHz		100	0	1	21.12	20.97	21.17
20.01112			0	1	21.35	21.11	21.94
		1	49	1	21.22	20.99	21.87
			99	1	21.27	21.14	21.82
	16QAM		0	2	20.35	20.09	20.14
		50	25	2	20.35	20.11	20.15
			50	2	20.32	20.13	20.36
		100	0	2	20.14	20.28	20.22



Page 56 of 160

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3.3-1 of the 3GPP TS36.101.

Table 6.2.3.3-1 Maximum Power Reduction (MPR) for Power class3

Marahalatian		Maximum Power Reduction (MPR) for Power[RB]						
Modulation	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	MPR(dB)	
QPSK	>5	>4	>8	>12	>16	>18	≤1	
16QAM	≤5	≤4	≤8	≤12	≤16	≤18	≤1	
16QAM	>5	>4	>8	>12	>16	>18	≤2	

The allowed A-MPR values specified below in Table 6.2.4.3-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3



Page 57 of 160

Table 6.2.4.3-1: Additional Maximum Power Reduction (A-MPR) / Spectrum Emission requirements

Network	.3-1: Additional Max		Channel	Resources	
Signaling value	Requirements (sub-clause)	E-UTRA Band	bandwidth (MHz)	Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.2-1	1.4,3,5,10,15,20	Table 5.4.2-1	N/A
-			3	>5	≤ 1
			5	>6	≤ 1
NS_03	6.6.2.2.3.1	2,4,10, 23,	10	>6	≤ 1
_		25,35,36	15	>8	≤ 1
			20	>10	≤ 1
NO 04	22222	4.4	5	>6	≤1
NS_04	6.6.2.2.3.2	41	10, 15, 20	Table 6	.2.4.3-4
NS 05	6.6.3.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.4.2-1	N/A
NS_07	6.6.2.2.3.3 6.6.3.3.3.2	13	10	Table 6.2.4.3-2	Table 6.2.4.3-2
NS_08	6.6.3.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.3.4	24	10, 15	> 40	≤ 1
142_09	0.0.3.3.3.4	21	10, 15	> 55	≤2
NS_10		20	15, 20	Table 6.2.4.3-3	Table 6.2.4.3-3
NS_11	6.6.2.2.1 6.6.3.3.13	231	1.4, 3, 5, 10,15,20	Table 6.2.4.3-5	Table 6.2.4.3-5
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4.3-6	Table 6.2.4.3-6
NS_13	6.6.3.3.6	26	5	Table 6.2.4.3-7	Table 6.2.4.3-7
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4.3-8	Table 6.2.4.3-8
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4.3-9	Table 6.2.4.3-9,
140_10	0.0.3.3.0	20	1.4, 3, 5, 10, 15		Table 6.2.4.3-10
NS_16	6.6.3.3.9	27	3, 5, 10	-	Table 6.2.4.3-12, 2.4.3-13
NC 47	6.6.3.3.10	28	5, 10	Table 5.4.2-1	N/A
NS_17	6.6.3.3.11	28	5	≥2	≤ 1
NS_18			10, 15, 20	≥ 1	≤ 4
NS_19			10, 15, 20	Table 6.2.4.3-15	Table 6.2.4.3-15
NS_20			5, 10, 15, 20	Table 6.2.4.3-14	Table 6.2.4.3-14
NS_20	-	-	-	-	-



Page 58 of 160

WIFI

Mode	Data Rate (Mbps)	Channel	Frequency(MHz)	Avg. Burst Power(dBm)
		01	2412	11.48
802.11b	1	06	2437	16.65
		11	2462	15.87
		01	2412	10.42
802.11g	6	06	2437	15.89
		11	2462	14.70
		01	2412	10.55
802.11n(20)	6.5	06	2437	15.77
		11	2462	14.94

Bluetooth_V4.2(BR/EDR)

Modulation	Channel	Frequency(MHz)	Peak Power (dBm)
	0	2402	4.85
GFSK	39	2441	4.95
	78	2480	3.82
	0	2402	4.83
π /4-DQPSK	39	2441	4.99
	78	2480	4.11
	0	2402	4.98
8-DPSK	39	2441	5.34
	78	2480	4.35

Bluetooth_V4.2(BLE)

Modulation	Channel	Frequency(MHz)	Peak Power (dBm)
	0	2402	-2.76
GFSK	19	2440	-0.63
	39	2480	-1.33



Page 59 of 160

13. TEST RESULTS

13.1. SAR Test Results Summary

13.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to IEEE 1528-2013, Body-worn and 4 Edges SAR was performed with the device 10mm from the phantom.

13.1.2. Operation Mode

- 1. Per KDB 447498 D04 v01 ,for each exposure position, if the highest 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional.
- 2. Per KDB 865664 D01 v01r04,for each frequency band, if the measured SAR is ≥0.8W/kg, testing for repeated SAR measurement is required, that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
 - (1) When the original highest measured SAR is \geq 0.8W/kg, repeat that measurement once.
 - (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥1.45 W/kg.
 - (3) Perform a third repeated measurement only if the original, first and second repeated measurement is ≥1.5 W/kg and ratio of largest to smallest SAR for the original, first and second measurement is ≥ 1.20.
- 3. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to be test.
- 4. Per KDB 648474 D04 v01r03,when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤1.2W/kg, SAR testing with a headset connected is not required.
- 5. Per KDB 248227 D01v02r02,for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤1.2W/kg.
- 6. Per KDB 941225 D06 V02r01, When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations.
- 7. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:

 Maximum Scaling SAR =tested SAR (Max.) ×[maximum turn-up power (mw)/ maximum measurement output power(mw)]
- 8. Proximity sensor, just for avoiding the wrong operation in the phone screen when call, and has no influence on output power or SAR result
- 9. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1RB allocation using the RB offset and required test channel combination with highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- 10. Per KDB 941125 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
- 11. Per KDB 941125 D05v02r05. For QPSK with 100% RB allocation. SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and



Page 60 of 160

1RB allocation and the highest reported SAR is >1.45 W/kg, the remaining required test channels must also be tested.

- 12. Per KDB 941125 D05v02r05. 16QAM output power for each RB allocation configuration is not 1/2 dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤1.45W/kg, Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
- 13. Per KDB 941125 D05v02r05. Smaller bandwidth output power for each RB allocation configuration is >not 1/2 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤1.45W/kg. Per KDB 941125 D05v02r05, smaller bandwidth SAR testing is not required.



Page 61 of 160

13.1.3. Test Result

SAR MEASUREN	SAR MEASUREMENT											
Depth of Liquid (c	m):>15			Relative H	lumidity (%): 57.7						
Product: 4G Mobi	le Phone											
Test Mode: GSM8	350 with GMSK m	odulatio	n									
Position Mode Ch. Fr. (MHz) Power Cyrift (1g) (1g) Power (dBm) Meas. output Scaled SAR (W/kg)								Limit (W/kg)				
SIM 1 Card												
Left Cheek	voice	190	836.6	-0.18	0.216	32.50	32.10	0.237	1.6			
Left Tilt	voice	190	836.6	0.02	0.083	32.50	32.10	0.091	1.6			
Right Cheek	voice	190	836.6	-0.19	0.208	32.50	32.10	0.228	1.6			
Right Tilt	voice	190	836.6	0.05	0.104	32.50	32.10	0.114	1.6			
Body back	voice	190	836.6	-0.14	0.623	32.50	32.10	0.683	1.6			
Body front	voice	190	836.6	0.01	0.216	32.50	32.10	0.237	1.6			
Body back	GPRS-2 slot	190	836.6	-0.13	0.314	30.50	30.07	0.347	1.6			
Body front	GPRS-2 slot	190	836.6	-0.07	0.198	30.50	30.07	0.219	1.6			
Edge 2(Right)	GPRS-2 slot	190	836.6	-0.02	0.201	30.50	30.07	0.222	1.6			
Edge 3(Bottom)	GPRS-2 slot	190	836.6	0.15	0.118	30.50	30.07	0.130	1.6			
Edge 4(Left)	GPRS-2 slot	190	836.6	0.01	0.110	30.50	30.07	0.121	1.6			

Note:

[•] When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

[•]The test separation for body back, body front and 4 Edges is 10mm of all above table.



Page 62 of 160

SAR MEASUREMENT	
Depth of Liquid (cm):>15	Relative Humidity (%): 56.2
Product: 4G Mobile Phone	

Test Mode: PCS1900 with GMSK modulation

Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
SIM 1 Card									
Left Cheek	voice	661	1880.0	-0.09	0.088	29.50	28.88	0.102	1.6
Left Tilt	voice	661	1880.0	0.14	0.069	29.50	28.88	0.080	1.6
Right Cheek	voice	661	1880.0	-0.02	0.172	29.50	28.88	0.198	1.6
Right Tilt	voice	661	1880.0	-0.07	0.022	29.50	28.88	0.025	1.6
Body back	voice	661	1880.0	0.02	0.310	29.50	28.88	0.358	1.6
Body front	voice	661	1880.0	-0.11	0.148	29.50	28.88	0.171	1.6
Body back	GPRS-3 slot	661	1880.0	0.06	0.454	25.50	25.02	0.507	1.6
Body front	GPRS-3 slot	661	1880.0	-0.11	0.224	25.50	25.02	0.250	1.6
Edge 2(Right)	GPRS-3 slot	661	1880.0	0.08	0.234	25.50	25.02	0.261	1.6
Edge 3(Bottom)	GPRS-3 slot	661	1880.0	-0.12	0.176	25.50	25.02	0.197	1.6
Edge 4(Left)	GPRS-3 slot	661	1880.0	0.04	0.064	25.50	25.02	0.071	1.6

Note:

• When the 1-g Reported SAR is \leq 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

[•]The test separation for body back, body front and 4 Edges is 10mm of all above table.



Page 63 of 160

SAR			

Depth of Liquid (cm):>15 Relative Humidity (%): 56.2

Product: 4G Mobile Phone

Test Mode: WCDMA Band II with QPSK modulation

Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)			
Left Cheek	RMC 12.2kbps	9400	1880	-0.14	0.186	22.10	22.01	0.190	1.6			
Left Tilt	RMC 12.2kbps	9400	1880	0.02	0.103	22.10	22.01	0.105	1.6			
Right Cheek	RMC 12.2kbps	9400	1880	-0.09	0.310	22.10	22.01	0.316	1.6			
Right Tilt	RMC 12.2kbps	9400	1880	0.05	0.106	22.10	22.01	0.108	1.6			
Body back	RMC 12.2kbps	9400	1880	-0.11	0.748	22.10	22.01	0.764	1.6			
Body front	RMC 12.2kbps	9400	1880	0.06	0.265	22.10	22.01	0.271	1.6			
Edge 2(Right)	RMC 12.2kbps	9400	1880	-0.03	0.241	22.10	22.01	0.246	1.6			
Edge 3(Bottom)	RMC 12.2kbps	9400	1880	-0.08	0.321	22.10	22.01	0.328	1.6			
Edge 4(Left)	RMC 12.2kbps	9400	1880	0.12	0.111	22.10	22.01	0.113	1.6			

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- •The test separation for body back, body front and 4 Edges is 10mm of all above table.



Page 64 of 160

SAR MEASUREMENT

Depth of Liquid (cm):>15 Relative Humidity (%): 57.7

Product: 4G Mobile Phone

Test Mode: WCDMA Band V with QPSK modulation

Max.												
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	Drift (1g)		Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)			
Left Cheek	RMC 12.2kbps	4183	836.4	0.07	0.169	22.50	22.41	0.173	1.6			
Left Tilt	RMC 12.2kbps	4183	836.4	-0.15	0.088	22.50	22.41	0.090	1.6			
Right Cheek	RMC 12.2kbps	4183	836.4	0.02	0.191	22.50	22.41	0.195	1.6			
Right Tilt	RMC 12.2kbps	4183	836.4	0.06	0.100	22.50	22.41	0.102	1.6			
Body back	RMC 12.2kbps	4183	836.4	-0.08	0.037	22.50	22.41	0.038	1.6			
Body front	RMC 12.2kbps	4183	836.4	0.14	0.133	22.50	22.41	0.136	1.6			
Edge 2(Right)	RMC 12.2kbps	4183	836.4	-0.12	0.116	22.50	22.41	0.118	1.6			
Edge 3(Bottom)	RMC 12.2kbps	4183	836.4	0.09	0.071	22.50	22.41	0.072	1.6			
Edge 4(Left)	RMC 12.2kbps	4183	836.4	0.03	0.085	22.50	22.41	0.087	1.6			

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- •The test separation for body back, body front and 4 Edges is 10mm of all above table.



Page 65 of 160

SAR MEASUREMENT

Depth of Liquid (cm):>15 Relative Humidity (%): 53.1

Product: 4G Mobile Phone

Test Mode: LTE Band 4

ВМ			Test M	lode		Freq.	Power	SAR	Max. Tuneu	Meas. output	Scaled	Limit
MHz	MOD	Position	UL RB Allocation	UL RB START	Ch.	(MHz)	Drift (<±5%)	(1g) (W/kg)	p Power (dBm)	Power (dBm)	SAR (W/kg)	(W/kg)
		Left Cheek	1	0	20175	1732.5	-0.07	0.199	22.50	21.95	0.226	1.6
		Left Tilt	1	0	20175	1732.5	0.04	0.066	22.50	21.95	0.075	1.6
		Right Cheek	1	0	20175	1732.5	-0.11	0.454	22.50	21.95	0.515	1.6
		Right Tilt	1	0	20175	1732.5	-0.03	0.110	22.50	21.95	0.125	1.6
20	QPSK	Body back	1	0	20175	1732.5	0.18	0.519	22.50	21.95	0.589	1.6
		Body front	1	0	20175	1732.5	-0.14	0.302	22.50	21.95	0.343	1.6
		Edge 2(Right)	1	0	20175	1732.5	0.09	0.328	22.50	21.95	0.372	1.6
		Edge 3(Bottom)	1	0	20175	1732.5	-0.02	0.220	22.50	21.95	0.250	1.6
		Edge 4(Left)	1	0	20175	1732.5	0.10	0.107	22.50	21.95	0.121	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- •The test separation for body back, body front and 4 Edges is 10mm of all above table.



Page 66 of 160

SAR MEASUREMENT

Depth of Liquid (cm):>15 Relative Humidity (%): 63.4

Product: 4G Mobile Phone

Test Mode: LTE Band 5

	Tool Mode. ETE Band 0													
ВМ	MOD	Don'tion.		t Mode	Ch.	Freq.	Power	SAR (1g)	Max. Tuneup	Meas. output	Scaled SAR	Limit (W/kg)		
MHz	MOD	Position	UL RB Allocati on	UL RB START	Cn.	(MHz)	Drift (<±5%)	(W/kg)	Power (dBm)	Power (dBm)	(W/kg)			
		Left Cheek	1	0	20525	836.5	0.16	0.224	22.50	22.25	0.237	1.6		
		Left Tilt	1	0	20525	836.5	-0.03	0.131	22.50	22.25	0.139	1.6		
		Right Cheek	1	0	20525	836.5	0.08	0.284	22.50	22.25	0.301	1.6		
		Right Tilt	1	0	20525	836.5	-0.11	0.145	22.50	22.25	0.154	1.6		
10	QPSK	Body back	1	0	20525	836.5	0.15	0.330	22.50	22.25	0.350	1.6		
10	QFSIX	Body front	1	0	20525	836.5	-0.07	0.208	22.50	22.25	0.220	1.6		
		Edge 2(Right)	1	0	20525	836.5	0.04	0.190	22.50	22.25	0.201	1.6		
		Edge 3(Bottom)	1	0	20525	836.5	-0.12	0.101	22.50	22.25	0.107	1.6		
		Edge 4(Left)	1	0	20525	836.5	0.09	0.128	22.50	22.25	0.136	1.6		

Note:

• When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

-The test separation for body back, body front and 4 Edges is 10mm of all above table.



Page 67 of 160

SAR MEASUREMENT

Depth of Liquid (cm):>15 Relative Humidity (%): 56.7

Product: 4G Mobile Phone

Test Mode: LTE Band 7

ВМ			Test Mo	ode	-	Freq.	Power	SAR	Max. Tuneup	Meas.	Scaled	Limit (W/kg)
MHz	MOD	Position	UL RB Allocation	UL RB START	Ch.	(MHz)	Drift (<±5%)	(1g) (W/kg)	Power (dBm)	Power (dBm)	SAR (W/kg)	
		Left Cheek	1	0	21100	2535	0.16	0.539	23.00	22.71	0.576	1.6
		Left Tilt	1	0	21100	2535	-0.20	0.243	23.00	22.71	0.260	1.6
		Right Cheek	1	0	21100	2535	0.19	0.341	23.00	22.71	0.365	1.6
		Right Tilt	1	0	21100	2535	-0.13	0.315	23.00	22.71	0.337	1.6
		Body back	1	0	20850	2510	0.25	1.147	23.00	22.21	1.376	1.6
		Body back	1	0	21100	2535	-0.24	1.121	23.00	22.71	1.198	1.6
	opor.	Body back	1	0	21350	2560	0.20	1.168	23.00	22.61	1.278	1.6
		Body front	1	0	21100	2535	-0.18	0.585	23.00	22.71	0.625	1.6
00		Edge 2(Right)	1	0	21100	2535	0.17	0.037	23.00	22.71	0.040	1.6
20	QPSK	Edge 3(Bottom)	1	0	20850	2510	-0.23	1.028	23.00	22.21	1.233	1.6
		Edge 3(Bottom)	1	0	21100	2535	-0.16	1.162	23.00	22.71	1.242	1.6
		Edge 3(Bottom)	1	0	21350	2560	-0.20	1.074	23.00	22.61	1.175	1.6
		Edge 4(Left)	1	0	21100	2535	0.18	0.680	23.00	22.71	0.727	1.6
		Body back+Ear.	1	0	20850	2510	-0.09	1.144	23.00	22.21	1.372	1.6
		Body back+Ear.	1	0	21100	2535	0.15	1.167	23.00	22.71	1.248	1.6
Nista		Body back+Ear.	1	0	21350	2560	-0.12	1.159	23.00	22.61	1.268	1.6

Note:

•The test separation for body back, body front and 4 Edges is 10mm of all above table.

[•] When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.



Page 68 of 160

SAR MEASUREMENT								
Depth of Liquid (cm):>15	Relative Humidity (%): 52.4							
Product: 4G Mobile Phone								

Test Mode: LTE Band 12

	Tool Mode. ETE Build 12												
BM MHz	MOD	Position	Test Me	UL RB	Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power	Meas. output Power	Scaled SAR (W/kg)	Limit (W/kg)	
			Allocation	START			(<±070)	(vv/kg)	(dBm)	(dBm)	(TT/Ng)		
		Left Cheek	1	0	23095	707.5	0.08	0.242	23.00	22.59	0.266	1.6	
		Left Tilt	1	0	23095	707.5	-0.05	0.216	23.00	22.59	0.237	1.6	
		Right Cheek	1	0	23095	707.5	0.02	0.294	23.00	22.59	0.323	1.6	
		Right Tilt	1	0	23095	707.5	0.04	0.214	23.00	22.59	0.235	1.6	
10	QPSK	Body back	1	0	23095	707.5	-0.09	0.454	23.00	22.59	0.499	1.6	
'0	QI OIX	Body front	1	0	23095	707.5	0.03	0.268	23.00	22.59	0.295	1.6	
		Edge 2(Right)	1	0	23095	707.5	0.01	0.289	23.00	22.59	0.318	1.6	
		Edge 3(Bottom)	1	0	23095	707.5	-0.04	0.070	23.00	22.59	0.077	1.6	
		Edge 4(Left)	1	0	23095	707.5	-0.07	0.214	23.00	22.59	0.235	1.6	

Note:

[•] When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

[•]The test separation for body back, body front and 4 Edges is 10mm of all above table.



Page 69 of 160

AR MEASUREMENT							
Depth of Liquid (cm):>15	Relative Humidity (%): 52.4						
Product: 4G Mobile Phone							

Test Mode: LTE Band 13

ВМ	MOD	Position	Test Mode		Ch.	Freq.	Power Drift	SAR (1s)	Max. Tuneup	Meas. output	Scaled SAR	Limit
MHz			UL RB Allocation	UL RB START	GII.	(MHz)	(<±5%)	(1g) (W/kg)	Power (dBm)	Power (dBm)	(W/kg)	(W/kg)
		Left Cheek	1	0	23230	782	-0.17	0.181	22.50	22.10	0.198	1.6
	QPSK	Left Tilt	1	0	23230	782	0.03	0.152	22.50	22.10	0.167	1.6
		Right Cheek	1	0	23230	782	-0.06	0.224	22.50	22.10	0.246	1.6
		Right Tilt	1	0	23230	782	-0.12	0.095	22.50	22.10	0.104	1.6
10		Body back	1	0	23230	782	0.09	0.238	22.50	22.10	0.261	1.6
10		Body front	1	0	23230	782	0.05	0.142	22.50	22.10	0.156	1.6
		Edge 2(Right)	1	0	23230	782	-0.10	0.162	22.50	22.10	0.178	1.6
		Edge 3(Bottom)	1	0	23230	782	-0.08	0.060	22.50	22.10	0.066	1.6
		Edge 4(Left)	1	0	23230	782	0.02	0.074	22.50	22.10	0.081	1.6

Note:

[•] When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

[•]The test separation for body back, body front and 4 Edges is 10mm of all above table.



Page 70 of 160

SAR MEASUREMENT					
Depth of Liquid (cm):>15	Relative Humidity (%): 53.1				
Product: LTE smartphone					

Test Mode: LTE Band 66

1001		L Baria 00	l		l	I	I	1				
BW	MOD	Position	Test Mode		Ch.	Freq.	Power Drift	SAR (1g)	Max. Tuneup	Meas. output	Scaled SAR	Limit
MHz			UL RB Allocation	UL RB START	GII.	(MHz)	(<±5%)	(W/kg)	Power (dBm)	Power (dBm)	(W/Kg)	(W/kg)
		Left Cheek	1	0	132422	1755	-0.16	0.190	23.00	22.49	0.214	1.6
	QPSK	Left Tilt	1	0	132422	1755	-0.02	0.077	23.00	22.49	0.087	1.6
		Right Cheek	1	0	132422	1755	0.09	0.340	23.00	22.49	0.382	1.6
		Right Tilt	1	0	132422	1755	-0.05	0.070	23.00	22.49	0.079	1.6
20		Body back	1	0	132422	1755	0.08	0.702	23.00	22.49	0.789	1.6
		Body front	1	0	132422	1755	-0.11	0.409	23.00	22.49	0.460	1.6
		Edge 2(Right)	1	0	132422	1755	0.14	0.362	23.00	22.49	0.407	1.6
		Edge 3(Bottom)	1	0	132422	1755	-0.10	0.270	23.00	22.49	0.304	1.6
		Edge 4(Left)	1	0	132422	1755	0.08	0.130	23.00	22.49	0.146	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- -The test separation for body back, body front and 4 Edges is 10mm of all above table



Page 71 of 160

SAR Test Exclusion Consideration

According to KDB 447498 D04 Appendix B, Standalone SAR test exclusion is as follow: This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by Formula

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \ cm} (d/20 \ \text{cm})^x & d \le 20 \ \text{cm} \\ ERP_{20 \ cm} & 20 \ \text{cm} < d \le 40 \ \text{cm} \end{cases}$$

Where

$$x = -\log_{10}\left(\frac{60}{ERP_{20~cm}\sqrt{f}}\right)$$
 and f is in GHz;

and

$$\mathit{ERP}_{20\;cm}\;(\mathrm{mW}) = \begin{cases} 2040f & 0.3\;\mathrm{GHz} \leq f < 1.5\;\mathrm{GHz} \\ \\ 3060 & 1.5\;\mathrm{GHz} \leq f \leq 6\;\mathrm{GHz} \end{cases}$$

d = the separation distance (cm);

Technology	echnology f(GHz) d(cm		d(cm) ERP _{20CM} (mW)		х	P _{th} (mW)	Max Power including Tune-up Tolerance		SAR required
							dBm	mW	
WIFI	2.437	0.5	3060	1.561	1.901	2.756	16.65	46.238	Yes
BT(BR&EDR)	2.441	0.5	3060	1.562	1.901	2.752	5.34	3.420	Yes
BT(BLE)	2.440	0.5	3060	1.562	1.901	2.753	-0.63	0.865	No

Conclusion

There is need to test standalone WIFI SAR, BT(BR&EDR) SAR and need to evaluate simultaneous transmission



Page 72 of 160

SAR MEASUREMENT	AR MEASUREMENT					
Depth of Liquid (cm):>15	Relative Humidity (%): 52.2					
Product: 4G Mobile Phone						
Test Mode: 802 11h						

Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)	
Left Cheek	DTS	6	2437	-0.03	0.027	17.00	16.65	0.029	1.6	
Left Tilt	DTS	6	2437	0.05	0.033	17.00	16.65	0.036	1.6	
Right Cheek	DTS	6	2437	-0.07	0.090	17.00	16.65	0.098	1.6	
Right Tilt	DTS	6	2437	0.02	0.079	17.00	16.65	0.086	1.6	
Body back	DTS	6	2437	-0.09	0.098	17.00	16.65	0.106	1.6	
Body front	DTS	6	2437	-0.05	0.016	17.00	16.65	0.017	1.6	
Edge 1 (Top)	DTS	6	2437	0.08	0.035	17.00	16.65	0.038	1.6	
Edge 4(Left)	DTS	6	2437	0.01	0.016	17.00	16.65	0.017	1.6	

Note:

- According to KDB248227, SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels.
- All of above "DTS" means data transmitters.
- •The test separation for body back, body front and 4 Edges is 10mm of all above table.



Page 73 of 160

SAR	MF	\SUF	RFM	FNT

Depth of Liquid (cm):>15 Relative Humidity (%): 52.2

Product: 4G Mobile Phone

Test Mode: Bluetooth(BR/EDR)

Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit W/kg
Left Cheek	3DH5	39	2441	0.04	0.001	5.400	5.340	0.001	1.6
Left Tilt	3DH5	39	2441	-0.07	0.001	5.400	5.340	0.001	1.6
Right Cheek	3DH5	39	2441	0.01	0.002	5.400	5.340	0.002	1.6
Right Tilt	3DH5	39	2441	-0.05	0.001	5.400	5.340	0.001	1.6
Body back	3DH5	39	2441	0.06	0.004	5.400	5.340	0.004	1.6
Body front	3DH5	39	2441	-0.09	0.001	5.400	5.340	0.001	1.6
Edge 1 (Top)	3DH5	39	2441	0.05	0.001	5.400	5.340	0.001	1.6
Edge 4(Left)	3DH5	39	2441	0.04	0.001	5.400	5.340	0.001	1.6

Note:

• When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

-The test separation for body back, body front and 4 Edges is 10mm of all above table



Page 74 of 160

Repeated SAR											
Product: 4G Mobile Phone											
Test Mode: LTE Band 7											
Position	Mode		Mode Ch.		Power Drift	Once SAR	Power Drift	Twice SAR	Power Drift	Third SAR	Limit
FOSILIOII	UL RB Allocation	UL RB START	5	(MHz)	(<±5%)	(1g) (W/kg)	(<±5%)	(1g) (W/kg)	(<±5%)	(1g) (W/kg)	W/kg
Body back	1	0	21350	2560	0.02	1.096				-	1.6

The second	The second repeated SAR judge reference									
Product: 4G	Product: 4G Mobile Phone									
		Mode	de		Fr.	Orignal SAR	First SAR			
Band Position		UL RB Allocation	UL RB START	Ch.	(MHz)	(1g) (W/kg)	(1g) (W/kg)	Ratio	Limit	
LTE Band 7	Body back	1	0	21350	2560	1.168	1.096	1.066	<1.2	



Page 75 of 160

Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

NO	Simultaneous state		Portable Handse	et
NO	Simultaneous state	Head	Body-worn	Hotspot
1	GSM(voice)+ WLAN 2.4GHz (data)	Yes	Yes	-
2	GSM(voice)+ Bluetooth(data)	Yes	Yes	-
3	GSM (Data) + WLAN 2.4GHz (data)	-	Yes	Yes
4	GSM (Data) + Bluetooth(data)	-	Yes	Yes
5	WCDMA+ WLAN 2.4GHz (data)	Yes	Yes	Yes
6	WCDMA+ Bluetooth(data)	Yes	Yes	Yes
7	LTE + WLAN 2.4GHz (data)	Yes	Yes	Yes
8	LTE + Bluetooth(data)	Yes	Yes	Yes

NOTE:

- 1. WIFI and BT share the same antenna, and cannot transmit simultaneously.
- 2. Simultaneous with every transmitter must be the same test position.
- 3. KDB 447498 D04, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR and 10mm for body-worn SAR.
- 4. When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion. The ratio is determined by (SAR1 + SAR2)1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.
- 5. According to KDB 447498 D04 Appendix E, When the standalone 1g SAR test exclusion is applied, the standalone 1g SAR must be estimated according to the following equation, with Pant < Pth, where Pant is maximum time-averaged power or effective radiated power (ERP), whichever is greater, and Pth is defined in Formula (B.2).

 $SAR_{est} = 1.6 \cdot P_{ant} / P_{th} [W/kg]$

For BT(BLE)head :Estimated 1g SAR = SAR_{lim} \times [(P_{ant h}(mW) / P_{th}(mW)]= 1.6*(0.865/2.753) = 0.503 W/kg For BT(BLE) body:Estimated 1g SAR = SAR_{lim} \times [(P_{ant h}(mW) / P_{th}(mW)]= 1.6*(0.865/10.283) = 0.135 W/kg

	GSM&WCDMA<E SAR (W/kg)	Estimated 1g BT(BLE) SAR (W/kg)	Simultaneous SAR BT(BLE)+WWAN
Head	0.576	0.503	1.079
Body	1.376	0.135	1.511



Page 76 of 160

Sum of the SAR for GSM 850 &Wi-Fi & BT:

RF Exposure	Test	Simulta	aneous Transn	nission Scenario	Σ1-g SAR	SPLSR
Conditions	Position	GSM 850	WI-Fi DTS Band	Bluetooth(BR&EDR)	(W/kg)	(Yes/No)
	Left Touch	0.237	0.029		0.266	No
Head	Left Tilt	0.091	0.036		0.127	No
(voice)	Right Touch	0.228	0.098		0.326	No
	Right Tilt	0.114	0.086		0.200	No
	Left Touch	0.237		0.001	0.238	No
Head	Left Tilt	0.091		0.001	0.092	No
(voice)	Right Touch	0.228		0.002	0.230	No
	Right Tilt	0.114		0.001	0.115	No
	Rear	0.683	0.106		0.789	No
Body-worn	Rear	0.683		0.004	0.687	No
(voice)	Front	0.237	0.017		0.254	No
	FIOIIL	0.237		0.001	0.238	No
	Rear	0.347		0.004	0.351	No
	Real	0.347	0.106		0.453	No
Body-worn	Front	0.219		0.001	0.220	No
(Data)	FIOIIL	0.219	0.017		0.236	No
	Edge 4	0.121	0.017		0.138	No
	Edge 4	0.121		0.001	0.122	No

⁻According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.

[·]SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 77 of 160

Sum of the SAR for GSM 1900 &Wi-Fi & BT:

RF Exposure	Test	Simulta	aneous Transn	nission Scenario	Σ1-g SAR	SPLSR
Conditions	Position	PCS 1900	WI-Fi DTS Band	Bluetooth(BR&EDR)	(W/kg)	(Yes/No)
	Left Touch	0.102	0.029		0.131	No
Head	Left Tilt	0.080	0.036		0.116	No
(voice)	Right Touch	0.198	0.098		0.296	No
	Right Tilt	0.025	0.086		0.111	No
	Left Touch	0.102		0.001	0.103	No
Head	Left Tilt	0.080		0.001	0.081	No
(voice)	Right Touch	0.198		0.002	0.200	No
	Right Tilt	0.025		0.001	0.026	No
	Rear	0.358	0.106		0.464	No
Body-worn	Rear	0.358		0.004	0.362	No
(voice)	Front	0.171	0.017		0.188	No
	FIOIL	0.171		0.001	0.172	No
	Rear	0.507		0.004	0.511	No
Body-worn	Real	0.507	0.106		0.613	No
(Data)	Front	0.250		0.001	0.251	No
	TIOIL	0.250	0.017		0.267	No
Body-worn	Edge 4	0.071	0.017		0.088	No
(Hotspot)	Edge 4	0.071		0.001	0.072	No

⁻According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.

⁻SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 78 of 160

Sum of the SAR for WCDMA Band II &Wi-Fi & BT:

RF Exposure	Test	Simultar	eous Transm	ission Scenario	Σ1-g SAR	SPLSR
Conditions	Position	WCDMA Band II	Wi-Fi DTS Band	Bluetooth(BR&EDR)	(W/kg)	(Yes/No)
	Left Touch	0.190	0.029		0.219	No
Head	Left Tilt	0.105	0.036		0.141	No
пеац	Right Touch	0.316	0.098		0.414	No
	Right Tilt	0.108	0.086		0.194	No
	Left Touch	0.190		0.001	0.191	No
Head	Left Tilt	0.105		0.001	0.106	No
пеац	Right Touch	0.316		0.002	0.318	No
	Right Tilt	0.108		0.001	0.109	No
	Rear	0.764	0.106		0.870	No
	Front	0.271	0.017		0.288	No
Pody worn	Edge 4	0.113	0.017		0.130	No
Body-worn	Rear	0.764		0.004	0.768	No
	Front	0.271		0.001	0.272	No
	Edge 4	0.113		0.001	0.114	No

⁻According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.

SPLSR mean is "The SAR to Peak Location Separation Ratio"



Page 79 of 160

Sum of the SAR for WCDMA Band V &Wi-Fi & BT:

RF Exposure	Test	Simultar	eous Transm	ission Scenario	Σ1-g SAR	SPLSR
Conditions	Position	WCDMA Band V	Wi-Fi DTS Band	Bluetooth(BR&EDR)	(W/kg)	(Yes/No)
	Left Touch	0.173	0.029		0.202	No
Head	Left Tilt	0.090	0.036		0.126	No
пеац	Right Touch	0.195	0.098		0.293	No
	Right Tilt	0.102	0.086		0.188	No
	Left Touch	0.173		0.001	0.174	No
Head	Left Tilt	0.090		0.001	0.091	No
пеац	Right Touch	0.195		0.002	0.197	No
	Right Tilt	0.102		0.001	0.103	No
	Rear	0.038	0.106		0.144	No
	Front	0.136	0.017		0.153	No
Pody worn	Edge 4	0.087	0.017		0.104	No
Body-worn	Rear	0.038		0.004	0.042	No
	Front	0.136		0.001	0.137	No
	Edge 4	0.087		0.001	0.088	No

⁻According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.

SPLSR mean is "The SAR to Peak Location Separation Ratio"



Page 80 of 160

Sum of the SAR for LTE Band 4 &Wi-Fi & BT:

RF Exposure	Test	Simulta	neous Transm	ission Scenario	Σ1-g SAR	SPLSR
Conditions	Position	LTE Band 4	Wi-Fi DTS Band	Bluetooth(BR&EDR)	(W/kg)	(Yes/No)
	Left Touch	0.226	0.029		0.255	No
	Left Tilt	0.075	0.036		0.111	No
Head	Right Touch	0.515	0.098		0.613	No
	Right Tilt	0.125	0.086		0.211	No
	Left Touch	0.226		0.001	0.227	No
	Left Tilt	0.075		0.001	0.076	No
Head	Right Touch	0.515		0.002	0.517	No
	Right Tilt	0.125		0.001	0.126	No
	Rear	0.589	0.106		0.695	No
	Front	0.343	0.017		0.360	No
Pody worn	Edge 4	0.121	0.017		0.138	No
Body-worn	Rear	0.589		0.004	0.593	No
	Front	0.343		0.001	0.344	No
	Edge 4	0.121		0.001	0.122	No

⁻According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.

[·]SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 81 of 160

Sum of the SAR for LTE Band 5 &Wi-Fi & BT:

RF Exposure	Test	Simulta	neous Transm	ission Scenario	Σ1-g SAR	SPLSR
Conditions	Position	LTE Band 5	Wi-Fi DTS Band	Bluetooth(BR&EDR)	(W/kg)	(Yes/No)
	Left Touch	0.237	0.029		0.266	No
	Left Tilt	0.139	0.036		0.175	No
Head	Right Touch	0.301	0.098		0.399	No
	Right Tilt	0.154	0.086		0.240	No
	Left Touch	0.237		0.001	0.238	No
	Left Tilt	0.139		0.001	0.140	No
Head	Right Touch	0.301		0.002	0.303	No
	Right Tilt	0.154		0.001	0.155	No
	Rear	0.350	0.106		0.456	No
	Front	0.220	0.017		0.237	No
Pody worn	Edge 4	0.136	0.017		0.153	No
Body-worn	Rear	0.350		0.004	0.354	No
	Front	0.220		0.001	0.221	No
	Edge 4	0.136		0.001	0.137	No

⁻According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.

[·]SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 82 of 160

Sum of the SAR for LTE Band 7 &Wi-Fi & BT:

DE Exposure	Test	Simultaneous Transmission Scenario			Σ1-g SAR	SPLSR
RF Exposure Conditions	Position	LTE Band 7	Wi-Fi DTS Band	Bluetooth(BR&EDR)	(W/kg)	(Yes/No)
	Left Touch	0.576	0.029		0.605	No
	Left Tilt	0.260	0.036		0.296	No
Head	Right Touch	0.365	0.098		0.463	No
	Right Tilt	0.337	0.086		0.423	No
	Left Touch	0.576		0.001	0.577	No
	Left Tilt	0.260		0.001	0.261	No
Head	Right Touch	0.365		0.002	0.367	No
	Right Tilt	0.337		0.001	0.338	No
	Rear	1.376	0.106		1.482	No
	Front	0.625	0.017		0.642	No
Body-worn	Edge 4	0.727	0.017		0.744	No
	Rear	1.376		0.004	1.380	No
	Front	0.625		0.001	0.626	No
	Edge 4	0.727		0.001	0.728	No

⁻According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.

[·]SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 83 of 160

Sum of the SAR for LTE Band 12 &Wi-Fi & BT:

RF Exposure	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR	SPLSR
Conditions		LTE Band 12	Wi-Fi DTS Band	Bluetooth(BR&EDR)	(W/kg)	(Yes/No)
	Left Touch	0.266	0.029		0.295	No
	Left Tilt	0.237	0.036		0.273	No
Head	Right Touch	0.323	0.098		0.421	No
	Right Tilt	0.235	0.086		0.321	No
	Left Touch	0.266		0.001	0.267	No
	Left Tilt	0.237		0.001	0.238	No
Head	Right Touch	0.323		0.002	0.325	No
	Right Tilt	0.235		0.001	0.236	No
	Rear	0.499	0.106		0.605	No
	Front	0.295	0.017		0.312	No
Body-worn	Edge 4	0.235	0.017		0.252	No
	Rear	0.499		0.004	0.503	No
	Front	0.295		0.001	0.296	No
	Edge 4	0.235		0.001	0.236	No

⁻According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.

[·]SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 84 of 160

Sum of the SAR for LTE Band 13 &Wi-Fi & BT:

RF Exposure	Test	Simulta	neous Transmission Scenario		Σ1-g SAR	SPLSR
Conditions	Position	LTE Band 13	Wi-Fi DTS Band	Bluetooth(BR&EDR)	(W/kg)	(Yes/No)
	Left Touch	0.198	0.029		0.227	No
	Left Tilt	0.167	0.036		0.203	No
Head	Right Touch	0.246	0.098		0.344	No
	Right Tilt	0.104	0.086		0.190	No
	Left Touch	0.198		0.001	0.199	No
	Left Tilt	0.167		0.001	0.168	No
Head	Right Touch	0.246		0.002	0.248	No
	Right Tilt	0.104		0.001	0.105	No
	Rear	0.261	0.106		0.367	No
	Front	0.156	0.017		0.173	No
Body-worn	Edge 4	0.081	0.017		0.098	No
	Rear	0.261		0.004	0.265	No
	Front	0.156		0.001	0.157	No
	Edge 4	0.081		0.001	0.082	No

⁻According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.

[·]SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 85 of 160

Sum of the SAR for LTE Band 66 &Wi-Fi & BT:

RF Exposure	Test	Simulta	neous Transm	ission Scenario	Σ1-g SAR (W/kg)	SPLSR (Yes/No)
Conditions	Position	LTE Band 66	Wi-Fi DTS Band	Bluetooth(BR&EDR)		
	Left Touch	0.214	0.029		0.243	No
	Left Tilt	0.087	0.036		0.123	No
Head	Right Touch	0.382	0.098		0.480	No
	Right Tilt	0.079	0.086		0.165	No
	Left Touch	0.214		0.001	0.215	No
	Left Tilt	0.087		0.001	0.088	No
Head	Right Touch	0.382		0.002	0.384	No
	Right Tilt	0.079		0.001	0.080	No
	Rear	0.789	0.106		0.895	No
	Front	0.460	0.017		0.477	No
Body-worn	Edge 4	0.146	0.017		0.163	No
	Rear	0.789		0.004	0.793	No
	Front	0.460		0.001	0.461	No
	Edge 4	0.146		0.001	0.147	No

⁻According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.

[·]SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 86 of 160

APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab Date: Jul. 22, 2022

System Check Head 750 MHz

DUT: Dipole 750 MHz Type: SID 750

Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=1.39 Frequency: 750 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.90$ mho/m; $\epsilon r = 40.96$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}$ C):21.5, Liquid temperature ($^{\circ}$ C): 21.2

SATIMO Configuration:


• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368

• Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/System Check 750MHz Head/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/System Check 750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

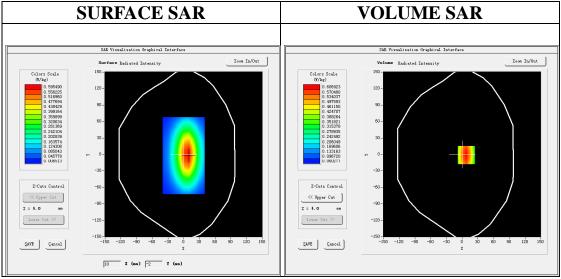


Maximum location: X=8.00, Y=-1.00


SAR Peak: 0.83 W/kg

SAR 10g (W/Kg)	0.367083
SAR 1g (W/Kg)	0.550145





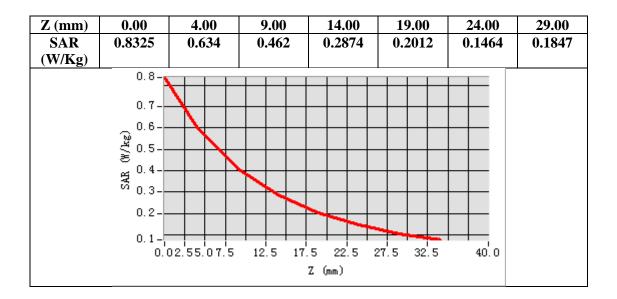

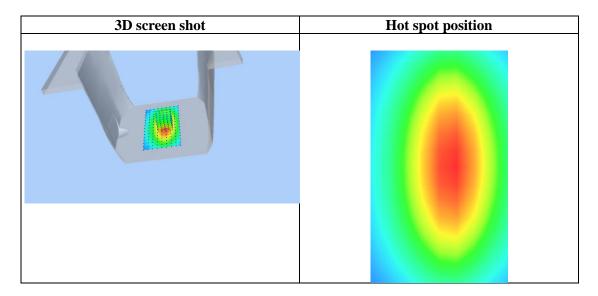



Date: Jul. 21, 2022

Page 88 of 160

Test Laboratory: AGC Lab System Check Head 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=1.42 Frequency: 835 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 42.10$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C):21.2, Liquid temperature (°C): 20.9

SATIMO Configuration:


Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom


Measurement SW: OpenSAR V4 02 35

Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

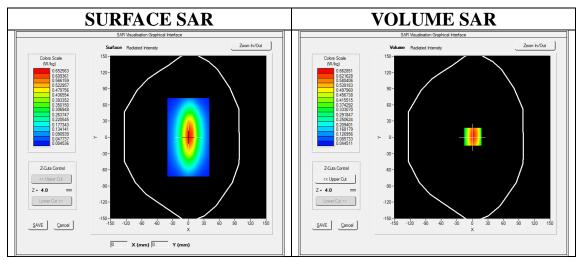



Maximum location: X=1.00, Y=1.00 SAR Peak: 0.97 W/kg

SAR 10g (W/Kg)	0.370936
SAR 1g (W/Kg)	0.630467





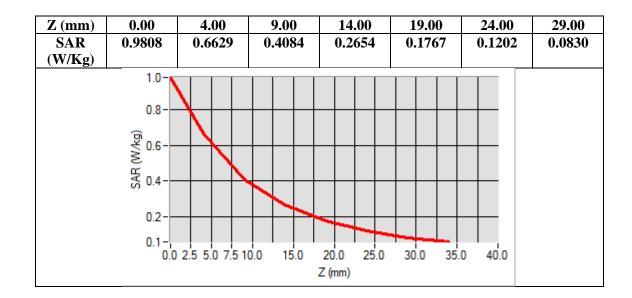

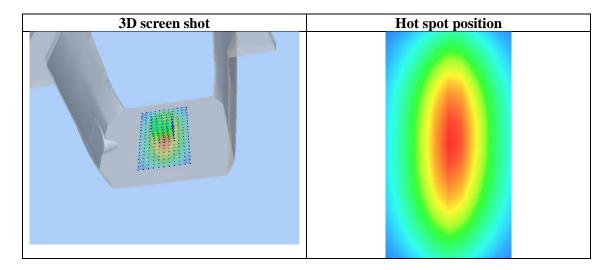



Date: Jul. 25, 2022

Page 90 of 160

Test Laboratory: AGC Lab System Check Head 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=1.42 Frequency: 835 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.91$ mho/m; $\epsilon r = 41.91$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C):22.7, Liquid temperature (°C): 21.9

SATIMO Configuration:


Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom


Measurement SW: OpenSAR V4 02 35

Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

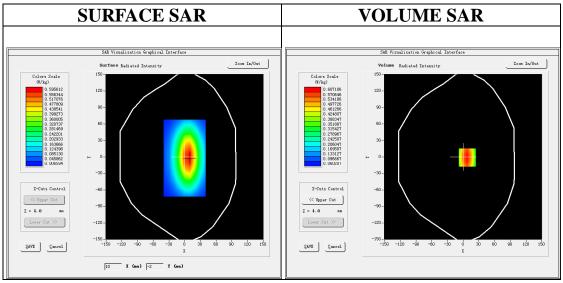



Maximum location: X=8.00, Y=-1.00 SAR Peak: 0.84 W/kg

SAR 10g (W/Kg)	0.382687
SAR 1g (W/Kg)	0.601246





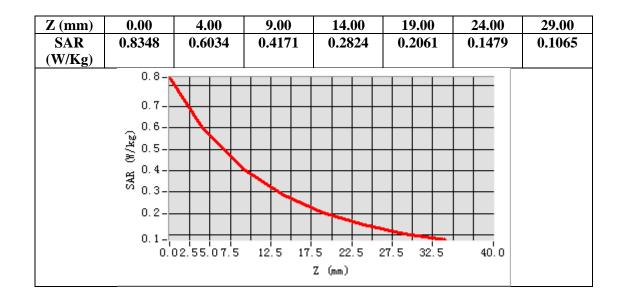

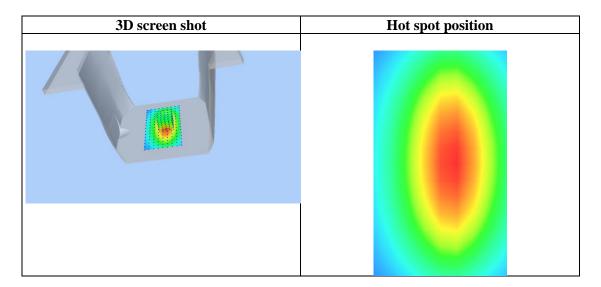



Date: Jul. 24, 2022

Page 92 of 160

Test Laboratory: AGC Lab System Check Head 1750MHz

DUT: Dipole 1800 MHz; Type: SID 1800

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=1.73 Frequency: 1750 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.39 mho/m$; $\epsilon r = 39.83$; $\rho = 1000 kg/m^3$;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}$ C): 21.6, Liquid temperature ($^{\circ}$ C): 21.4

SATIMO Configuration:


Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368

• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom


Measurement SW: OpenSAR V4_02_35

Configuration/System Check 1750MHz Head/Area Scan: Measurement grid: dx=8mm,dy=8mm Configuration/System Check 1750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

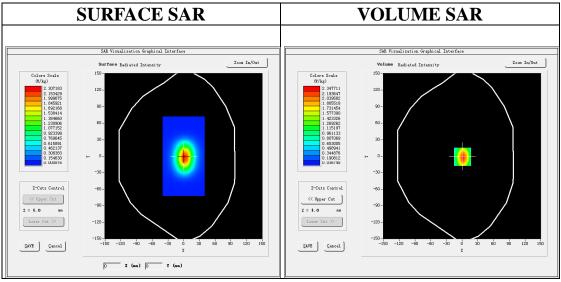



Maximum location: X=1.00, Y=-1.00 SAR Peak: 3.76 W/kg

SAR 10g (W/Kg)	1.172151
SAR 1g (W/Kg)	2.238515





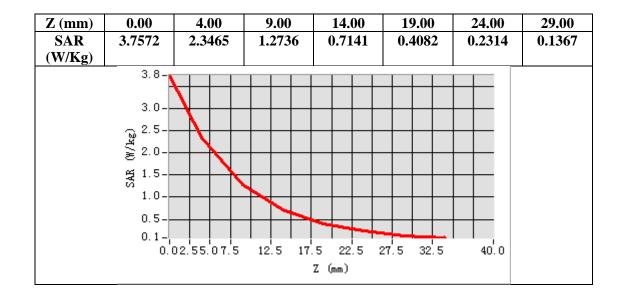

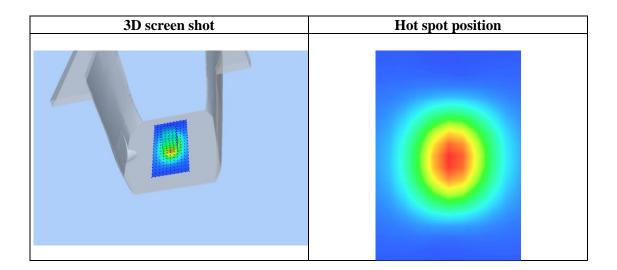



Date: Jul. 23, 2022

Page 94 of 160

Test Laboratory: AGC Lab System Check Head 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=1.77 Frequency: 1900 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.37$ mho/m; $\epsilon r = 39.18$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}$ C):21.2, Liquid temperature ($^{\circ}$ C): 21.0

SATIMO Configuration:


Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368

• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/System Check 1900MHz Head/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/System Check 1900MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

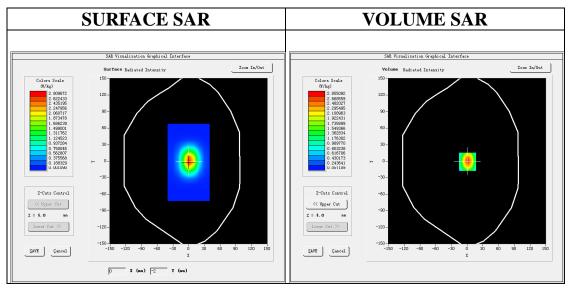


Maximum location: X=1.00, Y=-1.00 SAR Peak: 4.15 W/kg

SAR 10g (W/Kg)	1.350825
SAR 1g (W/Kg)	2.640821



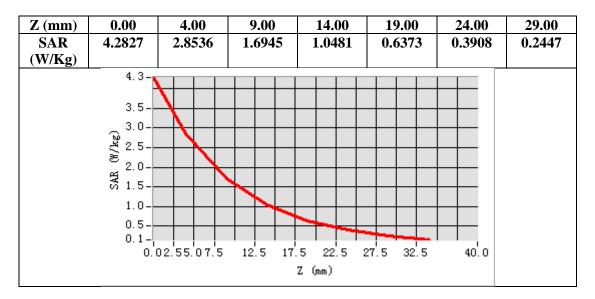

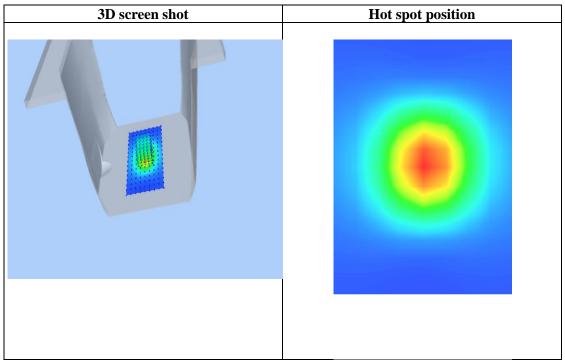



Date: Jul. 28, 2022

Page 96 of 160

Test Laboratory: AGC Lab System Check Head 2450 MHz

DUT: Dipole 2450 MHz Type: SID 2450

Communication System CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=1.99 Frequency: 2450 MHz; Medium parameters used: f = 2450 MHz; $\sigma = 1.83$ mho/m; $\epsilon r = 38.75$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}$ C):21.3, Liquid temperature ($^{\circ}$ C): 21.2

SATIMO Configuration


• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom


Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2450MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 2450MHz Head/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

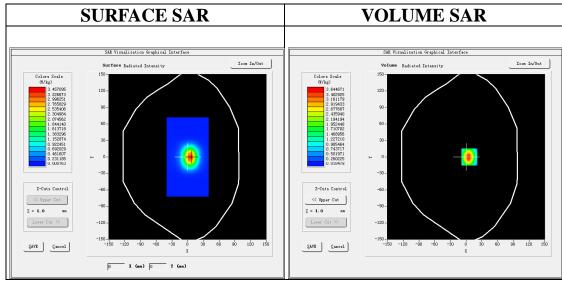



Maximum location: X=6.00, Y=0.00 SAR Peak: 6.30 W/kg

SAR 10g (W/Kg)	1.504142
SAR 1g (W/Kg)	3.340860





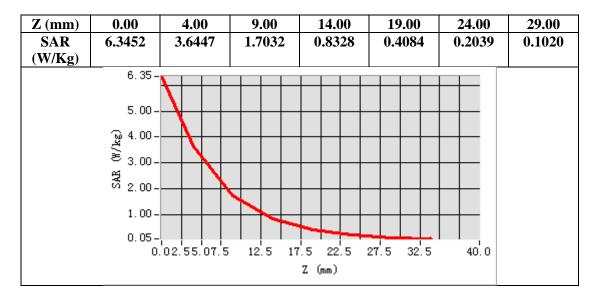

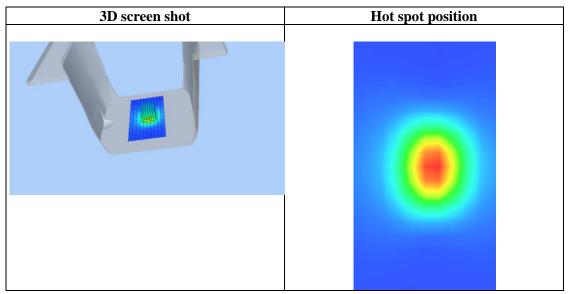



Date: Jul. 29, 2022

Page 98 of 160

Test Laboratory: AGC Lab System Check Head 2600MHz

DUT: Dipole 2600 MHz; Type: SID 2600

Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=1.82 Frequency:2600 MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.93$ mho/m; $\epsilon r = 38.94$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}$): 22.4, Liquid temperature ($^{\circ}$): 21.9

SATIMO Configuration:


• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2600 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm Configuration/System Check 2600 Head/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

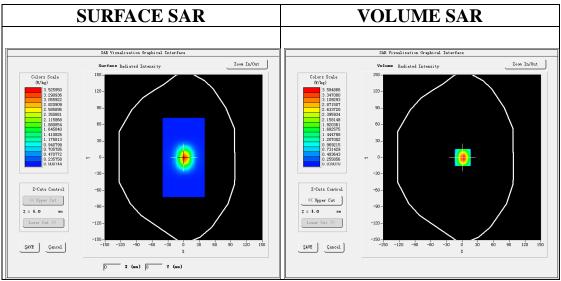


Maximum location: X=1.00, Y=0.00 SAR Peak: 6.20 W/kg


SAR 10g (W/Kg)	1.486295
SAR 1g (W/Kg)	3.317309

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



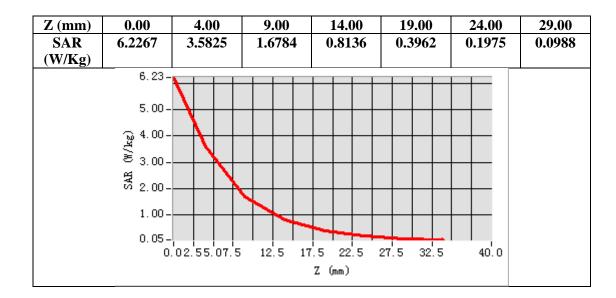

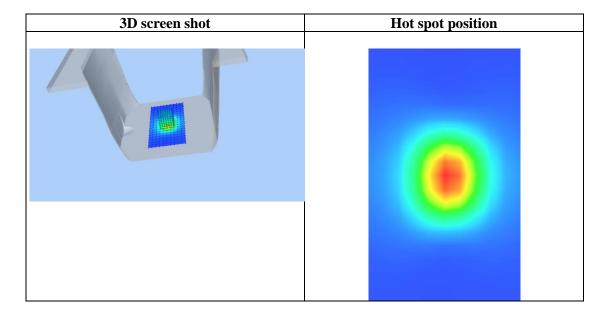



Page 100 of 160

APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab Date: Jul. 21, 2022

GSM 850 Mid-Touch-Left <SIM 1> DUT: 4G Mobile Phone; Type: S6001

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=1.42; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.93$ mho/m; $\epsilon r = 41.92$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature ($^{\circ}$ C): 21.2, Liquid temperature ($^{\circ}$ C): 20.9

SATIMO Configuration

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/GSM 850 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 850 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	GSM 850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

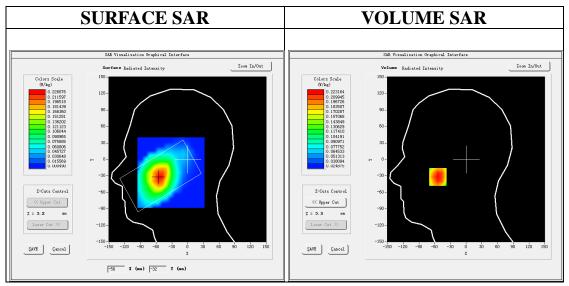


Maximum location: X=-54.00, Y=-32.00


SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.156799
SAR 1g (W/Kg)	0.215989





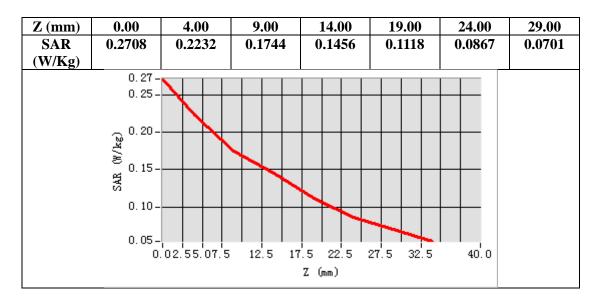

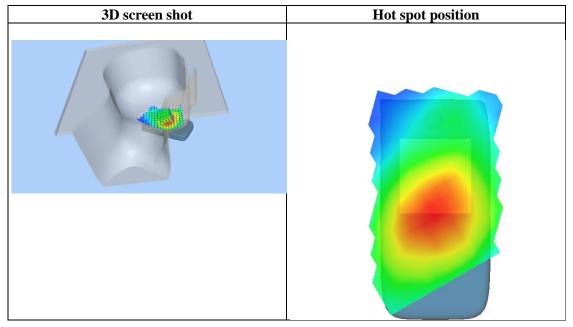



Page 102 of 160

Test Laboratory: AGC Lab Date: Jul. 21, 2022

GSM 850 Mid- Body- Back (MS)<SIM 1> DUT: 4G Mobile Phone; Type: S6001

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=1.42; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.93$ mho/m; ϵ r = 41.92; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.2, Liquid temperature ($^{\circ}$ C): 20.9

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/GSM 850 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 850 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	GSM 850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

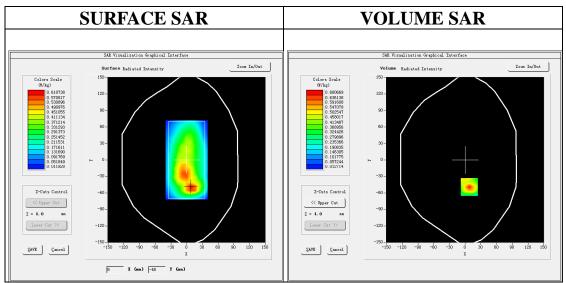



Maximum location: X=8.00, Y=-49.00 SAR Peak: 1.14 W/kg

SAR 10g (W/Kg)	0.330816
SAR 1g (W/Kg)	0.622597





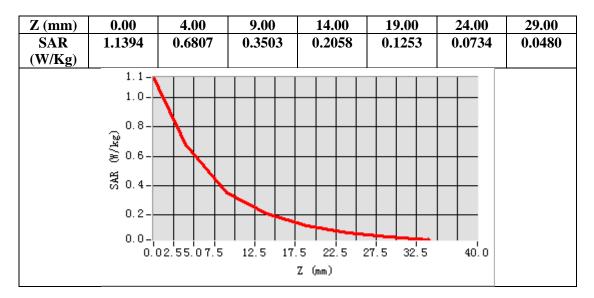

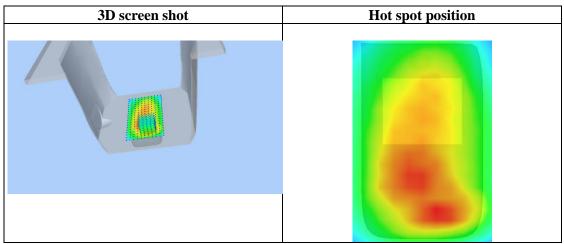



Page 104 of 160

Test Laboratory: AGC Lab Date: Jul. 23, 2022

PCS 1900 Mid-Touch-Right <SIM 1> DUT: 4G Mobile Phone; Type: S6001

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=1.77; Frequency: 1880 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.36$ mho/m; ϵ r =39.25; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$ C): 21.2, Liquid temperature ($^{\circ}$ C): 21.0

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/PCS1900 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

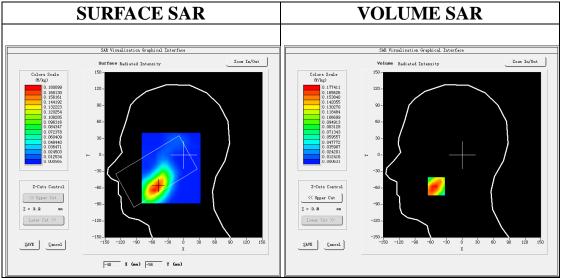



Maximum location: X=-49.00, Y=-57.00 SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.098604
SAR 1g (W/Kg)	0.172482





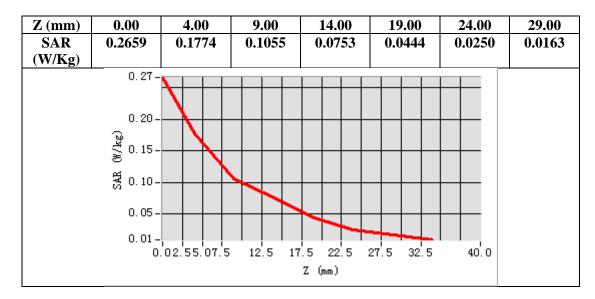

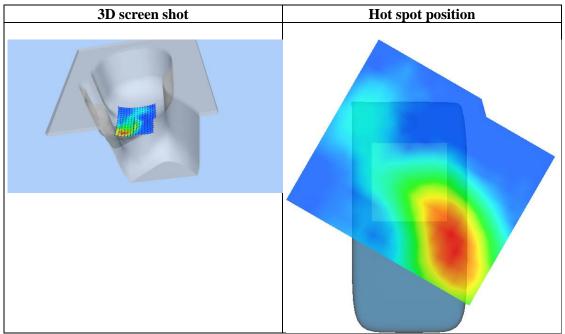



Page 106 of 160

Test Laboratory: AGC Lab Date: Jul. 23, 2022

GPRS 1900 Mid-Body-Back (3up) DUT: 4G Mobile Phone; Type: S6001

Communication System: GPRS-3Slot; Communication System Band: PCS 1900; Duty Cycle: 1:2.7; Conv.F=1.77; Frequency: 1880 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.36$ mho/m; ϵ r =39.25; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.2, Liquid temperature ($^{\circ}$ C): 21.0

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4 02 35


Configuration/GPRS1900 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GPRS1900 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	3ST-GPRS1900
Channels	Middle
Signal	TDMA (Crest factor: 2.7)

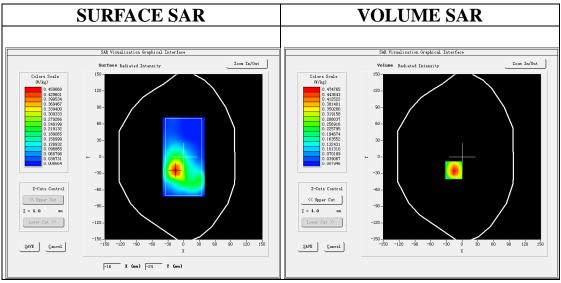



Maximum location: X=-16.00, Y=-24.00 SAR Peak: 0.74 W/kg

SAR 10g (W/Kg)	0.247913
SAR 1g (W/Kg)	0.454466





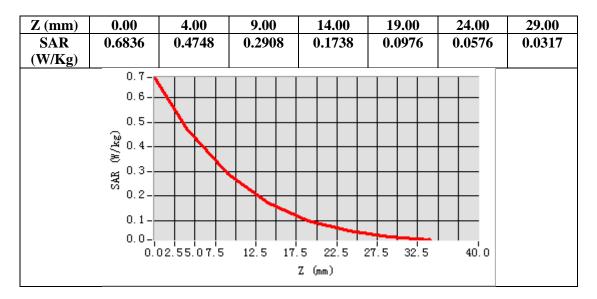

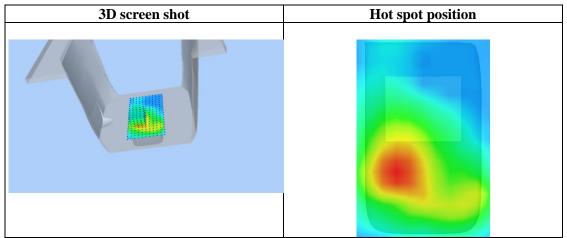



Page 108 of 160

Test Laboratory: AGC Lab Date: Jul. 23, 2022

WCDMA Band II Mid-Touch-Right (RMC) DUT: 4G Mobile Phone; Type: S6001

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=1.77; Frequency: 1880 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.36$ mho/m; ϵ r =39.25; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$ C): 21.2, Liquid temperature ($^{\circ}$ C): 21.0

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/WCDMA band II Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/WCDMA band II Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

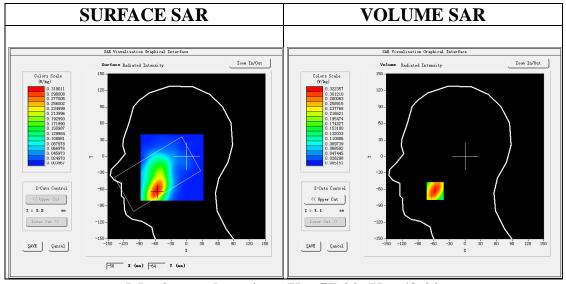



Maximum location: X=-57.00, Y=-63.00 SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.177925
SAR 1g (W/Kg)	0.309995





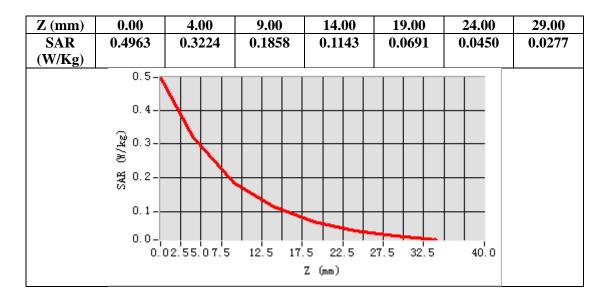

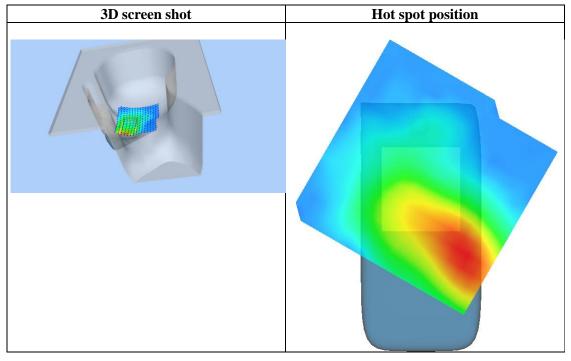



Page 110 of 160

Test Laboratory: AGC Lab Date: Jul. 23, 2022

WCDMA Band II Mid-Body-Towards Grounds (RMC 12.2kbps)

DUT: 4G Mobile Phone; Type: S6001

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=1.77; Frequency: 1880 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.36$ mho/m; ϵ r =39.25; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.2, Liquid temperature ($^{\circ}$ C): 21.0

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ WCDMA band II Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA band II Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

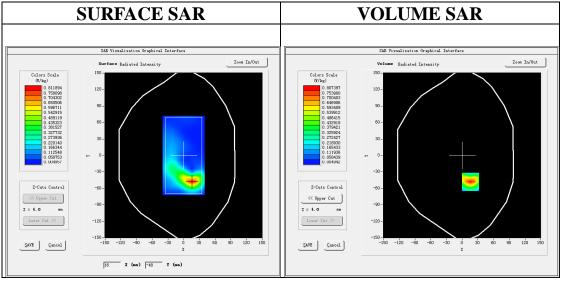



Maximum location: X=16.00, Y=-48.00 SAR Peak: 1.32 W/kg

SAR 10g (W/Kg)	0.358638
SAR 1g (W/Kg)	0.748091





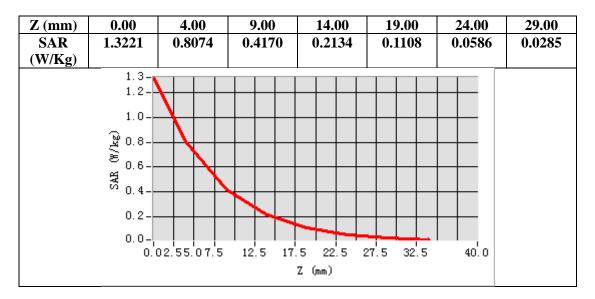

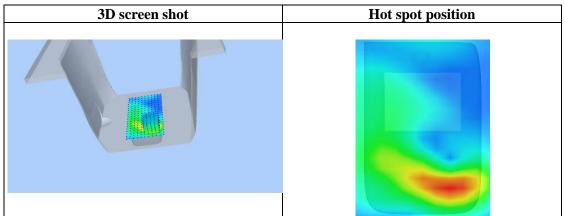



Page 112 of 160

Test Laboratory: AGC Lab Date: Jul. 21, 2022

WCDMA Band V Mid-Touch-Right (RMC) DUT: 4G Mobile Phone; Type: S6001

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD; Duty Cycle:1: 1; Conv.F=1.42; Frequency: 836.4 MHz; Medium parameters used: f = 835MHz; $\sigma = 0.93 \text{ mho/m}$; $\epsilon r = 41.92$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.9

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band V Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA Band V Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

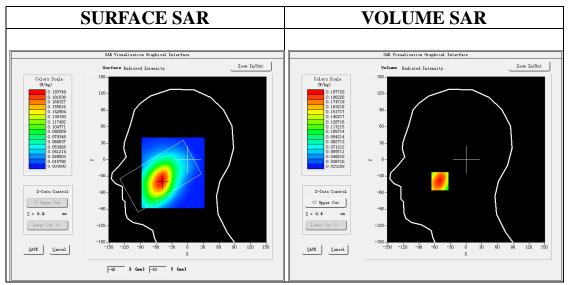


Maximum location: X=-50.00, Y=-39.00


SAR Peak: 0.25 W/kg

SAR 10g (W/Kg)	0.140334
SAR 1g (W/Kg)	0.191288





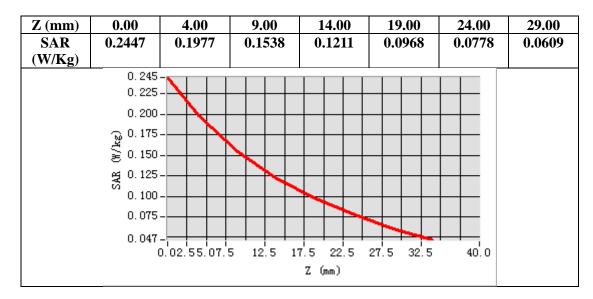

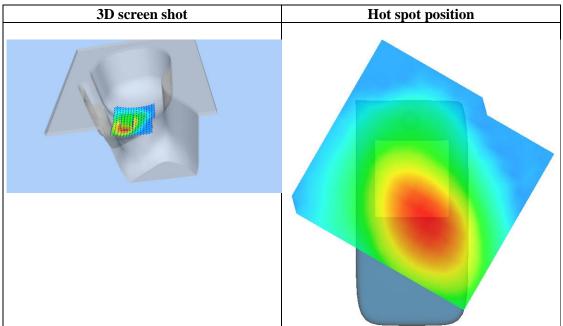



Page 114 of 160

Test Laboratory: AGC Lab Date: Jul. 21, 2022

WCDMA Band V Mid-Body- Towards Phantom (RMC)

DUT: 4G Mobile Phone; Type: S6001

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD; Duty Cycle:1: 1; Conv.F=1.42; Frequency: 836.4 MHz; Medium parameters used: f = 835MHz; $\sigma = 0.93 \text{ mho/m}$; $\epsilon r = 41.92$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.9

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band V Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA Band V Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Front
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

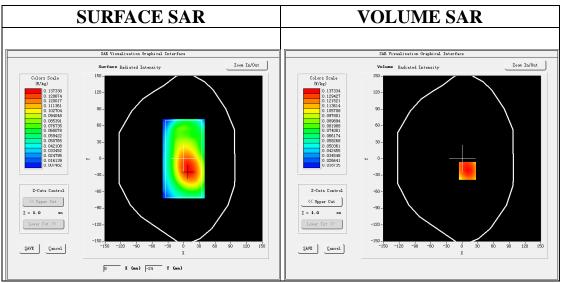


Maximum location: X=10.00, Y=-22.00


SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.099987
SAR 1g (W/Kg)	0.133275





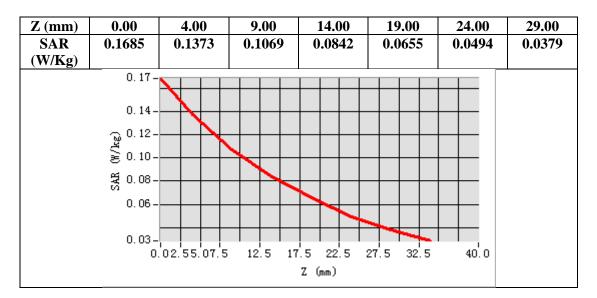

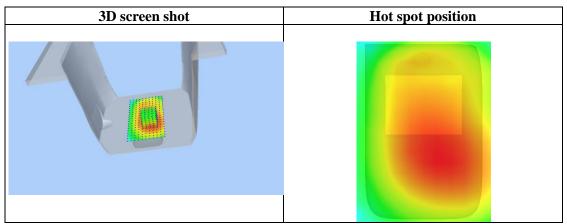



Page 116 of 160

Test Laboratory: AGC Lab Date: Jul. 24, 2022

LTE Band 4 Mid-Touch-Right (1 RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=1.77;

Frequency:1732.5 MHz; Medium parameters used: f =1750 MHz; σ = 1.38 mho/m; ϵ r =40.09; ρ = 1000 kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$ C): 21.6, Liquid temperature ($^{\circ}$ C): 21.4

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4 02 35

Configuration/ LTE Band 4 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

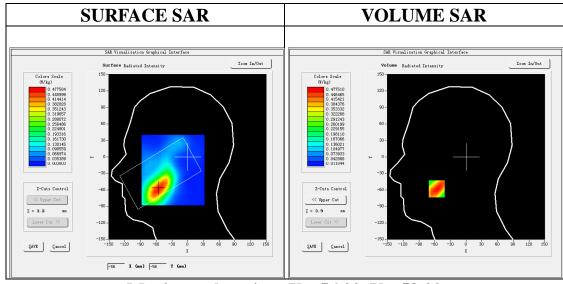


Maximum location: X=-56.00, Y=-58.00


SAR Peak: 0.69 W/kg

SAR 10g (W/Kg)	0.276381
SAR 1g (W/Kg)	0.454222





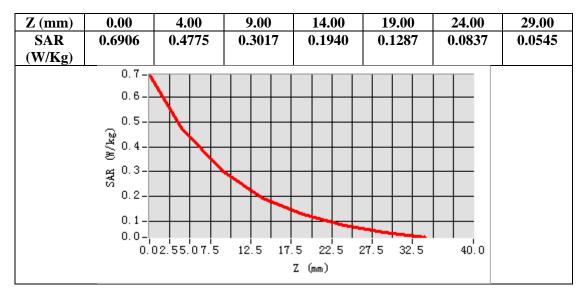

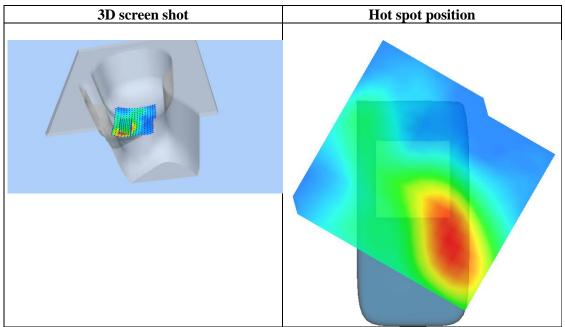



Page 118 of 160

Test Laboratory: AGC Lab Date: Jul. 24, 2022

LTE Band 4 Mid-Body-Back (1 RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=1.77;

Frequency:1732.5 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.38 \text{ mho/m}$; $\epsilon r = 40.09$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.4

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4 02 35


Configuration/ LTE Band 4 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

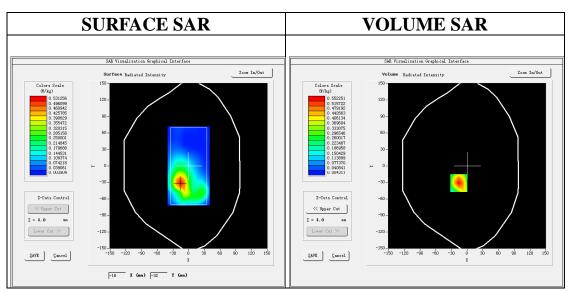



Maximum location: X=-16.00, Y=-31.00 SAR Peak: 0.84 W/kg

SAR 10g (W/Kg)	0.278771
SAR 1g (W/Kg)	0.518650





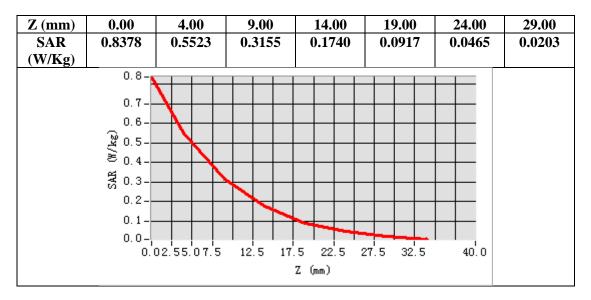

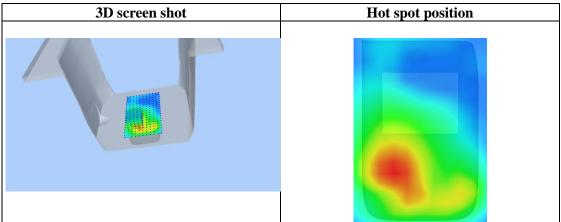



Page 120 of 160

Test Laboratory: AGC Lab Date: Jul. 25, 2022

LTE Band 5 Mid-Touch-Right (1 RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=1.42

Frequency: 836.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 41.75$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$): 22.7, Liquid temperature ($^{\circ}$): 21.9

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 5 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 5 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

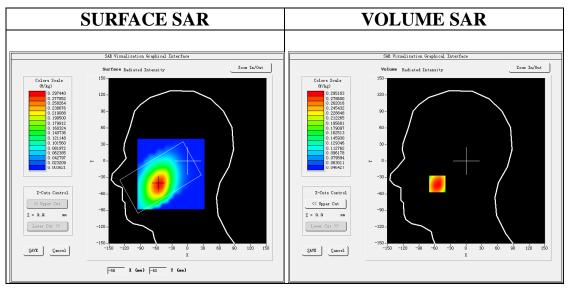



Maximum location: X=-55.00, Y=-42.00 SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.212580
SAR 1g (W/Kg)	0.283901





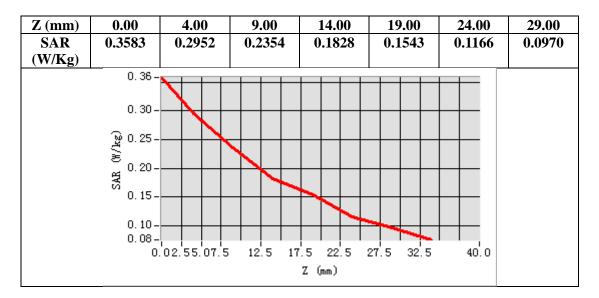

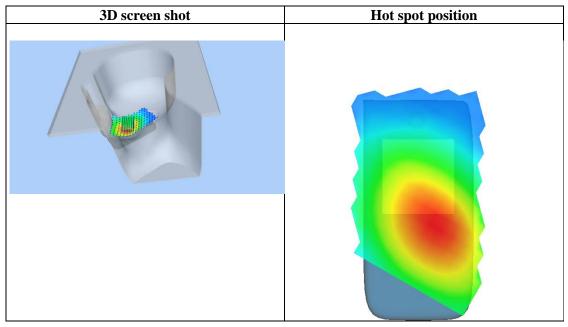



Page 122 of 160

Test Laboratory: AGC Lab Date: Jul. 25, 2022

LTE Band 5 Mid-Body-Back (1 RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=1.42 Frequency:836.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 41.75$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.7, Liquid temperature ($^{\circ}$): 21.9

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 5 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 5 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

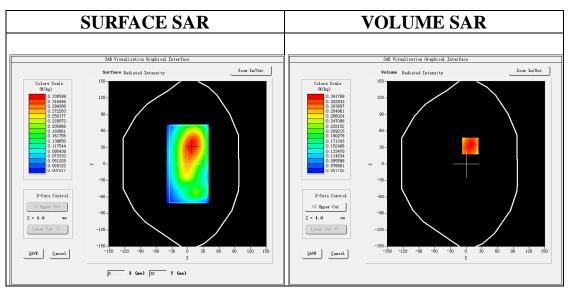



Maximum location: X=8.00, Y=33.00 SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.250776
SAR 1g (W/Kg)	0.329809





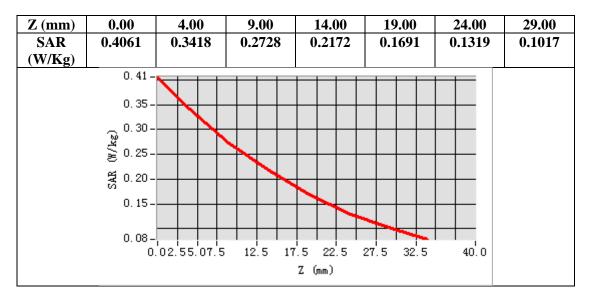

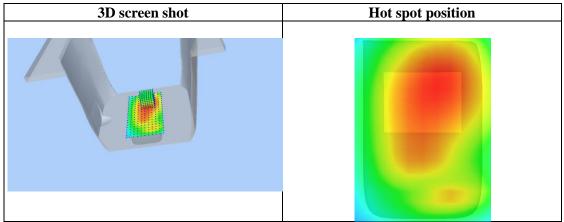



Page 124 of 160

Test Laboratory: AGC Lab Date: Jul. 29, 2022

LTE Band 7 Mid-Touch-Left (1RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=1.82 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.91 \text{ mho/m}$; $\epsilon r = 39.45$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Left Section

Ambient temperature ($^{\circ}$ C): 22.4, Liquid temperature ($^{\circ}$ C): 21.9

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE BAND 7 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 7 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

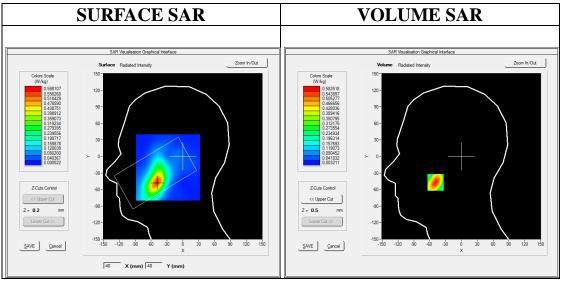



Maximum location: X=-49.00, Y=-47.00 SAR Peak: 0.94 W/kg

SAR 10g (W/Kg)	0.274380
SAR 1g (W/Kg)	0.538582





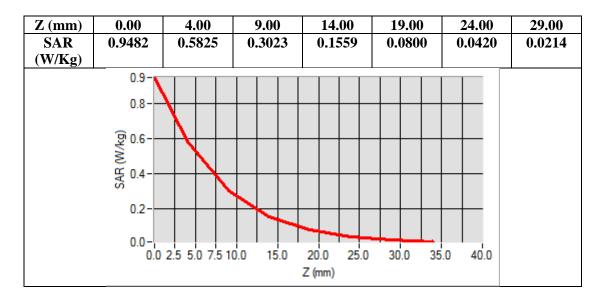

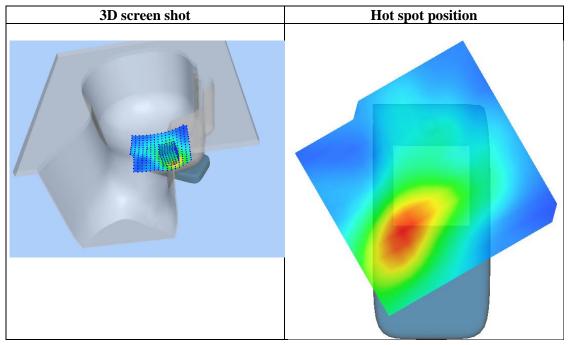



Page 126 of 160

Test Laboratory: AGC Lab Date: Jul. 29, 2022

LTE Band 7 Low-Body-Back (1RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=1.82 Frequency: 2510MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.90 \text{ mho/m}$; $\epsilon r = 39.68$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.4, Liquid temperature ($^{\circ}$): 21.9

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4 02 35


Configuration/ LTE BAND 7 Low-Body-Back /Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 7 Low-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE BAND 7
Channels	Low
Signal	OFDM (Crest factor: 1.0)

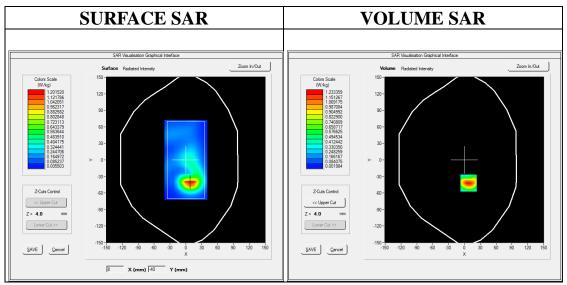



Maximum location: X=8.00, Y=-42.00 SAR Peak: 2.20 W/kg

	0
SAR 10g (W/Kg)	0.520804
SAR 1g (W/Kg)	1.147151





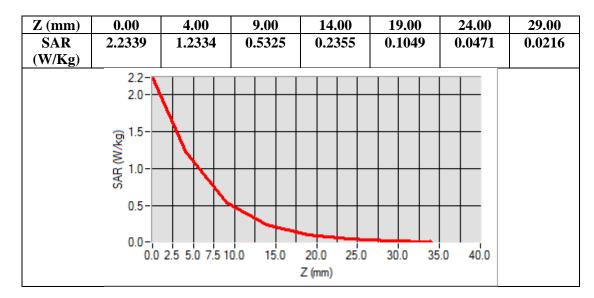

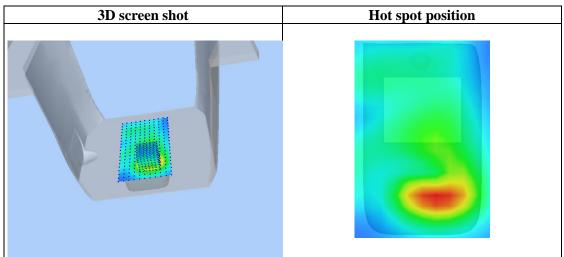



Page 128 of 160

Test Laboratory: AGC Lab Date: Jul. 29, 2022

LTE Band 7 High-Body-Back (1RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=1.82 Frequency: 2560MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.92 \text{ mho/m}$; $\epsilon r = 39.23$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.4, Liquid temperature ($^{\circ}$): 21.9

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4 02 35


Configuration/ LTE BAND 7 High-Body-Back /Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 7 High-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE BAND 7
Channels	High
Signal	OFDM (Crest factor: 1.0)

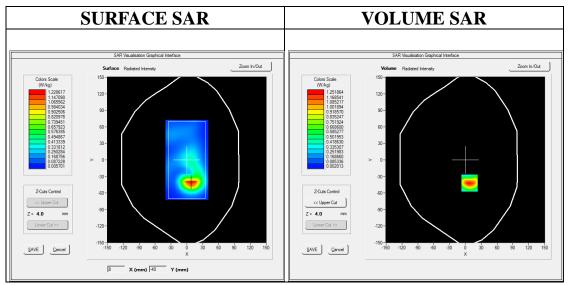



Maximum location: X=8.00, Y=-42.00 SAR Peak: 2.23 W/kg

SAR 10g (W/Kg)	0.528005
SAR 1g (W/Kg)	1.167716





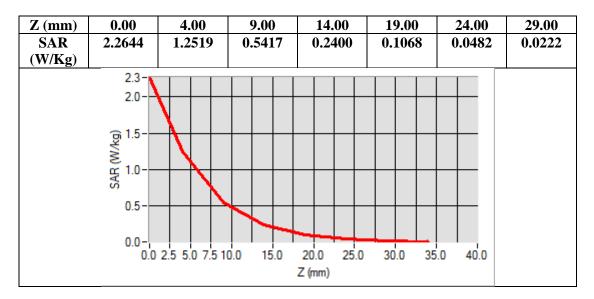

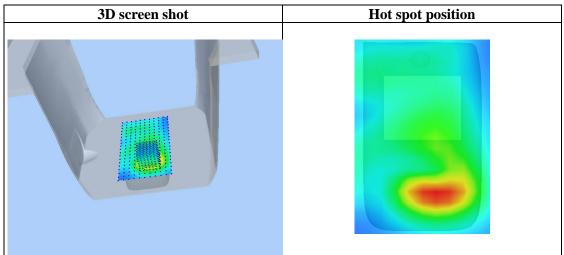



Page 130 of 160

Test Laboratory: AGC Lab Date: Jul. 22, 2022

LTE Band 12 Mid-Touch-Right (1 RB#0) **DUT: 4G Mobile Phone;** Type: S6001

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=1.39 Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.89$ mho/m; $\epsilon r = 41.24$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$): 21.5, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 12 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

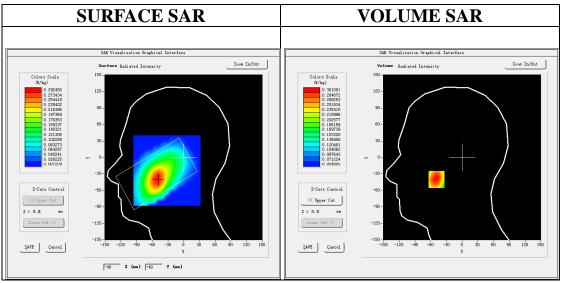


Maximum location: X=-49.00, Y=-40.00 SAR Pook 0 36 W/kg


DAN I Can	. 0.30 W/Kg	
SAR 10g (W/Kg)	0	.224

SAR 10g (W/Kg)	0.224085
SAR 1g (W/Kg)	0.294346





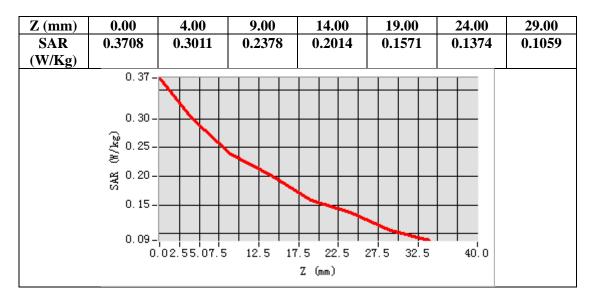

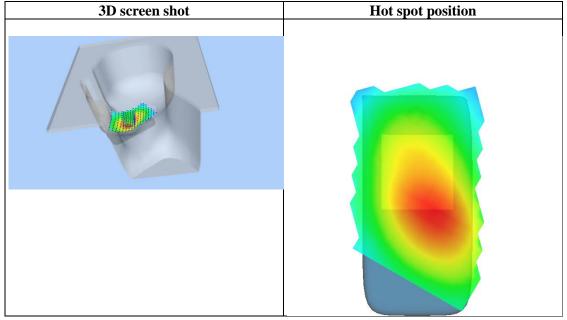



Page 132 of 160

Test Laboratory: AGC Lab Date: Jul. 22, 2022

LTE Band 12 Mid-Body-Back (1 RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=1.39; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.89$ mho/m; ϵ r =41.24; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.5, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4 02 35


Configuration/ LTE Band 12 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

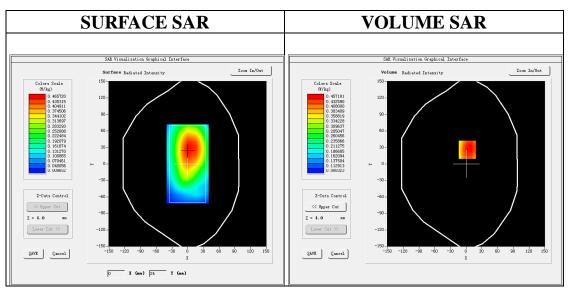



Maximum location: X=2.00, Y=26.00 SAR Peak: 0.54 W/kg

SAR 10g (W/Kg)	0.350276
SAR 1g (W/Kg)	0.453870





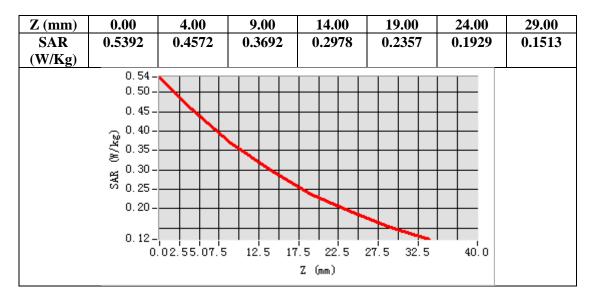

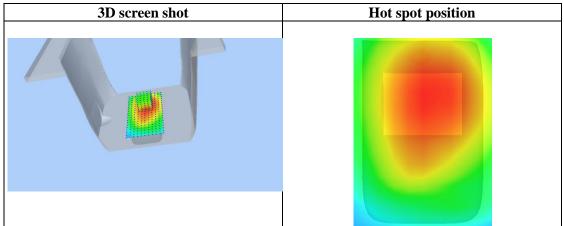



Page 134 of 160

Test Laboratory: AGC Lab Date: Jul. 22, 2022

LTE Band 13 Mid-Touch-Right (1 RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=1.39 Frequency: 782 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.91$ mho/m; $\epsilon r = 40.75$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$): 21.5, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 13 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 13 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm	
Phantom	Right head	
Device Position	Cheek	
Band	LTE Band 13	
Channels	Middle	
Signal	OFDM (Crest factor: 1.0)	

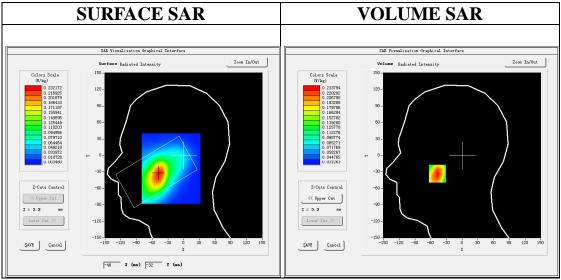



Maximum location: X=-47.00, Y=-33.00 SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.161561
SAR 1g (W/Kg)	0.224296





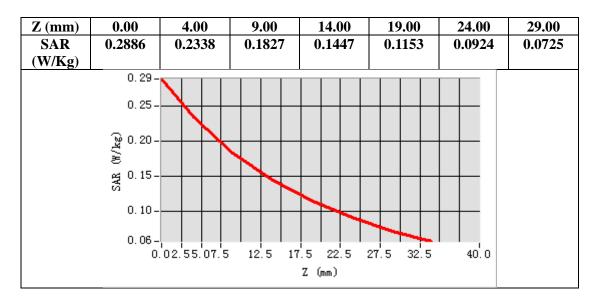

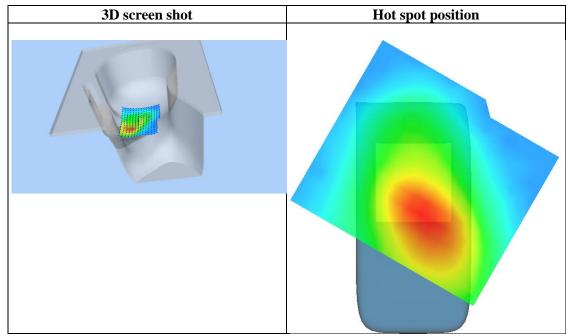



Page 136 of 160

Test Laboratory: AGC Lab Date: Jul. 22, 2022

LTE Band 13 Mid-Body-Back (1 RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=1.39; Frequency: 782 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.91$ mho/m; $\epsilon r = 40.75$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.5, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 13 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 13 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm	
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm	
Phantom	Validation plane	
Device Position	Body Back	
Band	LTE Band 13	
Channels	Middle	
Signal	OFDM (Crest factor: 1.0)	

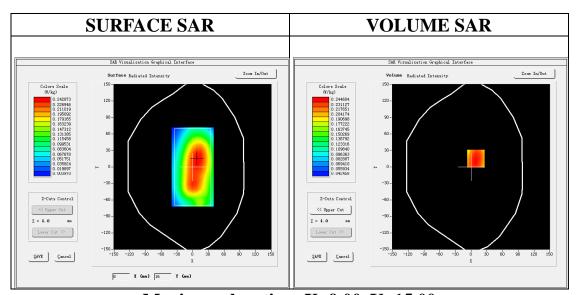



Maximum location: X=9.00, Y=15.00 SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.182996
SAR 1g (W/Kg)	0.237655





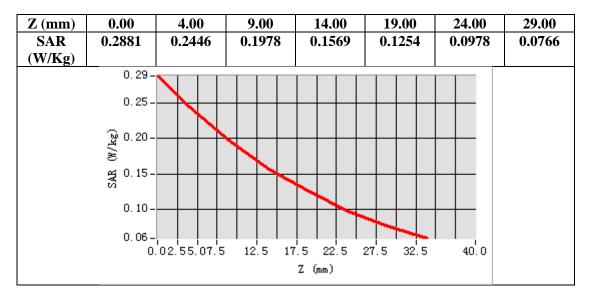

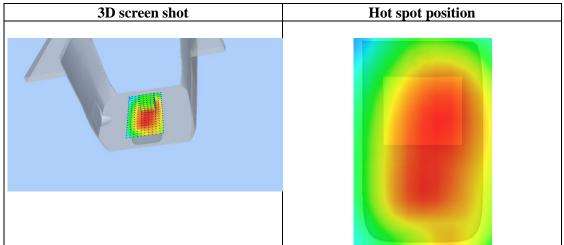



Page 138 of 160

Test Laboratory: AGC Lab Date: Jul. 24, 2022

LTE Band 66 Mid-Touch-Right (1 RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=1.77; Frequency:1755 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.40 \text{ mho/m}$; $\epsilon r = 39.64$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

Ambient temperature ($^{\circ}$): 21.6, Liquid temperature ($^{\circ}$): 21.4

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4 02 35

Configuration/ LTE Band 66 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm	
Phantom	Right head	
Device Position	Cheek	
Band	LTE Band 66	
Channels	Middle	
Signal	OFDM (Crest factor: 1.0)	

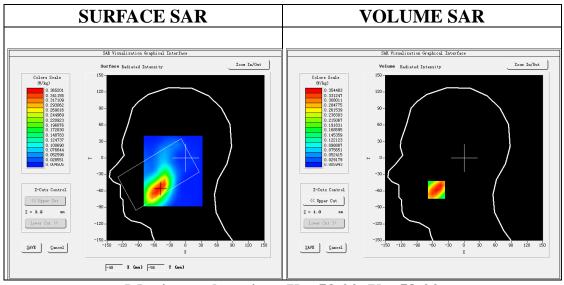

Maximum location: X=-53.00, Y=-58.00


SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.201081
SAR 1g (W/Kg)	0.339805





Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.5083	0.3545	0.2239	0.1426	0.0909	0.0591	0.0376
	0.5- 0.4- 0.4- 0.3- 0.2- 0.1- 0.0-	02.55.07.5	12.5 17.	5 22.5 2 Z (mm)	27.5 32.5	40.0	

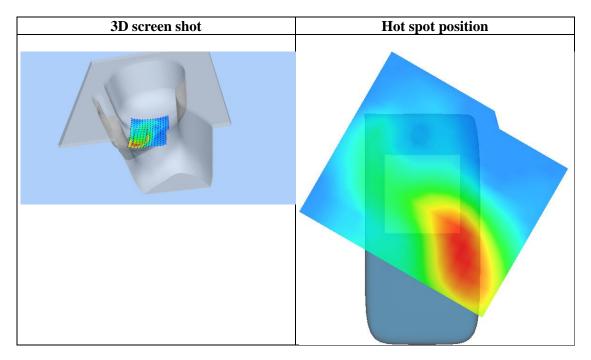



Page 140 of 160

Test Laboratory: AGC Lab Date: Jul. 24, 2022

LTE Band 66 Mid-Body-Back (1 RB#0) DUT: 4G Mobile Phone; Type: S6001

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=1.77; Frequency:1755 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.40 \text{ mho/m}$; $\epsilon r = 39.64$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.6, Liquid temperature ($^{\circ}$ C): 21.4

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 66 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm	
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm	
Phantom	Validation plane	
Device Position	Body Back	
Band	LTE Band 66	
Channels	Middle	
Signal	OFDM (Crest factor: 1.0)	

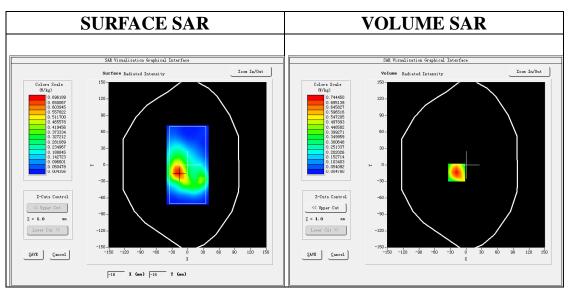



Maximum location: X=-18.00, Y=-14.00 SAR Peak: 1.10 W/kg

SAR 10g (W/Kg)	0.394093
SAR 1g (W/Kg)	0.701599





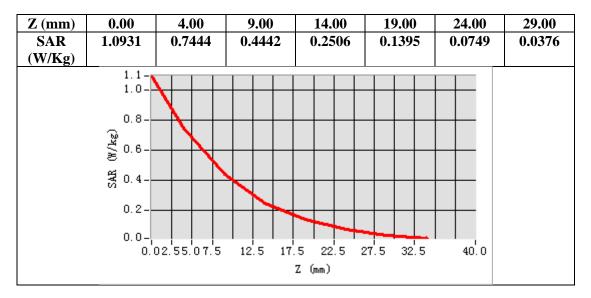

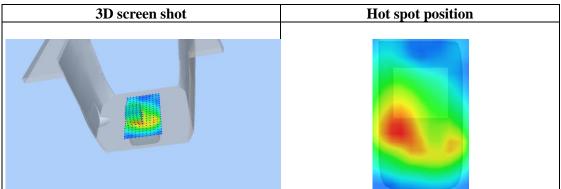



Page 142 of 160

WIFI MODE

Test Laboratory: AGC Lab Date: Jul. 28, 2022

802.11b Mid-Touch-Right

DUT: 4G Mobile Phone; Type: S6001

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=1.99;

Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz; $\sigma = 1.82$ mho/m; $\epsilon r = 38.99$ $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$ C):21.3, Liquid temperature ($^{\circ}$ C): 21.2

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368

• Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Mid- Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11b Mid- Touch-Right/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm	
Phantom	Right head	
Device Position	Cheek	
Band	2450MHz	
Channels	Middle	
Signal	Crest factor: 1.0	

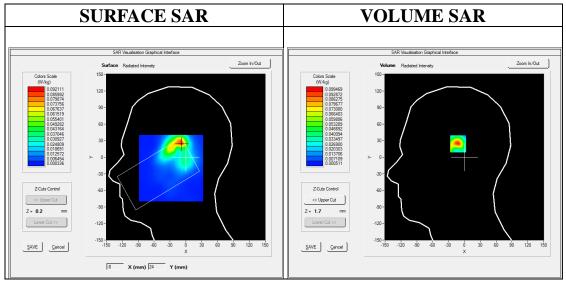

Maximum location: X=-10.00, Y=26.00 SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.037533
SAR 1g (W/Kg)	0.090261