

TEST REPORT

Product Name: 4K UHD Streaming Box
Trade Mark: SKYWORTH,SDT,DIRECTV, THOMSON,
STRONG, Tesla, MECOOL, CoLoVU
Model No.: LEAP-S1
Add. Model No.: OTT-01, HP40A, HP40A3, HP4005,
SRT401,THA100,THA 100, HP4035,
XA400, KM2, C1 Plus, Leap-S1
Report Number: 210825002RFC-3
Test Standards: FCC 47 CFR Part 15 Subpart C
FCC ID: WNA-LEAPS1
Test Result: PASS
Date of Issue: November 16, 2022

Prepared for:

Shenzhen Skyworth Digital Technology Co.,LTD.
14/F, Block A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District,
Shenzhen, China


Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:



Kieron Luo
Project Engineer

Reviewed by:



Eric Yu
Project Supervisor

Approved by:



Kevin Liang
Assistant Manager

Date:

November 16, 2022

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Version

Version No.	Date	Description
V1.0	November 16, 2022	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION.....	6
1.5 DESCRIPTION OF SUPPORT UNITS	6
1.6 TEST LOCATION.....	6
1.7 TEST FACILITY.....	6
1.8 DEVIATION FROM STANDARDS	7
1.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.11 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	10
4.1.2 RECORD OF NORMAL ENVIRONMENT.....	10
4.2 TEST CHANNELS	10
4.3 EUT TEST STATUS	11
4.4 PRE-SCAN	11
4.5 TEST SETUP	12
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	12
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	13
4.5.3 FOR CONDUCTED RF TEST SETUP	14
4.6 SYSTEM TEST CONFIGURATION	14
4.7 DUTY CYCLE	15
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	18
5.1 REFERENCE DOCUMENTS FOR TESTING	18
5.2 ANTENNA REQUIREMENT	18
5.3 CONDUCTED PEAK OUTPUT POWER.....	19
5.4 6 dB BANDWIDTH & OCCUPIED BANDWIDTH.....	20
5.5 POWER SPECTRAL DENSITY	26
5.6 CONDUCTED OUT OF BAND EMISSION	31
5.7 RADIATED SPURIOUS EMISSIONS.....	48
5.8 BAND EDGE MEASUREMENTS (RADIATED).....	57
5.9 CONDUCTED EMISSION	70
APPENDIX 1 PHOTOS OF TEST SETUP	73
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	73

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Shenzhen Skyworth Digital Technology Co.,LTD.
Address of Applicant:	14/F, Block A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District, Shenzhen, China
Manufacturer:	Shenzhen Skyworth Digital Technology Co.,LTD.
Address of Manufacturer:	14/F, Block A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District, Shenzhen, China

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	4K UHD Streaming Box		
Model No.:	LEAP-S1		
Add. Model No.:	OTT-01, HP40A, HP40A3, HP4005, SRT401,THA100,THA 100, HP4035, XA400, KM2, C1 Plus, Leap-S1		
Trade Mark:	SKYWORTH,SDT,DIRECTV, THOMSON, STRONG, Tesla, MECOOL, CoLoVU		
DUT Stage:	Production Unit		
EUT Supports Function:	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth V4.2	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
Software Version:	V1.0.0.1		
Hardware Version:	V1.0		
Sample Received Date:	September 1, 2021		
Sample Tested Date:	September 8, 2021 to October 20, 2021		

1.2.2 Description of Accessories

Adapter (1)	
Model No.:	YS-SKY120100U00P
Input:	100-240 V~50/60 Hz 0.5 A Max
Output:	12.0 V $\equiv$ 1.0 A
DC Cable:	1.50 Meter, Unshielded without ferrite

Adapter (2)	
Model No.:	RJ-SKY120100U60S
Input:	100-240 V~50/60 Hz 0.5 A Max
Output:	12.0 V $\equiv$ 1.0 A
DC Cable:	1.50 Meter, Unshielded without ferrite

Adapter (3)	
Model No.:	RJ23-W120100US
Input:	100-240 V~50/60 Hz 0.5 A Max
Output:	12.0 V $\equiv$ 1.0 A
DC Cable:	1.50 Meter, Unshielded without ferrite

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Adapter (4)	
Model No.:	F12L33-120100SPAU L.P.S
Input:	100-240 V~50/60 Hz 0.3 A Max
Output:	12.0 V $\equiv$ 1.0 A
DC Cable:	1.50 Meter, Unshielded without ferrite

Adapter (5)	
Model No.:	YS-SKY120100M00P
Input:	100-240 V~50/60 Hz 0.5 A Max
Output:	12.0 V $\equiv$ 1.0 A
DC Cable:	1.50 Meter, Unshielded without ferrite

Adapter (6)	
Model No.:	BY-SKY120100U70P
Input:	100-240 V~50/60 Hz 0.5 A Max
Output:	12.0 V $\equiv$ 1.0 A
DC Cable:	1.50 Meter, Unshielded without ferrite

Cable	
Description:	HDMI Cable
Cable Type:	Shielded without ferrite
Length:	1.50 Meter

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz	
Frequency Range:	2412 MHz to 2462 MHz	
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20, IEEE 802.11n-HT40	
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM(64-QAM, 16-QAM, QPSK, BPSK)	
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS15 IEEE 802.11n-HT40: Up to MCS15	
Number of Channels:	IEEE 802.11b: 11 IEEE 802.11g: 11 IEEE 802.11n-HT20: 11 IEEE 802.11n-HT40: 9	
Channel Separation:	5 MHz	
Antenna Type:	Chain 0	PIFA Antenna
	Chain 1	PIFA Antenna
Antenna Gain:	Chain 0	3.18 dBi
	Chain 1	3.18 dBi
Directional gain:	6.19 dBi	
Maximum Peak Power:	SISO_ Chain 0	IEEE 802.11b: 11.97 dBm IEEE 802.11g: 9.20 dBm

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

		IEEE 802.11n-HT20: 9.11 dBm IEEE 802.11n-HT40: 5.93 dBm
	SISO_ Chain 1	IEEE 802.11b: 11.86 dBm IEEE 802.11g: 9.29 dBm IEEE 802.11n-HT20: 9.40 dBm IEEE 802.11n-HT40: 5.92 dBm
	MIMO_ Chain 0+1	IEEE 802.11n-HT20: 12.27 dBm IEEE 802.11n-HT40: 8.93 dBm
Normal Test Voltage:		120 Vac

1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20	$f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$
IEEE 802.11n-HT40	$f = 2407 + 5k \text{ MHz}, k = 3, \dots, 9$
Note: f is the operating frequency (MHz); k is the operating channel.	

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	DELL	Latitude 3400	6GJQKT2	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, 518109
Telephone: +86 (0) 755 2823 0888
Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.9 dB
5	Radiated emission 1GHz-18GHz	± 4.8 dB
6	Radiated emission 18GHz-26GHz	± 5.1 dB
7	Radiated emission 26GHz-40GHz	± 5.1 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.9 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	2.4 GHz: ± 6.5 x 10 ⁻⁸
12	Transmission Time	± 0.19 %

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013 Clause 11.8.1	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.13	PASS
Note: Adapter 1 testing is the worst case, so all tests are done with adapter 1.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	3m SAC	ETS-Lindgren	3m	Euroshiedpn-CT001270-1317	Jan. 22, 2021	Jan. 21, 2024
☒	Loop Antenna	ETS-Lindgren	6502	00202525	Nov. 14, 2020	Nov. 13, 2021
☒	Receiver	ROHDE & SCHWARZ	ESIB26	100114	Nov. 18, 2020	Nov. 17, 2021
☒	Broadband Antenna (Pre-amplifier)	ETS-Lindgren	3142E	00201566	Nov. 14, 2020	Nov. 13, 2021
☒	Pre-amplifier	HP	8447F	2805A02960	Nov. 10, 2020	Nov. 09, 2021
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 14, 2020	Nov. 13, 2021
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-Lindgren	3117-PA	00201541	Apr. 30, 2021	Apr. 29, 2023
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	Nov. 10, 2020	Nov. 09, 2021
☐	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-Lindgren	3116C-PA	00202652	Nov. 14, 2020	Nov. 13, 2022
☐	Pre-amplifier	ETS-Lindgren	00118384	202652	Nov. 14, 2020	Nov. 13, 2022
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 18, 2020	Nov. 17, 2021
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 18, 2020	Nov. 17, 2021
☒	LISN	R&S	ESH2-Z5	860014/024	Nov. 18, 2020	Nov. 17, 2021
☐	LISN	ETS-Lindgren	3816/2SH	00201088	Nov. 18, 2020	Nov. 17, 2021
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Nov. 10, 2020	Nov. 9, 2021
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Nov. 10, 2020	Nov. 9, 2021
☒	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	Nov. 10, 2020	Nov. 9, 2021
☒	Temp & Humidity chamber	Votisch	VT4002	58566133290020	Apr. 21, 2021	Apr. 20, 2022
☒	Test Software	Automation Test System	ECIT	Software Version: 1.0.7515.16529		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	120	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
AC Power Line Conducted Emission	23.8	42	100.09	David Zhang
Conducted Peak Output Power	24.5	44	101.8	Bert Xiong
6dB Bandwidth & Occupied Bandwidth	24.5	44	101.8	Bert Xiong
Power Spectral Density	24.5	44	101.8	Bert Xiong
Conducted Out of Band Emission	24.5	44	101.8	Bert Xiong
Radiated Spurious Emissions	24.2	49	100.02	Asia Yan
Band Edge Measurements (Radiated)	24.2	49	100.02	Asia Yan

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11b	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT20	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT40	2422 MHz to 2452 MHz	Channel 3	Channel 7	Channel 9
		2422 MHz	2437 MHz	2452 MHz

4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11b IEEE 802.11g IEEE 802.11n-HT20 IEEE 802.11n-HT40	2Tx/2Rx	1.Keep the EUT in continuously transmitting or receiving with modulation test single.

Power Setting		
Mode	Channel 1 -11	
	Chain 0	Chain 1
IEEE 802.11b	10	10
IEEE 802.11g	7	7
IEEE 802.11n-HT20	5	5
IEEE 802.11n-HT40	2	2

Test Software
Test software name: SecureCRT.exe;



4.4 PRE-SCAN


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

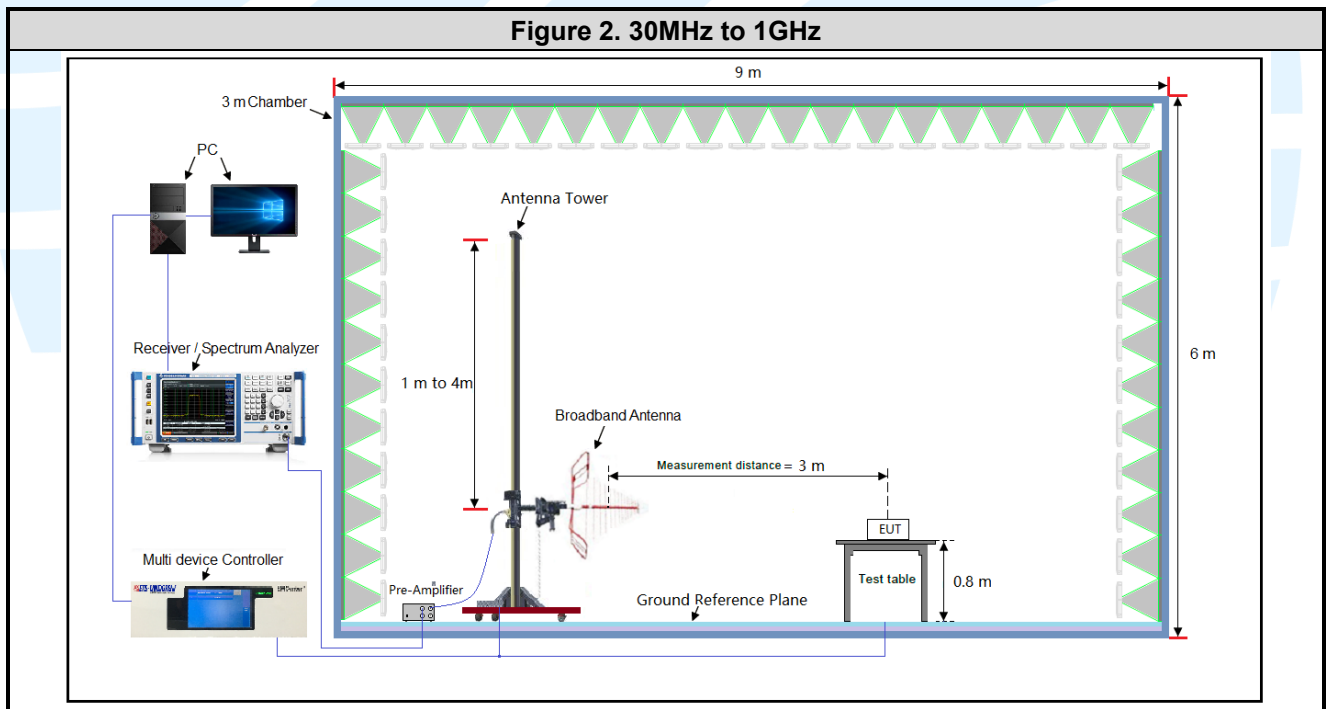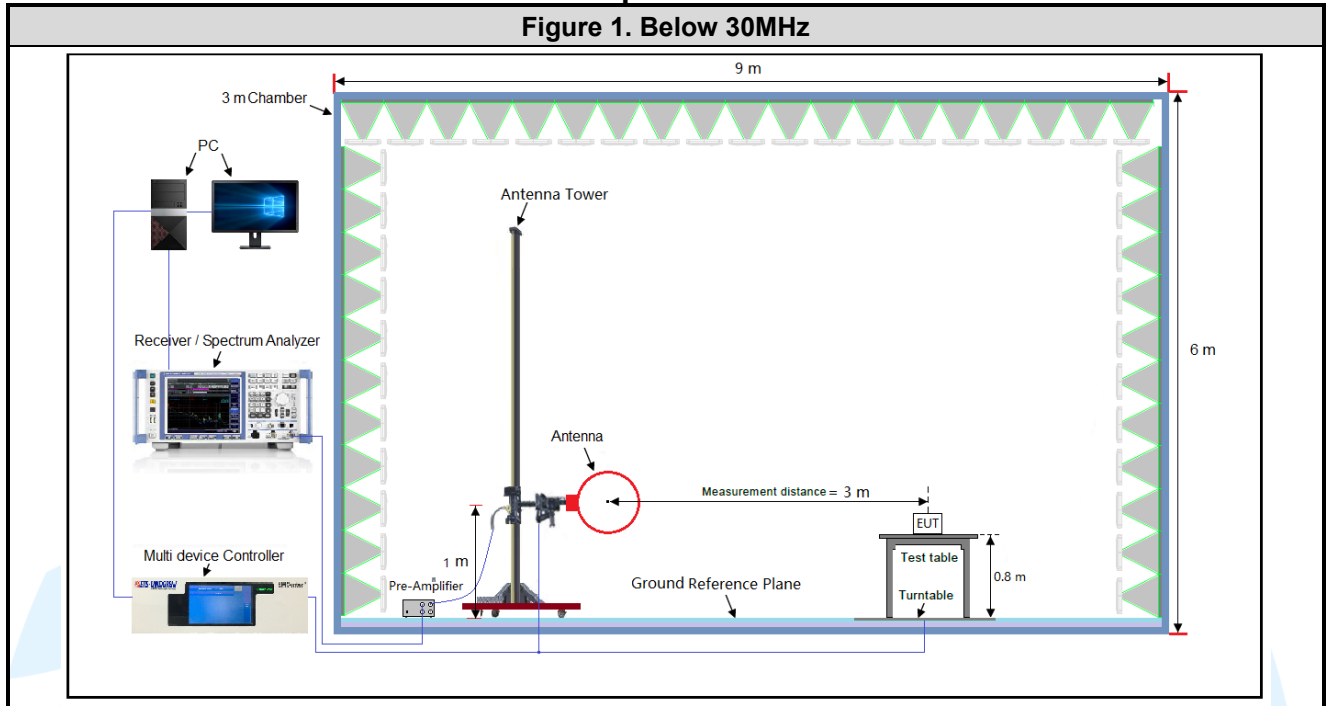


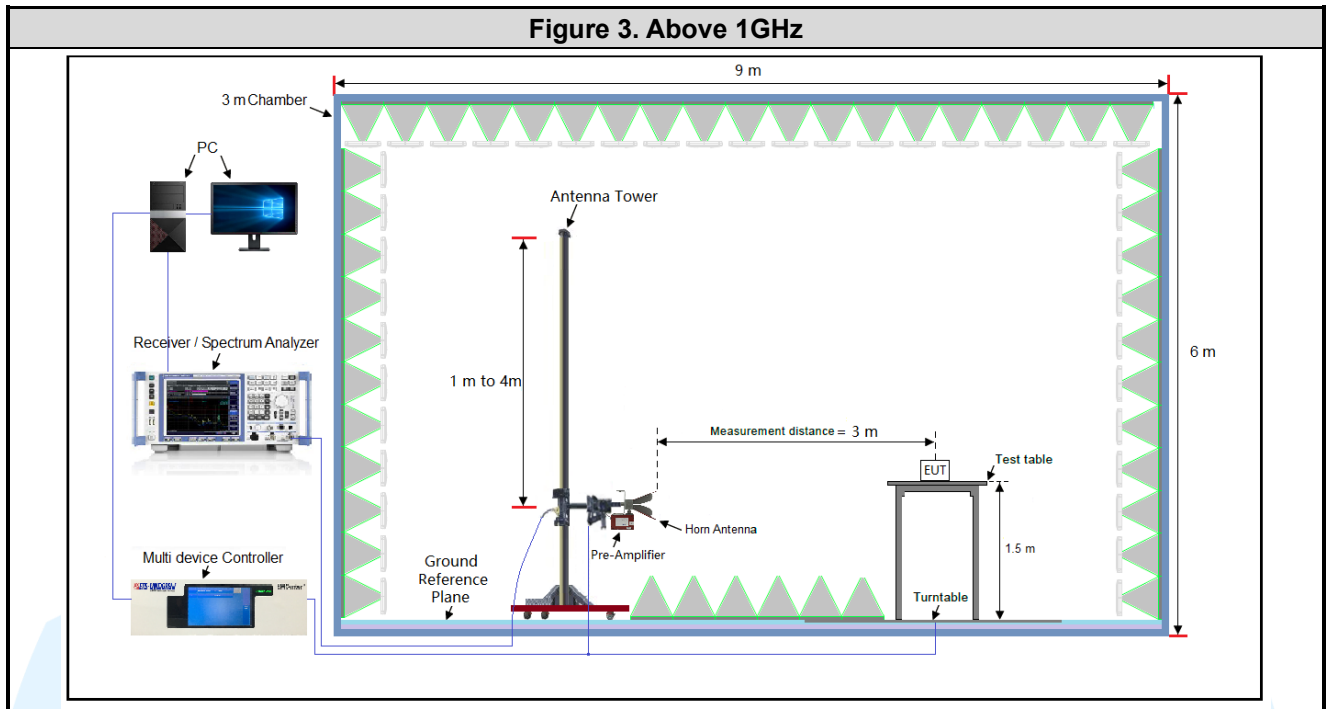

4.5.2 For Conducted Emissions test setup

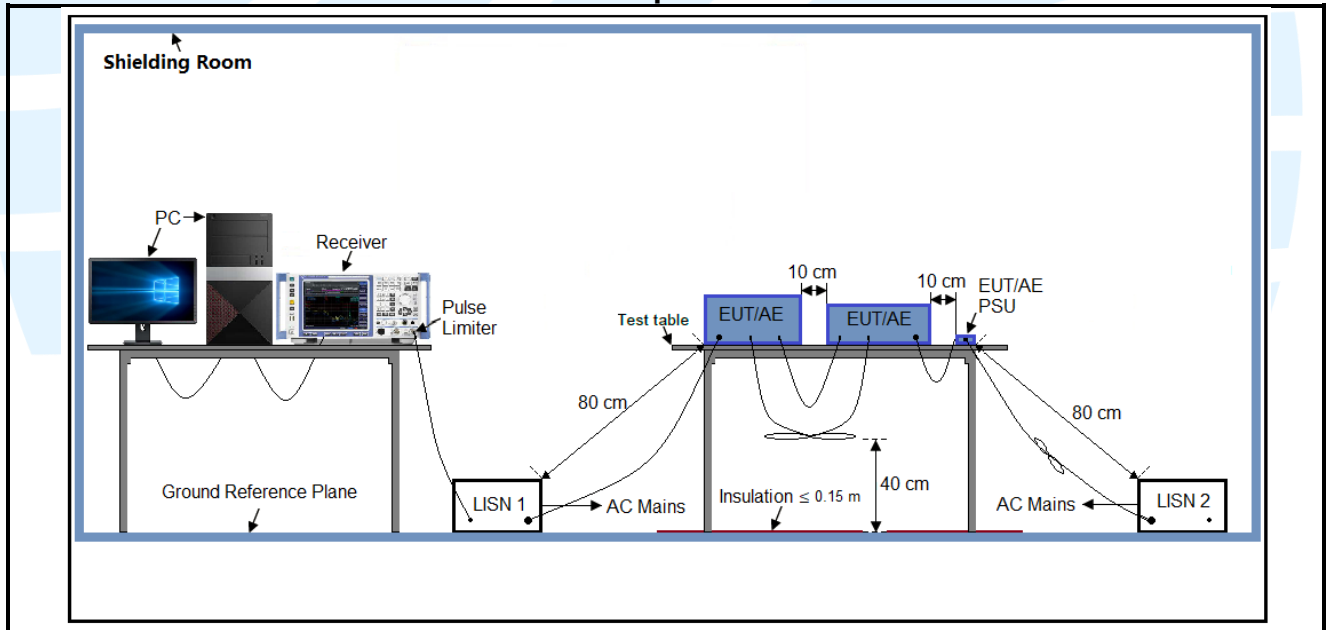

4.5.3 For Conducted RF test setup

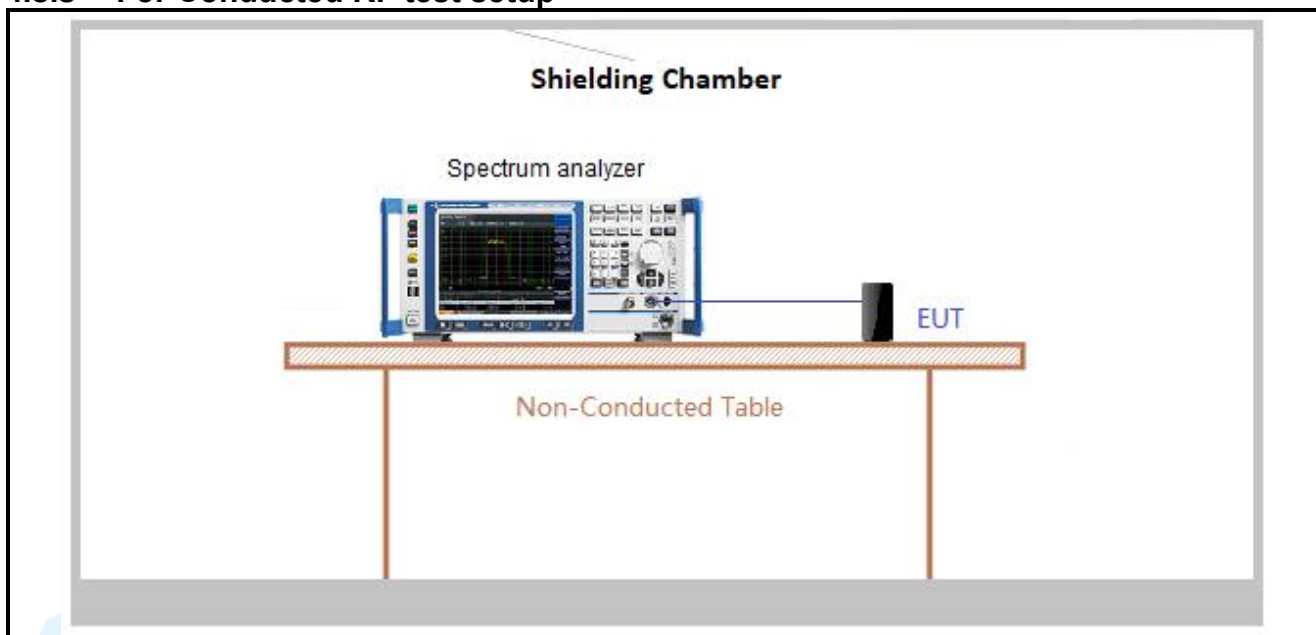

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	1TX	Chain 0	Z axis
	1TX	Chain 1	Z axis
	2TX	Chain 0+1	Z axis

All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results

Mode	Data rates (Mbps)	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	1.0000	1.0000	1.00	100.00	0.00	0.01	0.00
IEEE 802.11g	6	1.3900	1.4450	0.96	96.19	0.17	0.72	-0.34
IEEE 802.11n-HT20	MCS8	1.3000	1.3550	0.96	95.94	0.18	0.77	-0.36
IEEE 802.11n-HT40	MCS8	0.6480	0.7020	0.92	92.31	0.35	1.54	-0.70

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plots as follows

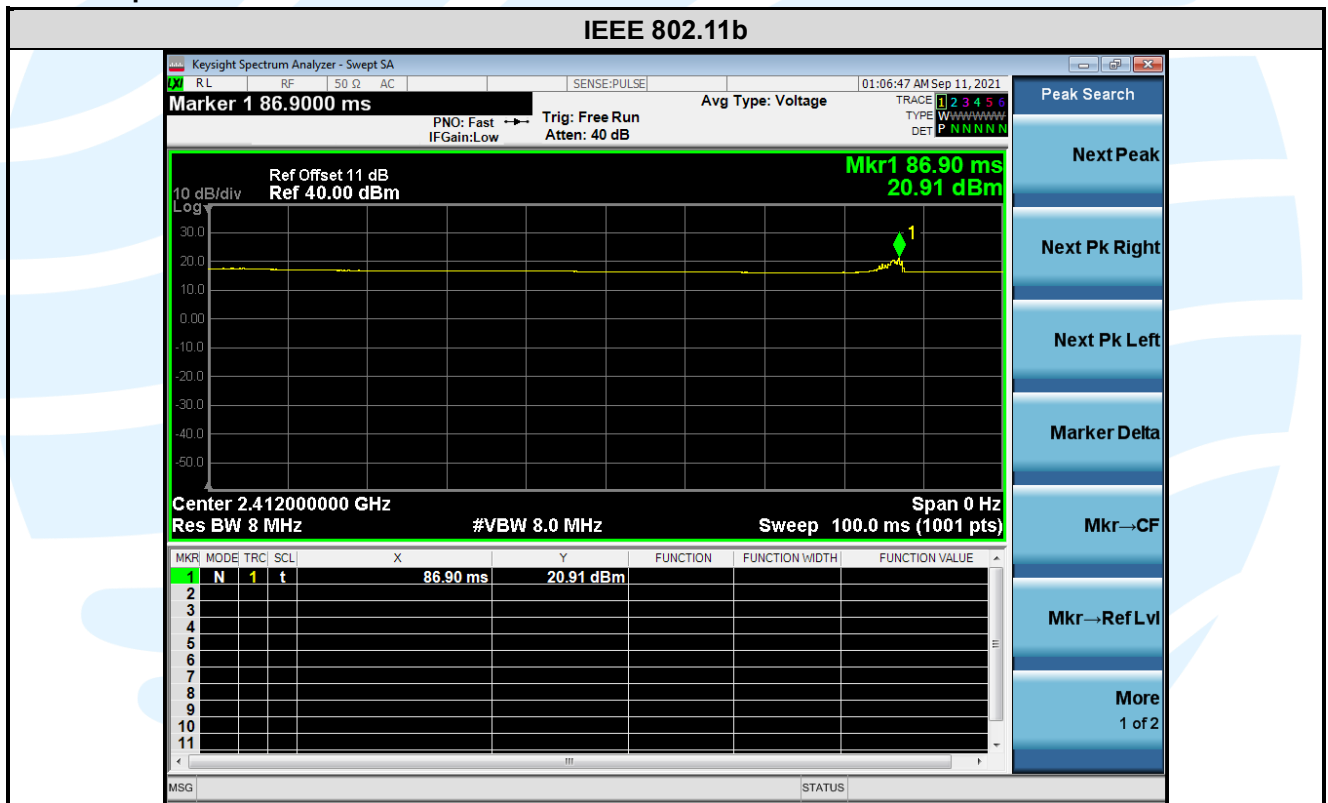

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

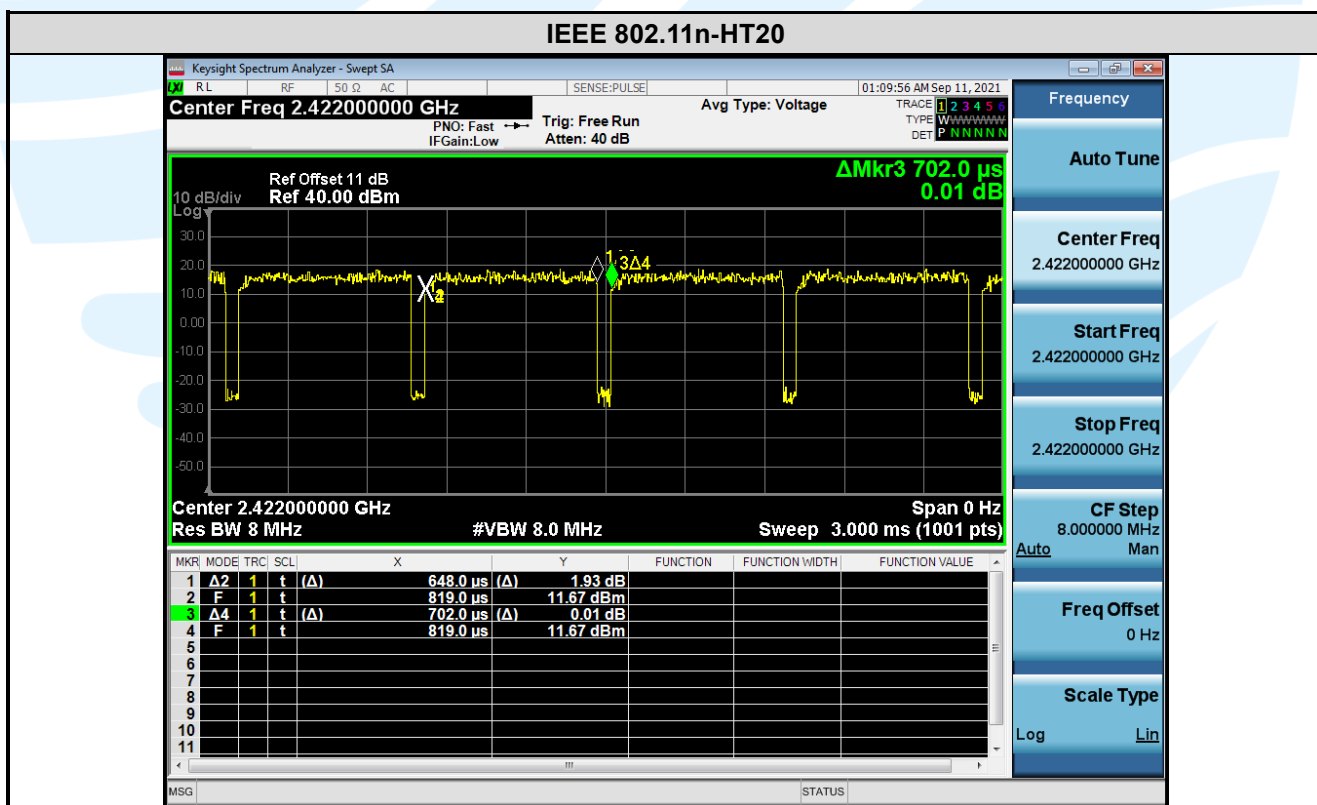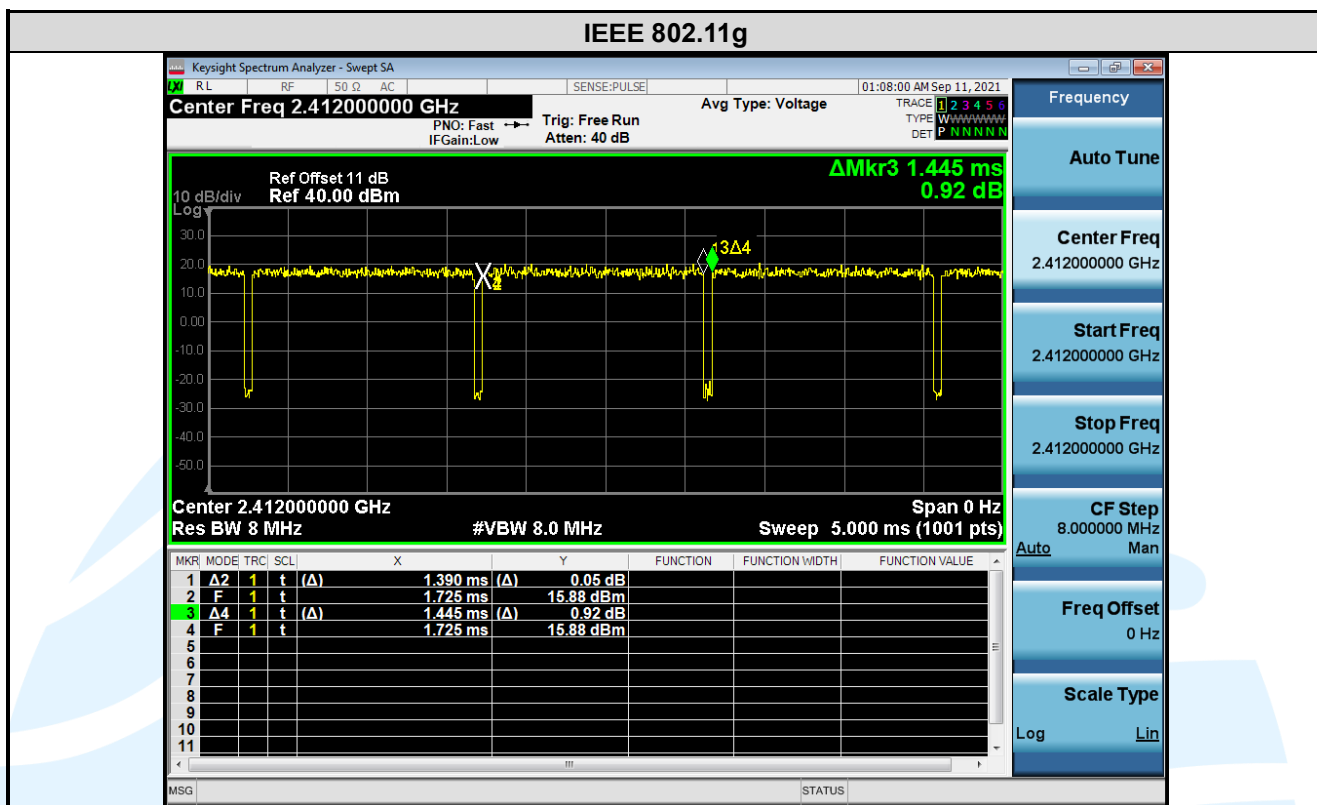

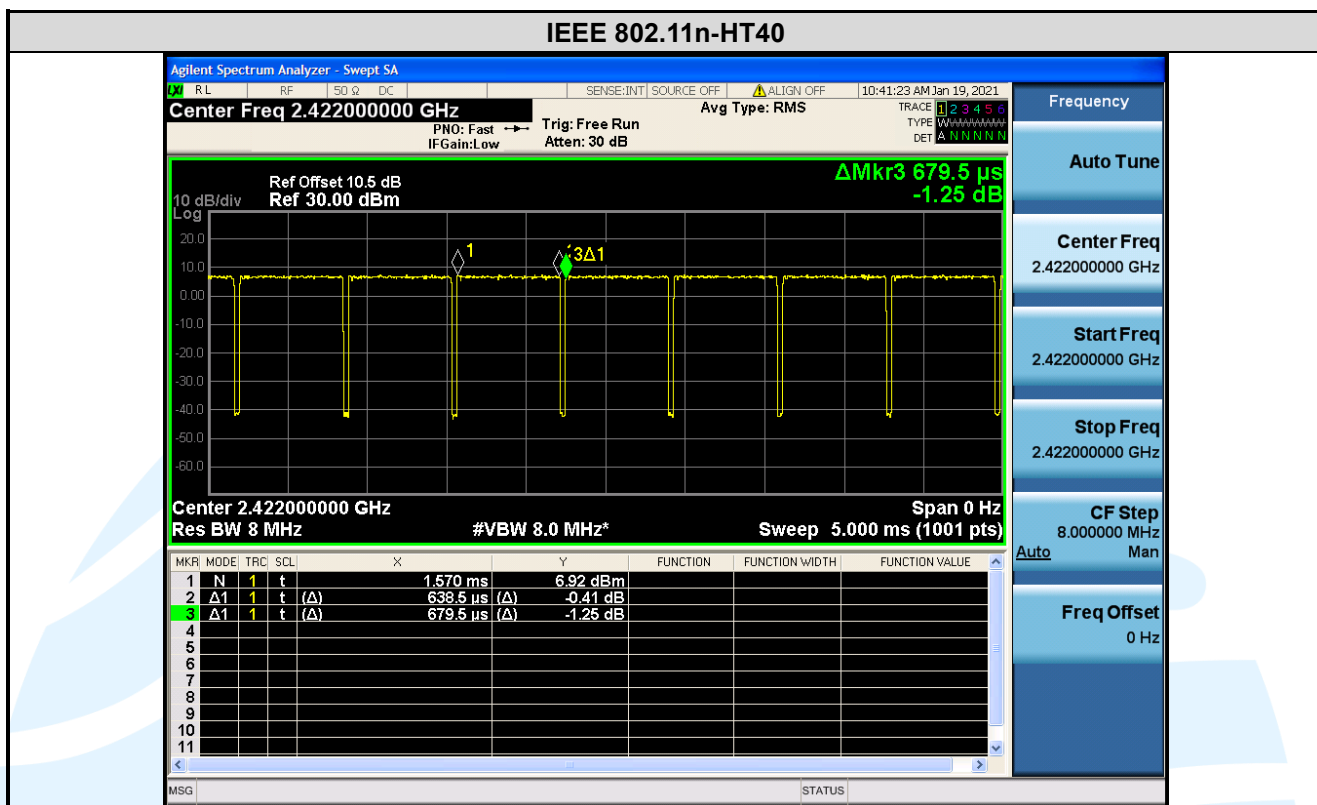

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules
5	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. EUT Antenna: The antenna has a special interface and no consideration of replacement. The transmit signals are correlated with each other and the antenna gain of both chains is completely consistent, the best-case directional gain of the antenna is 6.19 dBi (See section 5.3).

5.3 CONDUCTED PEAK OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)

Test Method: ANSI C63.10-2013 Clause 11.9.1.3

Limit: For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results:

Mode	Channel/ Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)				
		SISO_Chain 0	SISO_Chain 1	Total Power MIMO_Chain 0+1	Limit (dBm)	Pass / Fail
IEEE 802.11b	1(2412)	11.76	11.65	---	30	Pass
	6(2437)	11.97	11.86	---	30	Pass
	11(2462)	11.86	11.66	---	30	Pass
IEEE 802.11g	1(2412)	9.13	9.27	---	30	Pass
	6(2437)	9.16	9.21	---	30	Pass
	11(2462)	9.20	9.29	---	30	Pass
IEEE 802.11n- HT20	1(2412)	8.98	9.37	12.19	29.81	Pass
	6(2437)	9.04	9.32	12.19	29.81	Pass
	11(2462)	9.11	9.40	12.27	29.81	Pass
IEEE 802.11n- HT40	3(2422)	5.87	5.92	8.91	29.81	Pass
	6(2437)	5.93	5.91	8.93	29.81	Pass
	9(2452)	5.72	5.86	8.80	29.81	Pass

Remark:

1. Total (Chain 0+1) = $10 \cdot \log[(10^{\text{Chain 0/10}}) + (10^{\text{Chain 1/10}})]$

2. Directional gain and the maximum conducted output power limit see table below:

Frequency Band	Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Peak Power Limit (dBm)
2400 MHz to 2483.5 MHz	3.18	3.18	6.19	29.81

Basic methodology with N_{ANT} transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by N_{ANT} transmitter outputs of equal power. Directional gain is to be computed as follows:

If any transmit signals are *correlated* with each other,

$$\text{Directional gain} = G_{ANT} + 10 \log(N_{ANT}) \text{ dBi}$$

5.4 6 DB BANDWIDTH & OCCUPIED BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)
Test Method: ANSI C63.10-2013 Clause 11.8.1
Limit: For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz
Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:

6dB Bandwidth

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- a) Set RBW = 1% to 5% of the occupied bandwidth
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.
Instruments Used: Refer to section 3 for details
Test Results:

Mode	Channel/ Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Limit	Pass / Fail
Chain 0				
IEEE 802.11b	1(2412)	9.078	> 500 kHz	Pass
	6(2437)	9.055	> 500 kHz	Pass
	11(2462)	9.084	> 500 kHz	Pass
IEEE 802.11g	1(2412)	15.160	> 500 kHz	Pass
	6(2437)	15.160	> 500 kHz	Pass
	11(2462)	15.140	> 500 kHz	Pass
IEEE 802.11n-HT20	1(2412)	15.160	> 500 kHz	Pass
	6(2437)	15.160	> 500 kHz	Pass
	11(2462)	15.150	> 500 kHz	Pass
IEEE 802.11n-HT40	3(2422)	35.190	> 500 kHz	Pass
	6(2437)	35.130	> 500 kHz	Pass
	9(2452)	35.150	> 500 kHz	Pass
Chain 1				
IEEE 802.11b	1(2412)	9.087	> 500 kHz	Pass
	6(2437)	9.088	> 500 kHz	Pass
	11(2462)	9.083	> 500 kHz	Pass
IEEE 802.11g	1(2412)	15.16	> 500 kHz	Pass
	6(2437)	15.15	> 500 kHz	Pass
	11(2462)	15.17	> 500 kHz	Pass
IEEE 802.11n-HT20	1(2412)	16.33	> 500 kHz	Pass
	6(2437)	16.33	> 500 kHz	Pass
	11(2462)	16.30	> 500 kHz	Pass
IEEE 802.11n-HT40	3(2422)	35.17	> 500 kHz	Pass
	6(2437)	35.14	> 500 kHz	Pass
	9(2452)	35.17	> 500 kHz	Pass

The test plots as follows:

6 dB Bandwidth

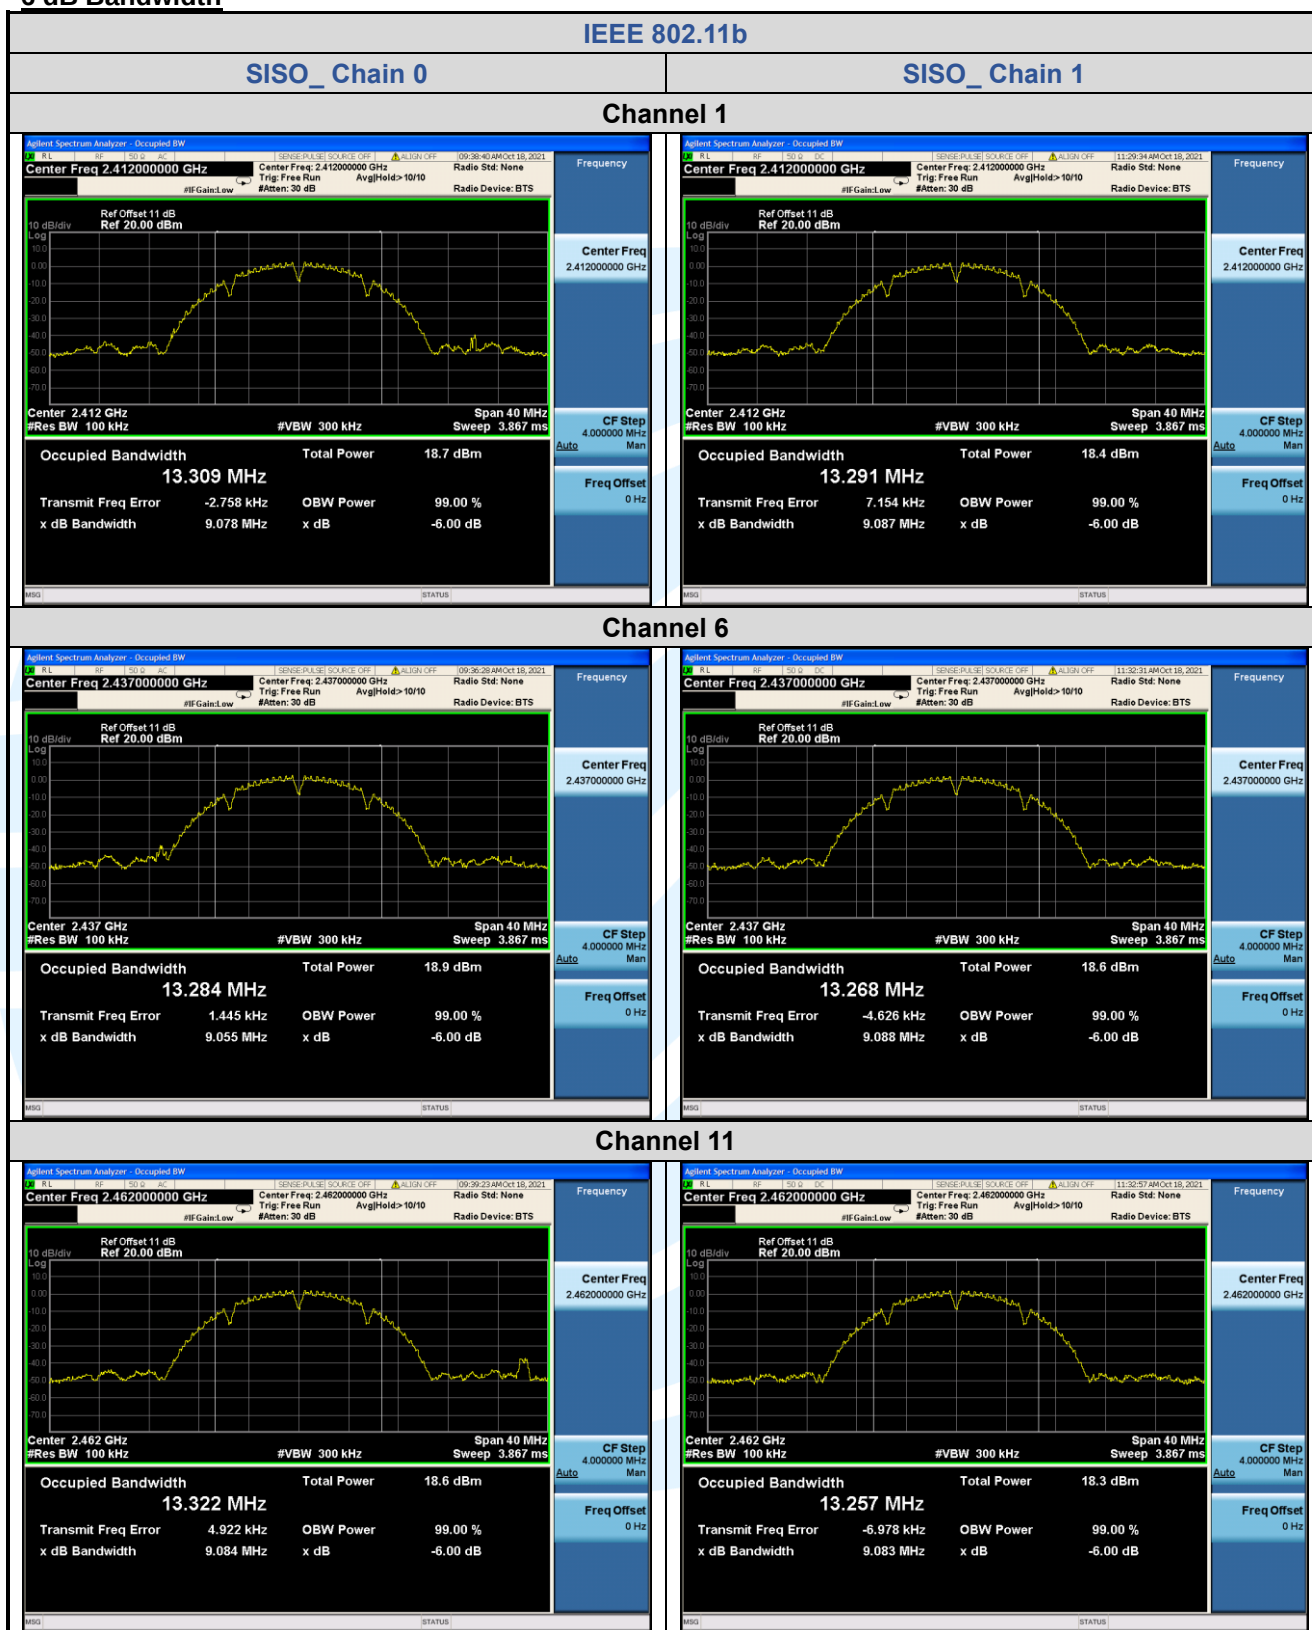

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

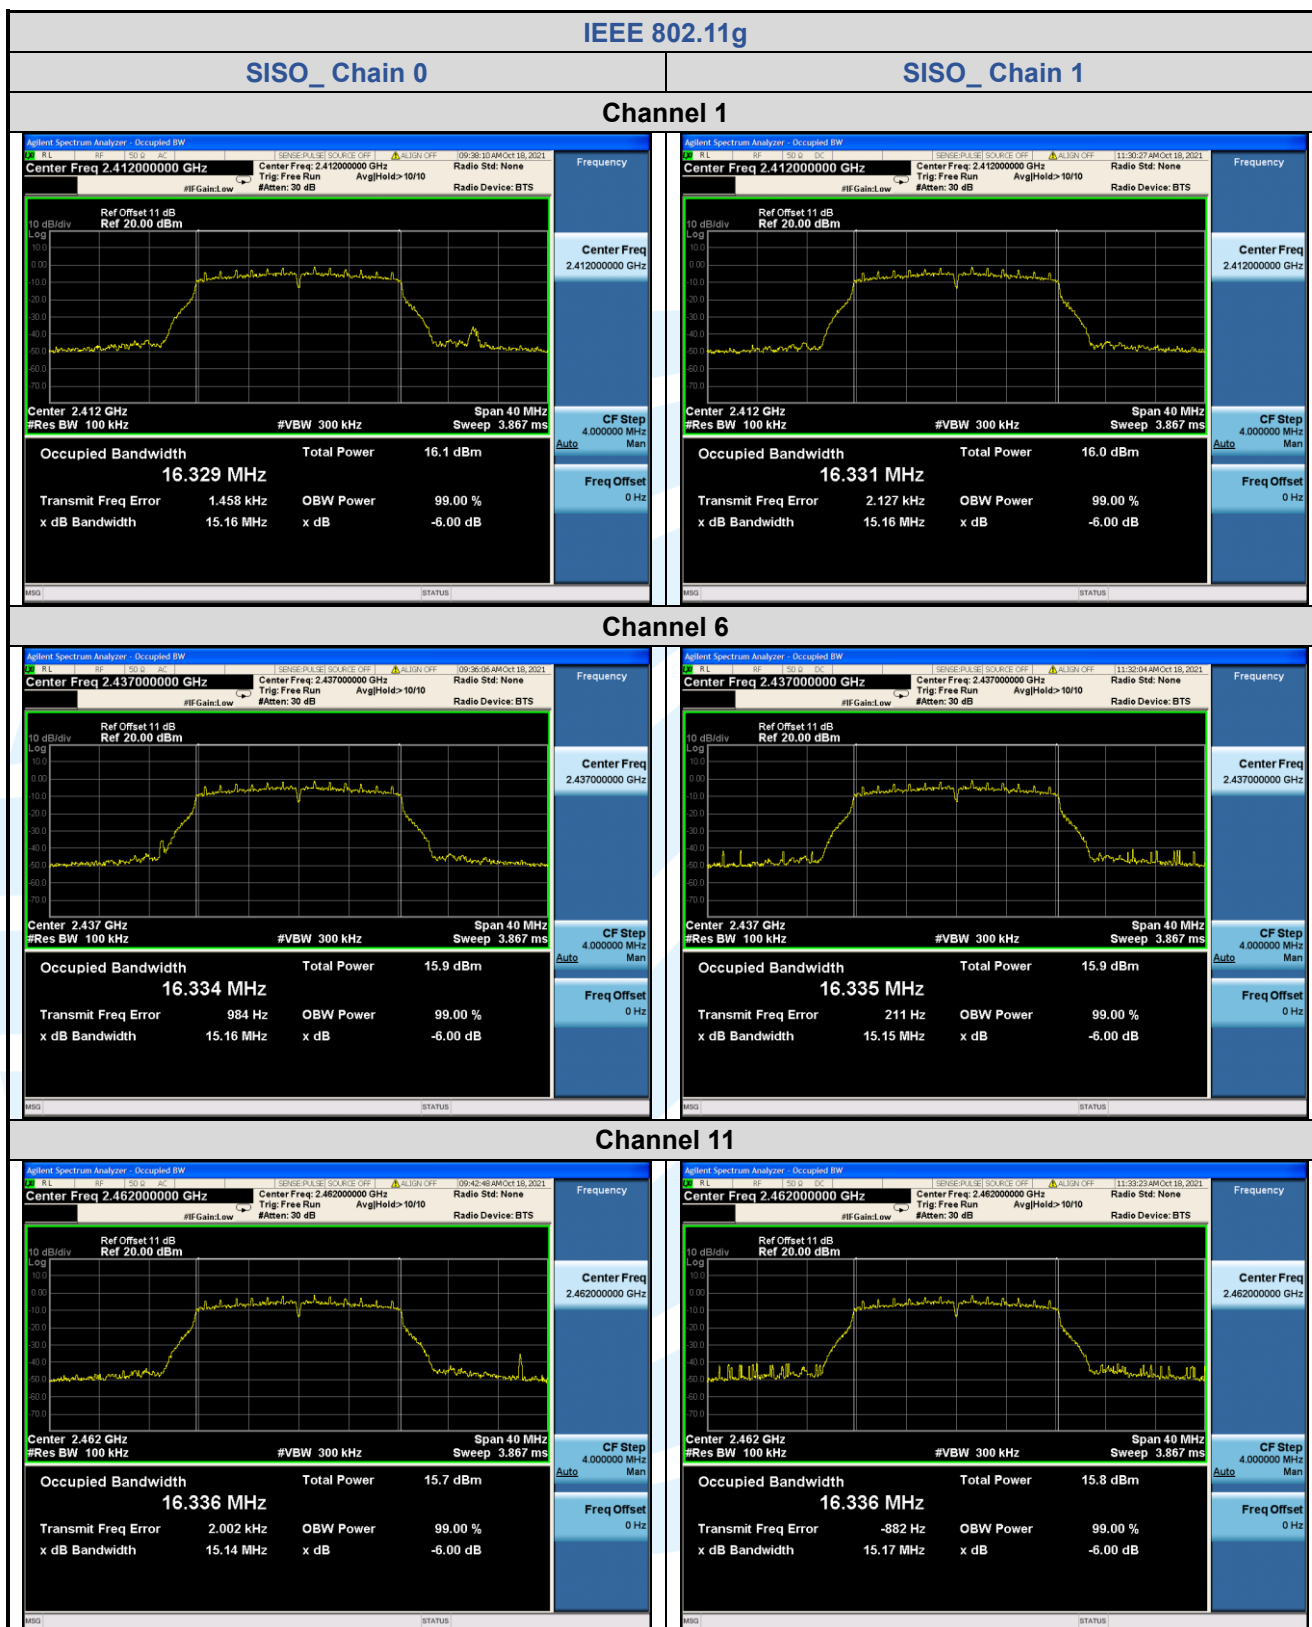

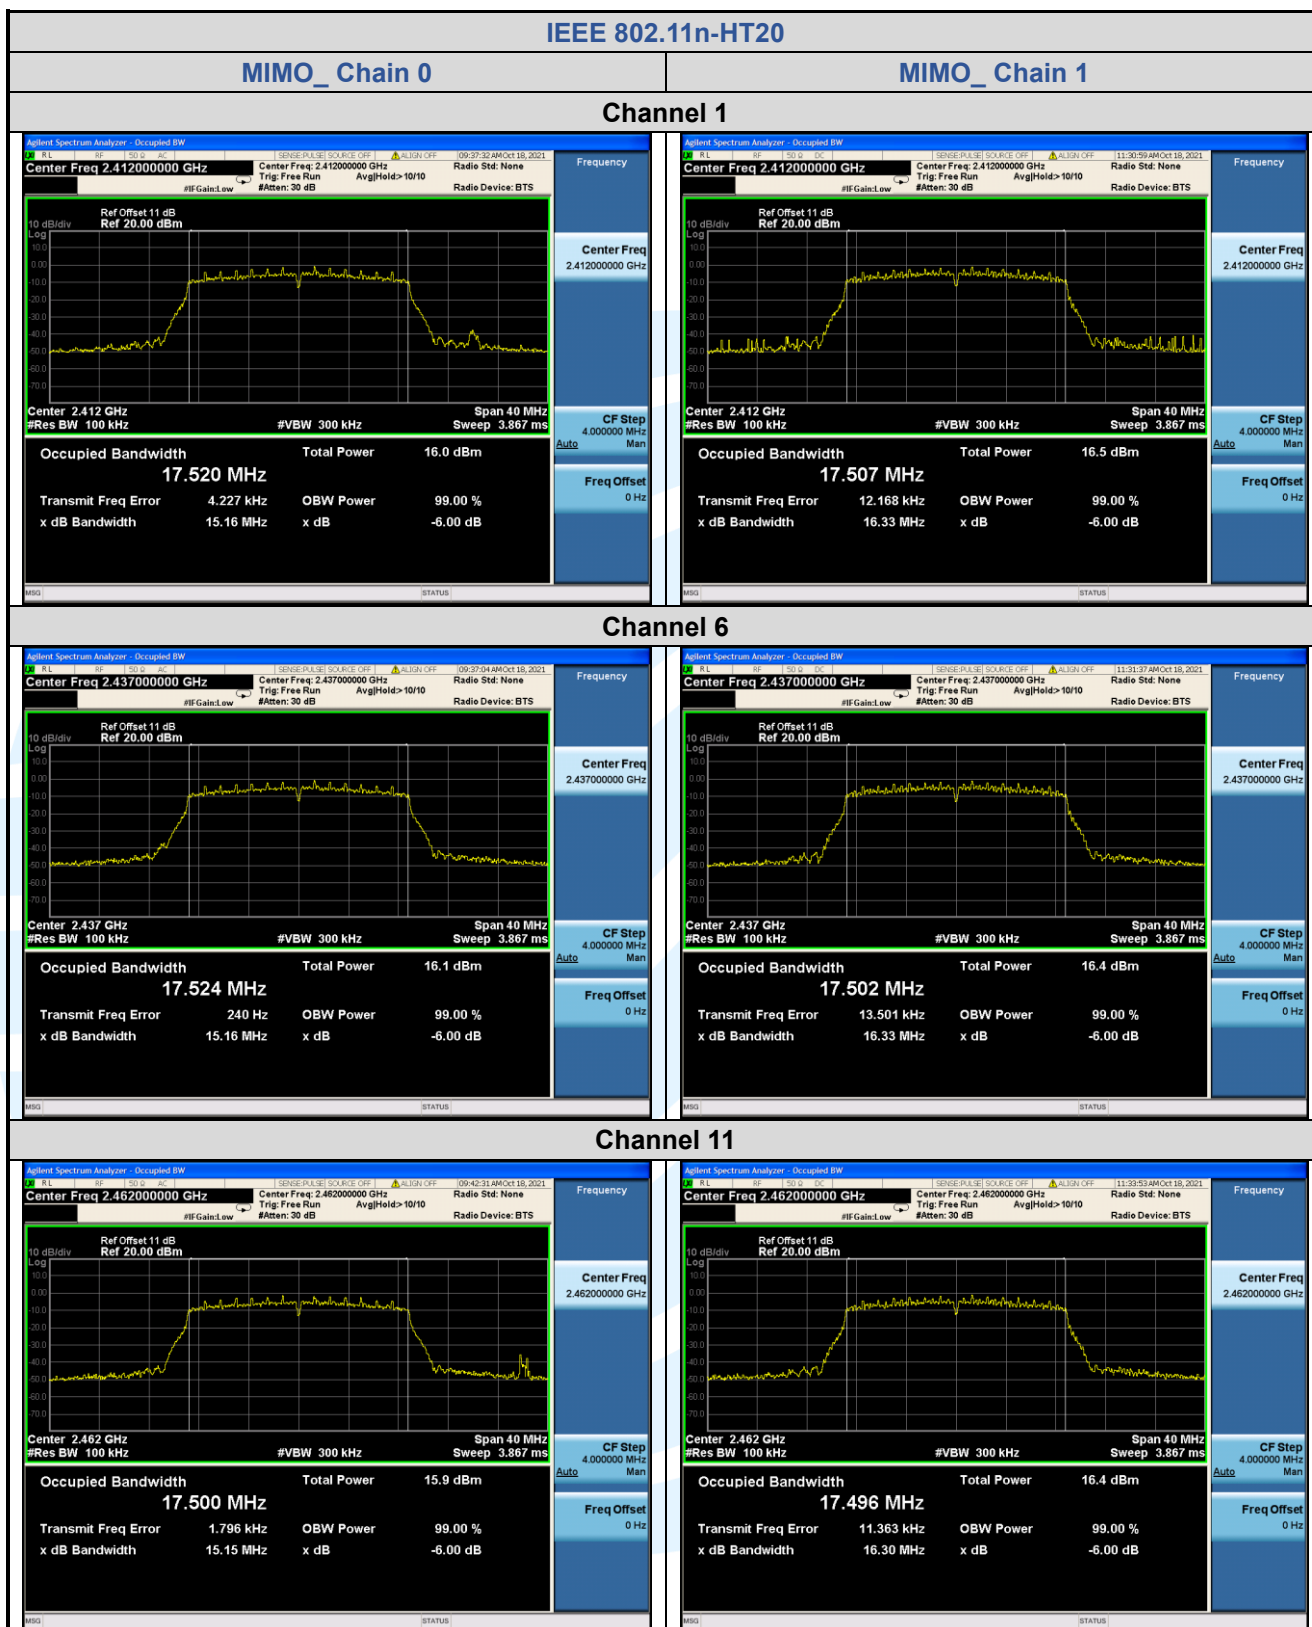

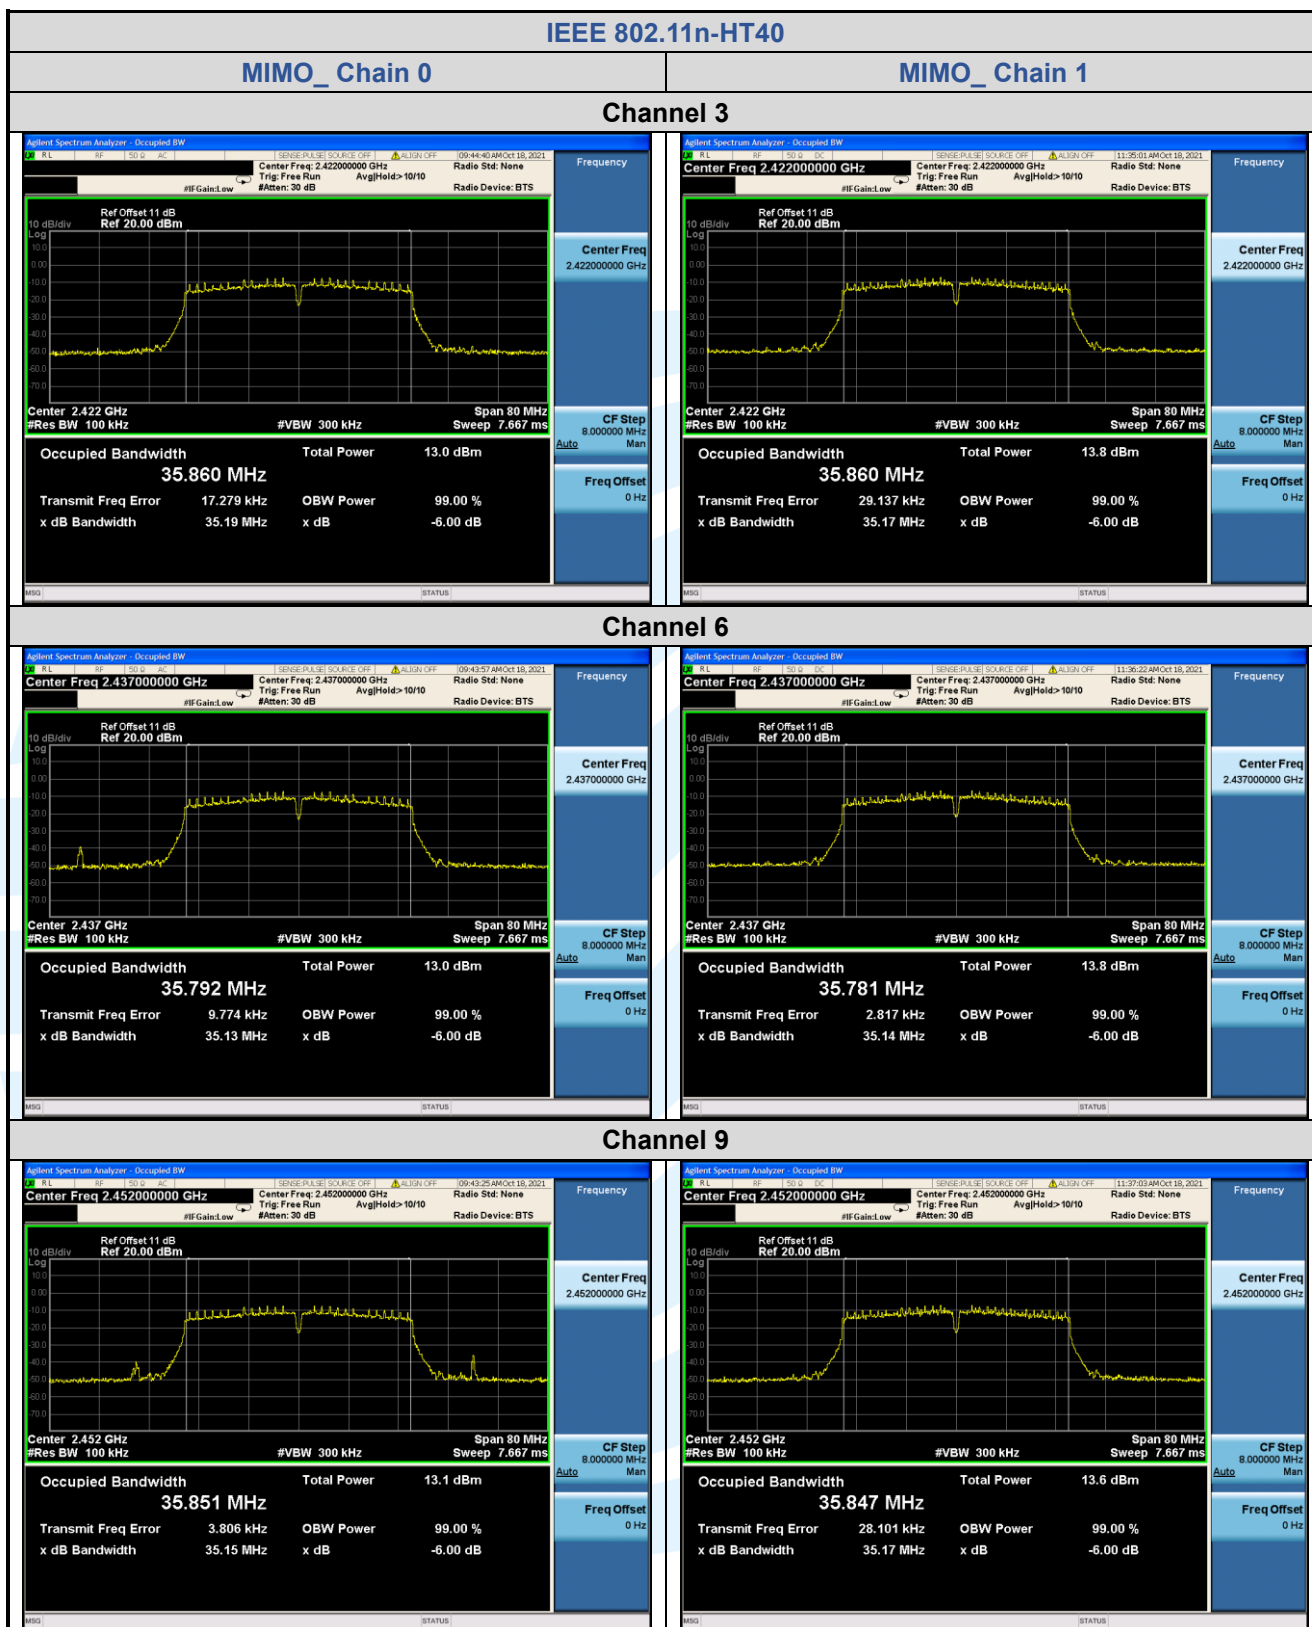

5.5 POWER SPECTRAL DENSITY

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (e)

Test Method: ANSI C63.10-2013 Clause 11.10.2

Limit: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results:

Mode	Channel/ Frequency (MHz)	Power spectral density (dBm/3kHz)				Pass / Fail
		SISO_ Chain 0	SISO_ Chain 1	Total Power MIMO_ Chain 0+1	Limit @3kHz (dBm)	
IEEE 802.11b	1(2412)	-13.021	-12.907	---	8	Pass
	6(2437)	-13.944	-13.783	---	8	Pass
	11(2462)	-11.869	-12.060	---	8	Pass
IEEE 802.11g	1(2412)	-17.475	-16.891	---	8	Pass
	6(2437)	-15.565	-17.023	---	8	Pass
	11(2462)	-17.243	-16.989	---	8	Pass
IEEE 802.11n- HT20	1(2412)	-15.861	-16.190	-13.01	7.81	Pass
	6(2437)	-17.500	-16.818	-14.14	7.81	Pass
	11(2462)	-16.859	-14.832	-12.72	7.81	Pass
IEEE 802.11n- HT40	3(2422)	-22.633	-22.661	-19.64	7.81	Pass
	6(2437)	-22.250	-22.793	-19.50	7.81	Pass
	9(2452)	-22.791	-14.985	-14.32	7.81	Pass

Remark:

1. Power with Duty Factor = Measured Power + Duty Cycle Factor

2. Total (Chain 0+1) = $10 \cdot \log[(10^{\text{Chain 0/10}}) + (10^{\text{Chain 1/10}})]$

3. Directional gain and the maximum conducted power spectral density limit see table below:

Frequency Band	Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Peak Power Limit (dBm)
2400 MHz to 2483.5 MHz	3.18	3.18	6.19	7.81
Basic methodology with N_{ANT} transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by N_{ANT} transmitter outputs of equal power. Directional gain is to be computed as follows:				
If <i>any</i> transmit signals are <i>correlated</i> with each other,				
Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi				

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

The test plots as follows:

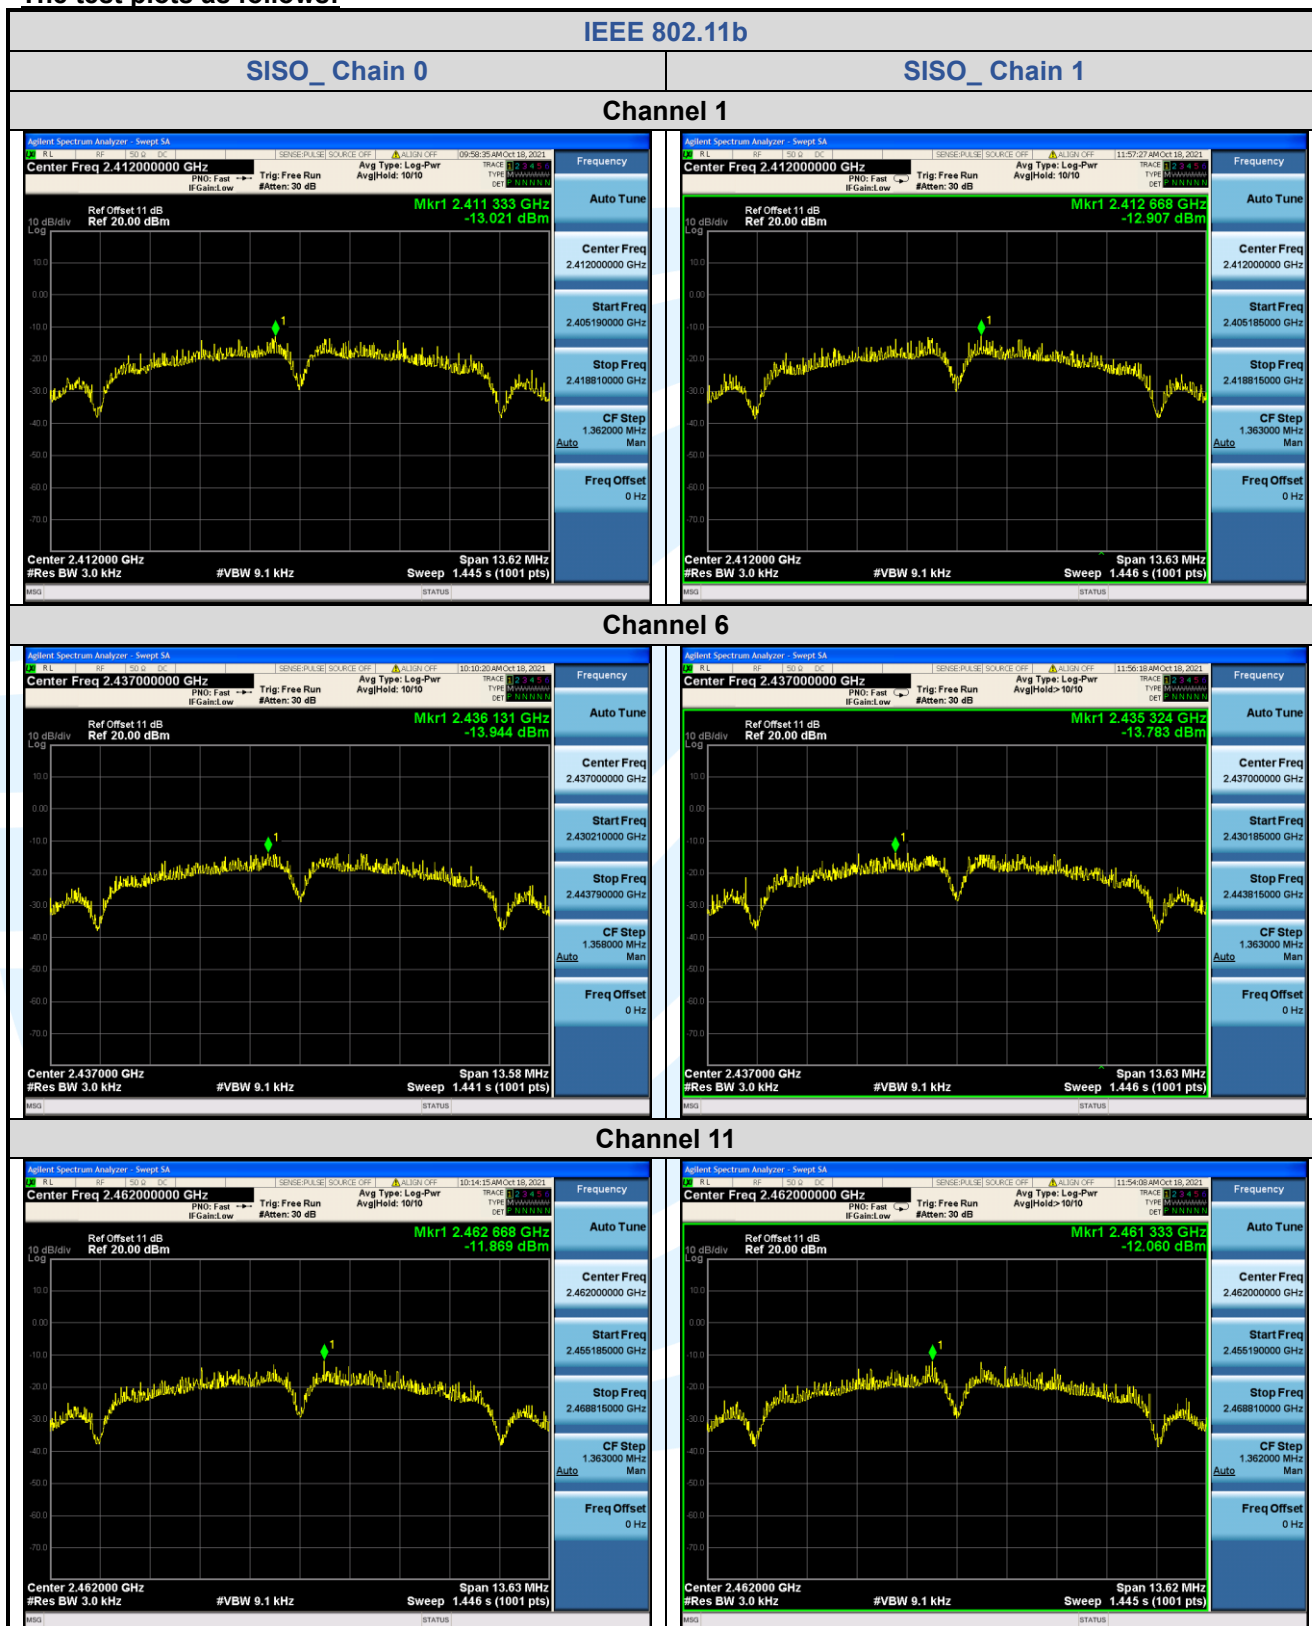

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

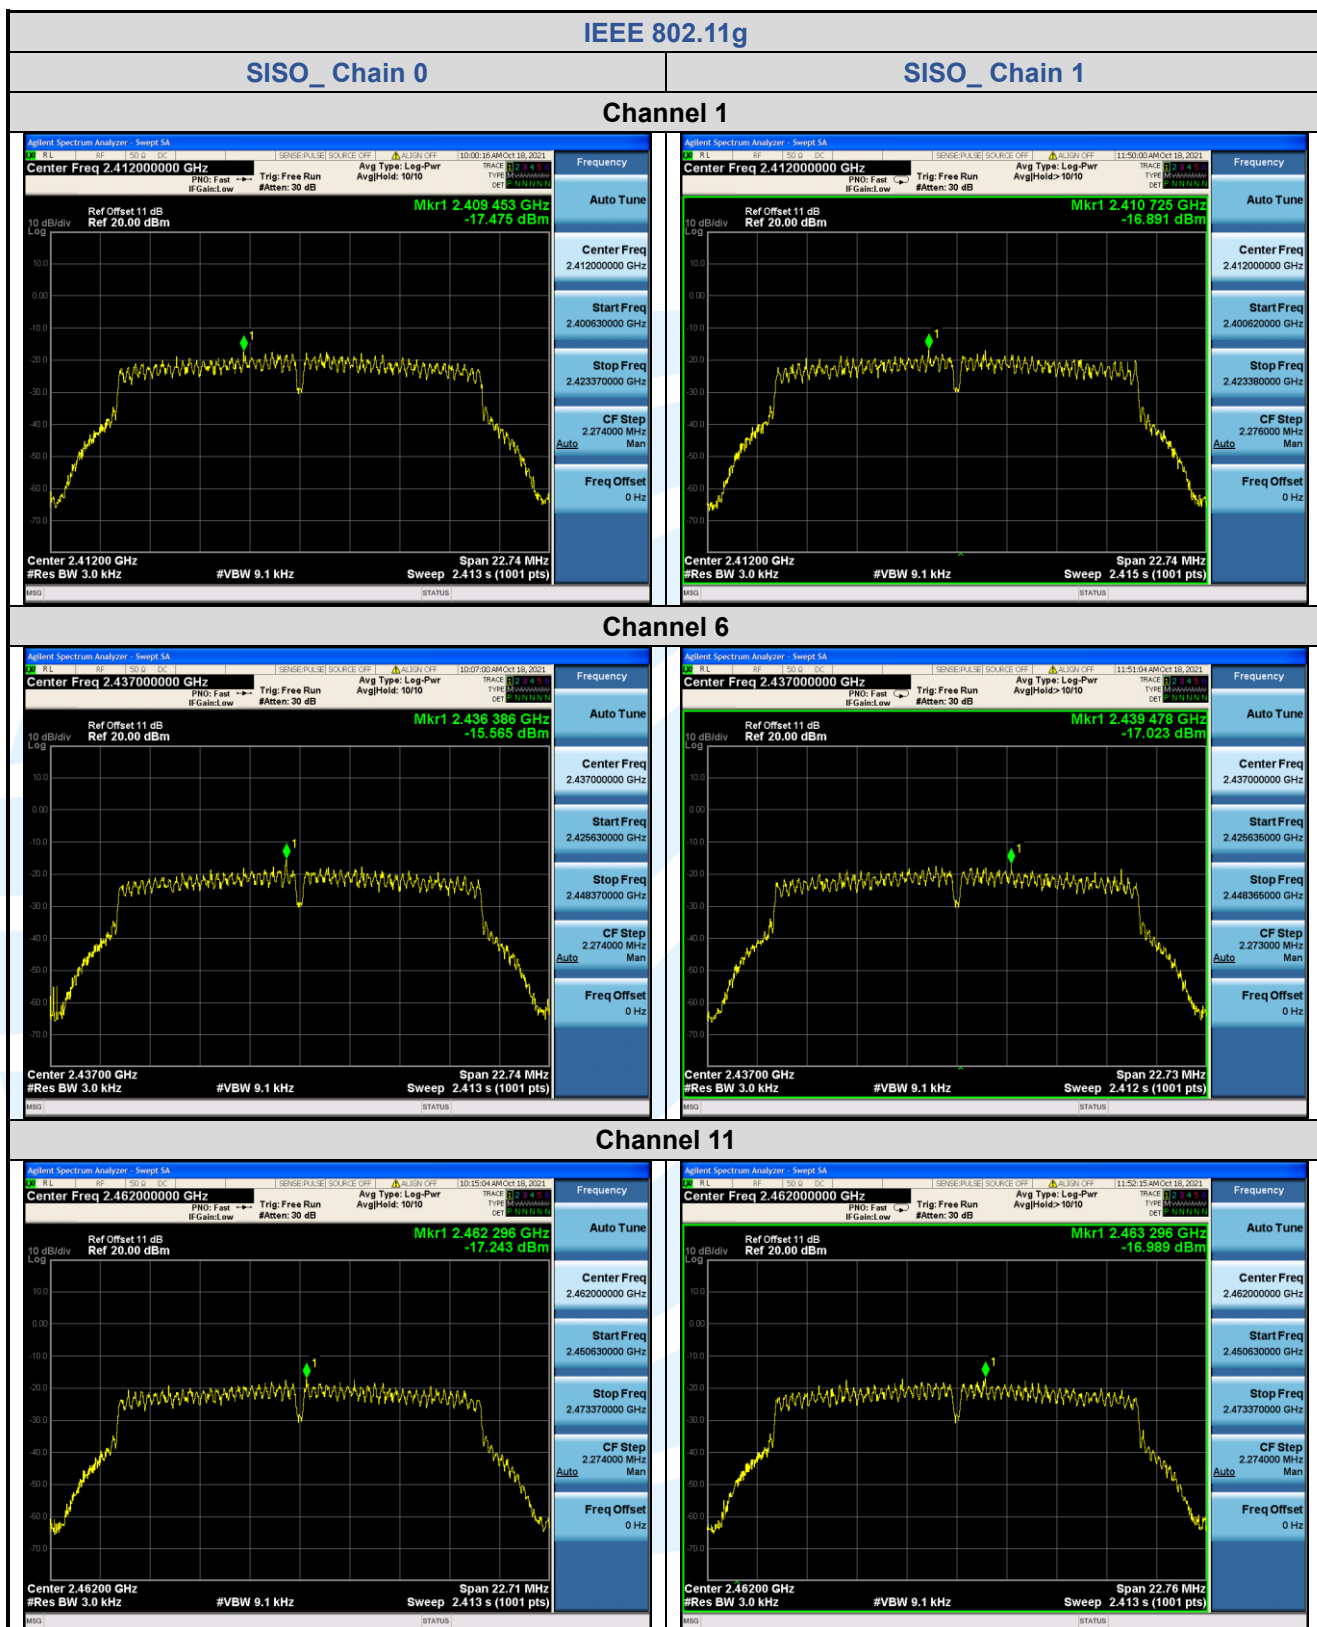

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1