



FCC PART 15B TEST REPORT

No. I22Z60731-EMC01

for

Wingtech Mobile Communications Co.,Ltd.

4G Mobile Phone

Model name: WTCKT01

FCC ID: 2APXW-WTCKT01

with

Hardware Version: V1.1

Software Version: WTCKT01_0.01.12

Issued Date: 2022-06-13

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22Z60731-EMC01	Rev.0	1 st edition	2022-06-13
I22Z60731-EMC01	Rev.1	2 nd edition	2022-07-13

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12

1. Test Laboratory

1.1. Testing Location

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2022-04-24

Testing End Date: 2022-05-06

1.4. Signature




Wang Xue

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Zhang Xia

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Wingtech Group (Hong Kong) Limited
Address: Flat/RM 1802 18/F, Podium Plaza, 5 Hanoi Road, Tsim Sha Tsui, KL, HK
Contact sharui
Email sharui@wingtech.com
Tel. +86-21-53529900
Fax: /

2.2. Manufacturer Information

Company Name: Wingtech Group (Hong Kong) Limited
Address: Flat/RM 1802 18/F, Podium Plaza, 5 Hanoi Road, Tsim Sha Tsui, KL, HK
Contact sharui
Email sharui@wingtech.com
Tel. +86-21-53529900
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	4G Mobile Phone
Model Name	WTCKT01
FCC ID:	2APXW-WTCKT01

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	861024060014006	V1.1	/

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Charger	/	/
AE3	USB Cable	/	/
AE1			
Model	JU001		
Manufacturer	Jiade Energy Technology (Zhuhai) Co.,Ltd.		
Capacity	4000mAh		
Nominal Voltage	3.85V		
AE2			
Model	TPA-46B050100UU		
Manufacturer	SHENZHEN TIANYIN ELECTRONICS CO.,LTD		
Length of cable	/		
AE3			
Model	USB TYPE A to C 2.0 Cable		
Manufacturer	Huizhou Washin Electronics Co.,Ltd		
Length of cable	/		

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1 + AE1 + AE2 + AE3	Charger1 + REAR Camera
Set.2	EUT1 + AE1 + AE2 + AE3	Charger1 + MP4 + WCDMA 850 idle
Set.3	EUT1 + AE1 + AE2	USB + front camera +LTE B5 idle

Note:

Equipment Under Test (EUT) is a model of Smart Phone with integrated antenna.

It supports

UMTS Band FDD Band II(W1900) /FDD Band IV(W1700)/FDD Band V(W850)

LTE Band FDD2/FDD4/FDD5/FDD12/FDD14/FDD30

It has MP3, Camera, USB memory, Bluetooth 5.1, Wi-Fi (802.11a/b/g/n/ac, 802.11n supports 20MHz and 40MHz bandwidth, 802.11ac supports 20MHz, 40MHz and 80MHz bandwidth) ,GPS , Glonass , Gallileo functions.

The device contains receivers which tune and operate between 30MHz-960MHz in the following bands: WCDMA850, LTE Band 5/12/14. All licensed band receivers that tune in the range of 30MHz-960MHz are investigated. Only the worst-case emissions are reported.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2019
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3m distance
Site voltage standing-wave ratio (<i>S</i> _{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(huayuan North Road)

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESW44	103023	R&S	2022-10-28	1 Year
2	LISN	ENV216	101200	R&S	2022-06-29	1 year
3	Universal Radio Communication Tester	CMW500	116588	R&S	2022-12-20	1 year
4	Test Receiver	ESCI 7	100344	R&S	2023-03-21	1 Year
5	EMI Antenna	VULB 9163	302	SCHWARZBECK	2022-12-28	1 year
6	EMI Antenna	3115	00167250	ETS-Lindgren	2022-07-01	1 year

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

The model of the PC is M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note : I/O information : Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit (μ V/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{RPL} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{RPL} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): $U = 5.54 \text{ dB}$, $k=2$.

Measurement results for Set.1:

Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17988.440	40.00	-29.06	46.66	22.40	54.00	14.00	V
17968.380	39.70	-29.06	46.66	22.10	54.00	14.30	V
17984.700	39.40	-29.06	46.66	21.80	54.00	14.60	H
17974.840	39.40	-29.06	46.66	21.80	54.00	14.60	V
17991.500	39.30	-29.06	46.66	21.70	54.00	14.70	H
17961.240	39.30	-29.06	46.66	21.70	54.00	14.70	H

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17990.820	51.50	-29.06	46.66	33.90	74.00	22.50	V
17896.640	51.10	-29.53	45.95	34.68	74.00	22.90	V
17364.200	50.90	-29.97	43.36	37.51	74.00	23.10	H
17976.200	50.80	-29.06	46.66	33.20	74.00	23.20	V
17974.840	50.70	-29.06	46.66	33.10	74.00	23.30	H
17780.360	50.60	-29.89	45.95	34.53	74.00	23.40	V

Measurement results for Set.2:
Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17789.880	39.50	-29.89	45.95	23.43	54.00	14.50	V
17971.440	39.40	-29.06	46.66	21.80	54.00	14.60	V
17976.880	39.40	-29.06	46.66	21.80	54.00	14.60	V
17952.060	39.40	-28.94	46.66	21.68	54.00	14.60	V
17977.900	39.30	-29.06	46.66	21.70	54.00	14.70	H
17985.720	39.30	-29.06	46.66	21.70	54.00	14.70	H

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17969.400	52.20	-29.06	46.66	34.60	74.00	21.80	H
17868.420	51.60	-29.39	45.95	35.04	74.00	22.40	H
17211.200	51.10	-29.49	42.36	38.23	74.00	22.90	V
17874.540	50.80	-29.39	45.95	34.24	74.00	23.20	H
17882.020	50.70	-29.53	45.95	34.28	74.00	23.30	V
17960.220	50.70	-29.06	46.66	33.10	74.00	23.30	V

Measurement results for Set.3:
USB Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17771.520	39.30	-29.63	45.95	22.97	54.00	14.70	H
17933.700	39.20	-29.40	46.66	21.94	54.00	14.80	V
17993.540	39.20	-29.06	46.66	21.60	54.00	14.80	V
17755.200	39.20	-29.61	45.95	22.86	54.00	14.80	H
17952.400	39.10	-28.94	46.66	21.38	54.00	14.90	V
17943.900	39.10	-28.94	46.66	21.38	54.00	14.90	H

USB Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17371.340	51.00	-29.97	43.36	37.61	74.00	23.00	V
17380.860	50.70	-29.83	43.36	37.17	74.00	23.30	V
17722.220	50.70	-29.67	45.25	35.12	74.00	23.30	V
17967.020	50.50	-29.06	46.66	32.90	74.00	23.50	V
17445.800	50.50	-29.87	44.35	36.02	74.00	23.50	V
17957.160	50.30	-28.94	46.66	32.58	74.00	23.70	H

Measurement results for Set.1:

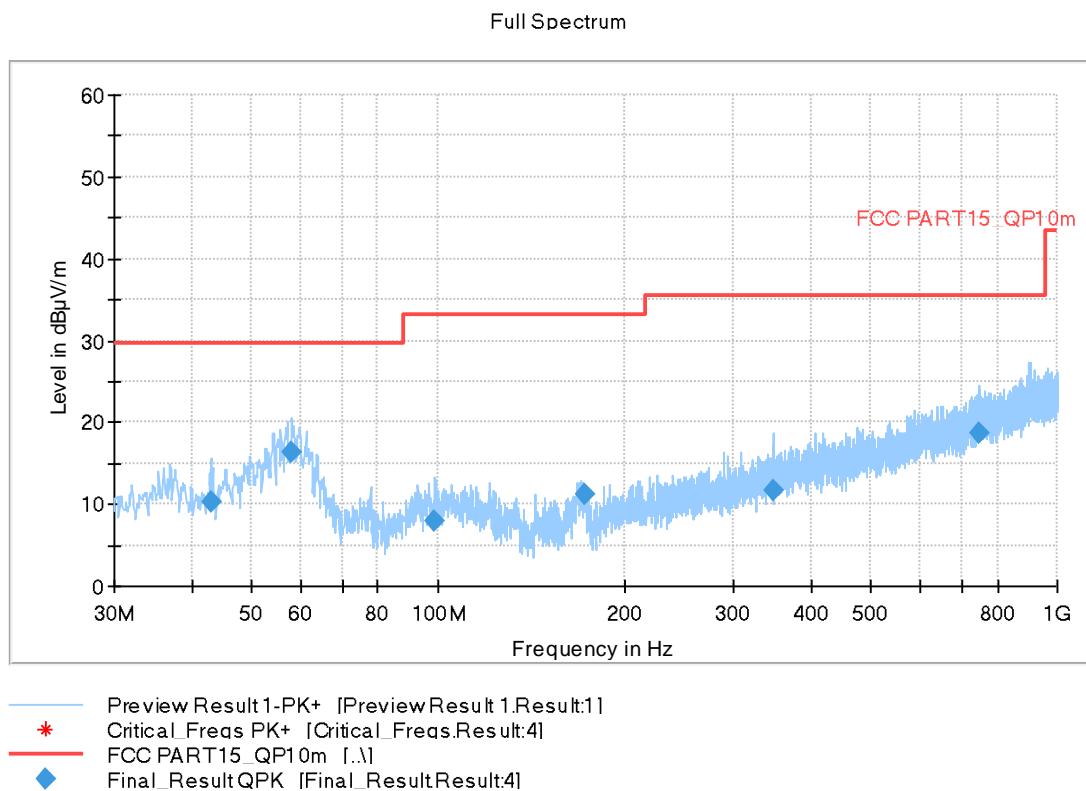


Fig A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
42.998000	10.23	29.54	19.31	2000.0	120.000	125.0	V	111
58.033000	16.29	29.54	13.25	2000.0	120.000	100.0	V	171
98.967000	7.98	33.06	25.08	2000.0	120.000	175.0	H	23
172.202000	11.12	33.06	21.94	2000.0	120.000	109.0	V	-12
347.093000	11.77	35.56	23.79	2000.0	120.000	175.0	H	192
747.315000	18.72	35.56	16.84	2000.0	120.000	125.0	V	164

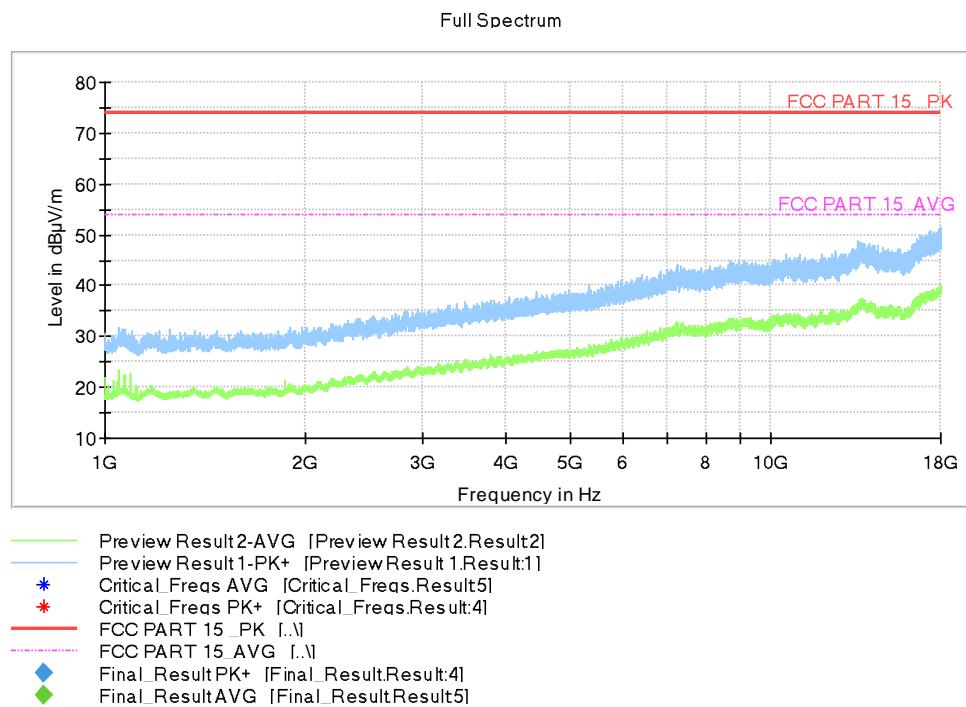
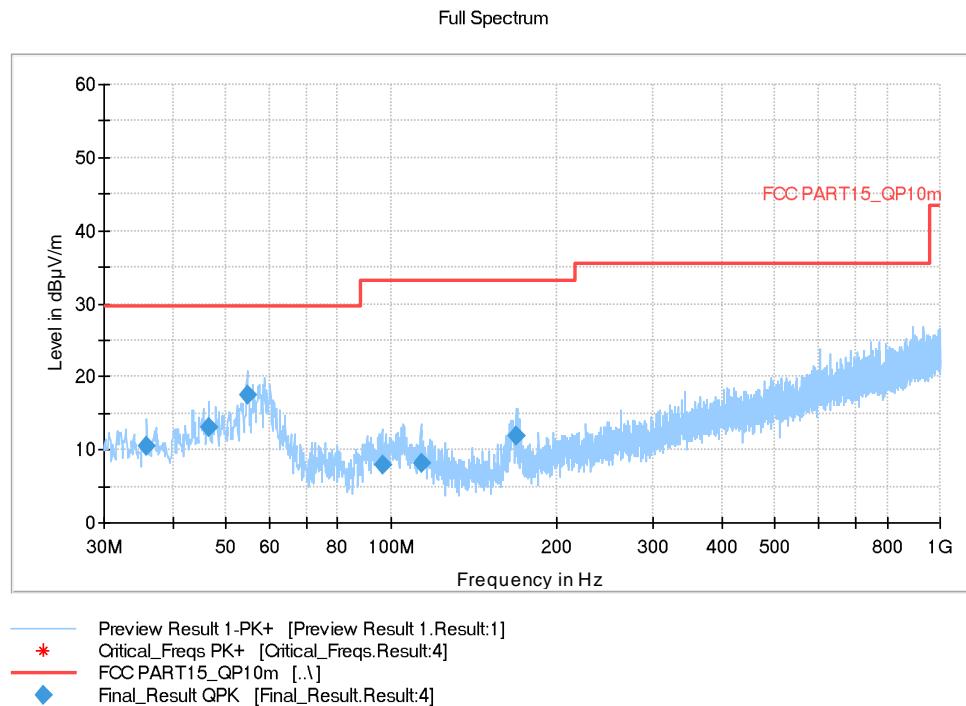


Fig A.2 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.2:

Fig A.3 Radiated Emission from 30MHz to 1GHz
Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
35.917000	10.51	29.54	19.03	2000.0	120.000	125.0	V	246
46.587000	13.09	29.54	16.45	2000.0	120.000	125.0	V	21
54.735000	17.47	29.54	12.07	2000.0	120.000	98.0	V	-12
96.251000	7.96	33.06	25.10	2000.0	120.000	286.0	V	163
113.323000	8.23	33.06	24.83	2000.0	120.000	175.0	V	83
169.486000	11.80	33.06	21.26	2000.0	120.000	175.0	V	155

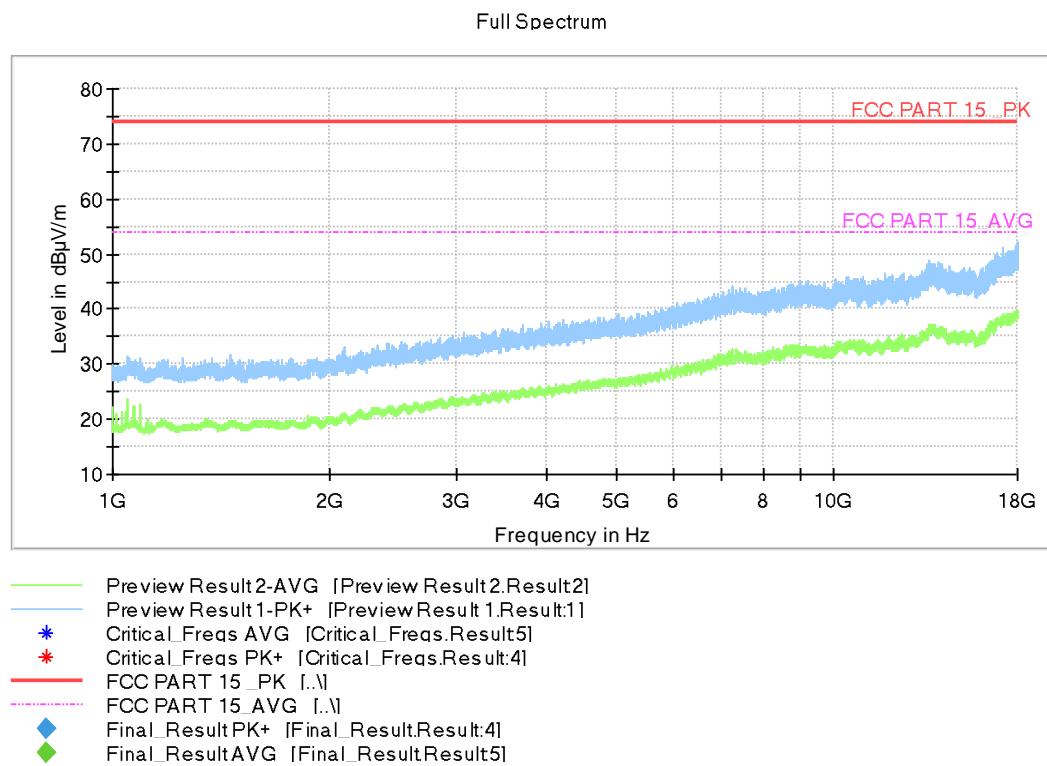
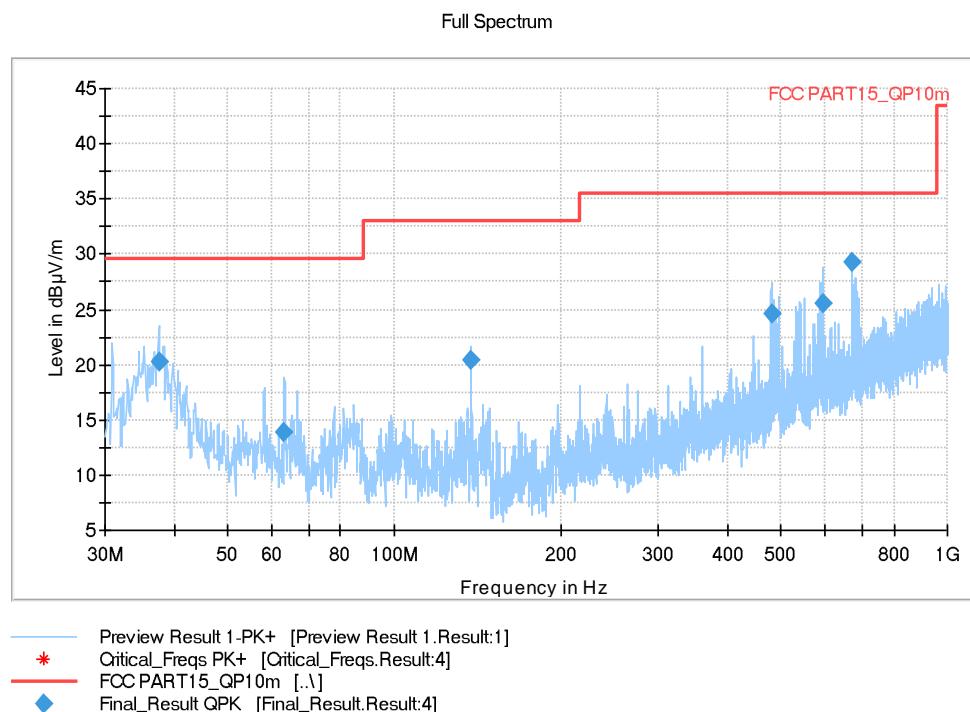


Fig A.4 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.3:

Fig A.5 Radiated Emission from 30MHz to 1GHz
Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
37.566000	20.30	29.54	9.24	2000.0	120.000	125.0	V	4
63.271000	13.91	29.54	15.63	2000.0	120.000	98.0	V	247
137.767000	20.46	33.06	12.60	2000.0	120.000	275.0	H	282
480.565000	24.56	35.56	11.00	2000.0	120.000	275.0	V	-23
595.025000	25.59	35.56	9.97	2000.0	120.000	225.0	V	19
673.110000	29.24	35.56	6.32	2000.0	120.000	175.0	V	-10

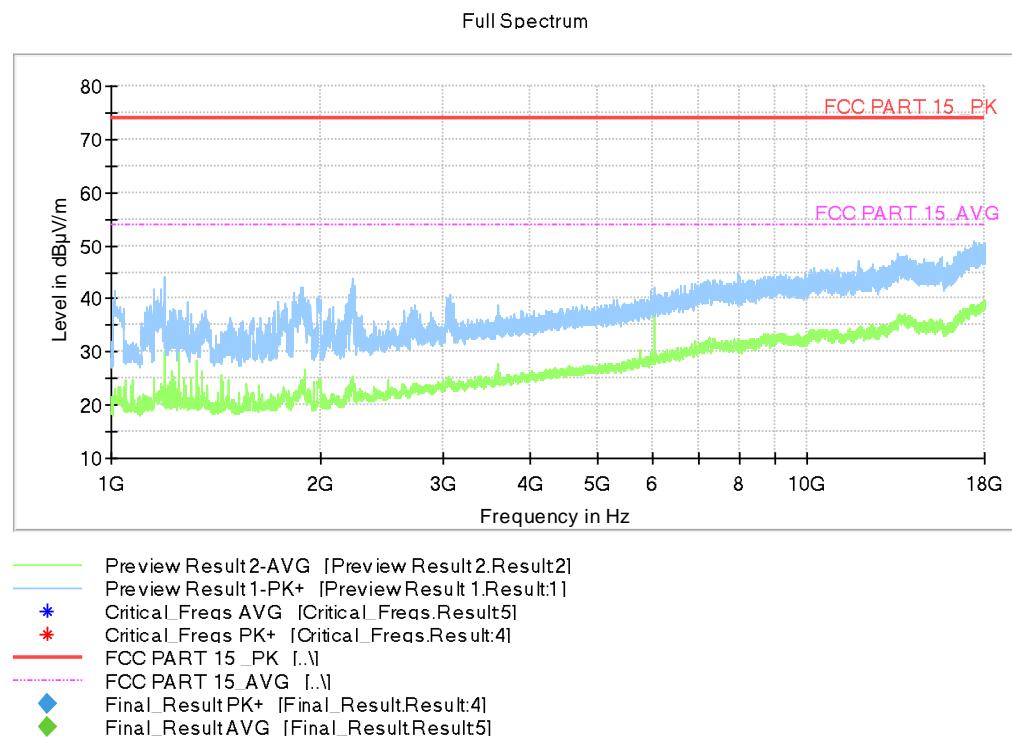


Fig A.6 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note : I/O information : Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U = 3.1 \text{ dB}$, $k=2$.

Charging Mode, Set.1:

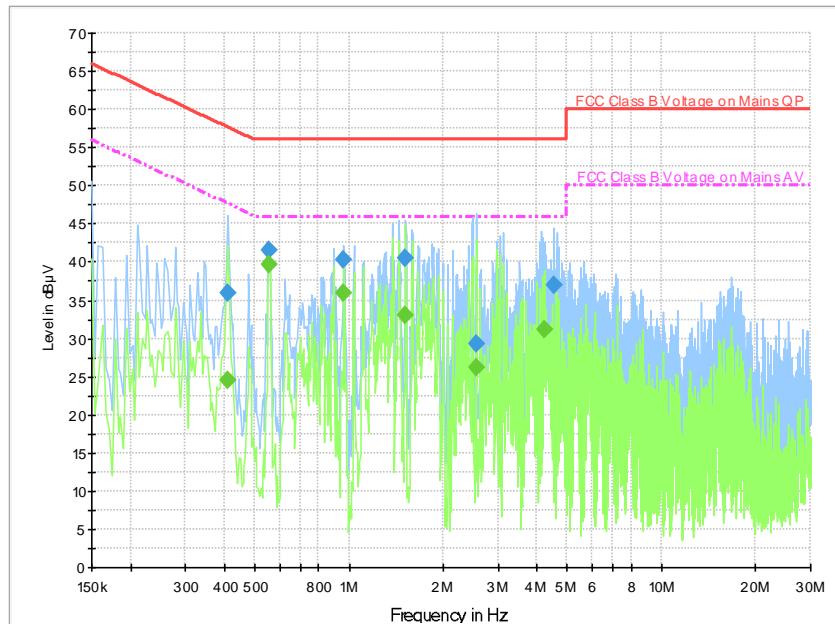


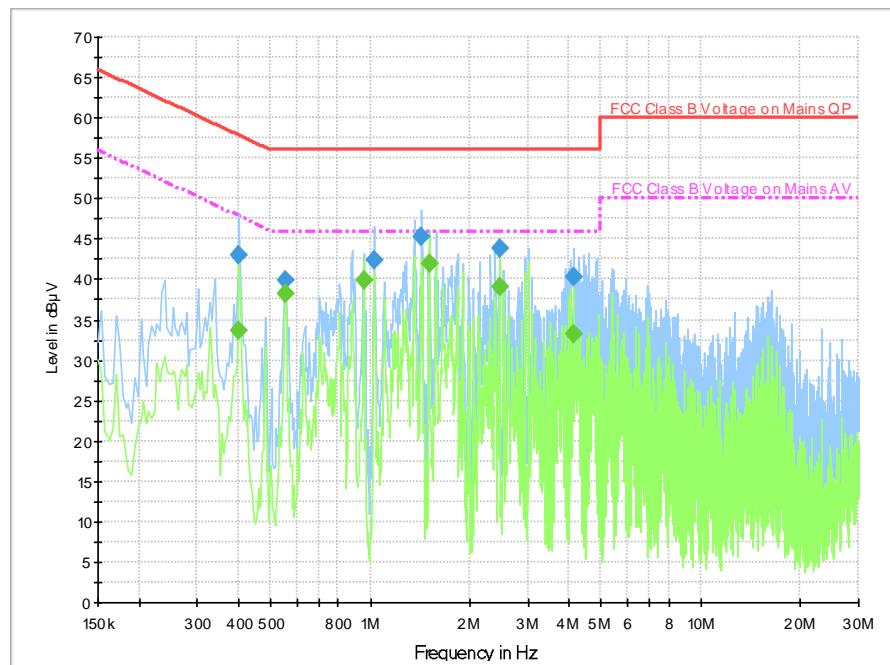
Fig A.7 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.410000	36.0	5000.0	9.000	On	N	19.8	21.7	57.6	
0.554000	41.5	5000.0	9.000	On	L1	19.7	14.5	56.0	
0.962000	40.2	5000.0	9.000	On	L1	19.7	15.8	56.0	
1.518000	40.5	5000.0	9.000	On	L1	19.7	15.5	56.0	
2.558000	29.3	5000.0	9.000	On	N	19.6	26.7	56.0	
4.538000	37.0	5000.0	9.000	On	L1	19.5	19.0	56.0	

Final Result 2

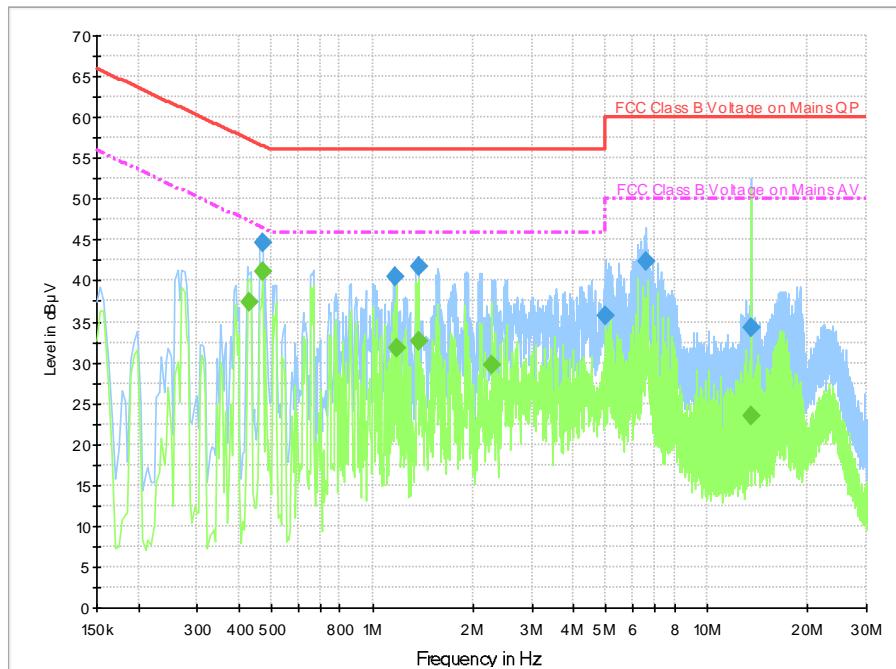
Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.410000	24.4	5000.0	9.000	On	N	19.8	23.2	47.6	
0.554000	39.6	5000.0	9.000	On	L1	19.7	6.4	46.0	
0.962000	35.9	5000.0	9.000	On	L1	19.7	10.1	46.0	
1.518000	33.1	5000.0	9.000	On	L1	19.7	12.9	46.0	
2.554000	26.1	5000.0	9.000	On	L1	19.6	19.9	46.0	
4.222000	31.2	5000.0	9.000	On	L1	19.6	14.8	46.0	

Charging Mode, Set.2:

Fig A.8 Conducted Emission from 150kHz to 30MHz
Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.402000	43.0	5000.0	9.000	On	N	19.8	14.8	57.8	
0.554000	39.8	5000.0	9.000	On	L1	19.7	16.2	56.0	
1.030000	42.3	5000.0	9.000	On	N	19.6	13.7	56.0	
1.434000	45.4	5000.0	9.000	On	N	19.6	10.6	56.0	
2.458000	43.9	5000.0	9.000	On	L1	19.6	12.1	56.0	
4.106000	40.3	5000.0	9.000	On	L1	19.6	15.7	56.0	

Final Result 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.402000	33.8	5000.0	9.000	On	N	19.8	14.1	47.8	
0.554000	38.2	5000.0	9.000	On	L1	19.7	7.8	46.0	
0.954000	39.9	5000.0	9.000	On	L1	19.7	6.1	46.0	
1.506000	42.0	5000.0	9.000	On	L1	19.7	4.0	46.0	
2.458000	39.1	5000.0	9.000	On	L1	19.6	6.9	46.0	
4.122000	33.2	5000.0	9.000	On	L1	19.6	12.8	46.0	

USB Mode, Set.3:

Fig A.9 Conducted Emission from 150kHz to 30MHz
Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.470000	44.6	5000.0	9.000	On	L1	19.8	11.9	56.5	
1.166000	40.5	5000.0	9.000	On	L1	19.8	15.5	56.0	
1.378000	41.8	5000.0	9.000	On	L1	19.7	14.2	56.0	
4.962000	35.7	5000.0	9.000	On	N	19.6	20.3	56.0	
6.594000	42.4	5000.0	9.000	On	L1	19.7	17.6	60.0	
13.562000	34.2	5000.0	9.000	On	L1	19.6	25.8	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.430000	37.3	5000.0	9.000	On	L1	19.8	9.9	47.3	
0.470000	41.1	5000.0	9.000	On	L1	19.8	5.4	46.5	
1.178000	31.8	5000.0	9.000	On	N	19.6	14.2	46.0	
1.378000	32.5	5000.0	9.000	On	L1	19.7	13.5	46.0	
2.278000	29.7	5000.0	9.000	On	L1	19.6	16.3	46.0	
13.558000	23.4	5000.0	9.000	On	L1	19.6	26.6	50.0	

*****END OF REPORT*****