




1. REFER TO DOCUMENT V30745 FOR MANUFACTURER OF THE PART.
2. MATERIAL – HIGH TEMPERATURE POLYESTER (WHITE, MATTE)
3. TEMPERATURE RANGE:

MINIMUM TEMP	-40°C	-40°F
MAXIMUM TEMP	204°C	400°F
4. ADHESIVE TYPE: ACRYLIC
TEMPERATURE RANGE:

MINIMUM APPLY	10°C	50°F
MAXIMUM APPLY	60°C	140°F
5. TOTAL LABEL THICKNESS = .0072[.18]
6. SHELF LIFE: SIX (6) MONTHS AT 70°F (21°C) AND 50% R.H.
7. SEE CHART FOR CORRECT CUSTOMER PART NUMBER AND ADD TO LABEL IN AREA INDICATED.
8. CHARACTER HEIGHT OF THE "TOYOTA" AND THE TOYOTA PART NUMBER SHALL BE .050 [1.27].

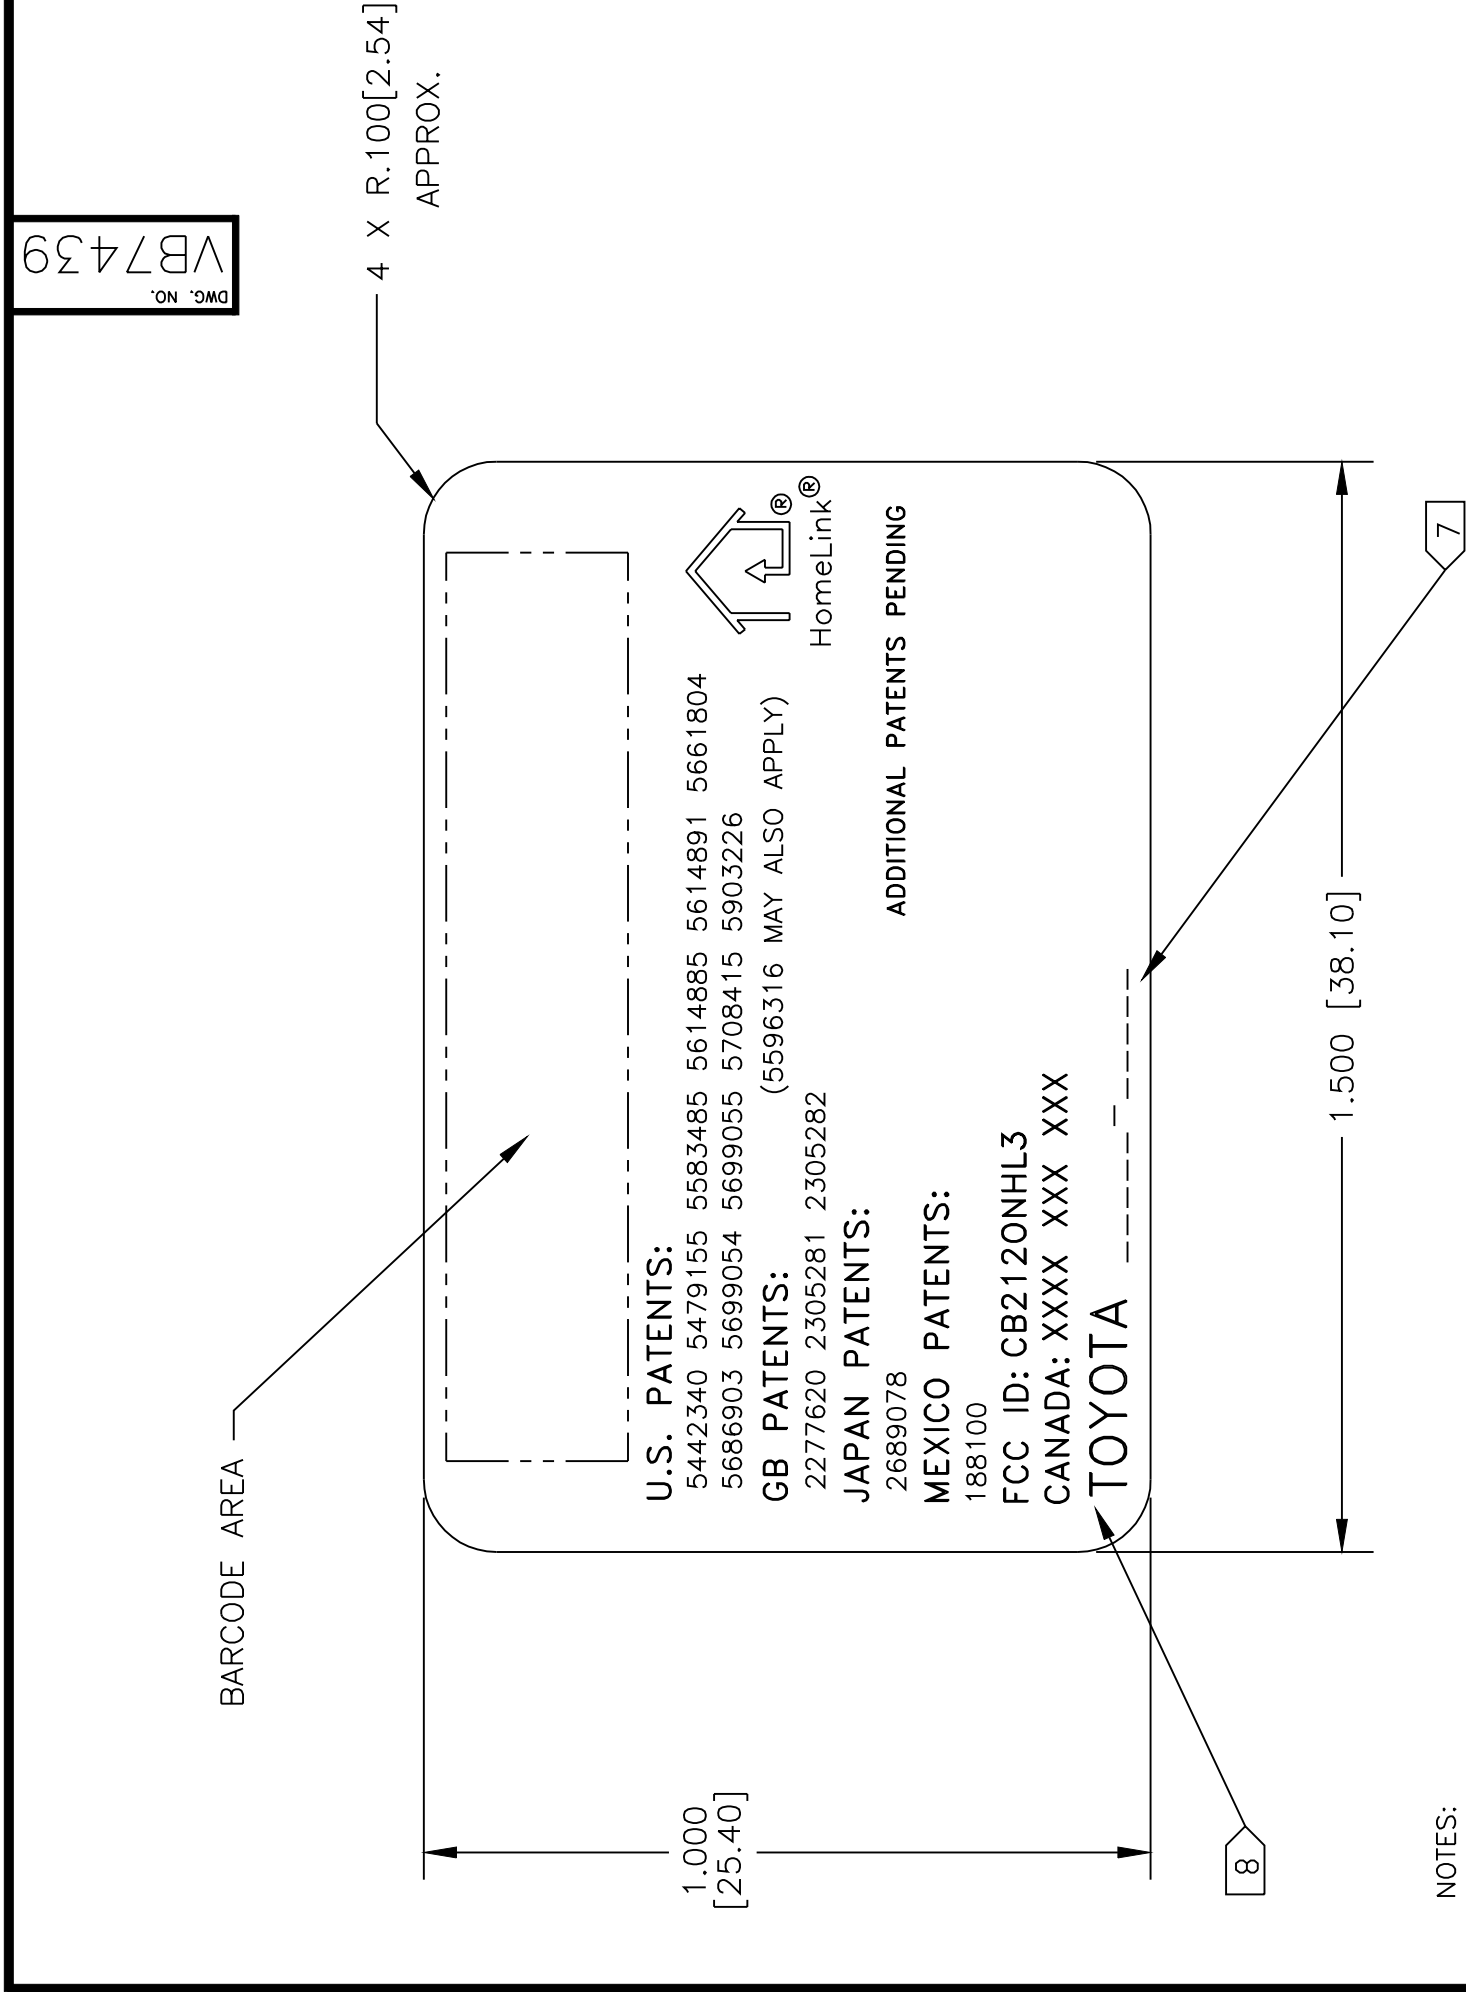