

FCC RADIO TEST REPORT

Applicant..... : FN-LINK TECHNOLOGY LIMITED

Address..... : No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha,
Hunan China

Manufacturer..... : FN-LINK TECHNOLOGY LIMITED

Address..... : No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha,
Hunan China

Factory..... : FN-LINK TECHNOLOGY LIMITED

Address..... : No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha,
Hunan China

Product Name..... : WIFI+BT Module

Brand Name..... : FN-LINK

Model No. : 6252B-SR

FCC ID..... : 2AATL-6252B-SR


Measurement Standard..... : 47 CFR FCC Part 15, Subpart C (Section 15.247)

Receipt Date of Samples.... : April 11, 2022

Date of Tested..... : April 11, 2022 to May 05, 2022

Date of Report..... : May 12, 2022

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.



Prepared by

Alina Guo / Project Engineer



Approved by

Lori Fan / Authorized Signatory

Table of Contents

1. Summary of Test Result	4
2. General Description of EUT	5
3. Test Channels and Modes Detail	8
4. Configuration of EUT	8
5. Modification of EUT	8
6. Description of Support Device	9
7. Test Facility and Location	11
8. Applicable Standards and References	11
9. Deviations and Abnormalities from Standard Conditions	12
10. Test Conditions	12
11. Measurement Uncertainty	13
12. Sample Calculations	14
13. Test Items and Results	15
13.1 Conducted Emissions Measurement	15
13.2 Maximum Conducted Output Power Measurement	19
13.3 6dB Bandwidth Measurement	22
13.4 Power Spectral Density Measurement	27
13.5 Band Edge and Conducted Spurious Emissions Measurement	34
13.6 Radiated Spurious Emissions and Restricted Bands Measurement	43
13.7 Antenna Requirement	50
14. Test Equipment List	51

Revision History

[illegible]

1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§15.207 (a)	AC Power Conducted Emission	PASS	---
§15.247(b)(3)	Maximum Conducted Output Power	PASS	---
§15.247(a)(2)	6dB Bandwidth	PASS	---
§15.247(e)	Power Spectral Density	PASS	---
§15.247(d)	Band Edge and Conducted Spurious Emissions	PASS	---
§15.247(d), §15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	PASS	---
§15.203	Antenna Requirement	PASS	---

2. General Description of EUT

Product Information	
Product name:	WIFI+BT Module
Main Model Name:	6252B-SR
Additional Model Name:	N/A
Model Difference:	N/A
S/N:	2204-1408
Brand Name	FN-LINK
Hardware version:	Not stated
Software version:	Not stated
Rating:	DC 3.3V
Classification:	Class B
Typical arrangement:	Table-top
I/O Port:	N/A
Accessories Information	
Adapter:	N/A
Cable:	N/A
Other:	N/A
Additional Information	
Note:	N/A
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

Technical Specification	
Frequency Range:	2412-2462MHz for IEEE 802.11b/g/n(HT20)/ ac(VHT20)/ ax(HE20) 2422-2452MHz for IEEE 802.11n(HT40/ ac(VHT40))/ ax(HE40) ac(VHT20,VHT40) are within 802.11n mode.
Modulation Technology:	DSSS, OFDM
Modulation Type:	CCK, DQPSK, DBPSK, 64-QAM, 16-QAM, QPSK, BPSK, 256QAM
Number of Channel:	11 for IEEE 802.11b/g/n(HT20/ ac(VHT20))/ ax(HE20) 7 for IEEE 802.11n(HT40)/ ac(VHT40)/ ax(HE40)
Channel Space:	5MHz
Antenna Type:	Diople antenna*2
Antenna Gain:	See Antenna Information

Antenna Information

Ant. (Chain)	Brand	Model name	Antenna Type	Connector	Gain (dBi)	Application range
1,2	FN-LINK	K212-10037-A	Monopole	RP-SMA(M)	2.98	2.4G Band
					3.59	U-NII-1 Band
					3.79	U-NII-2A Band
					4.56	U-NII-2C Band
					5.85	U-NII-3 Band

Note: 2.4G Antenna Directional gain = 2.98 dBi +10 log(2)=5.99dBi


Channel List			
IEEE 802.11b/ g/ n(HT20)/ ac(VHT20)/ ax(HE20)		IEEE 802.11n(HT40)/ ac(VHT40)/ ax(HE40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	---	---
2	2417	---	---
3	2422	3	2422
4	2427	4	2427
5	2432	5	2432
6	2437	6	2437
7	2442	7	2442
8	2447	8	2447
9	2452	9	2452
10	2457	----	----
11	2462	----	----

3. Test Channels and Modes Detail

Mode		Channel	Frequency (MHz)	Remark
1	TX	1	2412	IEEE 802.11b/ g/ n(HT20)/ ac(VHT20)/ ax(HE20)
		3	2422	IEEE 802.11n(HT40) / ac(VHT40)/ ax(HE40)
		6	2437	IEEE 802.11b/ g/ n(HT20)/ n(HT40) / ac(VHT40)/ ax(HE40)
		9	2452	IEEE 802.11n(HT40) / ac(VHT40)/ ax(HE40)
		11	2462	IEEE 802.11b/ g/ n(HT20) / ac(VHT20)/ / ax(HE20)
2.	Normal Mode	---	---	---

Note: TX mode means that the EUT was programmed to be in continuously transmitting mode.

4. Configuration of EUT

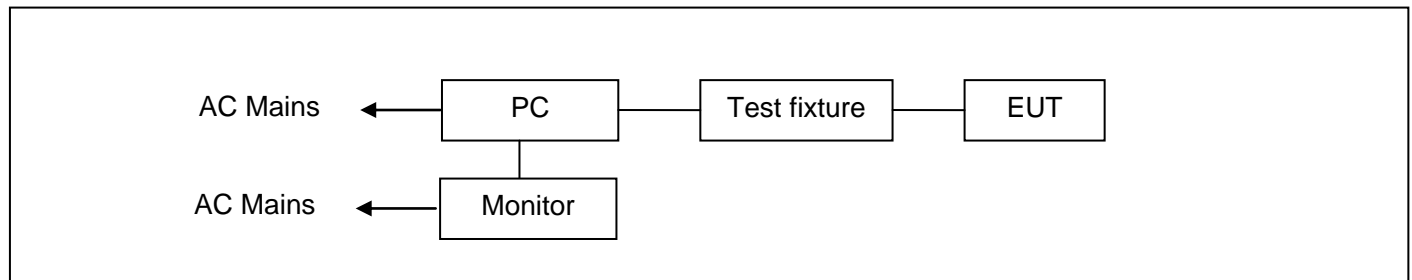

5. Modification of EUT

No modifications are made to the EUT during all test items.

6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
1.	Assemble Computer	---	---	---	CPU: Intel Core Processors i5-10400 @ 4.3GHz Mother board: ASUS PRIME B460-PLUS Display: NVIDIA 1050TI (1290MHz) Memory: Netac DDR4 3200MHz 8GB HDD: ST1000DM010 PC Power: CoolerMaster MPW-5001-ACABW-CN Power Cord: 1.8m Unshielded	---
2.	Monitor	DELL	S2240Tb	CN-0FP 53P-74 261-3A L-0CYU	Adapter: Manufacturer: CWT M/N: KPL-050F-VI I/P: AC100-240V50/60Hz, 1.7A O/P: 12V4.17A 50W AC Line: 1.15m unshielded DC Line: 1.21m unshielded with a core	---
3.	Test fixture	---	---	---	---	Provided by manufacturer
4.	Monitor	AOC	E960SN	AMHE3 9A0014 21P9	Power Cord: 1.8m Unshielded, with core	---
5.	Monitor	Dell	U2718Q	CN-05D WRH-	Power Cord: 1.8m Unshielded, with core	---
6.	Keyboard	DELL	KB216d	---	USB Line: 1.21m unshielded	---
7.	Mouse	DELL	MS116p	---	USB Line: 1.21m unshielded	---

Software	Power Setting		
AX Series MP Toolkit	IEEE 802.11b	Ant_1 13	Ant_2 13
	IEEE 802.11g	13	13
	IEEE 802.11n(HT20)	11	11
	IEEE 802.11n(HT40)	11	11
	IEEE 802.11ac(VHT20)	10	10
	IEEE 802.11 ac(VHT40)	10	10
	IEEE 802.11ax(HE20)	7	7
	IEEE 802.11ax(HE40)	8	8

7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	<p>The Laboratory has been assessed and proved to be in compliance with CNAS/CL01</p> <p>Listed by CNAS, August 13, 2018</p> <p>The Certificate Registration Number is L5795.</p> <p>The Certificate is valid until August 13, 2024</p> <p>The Laboratory has been assessed and proved to be in compliance with ISO17025</p> <p>Listed by A2LA, November 01, 2017</p> <p>The Certificate Registration Number is 4429.01</p> <p>Listed by FCC, November 06, 2017</p> <p>Test Firm Registration Number is 907417</p> <p>Listed by Industry Canada, June 08, 2017</p> <p>The Certificate Registration Number is 46405-9743A</p>
Test Site Location	:	Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China

8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Test Standards:

47 CFR Part 15, Subpart C, 15.247

ANSI C63.10-2013

References Test Guidance:

DTS KDB 558074 D01 15.247 Meas Guidance v05r02

9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

10. Test Conditions

No.	Test Item	Test Mode	Test Voltage	Tested by	Remarks
1.	AC Power Conducted Emission	2	AC 120V/60Hz	Sean	See note 1
2.	Max. Conducted Output Power	1	DC 3.3V	Sean	See note 1
3.	6dB Bandwidth	1	DC 3.3V	Sean	See note 1
4.	Power Spectral Density	1	DC 3.3V	Sean	See note 1
5.	Band Edge and Conducted Spurious Emissions	1	DC 3.3V	Sean	See note 1
6.	Radiated Spurious Emissions and Restricted Bands	1, 2	DC 3.3V	Sean	See note 1,3
7.	Antenna Requirement	---	---	---	See note 1

Note:

1. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35℃, 30~70%, 86~106kPa.
2. AC 120V 60Hz is come from the PC.

11. Measurement Uncertainty

No.	Test Item	Frequency	Uncertainty	Remarks
1.	Conducted Emission	150KHz ~ 30MHz	± 2.52 dB	---
2.	Radiated Emission Test	9KHz ~ 30MHz	± 2.60 dB	---
		30MHz ~ 1GHz	± 4.68 dB	---
		1GHz ~ 18GHz	± 5.14 dB	---
		18GHz ~ 40GHz	± 5.14 dB	---
3.	RF Conducted Test	10Hz ~ 40GHz	± 1.06 dB	---

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.
2. The measurement uncertainty levels above are estimated and calculated according to CISPR 16-4-2.
3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

12. Sample Calculations

Conducted Emission						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.1900	30.10	10.60	40.70	79.00	-38.30	QP
<p>Where,</p> <p>Freq. = Emission frequency in MHz</p> <p>Reading Level = Spectrum Analyzer/Receiver Reading</p> <p>Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation</p> <p>Measurement = Reading + Corrector Factor</p> <p>Limit = Limit stated in standard</p> <p>Margin = Measurement - Limit</p> <p>Detector = Reading for Quasi-Peak / Average / Peak</p>						

Radiated Spurious Emissions and Restricted Bands						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
60.0700	45.88	-18.38	27.50	49.00	-21.50	QP
<p>Where,</p> <p>Freq. = Emission frequency in MHz</p> <p>Reading Level = Spectrum Analyzer/Receiver Reading</p> <p>Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier</p> <p>Measurement = Reading + Corrector Factor</p> <p>Limit = Limit stated in standard</p> <p>Over = Margin, which calculated by Measurement - Limit</p> <p>Detector = Reading for Quasi-Peak / Average / Peak</p>						

Note: For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

13. Test Items and Results

13.1 Conducted Emissions Measurement


LIMITS

According to the requirements of FCC PART 15.207, the limits are as follows:

Frequency (MHz)	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

- Note:
1. If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.
 2. The lower limit shall apply at the transition frequencies.
 3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

BLOCK DIAGRAM OF TEST SETUP

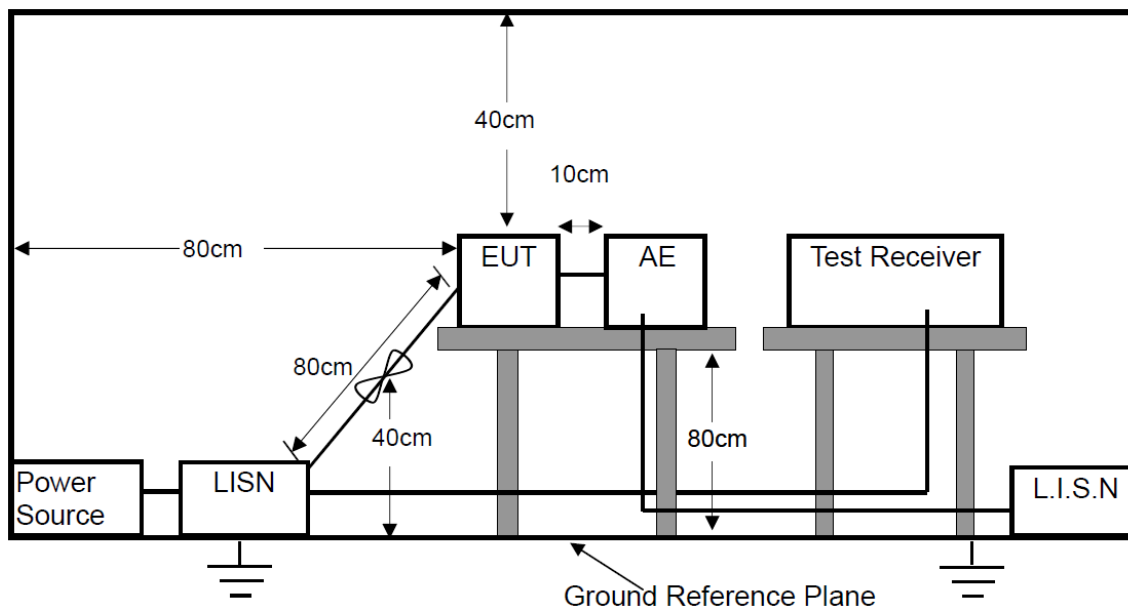

TEST PROCEDURES

- a. The EUT was placed on a wooden table 0.8m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. All I/O cables and support devices were positioned as per ANSI C63.10.
- c. Connect mains power port of the EUT to a line impedance stabilization network (LISN).
- d. Connect all support devices to the other LISN and AAN, if needed.
- e. Scan the frequency range from 150KHz to 30MHz at both sides of AC line for maximum conducted interference checking and record the test data.

TEST RESULTS

PASS

Please refer to the following pages.

M/N: 6252B-SR

Testing Voltage: AC 120V/60Hz

Phase: L1


Detector: QP & AVG

Test Mode: 2

Conducted Emission Measurement

Date: 2022/4/22

Time: 18:28:06

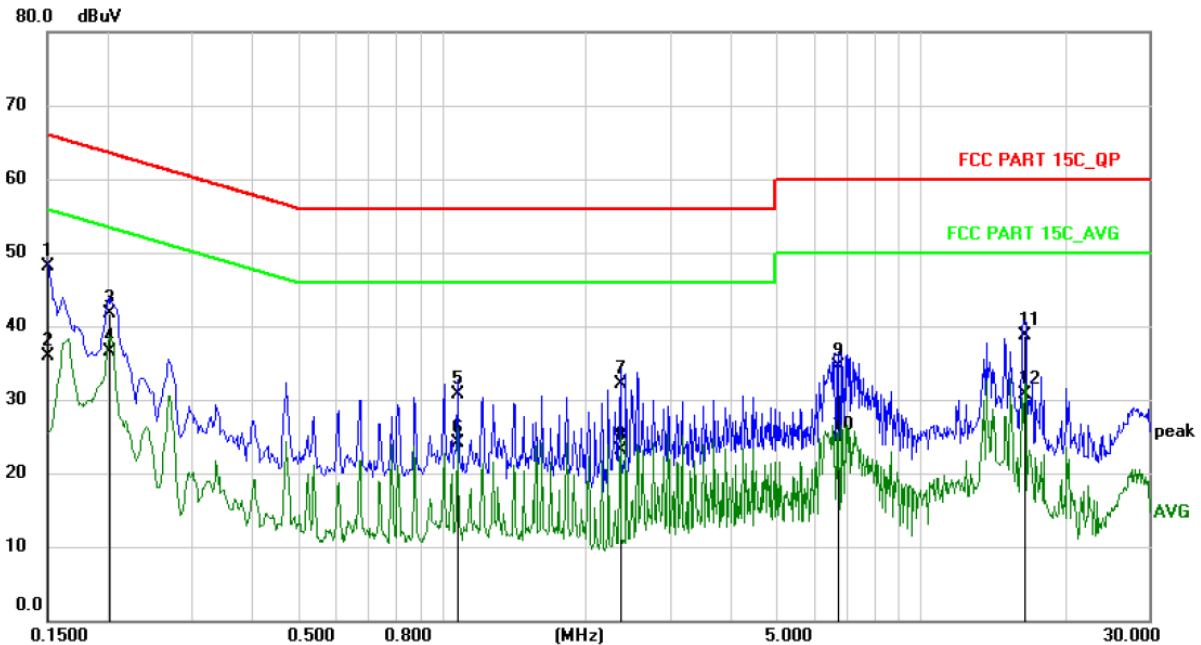


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1500	37.30	10.80	48.10	66.00	-17.90	QP	
2	0.1500	25.20	10.80	36.00	56.00	-20.00	AVG	
3	0.2017	31.00	10.80	41.80	63.54	-21.74	QP	
4 *	0.2017	25.70	10.80	36.50	53.54	-17.04	AVG	
5	1.0766	20.00	10.80	30.80	56.00	-25.20	QP	
6	1.0766	13.40	10.80	24.20	46.00	-21.80	AVG	
7	2.3584	21.30	10.80	32.10	56.00	-23.90	QP	
8	2.3584	12.30	10.80	23.10	46.00	-22.90	AVG	
9	6.7333	23.70	10.80	34.50	60.00	-25.50	QP	
10	6.7333	13.70	10.80	24.50	50.00	-25.50	AVG	
11	16.4856	28.00	10.80	38.80	60.00	-21.20	QP	
12	16.4856	20.00	10.80	30.80	50.00	-19.20	AVG	

M/N: 6252B-SR	Testing Voltage: AC 120V/60Hz
Phase: N	Detector: QP & AVG
Test Mode: 2	

Conducted Emission Measurement

Date: 2022/4/22

Time: 18:33:06

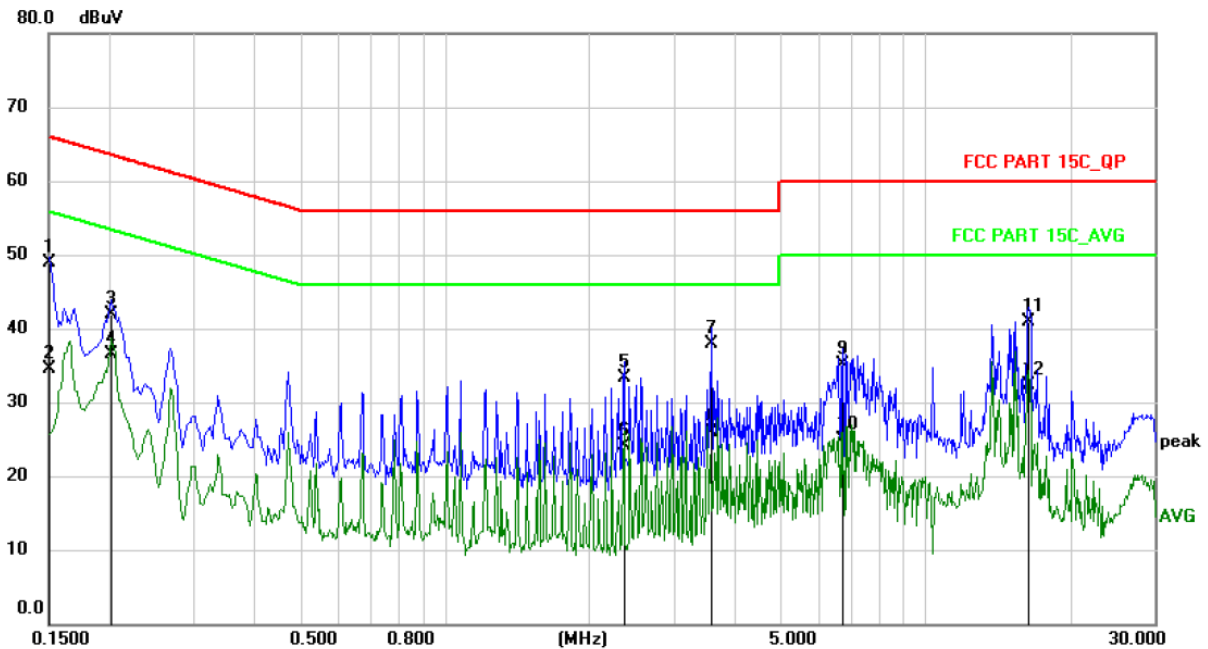

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1500	38.20	10.80	49.00	66.00	-17.00	QP	
2	0.1500	23.80	10.80	34.60	56.00	-21.40	AVG	
3	0.2017	31.10	10.80	41.90	63.54	-21.64	QP	
4 *	0.2017	25.80	10.80	36.60	53.54	-16.94	AVG	
5	2.3584	22.60	10.80	33.40	56.00	-22.60	QP	
6	2.3584	13.40	10.80	24.20	46.00	-21.80	AVG	
7	3.5843	27.20	10.80	38.00	56.00	-18.00	QP	
8	3.5843	15.10	10.80	25.90	46.00	-20.10	AVG	
9	6.7333	24.40	10.80	35.20	60.00	-24.80	QP	
10	6.7333	14.10	10.80	24.90	50.00	-25.10	AVG	
11	16.3984	30.20	10.80	41.00	60.00	-19.00	QP	
12	16.3984	21.50	10.80	32.30	50.00	-17.70	AVG	

13.2 Maximum Conducted Output Power Measurement


LIMITS

For system using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1 Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

ANSI C63.10 - 2013, Section 11.9.1.3

ANSI C63.10 - 2013, Section 11.9.2.3.2

TEST RESULTS

PASS

Please refer to the following table.

Channel	Frequency (MHz)	Data Rate (Mbps)		Peak Output Power (dBm)			Limit (dBm)	Result
IEEE 802.11b								
1	2412	1		23.056			≤30	PASS
6	2437	1		20.875			≤30	PASS
11	2462	1		20.945			≤30	PASS
IEEE 802.11g								
1	2412	6		22.249			≤30	PASS
6	2437	6		21.442			≤30	PASS
11	2462	6		21.762			≤30	PASS
IEEE 802.11n(HT20)								
1	2412	SISO	MIMO	ANT_1 (SISO)	ANT_2 (SISO)	ANT_1+ ANT_2 (MIMO)	≤30	PASS
		MCS 0	MCS 8	19.914	18.760	22.385		
6	2437	MCS 0	MCS 8	19.259	19.125	22.203	≤30	PASS
11	2462	MCS 0	MCS 8	19.485	18.983	22.252	≤30	PASS
IEEE 802.11n(HT40)								
3	2422	MCS 0	MCS 8	18.917	18.418	21.685	≤30	PASS
6	2437	MCS 0	MCS 8	18.633	18.453	21.554	≤30	PASS
9	2452	MCS 0	MCS 8	18.507	18.56	21.544	≤30	PASS
Note:	1. As for IEEE 802.11b and IEEE 802.11g mode, both of antennas have considered during pre-test, but only the worst case (ANT_1) was recorded. 2. As for IEEE 802.11n mode, EUT working in MIMO mode. Directional gain for MIMO Mode.							


Channel	Frequency (MHz)	Data Rate (Mbps)		Peak Output Power (dBm)			Limit (dBm)	Result
IEEE 802.11ac(VHT20)								
1	2412	SISO	MIMO	ANT_1 (SISO)	ANT_2 (SISO)	ANT_1+ ANT_2 (MIMO)	≤30	PASS
		MCS 0	MCS 8	18.750	17.738	21.284		
6	2437	MCS 0	MCS 8	18.238	18.096	21.178	≤30	PASS
11	2462	MCS 0	MCS 8	18.417	18.307	21.373	≤30	PASS
IEEE 802.11ac(VHT40)								
3	2422	MCS 0	MCS 8	17.824	17.481	20.666	≤30	PASS
6	2437	MCS 0	MCS 8	17.771	17.733	20.762	≤30	PASS
9	2452	MCS 0	MCS 8	17.547	17.631	20.600	≤30	PASS
IEEE 802.11ax(HE20)								
1	2412	MCS 0	MCS 8	18.321	16.717	20.603	≤30	PASS
6	2437	MCS 0	MCS 8	17.374	15.995	19.749	≤30	PASS
11	2462	MCS 0	MCS 8	17.109	16.087	19.638	≤30	PASS
IEEE 802.11ax(HE40)								
3	2422	MCS 0	MCS 8	16.79	15.893	19.375	≤30	PASS
6	2437	MCS 0	MCS 8	16.639	15.898	19.295	≤30	PASS
9	2452	MCS 0	MCS 8	16.277	15.572	18.949	≤30	PASS
Note: As for IEEE 802.11ac/ax mode, EUT working in MIMO mode. Directional gain for MIMO Mode.								

13.3 6dB Bandwidth Measurement

LIMITS

The minimum 6dB bandwidth shall be at least 500 kHz

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to DTS KDB 558074 D01 15.247 Meas Guidance v05r02:

- Set the RBW = 100KHz.
- Set the VBW $\geq 3 \times$ RBW
- Set the Detector = peak.
- Set the Sweep time = auto couple.
- Set the Trace mode = max hold.
- Allow trace to fully stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST RESULTS

PASS


Please refer to the following tables.

Channel	Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b						
1	2412	1	10.14	---	>0.5	PASS
6	2437	1	11.09	---	>0.5	PASS
11	2462	1	10.15	---	>0.5	PASS
IEEE 802.11g						
1	2412	6	16.49	---	>0.5	PASS
6	2437	6	16.48	---	>0.5	PASS
11	2462	6	16.50	---	>0.5	PASS
IEEE 802.11n(HT20)						
1	2412	MCS0	17.68	---	>0.5	PASS
6	2437	MCS0	17.66	---	>0.5	PASS
11	2462	MCS0	17.67	---	>0.5	PASS
IEEE 802.11n(HT40)						
3	2422	MCS0	34.78	---	>0.5	PASS
6	2437	MCS0	36.56	---	>0.5	PASS
9	2452	MCS0	36.57	---	>0.5	PASS
Note: Both of antennas have considered during pre-test, but only the worst case (ANT_1) was recorded.						


Channel	Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11ac(VHT20)						
1	2412	MCS0	17.68	---	>0.5	PASS
6	2437	MCS0	17.66	---	>0.5	PASS
11	2462	MCS0	17.67	---	>0.5	PASS
IEEE 802.11ac(VHT40)						
3	2422	MCS0	36.55	---	>0.5	PASS
6	2437	MCS0	36.55	---	>0.5	PASS
9	2452	MCS0	36.57	---	>0.5	PASS
IEEE 802.11ax(HE20)						
1	2412	MCS0	16.52	---	>0.5	PASS
6	2437	MCS0	19.05	---	>0.5	PASS
11	2462	MCS0	19.04	---	>0.5	PASS
IEEE 802.11ax(HE40)						
3	2422	MCS0	33.72	---	>0.5	PASS
6	2437	MCS0	33.78	---	>0.5	PASS
9	2452	MCS0	38.17	---	>0.5	PASS
Note: Both of antennas have considered during pre-test, but only the worst case (ANT_1) was recorded.						

Test Plots of 6dB Bandwidth


IEEE 802.11b - 2412MHz

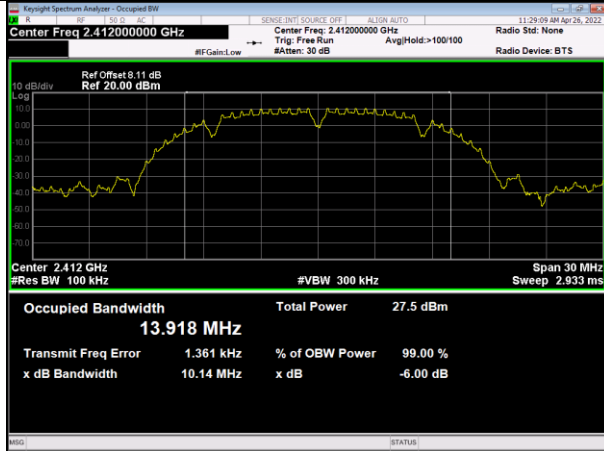


IEEE 802.11b - 2437MHz

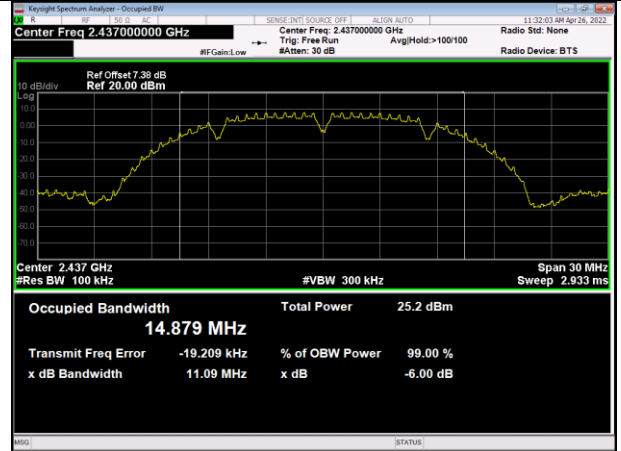


IEEE 802.11b - 2462MHz

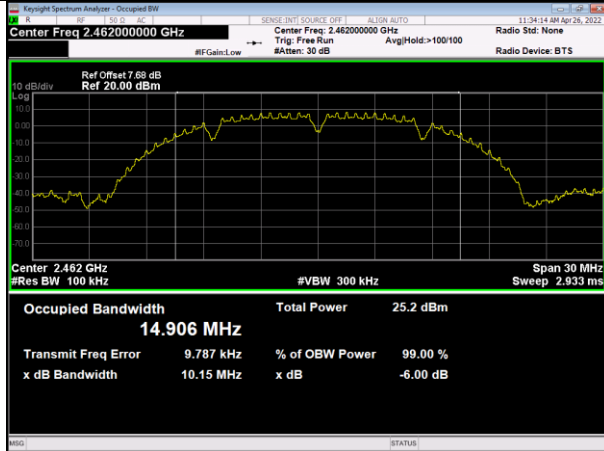


IEEE 802.11g - 2412MHz

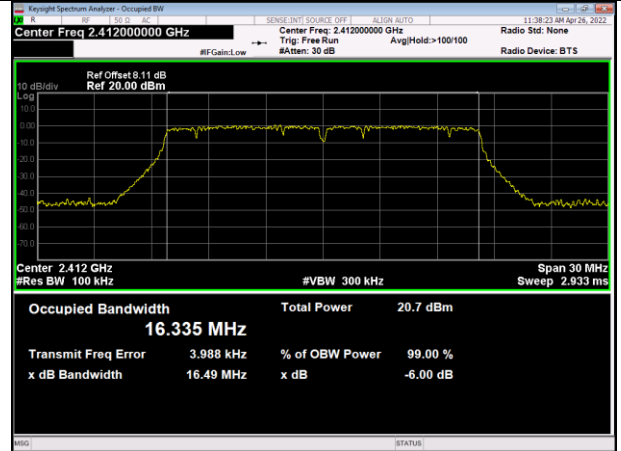

IEEE 802.11g - 2437MHz

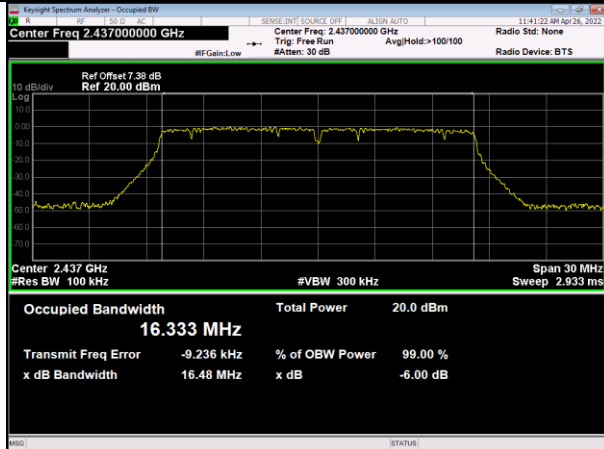


IEEE 802.11g - 2462MHz

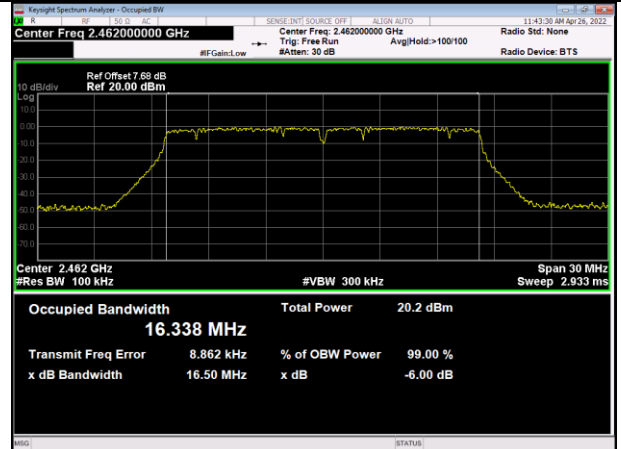


Test Plots of 6dB Bandwidth


IEEE 802.11n(HT20) - 2412MHz

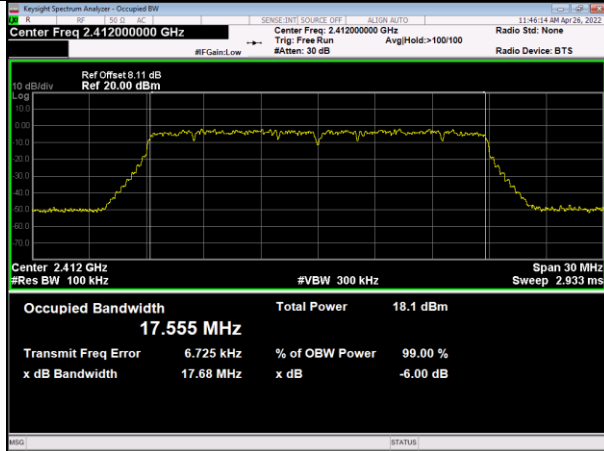


IEEE 802.11n(HT20) - 2437MHz

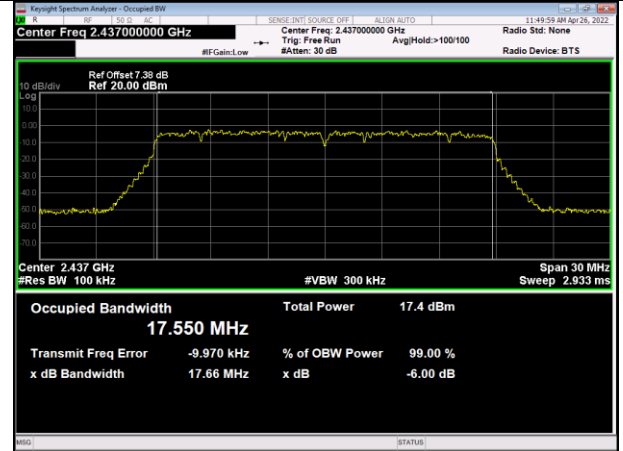


IEEE 802.11n(HT20) - 2462MHz

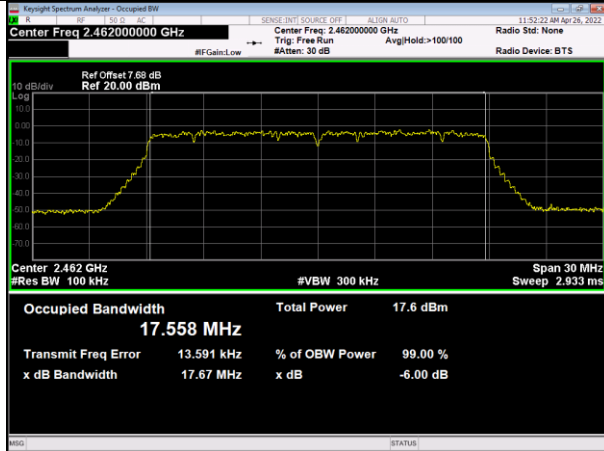


IEEE 802.11n(HT40) - 2422MHz

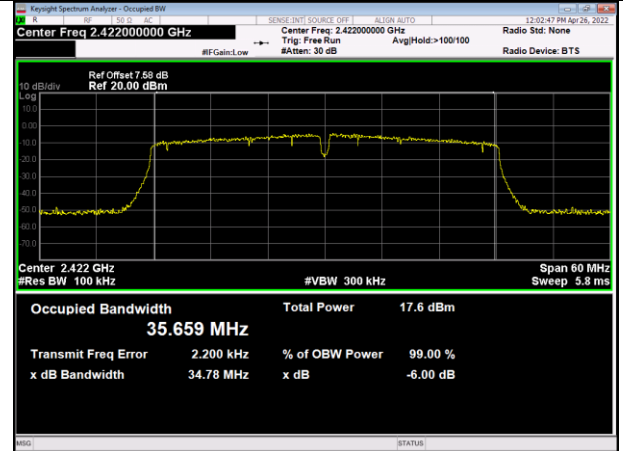

IEEE 802.11n(HT40) - 2437MHz

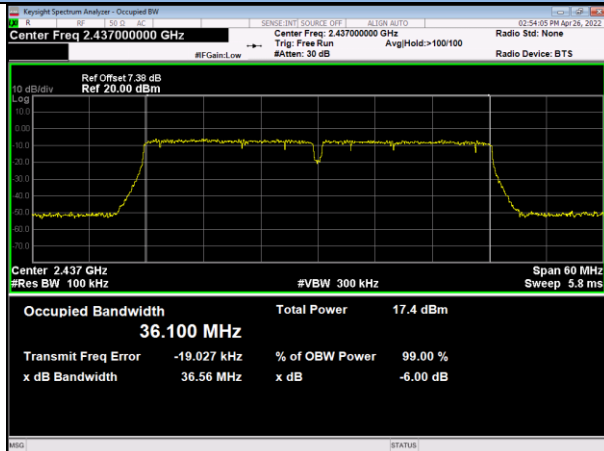


IEEE 802.11n(HT40) - 2452MHz

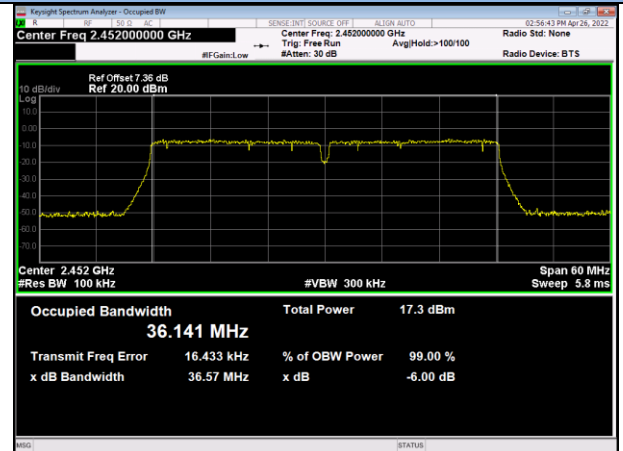


Test Plots of 6dB Bandwidth


IEEE 802.11ac(VHT20) - 2412MHz

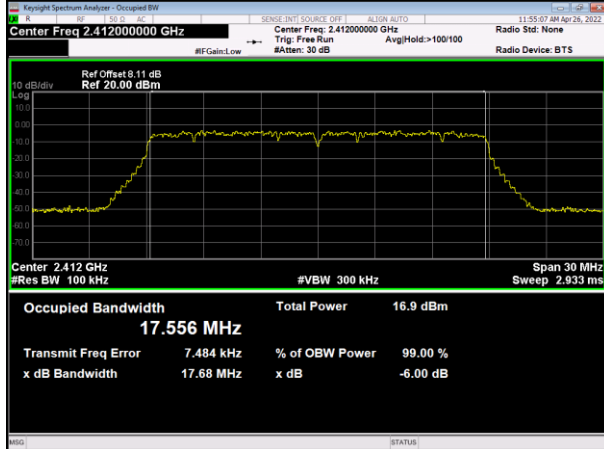


IEEE 802.11ac(VHT20) - 2437MHz

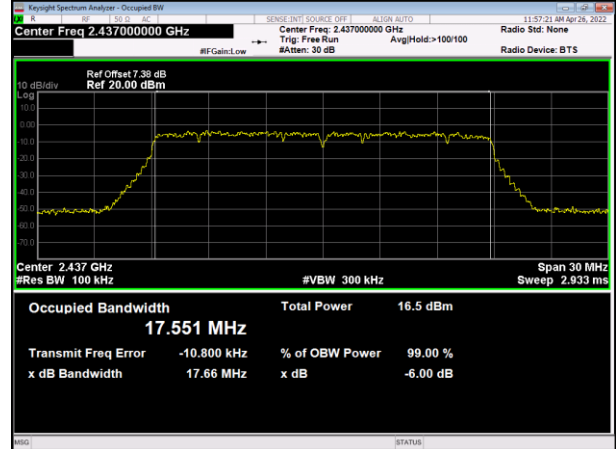


IEEE 802.11ac(VHT20) - 2462MHz

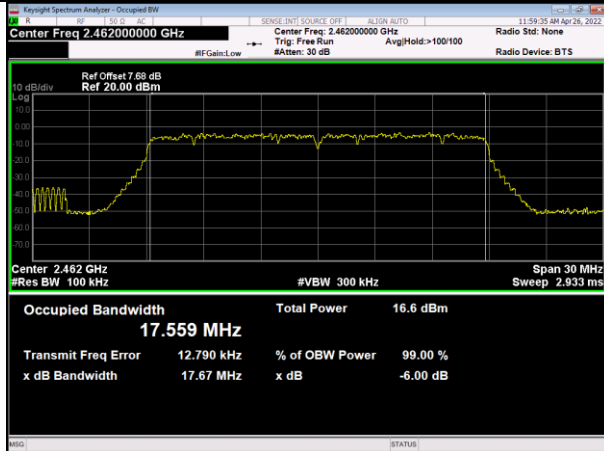


IEEE 802.11ac(VHT40) - 2422MHz

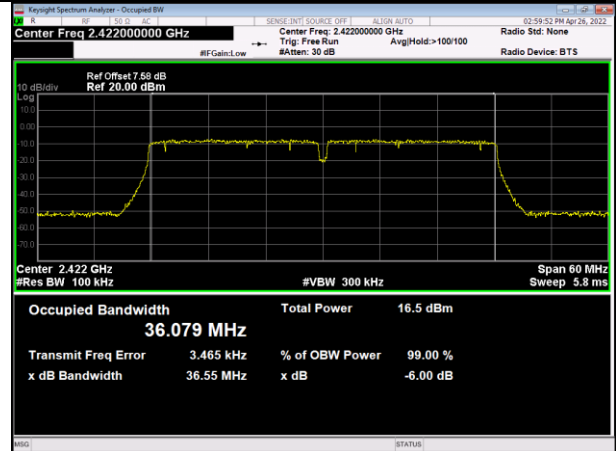

IEEE 802.11ac(VHT40) - 2437MHz

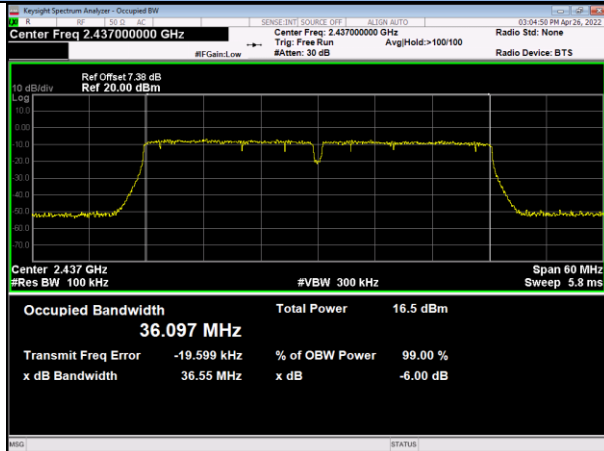


IEEE 802.11ac(VHT40) - 2452MHz

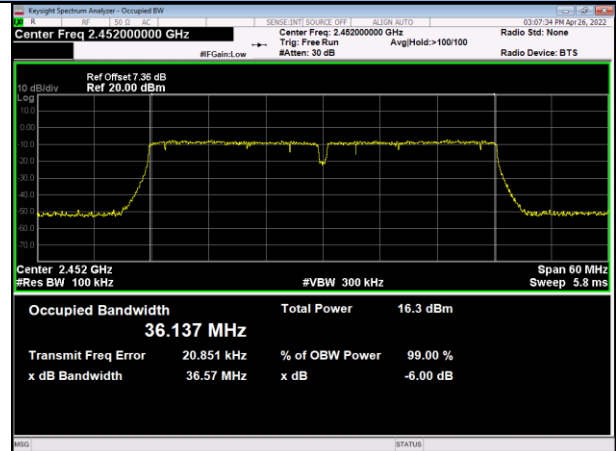


Test Plots of 6dB Bandwidth


IEEE 802.11ax(HE20) - 2412MHz

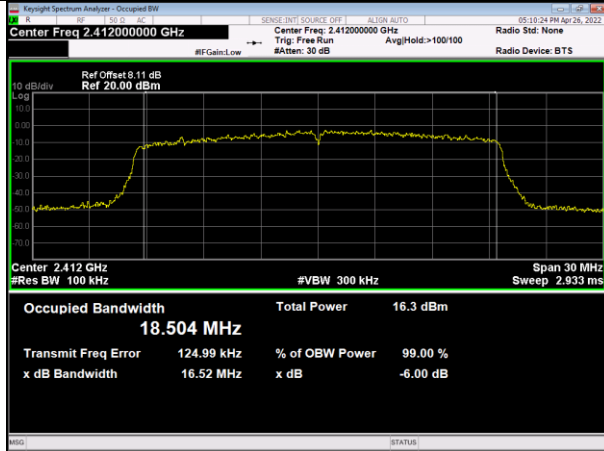


IEEE 802.11ax(HE20) - 2437MHz

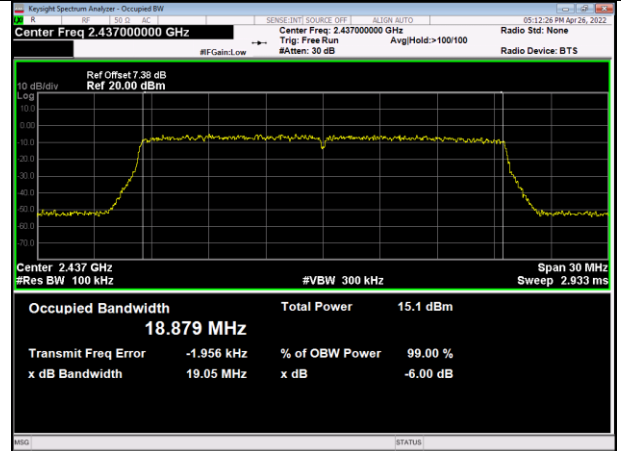


IEEE 802.11ax(HE20) - 2462MHz

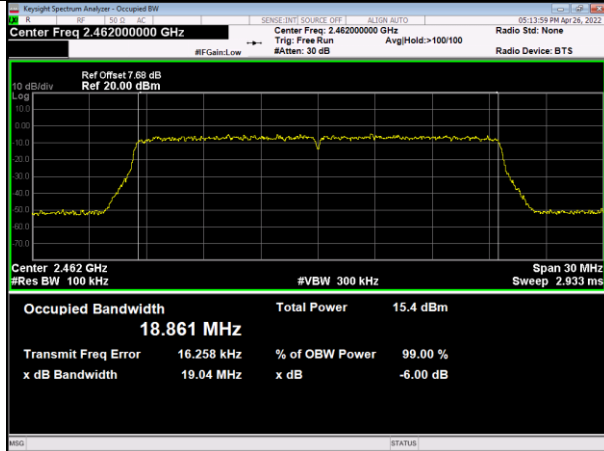


IEEE 802.11ax(HE40) - 2422MHz

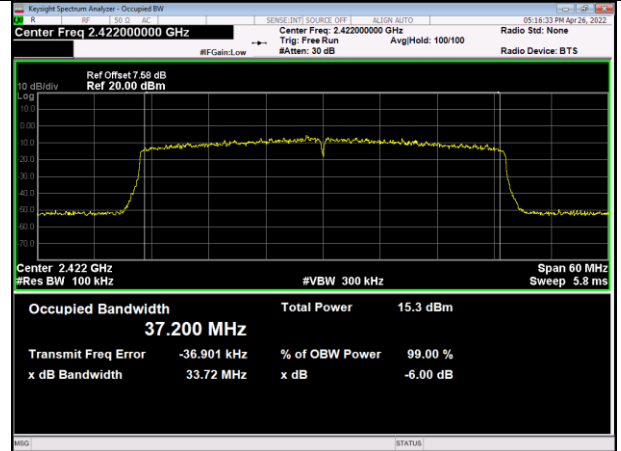

IEEE 802.11ax(HE40) - 2437MHz

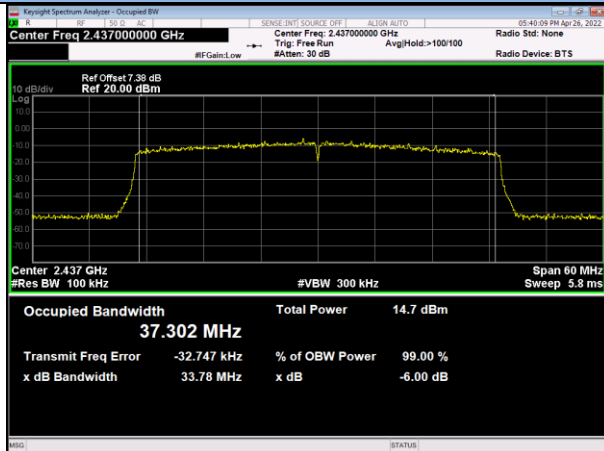

IEEE 802.11ax(HE40) - 2452MHz

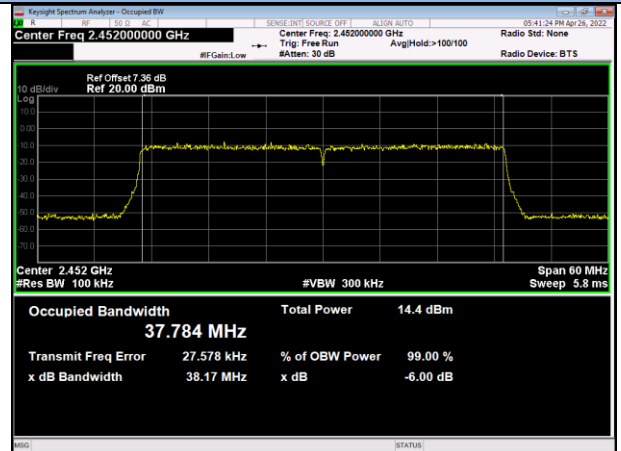


13.4 Power Spectral Density Measurement

LIMITS

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC DTS KDB 558074 D01 15.247 Meas Guidance v05r02:

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100\text{KHz}$
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Set the Detector = peak.
- f. Set the Sweep time = auto couple.
- g. Set the Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.
- j. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

PASS


Please refer to the following table.

Channel	Frequency (MHz)	Data Rate (Mbps)		PSD dBm / 3kHz			Limit dBm / 3kHz	Result
IEEE 802.11b								
1	2412	1		-3.759			8	PASS
6	2437	1		-6.121			8	PASS
11	2462	1		-6.00			8	PASS
IEEE 802.11g								
1	2412	6		-3.001			8	PASS
6	2437	6		-3.603			8	PASS
11	2462	6		-3.361			8	PASS
IEEE 802.11n(HT20)								
1	2412	SISO	MIMO	ANT_1 (SISO)	ANT_2 (SISO)	ANT_1+ ANT_2 (MIMO)	8	PASS
		MCS 0	MCS 8	-5.600	-6.789	-3.098		
6	2437	MCS 0	MCS 8	-6.092	-6.343	-3.188	8	PASS
11	2462	MCS 0	MCS 8	-6.008	-6.335	-3.188	8	PASS
IEEE 802.11n(HT40)								
3	2422	MCS 0	MCS 8	-9.345	-9.836	-6.576	8	PASS
6	2437	MCS 0	MCS 8	-9.604	-9.996	-6.778	8	PASS
9	2452	MCS 0	MCS 8	-9.770	-9.925	-6.778	8	PASS
Note:	1. As for IEEE 802.11b and IEEE 802.11g mode, both of antennas have considered during pre-test, but only the worst case was recorded. 2. As for IEEE 802.11n mode, EUT working in MIMO mode. Directional gain for MIMO Mode.							


Channel I	Frequency (MHz)	Data Rate (Mbps)		PSD dBm / 3kHz			Limit dBm / 3kHz	Result
IEEE 802.11ac(VHT20)								
1	2412	SISO	MIMO	ANT_1 (SISO)	ANT_2 (SISO)	ANT_1+ ANT_2 (MIMO)	8	PASS
		MCS 0	MCS 8	-6.772	-7.752	-4.202		
6	2437	MCS 0	MCS 8	-7.118	-7.318	-4.202	8	PASS
11	2462	MCS 0	MCS 8	-7.024	-7.027	-3.979	8	PASS
IEEE 802.11ac(VHT40)								
3	2422	MCS 0	MCS 8	-10.597	-10.967	-7.696	8	PASS
6	2437	MCS 0	MCS 8	-10.407	-10.819	-7.696	8	PASS
9	2452	MCS 0	MCS 8	-11.009	-10.794	-7.959	8	PASS
IEEE 802.11ax(HE20)								
1	2412	MCS 0	MCS 8	-13.499	-14.269	-10.969	8	PASS
6	2437	MCS 0	MCS 8	-14.793	-15.738	-12.218	8	PASS
11	2462	MCS 0	MCS 8	-15.238	-15.941	-12.218	8	PASS
IEEE 802.11ax(HT40)								
3	2422	MCS 0	MCS 8	-17.408	-17.413	-13.979	8	PASS
6	2437	MCS 0	MCS 8	-16.797	-19.596	-15.229	8	PASS
9	2452	MCS 0	MCS 8	-19.381	-19.988	-16.990	8	PASS
Note:	1. As for IEEE 802.11b and IEEE 802.11g mode, both of antennas have considered during pre-test, but only the worst case was recorded. 2. As for IEEE 802.11ac/ax mode, EUT working in MIMO mode. Directional gain for MIMO Mode.							

Test Plots of Power Spectral Density


IEEE 802.11b - 2412MHz

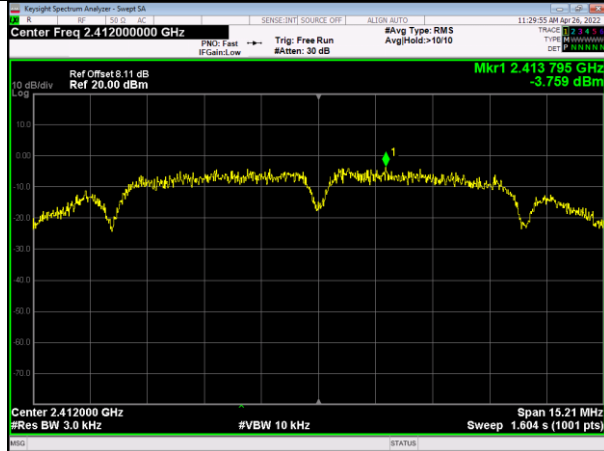


IEEE 802.11b - 2437MHz

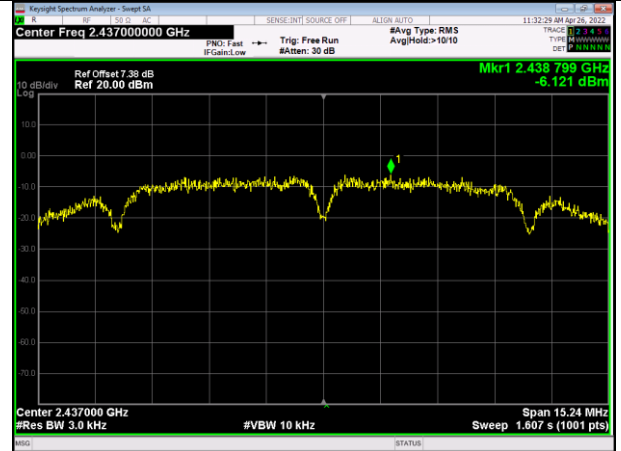


IEEE 802.11b - 2462MHz

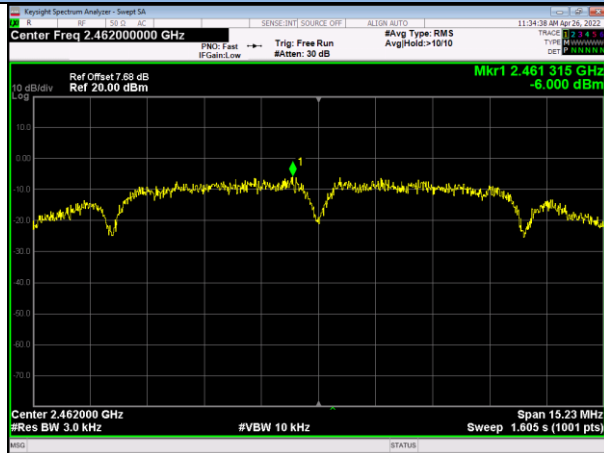


IEEE 802.11g - 2412MHz

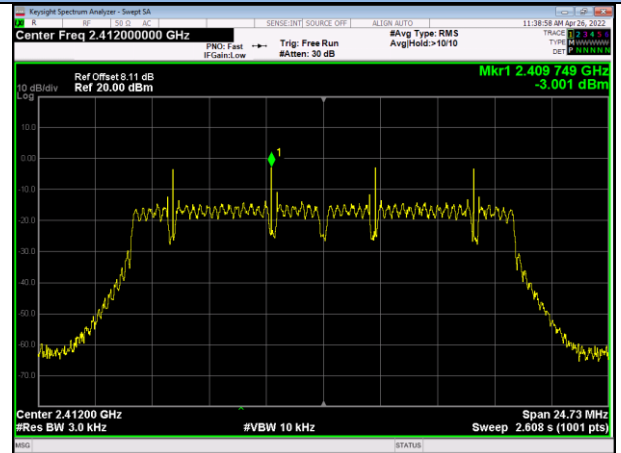

IEEE 802.11g - 2437MHz

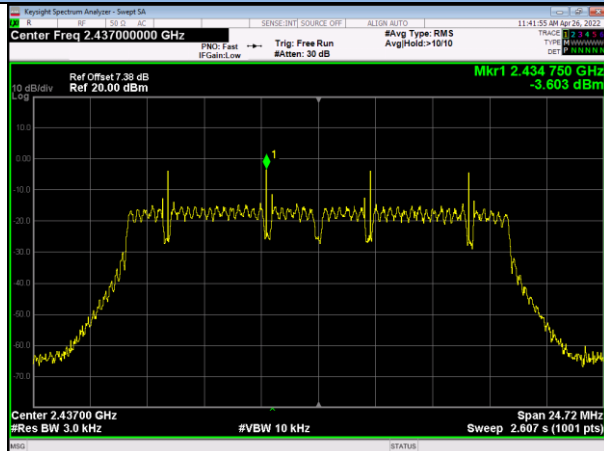


IEEE 802.11g - 2462MHz

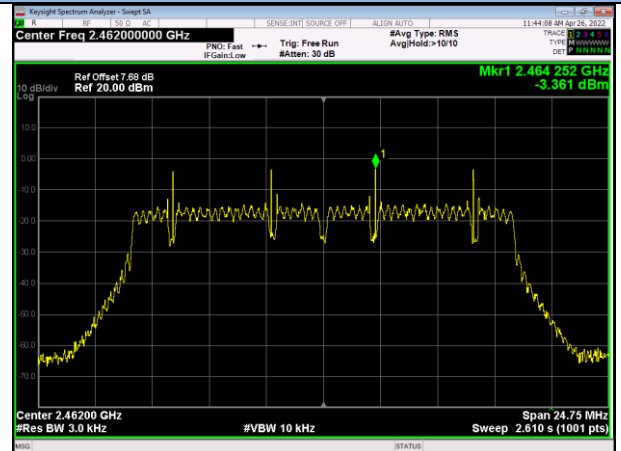


Test Plots of Power Spectral Density


IEEE 802.11n(HT20) - 2412MHz

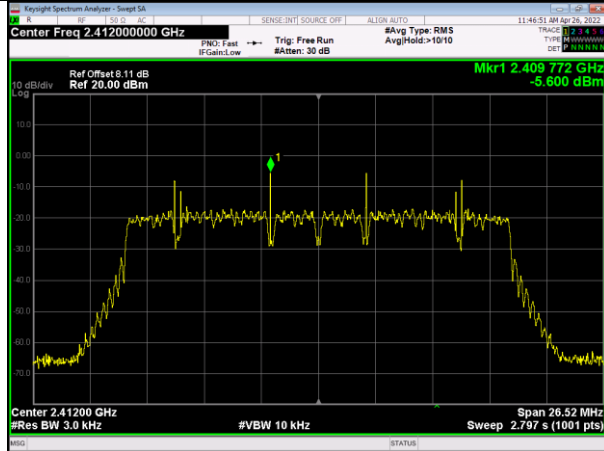


IEEE 802.11n(HT20) - 2437MHz

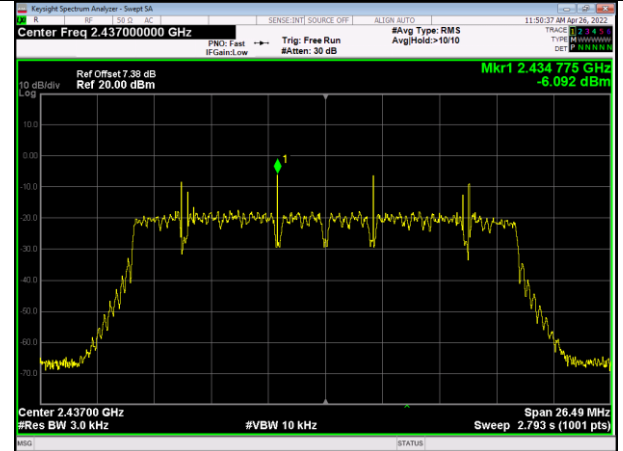


IEEE 802.11n(HT20) - 2462MHz

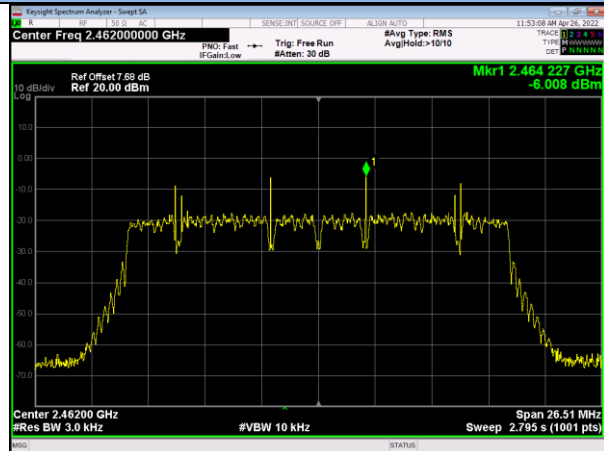


IEEE 802.11n(HT40) - 2422MHz

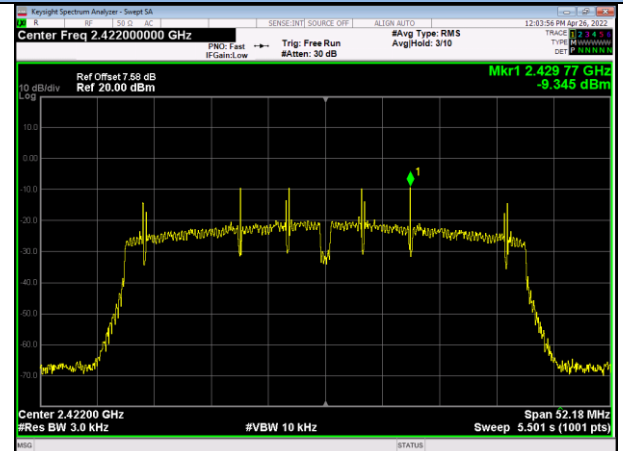

IEEE 802.11n(HT40) - 2437MHz

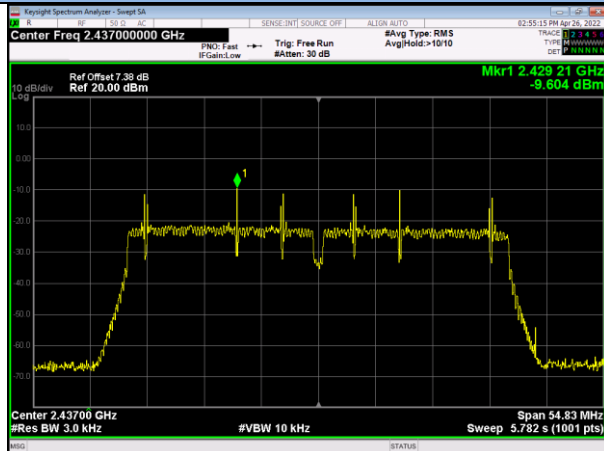


IEEE 802.11n(HT40) - 2452MHz

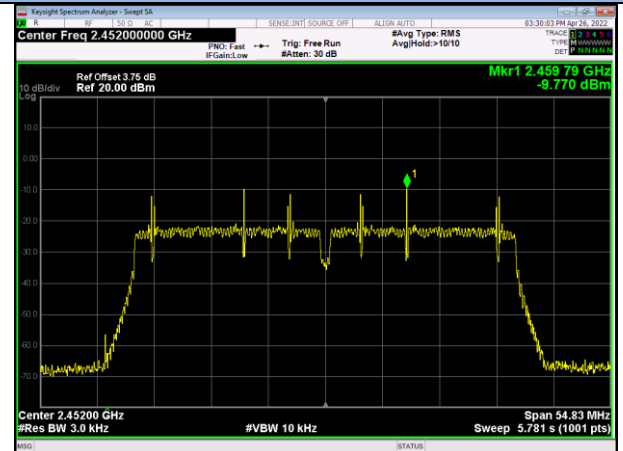


Test Plots of Power Spectral Density


IEEE 802.11ac(VHT20) - 2412MHz

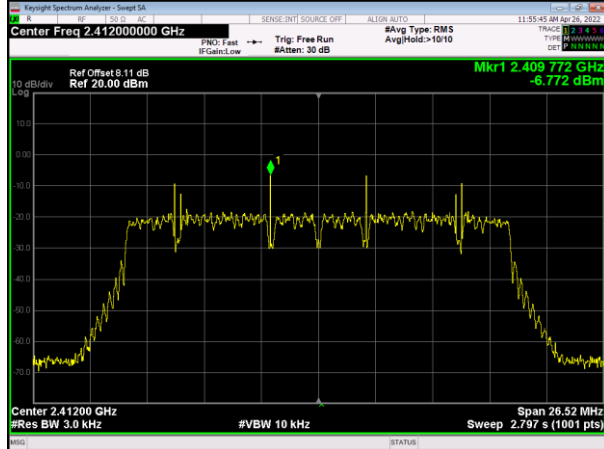


IEEE 802.11ac(VH20) - 2437MHz

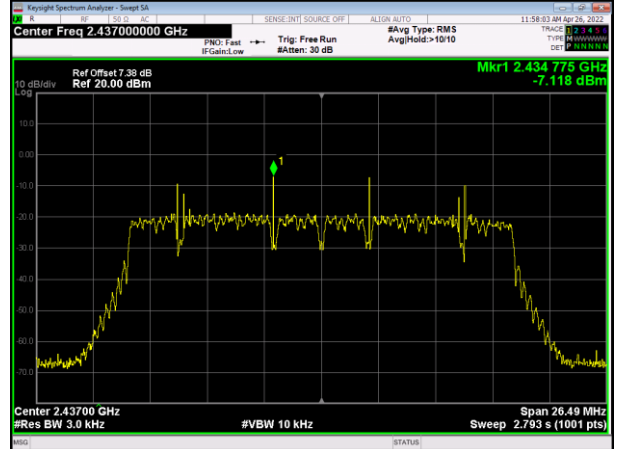


IEEE 802.11ax(HE20) - 2462MHz

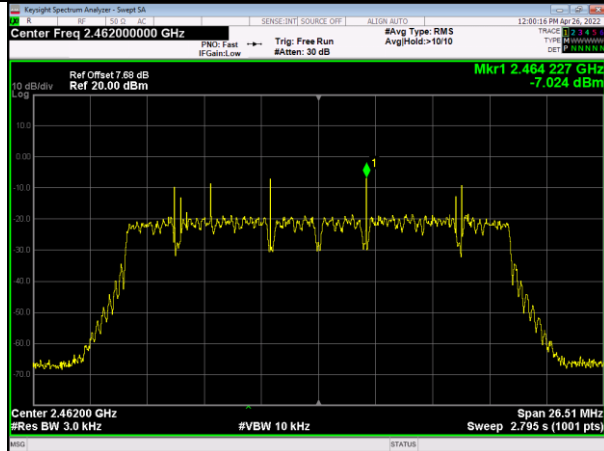


IEEE 802.11ac(VH40) - 2422MHz

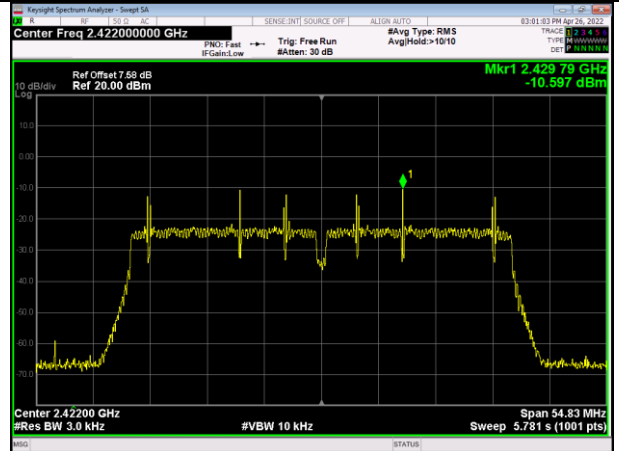

IEEE 802.11ac(VH40) - 2437MHz

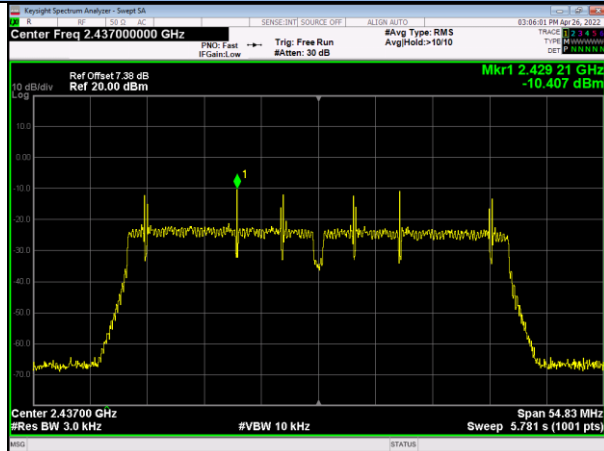


IEEE 802.11ac(VH40) - 2452MHz

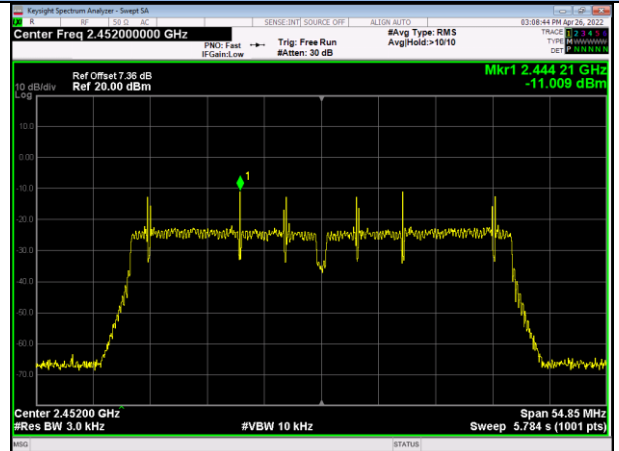


Test Plots of Power Spectral Density


IEEE 802.11ax(HE20) - 2412MHz

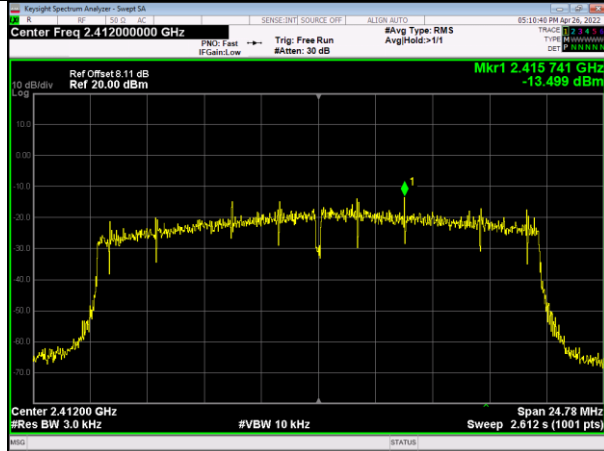


IEEE 802.11ax(HE20) - 2437MHz

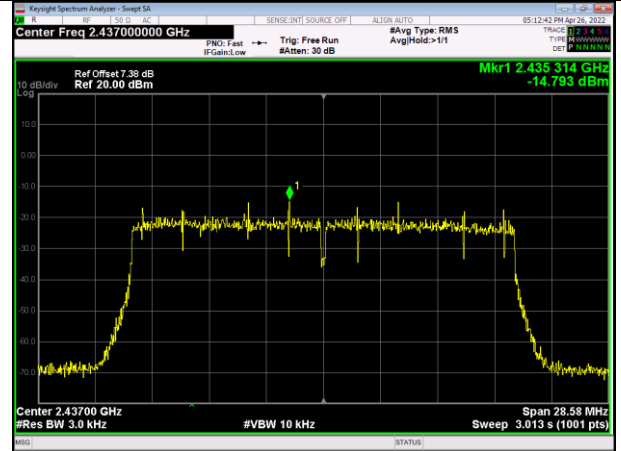


IEEE 802.11ax(HE20) - 2462MHz

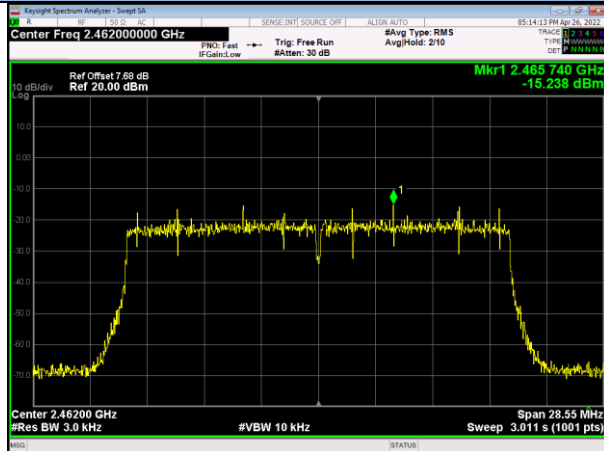


IEEE 802.11ax(HE40) - 2422MHz

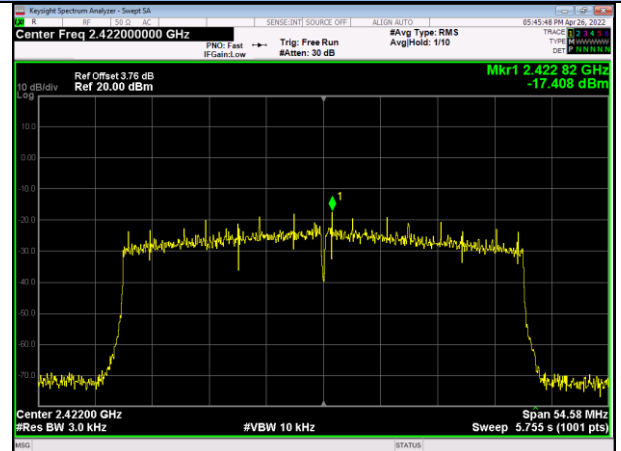

IEEE 802.11ax(HE40) - 2437MHz

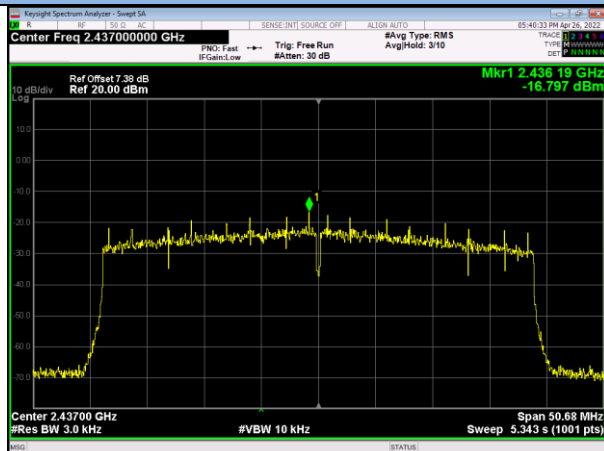

IEEE 802.11ax(HE40) - 2452MHz

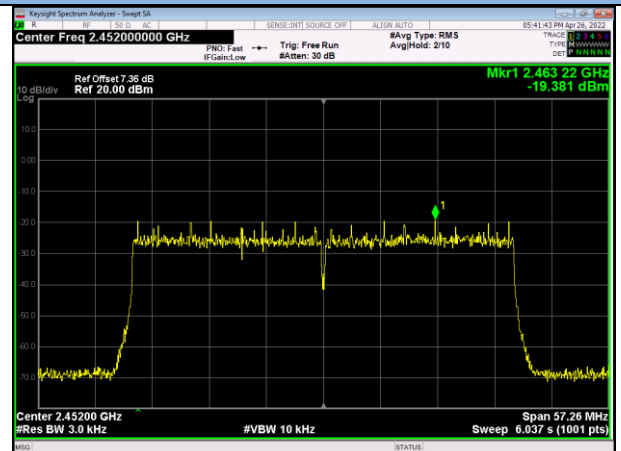


13.5 Band Edge and Conducted Spurious Emissions Measurement

LIMITS

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to ANSI C63.10-2013, Section 11.11

Measurement Procedure REF

- a. Set the RBW = 100 kHz.
- b. Set the VBW \geq 300 kHz.
- c. Set the Detector = peak.
- d. Set the Sweep time = auto couple.
- e. Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure OOB

- a. Set RBW = 100 kHz.
- b. Set VBW \geq 300 kHz.
- c. Set the Detector = peak.
- d. Set the Sweep = auto couple.
- e. Set the Trace Mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum amplitude level.


TEST RESULTS

PASS


Please refer to the following test plots of the worst case ANT_1.

Band Edge


IEEE 802.11b / Low Channel

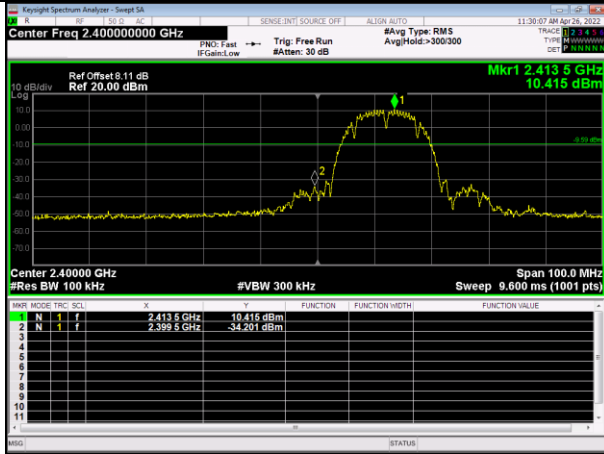


IEEE 802.11b / High Channel

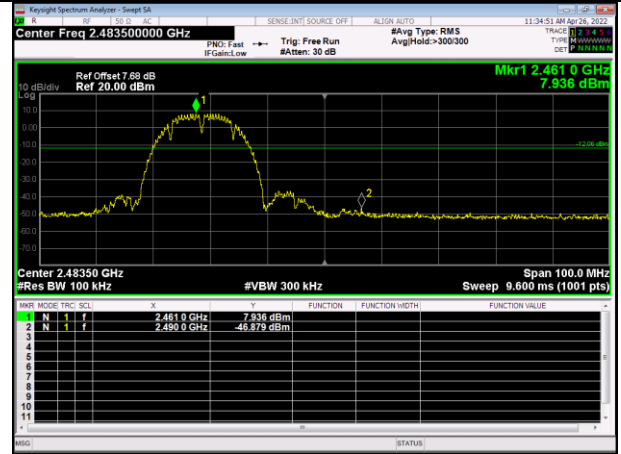

IEEE 802.11g / Low Channel

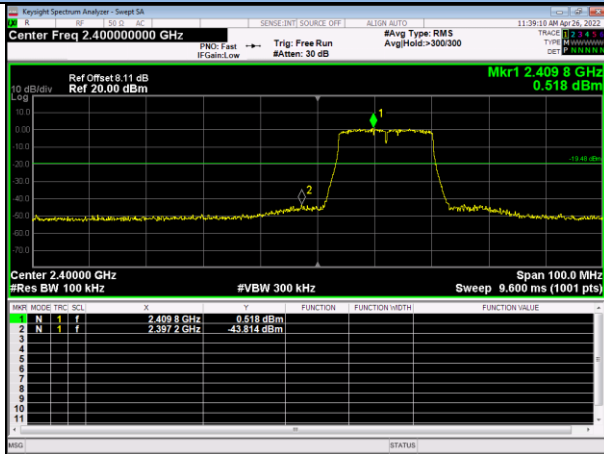


IEEE 802.11g / High Channel

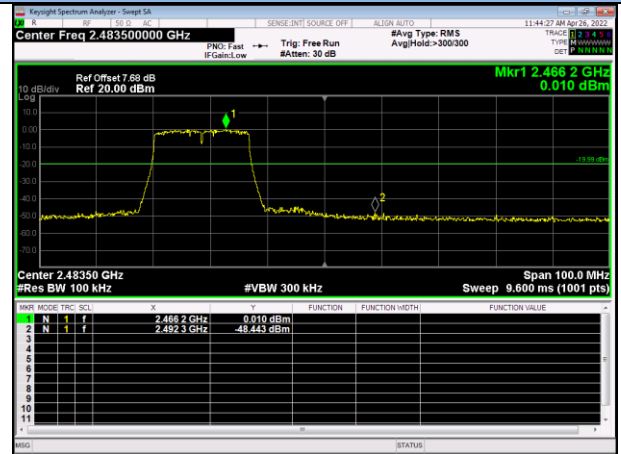


Band Edge


IEEE 802.11n(HT20) / Low Channel

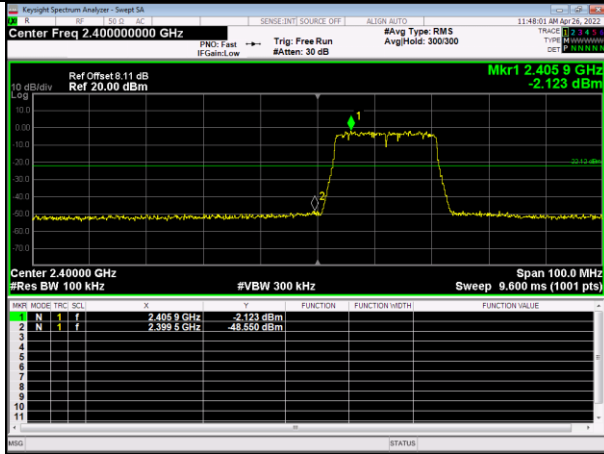


IEEE 802.11n(HT20) / High Channel

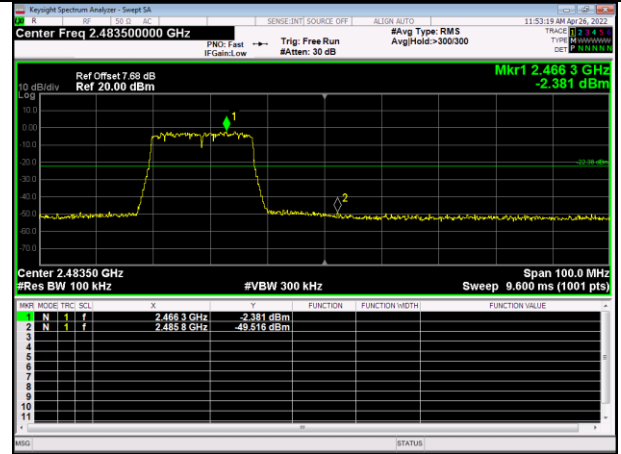

IEEE 802.11n(HT40) / Low Channel

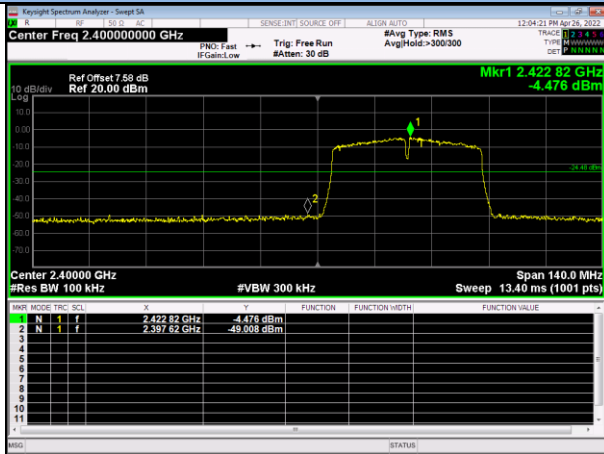


IEEE 802.11n(HT40) / High Channel

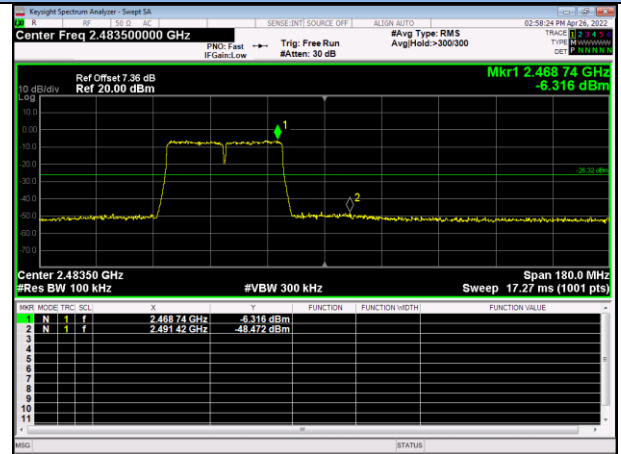


Band Edge


IEEE 802.11ac(VHT20) / Low Channel

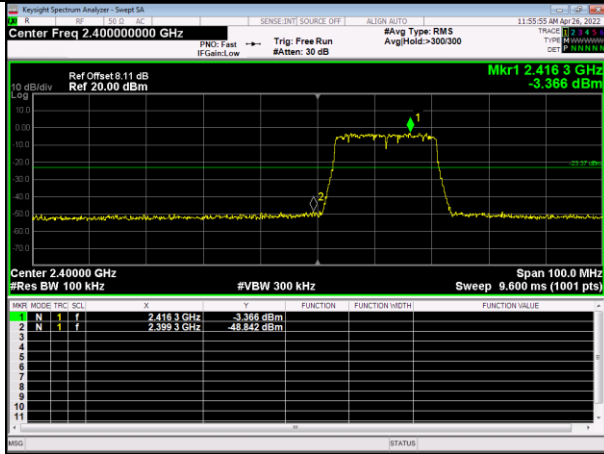


IEEE 802.11 ac(VHT20) / High Channel

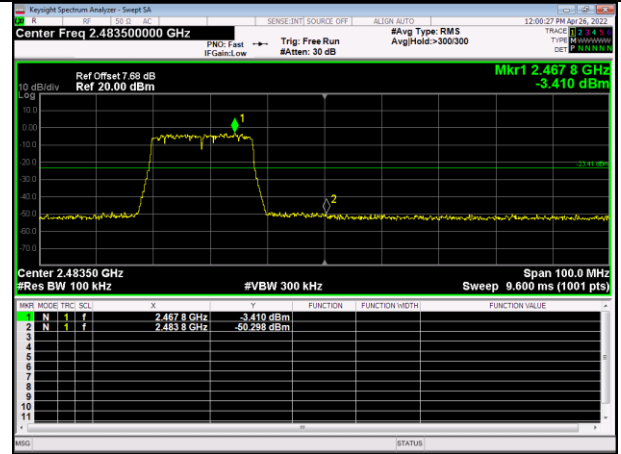

IEEE 802.11 ac(VHT40) / Low Channel

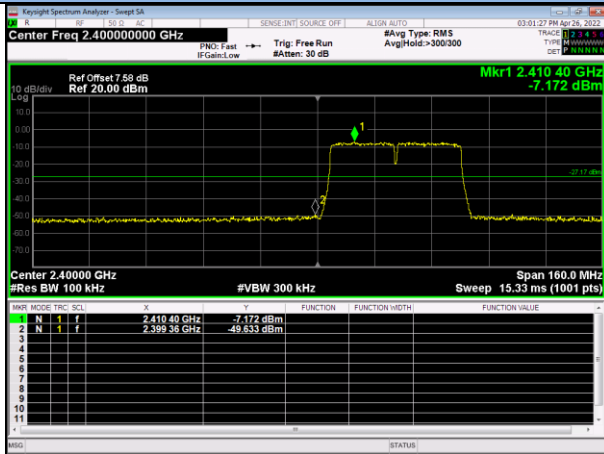


IEEE 802.11 ac(VHT40) / High Channel

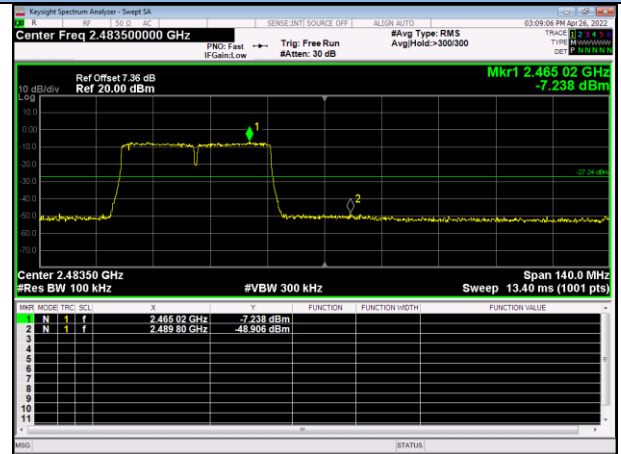


Band Edge


IEEE 802.11ax(HE20) / Low Channel

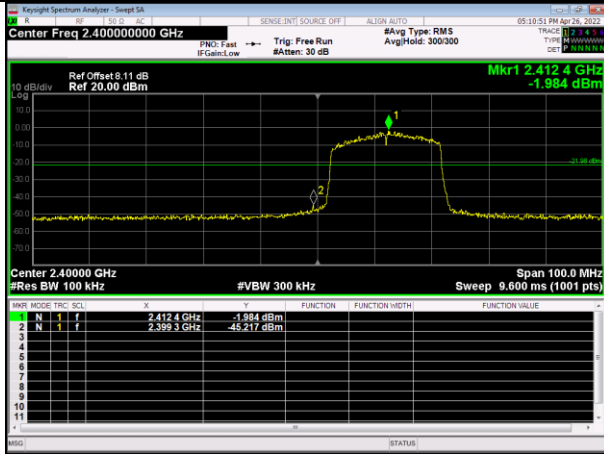


IEEE 802.11ax(HE20) / High Channel

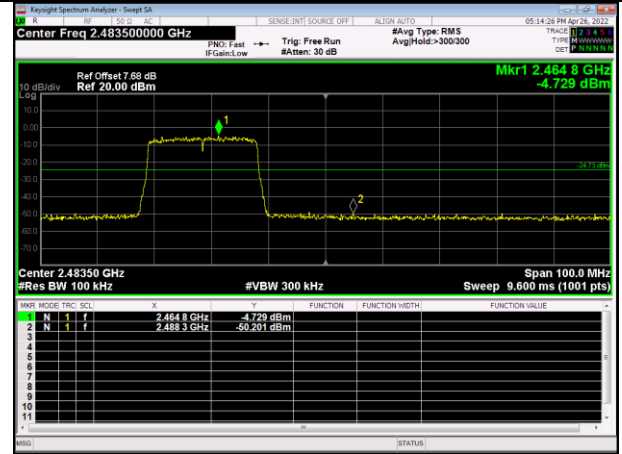

IEEE 802.11ax(HE40) / Low Channel

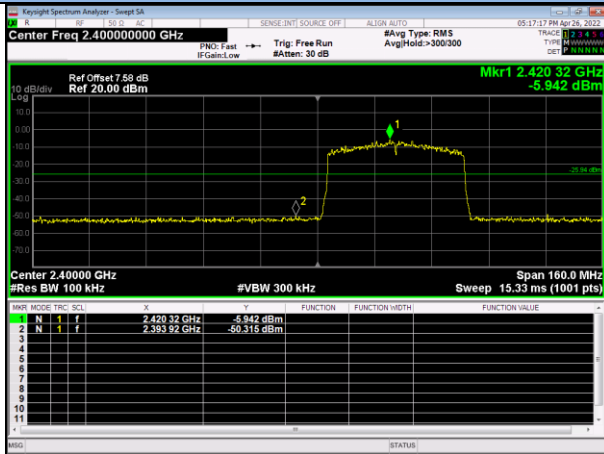


IEEE 802.11ax(HE40) / High Channel

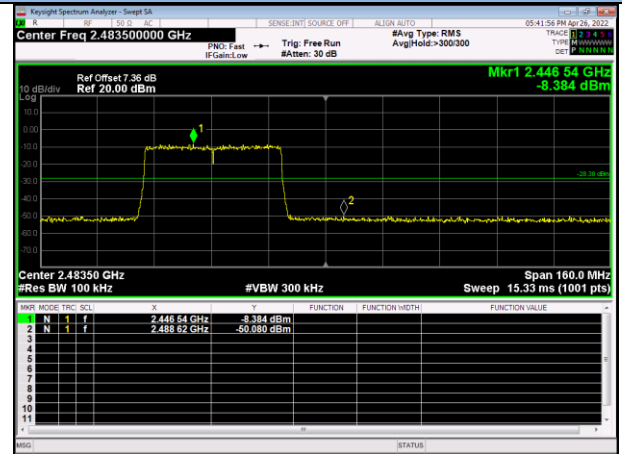


Conducted Spurious Emissions – IEEE 802.11n(HT20) (The Worst Case)


Low Channel / 30MHz~25GHz

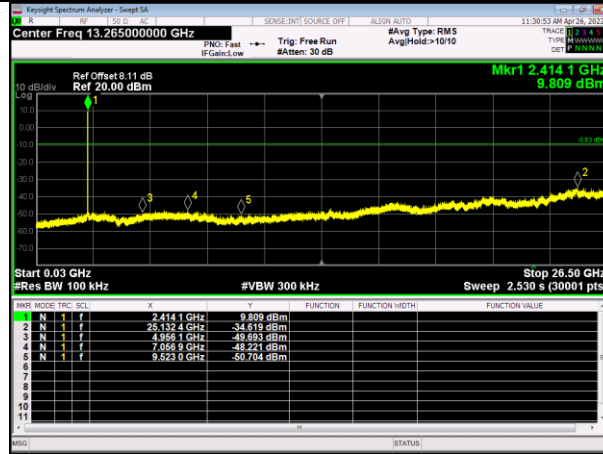

Middle Channel / 30MHz~25GHz

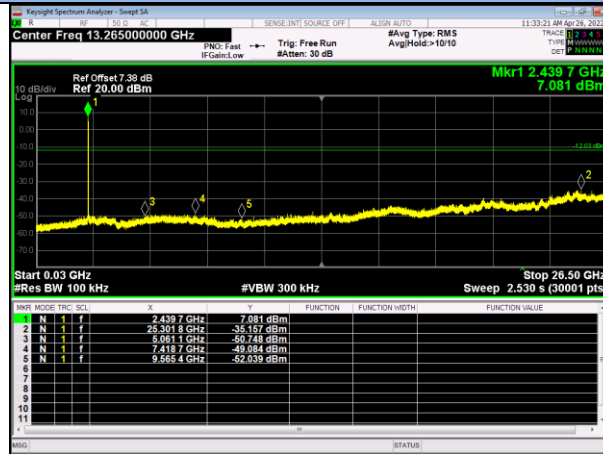

High Channel / 30MHz~25GHz

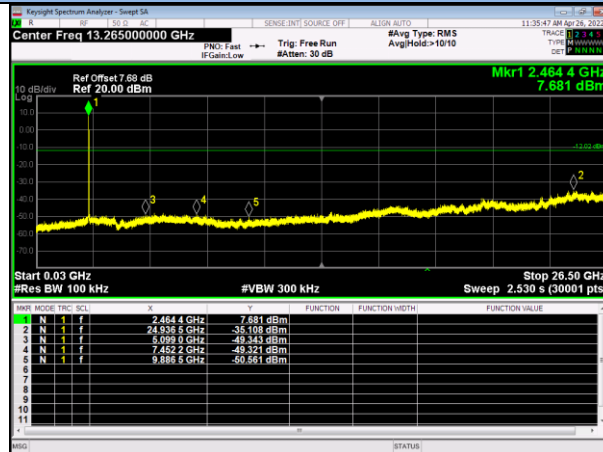

13.6 Radiated Spurious Emissions and Restricted Bands Measurement


LIMITS

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500


- Remark:
- (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
 - (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

BLOCK DIAGRAM OF TEST SETUP


For Radiated Emission below 30MHz

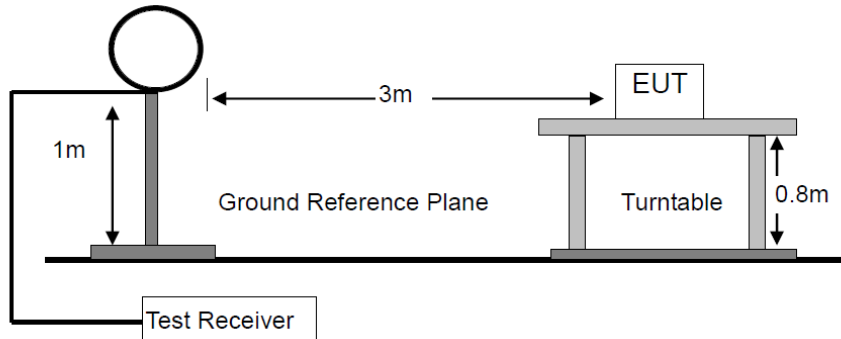

For Radiated Emission 30-1000MHz

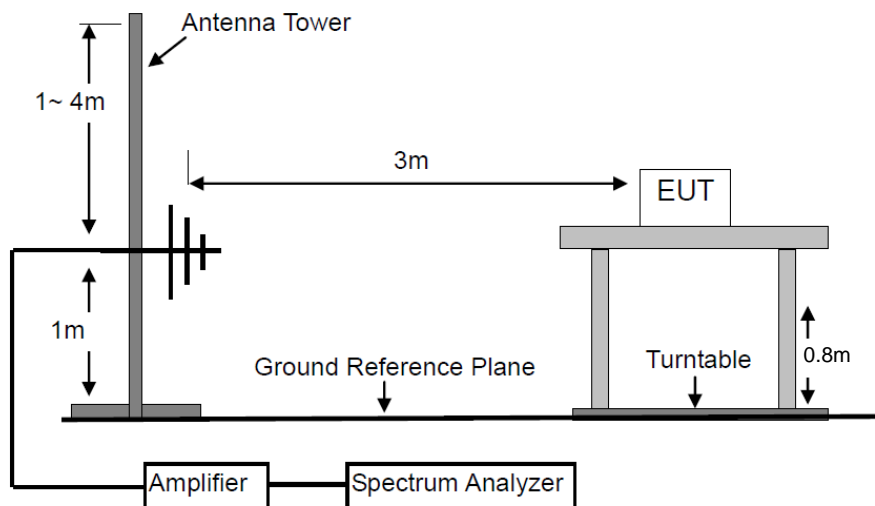

For Radiated Emission Above 1000MHz.

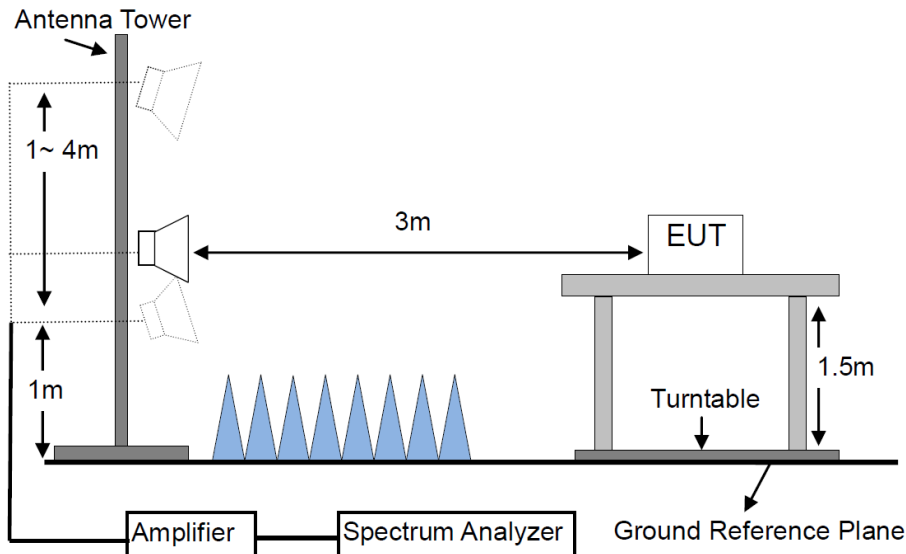

TEST PROCEDURES

- a. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Detector	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

TEST RESULTS

PASS

Please refer to the following pages of the worst case.


M/N: 6252B-SR	Testing Voltage: DC 3.3V
Polarization: Horizontal	Detector: QP
Test Mode: 1 (IEEE 802.11n(HT40) High channel)	Distance: 3m

Radiated Emission Measurement

Date: 2022/4/24

Time: 11:12:47

80.0 dBuV/m

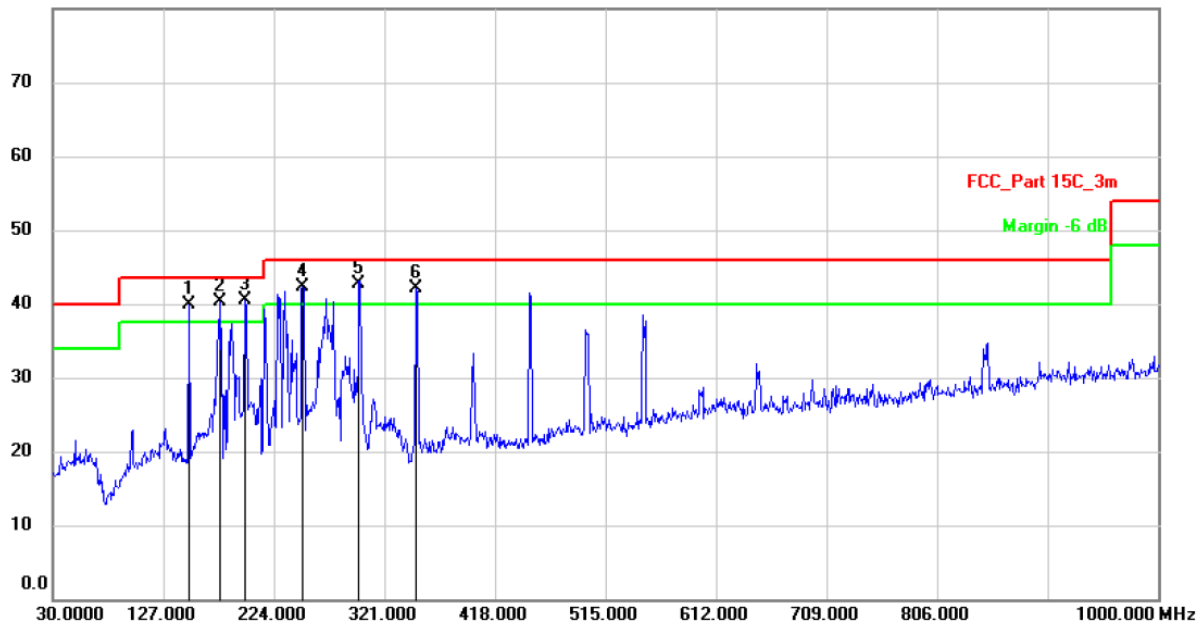

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	149.3100	50.88	-10.89	39.99	43.50	-3.51	QP	
2	!	176.4700	49.78	-9.54	40.24	43.50	-3.26	QP	
3	*	198.7800	48.26	-7.76	40.50	43.50	-3.00	QP	
4	!	249.2200	48.77	-6.38	42.39	46.00	-3.61	QP	
5	!	298.6900	48.22	-5.54	42.68	46.00	-3.32	QP	
6	!	348.1600	46.23	-4.19	42.04	46.00	-3.96	QP	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: 6252B-SR	Testing Voltage: DC 3.3V
Polarization: Vertical	Detector: QP
Test Mode: 1 (IEEE 802.11n(HT40) High channel)	Distance: 3m

Radiated Emission Measurement

Date: 2022/4/24

Time: 11:17:44

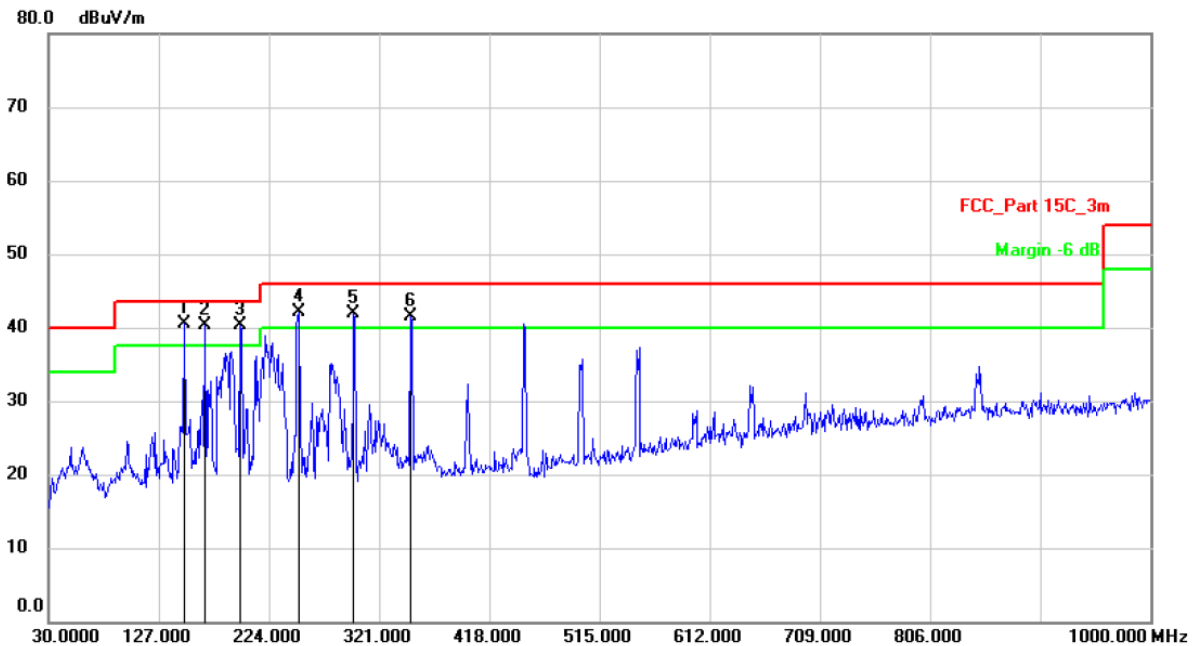

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	149.3100	51.37	-10.89	40.48	43.50	-3.02	QP	
2	!	167.7400	50.44	-10.11	40.33	43.50	-3.17	QP	
3	!	198.7800	48.01	-7.76	40.25	43.50	-3.25	QP	
4	!	250.1900	48.39	-6.36	42.03	46.00	-3.97	QP	
5	!	298.6900	47.44	-5.54	41.90	46.00	-4.10	QP	
6	!	348.1600	45.71	-4.19	41.52	46.00	-4.48	QP	

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Modulation: TX (IEEE 802.11n(HT20) the worst case)				Test Result: PASS			Test frequency range: 1-25GHz			
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV/m)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4824	V	49.09	36.89	6.38	55.47	43.27	74.00	54.00	-18.53	-10.73
7236	V	48.46	36.37	10.48	58.94	46.85	74.00	54.00	-15.06	-7.15

4824	H	48.54	36.23	6.38	54.92	42.61	74.00	54.00	-19.08	-11.39
7236	H	48.19	35.77	10.48	58.67	46.25	74.00	54.00	-15.33	-7.75

Operation Mode: TX Mode (Mid)										
4874	V	49.50	37.15	6.56	56.06	43.71	74.00	54.00	-17.94	-10.29
7311	V	47.94	36.12	10.53	58.47	46.65	74.00	54.00	-15.53	-7.35

4874	H	48.40	35.62	6.56	54.96	42.18	74.00	54.00	-19.04	-11.82
7311	H	47.73	35.84	10.53	58.26	46.37	74.00	54.00	-15.74	-7.63

Operation Mode: TX Mode (High)										
4924	V	49.66	36.92	6.76	56.42	43.68	74.00	54.00	-17.58	-10.32
7386	V	48.22	36.31	10.57	58.79	46.88	74.00	54.00	-15.21	-7.12

4924	H	48.38	35.60	6.76	55.14	42.36	74.00	54.00	-18.86	-11.64
7386	H	47.69	36.01	10.57	58.26	46.58	74.00	54.00	-15.74	-7.42

Spurious Emission in restricted band:										
2390.000	V	55.96	37.90	0.09	56.05	37.99	74.00	54.00	-17.95	-16.01
2390.000	H	55.73	36.80	0.09	55.82	36.89	74.00	54.00	-18.18	-17.11
2483.500	V	56.82	37.28	0.34	57.16	37.62	74.00	54.00	-16.84	-16.38
2483.500	H	55.90	35.85	0.34	56.24	36.19	74.00	54.00	-17.76	-17.81

Remark: 1. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits.
2. Others emissions are attenuated 20dB below the limits, so it does not record in report.

13.7 Antenna Requirement

STANDARD APPLICABLE

According to of FCC part 15C section 15.203 and 15.247:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

ANTENNA CONNECTED CONSTRUCTION

The EUT is a limited single-modular transmitter with external monopole antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 2.98dBi, therefore, the antenna is consider meet the requirement.

14. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 13, 2022	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2022	2 Year
3.	Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Mar. 13, 2022	1 Year
4.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 13, 2022	1 Year
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	101094	Mar. 13, 2022	1 Year
6.	Horn Antenna	Schwarzbeck	BBHA9170	9170-172	Mar. 23, 2022	2 Year
7.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Mar. 13, 2022	1 Year
8.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2022	2 Year
9.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 13, 2022	1 Year
10.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 13, 2022	1 Year
11.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2022	2 Year
12.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 13, 2022	1 Year
13.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 13, 2022	1 Year
14.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar.13, 2022	1 Year
15.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
16.	Test Software	EZ	EZ EMC	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---