

SUCR250200006801 Report No.:

Rev.: 1 of 40 Page:

# **HAC (T-Coil) Test Report**

**Application No.:** SUCR2502000068WM Applicant: TCLCommunicationLtd. Manufacturer: TCLCommunicationLtd.

**EUT Description:** Mobile Phone

Model No: T451A

FCC ID: 2ACCJB235

Trade Mark: Alcatel

Standards: ANSI C63.19-2019

CFR 47 FCC Part 20

Date of Receipt: 2025-01-14

Date of Test: 2025-01-18 to 2025-02-12

Date of Issue: 2025-02-14

**Test Result:** PASS \*

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Prepared by: Leon Liu/ Project Manager

Approved by: Nick HU/ Technical Manager

Nick Hu

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR250200006801

Rev.: 01 Page: 2 of 40

	Revision Record						
Version	Description	Date	Remark				
01		2025-02-14	Original				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sas.com/en/Terms-and-Conditions.aspx">http://www.sas.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01 Page: 3 of 40

## **TEST SUMMARY**

Frequency Band	HAC T-coil Test Results				
GSM 850	PASS				
PCS 1900	PASS				
WCDMA band 2	PASS				
WCDMA band 4	PASS				
WCDMA band 5	PASS				
LTE band 2	PASS				
LTE band 4	PASS				
LTE band 5	PASS				
LTE band 7	PASS				
LTE band 12	PASS				
LTE band 13	PASS				
LTE band 17	PASS				
LTE band 26	PASS				
LTE band 66	PASS				
LTE band 38	PASS				
LTE band 41	PASS				
WLAN2.4GHz	PASS				
HAC ResultS: PASS					

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sas.com/en/Terms-and-Conditions.aspx">http://www.sas.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR250200006801

Rev.: 01 Page: 4 of 40

## **CONTENTS**

1	GEN	IERAL INFORMATION	6
	1.1	Introduction	
	1.2	Details of Client	
	1.3	Test Location	
	1.4	Test Facility	
•	1.5	General Description of EUT	
	1.5.1 1.5.2		9
	1.3.∠ 1.6	Test Specification	
	1.7	ANSI C63.19-2019 limits.	
2	CAL	IBRATION CERTIFICATE	
3	HAC	(T-COIL) MEASUREMENT SYSTEM	13
;	3.1	Measurement System Diagram for SPEAG Robotic	13
	3.2	T-Coil Measurement	14
	3.3	System Calibration	
	3.4	Audio Magnetic Probe AM1DV3	
	3.5	Test Arch	
	3.6 3.7	Phone Holder	
	3. <i>1</i> 3.8	AMMI - Audio Magnetic Measurement Instrument	
4		ASUREMENT UNCERTAINTY EVALUATION	
5		; (T-COIL) MEASUREMENT	
	5.1	T-Coil Performance Requirements	26
	5.2	T-Coil measurement points and reference plane	
•	5.3	T-Coil Measurement Procedure	
6	T-CC	DIL TESTING FOR CMRS VOICE	31
(	6.1	General Description	31
	6.2	GSM Tests Results	
(	6.3	UMTS Tests Results	33
7	T-CC	DIL TESTING FOR CMRS IP VOICE	34
-	7.1	VoLTE Tests Results	34
•	7.2	VoWiFi Tests Results	
•	7.3	T-Coil testing for OTT VoIP Application	37
8	EQU	IIPMENT LIST	39
9	CAL	IBRATION CERTIFICATE	40
10	PHO	TOGRAPHS	40
۸P	DENIDI	V A. DETAILED TEST DESILLES	40

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sas.com/en/Terms-and-Conditions.aspx">http://www.sas.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01 Page: 5 of 40

APPENDIX B: CALIBRATION CERTIFICATE	40
APPENDIX C: PHOTOGRAPHS	40

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sas.com/en/Terms-and-Conditions.aspx">http://www.sas.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01 Page: 6 of 40

## 1 General Information

## 1.1 Introduction

The purpose of this standard is to provide tests and establish requirements for hearing aids and for WDs that allow a hearing aid user to effectively use a WD when both the hearing aid and WD meet the requirements of this standard. The various parameters required in order to demonstrate compatibility are measured. The design of the standard is such that when a hearing aid and a WD achieve the specified requirements, as measured by the methodology of this standard, the user of a hearing aid can effectively use a WD In order to provide for the usability of a hearing aid with a WD, several factors are coordinated, as follows:

- a) The field strength emitted by a WD must not exceed the RF immunity of the hearing aid.
- b) The T-Coil baseband H-field transmission of the WD must be compatible with the T-Coil mode of the hearing aid.
- c) The magnetic noise from the WD in the T-Coil band must not degrade the reception quality to unacceptable levels.

Both the WD's RF and audio-band emissions are measured. Hence, the following measurements are made for the WDs:

- a) RF amplitude modulation characteristics and power level or, optionally, near-feld E-field emissions
- b) T-Coil mode, magnetie signal strength in the audio band.
- c) T-Coil mode, magnetic noise in the audio band
- d) T-Coil mode, magnetic signal frequency response in the audio band

Corresponding to these quantities, the hearing aid is measured for the following:

- 1) RF immunity in microphone mode
- 2) RF immunity in T-Coil mode

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01 Page: 7 of 40

## 1.2 Details of Client

Applicant:	TCLCommunicationLtd.
Address:	5/F,Building22E,22ScienceParkEastAvenue,HongKongSciencePark,Shatin,NT,Hong Kong
Manufacturer:	TCLCommunicationLtd.
Address	5/F,Building22E,22ScienceParkEastAvenue,HongKongSciencePark,Shatin,NT,Hong Kong

## 1.3 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Alger Du

## 1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

## • Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

#### • FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and justication is uses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

01 Rev.: 8 of 40 Page:

## 1.5 General Description of EUT

Device Type :	portable device						
Exposure Category:	uncontrolled environment / gene	uncontrolled environment / general population					
Product Name:	Mobile Phone	Mobile Phone					
Model No.(EUT):	T451A	T451A					
Trade Mark:	Alcatel						
FCC ID:	2ACCJB235						
Product Phase:	Production Unit						
IMEI:	358612600000368/3586126000 358612600003297/3586126000						
Hardware Version:	V00						
Software Version:	T451DA11						
	GSM: GMSK, 8PSK; WCDMA: 0	QPSK;16QAM;					
Modulation Mode:	LTE: QPSK,16QAM,64QAM;						
	WIFI: DSSS, OFDM; BT: GFSK,	π/4DQPSK,8DPSK					
Device Class:	В						
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12				
HSDPA UE Category:	24	HSUPA UE Category	7				
	4,tested with power level 5(GSM	(850)					
Power Class	1,tested with power level 0(GSM1900)						
rower Class	3, tested with power control "all 1"(WCDMA Band)						
	3, tested with power control Max Power(LTE Band)						
	Band	Tx (MHz)	Rx (MHz)				
	GSM 850	824 - 849 MHz	869 - 894 MHz				
	PCS 1900	1850 - 1910 MHz	1930 - 1990 MHz				
	WCDMA band 2	1850 -1910 MHz	1930 - 1990 MHz				
	WCDMA band 4	1710 -1755MHz	2110 - 2155MHz				
	WCDMA band 5	824 - 849MHz	869 - 894MHz				
	LTE band 2	1850 - 1910 MHz	1930 - 1990 MHz				
	LTE band 4	1710 - 1755 MHz	2110 - 2155 MHz				
	LTE band 5	824 - 849 MHz	869 - 894 MHz				
Frequency Bands:	LTE band 7	2500 - 2570 MHz	2620 - 2690 MHz				
	LTE band 12	699 - 716 MHz	729 - 746 MHz				
	LTE band 13	777 - 787 MHz	746 - 756 MHz				
	LTE band 17	704 - 716 MHz	734 - 746 MHz				
	LTE band 26	814 - 849 MHz	859 - 894 MHz				
	LTE band 38	2570 - 2620 MHz	2570 - 2620 MHz				
	LTE band 41	2496 - 2690 MHz	2496 - 2690 MHz				
	LTE band 66	1710 - 1780 MHz	2110 - 2200 MHz				
	WLAN2.4GHz	2412-2462 MHz	2412-2462 MHz				
	Bluetooth	2400~2483.5	2400~2483.5				
	Model:	TLp049LB, TLp049L9	<del>_</del>				
Better before die	Normal Voltage:	3.87V					
Battery Information:	Typical capacity:	5010 mAh					
		TCL					

Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion. Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01 Page: 9 of 40

## 1.6 DUT Antenna Locations (Back view)

The DUT Antenna Locations can be referred to Appendix C

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sas.com/en/Terms-and-Conditions.aspx">http://www.sas.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 10 of 40

## 1.7 List of air interfaces/frequency bands

Air Interface	Band (MHz)	Туре	ANSI C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction	
	850			.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			
GSM	1900	VO	Yes	BT, Wi-Fi	CMRS Voice	NO	
	EDGE	VD	Yes		Google Meet*	I	
	Band II						
WCDMA	Band IV	VO	Yes	BT, Wi-Fi	CMRS Voice	NO	
WODINA	Band V			D1, WI-11			
	HSPA	VD	Yes		Google Meet*		
	LTE band 2	VD	Yes	BT, Wi-Fi	VoLTE Google Meet*	NO	
	LTE band 4						
	LTE band 5						
	LTE band 7						
LTE FDD	LTE band 12						
	LTE band 13						
	LTE band 17						
	LTE band 26						
	LTE band 66						
1 TE TOO	LTE band 38	1/5	.,	BT, Wi-Fi	VoLTE Google Meet*	NO	
LTE TDD	LTE band 41	VD	Yes			NO	
Wi-Fi	2450	VD	Yes	WWAN	Google Meet*	NO	
ВТ	2450	DT	No	WWAN	NA	NO	

VO: Legacy Cellular Voice Service

DT: Digital Transport (no voice)

VD: IP Voice Service over Digital Transport

\*ANSI C63.19-2019 use table 6.1 to establish the Normal speech input level and NOTE 2 of table 6.1 identifies the group of VoIP voice services that use –16 dBm0 as the normal speech input level.

#### Remark

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sqs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

<sup>1.</sup> Because features of Google Meet allow the option of voice-only communications, Meet has been tested for HAC/T-Coil compatibility to ensure the best user experience.

<sup>2.</sup>The Google Meet and google Fi the audio path, parameter and audio codec are all the same, therefore, the Google Meet is evaluation for this device to show compliance.



Report No.: SUCR250200006801

Rev.: 01

Page: 11 of 40

## 1.8 Test Specification

Identity	Document Title
CFR 47 FCC Part 20	§20.19 Hearing aid-compatible mobile handsets.
IANSI UN 3 19-2019	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices
KDB 285076 D01	HAC Guidance v06
KDB 285076 D02	T-Coil testing v04

## 1.9 ANSI C63.19-2019 limits

GSM operating modes:

- · The primary group shall include at least 25 measurement points.
- The secondary group shall include at least 125 contiguous measurement points.

Non-2G GSM operating modes:

- · The primary group shall include at least 75 measurement points.
- · The secondary group shall include at least 300 contiguous measurement points

Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying oints and t least one transverse row containing at least 15 contiguous qualifying points.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Member of the SGS Group (SGS SA)



Report No.: SUCR250200006801

Rev.: 01

Page: 12 of 40

## 2 Calibration certificate

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%

Table 1: The Ambient Conditions

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sas.com/en/Terms-and-Conditions.aspx">http://www.sas.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR250200006801

Rev.: Λ1

Page: 13 of 40

# HAC (T-Coil) Measurement System

## 3.1 Measurement System Diagram for SPEAG Robotic

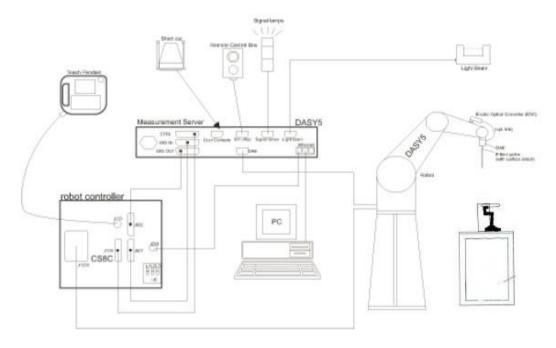


Fig. 1. The SPEAG Robotic Diagram

The DASY8 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- · An Audio Magnetic probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, ADconversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- · DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch SAM phantom
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-and-Condit

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 14 of 40

## 3.2 T-Coil Measurement

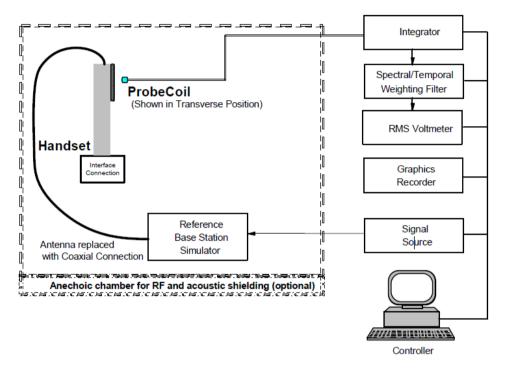


Fig. 2. T-coil signal measurement test setup-in call method

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: Λ1

Page: 15 of 40

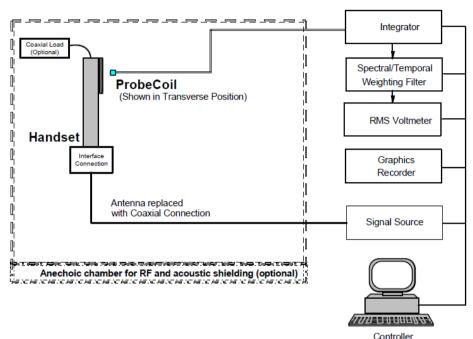


Fig. 3. T-coil signal measurement test setup-test mode method.

The reference axis is normal to the reference plane and passes through the center of the acoustie output (or the center of the whole array); or may be centered on or near a secondary inductive source. The actual location of the reference axis and resultant measurement area shall be noted in the test report.

The measurement area shall be 50 mm by 50 mm. The measurement area for both desired ABM signal and undesired ABM field may be located where the transverse magnetic measurements are optimum with regard to the requirements. However, the measurement area should be in the vicinity of the acoustic output of the WD and shall be in the same half of the phone as the WD receiver. In a WD handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.

Measurements of desired ABM signal strength and undesired ABM field are made at 2.0 mm +0.5 mm or 4 mm intervals in an X-Y measurement area patter over the entire measurement area (676 measurement points total); either all measured or measured plus interpolated.

#### Note.

- #. The EUT do not use the special HAC SW.
- #. Setting the maximum volume for EUT during the measurement.
- #. For the measurement, it doesn't use the "post-test measurement processing of results".
- #. Per KDB 285076 D01v06, handsets that that have the ability to support concurrent connections using simultaneous transmissions shall be independently tested for each air interface/band given in ANSI C63.19-2019. At the present time ANSI C63.19 does not provide simultaneous transmission test procedures.
- # Define the all applicable inpot audio level as below according to c63 and KDB 285076 D02v04:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 16 of 40

GSM input Level: -16dB UMTS input Level: -16dB VOLTE input Level: -16dB VOWIFI input Level: -16dB VONR input Level: -16dB OTT input Level: -16dB

# For GSM/UMTS/VoLTE/VOWIF test setup and input level, the correct input level definition is via a communication tester CMW500 "Decoder Cal" and "Codec Cal" to set the correct audio input levels.

# For VONR test setup and input level, the correct input level definition is via a communication tester CMX500 and External DAU USB sound card "Decoder Cal" and "Codec Cal" to set the correct audio input levels.

# CMW500 and External DAU USB sound card is able to output 1 kHz audio signal equivalent to 3.14dBm0 at "Decoder Cal". configuration, the signal reference is used to adjust the AMMI gain setting to reach-16Bm0 for GSM/UMTS/VoLTE/VONR. CMW500/CMX500 input is calibrated and the relation between the analog input voltage and the internal level in dBm0 can be determined.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Document at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 17 of 40

## 3.2.1 Define the input level for GSM/UMTS/LTE/WLAN

- 1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. The same level as for the 1kHz sine signal.
- 2. The below calculation formula is an example and showing how to determine the input level for the device.

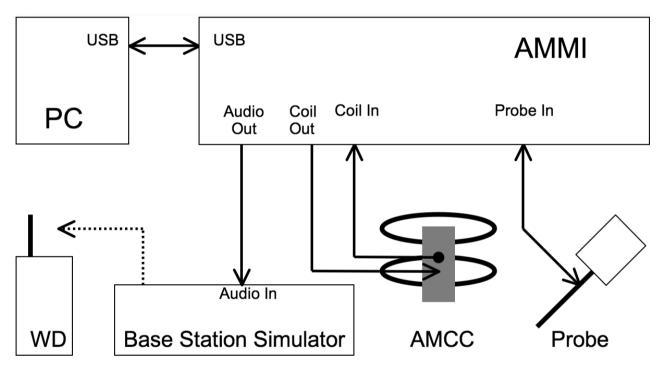


Fig. 2. T-coil signal measurement test setup

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR250200006801

Rev.: Λ1

18 of 40 Page:

The predefined signal types have the following differences / factors compared to the 1kHz sine signal:

Signal [file name]	Duration [s]	Peak-to- RMS [dB]	RMS [dB]	Required gain factor *)	Gain setting
1kHz sine		3.0	0.0	1.00	
48k_1.025kHz_10s.wav	10	3.0	0.0	1.00	
48k_1kHz_3.15kHz_10s.wav	10	6.0	-3.0	1.42	
48k_315Hz_1kHz_10s.wav	10	6.0	-2.9	1.40	
48k_csek_8k_441_white_10s.wav	10	13.8	-10.5	3.34	
48k_multisine_50-5000_10s.wav	10	11.1	-7.9	2.49	
48k_voice_1kHz_1s.wav	1	16.2	-12.7	4.33	
48k_voice_300-3000_2s.wav	2	21.6	-18.6	8.48	

<sup>(\*)</sup> The gain for the specific signal shall typically be multiplied by this factor to acheive approx, the same level as for the 1kHz sine signal.

Insert the gain applicable for your setup in the last column of the table.

### Input Level for GSM/UMTS/VoLTE/VOWIFI

put Level for Componition volute, volum							
Gain Value	dBm0	Full scal Voltage	dB	AMMI audio out dBv (RMS)	AMCC Coil Out (dBv (RMS)		
	3.14	1.5		0.55			
100	5.53		40	2.94	3.09		
8.39	-16		18.4 7		-18.44		
Signal Type	Duratio n (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting		
1kHz sine	-	3	0	1	8.39		
48k_voice_1kHz	1	15.74	-12.7	4.33	36.32		
48k_voice_300- 3000	2	21.57	-18.6	8.48	71.13		

## Define the input level for OTT.

- 1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. The same level as for the 1kHz sine signal.
- 2. The below calculation formula is an example and showing how to determine the input level for the device.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR250200006801

Rev.: Λ1

Page: 19 of 40

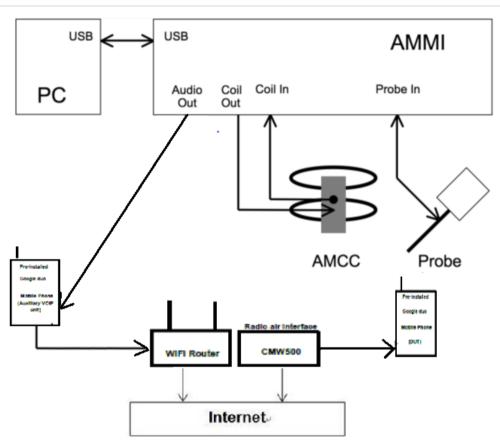


Fig. 2. T-coil signal measurement test setup

- #. Voice over Internet Protocol (VoIP) such as Google Meet application, also called IP telephony, is a methodology and group of technologies for the delivery of voice communications and multimedia sessions over Internet Protocol (IP) networks, such as the Internet. The terms Internet telephony, broadband telephony, and broadband phone service specifically refer to the provisioning of communications services (voice, fax, SMS, voice-messaging) over the public Internet, rather than via the public switched telephone network (PSTN)
- #. The Google Meet service support code and bitrate are list in section9, the customized Google Meet software is installed on a mobile phone which is used as the Auxiliary for the test. The software enables audio coding rate to be changed, and reports the input digital audio level before audio processing which can be used to calibrate the input audio level
- .#. This device comes with the preinstalled VoIP application that supports the Google Meet service and related codec. The test configuration establishes a call between the device under test and an auxiliary handset via the Google Meet server
- #. The test setup used for Google Meet VoIP call is via the data application unit on the 2G/3G/4G/5G/WiFi simulate base station, connected to the internet via the Google Meet serverr to the auxiliary device. The auxiliary device runs special software that allows the codecs and bit rate to be fixed to a specific value.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 20 of 40

Please refer to section9, an assessment was made of each of the different codec bit rates to determine the worst case for each of the different OTT transport (WiFi, LTE, GSM, WCDMA,NR)

#. The auxiliary device includes software that displays the audio level in dBFS which allows calibration of the system to establish the -16dBm0 reference level. After establishing the voice call between auxiliary device and device under test the audio output from the AMMI is injected into the auxiliary device. The gain factor to establish a reference level of -16dBm0 for use during the test is determined as detailed in the next page based on the 0dBFull Scale (0dBFS) value being equivalent to 3.14dBm0.

Input Level for OTT

input Level for O								
Gain Value		20* log(gain)		Al	MCC Coil Out		Level	
(linear)		dB		dBm0				
			0.533					
10		20		-15.78				
9.75		19.78		-22.61			-16	
Signal Type Durat		on Peak to I	_	RMS	Gain Factor	G	Sain Setting	

Signal Type	Duration (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting
1kHz sine	-	3	0	1	9.75
48k_voice_1kHz	1	15.74	-12.7	4.33	42.23
48k_voice_300-3000	2	21.57	-18.6	8.48	82.71

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 21 of 40

## 3.3 System Calibration

For correct and calibrated measurement of the voltages and ABM field, DASY will perform a calibration job as below.

In phase 1, the audio output is switched off, and a 200 mVpp symmetric rectangular signal of 1 kHz is generated and internally connected directly to both channels of the sampling unit (Coil in, Probe in).

In phase 2, the audio output is off, and a 20 mVpp symmetric 100 Hz signal is internally connected. The signals during phases 1 and 2 are available at the output on the rear panel of the AMMI. However, the output must not be loaded, in order to avoid influencing the calibration. An RMS voltmeter would indicate 100 mVRMS during the first phase and 10 mVRMS during the second phase. After the first two phases, the two input channels are both calibrated for absolute measurements of voltages. The resulting factors are displayed above the multi-meter window.

After phases 1 and 2, the input channels are calibrated to measure exact voltages. This is required to use the inputs for measuring voltages with their peak and RMS value.

In phase 3, a multi-sine signal covering each third-octave band from 50 Hz to 10 kHz is generated and applied to both audio outputs. The probe should be positioned in the center of the AMCC and aligned in the z-direction, the field orientation of the AMCC. The "Coil In" channel is measuring the voltage over the AMCC internal shunt, which is proportional to the magnetic field in the AMCC. At the same time, the "Probe In" channel samples the amplified

signal picked up by the probe coil and provides it to a numerical integrator. The ratio of the two voltages in each third-octave filter leads to the spectral representation over the frequency band of interest. The Coil signal is scaled in dBV, and the Probe signal is first integrated and normalized to show dB A/m. The ratio probe-to-coil at the frequency of 1 kHz is the sensitivity which will be used in the consecutive T-Coil jobs.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 0°

Page: 22 of 40


## 3.4 Audio Magnetic Probe AM1DV3

Description	Active single sensor probe for both axial and radial measurement scans- Fully RF shielded, compatible with DAE, with adapted probe cup	-
Dynamic Range	0.1 KHz to 20 KHz	
Sensitivity	<-50dB A/m @ 1KHz	
Internal Amp	20dB	4
Dimensions	300X18mm	
		AM1DV3 Audio Probe

## 3.5 Test Arch

Description	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	
Dimensions	length: 370 mm width: 370 mm height: 370 mm	Test Arch

## 3.6 Phone Holder

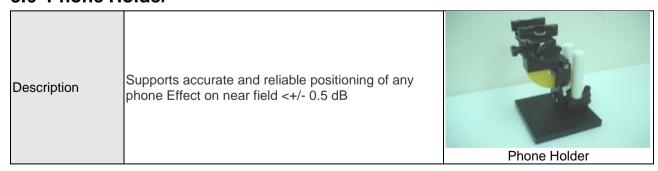

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and justication is uses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 23 of 40

## 3.7 AMCC- Audio Magnetic Calibration Coil

Allows calibration of the complete measurement setup, the two horizontal coils create a homogeneous magnetic field in the z direction.

Refer to Appendix 5 for more detail on AMCC coil



## 3.8 AMMI - Audio Magnetic Measurement Instrument

	LICD interference to DO	
Description	-USB interface to PC  - Probe signal digitization and power supply- Test signal generation for wireless device (via base station simulator)- Autocalibration and interfaces to AMCC for complete setup-calibration	AMMI AMMI
Data Rate	48 KHz / 24bit	
Dynamic Range	85 dB	
Dimensions:	19" X 65 X 270mm	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's soole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <a href="mailto:CN.Doccheck@sgs.com">CN.Doccheck@sgs.com</a>

Member of the SGS Group (SGS SA)



Report No.: SUCR250200006801

Rev.: 01

Page: 24 of 40

## 4 Measurement uncertainty evaluation

T Wicasarcinent anocitainty evaluation													
Error Description	Uncertainty Value (%)	Probability Dist.	Divisor	ci ABM1	ci ABM2	Standard Uncertainty ABM1 (%)	Standard Uncertainty ABM2 (%)						
Related to probe sensitivity							, ,						
Reference level	±3.0	R	$\sqrt{3}$	1	1	±3.0	±3.0						
AMCC geometry	±0.4	R	$\sqrt{3}$	1	1	±0.2	±0.2						
AMCC current	±0.6	R	$\sqrt{3}$	1	1	±0.4	±0.4						
Probe positioning during calibration	±0.2	R	$\sqrt{3}$	1	1	±0.1	±0.1						
Noise distribution	±0.7	R	$\sqrt{3}$	0.0143	1	±0.0	±0.4						
Frequency slope	±5.9	R	$\sqrt{3}$	0.1	1	±0.3	±3.5						
Related to probe system													
Repeatability / drift	±1.0	R	$\sqrt{3}$	1	1	±0.6	±0.6						
Linearity / dynamic range	±0.6	N	1	1	1	±0.4	±0.4						
Audio noise	±1.0	R	$\sqrt{3}$	0.1	1	±0.1	±0.6						
Probe angle	±2.3	R	$\sqrt{3}$	1	1	±1.4	±1.4						
Spectral Processing	±0.9	R	$\sqrt{3}$	1	1	±0.5	±0.5						
Integration time	±0.6	N	1	1	5	±0.6	±3.0						
Field distribution	±0.2	R	$\sqrt{3}$	1	1	±0.1	±0.1						
Test signal													
Reference signal spectrum response	±0.6	R	$\sqrt{3}$	0	1	±0.0	±0.4						
Positioning													
Probe positioning	±1.9	R	$\sqrt{3}$	1	1	±1.1	±1.1						
Phantom Thickness	±0.9	R	$\sqrt{3}$	1	1	±0.5	±0.5						
DUT positioning	±1.9	R	$\sqrt{3}$	1	1	±1.1	±1.1						
External Contributions													
RF interference	±0.0	R	$\sqrt{3}$	1	0.3	±0.0	±0.0						
Test Signal Variation	±2.0	R	$\sqrt{3}$	1	1	±1.2	±1.2						

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sas.com/en/Terms-and-Conditions.aspx">http://www.sas.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR250200006801

Rev.: 01

25 of 40 Page:

Combined Std. Uncertainty (ABM Field)	$u_{c}^{'} = \sqrt{\sum_{i=1}^{20} c_{i}^{2} u_{i}^{2}}$	±4.1	±6.2
Expanded Std. Uncertainty (K=2)		±8.2	±12.4

Measurement uncertainties for T-Coil

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sas.com/en/Terms-and-Conditions.aspx">http://www.sas.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 26 of 40

# 5 HAC (T-Coil) Measurement

## 5.1 T-Coil Performance Requirements

In order to be rated for T-Coil use, a WD shall meet the requirements for signal level and signal quality contained in this part.

### 1) T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be  $\geq -18$  dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.

## 2) Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. Figure 1 and Figure 2 provide the boundaries for the specified frequency.

These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

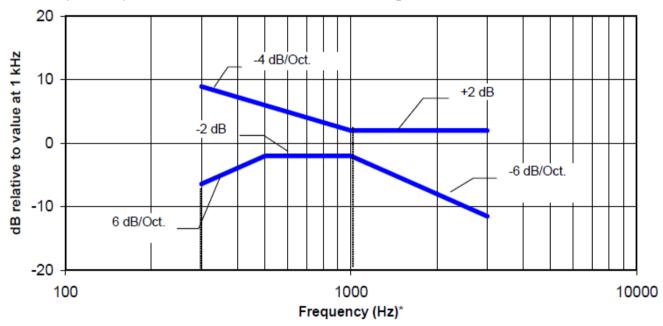


Figure 1—Magnetic field frequency response for WDs with a field ≤ −15 dB (A/m) at 1 kHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Document at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sqs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR250200006801

Rev.: 01

Page: 27 of 40

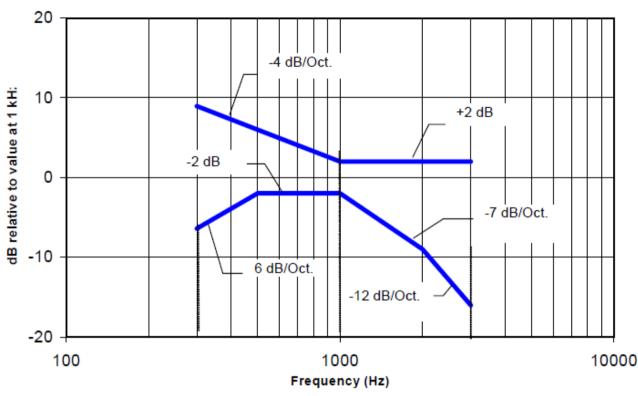


Figure 2 —Magnetic field frequency response for WDs with a field that exceeds -15dB(A/m) at 1 kHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and justication is uses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR250200006801


Rev.: 01

Page: 28 of 40

## 5.2 T-Coil measurement points and reference plane

Figure 3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

- ◆ The area is 5 cm by 5 cm.
- ◆ The area is centered on the audio frequency output transducer of the EUT.
- ♦ The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- ◆ The measurement plane is parallel to, and 10 mm in front of, the reference plane.






Figure A.4—Measurement and reference planes probe orientation for WD audio frequency magnetic field measurements

Figure 3 Axis and planes for WD audio frequency magnetic field measurements

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 29 of 40

## 5.3 T-Coil Measurement Procedure

According to ANSI C63.19-2019, section4:

This subclause describes the procedures used to measure the ABM (T-Coi) performance of the WD. Measurements shall be performed over a meastrement area 50 mm square, in the measurement plane, as specified in A.3. The measurement area shall be scanned with a uniform measurement point spacing of 2.0 mm  $\pm$  0.5 mm in each X=Y axis of the plane, yielding 676 measurement points with approximately even spacing throughout the area.

Optionally, measurement point spacing may be inereased to 4 mm, with interpolation employed to yield the required 676 equivalent measurement points distributed uniformly over the 50 mm square measurement area. Interpolated points shall be derived from the average of the linear representations of the field strengths of the nearest two or four equidistant measured points. The area of measurement is increased to a 52 mm square so that edge rows and columns of the required 50 mm square can be either measured or interpolated with none extrapolated.

In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal shall be made at the same locations. Measurements shall not include undesired influence from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load might be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there could still be RF leakage from the WD, which could interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. Al measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 6.1. If the device display can be tumed off during a phone call, then that may be done during the measurement as well. If tested with the display in the off state this shall be documented in the test report.

Measurements shall be performed with the probe coil oriented in the transverse direction, aligned in the plane of the measurement area and perpendicular to the long dimension of the WD. A multi-stage sequence consists of first measuring the field strength of the desired T-Coil signal(desired ABM signal) that is useful to a hearing aid.

T-Coil at each specified measurement point. The undesired magnetic component (undesired ABM field) is then measured in the same transverse orientation at each of the same measurement point.

The following steps summarize the basic test flow for determining desired ABM signal and undesired ABM field. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of desired ABM signal level.

To minimize the need to test every WD operating mode to the telecoil requirements of Clause 6, it is permissible to exclude some subset of supported configurations. For a given WD, every mode that supports voice communication shall be considered for telecoil testing. However, if it can be demonstrated that a certain configuration will not be the worst-case telecoil configuration, such configurations may be excluded from the fall telecoil scans of 6.4.}4 For example, operating modes may be pre-screened by scanning for both desired ABM signal and udesired ABM field at a lower measurement point density than the final scans, thus saving considerable testing time by eliminating configurations that are excellent performers from more detailed testing for worst-case.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.ferms-end-Conditions-ferms-end-Conditions-end-Conditions-end-Conditions-ferms-end-Conditions-end-Conditi

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sqs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 30 of 40

Many factors could affect telecoil test results. RF power level and amplitude modulation characteristics as well as the specific curent paths within the WD associated with the RF output stage(s), the display, and processing circuitry could affect the undesired ABM field. Audio codec implementation and acoustic receiver characteristies could also affect the desired ABM signal).

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 31 of 40

## 6 T-Coil testing for CMRS Voice

## 6.1 General Description

## 1. Codec Investigation:

This clause describes the measurement of the baseband (audio frequency) magnetic T-Coil signal from a WD. The goal is to evaluate the size of the area where a user could position their WD relative to their hearing aid's telecoil and receive an acceptable magnetically coupled signal. Three quantities are measured and evaluated. The first is the field strength of the desired signal at the center of the audio band (desired ABM signal). The second is the frequency response of the desired signal measured across the audio band. The third is the field strength of the undesired audio band magnetic field.

#### 2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of

changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the

observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice

service/air interface.

b. According to the ANSI C63.19 2019 section 6.3.4, test middle channel of each frequency band for HAC testing

for each orientation to determine worst HAC T-Coil.

c. Opening the Hearing-aid can improve the HAC T-Coil performance of the earpiece.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 32 of 40

## 6.2 GSM Tests Results

**Codec Investigation:** 

Ocaco mive	sodes investigation.												
Air Interface	Modulation	Channel Sample		Codec Primary Contiguo Point Cou		Secondary Group Contiguous Point Count	Frequency Response	Date					
GSM850	Voice	190	#1	AMR NB FR	57	273	PASS	2025/1/18					
GSM850	Voice	190	#1	EFR (FR V2)	58	269	PASS	2025/1/18					

Remark: According to codec investigation, the worst codec is AMR NB FR

Air Interface Investigation:

Air Interface	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Frequency Response	Date
GSM850	Voice	190	#1	AMR NB FR	57	273	PASS	2025/1/18
GSM1900	Voice	661	#1	AMR NB FR	50	252	PASS	2025/1/19

#### Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR250200006801

01 Rev.:

33 of 40 Page:

#### 6.3 **UMTS Tests Results**

Codec Investigation:

Air Interface	Modulati		Sampl e	Codec	Group	Secondary Group Contiguou s Point Count	Group May	Secondary Group Max Transvers e	ncy	Date
WCDMA II	Voice	9400	#1	AMR NB 4.75Kbps	191	468	26	26	PASS	2025/1/19
WCDMA II	Voice	9400	#1	AMR NB12.2Kbps	195	457	26	26	PASS	2025/1/19
WCDMA II	Voice	9400	#1	AMR WB 6.60Kbps	192	471	26	26	PASS	2025/1/19
WCDMA II	Voice	9400	#1	AMR WB 23.85Kbps	198	473	26	26	PASS	2025/1/19

Remark: According to codec investigation, the worst codec is AMR NB 4.75Kbps

Air Interface Investigation:

Air Interface		Channel	Sampl e	Codec	Group	Cantinuou	Group May	Group Max	iicy	Data
WCDMA II	Voice	9400	#1	AMR NB 4.75Kbps	191	468	26	26	PASS	2025/1/19
WCDMA IV	Voice	1412	#1	AMR WB 6.60Kbps	190	467	26	26	PASS	2025/1/19
WCDMA V	Voice	4183	#1	AMR WB 6.60Kbps	193	466	26	26	PASS	2025/1/19

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR250200006801

Rev.: Λ1

Page: 34 of 40

#### T-Coil testing for CMRS IP Voice 7

#### 7.1 **VoLTE Tests Results**

## 1. Codec Investigation:

For a voice service/air interface, investigate the variations of codec configurations (NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel / band, the following worst investigation codec would be remarked to be used for the testing for the handset.

#### 2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands / channel / bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the

b. Select LTE FDD one frequency band to do measurement at the worst Primary Group Contiguous Point Count position was additionally performed with varying the BWs/Modulations/RB size to verify the variation to find out worst configuration, the observed variation is very little to be within 1.5 dB which is much less than the margin from the rating threshold.

LTE FDD Codec Investigation:

Air Interface	BW	Modulatio n	RB	RB	Channel	Sampl e		Primar y Group Contig uous Point Count		Group Max	Group Max Transv	Freque ncy Respo nse	Date
LTE Band 2	20	QPSK	1	0	18900	#2	AMR NB 4.75Kbps	182	456	25	26	PASS	2025/1/20
LTE Band 2	20	QPSK	1	0	18900	#2	AMR NB 12.2Kbps	188	460	25	26	PASS	2025/1/20
LTE Band 2	20	QPSK	1	0	18900	#2	AMR WB 6.60Kbps	193	478	26	26	PASS	2025/1/20
LTE Band 2	20	QPSK	1	0	18900	#2	AMR WB 23.85Kbps	195	477	26	26	PASS	2025/1/20
LTE Band 2	20	QPSK	1	0	18900	#2	EVS NB 5.9Kbps	184	460	26	26	PASS	2025/1/20
LTE Band 2	20	QPSK	1	0	18900	#2	EVS NB 24.4Kbps	186	465	26	26	PASS	2025/1/20
LTE Band 2	20	QPSK	1	0	18900	#2	EVS WB 5.9Kbps	150	468	26	26	PASS	2025/1/20
LTE Band 2	20	QPSK	1	0	18900	#2	EVS WB 24.4Kbps	155	471	26	26	PASS	2025/1/20
LTE Band 2	20	QPSK	50	0	18900	#2	EVS WB 5.9Kbps	163	479	26	26	PASS	2025/1/20
LTE Band 2	20	QPSK	100	0	18900	#2	EVS WB 5.9Kbps	167	480	26	26	PASS	2025/1/20
LTE Band 2	20	16QAM	1	0	18900	#2	EVS WB 5.9Kbps	156	472	26	26	PASS	2025/1/20
LTE Band 2	20	64QAM	1	0	18900	#2	EVS WB 5.9Kbps	166	482	26	26	PASS	2025/1/20
LTE Band 2	15	QPSK	1	0	18900	#2	EVS WB 5.9Kbps	169	468	26	26	PASS	2025/1/20
LTE Band 2	10	QPSK	1	0	18900	#2	EVS WB 5.9Kbps	159	471	26	26	PASS	2025/1/20
LTE Band 2	5	QPSK	1	0	18900	#2	EVS WB 5.9Kbps	163	472	26	26	PASS	2025/1/20
LTE Band 2	3	QPSK	1	0	18900	#2	EVS WB 5.9Kbps	164	477	26	26	PASS	2025/1/20
LTE Band 2	1.4	QPSK	1	0	18900	#2	EVS WB 5.9Kbps	166	473	26	26	PASS	2025/1/20

#### Remark:

- Select Worst worst codec Bandwidth/Modulation/RB Size from LTE FDD Test results to do LTE FDD
- Select Worst Bandwidth/Modulation/RB Size from LTE FDD Test results to do LTE FDD
- According to codec investigation, the worst codec is EVS WB 5.9Kbps

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

01 Rev.:

35 of 40 Page:

#### Air interface:

Air Interface	BW	Modul ation	RB	RB	Channel	Sampl e		Primary Group Contigu ous Point Count	Group Contig uous Point	Secon dary Group Max	dary Group Max Transv	Resp	Date
LTE Band 7	20	QPSK	1	0	21100	#2	EVS WB 5.9Kbps	148	456	26	26	PASS	2025/1/20
LTE Band 12(17)	10	QPSK	1	0	23095	#2	EVS WB 5.9Kbps	158	465	26	26	PASS	2025/1/21
LTE Band 13	10	QPSK	1	0	23230	#2	EVS WB 5.9Kbps	162	462	26	26	PASS	2025/1/21
LTE Band 26(5)	15	QPSK	1	0	26865	#2	EVS WB 5.9Kbps	145	449	26	26	PASS	2025/1/21
LTE Band 66(4)	20	QPSK	1	0	132322	#2	EVS WB 5.9Kbps	155	455	25	26	PASS	2025/1/21

- 1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A

#### LTE TDD Codec Investigation:

Air Interface	BW	Modula tion	RB	RB	Chann el	Sample	Codec	Primary Group Contigu ous Point Count	Secon dary Group Contig uous Point Count	dary	Trans	Frequ ency Respo nse	Date
LTE Band 41(38)	20	QPSK	1	0	40620	#2	AMR NB 4.75Kbps	86	344	16	26	PASS	2025/1/21
LTE Band 41(38)	20	QPSK	1	0	40620	#2	AMR NB 12.2Kbps	89	347	16	26	PASS	2025/1/21
LTE Band 41(38)	20	QPSK	1	0	40620	#2	AMR WB 6.60Kbps	86	346	16	26	PASS	2025/1/21
LTE Band 41(38)	20	QPSK	1	0	40620	#2	AMR WB 23.85Kbps	88	346	16	26	PASS	2025/1/21
LTE Band 41(38)	20	QPSK	1	0	40620	#2	EVS NB 5.9Kbps	83	342	16	26	PASS	2025/1/21
LTE Band 41(38)	20	QPSK	1	0	40620	#2	EVS NB 24.4Kbps	84	344	16	26	PASS	2025/1/21
LTE Band 41(38)	20	QPSK	1	0	40620	#2	EVS WB 5.9Kbps	82	356	16	26	PASS	2025/1/21
LTE Band 41(38)	20	QPSK	1	0	40620	#2	EVS WB 24.4Kbps	87	351	16	26	PASS	2025/1/21
LTE Band 41(38)	20	QPSK	50	0	40620	#2	EVS WB 5.9Kbps	89	356	16	26	PASS	2025/1/21
LTE Band 41(38)	20	QPSK	100	0	40620	#2	EVS WB 5.9Kbps	91	355	16	26	PASS	2025/1/21
LTE Band 41(38)	20	16QAM	1	0	40620	#2	EVS WB 5.9Kbps	90	359	16	26	PASS	2025/1/21
LTE Band 41(38)	20	64QAM	1	0	40620	#2	EVS WB 5.9Kbps	89	354	16	26	PASS	2025/1/21
LTE Band 41(38)	15	QPSK	1	0	40620	#2	EVS WB 5.9Kbps	88	356	16	26	PASS	2025/1/21
LTE Band 41(38)	10	QPSK	1	0	40620	#2	EVS WB 5.9Kbps	94	355	16	26	PASS	2025/1/21
LTE Band 41(38)	5	QPSK	1	0	40620	#2	EVS WB 5.9Kbps	91	353	16	26	PASS	2025/1/21

- 1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR250200006801

Rev.: Λ1

Page: 36 of 40

#### 7.2 **VoWiFi Tests Results**

#### 1. Codec Investigation:

For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.

#### 2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of

changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of

observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice

service/air interface and the following worst configure would be remarked to be used for the testing for the handset.

b. Select WLAN 2.4GHz, WLAN5GHz and WLAN6GHz one frequency band to do measurement at the worst Primary Group Contiguous Point Count position was additionally performed with varying the BWs/Modulations/data rate to verify the variation to find out worst configuration, the observed variation is very little to be within 1 dB which is much less than the margin from the rating threshold.

Air Interface	BW	Modulatio n	Channel	Sample	Codec	Primar y Group Contig uous Point Count	Second ary Group Contigu ous Point Count	dary Group Max	dary Group Max Transv	Freque ncy Respo nse	Date
802.11b	20	1M	6	#1	AMR NB 4.75Kbps	140	400	19	26	PASS	2025/1/22
802.11b	20	1M	6	#1	AMR NB12.2Kbps	144	406	19	26	PASS	2025/1/22
802.11b	20	1M	6	#1	AMR WB 6.60Kbps	143	410	19	26	PASS	2025/1/22
802.11b	20	1M	6	#1	AMR WB 23.85Kbps	151	413	19	26	PASS	2025/1/22
802.11b	20	1M	6	#1	EVS NB 5.9Kbps	164	434	23	26	PASS	2025/1/22
802.11b	20	1M	6	#1	EVS NB 24.4Kbps	166	435	23	26	PASS	2025/1/22
802.11b	20	1M	6	#1	EVS WB 5.9Kbps	120	410	20	26	PASS	2025/1/22
802.11b	20	1M	1	#1	EVS WB 5.9Kbps	128	417	20	26	PASS	2025/1/22
802.11b	20	1M	11	#1	EVS WB 5.9Kbps	125	415	20	26	PASS	2025/1/22
802.11b	20	1M	6	#1	EVS WB 24.4Kbps	128	414	20	26	PASS	2025/1/22
802.11b	20	11M	6	#1	EVS WB 5.9Kbps	131	420	20	26	PASS	2025/1/22
802.11g	20	6M	6	#1	EVS WB 5.9Kbps	123	416	20	26	PASS	2025/1/22
802.11g	20	54M	6	#1	EVS WB 5.9Kbps	127	419	20	26	PASS	2025/1/22
802.11n-HT20	20	MCS0	6	#1	EVS WB 5.9Kbps	121	409	21	26	PASS	2025/1/22
802.11n-HT20	20	MCS7	6	#1	EVS WB 5.9Kbps	125	413	21	26	PASS	2025/1/22

#### Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Member of the SGS Group (SGS SA)



Report No.: SUCR250200006801

Rev.: 01

Page: 37 of 40

## 7.3 T-Coil testing for OTT VoIP Application

- 1. The Google Meet only support OPUS audio codec and support 6kbps to 75kbps bitrate.
- 2. The test setup used for OTT VoIP call is the DUT connect to the CMW500/CMX500 and via the data application unit on CMW500/CMX500 connection to the Internet, the Auxiliary EUT is connected to the WiFi access point, the channel/Modulation/Frequency bands/data rate is configured on the CMW500/CMX500 for the DUT unit. For the Auxiliary VoIP unit which is used to configure the audio codec rate and determine the audio.
- 3. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following tests results which the worst-case codec would be remarked to be used for the testing for the handset.
- 4. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of

changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the

observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.

#### Air interface:

#### GSM:

Air Interface	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Frequency Response	Date
GSM1900	EDGE	661	#1	OPUS 6kbps	69	292	PASS	2025/2/12
GSM1900	EDGE	661	#1	OPUS 40kbps	71	294	PASS	2025/2/12
GSM1900	EDGE	661	#1	OPUS 75kbps	75	299	PASS	2025/2/12

#### WCDMA:

110011171										
Air Interface	Modul ation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count		Secondary Group Max	Frequency Response	Date
WCDMA IV	HSPA	1412	#1	OPUS 6kbps	154	374	21	26	PASS	2025/2/12
WCDMA IV	HSPA	1412	#1	OPUS 40kbps	158	381	21	26	PASS	2025/2/12
WCDMA IV	HSPA	1412	#1	OPUS 75kbps	160	382	21	26	PASS	2025/2/12

#### LTE FDD:

Air Interface	BW	Modulatio n	RB	RB	Channel	Sampl e	Codec	Primar y Group Contig uous Point Count	Group Conti guous	dary Group Max Longit	Group Max Trans	Frequ ency Respo nse	Date
LTE Band 26(5)	15	QPSK	1	0	26865	#1	OPUS 6kbps	174	401	21	26	PASS	2025/2/12
LTE Band 26(5)	15	QPSK	1	0	26865	#1	OPUS 40kbps	183	411	21	26	PASS	2025/2/12
LTE Band 26(5)	15	QPSK	1	0	26865	#1	OPUS 75kbps	180	406	21	26	PASS	2025/2/12

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 38 of 40

#### LTE TDD:

Air Interface	BW	Modula tion	RB	RB	Channe I	Sampl e		Primary Group Contigu ous Point Count	Groun	Seconda ry Group	Seconda ry Group Max Transver se	Freque ncy Respo nse	Date
LTE Band 41(38)	20	QPSK	1	0	40620	#1	OPUS 6kbps	106	316	14	26	PASS	2025/2/12
LTE Band 41(38)	20	QPSK	1	0	40620	#1	OPUS 40kbps	107	318	14	26	PASS	2025/2/12
LTE Band 41(38)	20	QPSK	1	0	40620	#1	OPUS 75kbps	114	320	14	26	PASS	2025/2/12

#### WIFI:

Air Interface	BW	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secon dary Group Contig uous Point Count	Secon dary Group Max	dary Group Max Transv	Respo	Date
802.11b	20	1M	6	#1	OPUS 6kbps	140	352	17	26	PASS	2025/2/12
802.11b	20	1M	6	#1	OPUS 40kbps	144	361	17	26	PASS	2025/2/12
802.11b	20	1M	6	#1	OPUS 75kbps	145	363	17	26	PASS	2025/2/12

#### Remark:

- 1. Phone Condition: Air Link; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A.
- 3. According to the manufacturer's statement, NR OTT selects the worst mode in LTE for testing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR250200006801

01 Rev.:

39 of 40 Page:

#### **Equipment list** 8

	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
	Software	SPEAG	DASY8	NA	NCR	NCR
$\boxtimes$	DAE	SPEAG	DAE4	1374	2024-10-30	2025-10-29
	Audio Magnetic 1D Field Probe	SPEAG	AM1DV3	3115	2024-08-15	2025-08-14
$\boxtimes$	Test Arch SD HAC	SPEAG	NA	NA	NCR	NCR
$\boxtimes$	Audio Magnetic Measuring Instrument	SPEAG	AMMI	1028	NCR	NCR
$\boxtimes$	Audio Magnetic	SPEAG	AMCC	1143	N/A	N/A
	Universal Radio Communication Tester	R&S	CMW500	111637	2024-09-10	2025-09-09
$\boxtimes$	RADIO COMMUNICATION TESTR	R&S	CMX500	101930	2025-01-16	2026-01-15
	Humidity and Temperature Indicator	MingGao	MingGao	NA	2024-06-13	2025-06-12

#### Note:

1. All the equipments are within the valid period when the tests are performed.

2. NCR: "No-Calibration Required".

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR250200006801

Rev.: 01

Page: 40 of 40

9 Calibration certificate

Please see the Appendix B

10 Photographs

Please see the Appendix C

**Appendix A: Detailed Test Results** 

**Appendix B: Calibration certificate** 

**Appendix C: Photographs** 

---End of Report---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980