



Mode:	BAND2-18700
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

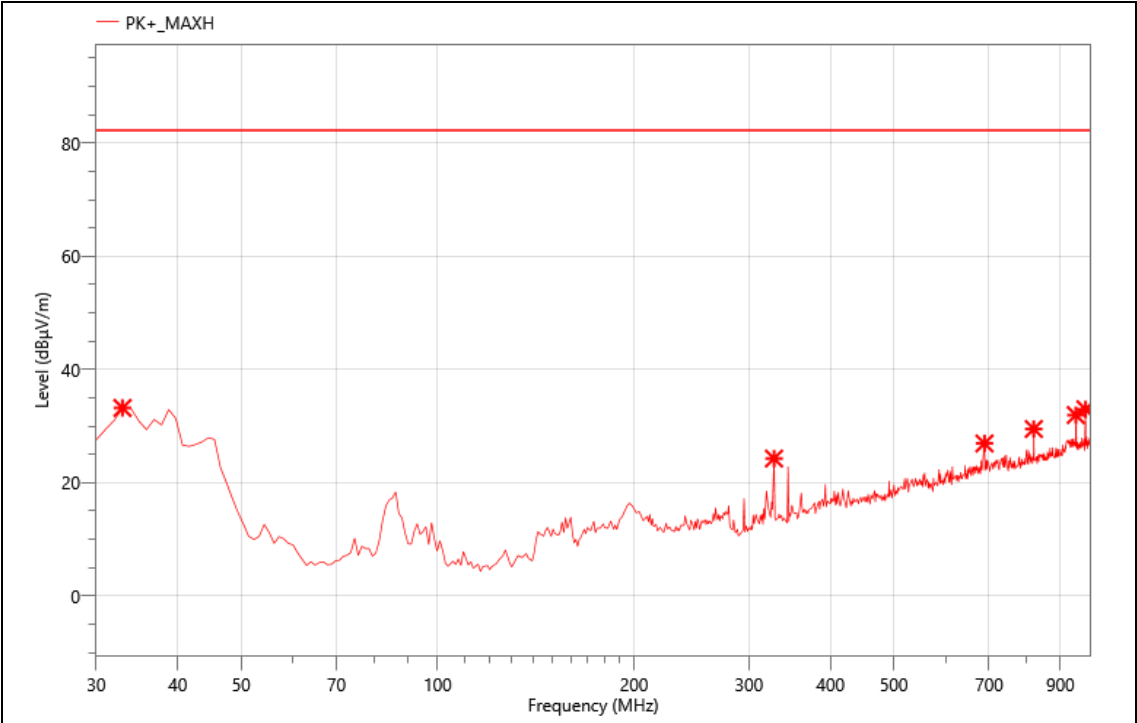

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	32.910	49.24	-16.04	33.20	82.30	49.10	PK+	V
2	327.790	41.41	-17.15	24.26	82.30	58.04	PK+	V
3	688.630	34.13	-7.2	26.93	82.30	55.37	PK+	V
4	819.580	34.96	-5.47	29.49	82.30	52.81	PK+	V
5	950.530	34.34	-2.4	31.94	82.30	50.36	PK+	V
6	983.510	35.57	-2.61	32.96	82.30	49.34	PK+	V

Mode:	BAND2-18700
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

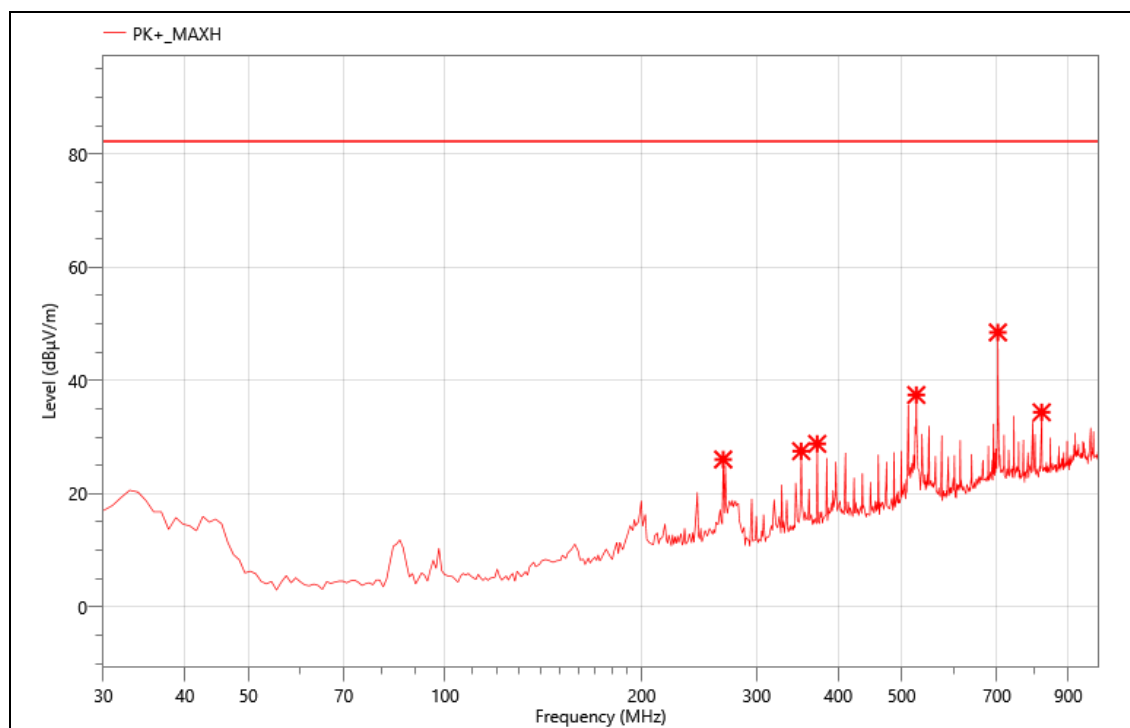


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	266.680	44.21	-18.17	26.04	82.30	56.26	PK+	H
2	351.070	43.64	-16.13	27.51	82.30	54.79	PK+	H
3	371.440	43.96	-15.16	28.80	82.30	53.50	PK+	H
4	526.640	48.05	-10.61	37.44	82.30	44.86	PK+	H
5	702.210	55.42	-6.93	48.49	82.30	33.81	PK+	H
6	819.580	39.84	-5.47	34.37	82.30	47.93	PK+	H

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND4-20050
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

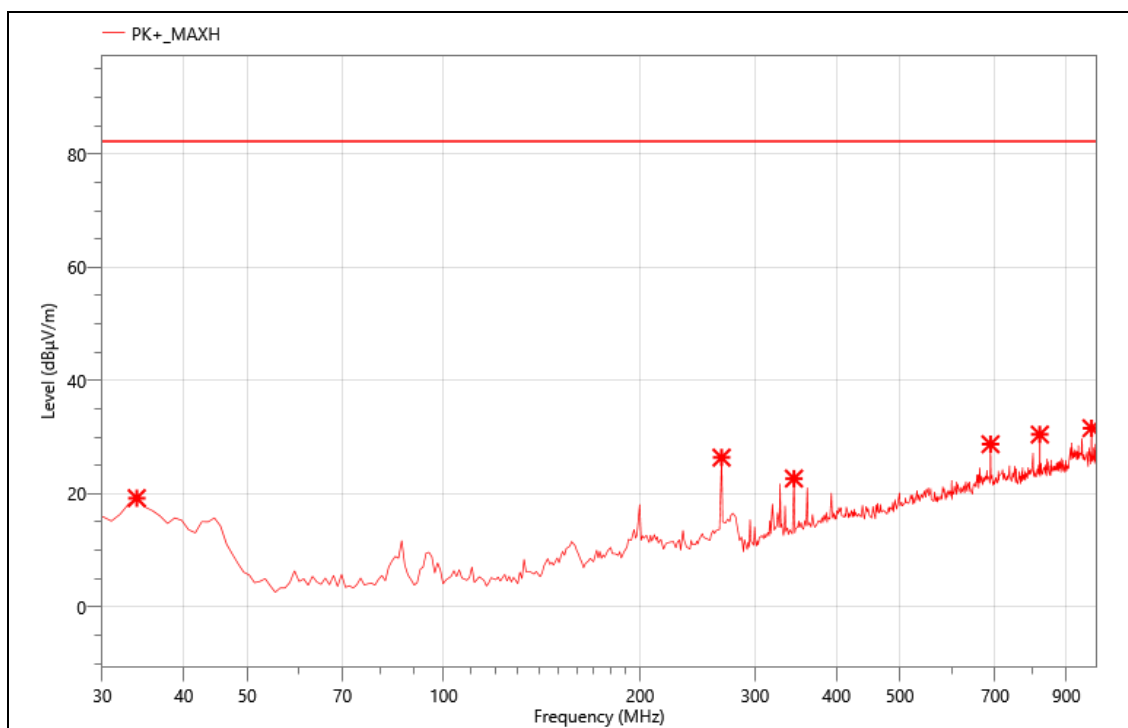

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	35.83	-16.63	19.20	82.30	63.10	PK+	H
2	266.680	44.54	-18.17	26.37	82.30	55.93	PK+	H
3	344.280	39.15	-16.48	22.67	82.30	59.63	PK+	H
4	688.630	35.93	-7.2	28.73	82.30	53.57	PK+	H
5	819.580	35.92	-5.47	30.45	82.30	51.85	PK+	H
6	983.510	34.17	-2.61	31.56	82.30	50.74	PK+	H

Mode:	BAND4-20050
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

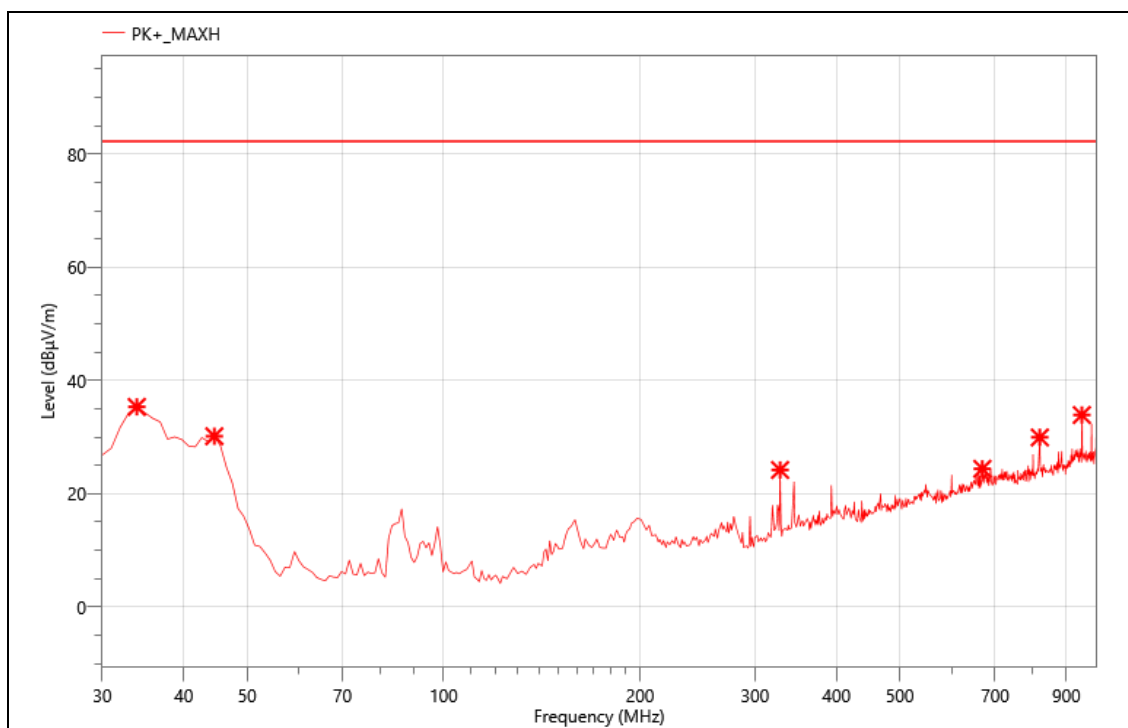


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	51.96	-16.63	35.33	82.30	46.97	PK+	V
2	44.550	52.35	-22.21	30.14	82.30	52.16	PK+	V
3	327.790	41.34	-17.15	24.19	82.30	58.11	PK+	V
4	669.230	31.84	-7.45	24.39	82.30	57.91	PK+	V
5	819.580	35.41	-5.47	29.94	82.30	52.36	PK+	V
6	950.530	36.30	-2.4	33.90	82.30	48.40	PK+	V

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND5-20450
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

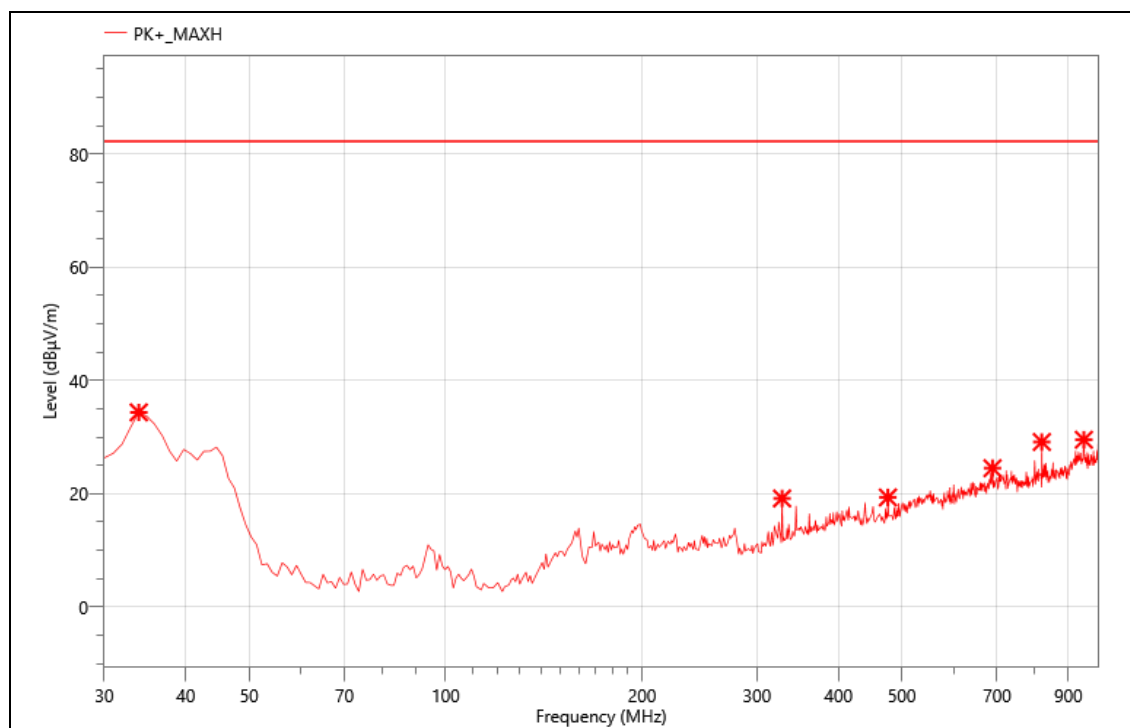

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	50.99	-16.63	34.36	82.30	47.94	PK+	V
2	327.790	36.30	-17.15	19.15	82.30	63.15	PK+	V
3	476.200	32.20	-12.87	19.33	82.30	62.97	PK+	V
4	688.630	31.70	-7.2	24.50	82.30	57.80	PK+	V
5	819.580	34.60	-5.47	29.13	82.30	53.17	PK+	V
6	950.530	31.93	-2.4	29.53	82.30	52.77	PK+	V

Mode:	BAND5-20450
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

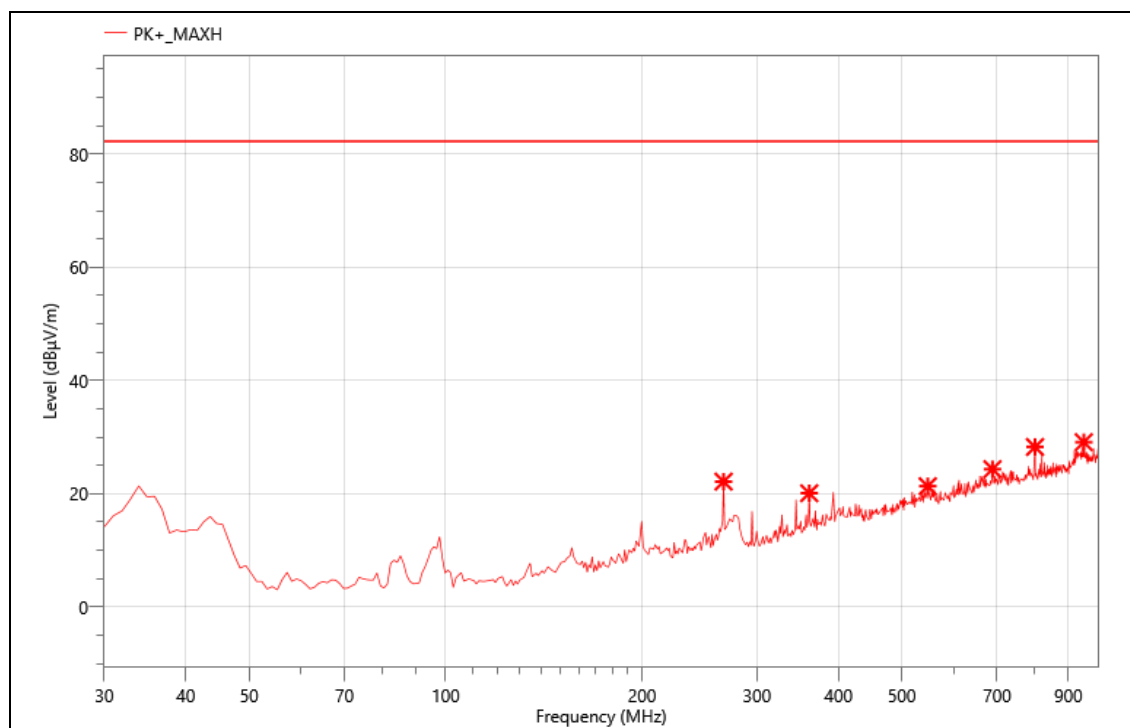


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	266.680	40.30	-18.17	22.13	82.30	60.17	PK+	H
2	360.770	35.73	-15.65	20.08	82.30	62.22	PK+	H
3	547.980	30.90	-9.58	21.32	82.30	60.98	PK+	H
4	688.630	31.53	-7.2	24.33	82.30	57.97	PK+	H
5	800.180	34.01	-5.76	28.25	82.30	54.05	PK+	H
6	950.530	31.50	-2.4	29.10	82.30	53.20	PK+	H

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND7-20850
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

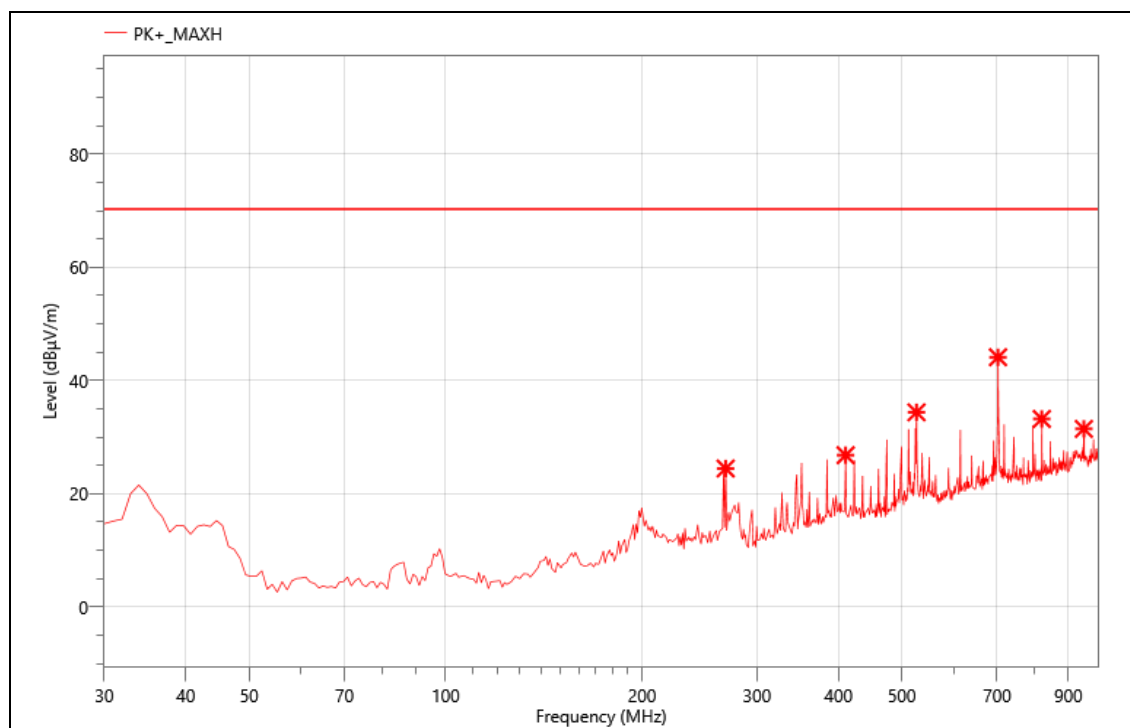

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	268.620	42.79	-18.35	24.44	70.25	45.81	PK+	H
2	410.240	40.25	-13.45	26.80	70.25	43.45	PK+	H
3	526.640	44.98	-10.61	34.37	70.25	35.88	PK+	H
4	702.210	51.04	-6.93	44.11	70.25	26.14	PK+	H
5	819.580	38.67	-5.47	33.20	70.25	37.05	PK+	H
6	950.530	33.84	-2.4	31.44	70.25	38.81	PK+	H

Mode:	BAND7-20850
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

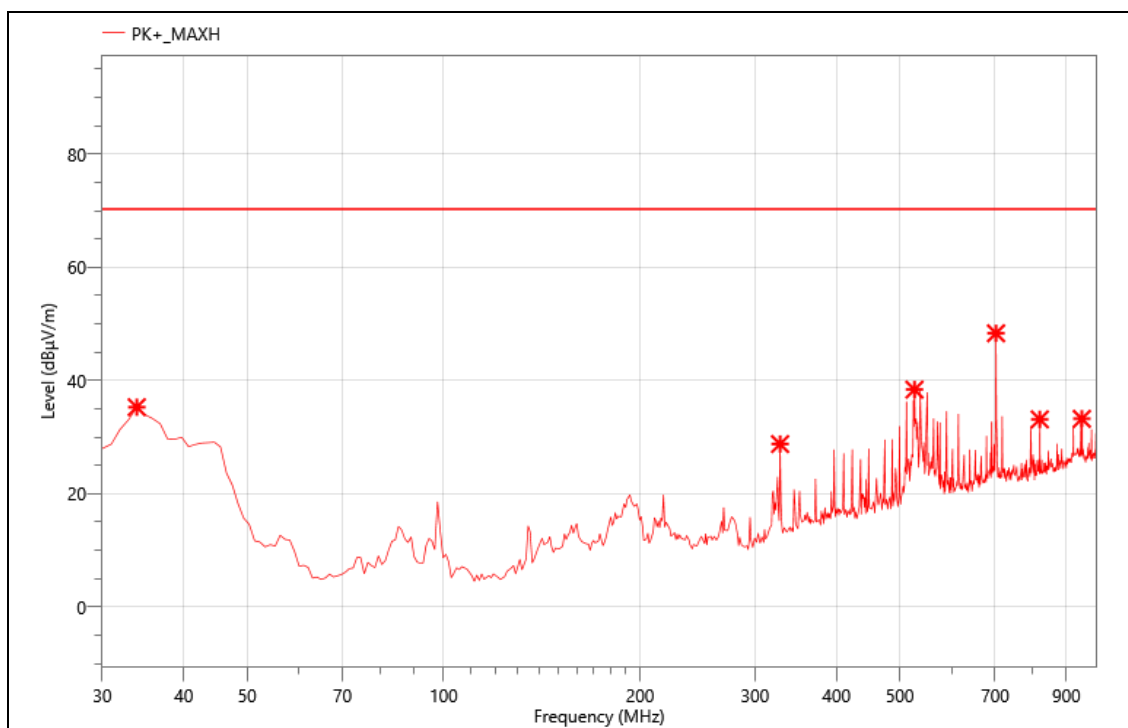


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	51.91	-16.63	35.28	70.25	34.97	PK+	V
2	327.790	45.91	-17.15	28.76	70.25	41.49	PK+	V
3	526.640	48.99	-10.61	38.38	70.25	31.87	PK+	V
4	702.210	55.27	-6.93	48.34	70.25	21.91	PK+	V
5	819.580	38.60	-5.47	33.13	70.25	37.12	PK+	V
6	950.530	35.62	-2.4	33.22	70.25	37.03	PK+	V

Note: Limit= -25dBm+95.25=70.25 dBuV/m

Remark: 1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
 2. Margin = Result - Limit


Mode:	BAND2-18700
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

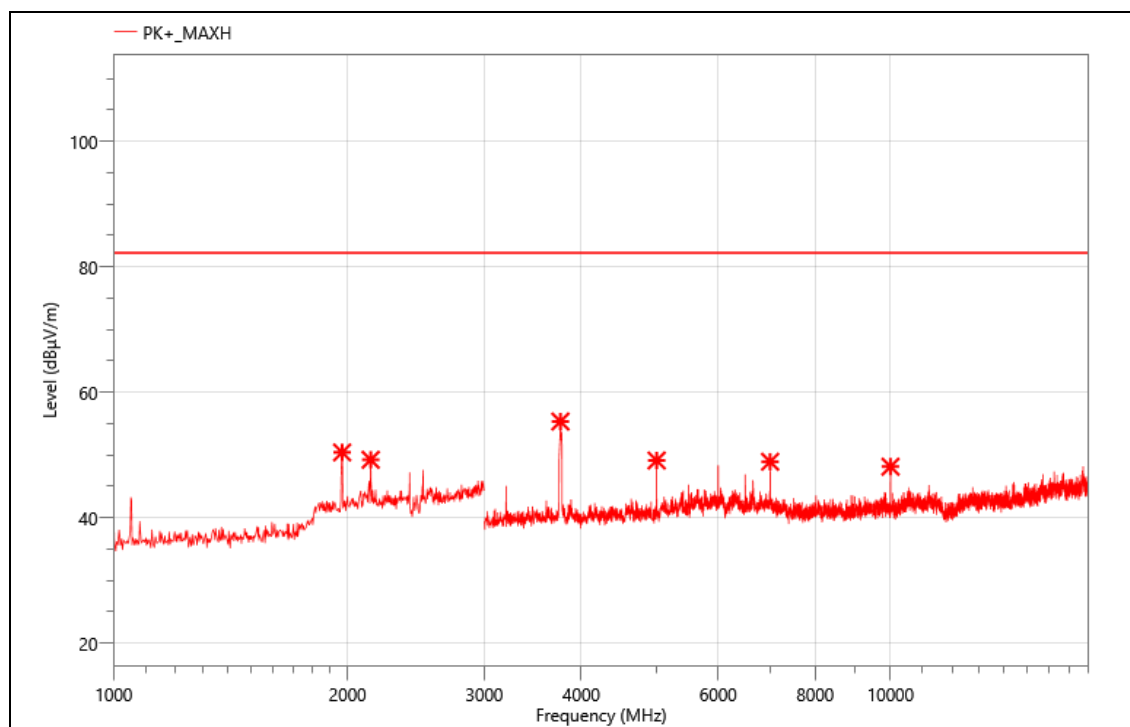

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1968.000	59.70	-9.3	50.40	82.30	31.90	PK+	V
2	2142.000	58.28	-9.05	49.23	82.30	33.07	PK+	V
3	3759.000	68.79	-13.46	55.33	82.30	26.97	PK+	V
4	4999.500	60.29	-11.18	49.11	82.30	33.19	PK+	V
5	6999.000	56.70	-7.79	48.91	82.30	33.39	PK+	V
6	10000.500	54.29	-6.17	48.12	82.30	34.18	PK+	V


Mode:	BAND2-18700
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

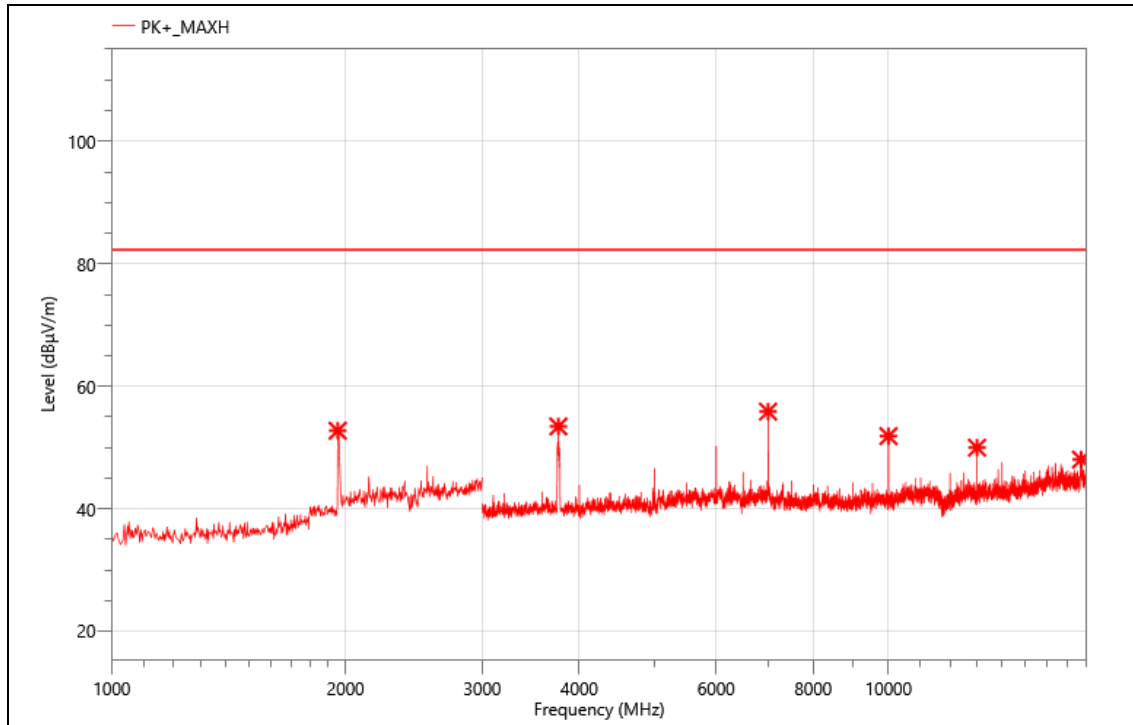

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1954.000	62.27	-9.52	52.75	82.30	29.55	PK+	H
2	3759.000	66.91	-13.46	53.45	82.30	28.85	PK+	H
3	6999.000	63.66	-7.79	55.87	82.30	26.43	PK+	H
4	10000.500	58.04	-6.17	51.87	82.30	30.43	PK+	H
5	13000.500	54.49	-4.51	49.98	82.30	32.32	PK+	H
6	17698.500	47.84	0.19	48.03	82.30	34.27	PK+	H


Mode:	BAND2-18900
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

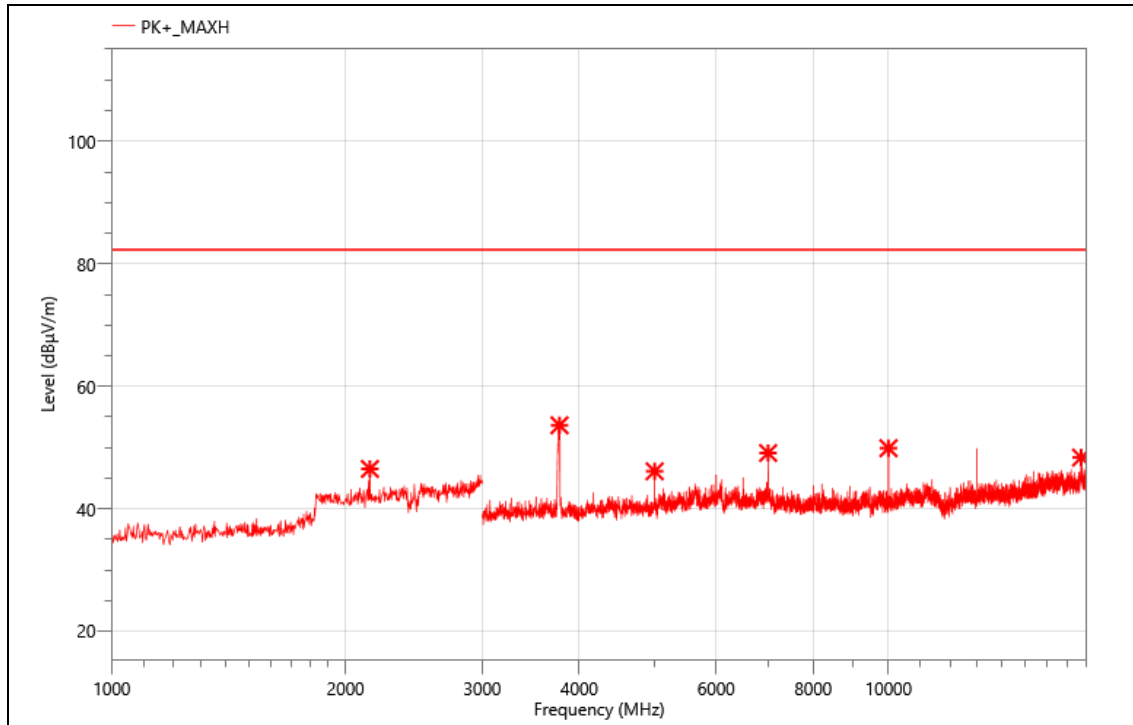

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2150.000	55.56	-9.05	46.51	82.30	35.79	PK+	H
2	3771.000	67.08	-13.44	53.64	82.30	28.66	PK+	H
3	4999.500	57.30	-11.18	46.12	82.30	36.18	PK+	H
4	6999.000	56.90	-7.79	49.11	82.30	33.19	PK+	H
5	10000.500	56.07	-6.17	49.90	82.30	32.40	PK+	H
6	17701.500	48.22	0.14	48.36	82.30	33.94	PK+	H


Mode:	BAND2-18900
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

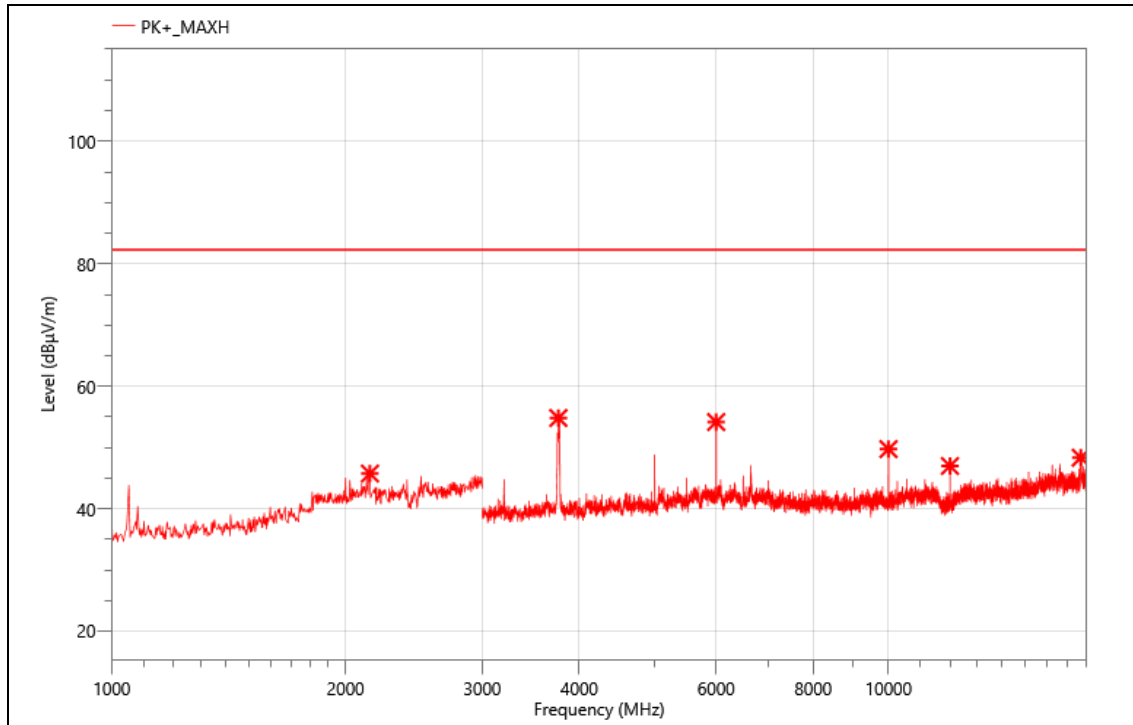

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2150.000	54.80	-9.05	45.75	82.30	36.55	PK+	V
2	3759.000	68.29	-13.46	54.83	82.30	27.47	PK+	V
3	6000.000	63.04	-8.87	54.17	82.30	28.13	PK+	V
4	10000.500	55.92	-6.17	49.75	82.30	32.55	PK+	V
5	12000.000	51.35	-4.36	46.99	82.30	35.31	PK+	V
6	17682.000	48.06	0.28	48.34	82.30	33.96	PK+	V


Mode:	BAND2-19100
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

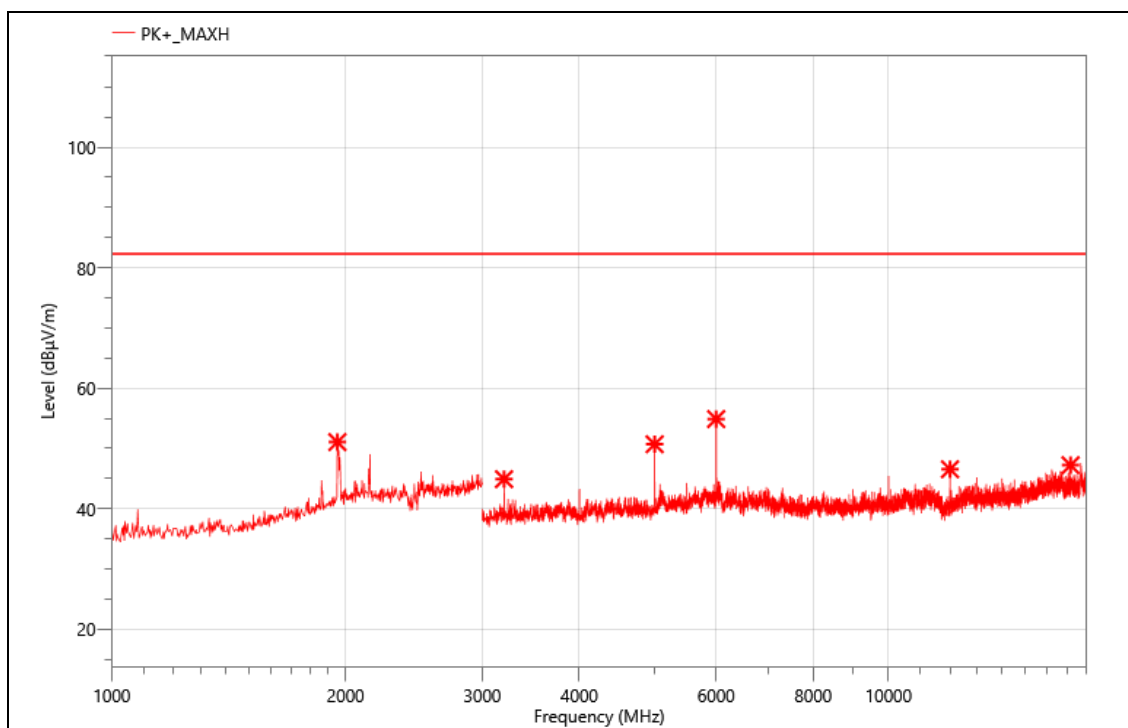

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1952.000	60.62	-9.55	51.07	82.30	31.23	PK+	V
2	3199.500	59.72	-14.8	44.92	82.30	37.38	PK+	V
3	4999.500	61.89	-11.18	50.71	82.30	31.59	PK+	V
4	6000.000	63.76	-8.87	54.89	82.30	27.41	PK+	V
5	12000.000	50.93	-4.36	46.57	82.30	35.73	PK+	V
6	17157.000	48.20	-0.96	47.24	82.30	35.06	PK+	V

Mode:	BAND2-19100
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

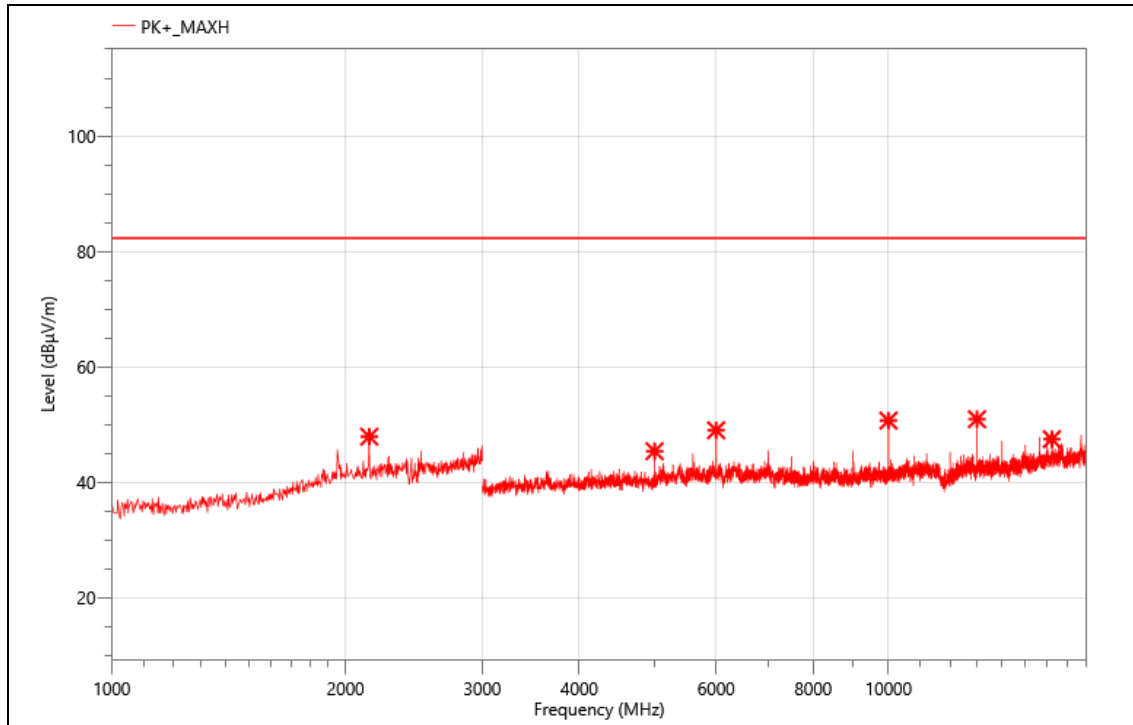


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2146.000	57.00	-9.05	47.95	82.30	34.35	PK+	H
2	4999.500	56.61	-11.18	45.43	82.30	36.87	PK+	H
3	6000.000	57.93	-8.87	49.06	82.30	33.24	PK+	H
4	10000.500	56.91	-6.17	50.74	82.30	31.56	PK+	H
5	13000.500	55.48	-4.51	50.97	82.30	31.33	PK+	H
6	16231.500	48.47	-0.96	47.51	82.30	34.79	PK+	H

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND4-20050
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

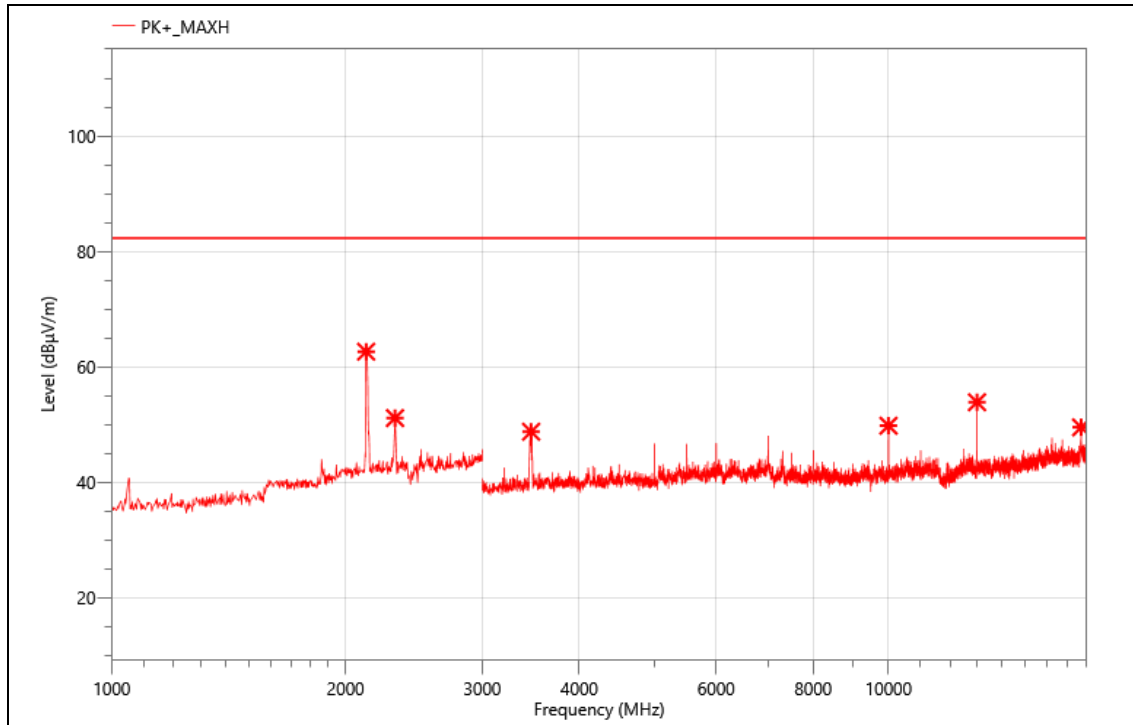

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2126.000	71.75	-9.07	62.68	82.30	19.62	PK+	H
2	2316.000	59.98	-8.8	51.18	82.30	31.12	PK+	H
3	3466.500	63.01	-14.2	48.81	82.30	33.49	PK+	H
4	10000.500	56.02	-6.17	49.85	82.30	32.45	PK+	H
5	13000.500	58.44	-4.51	53.93	82.30	28.37	PK+	H
6	17703.000	49.46	0.11	49.57	82.30	32.73	PK+	H


Mode:	BAND4-20050
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

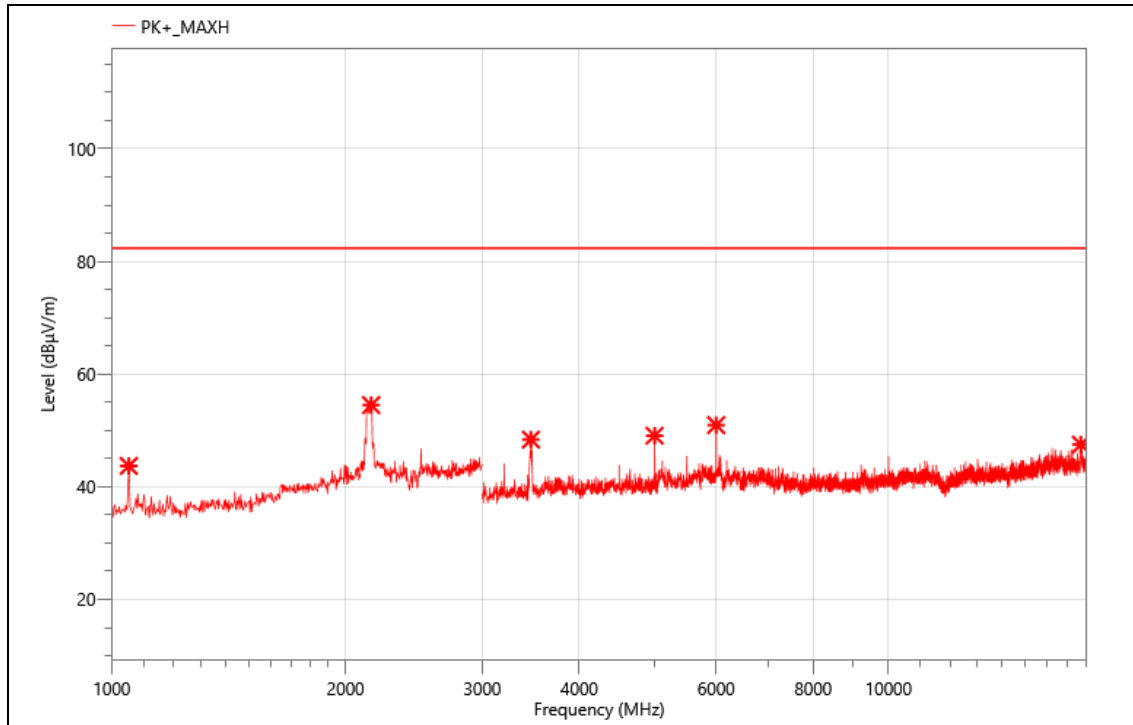

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	1052.000	58.92	-15.23	43.69	82.30	38.61	PK+	V
2	2158.000	63.54	-9.05	54.49	82.30	27.81	PK+	V
3	3465.000	62.57	-14.2	48.37	82.30	33.93	PK+	V
4	4999.500	60.24	-11.18	49.06	82.30	33.24	PK+	V
5	6000.000	59.81	-8.87	50.94	82.30	31.36	PK+	V
6	17688.000	47.23	0.25	47.48	82.30	34.82	PK+	V


Mode:	BAND4-20175
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

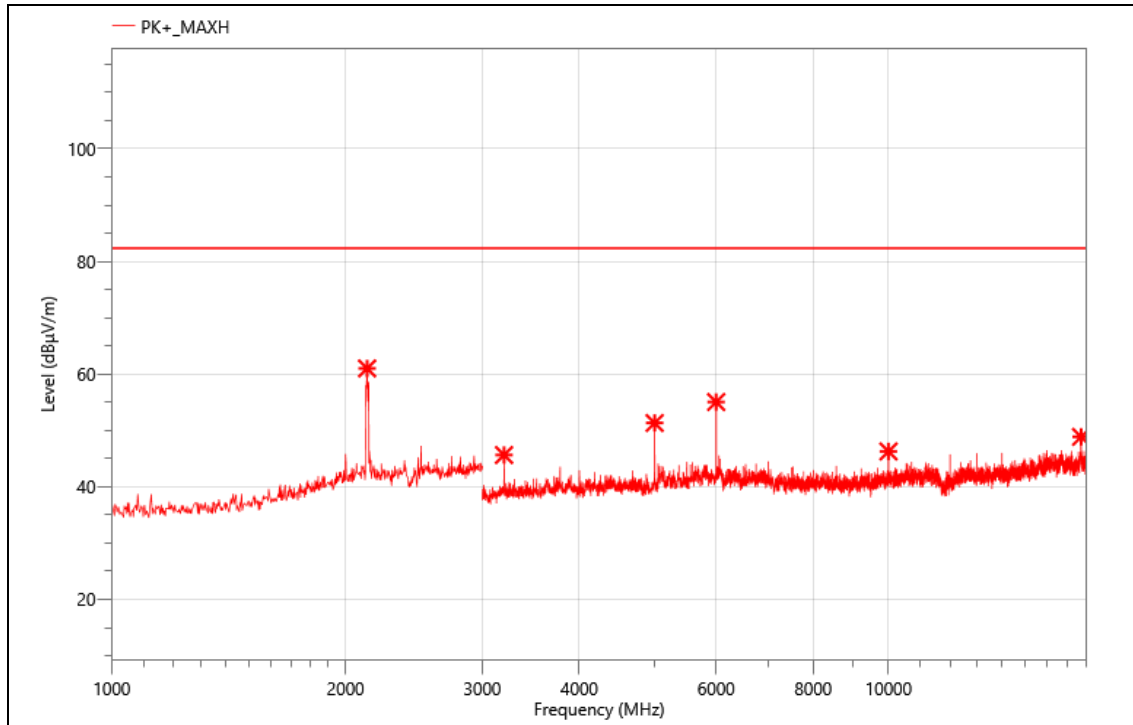

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2132.000	70.05	-9.05	61.00	82.30	21.30	PK+	V
2	3199.500	60.43	-14.8	45.63	82.30	36.67	PK+	V
3	4999.500	62.49	-11.18	51.31	82.30	30.99	PK+	V
4	6000.000	63.91	-8.87	55.04	82.30	27.26	PK+	V
5	10000.500	52.44	-6.17	46.27	82.30	36.03	PK+	V
6	17700.000	48.67	0.18	48.85	82.30	33.45	PK+	V


Mode:	BAND4-20175
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

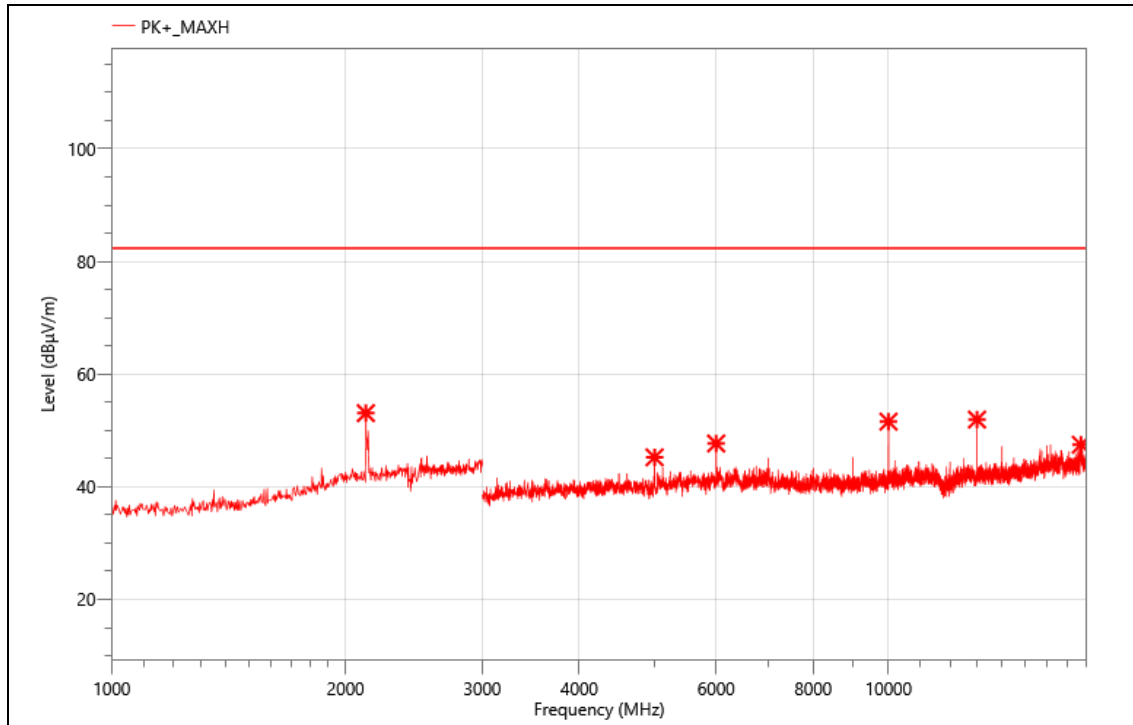

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2124.000	62.16	-9.09	53.07	82.30	29.23	PK+	H
2	4999.500	56.40	-11.18	45.22	82.30	37.08	PK+	H
3	6000.000	56.55	-8.87	47.68	82.30	34.62	PK+	H
4	10000.500	57.73	-6.17	51.56	82.30	30.74	PK+	H
5	13000.500	56.43	-4.51	51.92	82.30	30.38	PK+	H
6	17689.500	47.22	0.24	47.46	82.30	34.84	PK+	H


Mode:	BAND4-20300
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

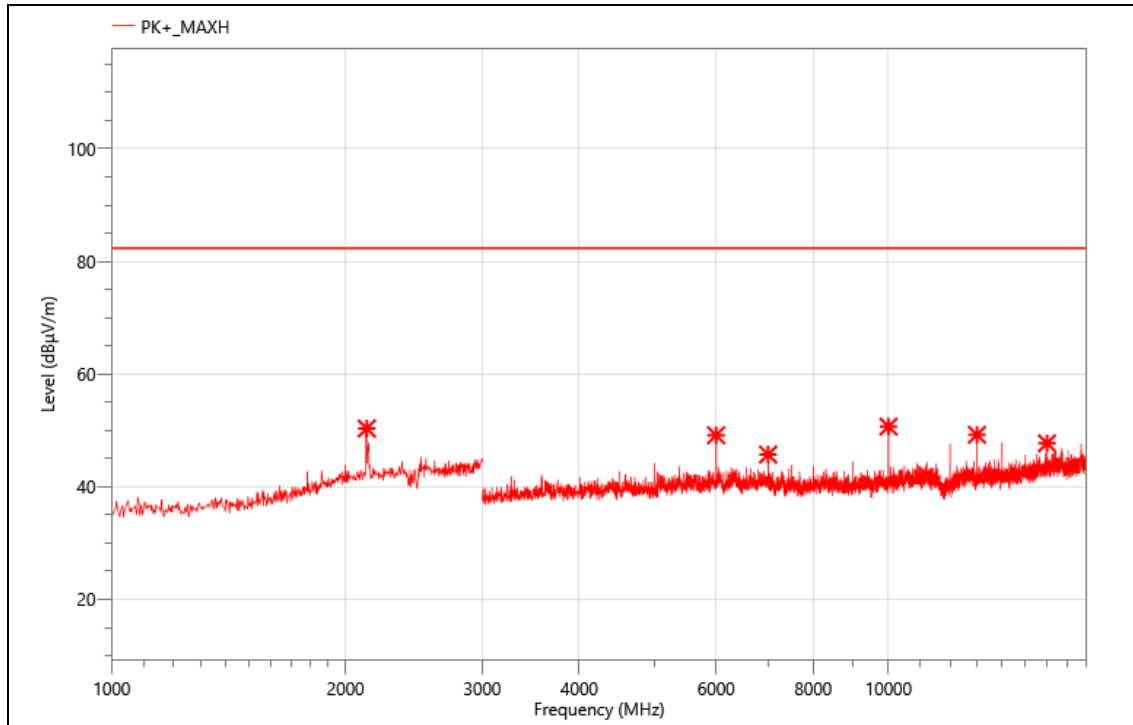

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2130.000	59.39	-9.05	50.34	82.30	31.96	PK+	H
2	6000.000	58.01	-8.87	49.14	82.30	33.16	PK+	H
3	6999.000	53.50	-7.79	45.71	82.30	36.59	PK+	H
4	10000.500	56.84	-6.17	50.67	82.30	31.63	PK+	H
5	13000.500	53.73	-4.51	49.22	82.30	33.08	PK+	H
6	16000.500	49.79	-2.08	47.71	82.30	34.59	PK+	H

Mode:	BAND4-20300
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

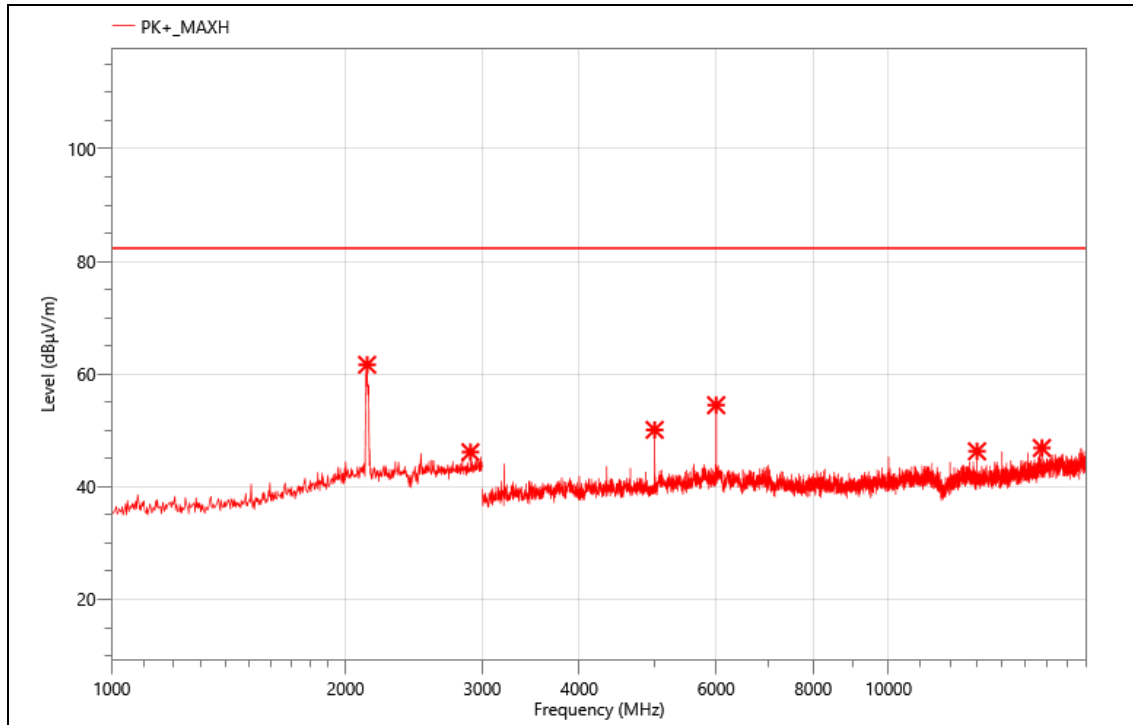


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2132.000	70.70	-9.05	61.65	82.30	20.65	PK+	V
2	2896.000	54.09	-7.96	46.13	82.30	36.17	PK+	V
3	4999.500	61.27	-11.18	50.09	82.30	32.21	PK+	V
4	6000.000	63.35	-8.87	54.48	82.30	27.82	PK+	V
5	13000.500	50.80	-4.51	46.29	82.30	36.01	PK+	V
6	15756.000	49.17	-2.29	46.88	82.30	35.42	PK+	V

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND5-20525
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

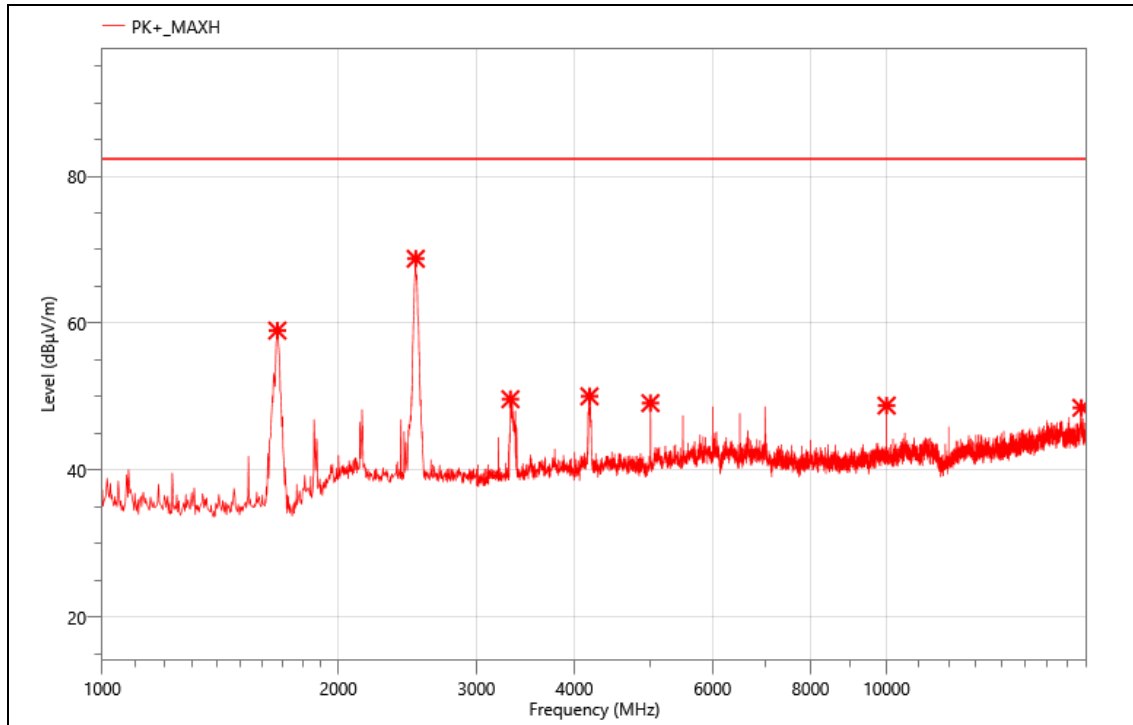

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1672.000	80.07	-21.08	58.99	82.30	23.31	PK+	V
2	2510.000	85.89	-17.12	68.77	82.30	13.53	PK+	V
3	3315.000	64.06	-14.41	49.65	82.30	32.65	PK+	V
4	4180.500	62.39	-12.35	50.04	82.30	32.26	PK+	V
5	4999.500	60.30	-11.18	49.12	82.30	33.18	PK+	V
6	10000.500	54.95	-6.17	48.78	82.30	33.52	PK+	V
7	17716.500	48.66	-0.18	48.48	82.30	33.82	PK+	V


Mode:	BAND5-20525
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

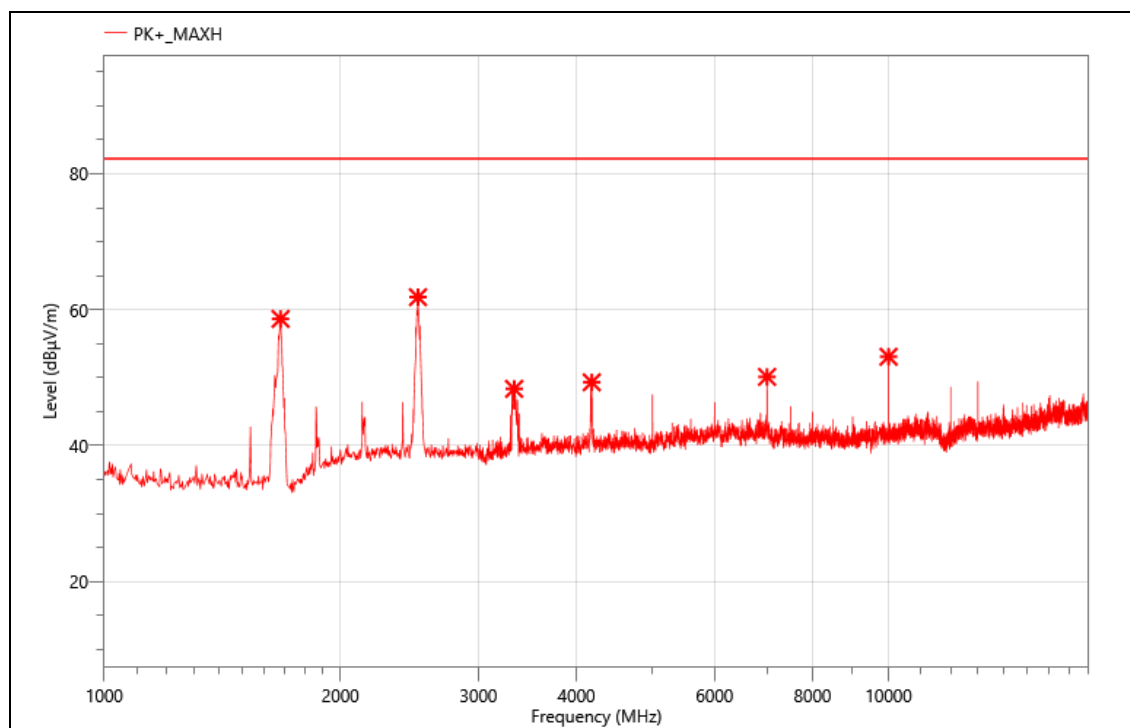

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1678.000	79.68	-21.03	58.65	82.30	23.65	PK+	H
2	2512.000	78.97	-17.12	61.85	82.30	20.45	PK+	H
3	3331.500	62.80	-14.44	48.36	82.30	33.94	PK+	H
4	4183.500	61.72	-12.4	49.32	82.30	32.98	PK+	H
5	6999.000	57.91	-7.79	50.12	82.30	32.18	PK+	H
6	10000.500	59.25	-6.17	53.08	82.30	29.22	PK+	H


Mode:	BAND5-20450
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

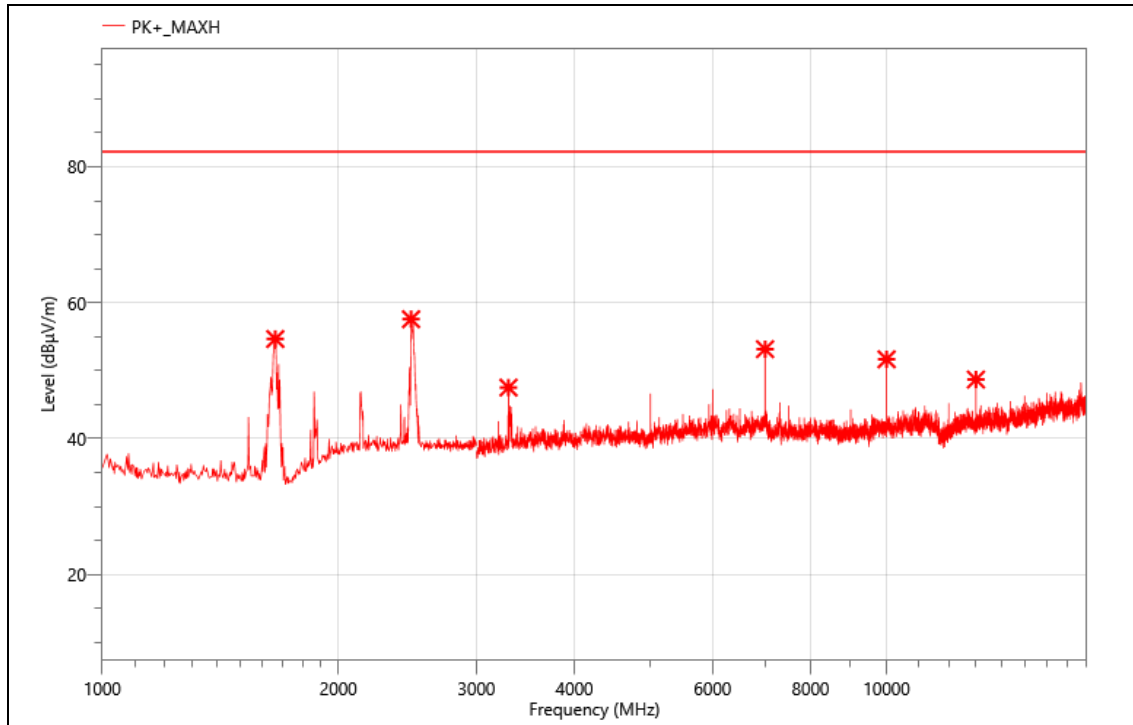

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1662.000	75.82	-21.16	54.66	82.30	27.64	PK+	H
2	2476.000	74.81	-17.23	57.58	82.30	24.72	PK+	H
3	3295.500	62.01	-14.5	47.51	82.30	34.79	PK+	H
4	7000.500	60.97	-7.8	53.17	82.30	29.13	PK+	H
5	10000.500	57.85	-6.17	51.68	82.30	30.62	PK+	H
6	13000.500	53.21	-4.51	48.70	82.30	33.60	PK+	H


Mode:	BAND5-20450
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

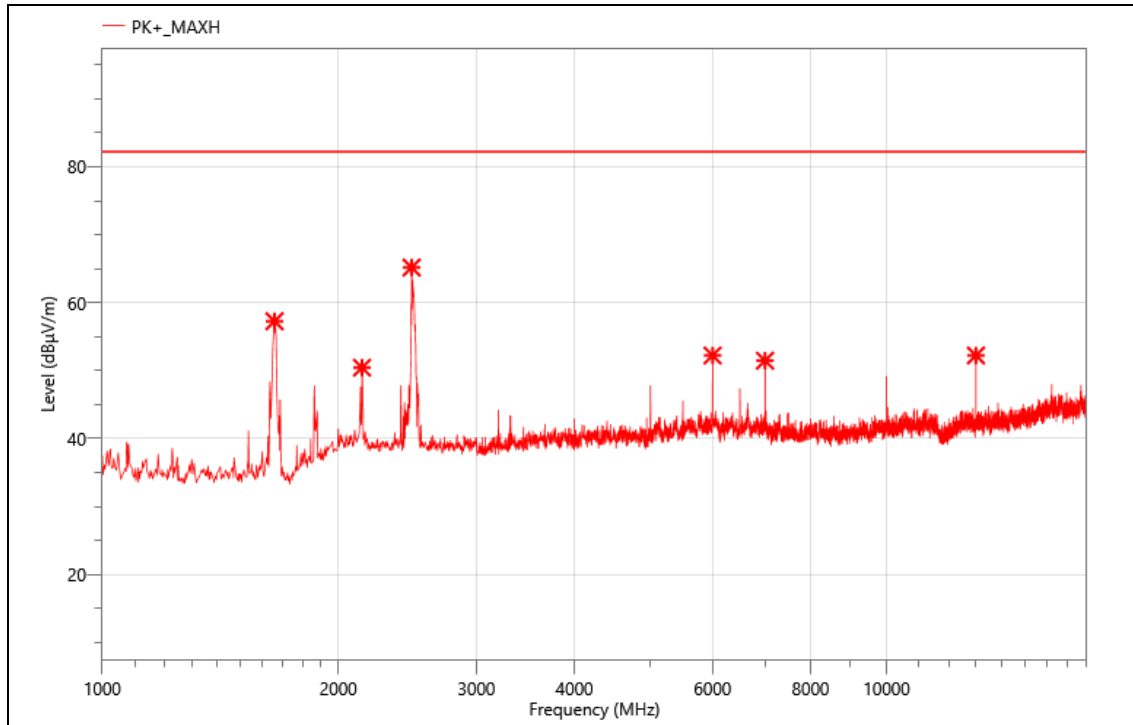

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1658.000	78.48	-21.2	57.28	82.30	25.02	PK+	V
2	2144.000	68.45	-18	50.45	82.30	31.85	PK+	V
3	2480.000	82.39	-17.21	65.18	82.30	17.12	PK+	V
4	6000.000	61.11	-8.87	52.24	82.30	30.06	PK+	V
5	6999.000	59.27	-7.79	51.48	82.30	30.82	PK+	V
6	13000.500	56.75	-4.51	52.24	82.30	30.06	PK+	V


Mode:	BAND5-20600
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

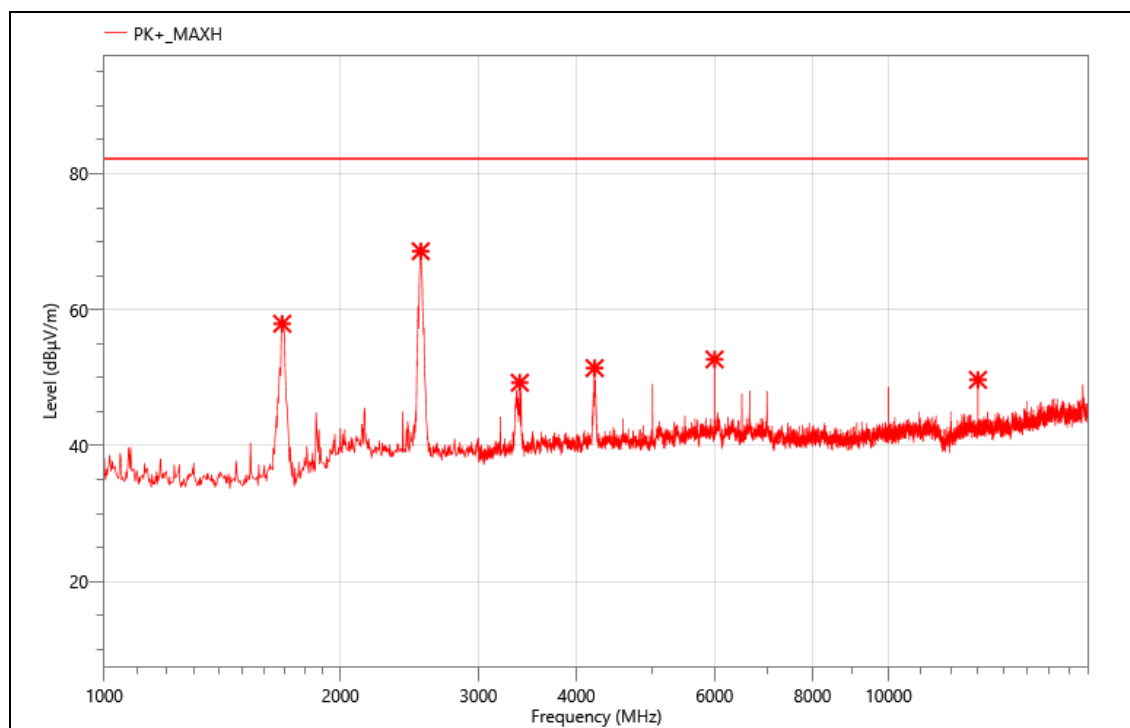

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1686.000	78.91	-20.97	57.94	82.30	24.36	PK+	V
2	2532.000	85.70	-17.09	68.61	82.30	13.69	PK+	V
3	3387.000	63.67	-14.41	49.26	82.30	33.04	PK+	V
4	4219.500	64.10	-12.69	51.41	82.30	30.89	PK+	V
5	6000.000	61.56	-8.87	52.69	82.30	29.61	PK+	V
6	13000.500	54.19	-4.51	49.68	82.30	32.62	PK+	V

Mode:	BAND5-20600
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

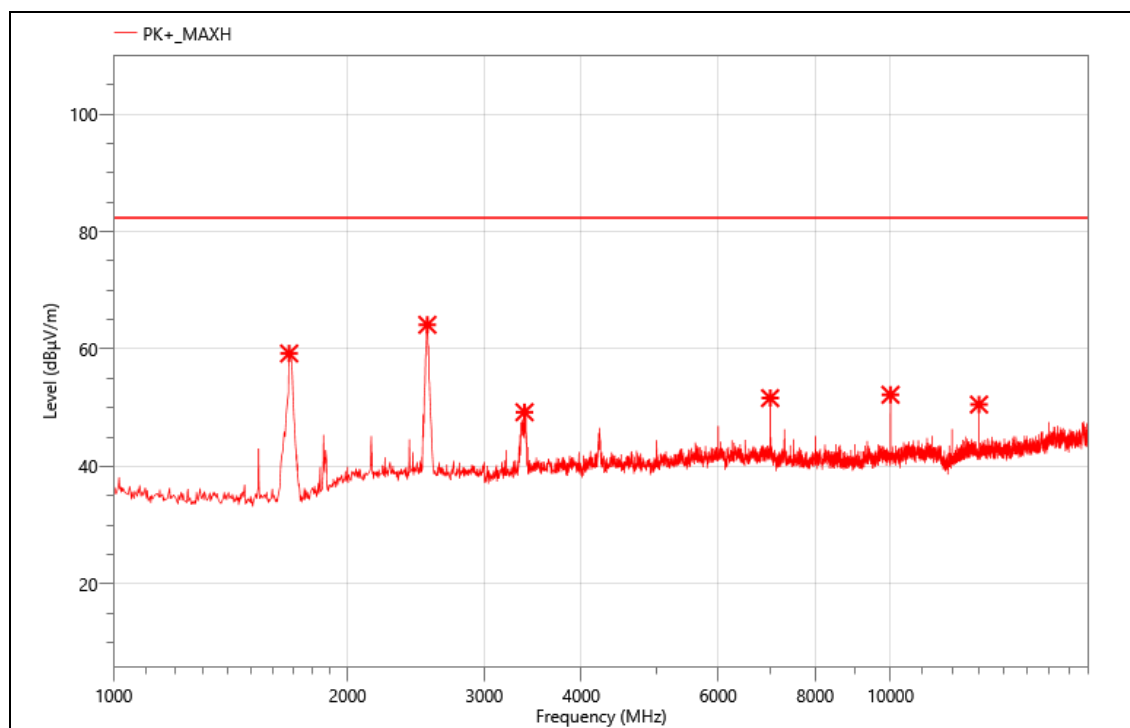


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1682.000	80.24	-21	59.24	82.30	23.06	PK+	H
2	2534.000	81.20	-17.08	64.12	82.30	18.18	PK+	H
3	3379.500	63.68	-14.45	49.23	82.30	33.07	PK+	H
4	7000.500	59.43	-7.8	51.63	82.30	30.67	PK+	H
5	10000.500	58.37	-6.17	52.20	82.30	30.10	PK+	H
6	13000.500	55.05	-4.51	50.54	82.30	31.76	PK+	H

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND7-20850
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

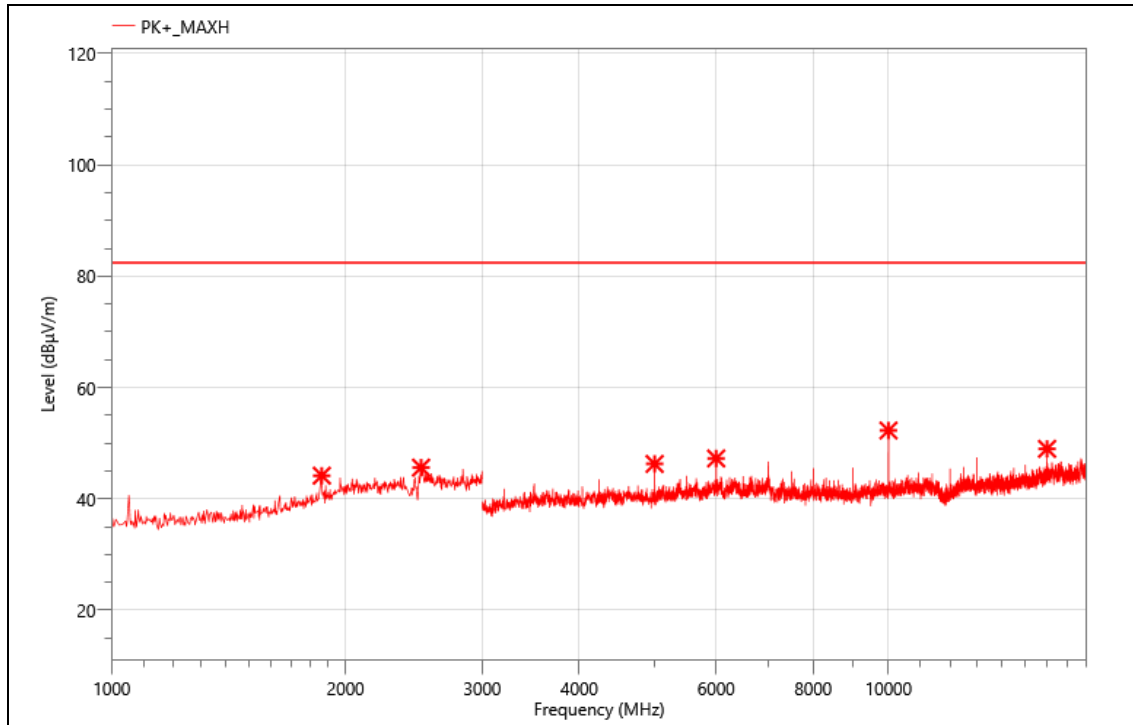

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	1864.000	54.57	-10.4	44.17	82.30	38.13	PK+	H
2	2502.000	54.02	-8.41	45.61	82.30	36.69	PK+	H
3	4999.500	57.46	-11.18	46.28	82.30	36.02	PK+	H
4	6000.000	56.13	-8.87	47.26	82.30	35.04	PK+	H
5	10000.500	58.46	-6.17	52.29	82.30	30.01	PK+	H
6	16000.500	51.07	-2.08	48.99	82.30	33.31	PK+	H


Mode:	BAND7-20850
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

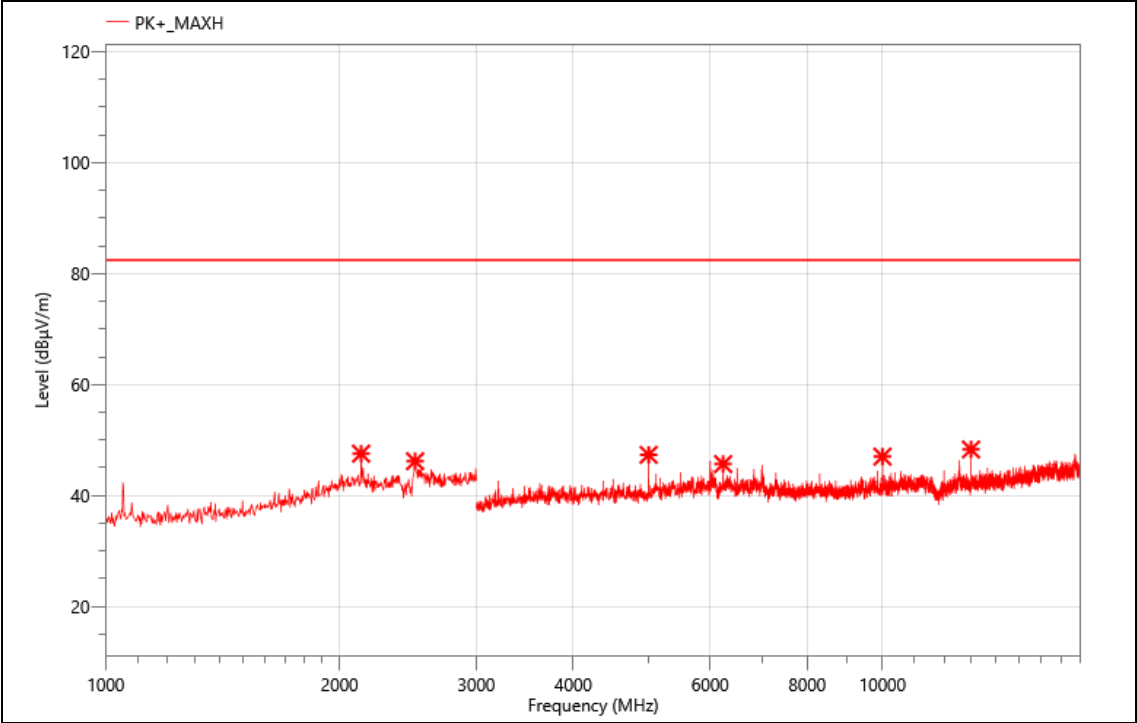

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2132.000	56.59	-9.05	47.54	82.30	34.76	PK+	V
2	2502.000	54.59	-8.41	46.18	82.30	36.12	PK+	V
3	4999.500	58.51	-11.18	47.33	82.30	34.97	PK+	V
4	6235.500	53.96	-8.3	45.66	82.30	36.64	PK+	V
5	10000.500	53.18	-6.17	47.01	82.30	35.29	PK+	V
6	13000.500	52.80	-4.51	48.29	82.30	34.01	PK+	V


Mode:	BAND7-21100
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

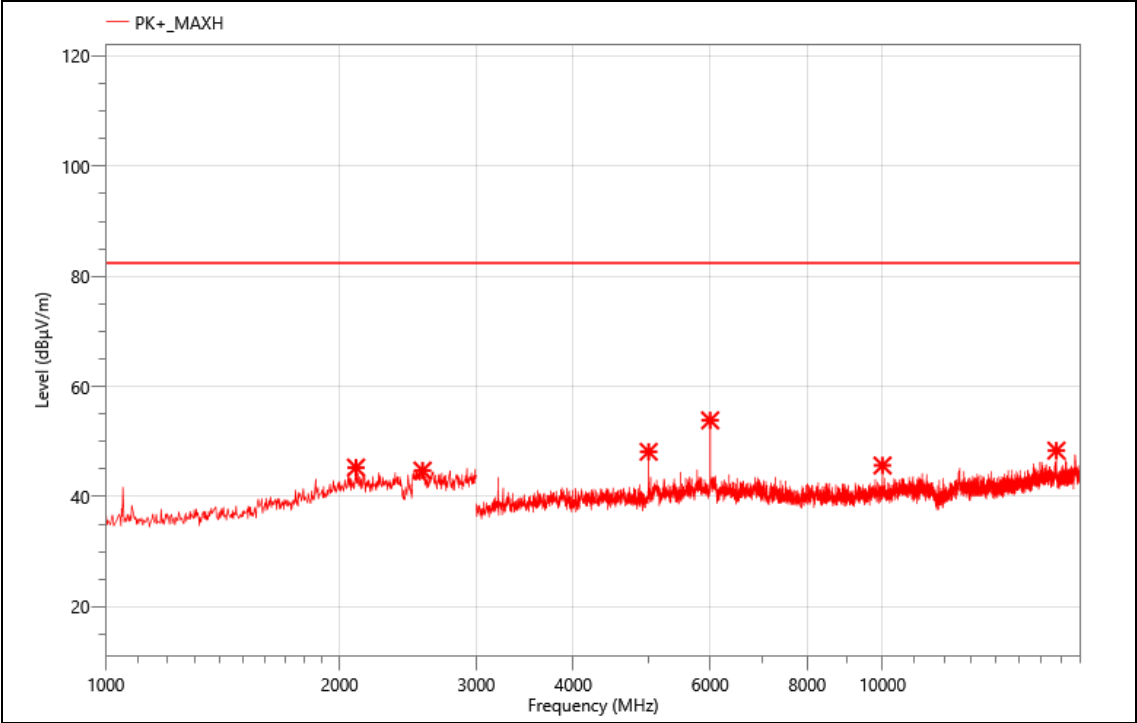

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2100.000	54.60	-9.32	45.28	82.30	37.02	PK+	V
2	2558.000	52.77	-8.04	44.73	82.30	37.57	PK+	V
3	4999.500	59.32	-11.18	48.14	82.30	34.16	PK+	V
4	6000.000	62.71	-8.87	53.84	82.30	28.46	PK+	V
5	10000.500	51.82	-6.17	45.65	82.30	36.65	PK+	V
6	16747.500	49.33	-0.98	48.35	82.30	33.95	PK+	V


Mode:	BAND7-21100
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

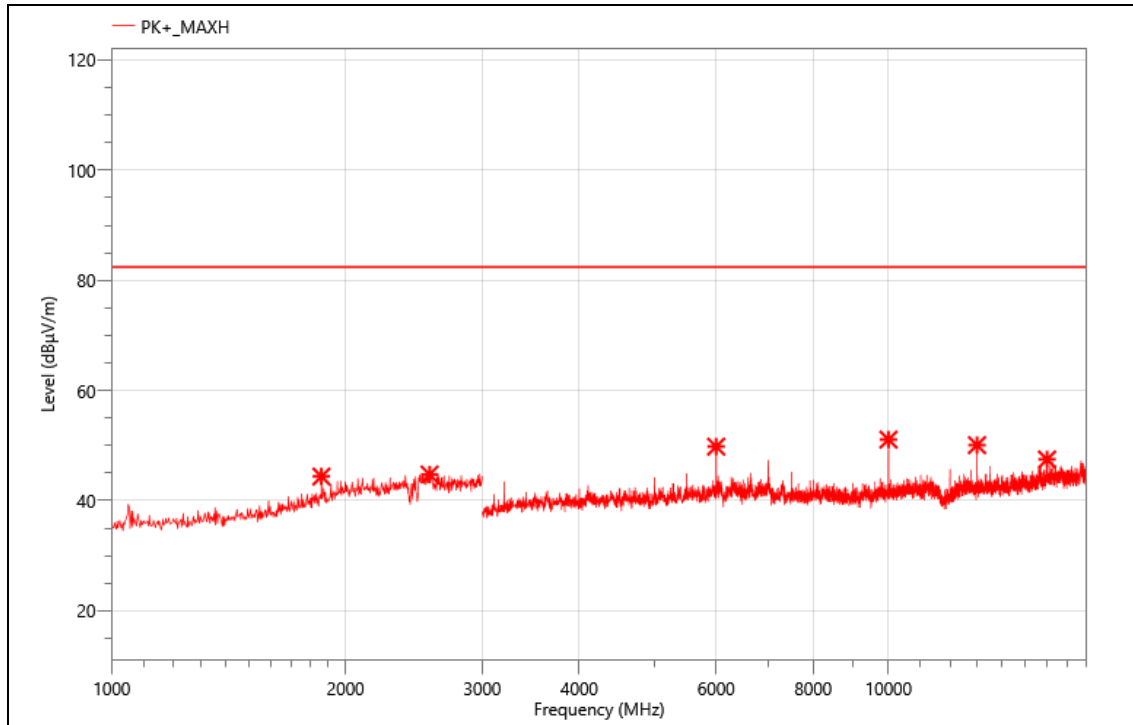

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1862.000	54.78	-10.41	44.37	82.30	37.93	PK+	H
2	2566.000	52.79	-8.04	44.75	82.30	37.55	PK+	H
3	6000.000	58.67	-8.87	49.80	82.30	32.50	PK+	H
4	10000.500	57.25	-6.17	51.08	82.30	31.22	PK+	H
5	13000.500	54.59	-4.51	50.08	82.30	32.22	PK+	H
6	16000.500	49.56	-2.08	47.48	82.30	34.82	PK+	H


Mode:	BAND7-21350
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

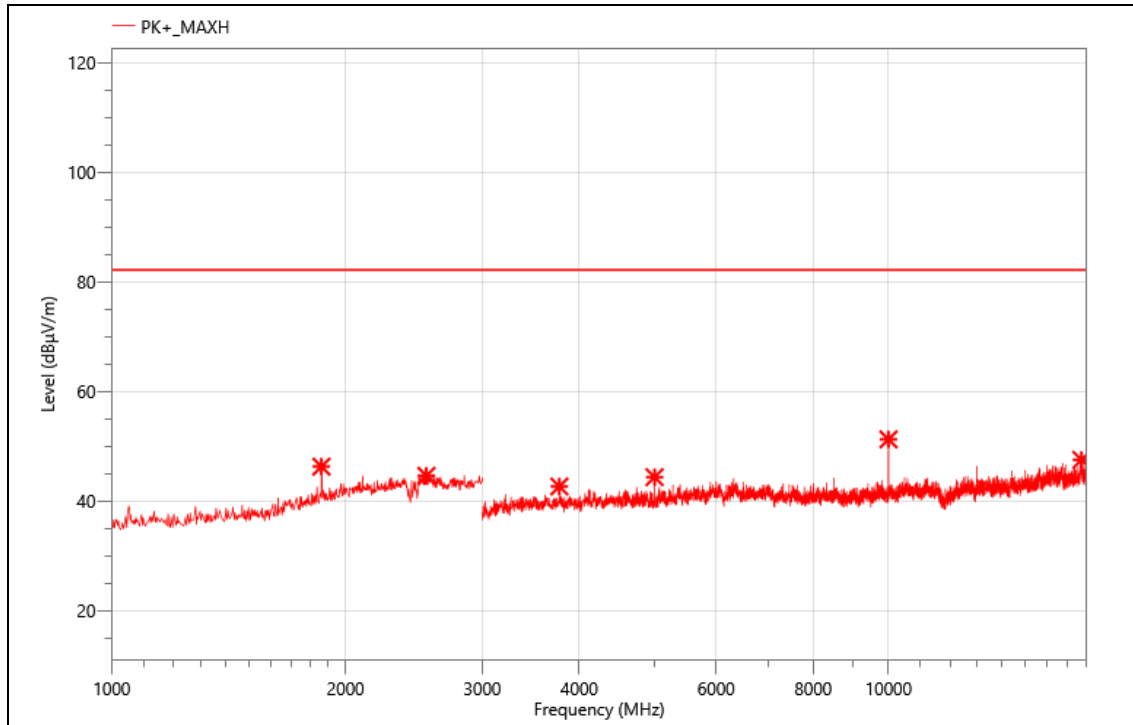

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	1862.000	56.73	-10.41	46.32	82.30	35.98	PK+	H
2	2542.000	53.03	-8.37	44.66	82.30	37.64	PK+	H
3	3769.500	56.15	-13.45	42.70	82.30	39.60	PK+	H
4	4999.500	55.58	-11.18	44.40	82.30	37.90	PK+	H
5	10000.500	57.47	-6.17	51.30	82.30	31.00	PK+	H
6	17718.000	47.77	-0.21	47.56	82.30	34.74	PK+	H

Mode:	BAND7-21350
Power:	Battery 3.7V
TE:	Berny
Date	2025/03/19
T/A/P	24.7°C/54%/101Kpa

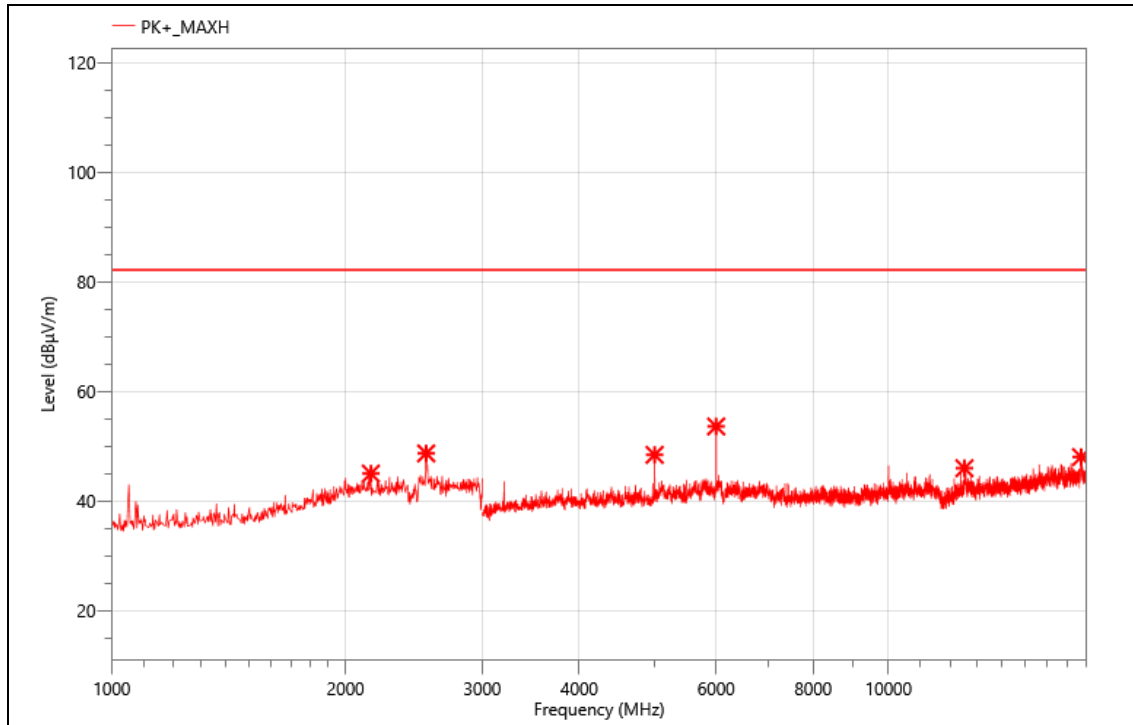

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2156.000	54.11	-9.05	45.06	82.30	37.24	PK+	V
2	2540.000	57.15	-8.42	48.73	82.30	33.57	PK+	V
3	4999.500	59.65	-11.18	48.47	82.30	33.83	PK+	V
4	6000.000	62.52	-8.87	53.65	82.30	28.65	PK+	V
5	12526.500	50.31	-4.28	46.03	82.30	36.27	PK+	V
6	17700.000	47.89	0.18	48.07	82.30	34.23	PK+	V

Note: Limit= -25dBm+95.25=70.25 dBuV/m

Remark: 1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
 2. Margin = Result - Limit