



ME65
MOBILE COMPUTER
Quick Start Guide

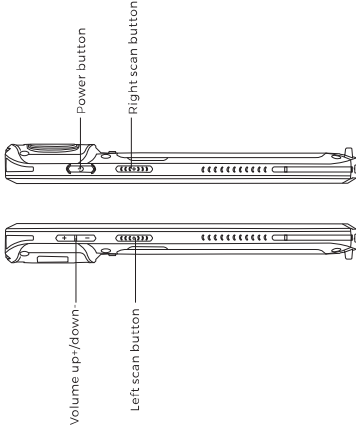

Overview

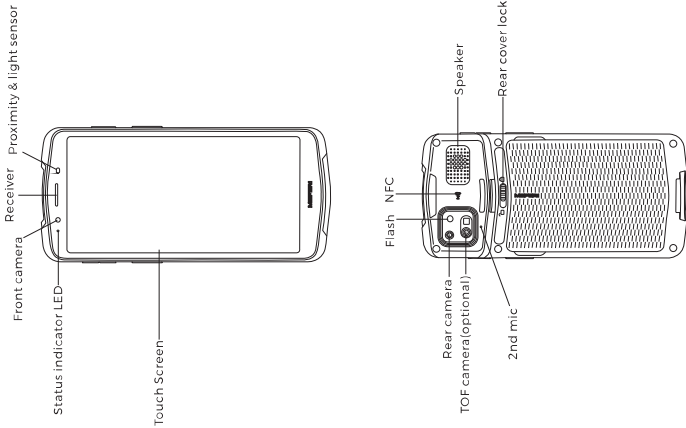


Package Contents

- Device*1
- Battery*1
- USB Cable*1
- Wearable strap*1
- Power Adapter*1
- Quick Start Guide*1

Instructions for Unpacking




SIM Card Installing

Use the silver tab on the upper left corner to pull out the SIM card holder. Put the SIM card into the corresponding slot (as shown in the picture). Push the holder fully into.



Battery Installing

Align the battery into the battery compartment and press the battery firmly, then slide the rear cover lock to the right until it locks.



NOTE: Overexertion should be avoided when installing or removing the battery.


Instructions for Charging

Connect the USB A port to the adapter, and the other end to the device.

Input: 100-240V~50/60Hz 0.6A

Output: 9.0V~2.0A

5.0V~3.0A



Power Adapter



USB Cable

Power Options

- Power on: Press and hold the power button until you see a splash on the device.
- Power off: Press and hold the power button until the pop-up reminder appears and then click "Power off".
- Forced restart: Press and hold the power button for 10 seconds. the power is on, and it can be activated immediately after pressing the power button.
- Fast start: The battery can be replaced within 5 minutes when the power is on, and it can be activated immediately after pressing the power button.

Indicator

	Full power
	Medium power
	Low power
	Good signal

Network Signal	☒ Unstable signal
	☐ NOXE SIM card not installed.
WiFi	☒ No service.
	☒ WIFI connected
	☐ NOXE WIFI switched off

Scan barcode

Open the ScanEdge, point the scan head (laser) at the code, press the scan button of the device, and the scan result will be outputto the test whiteboard.



H57

Precautions

1. Read all information in this guide before using the device to ensure safe and proper operation.
- 2 Please use the accessories that have been approved by MEFERI and corresponds to this model. Use of any power source, charger, battery, etc. that has not been approved by MEFERI may cause a fire, explosion, or other hazards.
3. Please use device and accessories within the specified temperature range. Equipment failure may occur when the ambient temperature is too high or too low.
4. If the battery is not detachable, please don't replace the battery by yourself in case of any damage to the battery or the device. The battery shall be replaced by authorized service centers only.
5. Do not disassemble the product and its accessories. If the device or any of its components are not working properly, please contact and consult our after-sales service center, or send the device to our after-sales service outlets for testing and servicing.
6. If the battery shows abnormal signs of peculiar smell, overheat, color change, distortion or leakage, remove the battery from the charger or the device immediately and stop using it.

7. The battery is made from a flammable and explosive material. Do not disassemble, squeeze, drop and make any other destructive operations on the battery. Do not place the battery in high temperature.
8. Disposal of used batteries is subject to local relevant documents or policies regarding disposal of used batteries.

Warranty Policy

Warranty terms:

1. Under normal circumstances, the warranty period of the device is 12 months, 3 months for accessories, subject to the sales agreement.

2. During the product warranty period, under the normal use conditions (determined by our technical staff), the user will be entitled to a free warranty for damaged or faulty warranty parts.
3. During the warranty period, faults caused by repair, disassembly or modification of the product by a personnel other than our company, improper installation, improper use by the user (failure to follow instructions), serial number damage, accident or natural disaster, will not be covered under the warranty.
4. The warranty will expire immediately if any alterations are made to the warranty card.
5. Please show the equipment SN and purchase certificate for repair. The company reserves the right to interpret the above contents.
6. If you have trouble using the device, please e-mail to meferi@meferi.com.

NB

This product complies with the radio interference requirements of the European Community.

Product name: MOBILE COMPUTER

Product model: ME65

Manufacturer: MEFERI TECHNOLOGIES CO., LTD.

SIMPLIFIED EU DECLARATION OF CONFORMITY

The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:

Hereby, Meferi Technologies Co.Ltd. declares that radio equipment type ME65 is in compliance with Directive 2014/53/EU, and this product is allowed to be used in all EU member states. The full text of the EU declaration of conformity is available at following

This product can be used across EU member states.

EUT Operating temperature: -20~40 °C

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

This device may not cause harmful interference, and This device must accept any interference received, including interference that may cause undesired operation. Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radiocommunications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

This MOBILE COMPUTER meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all

FCC SAR Information Statement

Your MOBILE COMPUTER is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radiofrequency (RF) energy set by the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

The exposure standard for MOBILE COMPUTER employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. * Tests for SAR are conducted with the MOBILE COMPUTER transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the MOBILE COMPUTER while operating can be well below the maximum value. This is because the MOBILE COMPUTER is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output.

Before a MOBILE COMPUTER model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government adopted requirement for safe exposure. The tests are performed in positions and locations (e.g., at the ear and worn on the body) as required by the FCC for each model. The highest SAR value for this MOBILE COMPUTER when tested for use on the head is 0.54 W/kg and when worn on the body, as described in this user guide, is 0.68 W/kg (Body-worn measurements differ among MOBILE COMPUTER models, depending upon available accessories and FCC requirements). The maximum scaled SAR in hotspot mode is 0.73 W/kg. While there may be differences between the SAR levels of various MOBILE COMPUTER and at various positions, they all meet the government requirement for safe exposure. The FCC has granted an Equipment Authorization for this MOBILE COMPUTER with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this MOBILE COMPUTER is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/efccid> after searching on

FCC ID: 2A9LJ-ME65 Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications Industry Association (CTIA) web-site at <http://www.wow-com.com>. * In the United States and Canada, the SAR limit for MOBILE COMPUTER used by the public is 1.6 watts/kg (W/kg) averaged over one gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements.

The SAR test distance is 10mm.

CE Statement

Hereby, MEFERI TECHNOLOGIES CO., LTD. declares that this MOBILE COMPUTER, ME65 is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product allowed to be used in all EU member states. Use the MOBILE COMPUTER in the environment with the temperature between -20 °C and 40 °C

Use careful with the earphone maybe possible excessive sound pressure from earphones and headphones can cause hearing loss Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

The product shall only be connected to a USB interface of version USB-C

SAR: The device complies with RF specifications when the device used at 5mm from your body.

The highest SAR value for this device when tested for use on the head is 0.80 W/kg and when worn on the body is 0.95 W/kg This device will not be marketed or sold on the French market due to non-compliance with the latest SAR requirements.

5150-5350MHz is restricted to indoor use only

Adapter shall be installed near the equipment and shall be easily accessible. The plug considered as disconnect device of adapter

Adapter Model: HLJFC001K7-EU

Input: AC 100-240V 50/60Hz 0.6A Output: DC 5.0V, 3.0A/DC

9.0V, 2.0A/DC 12.0V, 1.5A

Operation Frequency:

For BT/BLE: 2402MHz~2480MHz

For 2.4G WIFI:

2402MHz~2472MHz

(802.11b/802.11g/802.11n(HT20)/802.11ax(HE20))

2422MHz~2462MHz

(802.11n(HT40)/802.11ax(HE40))

For 5G WIFI:

5150MHz~5350MHz 5470MHz~5725MHz 5725MHz~5875MHz

For GNSS:

For WiFi 6E: 5945MHz~6425MHz

For GNSS:

GFS: 1.57542GHz, 1.117645 GHz

BDS: 1.561098GHz

Galileo: 1.561098 GHz, 1.117645 GHz

GLONASS: 1.602GHz

SBAS: 1.57542GHz, 1.117645 GHz

For NFC: 13.56MHz

For GSM:

E-GSM 900/GPRS 900/EGPRS 900:

TX: 880MHz~915MHz; RX: 925MHz~960MHz

GSM 1800/GPRS 1800/EGPRS 1800:

TX: 1710MHz~1785MHz; RX: 1805MHz~1880MHz

For WCDMA:

UTRA Band I: TX: 1920MHz~2170MHz;

RX: 1910MHz~2170MHz

UTRA Band VIII: TX: 880MHz~915MHz;

RX: 925MHz~960MHz

For LTE:

LTE Band 1: (UL)1920MHz~1980MHz,

(DL)2110MHz~2170MHz

LTE Band 3: (UL)1710MHz~1785MHz,

(DL)1805MHz~1880MHz

LTE Band 7: (UL)2300MHz~2570MHz,

(DL)2620MHz~2690MHz

LTE Band 8: (UL)880MHz~915MHz,

(DL)925MHz~960MHz

LTE Band 20: (UL)832MHz~862MHz,

(DL)791MHz~821MHz

LTE Band 28: (UL)703MHz~748MHz,

(DL)758MHz~803MHz

LTE Band 34: (UL) 2010MHz~2025MHz

(DL) 2010MHz~2025MHz

LTE Band 38: (UL)2570MHz~2620MHz,

(DL)2570MHz~2620MHz

LTE Band 40: (UL)2300MHz~2400MHz,

(DL)2300MHz~2400MHz

LTE Band 42: (UL)3400MHz~3600MHz,

(DL)3400MHz~3600MHz

LTE Band 43: (UL)3600MHz~3800MHz,

(DL)3600MHz~3800MHz

For 5G NR:

SA:

NR n1: (UL)1920MHz~1980MHz, (DL)2110MHz~2170MHz

NR n3: (UL)1710MHz~1785MHz, (DL)1805MHz~1880MHz

NR n7: (UL) 2500MHz~2570MHz, (DL) 2620MHz~2690MHz

NR n8: (UL)880MHz~915MHz, (DL)925MHz~960MHz

NR n20: (UL)832MHz~862MHz, (DL)791MHz~821MHz

NR n28: (UL)703MHz~748MHz, (DL)758MHz~803MHz

NR n38: (UL)2570MHz~2620MHz, (DL)2570MHz~2620MHz

NR n40: (UL)2300MHz~2400MHz, (DL)2300MHz~2400MHz

NR n41: (UL)2496MHz~2690MHz, (DL)2496MHz~2690MHz

NR n77: (UL)3300MHz~4200MHz, (DL)3300MHz~4200MHz

NR n78: (UL)3300MHz~3800MHz, (DL)3300MHz~3800MHz

NR n79: (UL)3400MHz~5000MHz, (DL)3400MHz~5000MHz

NSA:

EN-DC:

HPUE:

n41, n77, n78, n79

Max output power:

BT: 0.0067W

2.4G WiFi: 0.0736W

BLE: 0.0024W

5G WiFi: 0.0249W

WIFI 6E: 0.1628W

E-GSM 900/GPRS 900/EGPRS 900: 2.0137W

GSM 1800/GPRS 1800/EGPRS 1800: 0.9638W

UTRA Band I: 0.191W

UTRA Band VIII: 0.1901W

LTE band 1: 0.1803W

LTE band 3: 0.1977W

LTE band 7: 0.1524W

LTE band 8: 0.191W

LTE band 20: 0.1845W

LTE band 28: 0.1919W

LTE band 34: 0.1774W

LTE band 38: 0.1683W

LTE band 40: 0.171W

LTE band 42: 0.1758W

LTE band 43: 0.1622W

For 5G NR:

NR n1: 0.1521W

NR n3: 0.1384W

NR n7: 0.1503W

NR n8: 0.1486W

NR n20: 0.1875W

NR n28: 0.1675W

NR n38: 0.1901W

NR n40: 0.156W

NR n41: 0.3524W

NR n77: 0.3741W

NR n78: 0.3741W

NR n79: 0.3784W

Manufacturer: MEFERI TECHNOLOGIES CO., LTD.

Address: 4F, A6, Tiagufu Software Park, No. 1129, Century

City Road, High-Tech Zone, 610041, Chengdu, Sichuan,

P.R.China

E-mail: 402858612@qq.com

DECLARATION OF CONFORMITY

I hereby declare that the product

Product:

Product Name: MOBILE COMPUTER

Brand Name: MEFERI, ME671, ME68A, ME66A, ME65B, ME68

Software Version: V1.0

Model: ME68, EN_0E_V01_Q4_Q01_20240328

Accessories:

Model: BATT651

Specification: 3.7V 500mAh, 15.20Wh

Manufacturer: DONGGUAN USB ELECTRONICS CO., LTD.

Model: CUP 391210P

Specification: 3.7V 500mAh, 0.18Wh

Manufacturer: SHENZHEN CHOLPOWER TECHNOLOGY CO., LTD.

Model: CUP 391210P

Specification: 3.7V 500mAh, 0.18Wh

Manufacturer: SHENZHEN HUAIJIN ELECTRON CO., Ltd.

Model: CUP 391210P

Specification: 3.7V 500mAh, 0.18Wh

Manufacturer: Shenzhen ChengJianDaWei electronics Co., LTD

Model: CUP 391210P

Specification: 3.7V 500mAh, 0.18Wh

Declaration: 2014/53/EU, 2014/53/EU and 2014/53/EU and 2014/53/EU and declare that the same application has not

been lodged with any other notified body.

EN IEC 5285-1:2020-A11:2020

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021

EN 50565:2017-A11:2021