

Report No.: T190612W02-RP5

Page 1 of 70

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND RSS 247 REQUIREMENT

OF

Applicant: Quanta Computer Inc.

No. 188, Wenhua 2nd Road, Guishan District, Taoyuan City 33377,

Taiwan

Product Name: Clover Mini Enterprise/Clover Station Pro Terminal

Brand Name: clover

Model No.: C303, C503

Model Difference: C303 is a standalone POS terminal. C503 includes the same

POS terminal (C303) but comes with an included peripheral

display (S503).

FCC ID: HFS-CX03U **IC**: 1787B-CX03U

Report Number: T190612W02-RP5 **FCC Rule Part:** §15.247, Cat: DSS

IC Rule Part: RSS-247 issue 2 Feb 2017

Issue Date: Jul. 12, 2019

Date of Test: Jun. 14, 2019 ~ Jul. 09, 2019

Date of EUT Received: Jun. 14, 2019

Issued by Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan.

(R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Hone Hsieh / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 2 of 70



Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190612W02-RP5	Rev.00	Initial creation of document	All	Jul. 12, 2019	Elle Chang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	UMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	. 12
7	PEAK OUTPUT POWER MEASUREMENT	. 16
8	20dB & 99% BANDWIDTH MEASUREMENT	. 19
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	. 25
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	. 30
11	FREQUENCY SEPARATION	. 59
12	NUMBER OF HOPPING FREQUENCY	. 61
13	TIME OF OCCUPANCY (DWELL TIME)	. 63
11	ANTENNA RECITIREMENT	70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page 4 of 70



GENERAL INFORMATION

1.1 Product description

General:

Product Name:	Clover Mini Enterprise/Clover Station Pro Terminal		
Brand Name:	clover		
Model No.:	C303, C503		
Model Difference:	C303 is a standalone POS terminal. C503 includes the same POS terminal (C303) but comes with an included peripheral display (S503)		
Product SW/HW version:	N/A / 4.01		
Radio SW/HW version:	N/A / N/A		
Test SW Version:	N/A		
RF power setting in TEST SW:	N/A		
Micro Hub:	Model No.: H303, Supplier: clover		
	12V from Hub and Adapter		
Power Supply:	Battery:	Model No.: YJ3B, Supplier: N/A	
	Adapter:	Model No.: FSP040-RHBN3, Supplier: FSP	

Bluetooth_BR+EDR:

Bluetooth Version:	Bluetooth V5.0 Dual Mode	
Channel number:	79 channels	
Modulation type:	GFSK + π/4DQPSK + 8DPSK	
Transmit Power:	7.03 dBm	
Frequency Range:	2.402GHz – 2.480GHz	
Dwell Time:	<= 0.4s	
Antenna Designation:	PIFA Antenna, 1. P/N: GD9320-15-001-R, Supplier: SAA, Antenna Gain: 0.08dBi (Main) 2. P/N: LA81FP017-1H, Supplier: Luxshare-ICT Antenna Gain: 2.1dBi (Main)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Report No.: T190612W02-RP5

Page 5 of 70

1.2 Test Methodology of Applied Standards

Canada RSS-247 issue 2 Feb. 2017

RSS-Gen. issue 5 Apr. 2018

FCC Part 15, Subpart C §15.247

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

Canada Registration Number: TW1309

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 6 of 70



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated

emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

Page 7 of 70



2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission Configuration




Fig. 2-2 Conducted Emission Configuration



Fig.2-2 Conduction (AC Power Line) Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	L420	S0012467	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page 8 of 70



3 UMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	RSS-247 §5.4 (2)	Peak Output Power	Compliant
§15.247(a)(1)	RSS-247 §5.1 (1) RSS-Gen §6.6	20dB & 99% Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	RSS-247 §5.5	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	RSS-247 §5.1 (2)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 (4)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 (4)	Time of Occupancy	Compliant
§15.203 §15.247(b)	RSS- Gen §6.8	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



DESCRIPTION OF TEST MODES


4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	71	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	72	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	73	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	74	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	75	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	76	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	77	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	78	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	79	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





4.2 The Worst Test Modes and Channel Details

- 1 The EUT has been tested under operating condition.
- 2 Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3 Investigation has been done on all the possible configurations for searching the worst case.

AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral	
Worst Case	Operation in normal mode	

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)							
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE			
Bluetooth	2402 to 2480	2441	GFSK	DH5			
	RADIATED EMISSION TEST (ABOVE 1 GHz)						
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5			

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

ANTENNA FORT CONDOCTED MILASOREMENT.							
	CONDUCTED TEST						
	Peak Output Power, 20dB Band Width						
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE			
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8DPSK	DH5			
	Band Edge						
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, 8DPSK	DH5			
		Frequency S	Separation				
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5			
		Number of hopp	ing frequency				
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5			
Time of Occupancy (Dwell time)							
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH1/DH3/DH5			
Bluetooth	2402 to 2480	2441	π/4-DQPSK, 8DPSK	DH1/DH3/DH5			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Compliance Certification Services Inc. 程智科技股份有限公司



MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.924 dB
20dB Bandwidth	+/- 147.256 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.924 dB
Frequency Separation	+/- 147.256 Hz
Number of hopping frequency	+/- 147.256 Hz
Time of Occupancy	+/- 147.256 Hz
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.



6 CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

6.2 Measurement Equipment Used

	Cond	ucted Emission	Test Site		
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019
LISN	SCHWARZBECK	NSLK 8127	8127-541	01/31/2019	01/30/2020
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020
Software		EZ-EMC(CCS-3A1-CE)		

6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。


^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

Page 13 of 70



6.4 Test SET-UP (Block Diagram of Configuration)

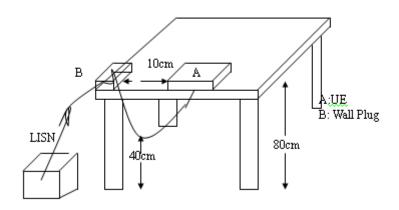

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page 14 of 70



AC POWER LINE CONDUCTED EMISSION TEST DATA

Description: Operation Date: 2019/6/21 Line: L1 Temp.(°C)/Hum.(%): **26.9(°C)/67%**


Test Voltage: AC 120V/60Hz Test By: Henry T190612W02

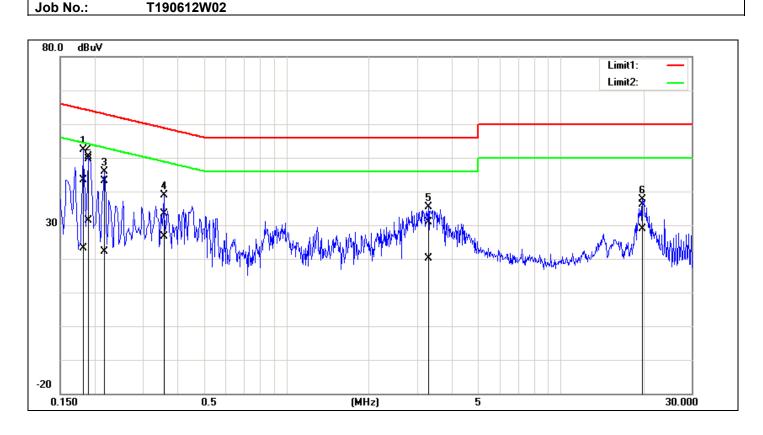

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1819	33.32	13.08	10.13	43.45	23.21	64.39	54.40	-20.94	-31.19	Pass
2*	0.1900	39.57	21.21	10.13	49.70	31.34	64.03	54.04	-14.33	-22.70	Pass
3	0.2180	33.06	11.91	10.13	43.19	22.04	62.89	52.89	-19.70	-30.85	Pass
4	0.3580	23.24	16.59	10.14	33.38	26.73	58.77	48.77	-25.39	-22.04	Pass
5	3.3020	20.69	9.81	10.22	30.91	20.03	56.00	46.00	-25.09	-25.97	Pass
6	19.9180	25.72	18.45	10.37	36.09	28.82	60.00	50.00	-23.91	-21.18	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Description: Operation Date: 2019/6/21

Line: N Temp.(℃)/Hum.(%): 26.9(℃)/67%

Test Voltage: AC 120V/60Hz Test By: Henry Job No.: T190612W02

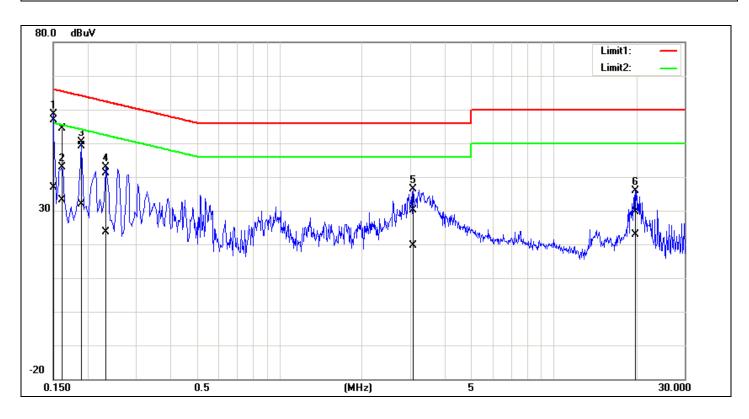

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1500	46.87	26.82	10.02	56.89	36.84	65.99	56.00	-9.10	-19.16	Pass
2	0.1620	44.27	23.03	10.02	54.29	33.05	65.36	55.36	-11.07	-22.31	Pass
3	0.1900	39.05	21.93	10.02	49.07	31.95	64.03	54.04	-14.96	-22.09	Pass
4	0.2340	31.20	13.69	10.02	41.22	23.71	62.30	52.31	-21.08	-28.60	Pass
5	3.0820	20.00	9.45	10.08	30.08	19.53	56.00	46.00	-25.92	-26.47	Pass
6	19.9100	19.28	12.68	10.27	29.55	22.95	60.00	50.00	-30.45	-27.05	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。

Page 16 of 70



PEAK OUTPUT POWER MEASUREMENT


7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 -2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts and the e.i.r.p. shall not exceed 0.5 W if the hop set uses less than 75 hopping channels.

7.2 Measurement Equipment Used

	Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Power Meter	Anritsu	ML2496A	1326001	08/03/2018	08/02/2019			
Power Sensor	Anritsu	MA2411B	1315048	08/03/2018	08/02/2019			
Power Sensor	Anritsu	MA2411B	1315049	08/03/2018	08/02/2019			
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020			
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020			
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019			

7.3 Test Set-up:



7.4 Measurement Procedure:


- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format document, htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company of th transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





7.5 Measurement Result

1M BR mode (Peak):

1M BR mode (Average):

IN Bit mode (i odity:					
СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)	
Low	2402	6.65	4.624	1000	
Mid	2441	6.29	4.256	1000	
High	2480	7.03	5.047	1000	

11111 121	t mode (Av	orago).		
		Max. Output		
СН	Г	include	Output	Limit
	Freq. (MHz)	tune up	Power	
	(IVIHZ)	tolerance	(mW)	(mW)
		Power (dBm)	, ,	
Low	2402	6.44	4.409	1000
Mid	2441	5.61	3.642	1000
High	2480	6.99	5.005	1000

2M EDR mode (Peak):

2M EDR mode (Average):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	5.86	3.855	125
Mid	2441	5.49	3.540	125
High	2480	6.45	4.416	125

СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	3.26	2.120	125
Mid	2441	2.77	1.894	125
High	2480	3.82	2.412	125

3M EDR mode (Peak):

3M EDR mode (Average):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	6.32	4.285	125
Mid	2441	5.87	3.864	125
High	2480	6.86	4.853	125

		Max. Avg.Output		
	Freq.	include	Output	Limit
CH	(MHz)	tune up	Power	
	(IVI□Z <i>)</i>	tolerance	(mW)	(mW)
		Power (dBm)		
Low	2402	3.23	2.106	125
Mid	2441	2.78	1.898	125
High	2480	3.84	2.423	125
4.5.4				

NOTE: cable loss as 10.4dB that offsets in the s_i

*Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



1M BR mode EIRP

Channel	Frequency (MHz)	Max. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	6.44	2.10	7.151	4000
Mid	2441	5.61	2.10	5.907	4000
High	2480	6.99	2.10	8.117	4000

2M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	3.26	2.10	3.439	4000
Mid	2441	2.77	2.10	3.072	4000
High	2480	3.82	2.10	3.912	4000

3M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	3.23	2.10	3.415	4000
Mid	2441	2.78	2.10	3.079	4000
High	2480	3.84	2.10	3.930	4000

* Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



8 20dB & 99% BANDWIDTH MEASUREMENT


8.1 Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth

8.2 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT	MFR MODEL SERIAL LAST CAL				CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020


8.3 Test Set-up



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Turn on the 99% bandwidth function, max reading.
- 7. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



SGS

8.5 Measurement Result

GFSK

GI SK	GI SIK			
20 dB		2/3		
СН	BW	BW		
	(MHz)	(MHz)		
Low	0.8814	0.59		
Mid	0.8818	0.59		
High	0.8808	0.59		

π	14_	D	a	P.	SK	′
	_	u	w		,,,,	Δ

11/4-D	QF3N	
	20 dB	2/3
СН	BW	BW
	(MHz)	(MHz)
Low	1.254	0.84
Mid	1.256	0.84
High	1.255	0.84

8-DPSK

СН	20 dB BW (MHz)	2/3 BW (MHz)
Low	1.254	0.84
Mid	1.253	0.84
High	1.253	0.84

GFSK

OI OIL	
	99%
СН	Bandwidth
	(MHz)
Low	0.8125
Mid	0.81413
High	0.81385


π/4-DQPSK

וויד-טעו טוי	•
	99%
СН	Bandwidth
	(MHz)
Low	1.1709
Mid	1.1709
High	1.1705

8-DPSK

	99%
СН	Bandwidth
	(MHz)
Low	1.1705
Mid	1.1705
High	1.1734

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。







OBW 20dB GFSK 1M DH5 2402MHz




OBW 20dB GFSK 1M DH5 2441MHz




OBW 20dB GFSK 1M DH5 2480MHz




OBW 20dB $\pi/4DQPSK$ 2M 2402MHz



OBW 20dB $\pi/4DQPSK$ 2M 2441MHz



OBW 20dB $\pi/4DQPSK$ 2M 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。


Page 22 of 70




OBW 20dB 8DPSK 3M DH5 2402MHz



OBW 20dB 8DPSK 3M DH5 2441MHz




OBW 20dB 8DPSK 3M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。







IC OBW 99% GFSK 1M DH5 2402MHz




IC OBW 99% GFSK 1M DH5 2441MHz




IC OBW 99% GFSK 1M DH5 2480MHz




IC OBW 99% $\pi/4DQPSK$ 2M 2402MHz



IC OBW 99% $\pi/4DQPSK$ 2M 2441MHz



IC OBW 99% $\pi/4DQPSK$ 2M 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


Page 24 of 70




IC OBW 99% 8DPSK 3M DH5 2402MHz



IC OBW 99% 8DPSK 3M DH5 2441MHz



IC OBW 99% 8DPSK 3M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



9 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9 limit.

9.2 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT	MFR MODEL SERIAL LAST CAL DU				CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020

9.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



9.4 Measurement Procedure

Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	J	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.5 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format document, htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company of th transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Band Edge_GFSK_1M_DH5_2402MHz


Band Edge GFSK 1M DH5 2480MHz

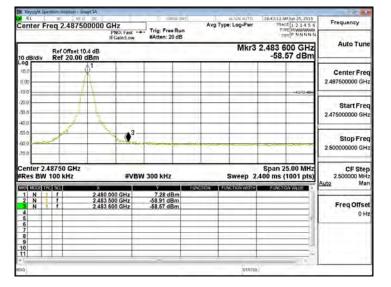

Band Edge 8DPSK 3M DH5 2402MHz

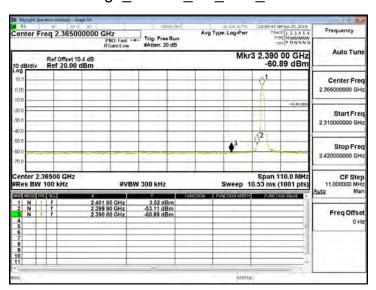

Band Edge_8DPSK_3M_DH5_2480MHz

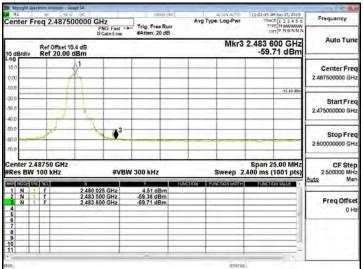


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Hopping Band Edge GFSK 1M DH5 2402MHz

Avg Type: Log-Pwr Auto Tur Mkr3 2.390 00 GHz -60.74 dBm Ref Offset 10.4 dB Ref 20.00 dBm Center Fre 2.365000000 GH Start Fre Stop Fre er 2.36500 GH Span 110.0 MHz Sweep 10.53 ms (1001 pts) CF Step 11,000000 MH Res BW 100 kHz **#VBW 300 kHz** 59.41 dB -60.74 dB Freq Offse


Hopping Band Edge GFSK 1M DH5 2480MHz

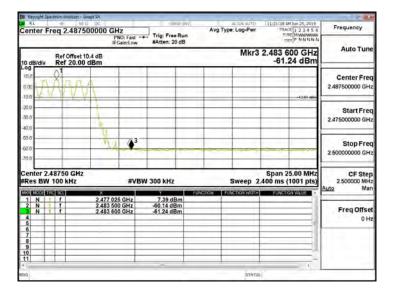

Hopping Band Edge 8DPSK 3M DH5 2402MHz

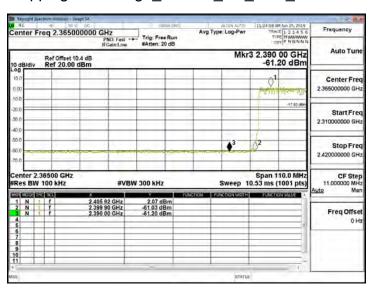

Hopping Band Edge_8DPSK_3M_DH5_2480MHz

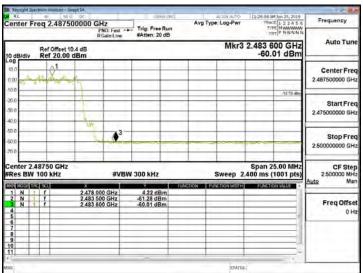


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Spurious Emission_GFSK_1M_DH5_2402MHz




Spurious Emission _GFSK_1M_DH5_2441MHz




Spurious Emission_GFSK_1M_DH5_2480MHz




Spurious Emission 8DPSK 3M DH5 2402MHz



Spurious Emission _8DPSK_3M_DH5_2441MHz



Spurious Emission 8DPSK 3M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, must also comply with the §15.209 & RSS-Gen §8.10 Table 6 limit.

And according to §15.33(a) (1) & RSS-Gen §8.9 Table 4 & 5, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



10.2 Measurement Equipment Used

966A Chamber						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Low Pass Filter	EWT	EWT-56-0019	RF46	02/26/2019	02/25/2020	
High Pass Filter	R&S	F13 HPF 3GHz	RF64	02/26/2019	02/25/2020	
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020	
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019	
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020	
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020	
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020	
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019	
Loop Antenna	COM-POWER	AL-130	121051	03/22/2019	03/21/2020	
Horn Antenna	ETS LINDGREN	3116	00026370	12/26/2018	12/25/2019	
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020	
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020	
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020	
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R	
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R	
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R	
Software	e3 V6.11-20180413					


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

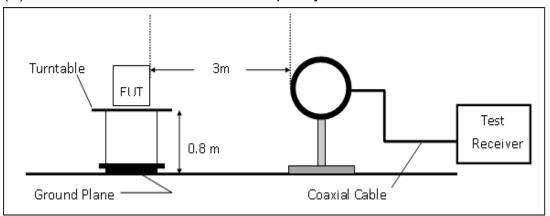

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

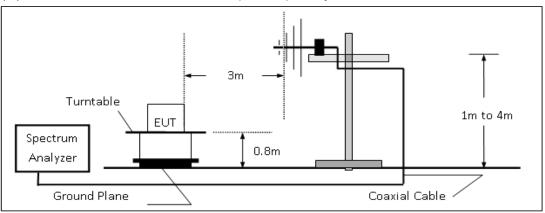


(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

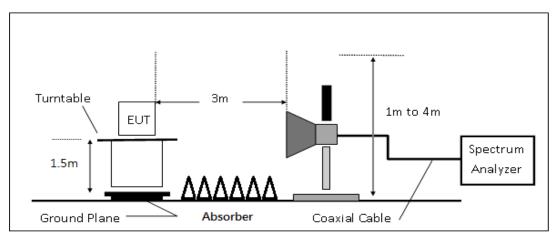

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





10.4 Measurement Procedure

Radiated Emission

- 1. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Use the follow spectrum analyzer setting:
 - (1) Span = wide enough to fully capture the emission being measured
 - (2) RBW = 1 MHz for f ≥ 1 GHz, 100 kHz for f < 1 GHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c)

 Duty Cycle = On time/100 milliseconds


On time = N1*L1=N2*L2+...+N(n-1)*LN(n-1)+N(n)*L(n)

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + 20*log (duty Cycle)

- 6. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 7. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 8. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 9. Repeat above procedures until all frequency of the interest measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	•	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 KHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 35 of 70



Radiated Band Edge Measurement Result:


Report Number :T190612W02 **Test Date** :2019-06-27

Operation Band Temp./Humi. :BT BR :21/49

Frequency :2402 MHz :VERTICAL Antenna Pol.

Operation Mode :BE CH Low Engineer :Kane


EUT Pol. :E2 Plan

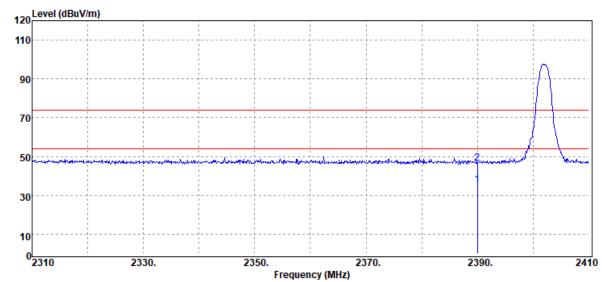

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	38.60	-3.38	35.22	54.00	-18.78
2390.00	Peak	49.85	-3.38	46.47	74.00	-27.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





Report Number :T190612W02

Operation Band :BT BR

:2402 MHz Frequency


Operation Mode :BE CH Low

EUT Pol. :E2 Plan **Test Date** :2019-06-27

Temp./Humi. :21/49

:HORIZONTAL Antenna Pol.


Engineer :Kane

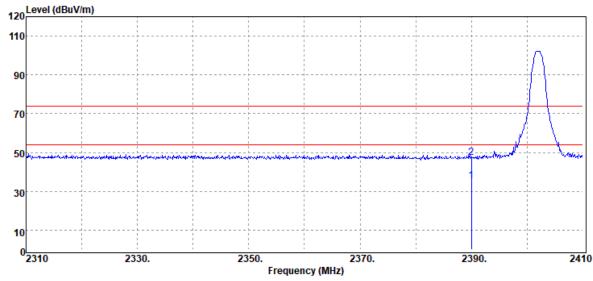

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	38.71	-3.38	35.33	54.00	-18.67
2390.00	Peak	50.84	-3.38	47.46	74.00	-26.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Report Number :T190612W02 **Test Date** :2019-06-27

Operation Band :BT BR Temp./Humi. :21/49

:2480 MHz :VERTICAL Frequency Antenna Pol.

Operation Mode :BE CH High Engineer :Kane


EUT Pol. :E2 Plan

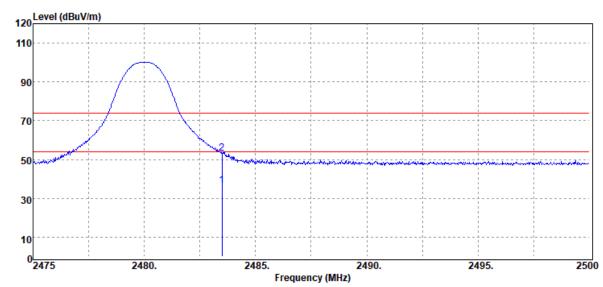

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	39.47	-2.83	36.64	54.00	-17.36
2483.50	Peak	55.79	-2.83	52.96	74.00	-21.04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





Report Number :T190612W02

Operation Band :BT BR

:2480 MHz Frequency


Operation Mode :BE CH High

EUT Pol. :E2 Plan **Test Date** :2019-06-27

Temp./Humi. :21/49

:HORIZONTAL Antenna Pol.


Engineer :Kane

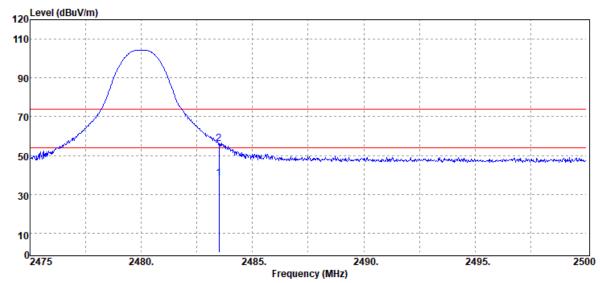

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	41.05	-2.83	38.22	54.00	-15.78
2483.50	Peak	59.05	-2.83	56.22	74.00	-17.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Report Number :T190612W02 Test Date :2019-06-27

Operation Band :BT EDR Temp./Humi. :21/49

Frequency :2402 MHz Antenna Pol. :VERTICAL


Operation Mode :BE CH Low Engineer :Kane

EUT Pol. :E2 Plan

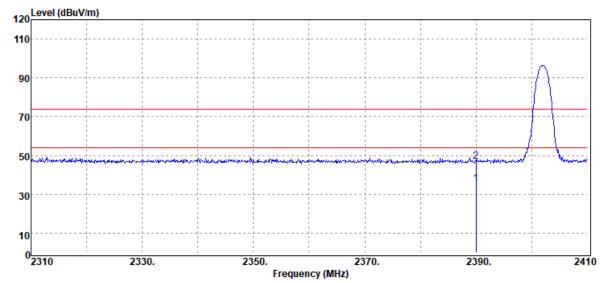

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	38.56	-3.38	35.18	54.00	-18.82
2390.00	Peak	50.16	-3.38	46.78	74.00	-27.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Report Number :T190612W02

Operation Band :BT EDR

Frequency :2402 MHz


Operation Mode :BE CH Low

EUT Pol. :E2 Plan **Test Date** :2019-06-27

Temp./Humi. :21/49

:HORIZONTAL Antenna Pol.


Engineer :Kane

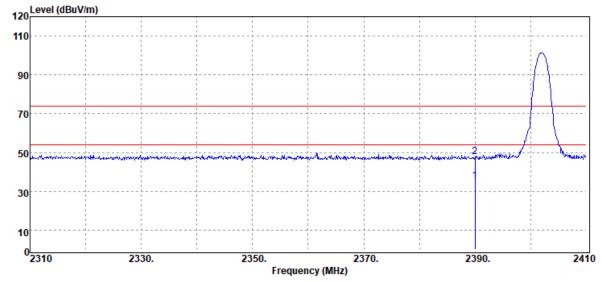

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	38.81	-3.38	35.43	54.00	-18.57
2390.00	Peak	51.10	-3.38	47.72	74.00	-26.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Report Number :T190612W02 **Test Date** :2019-06-27

Operation Band :BT EDR Temp./Humi. :21/49

:2480 MHz :VERTICAL Frequency Antenna Pol.

Operation Mode :BE CH High Engineer :Kane


EUT Pol. :E2 Plan

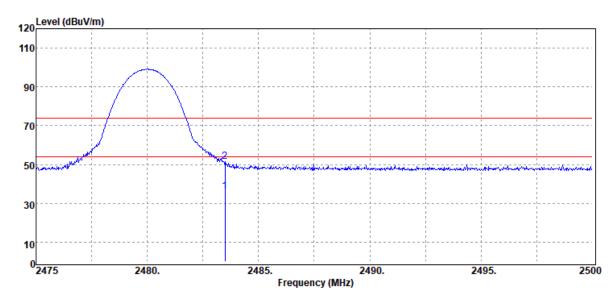

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	39.10	-2.83	36.27	54.00	-17.73
2483.50	Peak	54.21	-2.83	51.38	74.00	-22.62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Report Number :T190612W02 **Test Date** :2019-06-27

Operation Band :BT EDR Temp./Humi. :21/49

:2480 MHz :HORIZONTAL Frequency Antenna Pol.

Operation Mode :BE CH High Engineer :Kane


EUT Pol. :E2 Plan

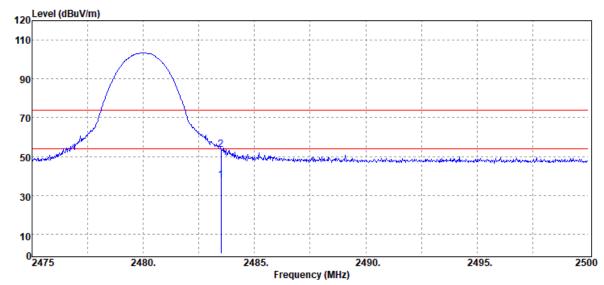

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	40.54	-2.83	37.71	54.00	-16.29
2483.50	Peak	56.39	-2.83	53.56	74.00	-20.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






:T190612W02 Report Number **Test Date** :2019-06-27

:BT BR Hopping **Operation Band** Temp./Humi. :21/49

:2402 MHz :VERTICAL Frequency Antenna Pol.


Operation Mode :BE CH Low Engineer :Kane

EUT Pol. :E2 Plan

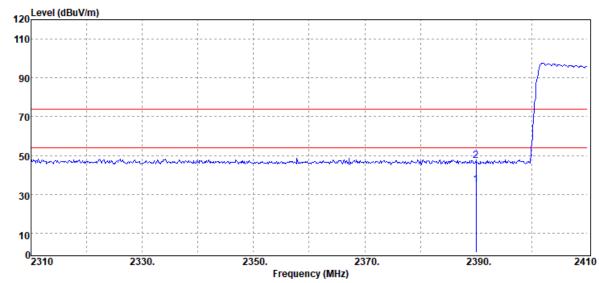

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	38.35	-3.38	34.97	54.00	-19.03
2390.00	Peak	50.63	-3.38	47.25	74.00	-26.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



:2019-06-27

:21/49

Test Date




:T190612W02 Report Number

:BT BR Hopping **Operation Band** Temp./Humi.

:2402 MHz :HORIZONTAL Frequency Antenna Pol.

Operation Mode :BE CH Low Engineer :Kane


EUT Pol. :E2 Plan

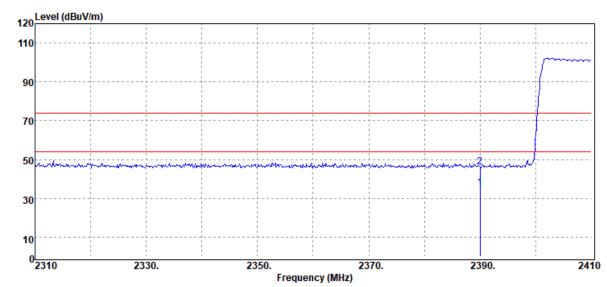

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	38.76	-3.38	35.38	54.00	-18.62
2390.00	Peak	49.52	-3.38	46.14	74.00	-27.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Report Number :T190612W02 Test Date :2019-06-27

Operation Band :BT BR Hopping Temp./Humi. :21/49

Frequency :2480 MHz Antenna Pol. :VERTICAL


Operation Mode :BE CH High Engineer :Kane

EUT Pol. :E2 Plan

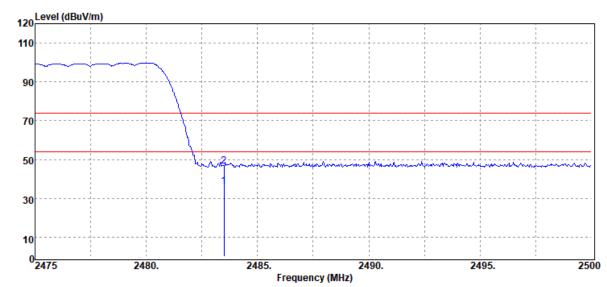

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	38.81	-2.83	35.98	54.00	-18.02
2483.50	Peak	49.42	-2.83	46.59	74.00	-27.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





:T190612W02 Report Number

:BT BR Hopping **Operation Band**

:2480 MHz Frequency


Operation Mode :BE CH High

EUT Pol. :E2 Plan **Test Date** :2019-06-27

Temp./Humi. :21/49

:HORIZONTAL Antenna Pol.


Engineer :Kane

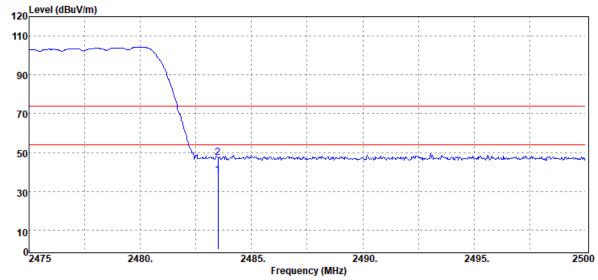

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	40.84	-2.83	38.01	54.00	-15.99
2483.50	Peak	50.26	-2.83	47.43	74.00	-26.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Report Number :T190612W02 Test Date :2019-06-27

Operation Band :BT EDR Hopping Temp./Humi. :21/49

Frequency :2402 MHz Antenna Pol. :VERTICAL

Operation Mode :BE CH Low Engineer :Kane

EUT Pol. :E2 Plan

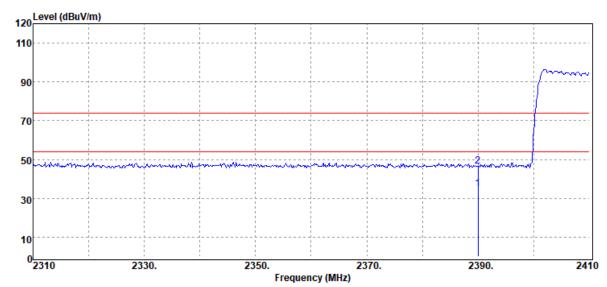


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	38.38	-3.38	35.00	54.00	-19.00
2390.00	Peak	49.72	-3.38	46.34	74.00	-27.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

所力方面所可,此報告無不識型列面之後而其具,问时如体品階体带列允。 个報告不經本之口書面計可,不可部的模模。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

程智科技股份有限公司





:T190612W02 Report Number

Operation Band :BT EDR Hopping

:2402 MHz Frequency


Operation Mode :BE CH Low

EUT Pol. :E2 Plan **Test Date** :2019-06-27

Temp./Humi. :21/49

:HORIZONTAL Antenna Pol.


Engineer :Kane

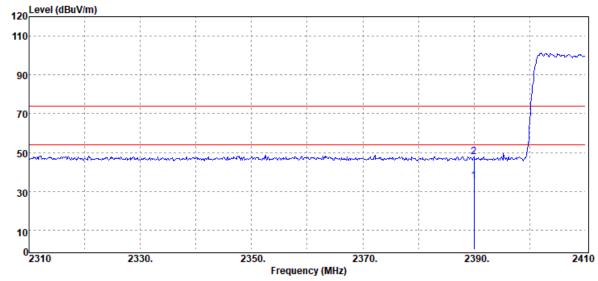

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	38.74	-3.38	35.36	54.00	-18.64
2390.00	Peak	50.99	-3.38	47.61	74.00	-26.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



:2019-06-27




Report Number :T190612W02 Test Date

Operation Band :BT EDR Hopping Temp./Humi. :21/49

Frequency :2480 MHz Antenna Pol. :VERTICAL


Operation Mode :BE CH High Engineer :Kane

EUT Pol. :E2 Plan

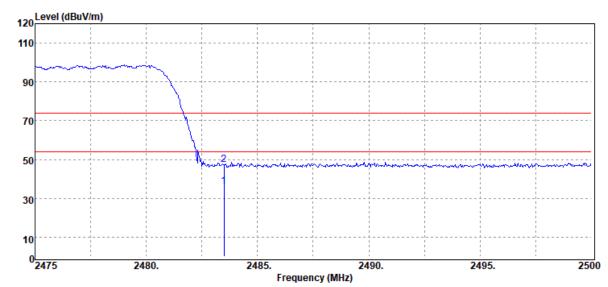

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2483.50	Average	38.94	-2.83	36.11	54.00	-17.89
2483.50	Peak	50.14	-2.83	47.31	74.00	-26.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





:T190612W02 Report Number

Operation Band :BT EDR Hopping

:2480 MHz Frequency


Operation Mode :BE CH High

EUT Pol. :E2 Plan **Test Date** :2019-06-27

Temp./Humi. :21/49

:HORIZONTAL Antenna Pol.


Engineer :Kane

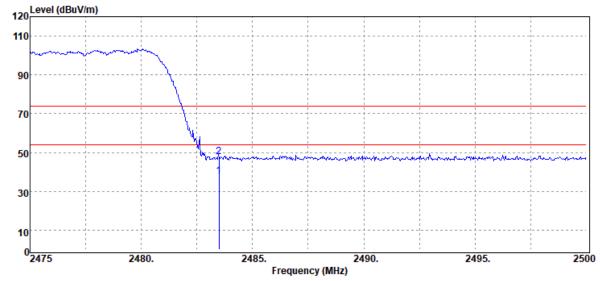

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dΒμV/m	dB
2483.50	Average	40.74	-2.83	37.91	54.00	-16.09
2483.50	Peak	50.61	-2.83	47.78	74.00	-26.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





Radiated Spurious Emission Measurement Result:

Frequency form 30MHz to 1000MHz


Report Number :T190612W02 Test Date :2019-06-28

Operation Band :BT BR Temp./Humi. :21/49

Frequency :2441 MHz :VERTICAL Antenna Pol.

Operation Mode :Tx CH Mid Engineer :Kane


EUT Pol. :E2 Plan

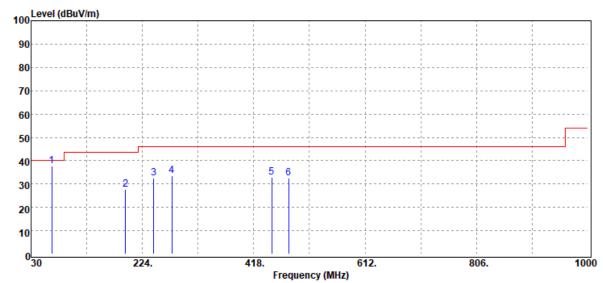

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
65.89	Peak	52.92	-15.35	37.57	40.00	-2.43
194.90	Peak	37.88	-10.06	27.82	43.50	-15.68
243.40	Peak	42.96	-10.28	32.68	46.00	-13.32
275.41	Peak	41.97	-8.42	33.55	46.00	-12.45
449.04	Peak	36.84	-3.88	32.96	46.00	-13.04
479.11	Peak	35.63	-2.98	32.65	46.00	-13.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





Report Number :T190612W02

Operation Band :BT BR

:2441 MHz Frequency


Operation Mode :Tx CH Mid

EUT Pol. :E2 Plan **Test Date** :2019-06-28

Temp./Humi. :21/49

:HORIZONTAL Antenna Pol.

Engineer :Kane

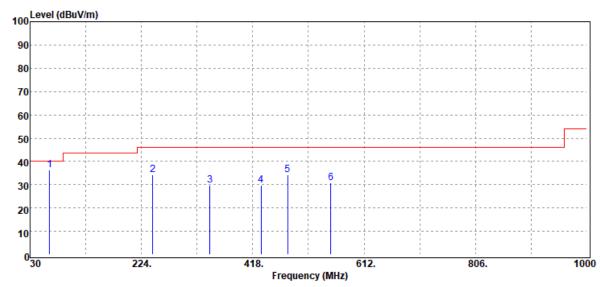

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
63.95	Peak	51.65	-15.28	36.37	40.00	-3.63
243.40	Peak	44.54	-10.28	34.26	46.00	-11.74
343.31	Peak	37.04	-7.14	29.90	46.00	-16.10
432.55	Peak	34.01	-4.32	29.69	46.00	-16.31
479.11	Peak	37.34	-2.98	34.36	46.00	-11.64
553.80	Peak	33.22	-2.29	30.93	46.00	-15.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Frequency above 1 GHz


Report Number :T190612W02 **Test Date** :2019-06-27

Operation Band Temp./Humi. :BT BR :21/49

Frequency :2402 MHz :VERTICAL Antenna Pol.

Operation Mode :Tx CH Low Engineer :Kane


EUT Pol. :E2 Plan

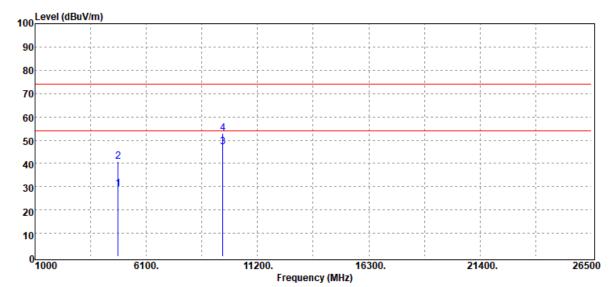

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4804.00	Average	25.86	3.05	28.91	54.00	-25.09
4804.00	Peak	37.75	3.05	40.80	74.00	-33.20
9608.00	Average	33.91	13.02	46.93	54.00	-7.07
9608.00	Peak	39.79	13.02	52.81	74.00	-21.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Report Number :T190612W02 **Test Date** :2019-06-27

Operation Band :BT BR Temp./Humi. :21/49

:2402 MHz :HORIZONTAL Frequency Antenna Pol.

Operation Mode :Tx CH Low Engineer :Kane


EUT Pol. :E2 Plan

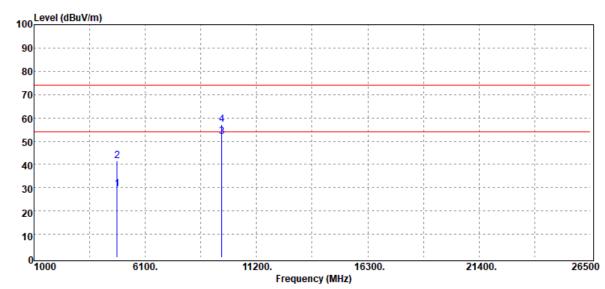

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4804.00	Average	26.41	3.05	29.46	54.00	-24.54
4804.00	Peak	38.37	3.05	41.42	74.00	-32.58
9608.00	Average	38.90	13.02	51.92	54.00	-2.08
9608.00	Peak	44.03	13.02	57.05	74.00	-16.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Report Number :T190612W02 Test Date :2019-06-27

Operation Band :BT BR Temp./Humi. :21/49

Frequency :2441 MHz Antenna Pol. :VERTICAL


Operation Mode :Tx CH Mid Engineer :Kane

EUT Pol. :E2 Plan

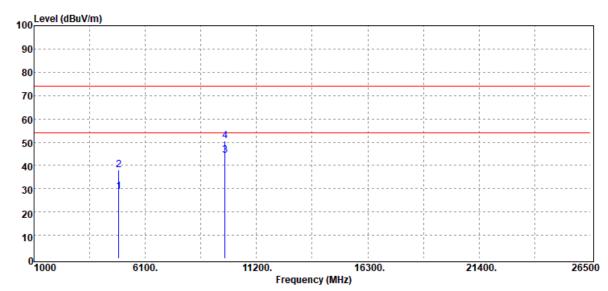

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4882.00	Average	25.38	3.38	28.76	54.00	-25.24
4882.00	Peak	34.82	3.38	38.20	74.00	-35.80
9764.00	Average	31.52	12.68	44.20	54.00	-9.80
9764.00	Peak	37.76	12.68	50.44	74.00	-23.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Report Number :T190612W02

Operation Band :BT BR

:2441 MHz Frequency


Operation Mode :Tx CH Mid

EUT Pol. :E2 Plan **Test Date** :2019-06-27

Temp./Humi. :21/49

:HORIZONTAL Antenna Pol.


Engineer :Kane

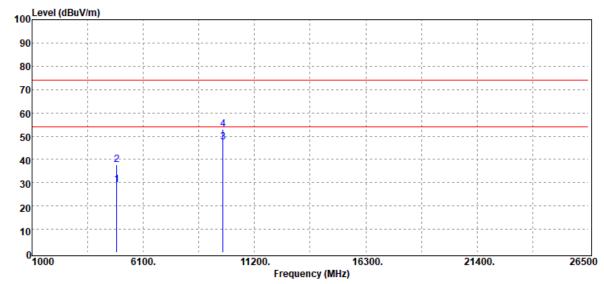

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Average	25.70	3.38	29.08	54.00	-24.92
4882.00	Peak	34.46	3.38	37.84	74.00	-36.16
9764.00	Average	34.87	12.68	47.55	54.00	-6.45
9764.00	Peak	40.30	12.68	52.98	74.00	-21.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






Report Number :T190612W02 **Test Date** :2019-06-27

Operation Band :BT BR Temp./Humi. :21/49

:2480 MHz :VERTICAL Frequency Antenna Pol.

Operation Mode :Tx CH High Engineer :Kane


EUT Pol. :E2 Plan

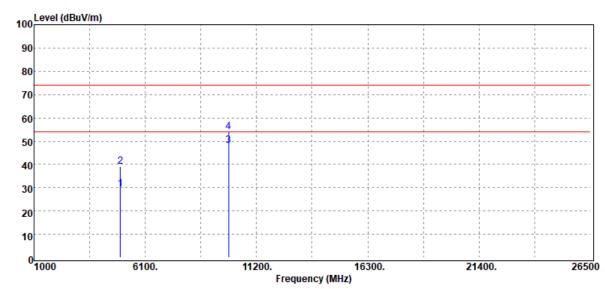

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	25.18	4.06	29.24	54.00	-24.76
4960.00	Peak	34.98	4.06	39.04	74.00	-34.96
9920.00	Average	34.82	13.22	48.04	54.00	-5.96
9920.00	Peak	40.74	13.22	53.96	74.00	-20.04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



:2019-06-27

Test Date




Report Number :T190612W02

Operation Band :BT BR Temp./Humi. :21/49

Frequency :2480 MHz Antenna Pol. :HORIZONTAL

Operation Mode :Tx CH High Engineer :Kane

EUT Pol. :E2 Plan

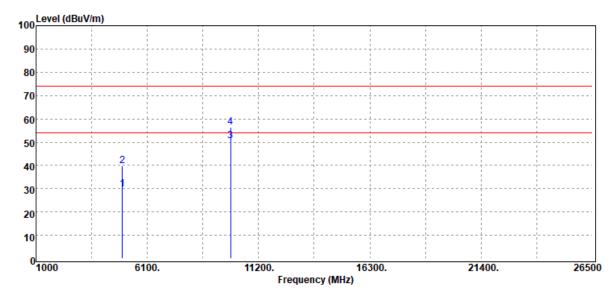

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	25.79	4.06	29.85	54.00	-24.15
4960.00	Peak	35.71	4.06	39.77	74.00	-34.23
9920.00	Average	37.17	13.22	50.39	54.00	-3.61
9920.00	Peak	43.22	13.22	56.44	74.00	-17.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



11 FREQUENCY SEPARATION


11.1 Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020

11.3 Test Set-up



11.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




11.5 Measurement Result

Channel separation (MHz)	Limit	Result
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS

Frequency Separation Test Data

Frequency Separation GFSK 1M DH5 CH0CH1CH2

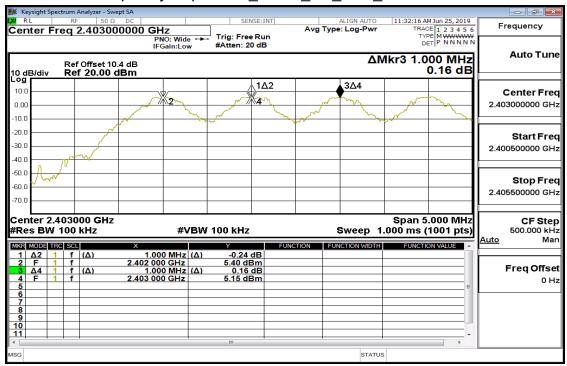

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



12 NUMBER OF HOPPING FREQUENCY


12.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2 Measurement Equipment Used

	Conducted Emission Test Site													
EQUIPMENT MFR MODEL SERIAL LAST CAL DU														
TYPE		NUMBER	NUMBER	CAL.										
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020									
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019									
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020									

12.3 Test Set-up



12.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

12.5 Measurement Result

Tabular Data of Total Channel Number

	Channel Number	Limit
2.4 GHz – 2.441GHz	40	
2.441 GHz – 2.4835GHz	39	>15
2.4GHz ~2.4835GHz	(40+39) = 79	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Channel Number

Hopping Frequency_GFSK_1M_DH5_2400-2441

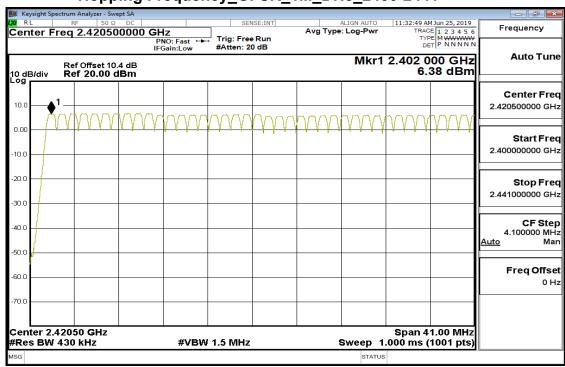

Hopping Frequency_GFSK_1M_DH5_2441-2480

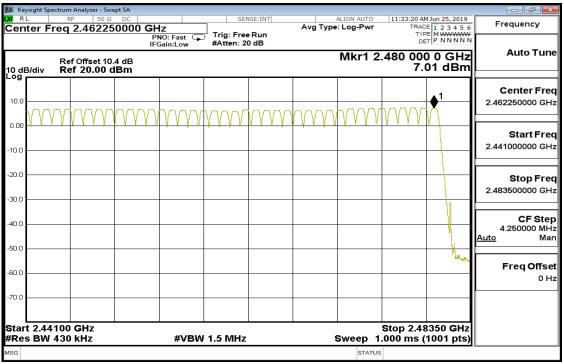

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page 63 of 70

13 TIME OF OCCUPANCY (DWELL TIME)


13.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

13.2 Measurement Equipment Used

	Conducted Emission Test Site													
EQUIPMENT MFR MODEL SERIAL LAST CA														
TYPE		NUMBER	NUMBER	CAL.										
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020									
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019									
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020									

13.3 Test Set-up



13.4 Measurement Procedure


- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = 2~8ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 * 20) (S), Hop Over Occupancy Time comes to (800 / 6 / 20)*(0.4 * 20) = 53.33

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

13.5 Tabular Result of the Measurement

GFSK (1Mbps)

GI SK (TWIDPS)					
Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	DH1	123.20	400ms	2.60	3.00
Low	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.35	1.00
	DH1	121.60	400ms	2.63	3.00
Mid	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.35	1.00
	DH1	123.20	400ms	2.60	3.00
High	DH3	260.80	400ms	0.61	1.00
	DH5	308.80	400ms	0.00	1.00

π/4 DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	DH1	124.80	400ms	2.56	3.00
Mid	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.35	1.00

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	DH1	123.20	400ms	2.60	3.00
Mid	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.35	1.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




A period time = 0.4 (s) * 79 = 31.6 (s)

GFSK (1Mbps):

CH Low	DH1 time slot = DH3 time slot = DH5 time slot =	0.385 * 1.640 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 = 31.6 =	123.20 (ms) 262.40 (ms) 308.80 (ms)
CH Mid	DH1 time slot = DH3 time slot = DH5 time slot =	0.380 * 1.640 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 = 31.6 =	121.60 (ms) 262.40 (ms) 308.80 (ms)
CH High	DH1 time slot = DH3 time slot = DH5 time slot =	0.385 * 1.630 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 =	123.20 (ms) 260.80 (ms) 308.80 (ms)
π/4 -DQPS	K (2Mbps):				
CH Mid	DH1 time slot = DH3 time slot = DH5 time slot =	0.390 * 1.640 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 = 31.6 =	124.80 (ms) 262.40 (ms) 308.80 (ms)
8-DPSK (31	Mbps):				
CH Mid	DH1 time slot = DH3 time slot = DH5 time slot =	0.385 * 1.640 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 = 31.6 =	123.20 (ms) 262.40 (ms) 308.80 (ms)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





	GFSK (1Mbps) for AFH Mode												
Hopping Channel PACKET TYPE Measurement Result Limit													
Number	PACKETTIFE	(ms)	(ms)										
20	DH5	154.40	400ms										
	π/4 DQPSK (2Mb	ps) for AFH Mode											
Hopping Channel	PACKET TYPE	Measurement Result	Limit										
Number	PACKETTIFE	(ms)	(ms)										
20	2DH5	154.40	400ms										
	8-DPSK (3Mbps	s) for AFH Mode											
Hopping Channel	PACKET TYPE	Measurement Result	Limit										
Number	PACKELLIPE	(ms)	(ms)										
20	3DH5	154.40	400ms										

GFSK (1Mbps):

DH5 time sl =	2.895	(ms) *	(800/6/20)*8 =	154.40 (ms)
$\pi/4$ -DQPSK (2Mbps				
DH5 time sl =	2.895	(ms) *	(800/6/20)* 8 =	154.40 (ms)
8-DPSK (3Mbps):				
DH5 time sl =	2.895	(ms) *	(800/6/20)* 8 =	154.40 (ms)

13.6 **Measurement Result**

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Dwell Time_GFSK_1M_DH1_2402MHz

inter Fre	q 2.402000	000 GHz	Fast	Trig: Free Run	AvpT	ype: Log-Pwr	10:24 19 AP 2M 25, 2019 TYPE VIOLENTIAL SECTION 10	Frequency
dB/div I	Ref Offset 10.4 Ref 10.00 dE					Δ	Mkr3 1.250 ms 0.67 dB	Auto Tune
0 1	1Δ2	♦3∆4	I					Center Free 2.402000000 GH
10								Start Fre 2.402000000 GH
10	ynut-leithirth	frisher .	Heliq	Heldmarkery	NA PARTIES	Al-Janjuphyn	anti-territorios	Stop Fre 2.402000000 GH
enter 2.40 es BW 1.0	2000000 GH MHz	lz	#VBW	3.0 MHz		Sweep 5	Span 0 Hz .000 ms (1001 pts)	CF Ste 1.000000 MH Auto Ma
Δ4 F	(Δ) 1 (Δ) 1 (Δ)	110.0	ms (A)	5.14 dB 0.47 dBm 0.67 dB 0.47 dBm	FUNCTION .	FUNE ION (COH)	FUNCTION WALLE	Freq Offse
9								-


Dwell Time_GFSK_1M_DH1_2441MHz

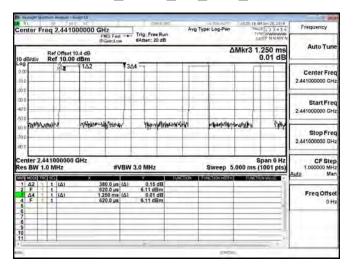


Dwell Time_GFSK_1M_DH1_2480MHz




Dwell Time_GFSK_1M_DH3_2402MHz

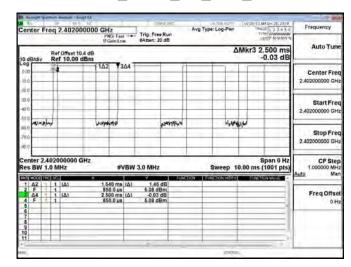

Dwell Time_GFSK_1M_DH3_2441MHz



Dwell Time_GFSK_1M_DH3_2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Dwell Time GFSK_1M_DH5_2402MHz

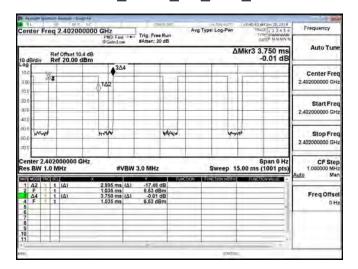


Dwell Time_GFSK_1M_DH5_2441MHz

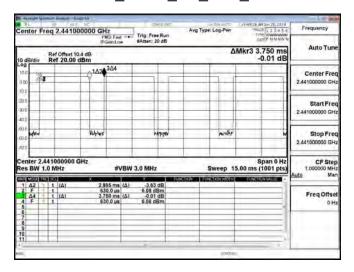


Dwell Time GFSK 1M DH5 2480MHz




Dwell Time $\pi/4DQPSK$ 2M DH1 2441MHz

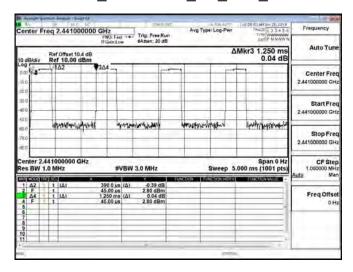

Dwell Time $\pi/4DQPSK$ 2M DH3 2441MHz

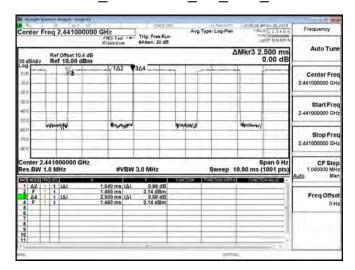

Dwell Time_π/4DQPSK_2M_DH5_2441MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Dwell Time 8DPSK 3M DH1 2441MHz

	-	-	-	-		et Alt								Take 2			Sin 25, 2019	
Cor	nter	Fr	eq	2.44	100	000	67	NO: Feet	-	CO. L	Run	Ave		Log-Pe		1960	123454	Frequency
		. 1		f Offse			JE (anire Lev		#Atten: 2	2 8 5	_			ΔMk	r3 1.	250 ms	Auto Tun
10 c	B/di	IV.	Re	f 10.0	JO 0		/1Δ2		-	₹3∆4 =		_	-	_	_	-	.vz ub	
DO			_		42	***	1242		_	1304				-	-		-	Center Fre
th d																		2.441000000 GH
20.0																		\$337,000,000
30.0						1				1			Ш					Start Fre
40 0						11.												2.441000000 GH
2010	1					-				-			-	-			1	2.441000000 GH
50 (Sec.	MA.	44)	ery when			100	harrish	He		Alexand !	tracking "in		84	4	Mude		
	T	-	-	-			-	-	-1		-				-	-		Stop Fre
70.0																		2,441000000 GH
G	L																	744
	nter BV			00000 MHz	0 G	HZ		#V	BW	3.0 MHz			S	weep	5.000		pan 0 Hz (001 pts)	CF Ste 1.000000 MH
100	1000	6110	150			¥				٧		UNCTON	FINE	TION ME	1141	FUNCTIO	MWMDE I -	Auto Ma
1	Δ2	li.		(A)				5.0 us	(A)	0.45			_					
7	F A4	11	1	(Δ)	_			5.0 µs	(A)	3.22 d	3m	-			-		_	Freq Offse
4	F	1	li				83	5.0 us	UM I	3.22 d	3m							0+
5	-	+		-				200	_				_		+		- 3	
7																		
8	_	+	-	+					-		-	_			-			
67 89 10																		
11		1	_	-								_			-			
															ne			
														0.04	PARTY.			

Dwell Time_8DPSK_3M_DH3_2441MHz

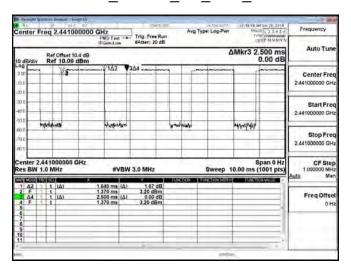


Dwell Time_8DPSK_3M_DH5_2441MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



SGS

14 ANTENNA REQUIREMENT

14.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

14.2 Antenna Connected Construction

An embedded-in antenna design is used.

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。