

TEST REPORT

FCC Test for eROU_7191725L1_X_R
Certification

APPLICANT
SOLiD, Inc.

REPORT NO.
HCT-RF-2109-FC010-R1

DATE OF ISSUE
September 9, 2021

Tested by
Kyung Soo Kang



Technical Manager
Jong Seok Lee



HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si,
Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT

FCC Test for
eROU_7191725L1_X_R

REPORT NO.

HCT-RF-2109-FC010-R1

DATE OF ISSUE

September 09, 2021

Additional Model

eROU_7191725L1_N_R, eROU_7191725L2_X_R,
eROU_7191725L2_N_R

Applicant

SOLiD, Inc.

10, 9th Floor, SOLiD Space, Pangyoyeok-ro 220, Bundang-gu, Seongnam-si,
Gyeonggi-do, 463-400, South Korea

Eut Type Model Name

ALLIANCE eROU
eROU_7191725L1_X_R

FCC ID

W6UER7191725R

Output Power

Lower 700 MHz, Upper 700 MHz, FirstNet: 19 dBm
PCS, AWS, BRS/EBS: 23 dBm

Date of Test

June 12, 2021~ September 09, 2021

FCC Rule Parts:

Part 2, Part 24, Part 27, Part 90

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	September 03, 2021	Initial Release
1	September 09, 2021	<ul style="list-style-type: none">- Revised the 'Antenna Peak Gain'.- Added compliance with 90.219.- Added the section of 'Noise figure'.- We recalculated the output power with the changed Antenna Peak Gain.

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. GENERAL INFORMATION	5
1.1. APPLICANT INFORMATION	5
1.2. PRODUCT INFORMATION	5
1.3. TEST INFORMATION	5
2. FACILITIES AND ACCREDITATIONS	6
2.1. FACILITIES	6
2.2. EQUIPMENT	6
3. TEST SPECIFICATIONS	7
3.1. STANDARDS	7
3.2. ADDITIONAL DESCRIPTIONS ABOUT TEST	8
3.3. MEASUREMENT UNCERTAINTY	11
3.4. STANDARDS ENVIRONMENTAL TEST CONDITIONS	11
3.5. TEST DIAGRAMS	12
4. TEST EQUIPMENTS	13
5. TEST RESULT	15
5.1. AGC THRESHOLD	15
5.2. OUT-OF-BAND REJECTION	17
5.3. INPUT-VERSUS-OUTPUT SIGNAL COMPARISON	20
5.4. INPUT/OUTPUT POWER AND AMPLIFIER/BOOSTER GAIN	73
5.5. NOISE FIGURE	100
5.6. OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS AND SPURIOUS EMISSIONS	102
5.7. RADIATED SPURIOUS EMISSIONS	214
6. Annex A_EUT AND TEST SETUP PHOTO	222

1. GENERAL INFORMATION

1.1. APPLICANT INFORMATION

Company Name	SOLiD, Inc.
Company Address	10, 9th Floor, SOLiD Space, Pangyoyeok-ro 220, Bundang-gu, Seongnam-si, Gyeonggi-do, 463-400, South Korea

1.2. PRODUCT INFORMATION

EUT Type	ALLIANCE eROU		
EUT Serial Number	SA0000001R		
Power Supply	DC 39~57 Vdc		
Frequency Range	Band Name	Downlink (MHz)	
	Lower 700 MHz	728 ~ 746	
	Upper 700 MHz	746 ~ 757	
	FirstNet	758 ~ 768	
	Broadband PCS	1 930 ~ 1 995	
	AWS13	2 110 ~ 2 180	
	BRS/EBS	2 496 ~ 2 690	
Tx Output Power	Lower 700 MHz, Upper 700 MHz, FirstNet: 19 dBm PCS, AWS, BRS: 23 dBm		
Antenna Peak Gain	Band Name	Gain(dBi)	
		Internal	External
	Lower 700 MHz	2.78	8
	Upper 700 MHz		
	FirstNet		
	Broadband PCS	3.69	8
	AWS13	3.30	8
	BRS/EBS	6.67	8

1.3. TEST INFORMATION

FCC Rule Parts	Part 2, Part 24, Part 27, Part 90
Measurement Standards	KDB 935210 D05 v01r04, KDB 971168 D01 v03r01, ANSI C63.26-2015
Test Location	HCT CO., LTD. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

2. FACILITIES AND ACCREDITATIONS

2.1. FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4 (Version: 2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

2.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

3. TEST SPECIFICATIONS

3.1. STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 2, Part 24, Part 27, Part 90.

Description	Reference	Results
AGC threshold	KDB 935210 D05 v01r04 3.2	Compliant
Out-of-band rejection	KDB 935210 D05 v01r04 3.3	Compliant
Input-versus-output signal comparison	§ 2.1049	Compliant
Input/output power and amplifier/booster gain	§ 2.1046, § 24.232, § 27.50(b), (c), (d), (h), § 90.219(e)(1), § 90.542	Compliant
Noise figure	KDB 935210 D02 v04r02 V(j)(5) § 90.219(d)(6)(ii)	Compliant
Out-of-band/out-of-block emissions and spurious emissions	§ 2.1051, § 24.238, § 27.53(c), (f), (g), (h), (m), § 90.219(e)(3), § 90.543	Compliant
Spurious emissions radiated	§ 2.1053	Compliant

3.2. ADDITIONAL DESCRIPTIONS ABOUT TEST

Except for the following cases, EUT was tested under normal operating conditions.

: Out-of-band rejection test requires maximum gain condition without AGC.

The test was generally based on the method of KDB 935210 D05 v01r04 and only followed ANSI C63.26-2015 if there was no test method in KDB standard.

EUT was tested with following modulated signals provide by applicant.

Band Name	Tested signals
Lower 700 MHz	LTE 5 MHz
	LTE 10 MHz
Upper 700 MHz	LTE 5 MHz
	LTE 10 MHz
FirstNet	LTE 5 MHz
	LTE 10 MHz
AWS	CDMA
	WCDMA
	LTE 5 MHz
	LTE 10 MHz
	LTE 20 MHz
Broadband PCS	GSM
	CDMA
	WCDMA
	LTE 5 MHz
	LTE 10 MHz
	LTE 20 MHz
BRS/EBS	LTE 20 MHz
	5G NR_20 MHz
	5G NR_40 MHz
	5G NR_60 MHz
	5G NR_80 MHz
	5G NR_100 MHz

We have done GSM and EDGE / CDMA and 1xEVDO modulation test in technology. Test results are only attached worst cases.

The frequency stability measurement has been omitted in accordance with section 3.7 of KDB 935210 D05 v01r04.

: It can be confirmed through input-versus-output signal comparison test that EUT does not alter the input signal.

The tests results included actual loss value for attenuator and cable combination as shown in the table below.

: Input Path

Correction factor table			
Frequency (MHz)	Factor (dB)	Frequency (MHz)	Factor (dB)
1 900	1.125	2 350	1.453
1 950	1.502	2 400	1.500
2 000	1.359	2 450	1.343
2 050	1.265	2 500	1.296
2 100	1.204	2 550	1.394
2 150	1.318	2 600	1.537
2 200	1.208	2 650	1.320
2 250	1.561	2 700	1.588
2 300	1.293	-	-

: Output Path

Correction factor table			
Frequency (MHz)	Factor (dB)	Frequency (MHz)	Factor (dB)
2	29.285	3 000	33.138
10	29.383	4 000	34.055
30	29.358	5 000	35.488
50	29.423	6 000	35.825
100	29.644	7 000	36.974
200	29.970	8 000	37.731
300	30.193	9 000	38.292
400	30.391	10 000	39.318
500	30.546	11 000	38.223
600	30.693	12 000	38.604
700	30.850	13 000	38.088
800	30.961	14 000	39.527
900	31.104	15 000	39.790
1 000	31.234	16 000	40.284
1 100	31.376	17 000	39.296
1 200	31.533	18 000	39.680
1 300	31.615	19 000	40.452
1 400	31.731	20 000	41.104
1 500	31.793	21 000	43.448
1 600	31.918	22 000	42.703
1 700	31.977	23 000	43.767
1 800	32.059	24 000	43.265
1 900	32.158	25 000	44.990
2 000	32.252	26 000	45.921
2 100	32.357	26 500	41.956
2 200	32.417	-	-
2 300	32.519	-	-
2 400	32.643	-	-
2 500	32.743	-	-
2 600	32.853	-	-
2 700	32.984	-	-

3.3. MEASUREMENT UNCERTAINTY

Description	Condition	Uncertainty
Radiated Disturbance	9 kHz ~ 30 MHz	± 3.40 dB
	30 MHz ~ 1 GHz	± 4.80 dB
	1 GHz ~ 18 GHz	± 5.70 dB
	18 GHz ~ 40 GHz	± 5.05 dB


* Coverage factor $k = 2$, Confidence levels of 95 %

3.4. STANDARDS ENVIRONMENTAL TEST CONDITIONS

Temperature	+15 °C to +35 °C
Relative humidity	30 % to 60 %
Air pressure	860 mbar to 1 060 mbar


3.5. TEST DIAGRAMS

Conducted Test

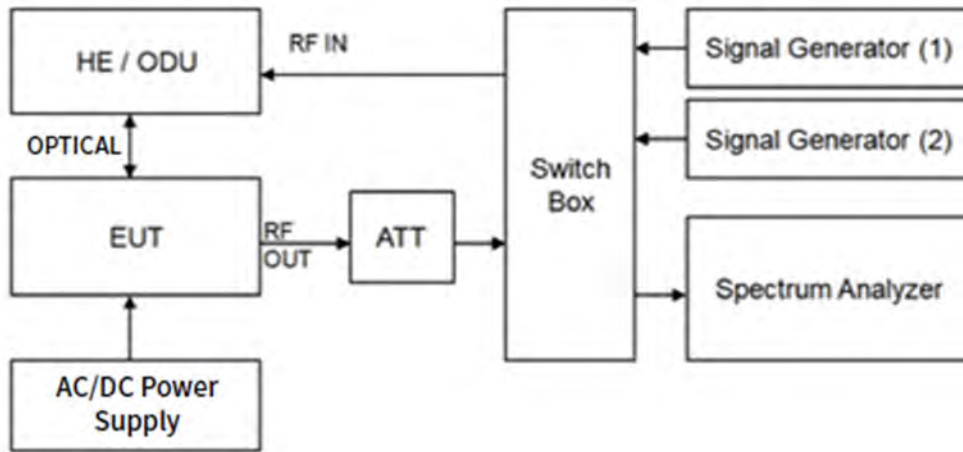


Radiated Test

30 MHz ~ 1 GHz

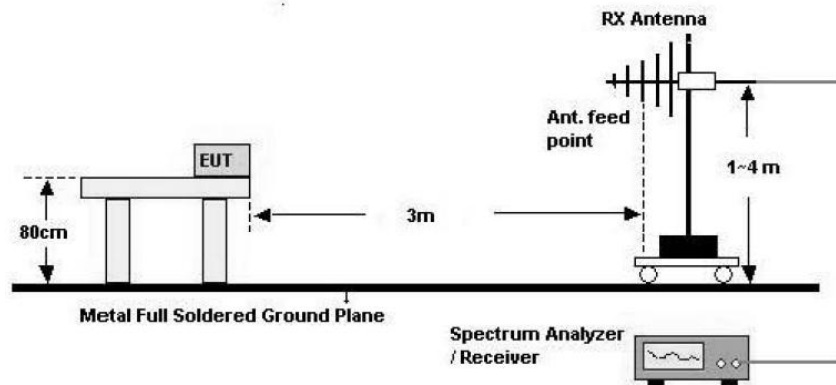

Above 1 GHz

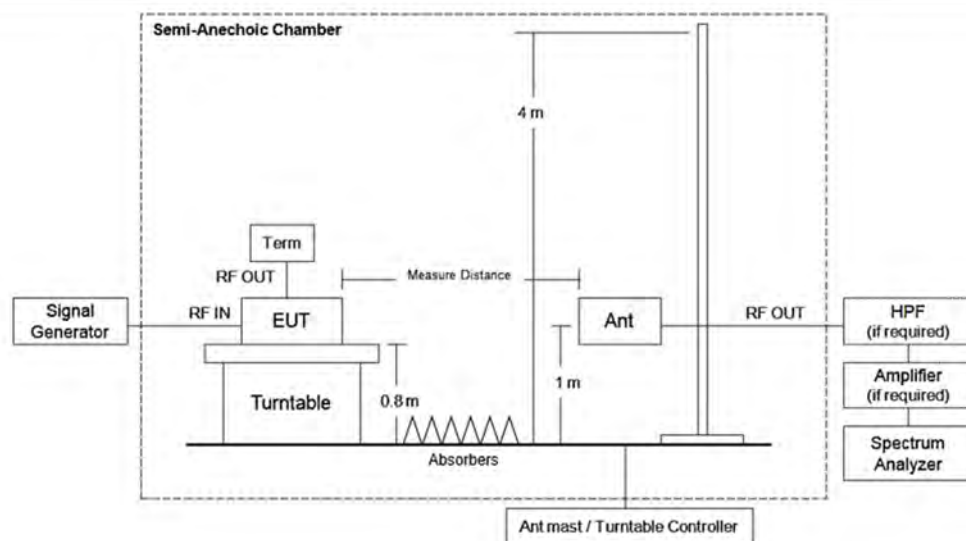

4. TEST EQUIPMENTS

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
MXA Signal Analyzer	N9020A	Keysight	MY52440870	07/27/2022	Annual
PXA Signal Analyzer	N9030A	Keysight	US51350313	03/30/2022	Annual
MXG Vector Signal Generator	N5182A	Agilent	MY47070406	01/08/2022	Annual
MXG Vector Signal Generator	N5182A	Agilent	MY46240807	12/02/2021	Annual
30 dB Attenuator	WA93-30-33	Weinschel Associates	0202	03/30/2022	Annual
Switch	S46	KEITHLEY	1088024	N/A	N/A
Controller (Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	Turn Table	Audix	N/A	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM19050002	N/A	N/A
Loop Antenna	FMZB 1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Trilog Super Broadband Antenna	VULB 9168	Schwarzbeck	9168-0895	09/04/2022	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02296	05/19/2022	Biennial
Horn Antenna (15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Spectrum Analyzer	FSV40	Rohde & Schwarz	101055	05/14/2022	Annual
LNA1(1~18GHz)	FMSR-05B	TNM system	25540	01/20/2022	Annual
HPF(3~18GHz) + LNA1(1~18GHz)	FMSR-05B	TNM system	N/A	01/20/2022	Annual
AMPLIFIER	CBLU1183540B-01	CERNEX	25540	01/20/2022	Annual
High Pass Filter	F6_HP3.0	Wainwright Instruments	F6	01/20/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/04/2021	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual

Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM20090002	N/A	N/A
Controller (Antenna mast & Turn Table)	CO3000	Innco systems	CO3000/1251/48920320/P	N/A	N/A
Antenna Position Tower	MA4640/800-XP-ET	Innco systems	N/A	N/A	N/A
Turn Table	DS2000-S	Innco systems	N/A	N/A	N/A
Turn Table	Turn Table	Ets	N/A	N/A	N/A
Spectrum Analyzer	FSP40	Rohde & Schwarz	100843	05/27/2022	Annual
LNA thru (0.1 ~ 18 GHz)	FBSR-04C	TNM system	N/A	09/23/2021	Annual
Low Noise Amplifier	LLAU1183540Q	LTC Microwave	100	09/23/2021	Annual
High Pass Filter	WHKX10-900-1000-15000-40SS	Wainwright Instruments	16	08/05/2022	Annual
HPF (3 ~ 18 GHz) + LNA (0.1 ~ 18 GHz)	FBSR-04C	TNM system	N/A	09/23/2021	Annual
Low Noise Amplifier	LLAU1183540Q	LTC Microwave	100	09/23/2021	Annual
High Pass Filter	WHKX12-2805-3000-18000-40SS	Wainwright Instruments	45	09/23/2021	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

5. TEST RESULT

5.1. AGC THRESHOLD

Test Requirement:

KDB 935210 D05 v01r04

Testing at and above the AGC threshold is required.

Test Procedures:

Measurements were in accordance with the test methods section 3.2 of KDB 935210 D05 v01r04.

In the case of fiber-optic distribution systems, the RF input port of the equipment under test (EUT) refers to the RF input of the supporting equipment RF to optical convertor; see also descriptions and diagrams for typical DAS booster systems in KDB Publication 935210 D02

Devices intended to be directly connected to an RF source (donor port) only need to be evaluated for any over-the-air transmit paths.

- a) Connect a signal generator to the input of the EUT.
- b) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- c) The signal generator should initially be configured to produce either of the required test signals.
- d) Set the signal generator frequency to the center frequency of the EUT operating band.
- e) While monitoring the output power of the EUT, measured using the methods of ANSI C63.26-2015 subclause 5.2.4.4.1, increase the input level until a 1 dB increase in the input signal power no longer causes a 1 dB increase in the output signal power.
- f) Record this level as the AGC threshold level.
- g) Repeat the procedure with the remaining test signal.

Output power measurement in subclause 5.2.4.4.1 of ANSI C63.26

- a) Set span to $2 \times$ to $3 \times$ the OBW.
- b) Set RBW = 1% to 5% of the OBW.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
- e) Sweep time: auto-couple
- f) Detector = power averaging (rms).
- g) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- h) Omit
- i) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.

- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Test Results:

Test Band	Link	Signal	Center Frequency (MHz)	AGC Threshold Level (dBm)	Output Level (dBm)
Lower 700 MHz	Downlink	LTE 5 MHz	737.00	-20	19.05
		LTE 10 MHz	737.00	-20	18.75
Upper 700 MHz		LTE 5 MHz	751.50	-20	18.87
		LTE 10 MHz	751.50	-20	18.95
FirstNet		LTE 5 MHz	763.00	-20	19.04
		LTE 10 MHz	763.00	-20	19.07
AWS		CDMA	2145.00	-20	22.77
		WCDMA	2145.00	-20	23.17
		LTE 5 MHz	2145.00	-20	22.91
		LTE 10 MHz	2145.00	-20	22.86
		LTE 20 MHz	2145.00	-20	22.83
Broadband PCS		GSM	1962.50	-20	22.69
		CDMA	1962.50	-20	22.63
		WCDMA	1962.50	-20	22.61
		LTE 5 MHz	1962.50	-20	22.59
		LTE 10 MHz	1962.50	-20	22.63
		LTE 20 MHz	1962.50	-20	22.72
BRS/EBS		LTE 20 MHz	2593.00	-20	22.68
	5G NR_20 MHz	2593.00	-20	22.71	
	5G NR_40 MHz	2593.00	-20	22.87	
	5G NR_60 MHz	2593.00	-20	23.09	
	5G NR_80 MHz	2593.00	-20	22.69	
	5G NR_100 MHz	2593.00	-20	23.06	

5.2. OUT-OF-BAND REJECTION

Test Requirement:

KDB 935210 D05 v01r04

Out-of-band rejection required.

Test Procedures:


Measurements were in accordance with the test methods section 3.3 of KDB 935210 D05 v01r04.

A signal booster shall reject amplification of other signals outside of its passband. Adjust the internal gain control of the EUT (if so equipped) to the maximum gain for which equipment certification is sought.

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
 - 1) Frequency range = ± 250 % of the passband, for each applicable CMRS band.
 - 2) Level = a sufficient level to affirm that the out-of-band rejection is > 20 dB above the noise floor and will not engage the AGC during the entire sweep.
 - 3) Dwell time = approximately 10 ms.
 - 4) Number of points = $\text{SPAN}/(\text{RBW}/2)$.
- c) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- d) Set the span of the spectrum analyzer to the same as the frequency range of the signal generator.
- e) Set the resolution bandwidth (RBW) of the spectrum analyzer to be 1 % to 5 % of the EUT passband, and the video bandwidth (VBW) shall be set to $\geq 3 \times \text{RBW}$.
- f) Set the detector to Peak Max-Hold and wait for the spectrum analyzer's spectral display to fill.
- g) Place a marker to the peak of the frequency response and record this frequency as f_0 .
- h) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the -20 dB down amplitude, to determine the 20 dB bandwidth.
- i) Capture the frequency response of the EUT.
- j) Repeat for all frequency bands applicable for use by the EUT.

Test Results:


Lower 700 MHz / Upper 700 MHz / FirstNet (728 MHz ~ 746 MHz / 746 MHz ~ 757 MHz / 758 MHz ~ 768 MHz) / Downlink

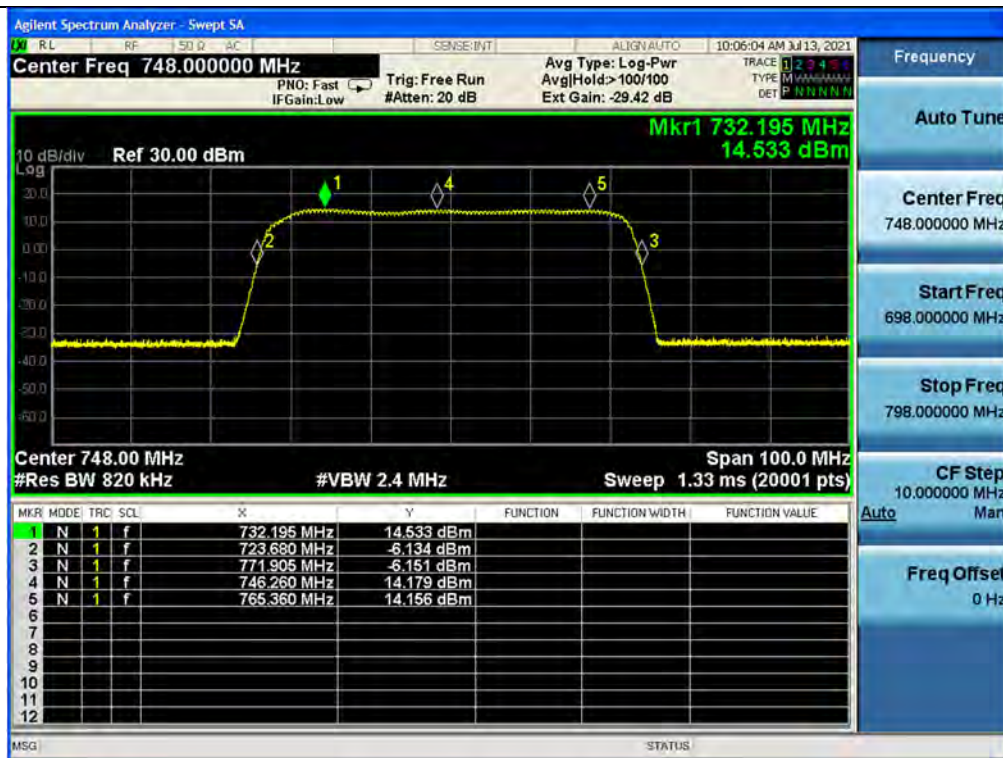


AWS13 (2 110 MHz ~ 2 180 MHz) / Downlink



Broadband PCS (1 930 MHz ~ 1 995 MHz) / Downlink

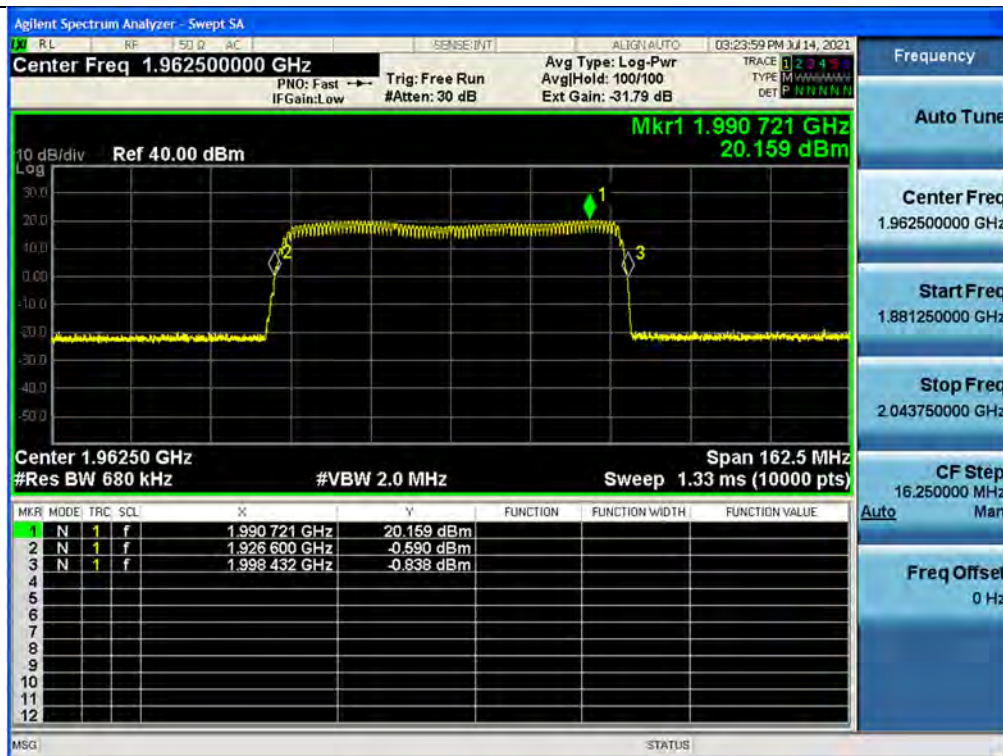

BRS/EBS (2 496 MHz ~ 2 690 MHz) / Downlink

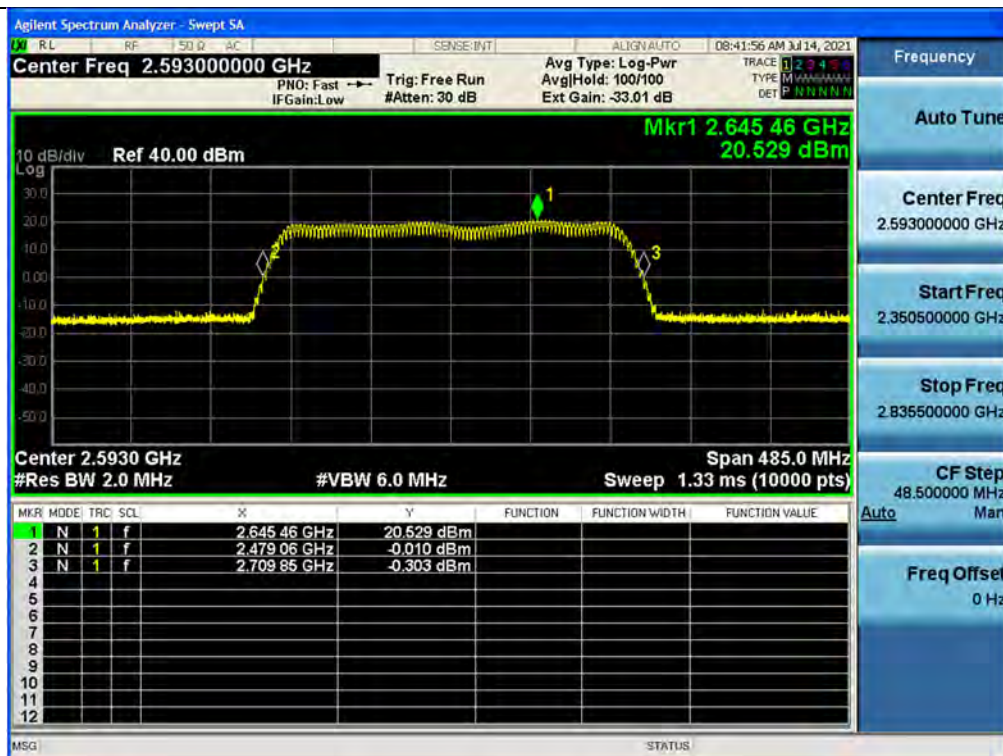

5.3. INPUT-VERSUS-OUTPUT SIGNAL COMPARISON

Test Requirement:

§ 2.1049 Measurements required: Occupied bandwidth.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

Test Procedures:

Measurements were in accordance with the test methods section 3.4 of KDB 935210 D05 v01r04.

A 26 dB bandwidth measurement shall be performed on the input signal and the output signal; alternatively, the 99% OBW can be measured and used. See KDB Publication 971168 [R8] for more information on measuring OBW.

- a) Connect a signal generator to the input of the EUT.
- b) Configure the signal generator to transmit the AWGN signal.
- c) Configure the signal amplitude to be just below the AGC threshold level (see 3.2), but not more than 0.5 dB below.
- d) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- e) Set the spectrum analyzer center frequency to the center frequency of the operational band under test. The span range of the spectrum analyzer shall be between 2 times to 5 times the emission bandwidth (EBW) or alternatively, the OBW.
- f) The nominal RBW shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be $\geq 3 \times \text{RBW}$.
- g) Set the reference level of the instrument as required to preclude the signal from exceeding the maximum spectrum analyzer input mixer level for linear operation. In general, the peak of the spectral envelope must be more than $[10 \log (\text{OBW} / \text{RBW})]$ below the reference level. Steps f) and g) may require iteration to enable adjustments within the specified tolerances.
- h) The noise floor of the spectrum analyzer at the selected RBW shall be at least 36 dB below the reference level.
- i) Set spectrum analyzer detection function to positive peak.
- j) Set the trace mode to max hold.
- k) Determine the reference value: Allow the trace to stabilize. Set the spectrum analyzer marker to the highest amplitude level of the displayed trace (this is the reference value) and record the associated frequency.
- l) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the -26 dB down amplitude. The 26 dB EBW (alternatively OBW) is the positive frequency difference between the two markers. If the spectral envelope crosses the -26 dB down amplitude at multiple points, the lowest or highest frequency shall be selected as the frequencies that are the furthest removed from the center frequency at which the spectral envelope crosses the -26 dB down amplitude point.
- m) Repeat steps e) to l) with the input signal connected directly to the spectrum analyzer (i.e., input signal

measurement).

- n) Compare the spectral plot of the input signal (determined from step m) to the output signal (determined from step l) to affirm that they are similar (in passband and rolloff characteristic features and relative spectral locations), and include plot(s) and descriptions in test report.
- o) Repeat the procedure [steps e) to n)] with the input signal amplitude set to 3 dB above the AGC threshold.
- p) Repeat steps e) to o) with the signal generator set to the narrowband signal.
- q) Repeat steps e) to p) for all frequency bands authorized for use by the EUT.

Test Results:

Tabular data of Output Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)	
Lower 700 MHz		LTE 5 MHz	737.00	4.5174	5.0497	
		LTE 10 MHz	737.00	9.0283	9.9394	
Upper 700 MHz		LTE 5 MHz	751.50	4.5213	4.9573	
		LTE 10 MHz	751.50	9.0350	9.9453	
FirstNet		LTE 5 MHz	763.00	4.5247	4.9633	
		LTE 10 MHz	763.00	8.9691	9.9674	
AWS		CDMA	2145.00	1.2577	1.3985	
		WCDMA	2145.00	4.1615	4.7175	
		LTE 5 MHz	2145.00	4.5204	4.9970	
		LTE 10 MHz	2145.00	9.0043	10.039	
		LTE 20 MHz	2145.00	17.968	20.069	
Broadband PCS		Downlink	Signal	Center Frequency (MHz)	99 % OBW (kHz)	26 dB OBW (kHz)
			GSM	1962.50	242.77	311.90
			Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
			CDMA	1962.50	1.2612	1.3967
	WCDMA		1962.50	4.1962	4.7151	
	LTE 5 MHz		1962.50	4.5225	4.9798	
	LTE 10 MHz		1962.50	9.0108	10.014	
	LTE 20 MHz		1962.50	18.007	19.823	
BRS/EBS	Downlink	LTE 20 MHz	2593.00	17.973	19.552	
		5G NR_20 MHz	2593.00	18.286	19.371	
		5G NR_40 MHz	2593.00	37.922	39.941	
		5G NR_60 MHz	2593.00	58.044	60.919	
		5G NR_80 MHz	2593.00	77.818	81.657	
		5G NR_100 MHz	2593.00	97.716	102.59	

Tabular data of Input Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
Lower 700 MHz	Downlink	LTE 5 MHz	737.00	4.5195	4.9955
		LTE 10 MHz	737.00	9.0085	9.9793
Upper 700 MHz		LTE 5 MHz	751.50	4.5257	5.0116
		LTE 10 MHz	751.50	9.0009	10.024
FirstNet		LTE 5 MHz	763.00	4.5141	5.0290
		LTE 10 MHz	763.00	8.9810	9.6824
AWS		CDMA	2145.00	1.2679	1.3923
		WCDMA	2145.00	4.1759	4.7355
		LTE 5 MHz	2145.00	4.5167	4.9808
		LTE 10 MHz	2145.00	8.9916	9.8105
		LTE 20 MHz	2145.00	17.951	19.814
Broadband PCS		Signal	Center Frequency (MHz)	99 % OBW (kHz)	26 dB OBW (kHz)
		GSM	1962.50	244.88	315.85
		Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
		CDMA	1962.50	1.2618	1.3923
		WCDMA	1962.50	4.1905	4.7113
		LTE 5 MHz	1962.50	4.5079	5.0443
		LTE 10 MHz	1962.50	9.0019	9.8777
		LTE 20 MHz	1962.50	17.988	19.517
BRS/EBS		LTE 20 MHz	2593.00	17.982	19.796
		5G NR_20 MHz	2593.00	18.275	19.358
		5G NR_40 MHz	2593.00	37.901	39.919
		5G NR_60 MHz	2593.00	57.909	60.915
		5G NR_80 MHz	2593.00	77.574	81.442
		5G NR_100 MHz	2593.00	97.250	102.33

Tabular data of 3 dB above the AGC threshold Output Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
Lower 700 MHz	Downlink	LTE 5 MHz	737.00	4.5227	4.9362
		LTE 10 MHz	737.00	9.0371	9.8907
Upper 700 MHz		LTE 5 MHz	751.50	4.5320	5.0610
		LTE 10 MHz	751.50	9.0341	9.9296
FirstNet		LTE 5 MHz	763.00	4.5267	5.0191
		LTE 10 MHz	763.00	9.0246	9.9598
AWS		CDMA	2145.00	1.2636	1.4014
		WCDMA	2145.00	4.1878	4.6781
		LTE 5 MHz	2145.00	4.5104	5.0393
		LTE 10 MHz	2145.00	9.0041	9.9452
		LTE 20 MHz	2145.00	17.960	19.793
Broadband PCS		Signal	Center Frequency (MHz)	99 % OBW (kHz)	26 dB OBW (kHz)
		GSM	1962.50	243.90	312.04
		Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
		CDMA	1962.50	1.2552	1.3975
		WCDMA	1962.50	4.1750	4.7092
		LTE 5 MHz	1962.50	4.5142	4.9520
		LTE 10 MHz	1962.50	9.0131	9.9995
		LTE 20 MHz	1962.50	17.996	19.643
BRS/EBS		LTE 20 MHz	2593.00	17.967	19.655
		5G NR_20 MHz	2593.00	18.252	19.371
		5G NR_40 MHz	2593.00	37.877	40.078
		5G NR_60 MHz	2593.00	58.057	60.887
		5G NR_80 MHz	2593.00	77.846	81.625
		5G NR_100 MHz	2593.00	97.843	102.61

Tabular data of 3 dB above the AGC threshold Input Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
Lower 700 MHz	Downlink	LTE 5 MHz	737.00	4.5192	4.9507
		LTE 10 MHz	737.00	9.0041	9.9830
Upper 700 MHz		LTE 5 MHz	751.50	4.5110	4.9895
		LTE 10 MHz	751.50	8.9906	9.9318
FirstNet		LTE 5 MHz	763.00	4.4979	4.9563
		LTE 10 MHz	763.00	9.0012	9.9268
AWS		CDMA	2145.00	1.2601	1.3948
		WCDMA	2145.00	4.1525	4.7025
		LTE 5 MHz	2145.00	4.5134	4.9908
		LTE 10 MHz	2145.00	9.0003	9.8415
		LTE 20 MHz	2145.00	17.941	19.712
Broadband PCS		Signal	Center Frequency (MHz)	99 % OBW (kHz)	26 dB OBW (kHz)
		GSM	1962.50	241.96	307.31
		Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
		CDMA	1962.50	1.2647	1.3923
		WCDMA	1962.50	4.1729	4.7019
		LTE 5 MHz	1962.50	4.5207	5.0087
		LTE 10 MHz	1962.50	9.0208	9.9804
		LTE 20 MHz	1962.50	17.965	19.970
BRS/EBS		LTE 20 MHz	2593.00	17.915	19.794
		5G NR_20 MHz	2593.00	18.231	19.363
		5G NR_40 MHz	2593.00	37.921	39.921
		5G NR_60 MHz	2593.00	57.954	60.901
		5G NR_80 MHz	2593.00	77.617	81.474
		5G NR_100 MHz	2593.00	97.179	102.33


Measured Occupied Bandwidth Comparison

Test Band	Link	Signal	Variant of Input and output Occupied Bandwidth (%)	Variant of Input and 3 dB above the AGC threshold output Occupied Bandwidth (%)
Lower 700 MHz	Downlink	LTE 5 MHz	1.081	-0.303
		LTE 10 MHz	-0.401	-0.922
Upper 700 MHz		LTE 5 MHz	-1.097	1.443
		LTE 10 MHz	-0.788	-0.020
FirstNet		LTE 5 MHz	-1.312	1.271
		LTE 10 MHz	2.944	0.332
AWS		CDMA	0.431	0.430
		WCDMA	-0.401	-0.532
		LTE 5 MHz	0.321	0.962
		LTE 10 MHz	2.324	1.057
		LTE 20 MHz	1.287	0.411
Broadband PCS		GSM	-1.251	1.540
		CDMA	0.359	0.359
		WCDMA	0.085	0.149
		LTE 5 MHz	-1.269	-1.138
		LTE 10 MHz	1.377	0.190
		LTE 20 MHz	1.568	-1.637
BRS/EBS		LTE 20 MHz	-1.233	-0.702
		5G NR_20 MHz	0.067	0.041
		5G NR_40 MHz	0.055	0.393
		5G NR_60 MHz	0.007	-0.023
		5G NR_80 MHz	0.264	0.185
		5G NR_100 MHz	0.251	0.278


* Change in input-output OBW is less than $\pm 5\%$.

Plot data of Occupied Bandwidth


Output / Lower 700 MHz / Downlink / LTE 5 MHz

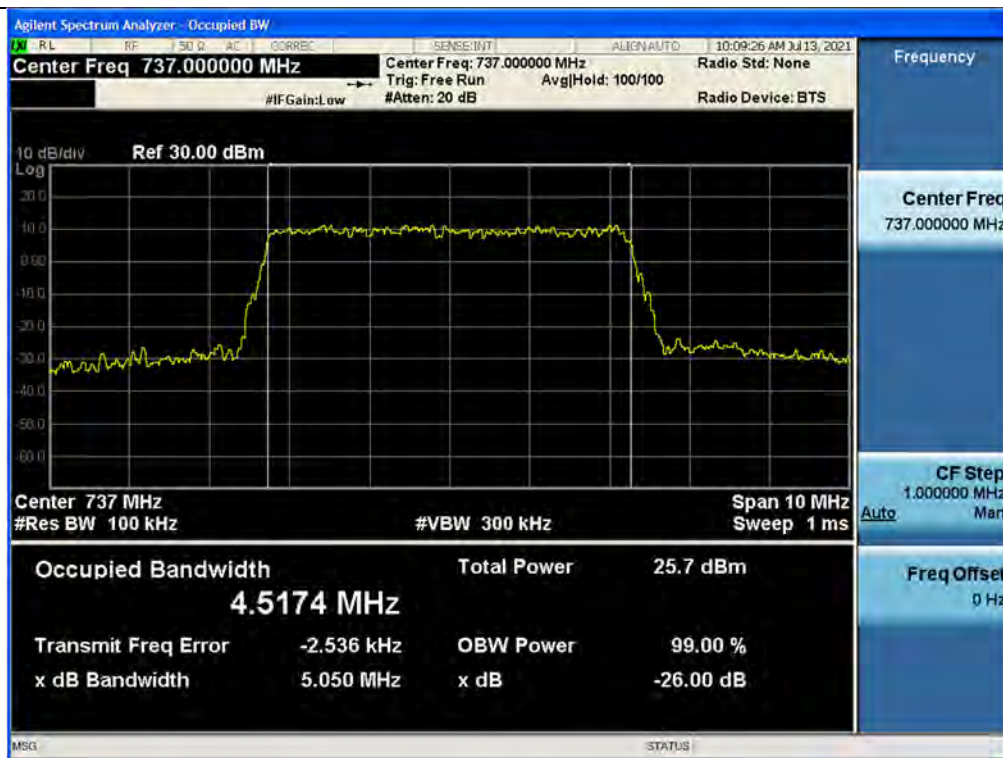


Input / Lower 700 MHz / Downlink / LTE 5 MHz

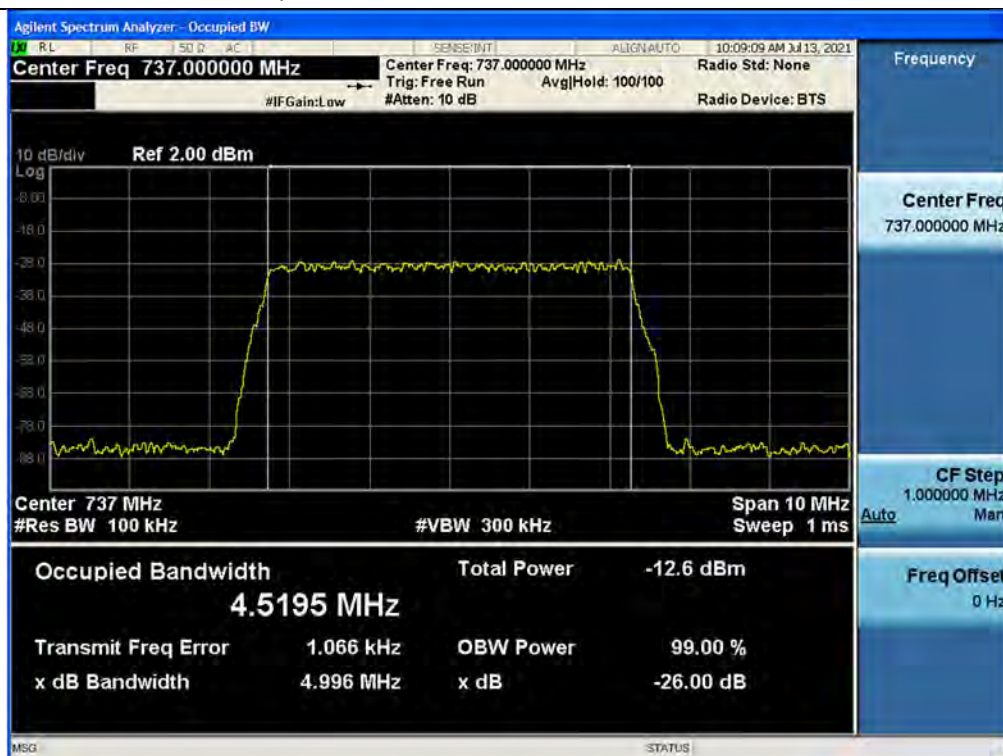


3 dB above the AGC threshold output / Lower 700 MHz / Downlink / LTE 5 MHz

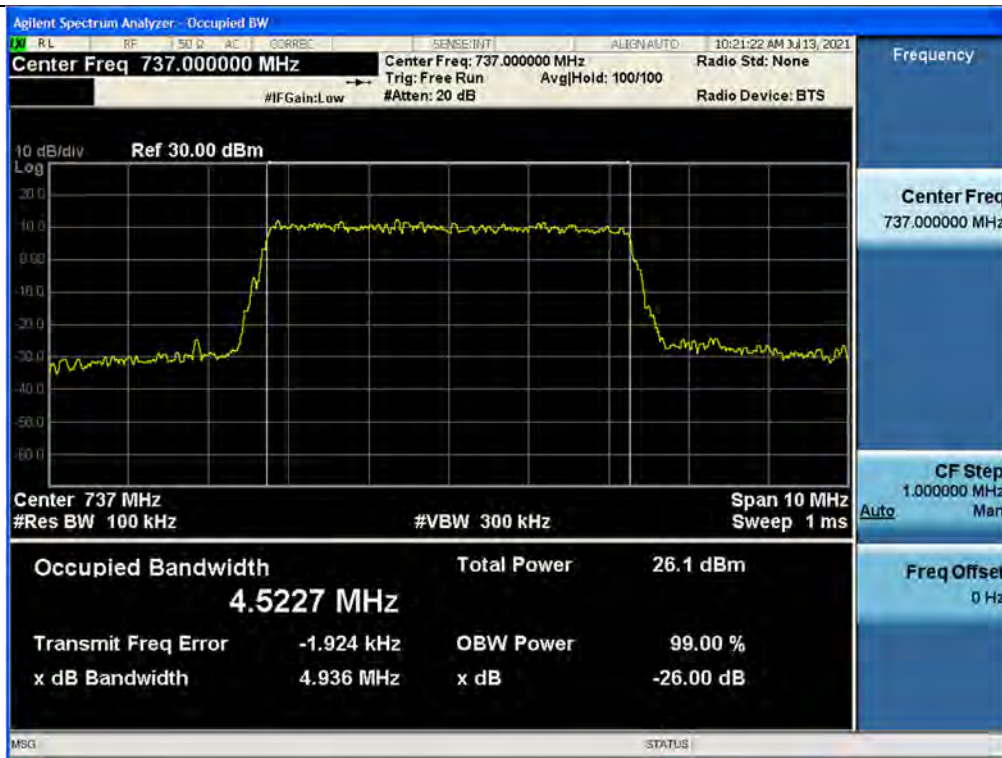


3 dB above the AGC threshold Input / Lower 700 MHz / Downlink / LTE 5 MHz

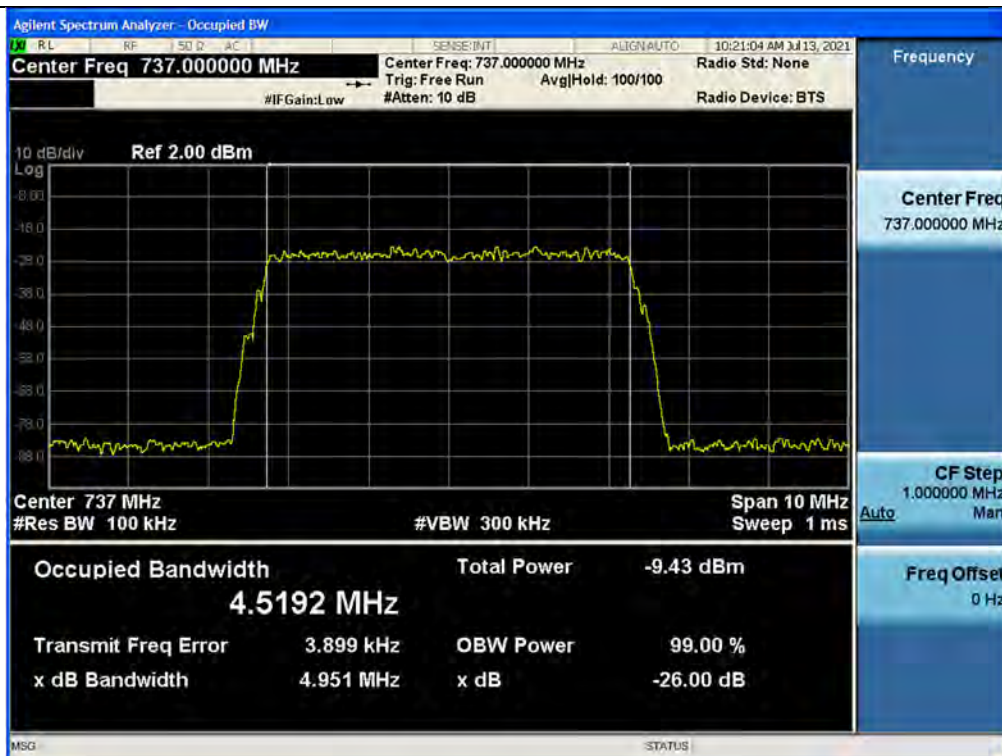


Output / Lower 700 MHz / Downlink / LTE 10 MHz

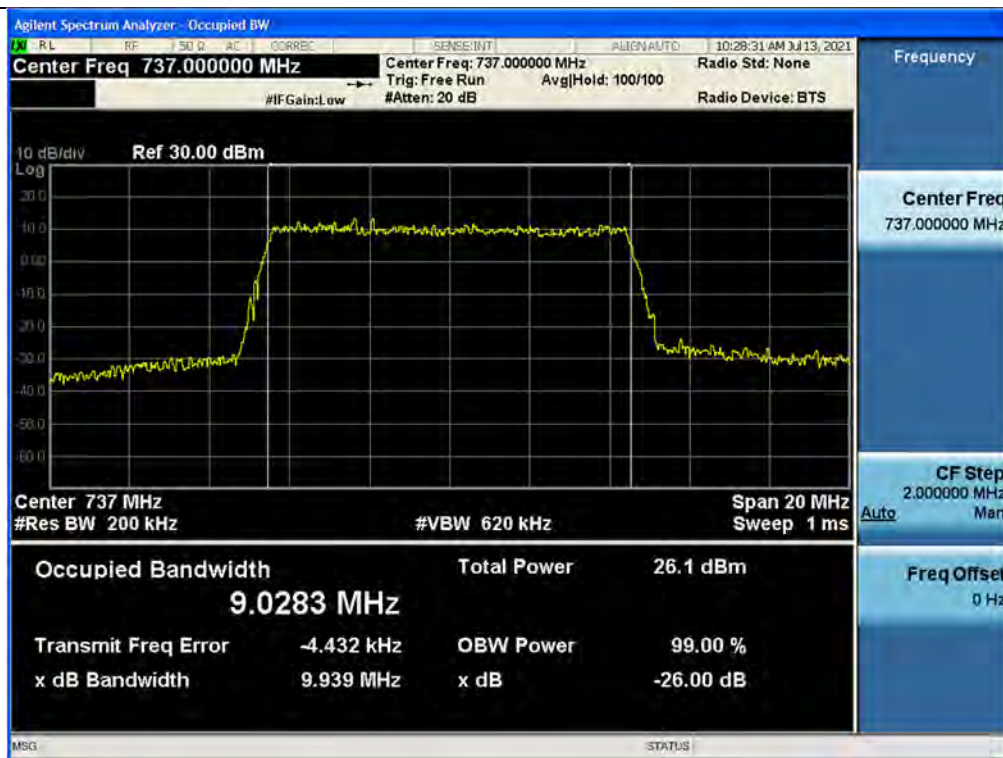


Input / Lower 700 MHz / Downlink / LTE 10 MHz

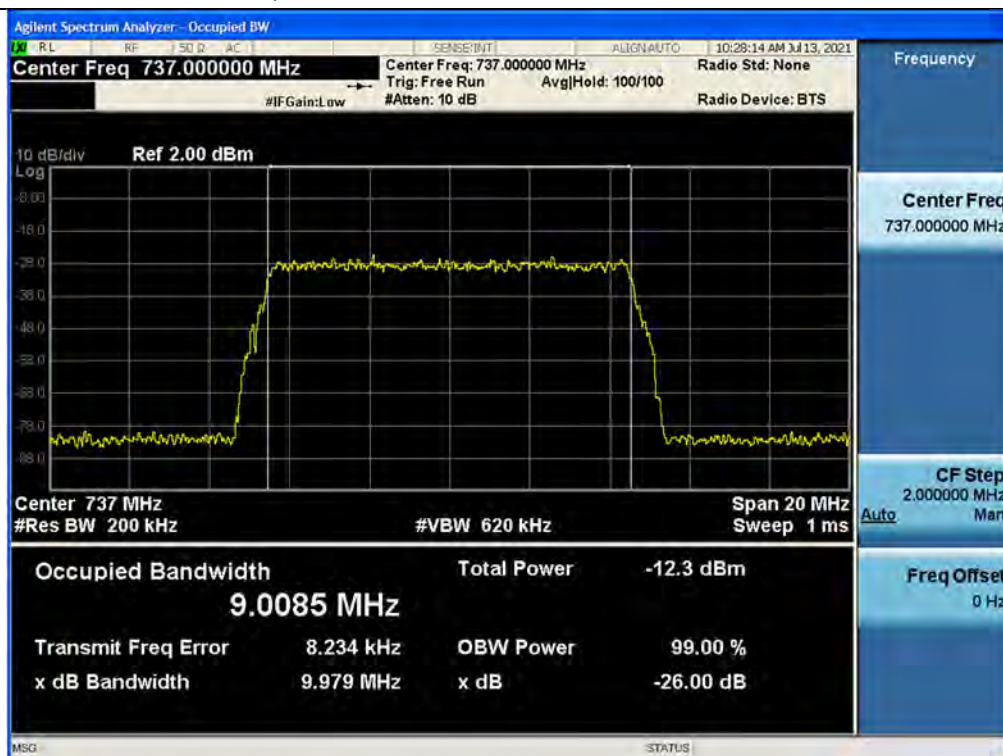


3 dB above the AGC threshold output / Lower 700 MHz / Downlink / LTE 10 MHz

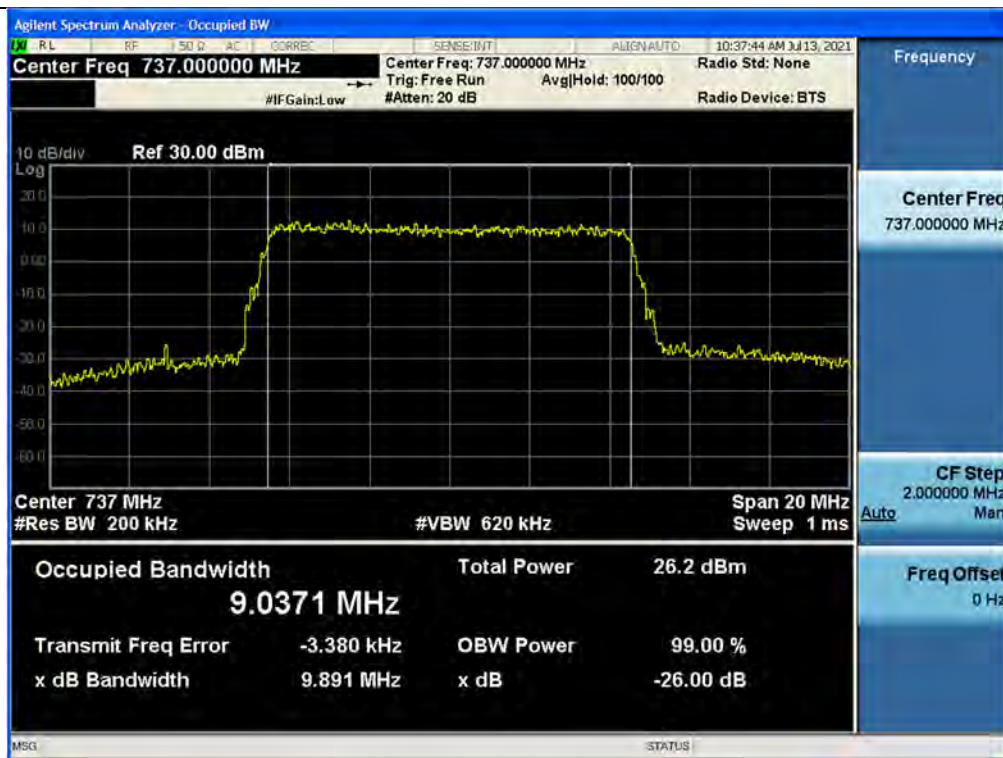


3 dB above the AGC threshold Input / Lower 700 MHz / Downlink / LTE 10 MHz

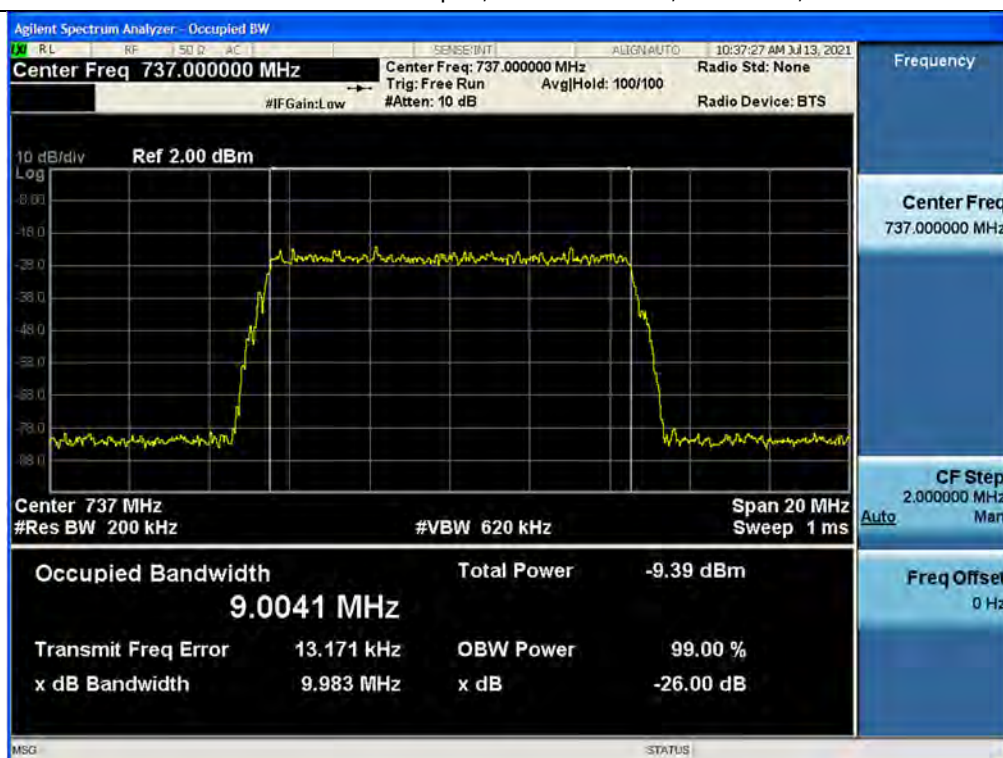


Output / Upper 700 MHz / Downlink / LTE 5 MHz

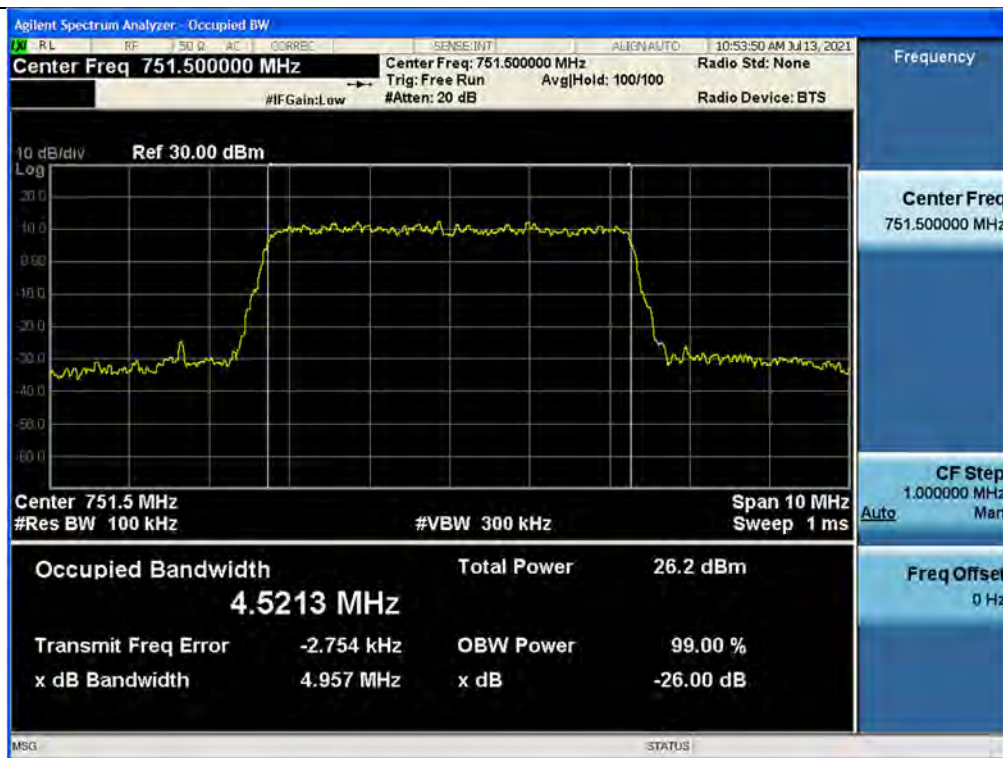


Input / Upper 700 MHz / Downlink / LTE 5 MHz

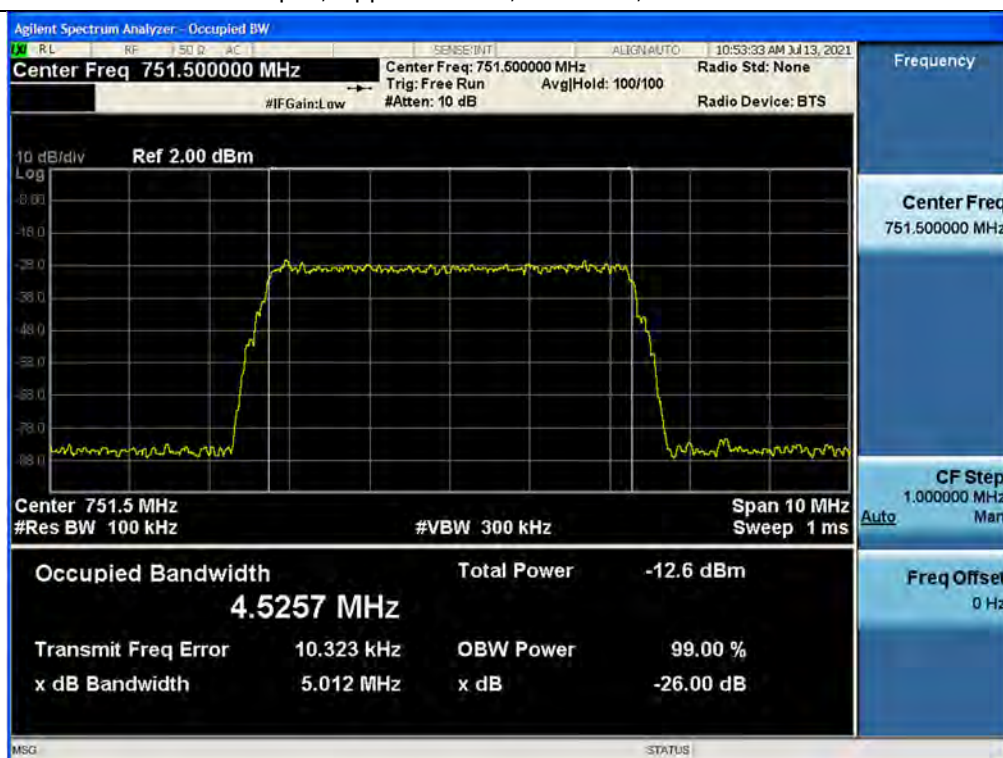


3 dB above the AGC threshold output / Upper 700 MHz / Downlink / LTE 5 MHz

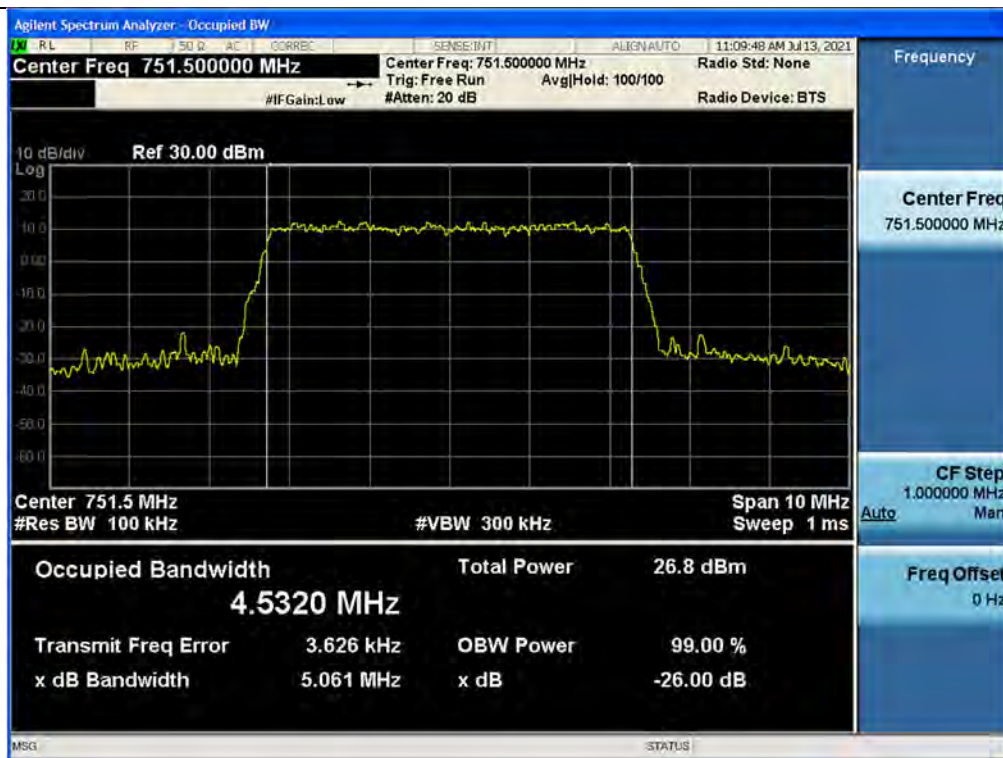


3 dB above the AGC threshold Input / Upper 700 MHz / Downlink / LTE 5 MHz

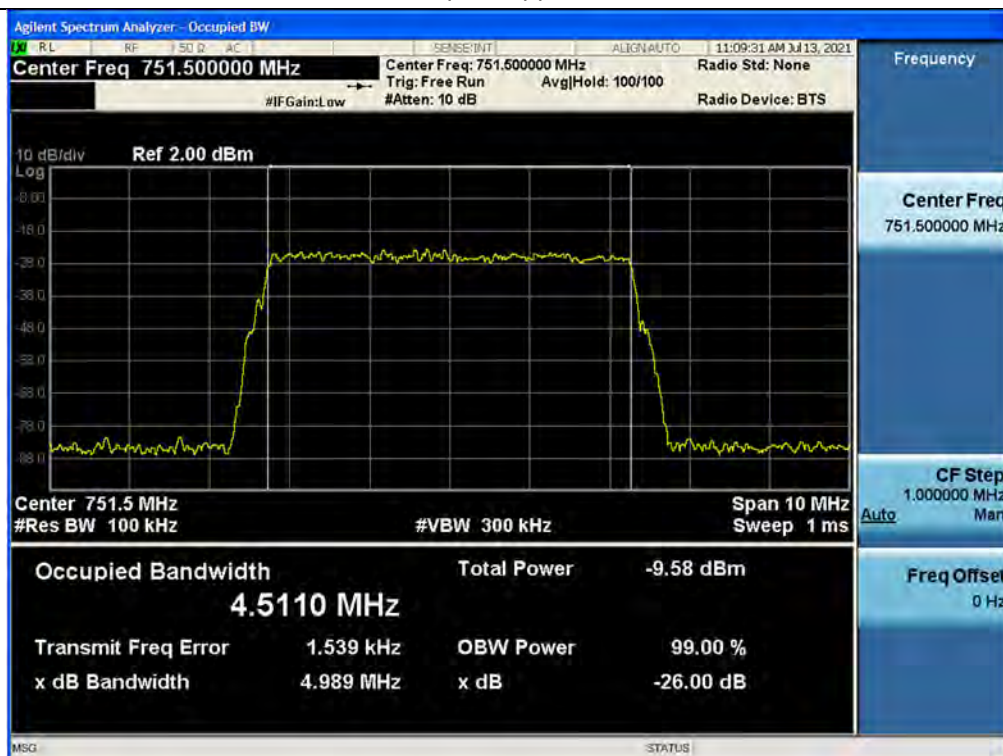


Output / Upper 700 MHz / Downlink / LTE 10 MHz

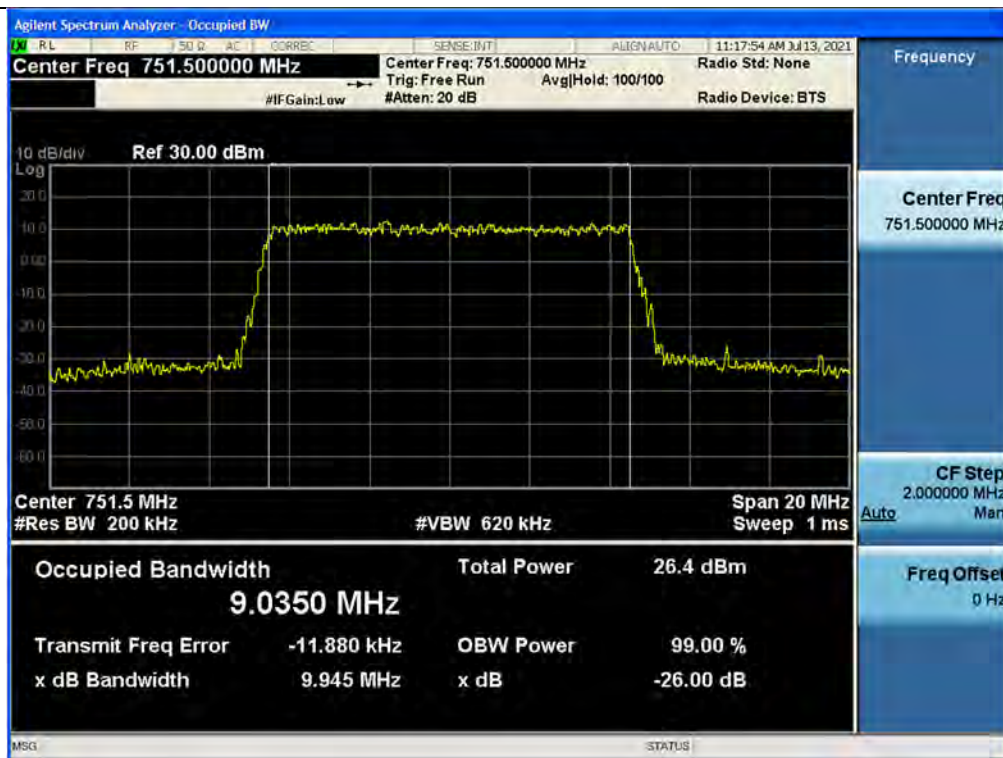


Input / Upper 700 MHz / Downlink / LTE 10 MHz

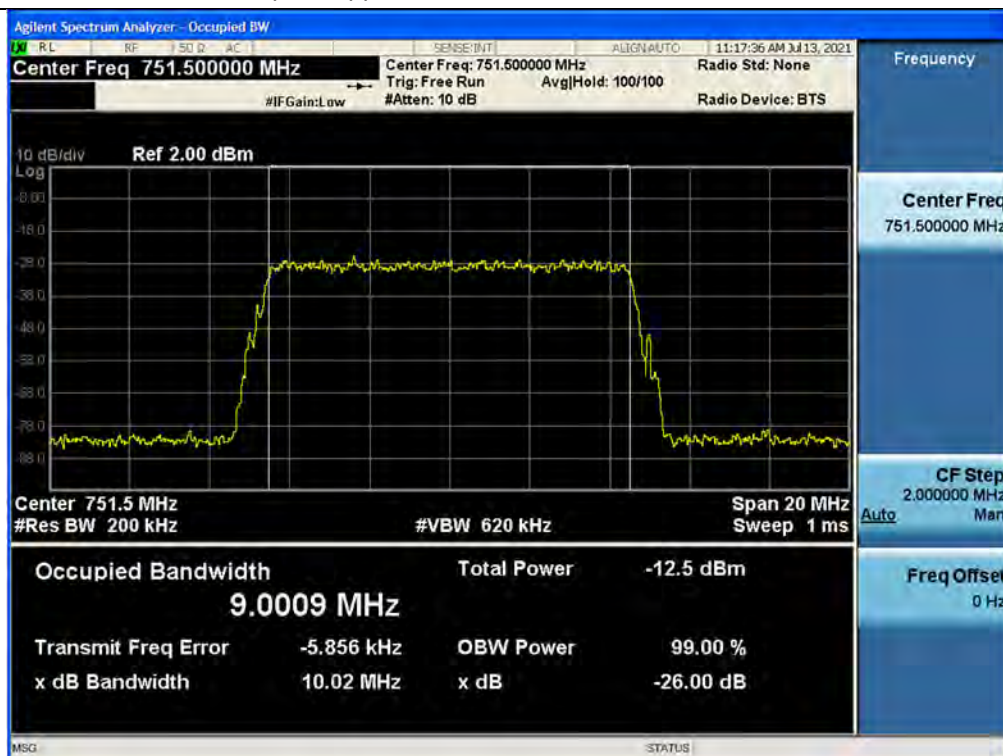


3 dB above the AGC threshold output / Upper 700 MHz / Downlink / LTE 10 MHz

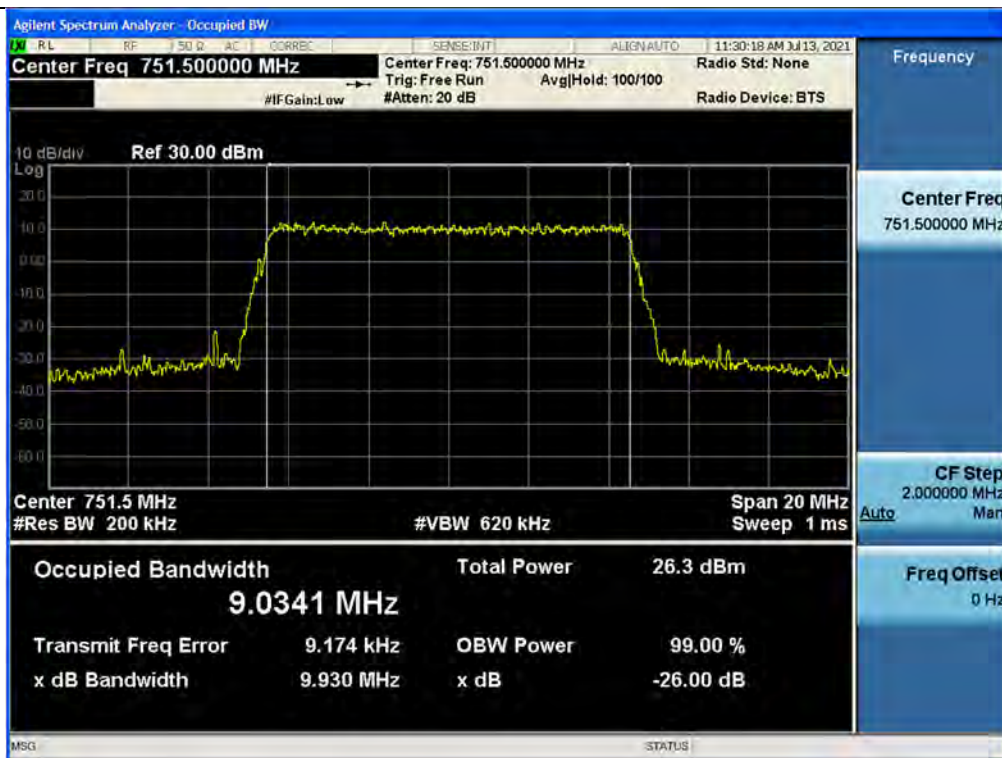


3 dB above the AGC threshold Input / Upper 700 MHz / Downlink / LTE 10 MHz

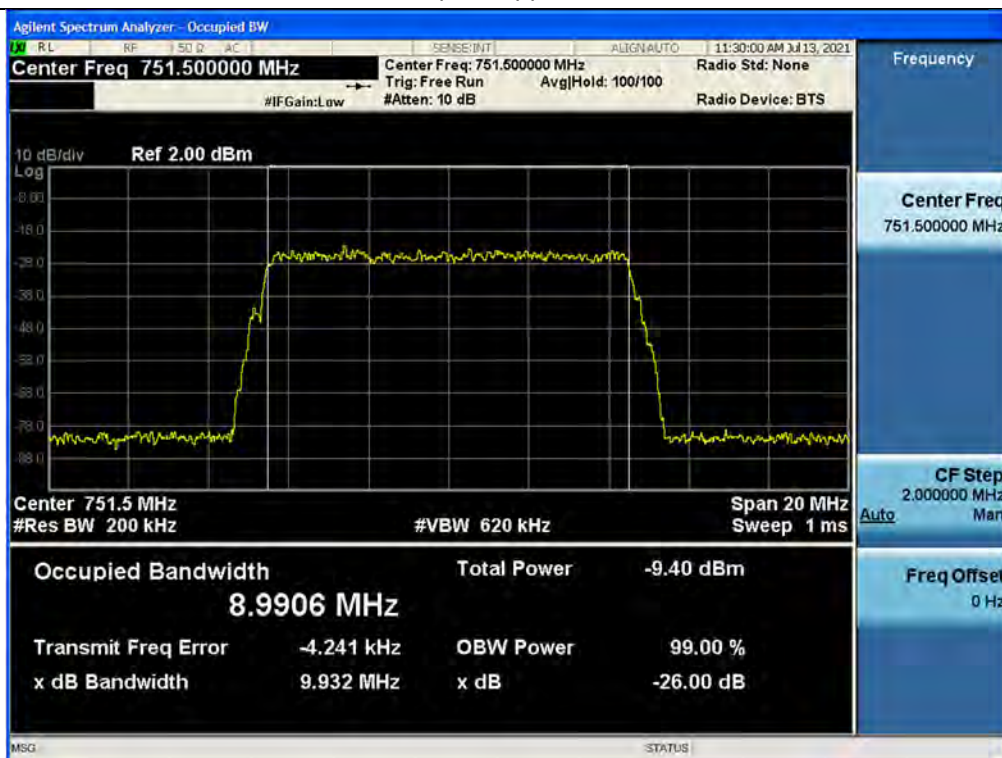


Output / FirstNet / Downlink / LTE 5 MHz

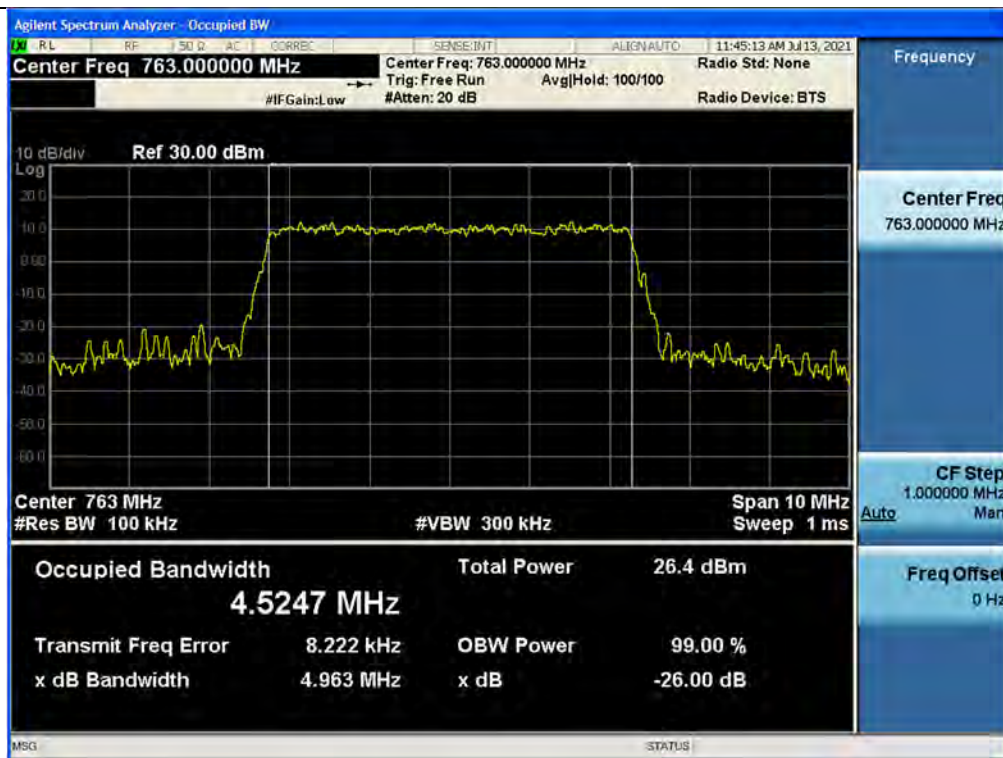


Input / FirstNet / Downlink / LTE 5 MHz

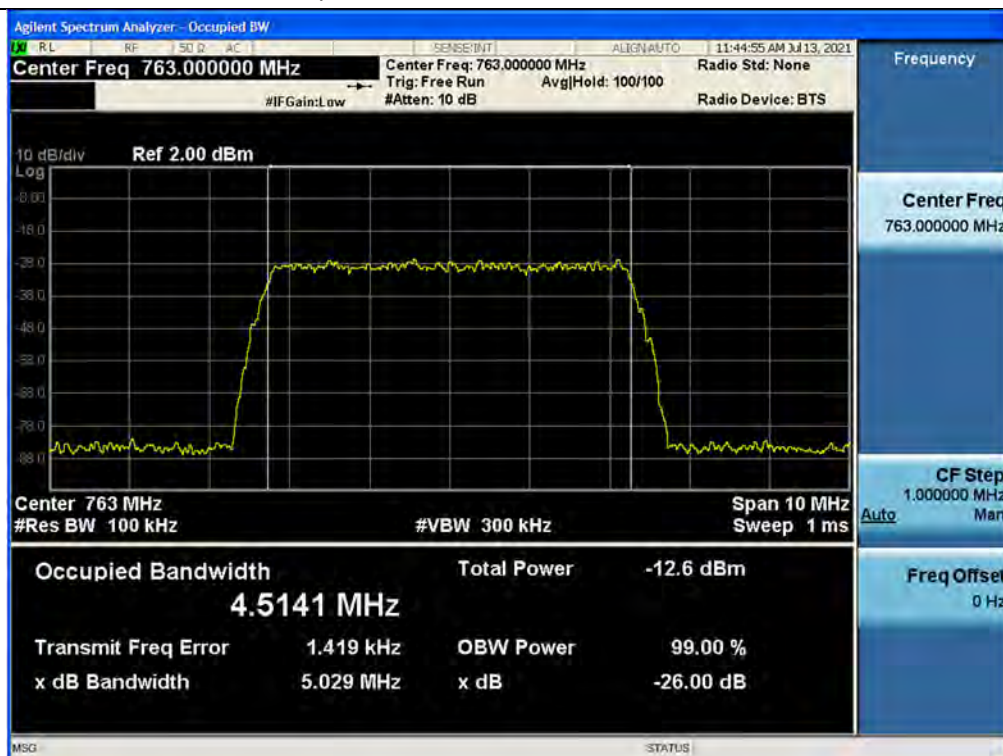


3 dB above the AGC threshold output / FirstNet / Downlink / LTE 5 MHz

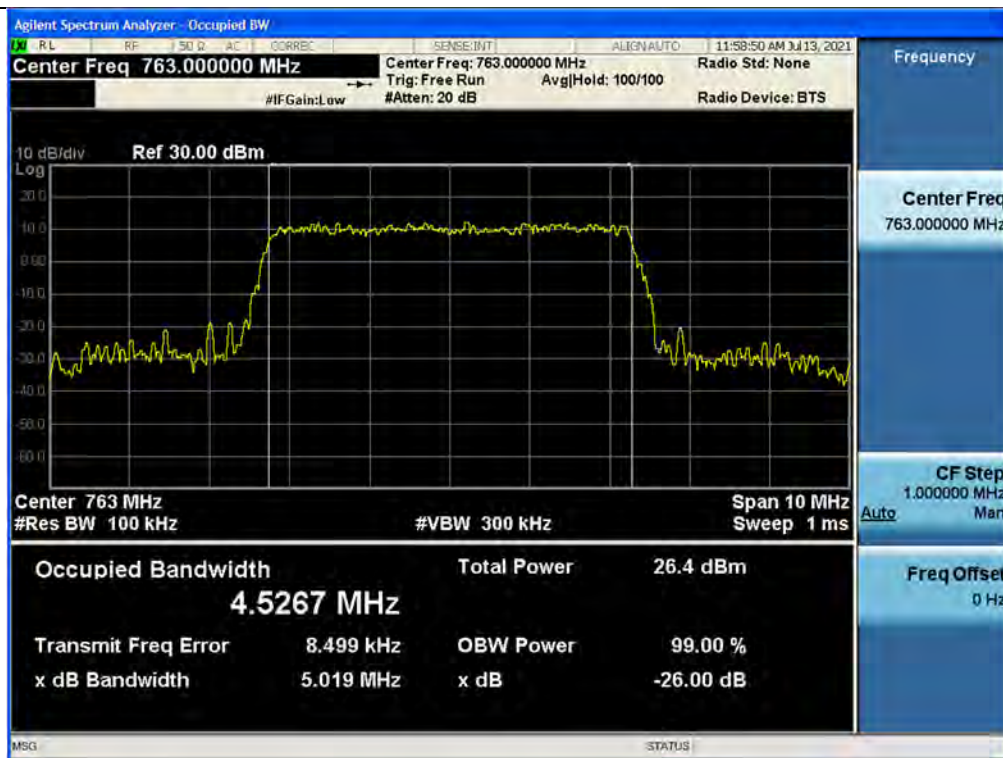


3 dB above the AGC threshold Input / FirstNet / Downlink / LTE 5 MHz

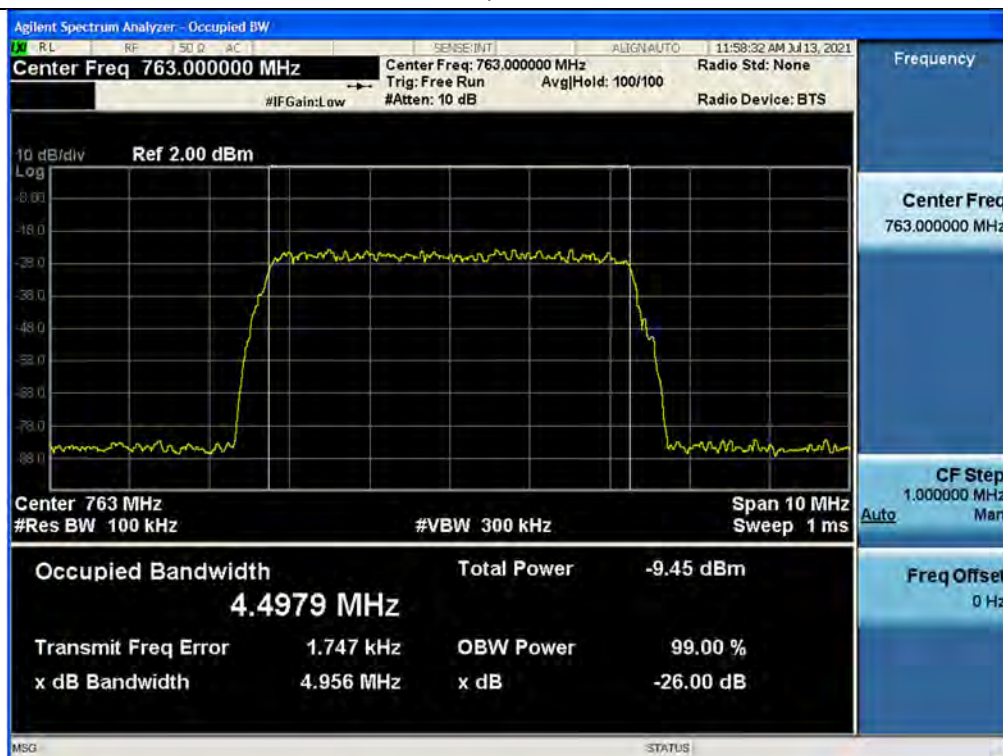


Output / FirstNet / Downlink / LTE 10 MHz

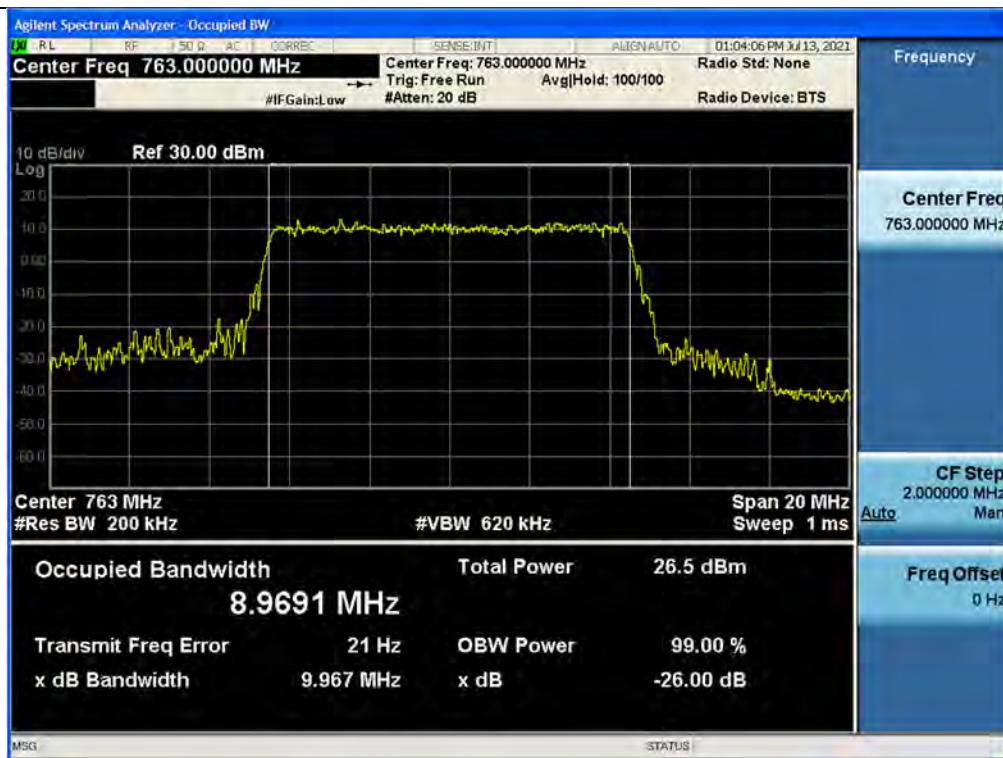

Input / FirstNet / Downlink / LTE 10 MHz

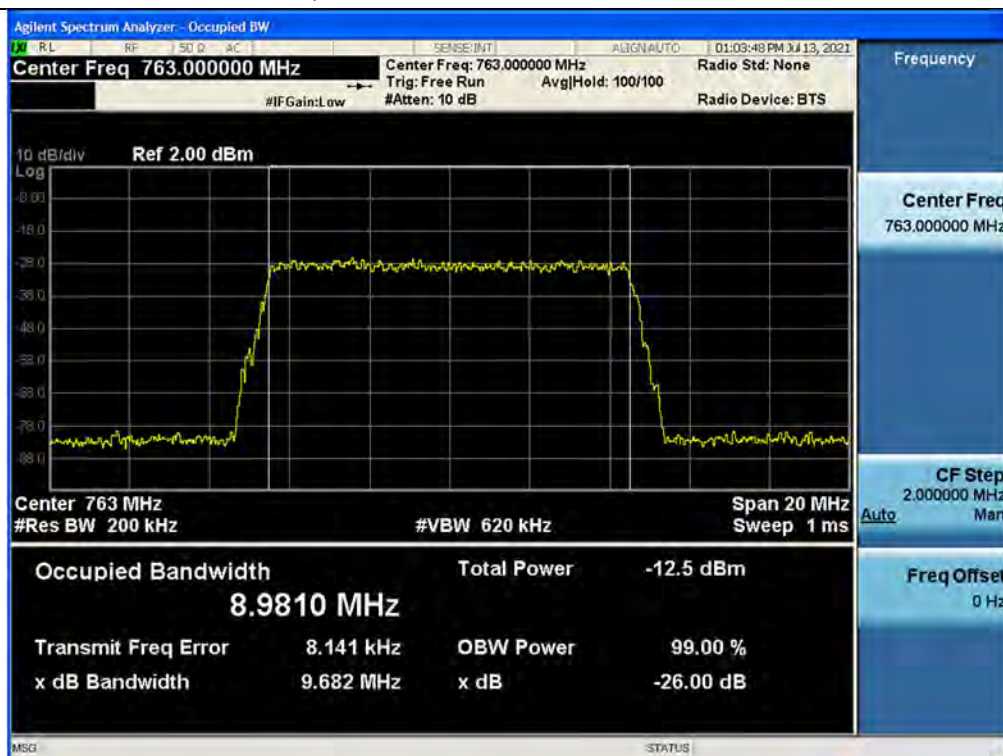


3 dB above the AGC threshold output / FirstNet / Downlink / LTE 10 MHz

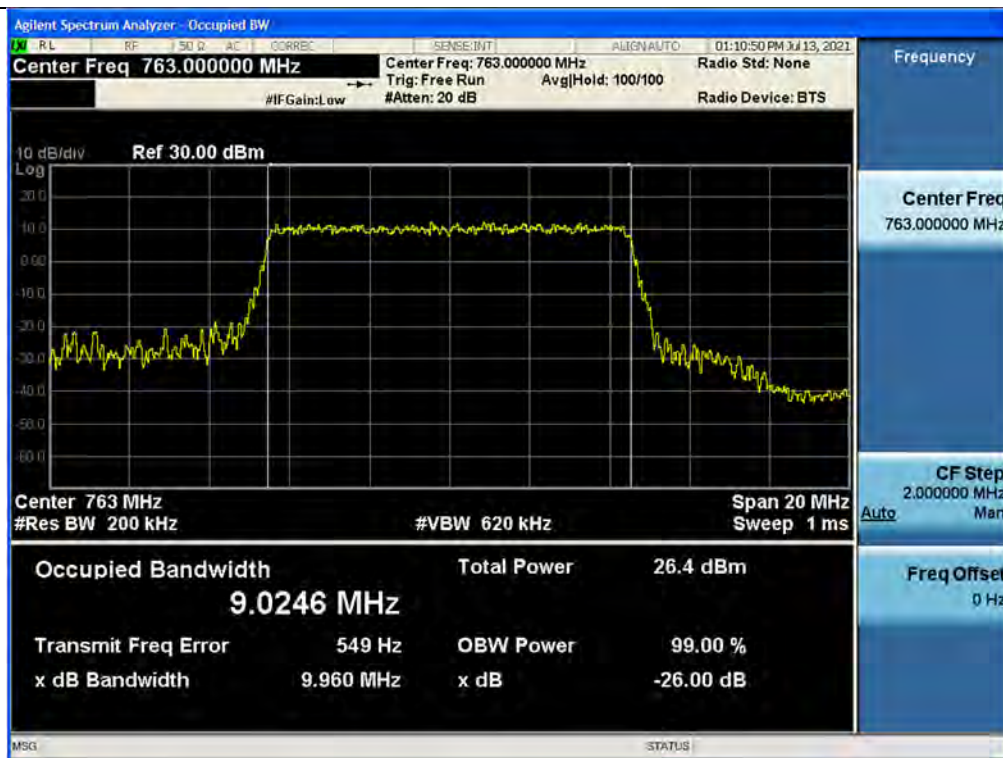


3 dB above the AGC threshold Input / FirstNet / Downlink / LTE 10 MHz




Output / AWS / Downlink / CDMA

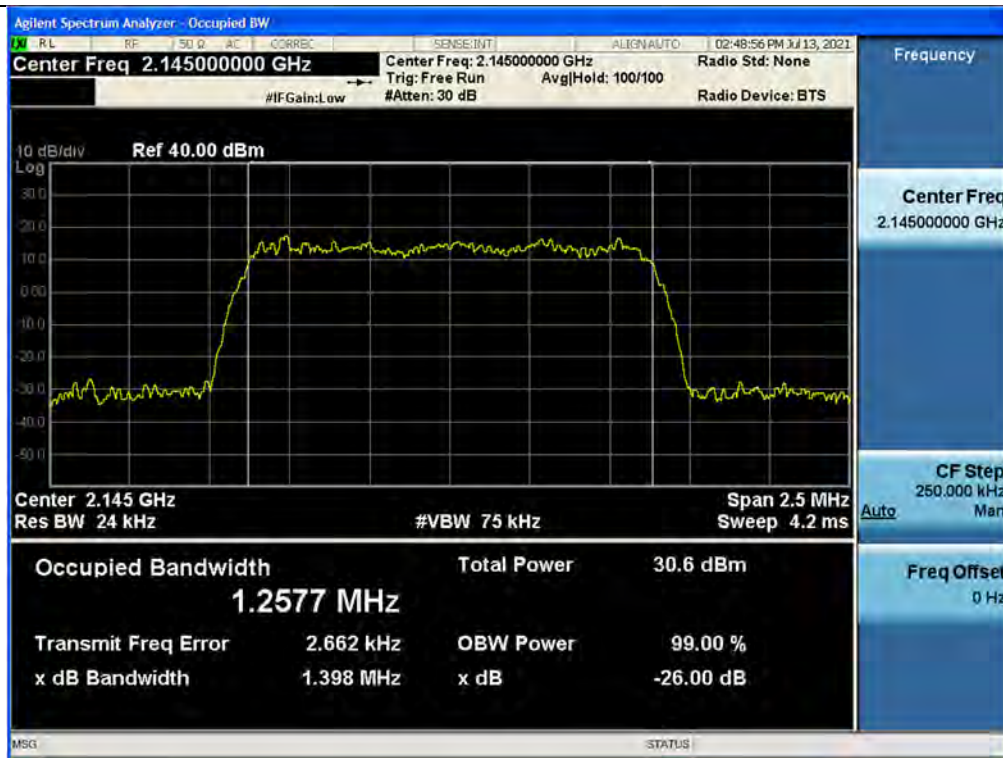


Input / AWS / Downlink / CDMA

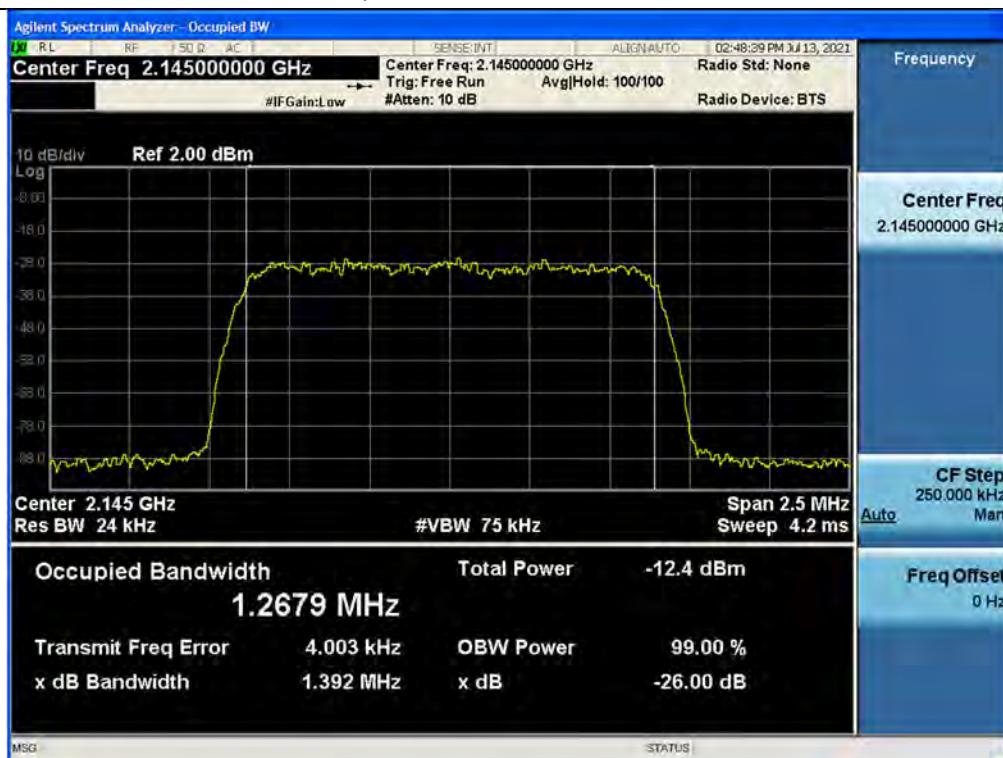


3 dB above the AGC threshold output / AWS / Downlink / CDMA

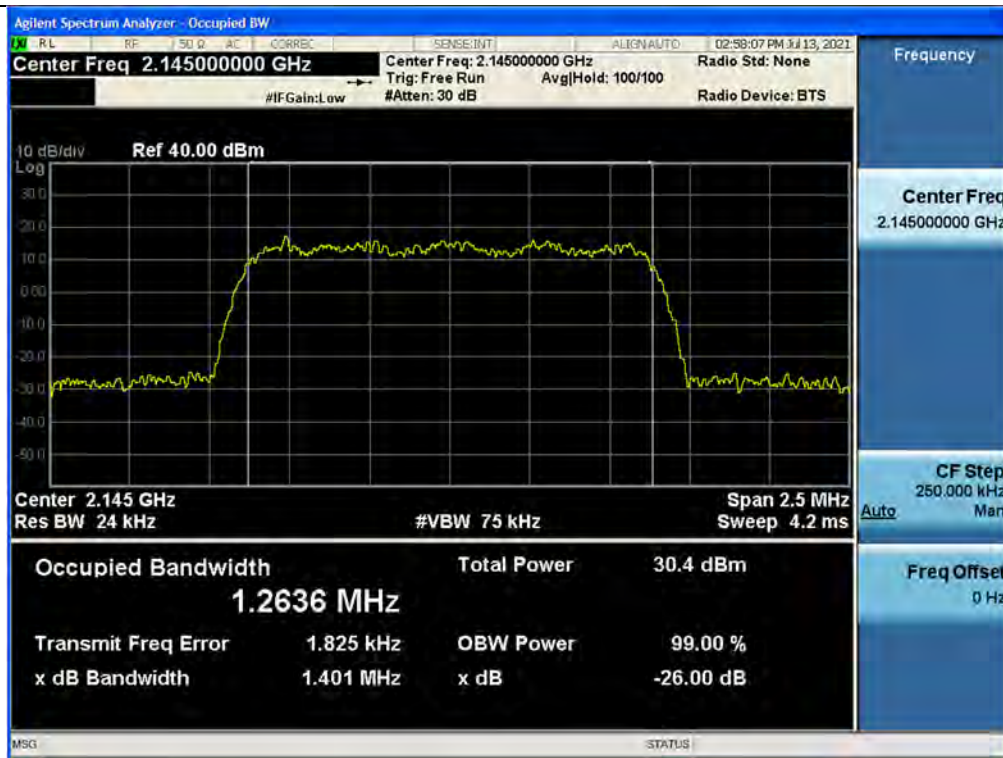


3 dB above the AGC threshold Input / AWS / Downlink / CDMA

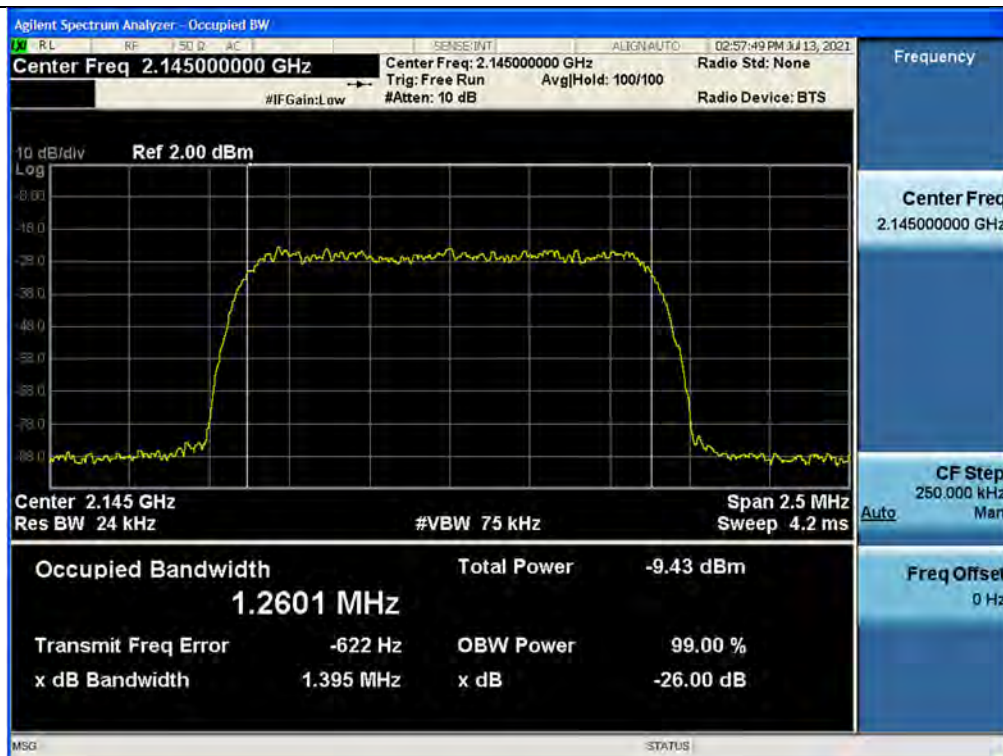


Output / AWS / Downlink / WCDMA

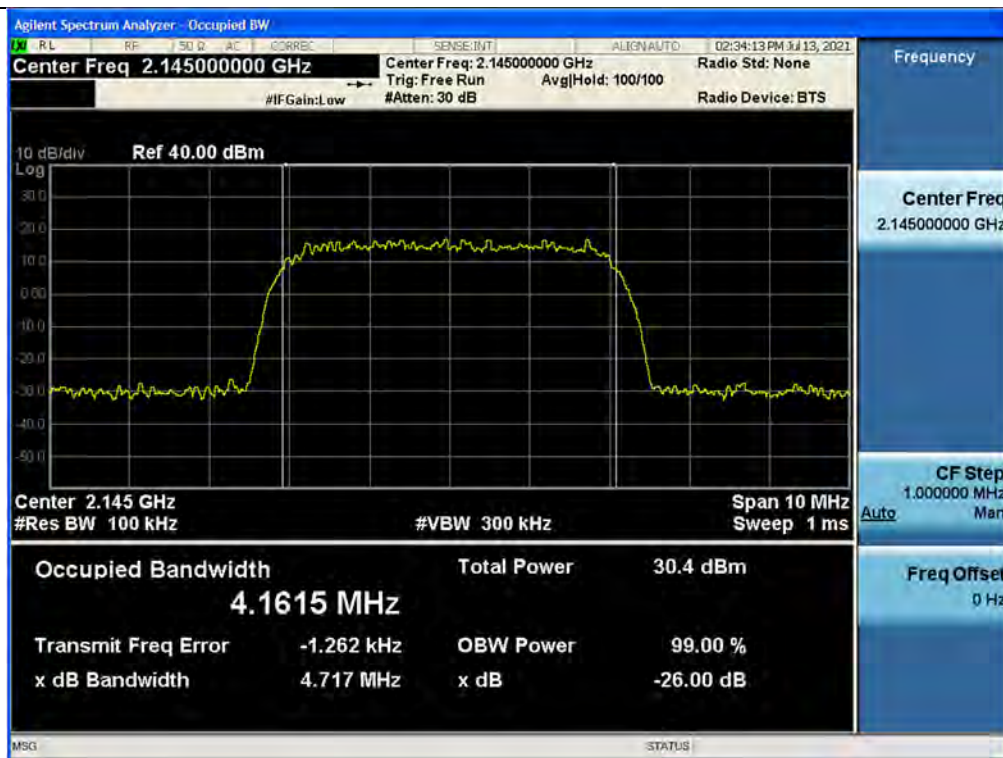

Input / AWS / Downlink / WCDMA

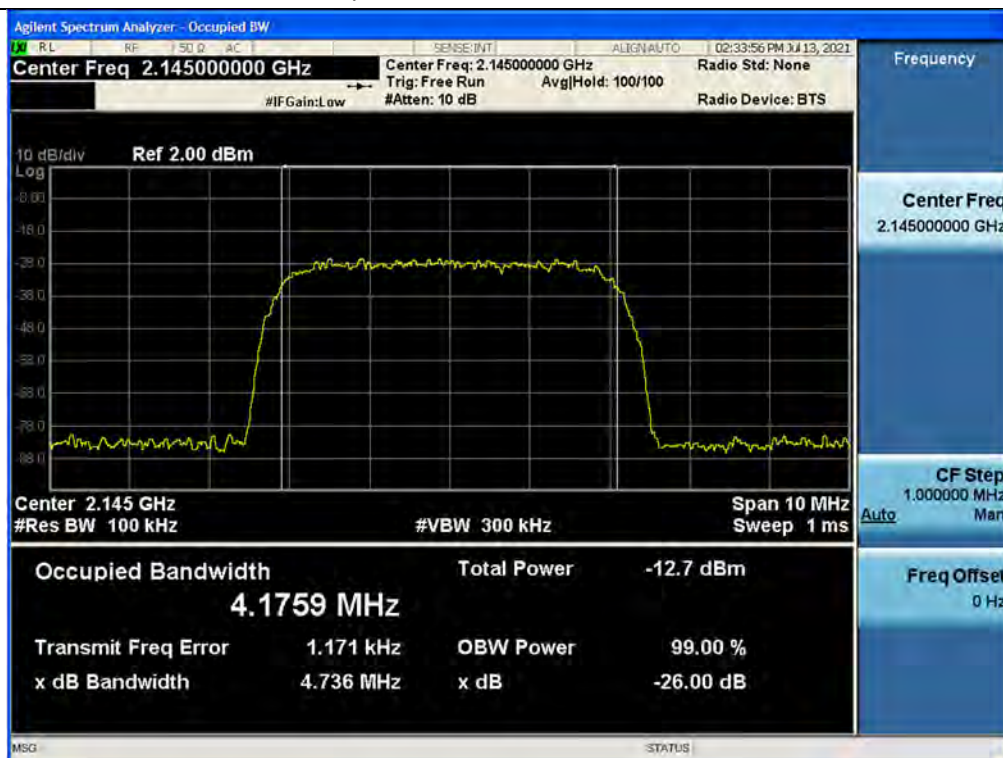


3 dB above the AGC threshold output / AWS / Downlink / WCDMA

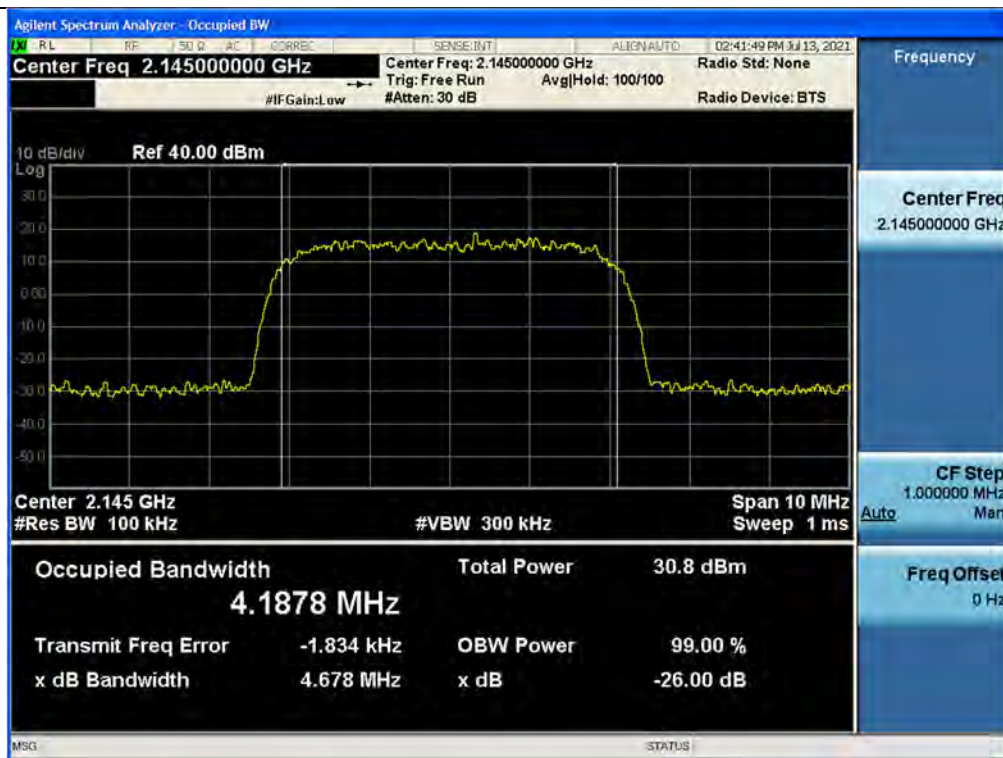

3 dB above the AGC threshold Input / AWS / Downlink / WCDMA




Output / AWS / Downlink / LTE 5 MHz

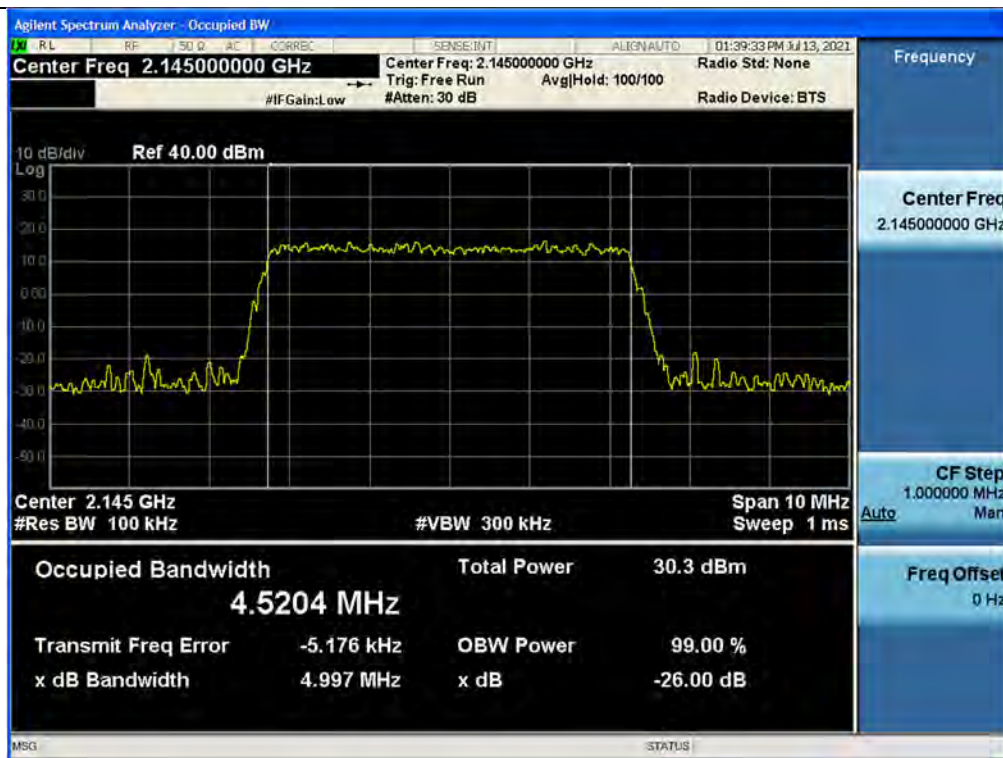


Input / AWS / Downlink / LTE 5 MHz



3 dB above the AGC threshold output / AWS / Downlink / LTE 5 MHz

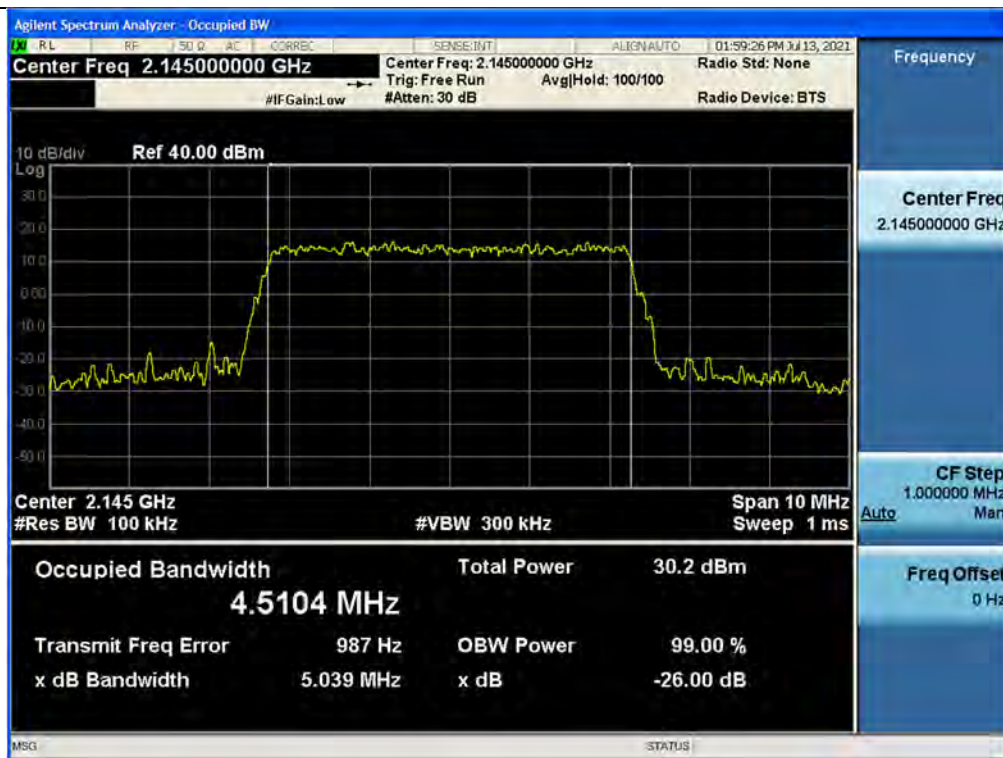


3 dB above the AGC threshold Input / AWS / Downlink / LTE 5 MHz

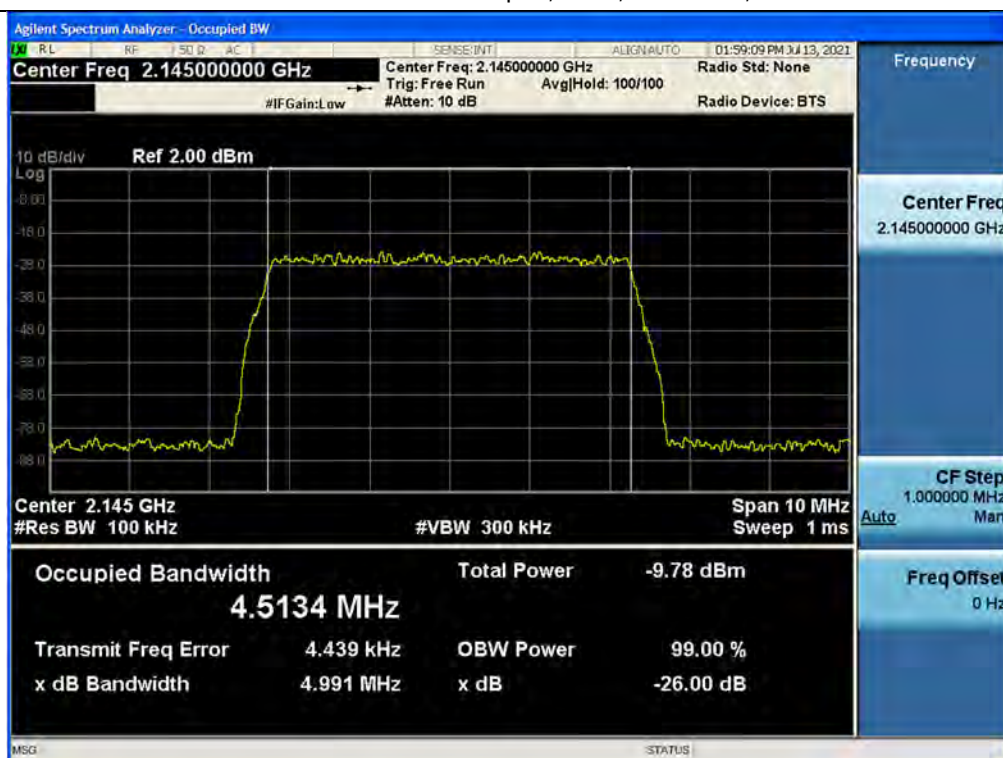


Output / AWS / Downlink / LTE 10 MHz




Input / AWS / Downlink / LTE 10 MHz

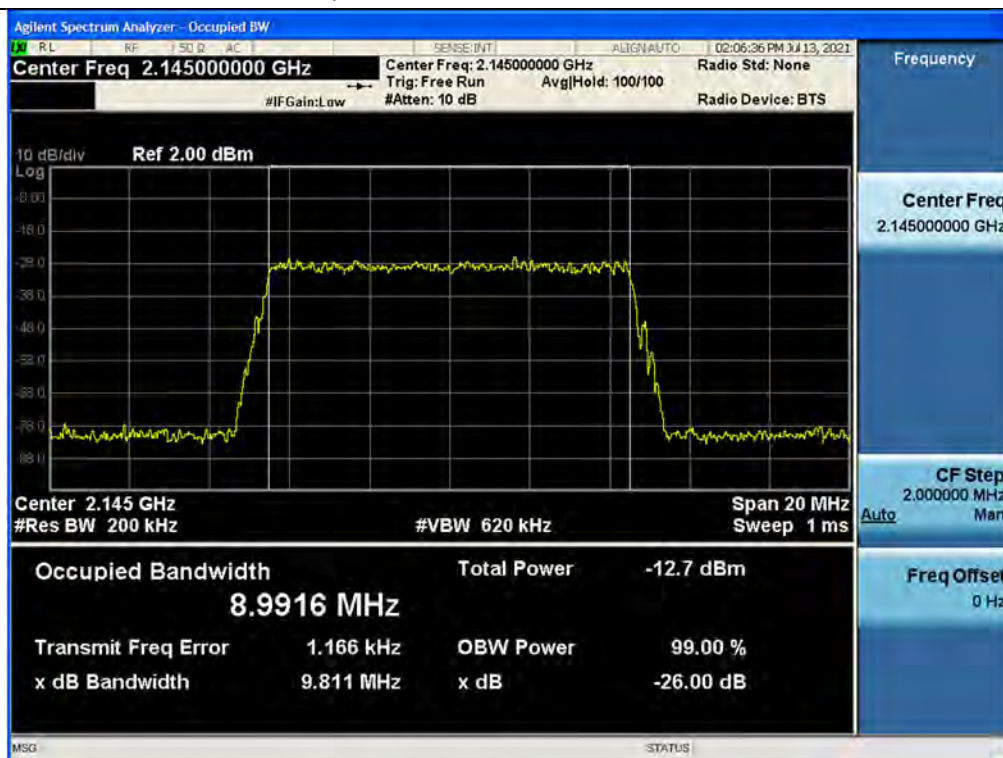


3 dB above the AGC threshold output / AWS / Downlink / LTE 10 MHz

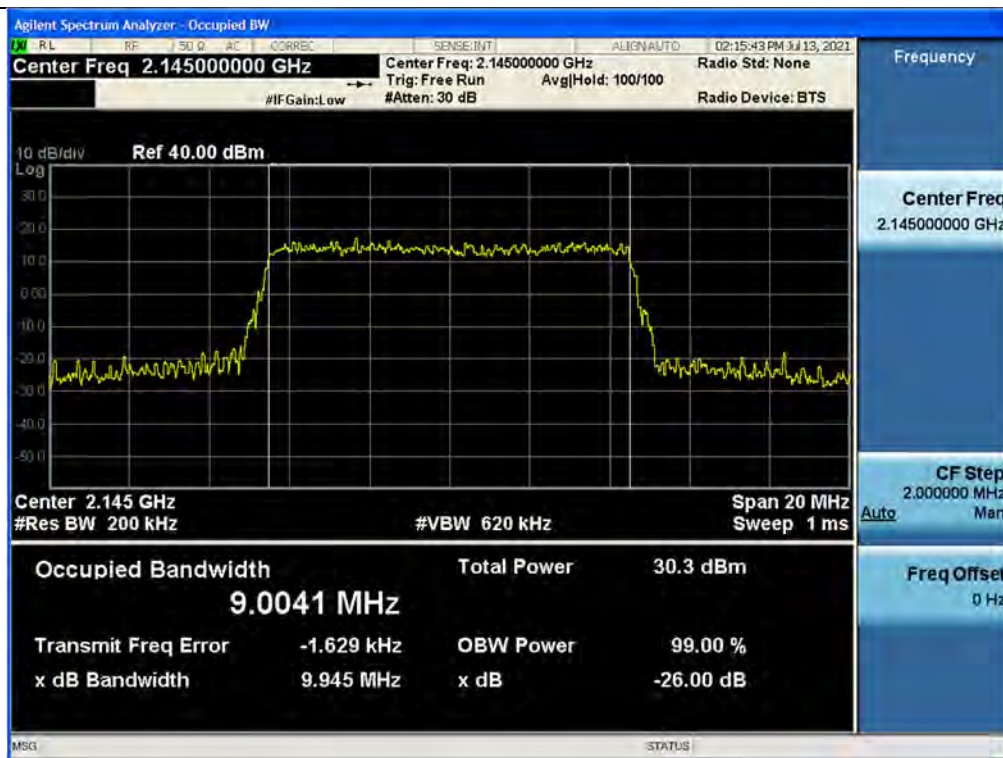


3 dB above the AGC threshold Input / AWS / Downlink / LTE 10 MHz

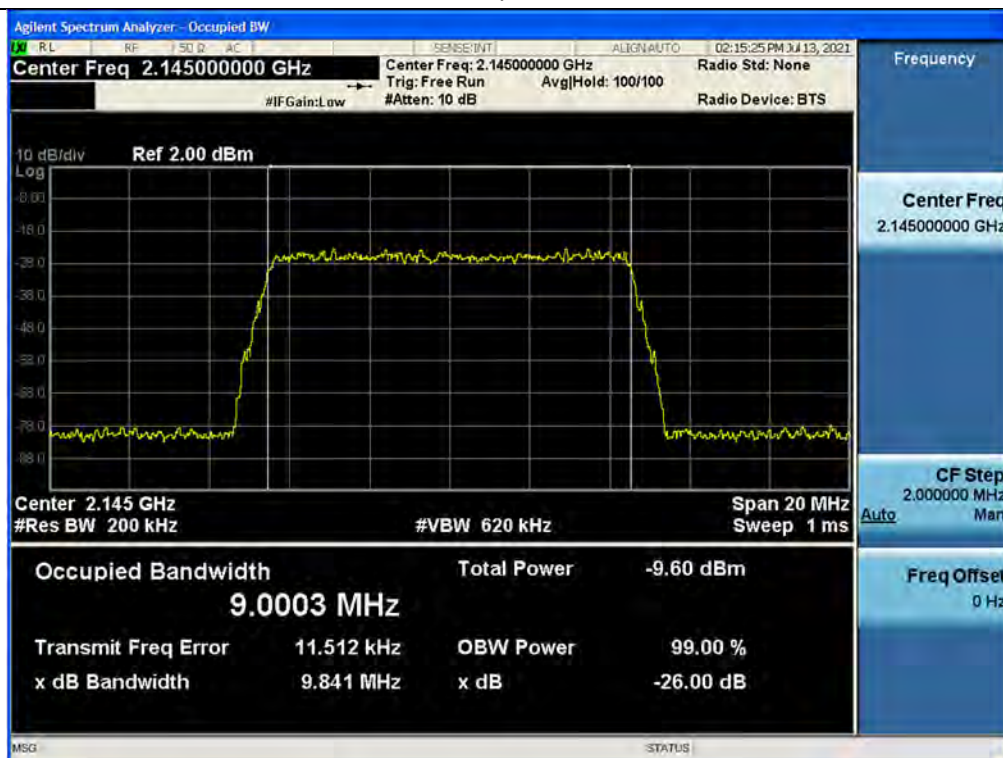

Output / AWS / Downlink / LTE 20 MHz

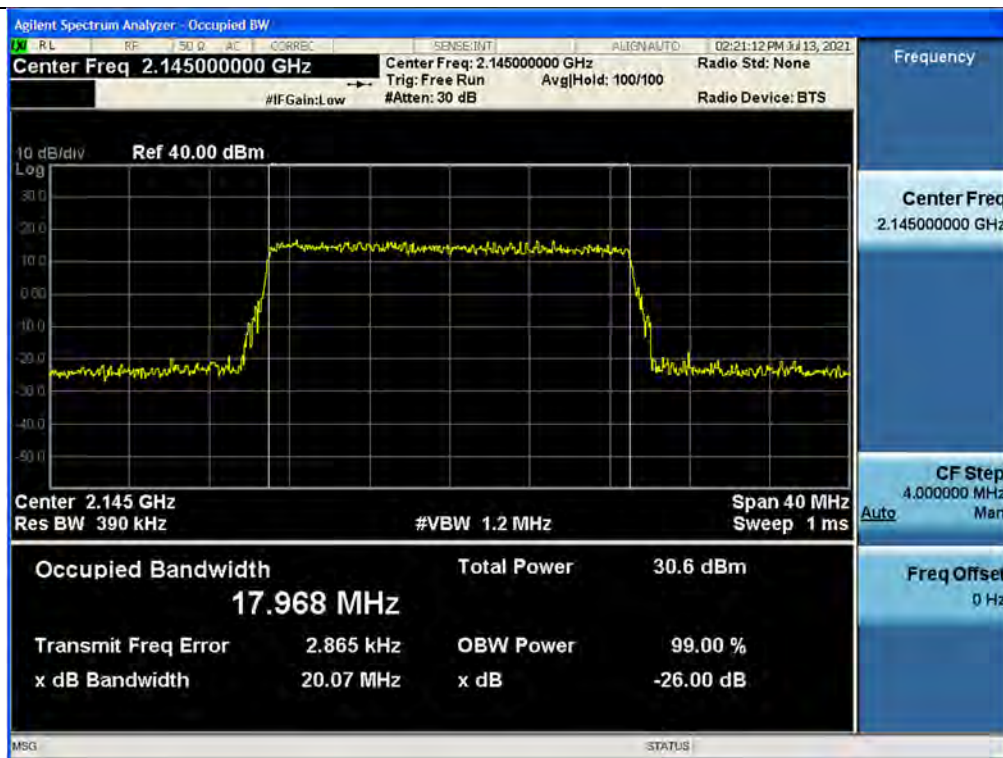


Input / AWS / Downlink / LTE 20 MHz

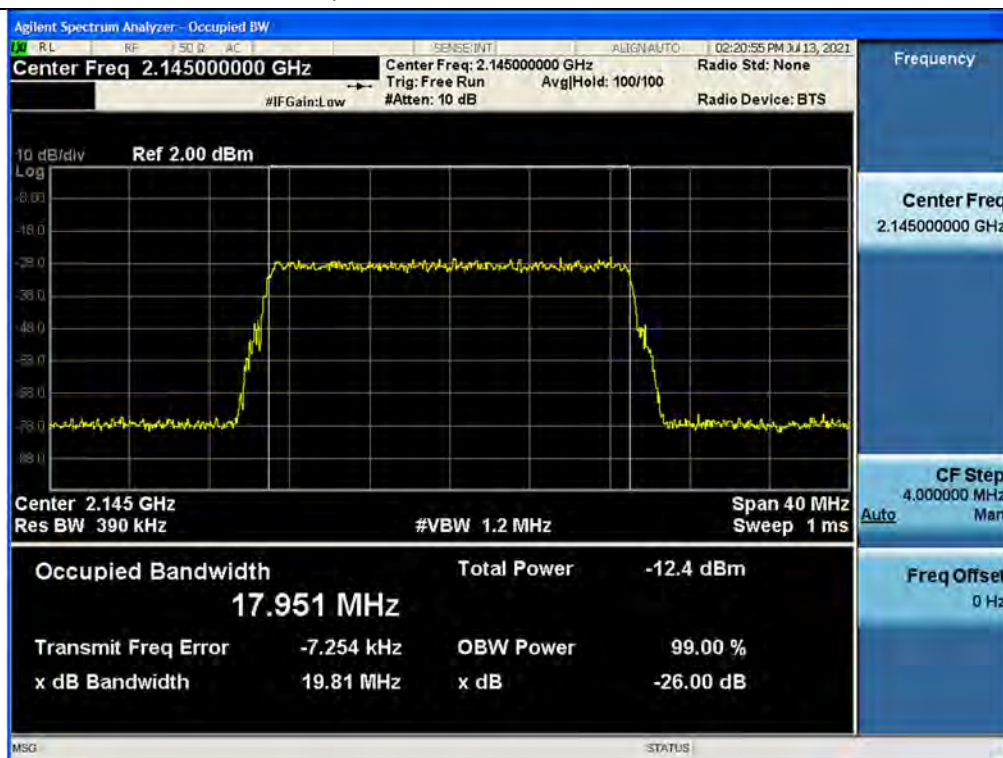

3 dB above the AGC threshold output / AWS / Downlink / LTE 20 MHz



3 dB above the AGC threshold Input / AWS / Downlink / LTE 20 MHz

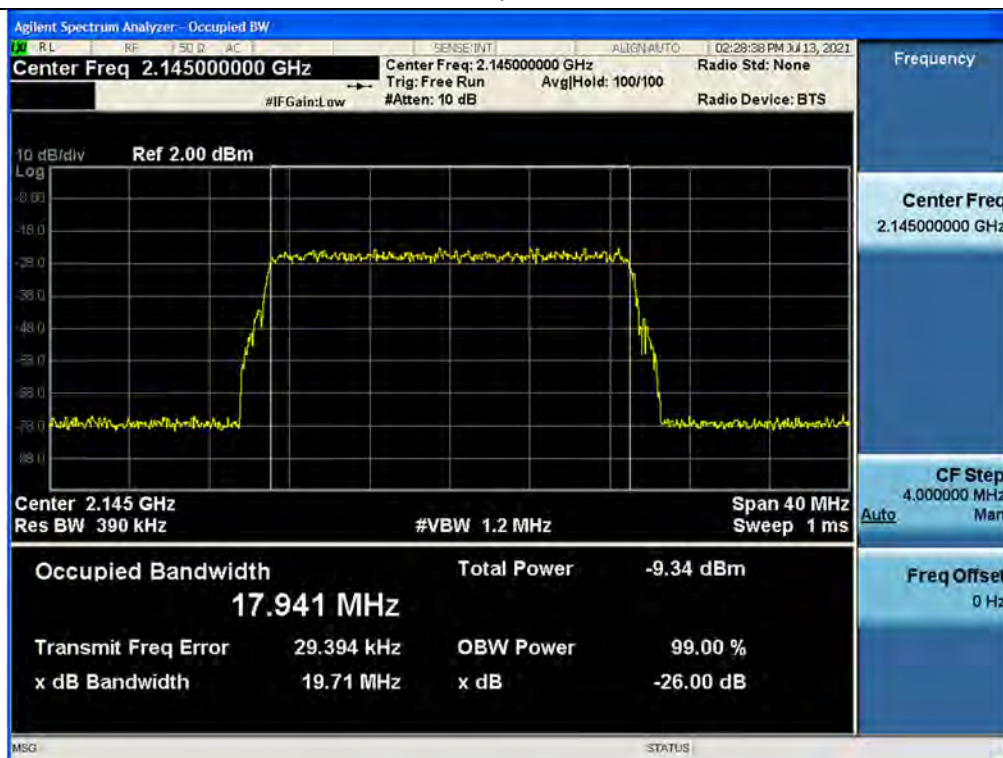

Output / Broadband PCS / Downlink / GSM



Input / Broadband PCS / Downlink / GSM




3 dB above the AGC threshold output / Broadband PCS / Downlink / GSM




3 dB above the AGC threshold Input / Broadband PCS / Downlink / GSM




Output / Broadband PCS / Downlink / CDMA

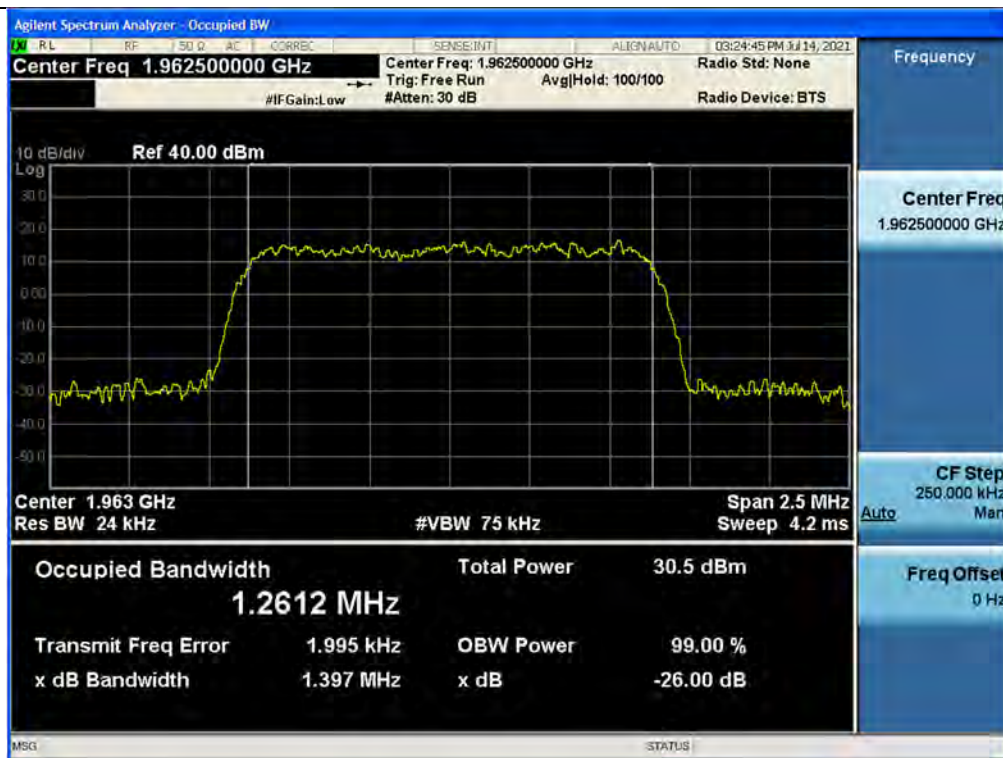


Input / Broadband PCS / Downlink / CDMA

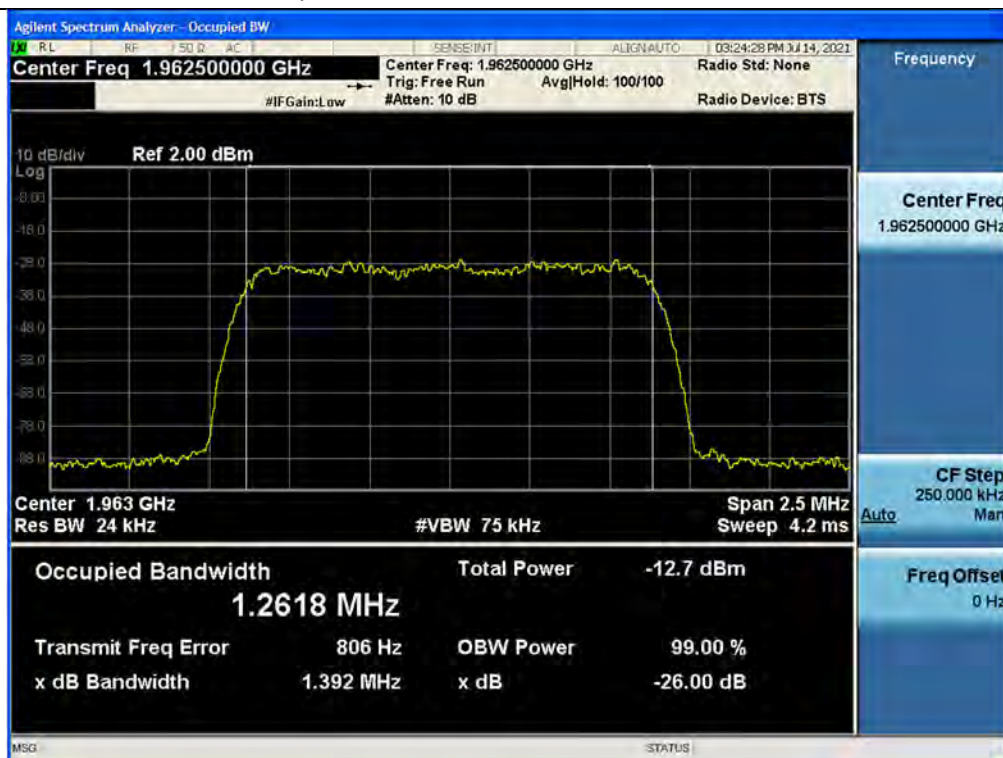

3 dB above the AGC threshold output / Broadband PCS / Downlink / CDMA

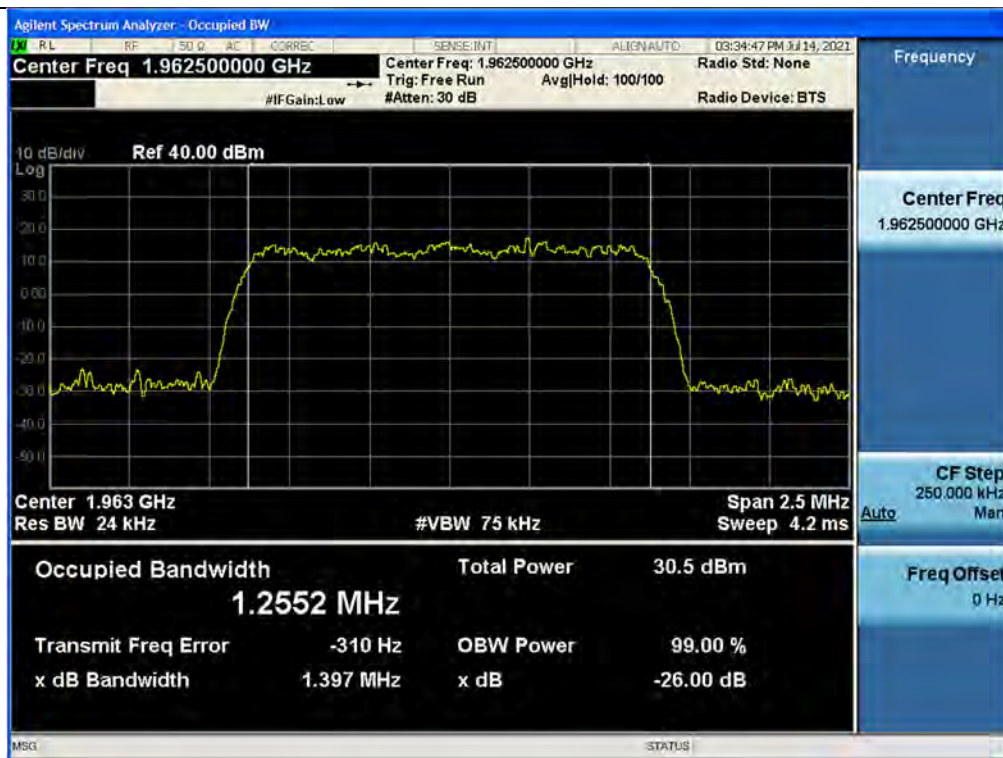

3 dB above the AGC threshold Input / Broadband PCS / Downlink / CDMA

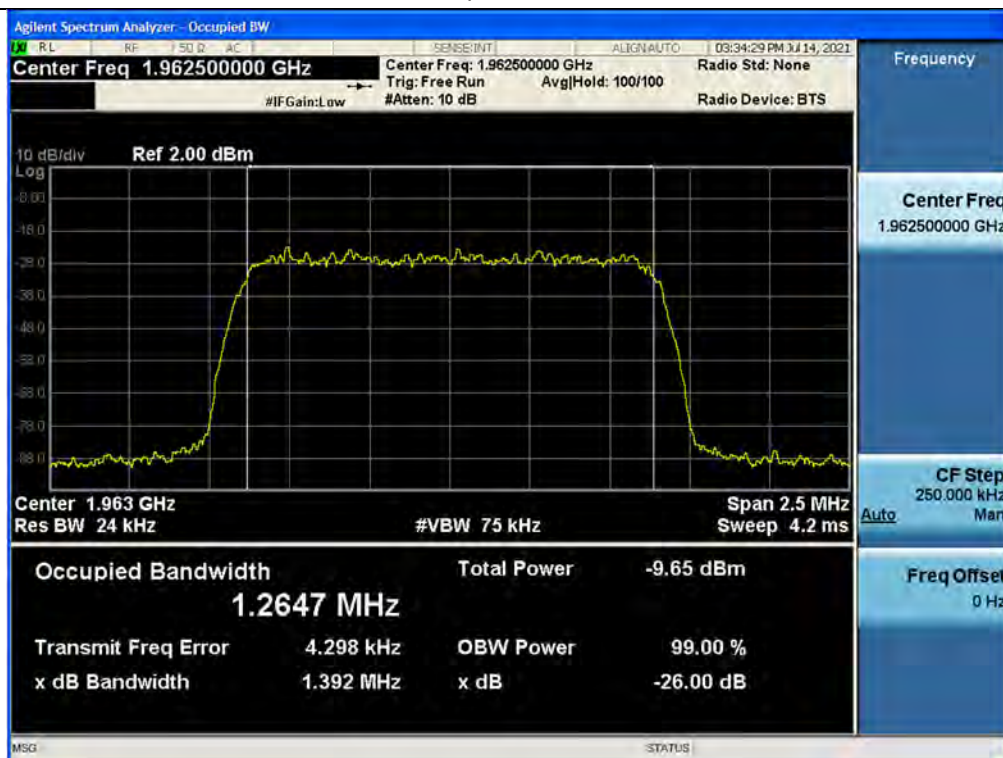


Output / Broadband PCS / Downlink / WCDMA




Input / Broadband PCS / Downlink / WCDMA




3 dB above the AGC threshold output / Broadband PCS / Downlink / WCDMA

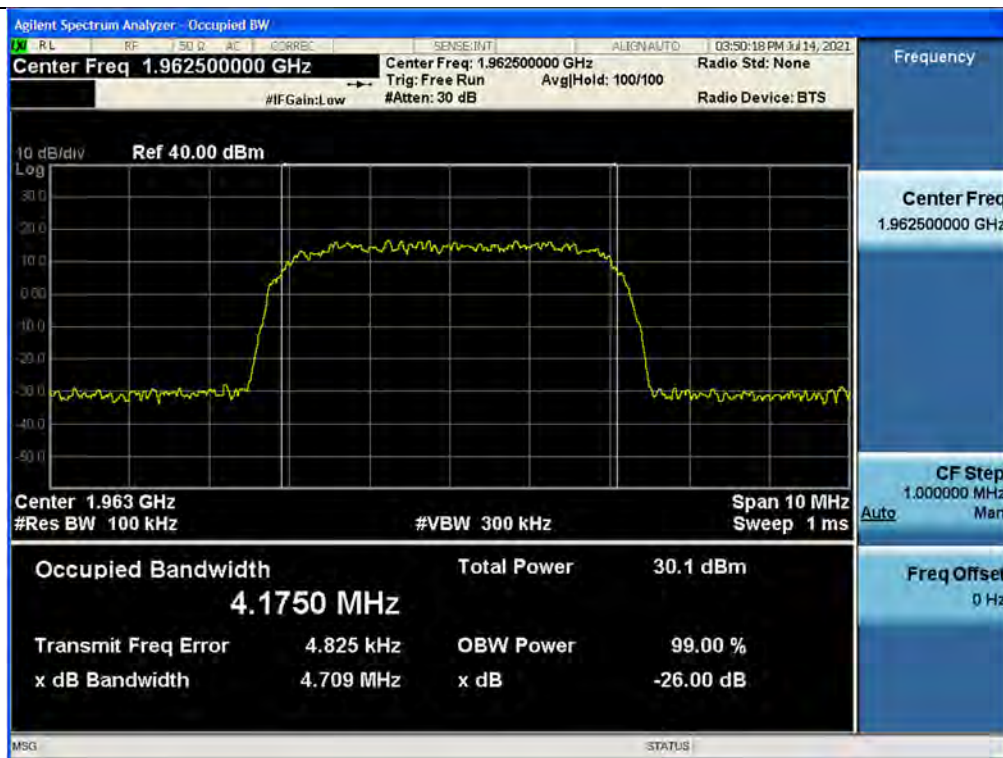


3 dB above the AGC threshold Input / Broadband PCS / Downlink / WCDMA

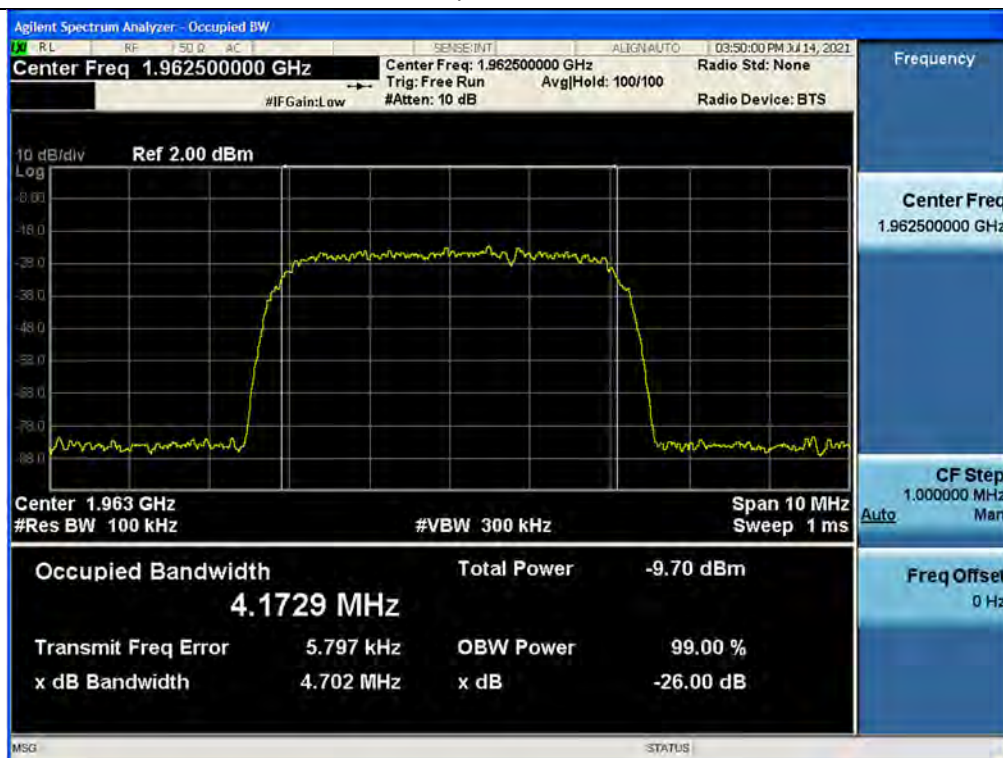


Output / Broadband PCS / Downlink / LTE 5 MHz

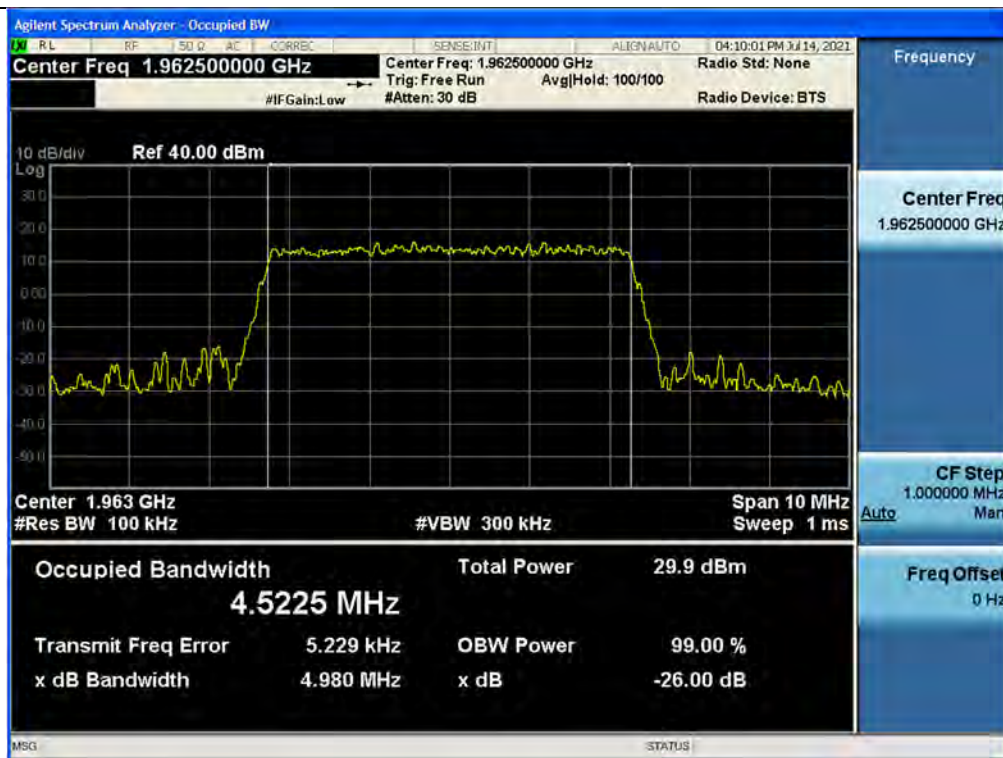


Input / Broadband PCS / Downlink / LTE 5 MHz

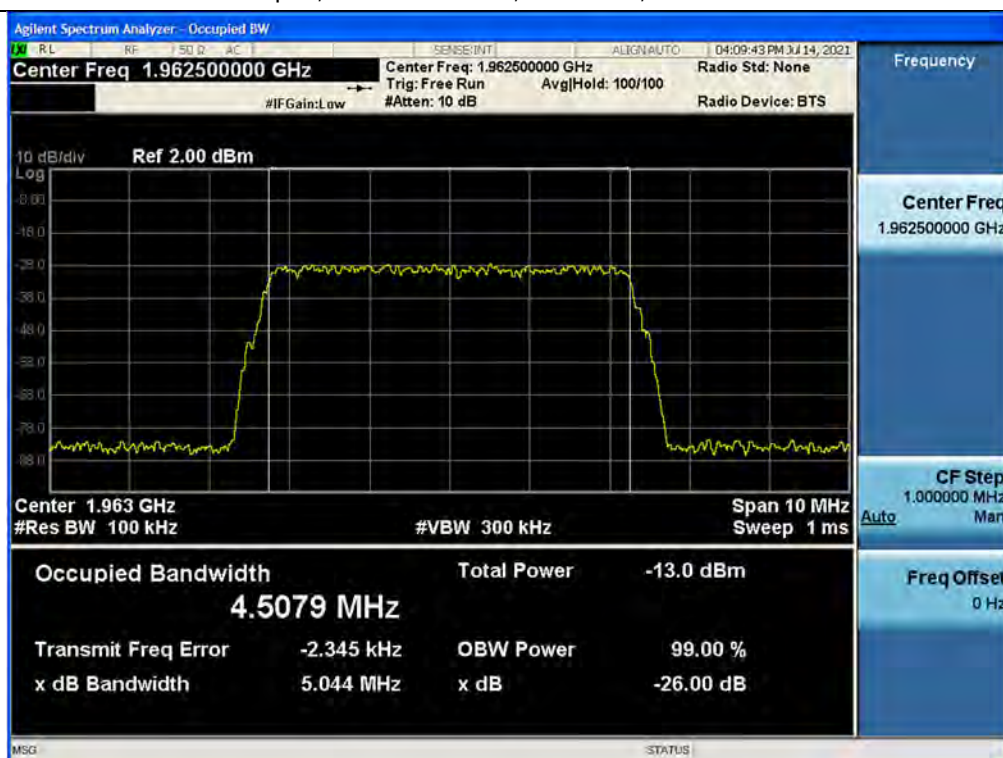

3 dB above the AGC threshold output / Broadband PCS / Downlink / LTE 5 MHz

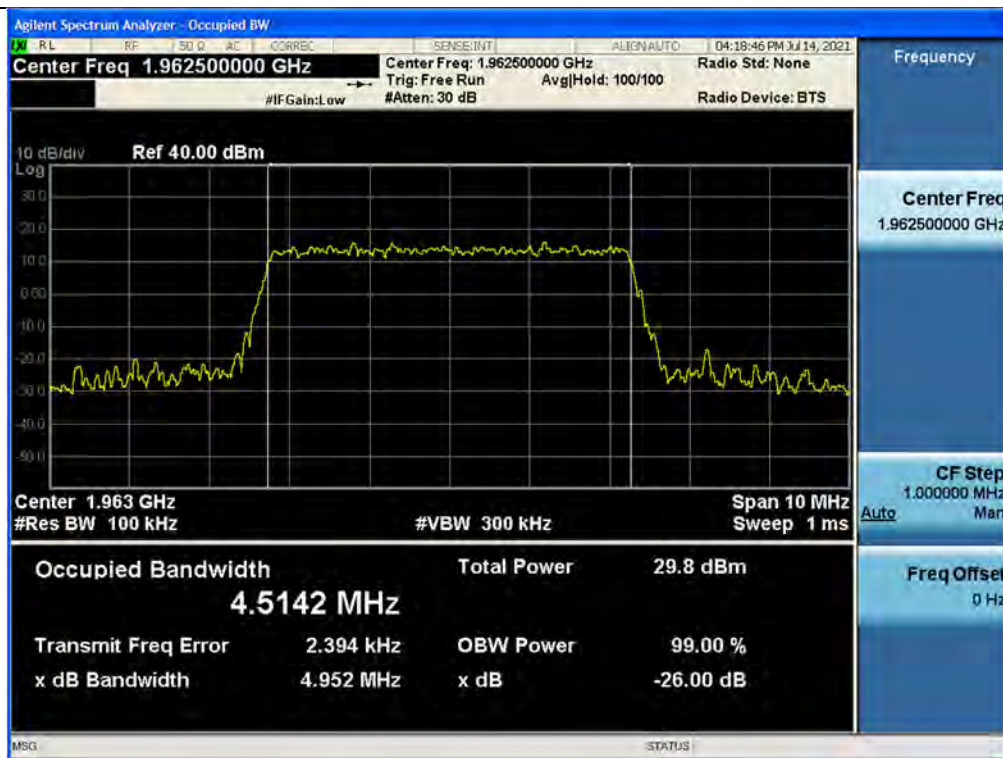


3 dB above the AGC threshold Input / Broadband PCS / Downlink / LTE 5 MHz

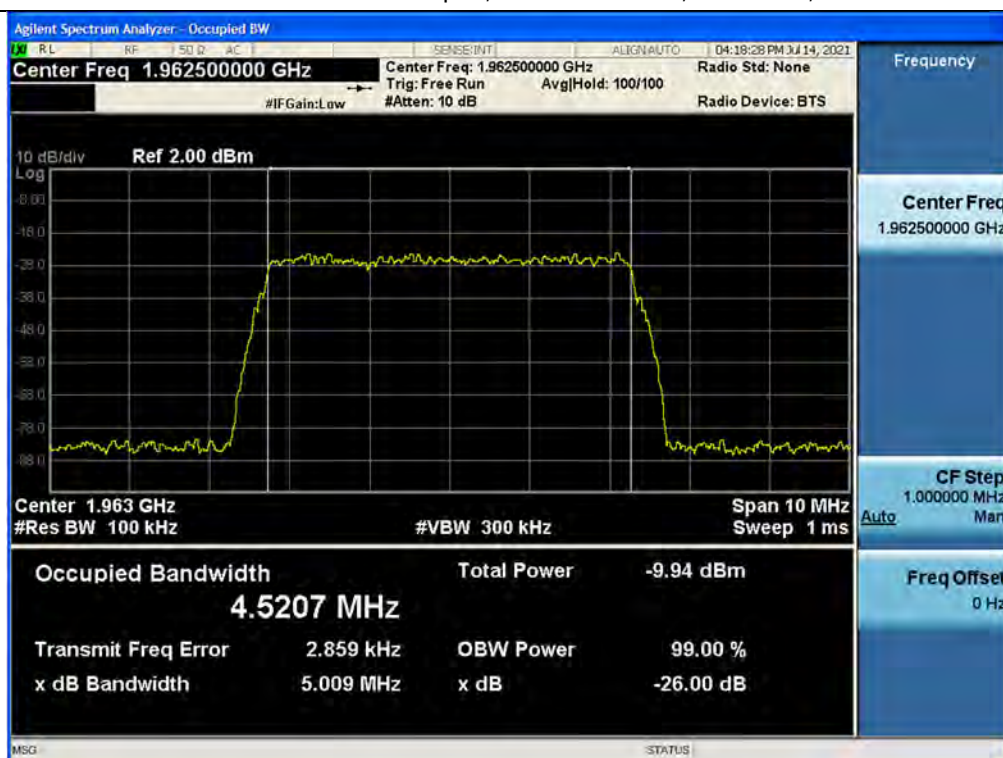


Output / Broadband PCS / Downlink / LTE 10 MHz




Input / Broadband PCS / Downlink / LTE 10 MHz

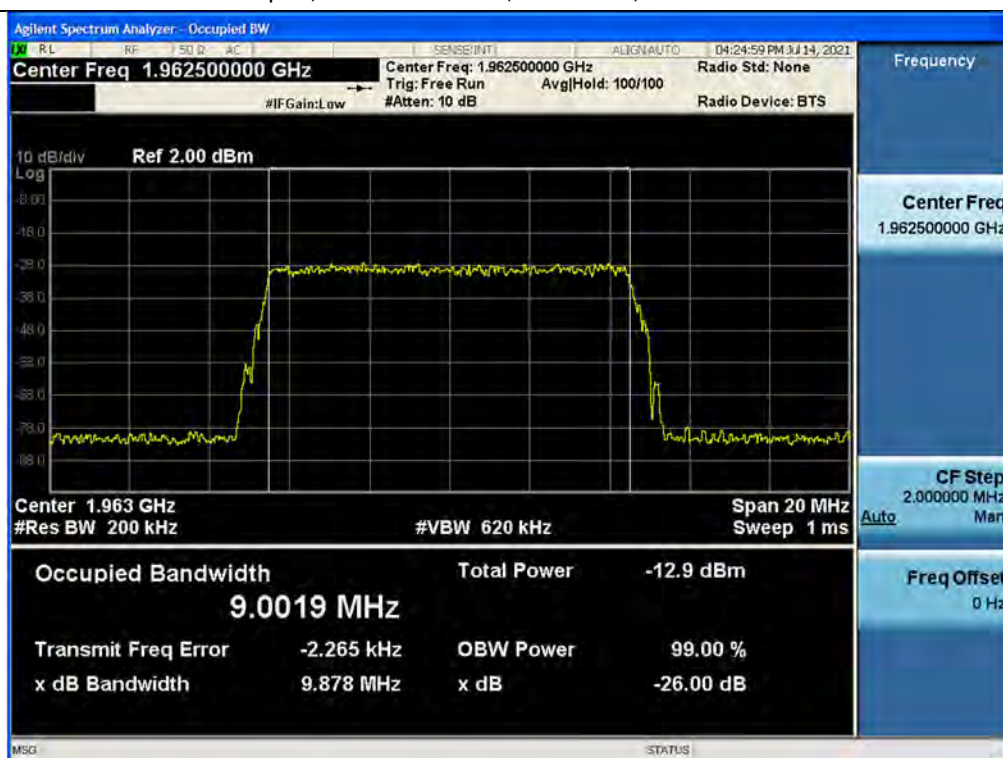

3 dB above the AGC threshold output / Broadband PCS / Downlink / LTE 10 MHz

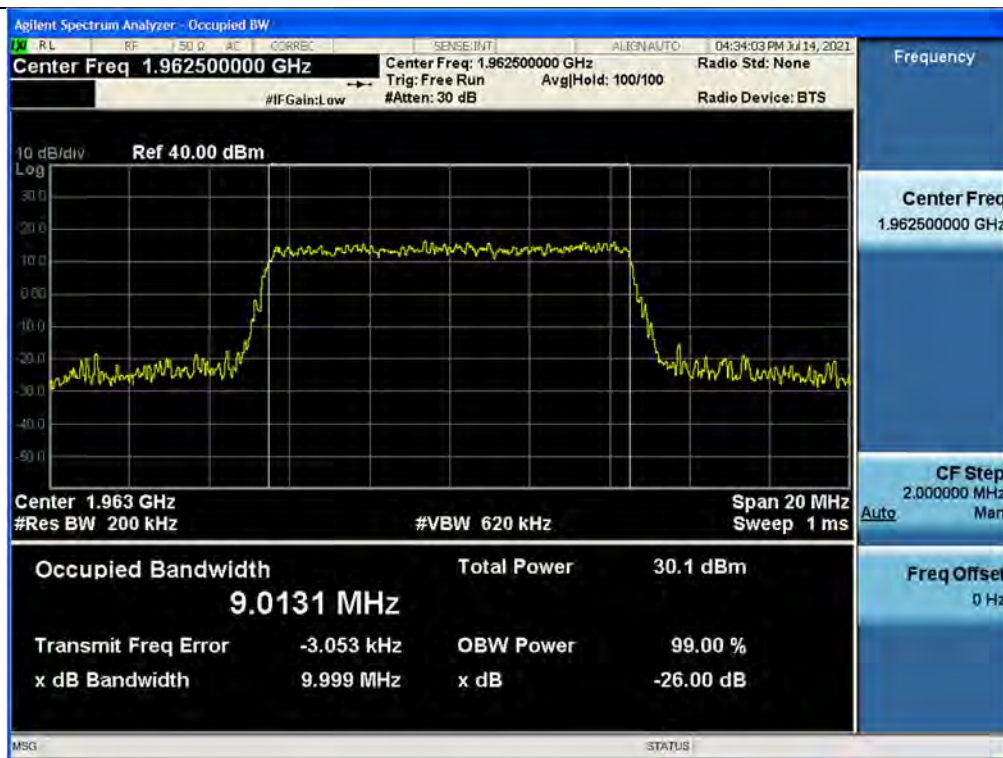


3 dB above the AGC threshold Input / Broadband PCS / Downlink / LTE 10 MHz

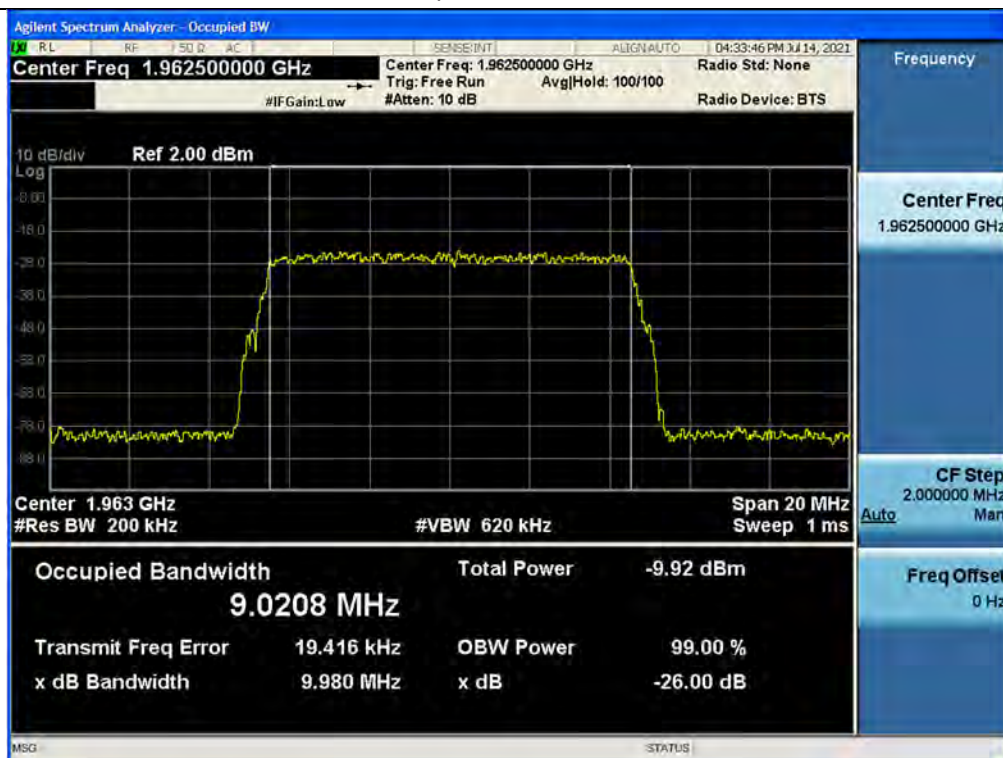


Output / Broadband PCS / Downlink / LTE 20 MHz




Input / Broadband PCS / Downlink / LTE 20 MHz

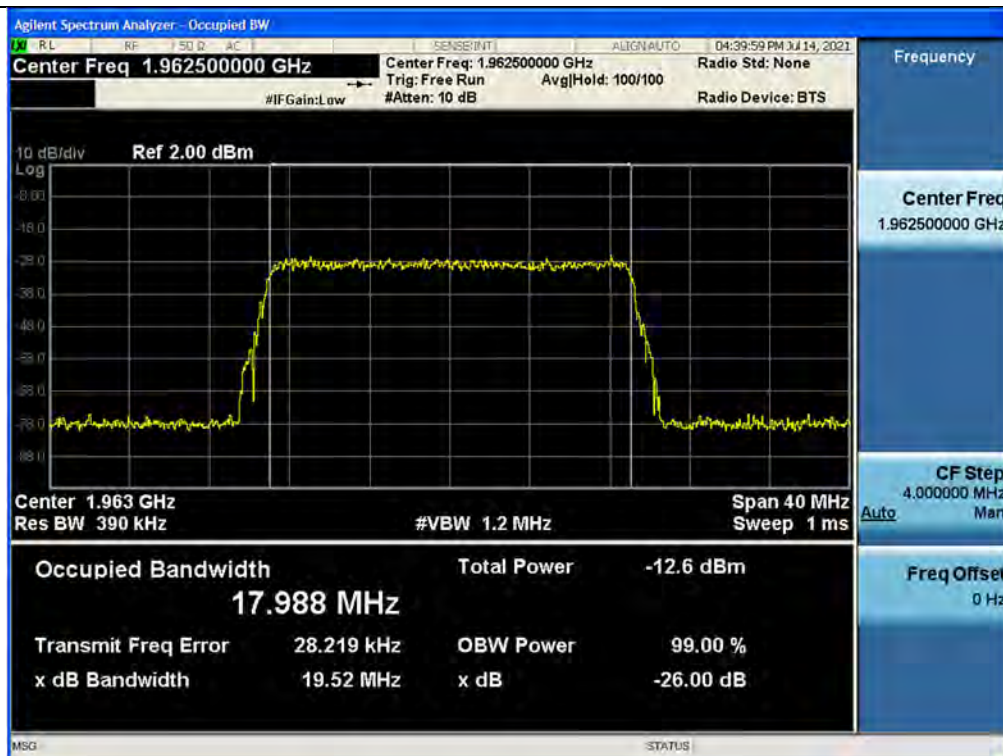

3 dB above the AGC threshold output / Broadband PCS / Downlink / LTE 20 MHz

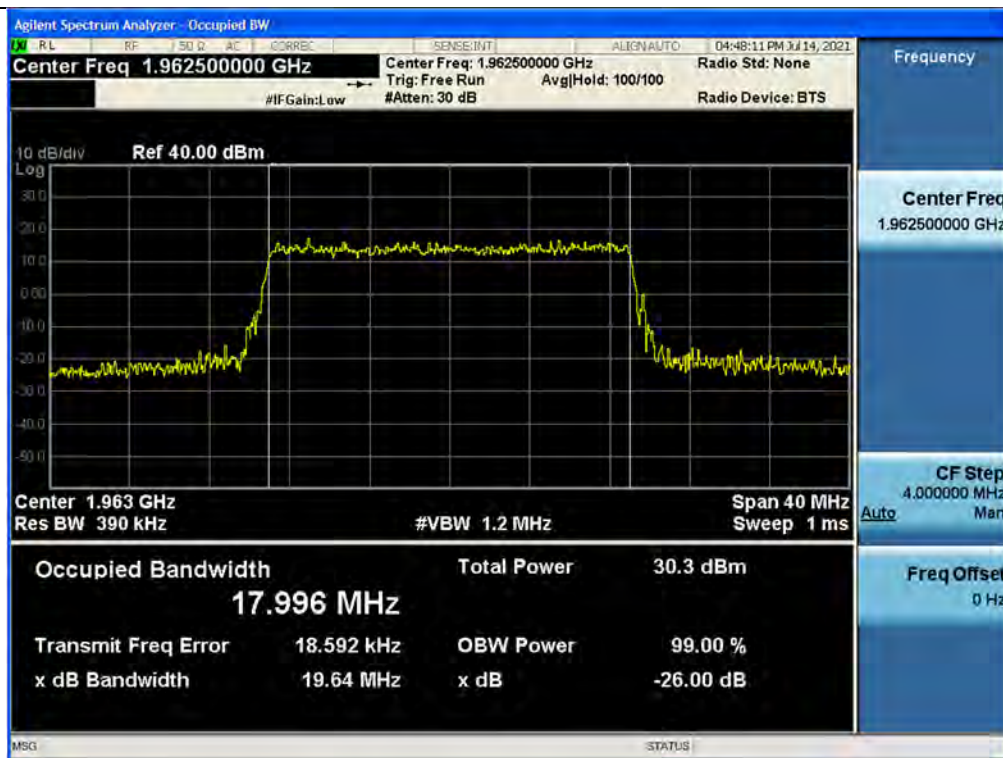


3 dB above the AGC threshold Input / Broadband PCS / Downlink / LTE 20 MHz

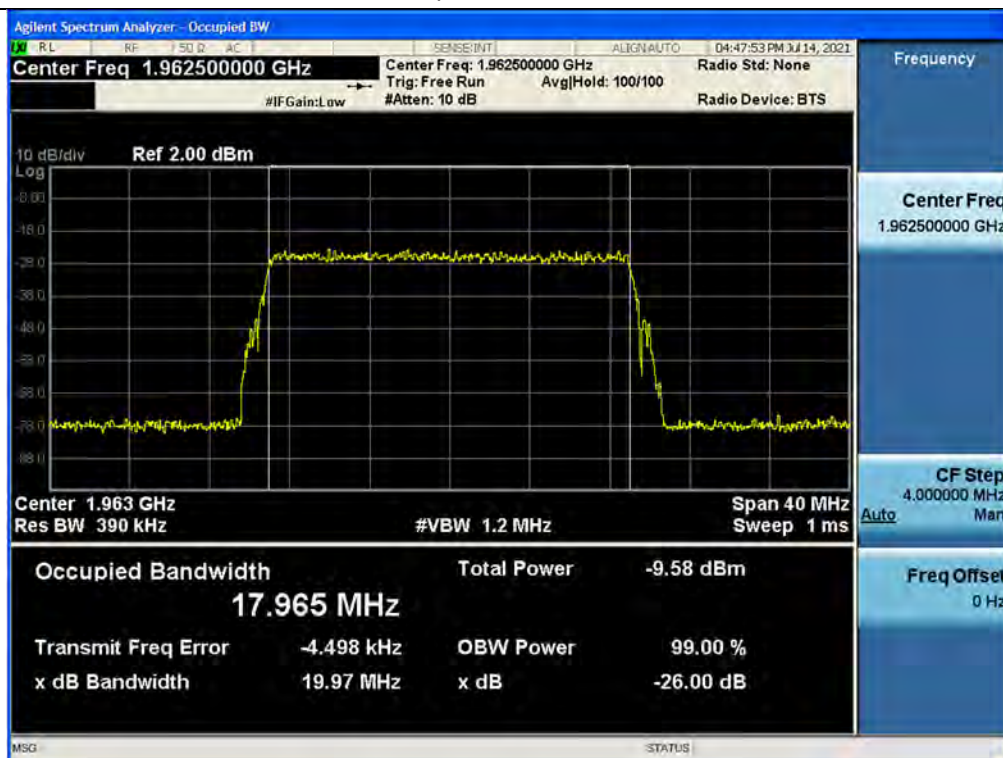

Output / BRS/EBS / Downlink / LTE 20 MHz




Input / BRS/EBS / Downlink / LTE 20 MHz

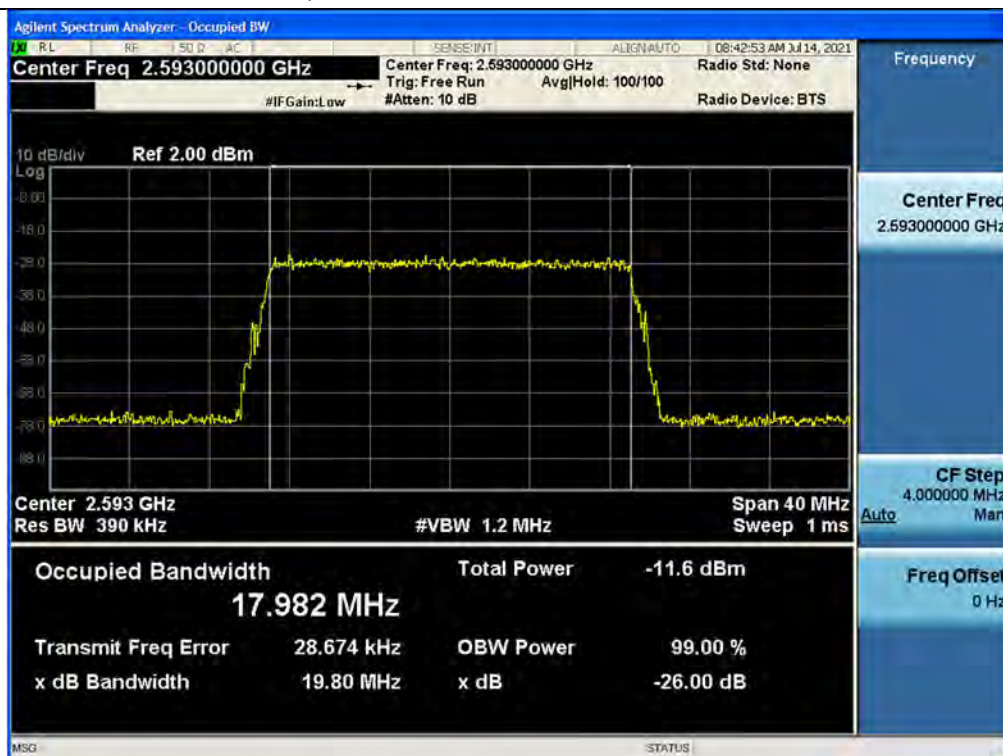


3 dB above the AGC threshold output / BRS/EBS / Downlink / LTE 20 MHz




3 dB above the AGC threshold Input / BRS/EBS / Downlink / LTE 20 MHz

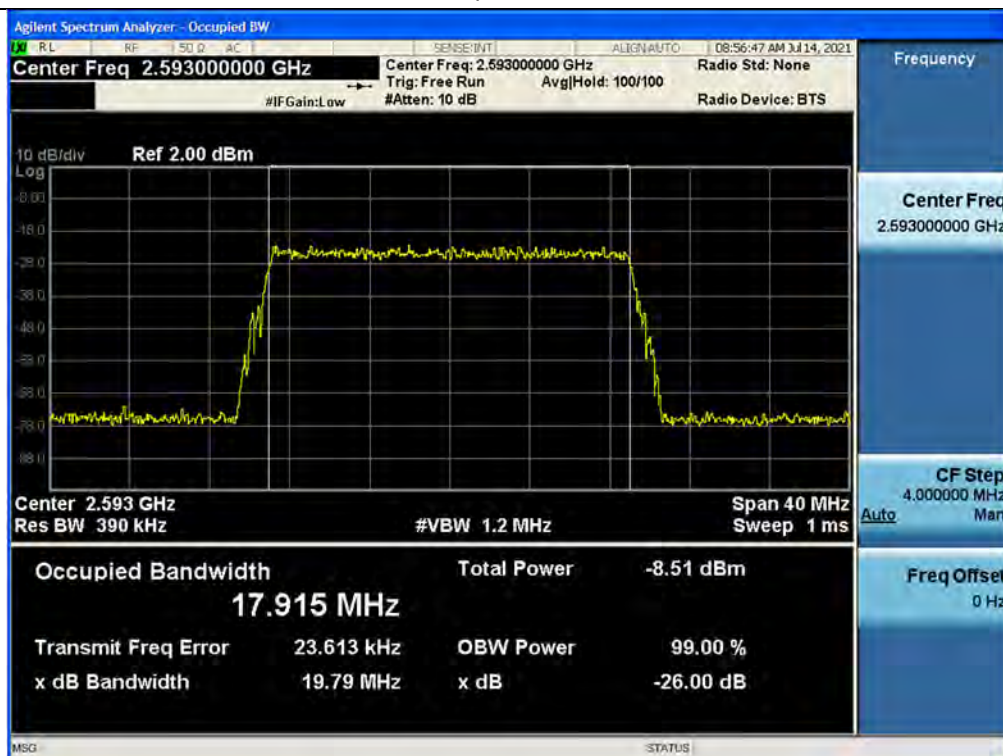

Output / FirstNet / BRS/EBS / Downlink / 5G NR_20 MHz

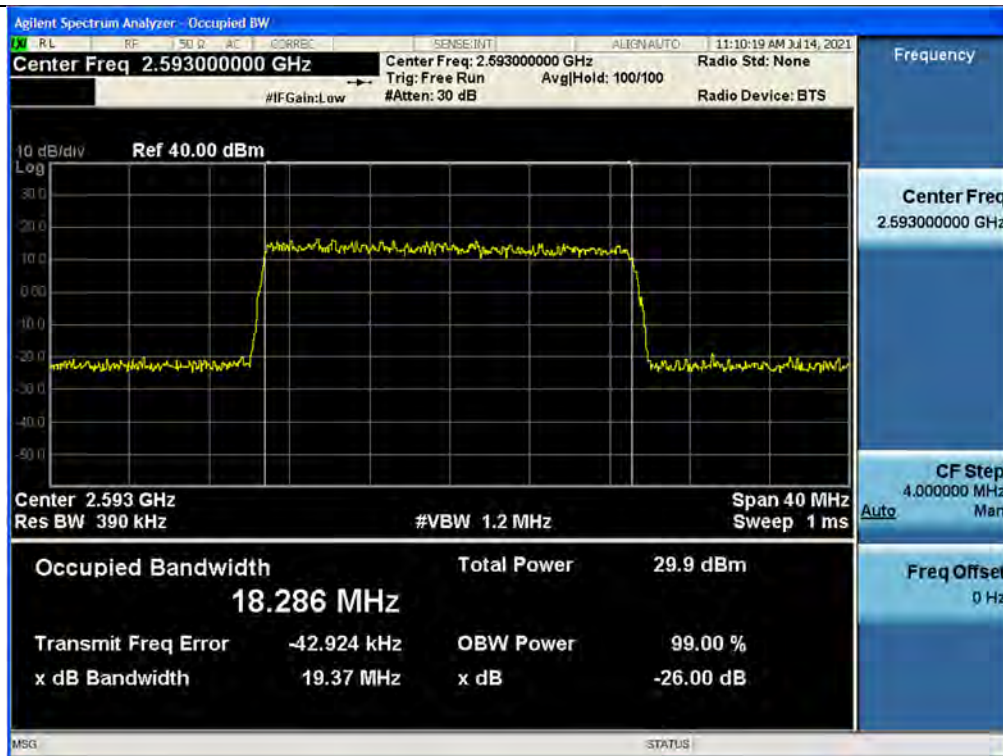


Input / BRS/EBS / Downlink / 5G NR_20 MHz

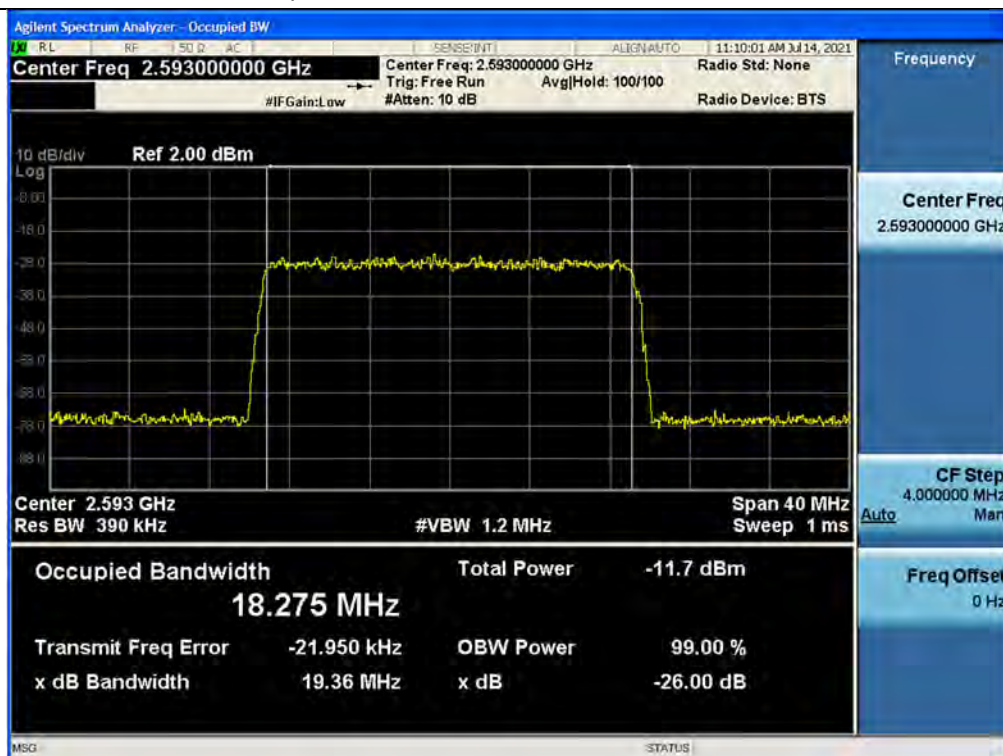


3 dB above the AGC threshold output / BRS/EBS / Downlink / 5G NR_20 MHz




3 dB above the AGC threshold Input / BRS/EBS / Downlink / 5G NR_20 MHz

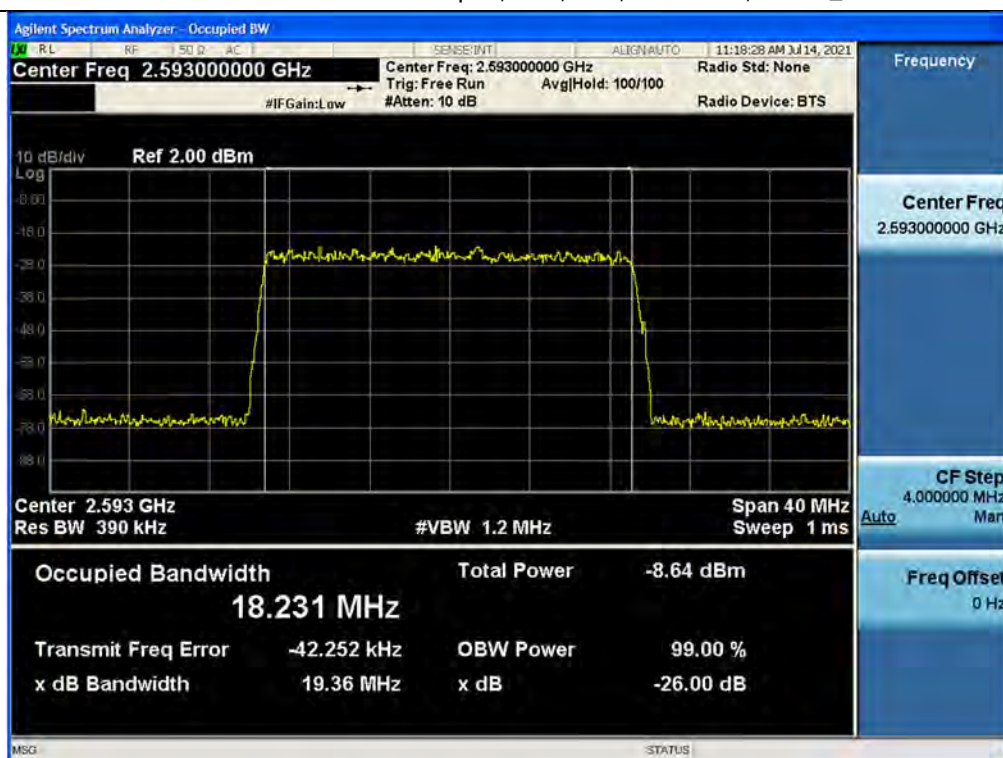


Output / BRS/EBS / Downlink / 5G NR_40 MHz

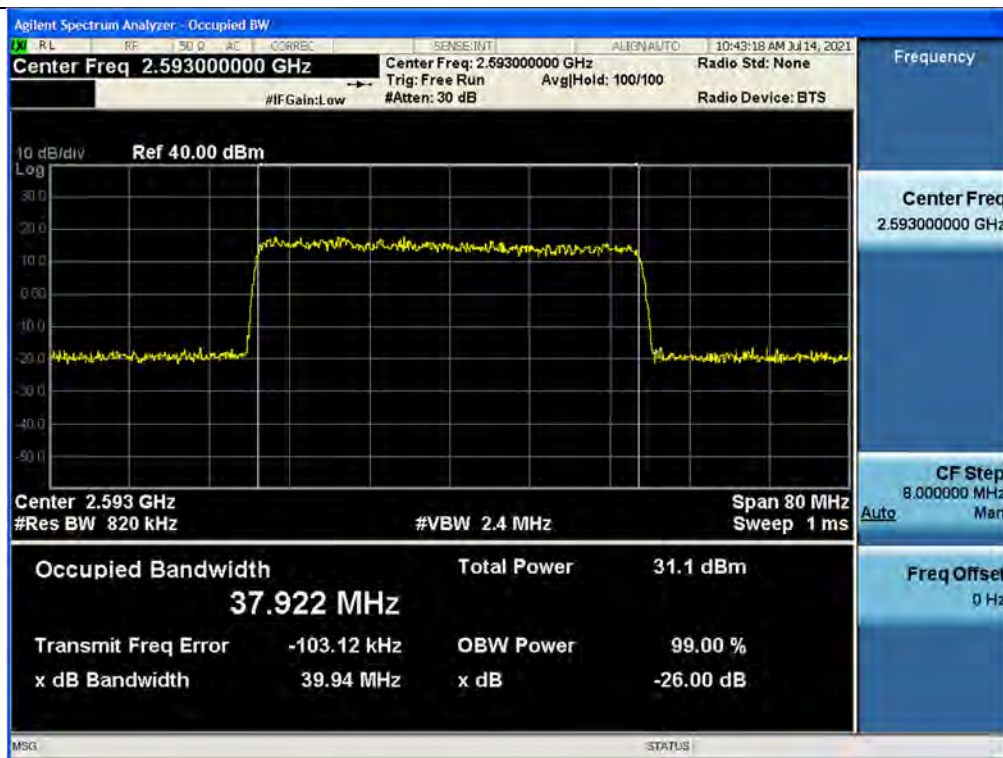


Input / BRS/EBS / Downlink / 5G NR_40 MHz

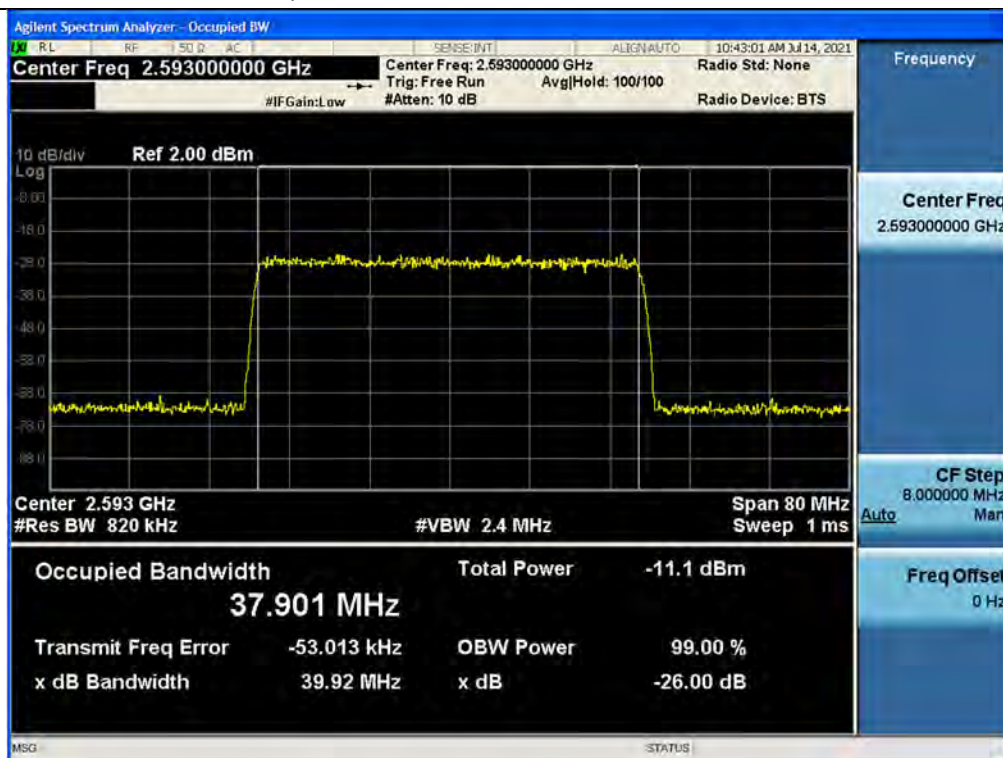


3 dB above the AGC threshold output / BRS/EBS / Downlink / 5G NR_40 MHz

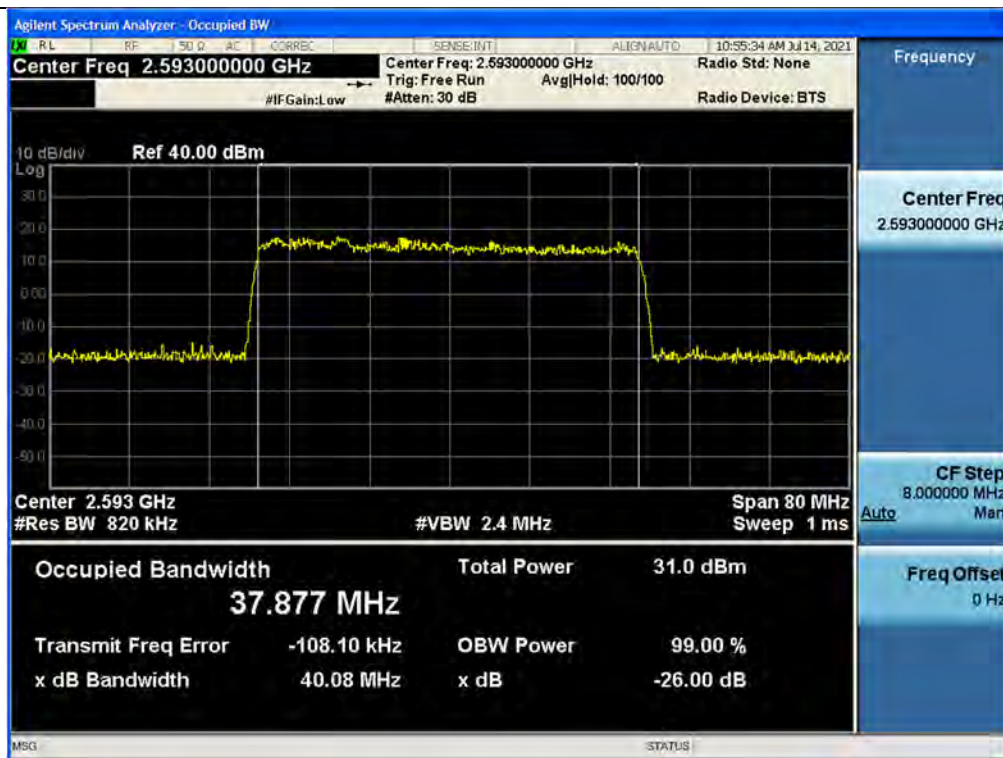


3 dB above the AGC threshold Input / BRS/EBS / Downlink / 5G NR_40 MHz

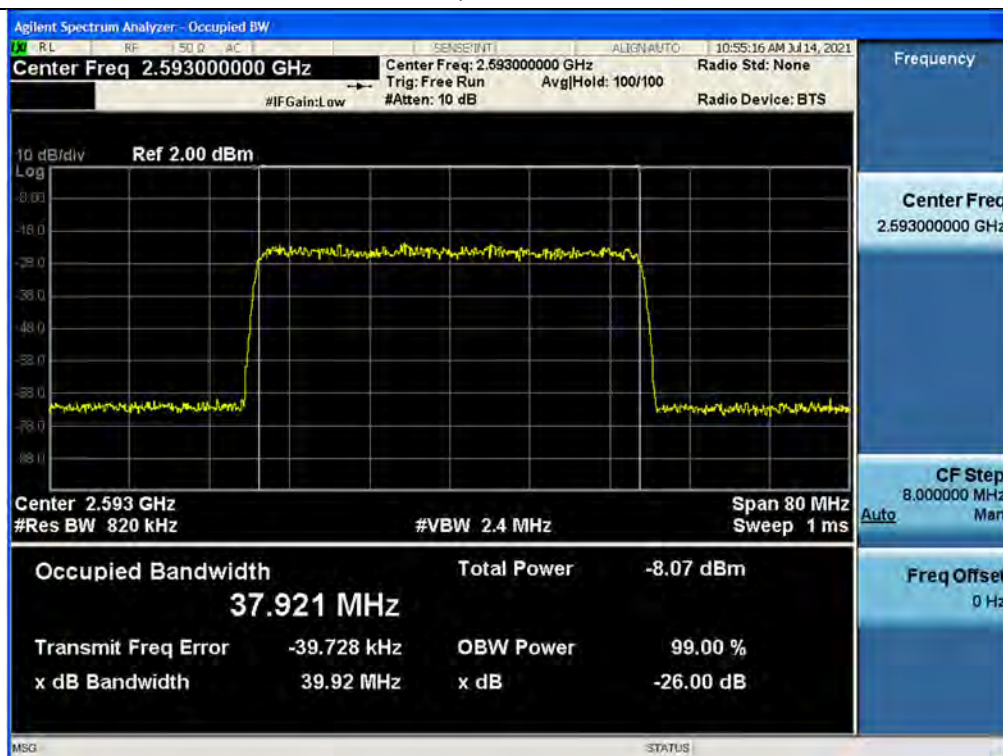

Output / BRS/EBS / Downlink / 5G NR_60 MHz

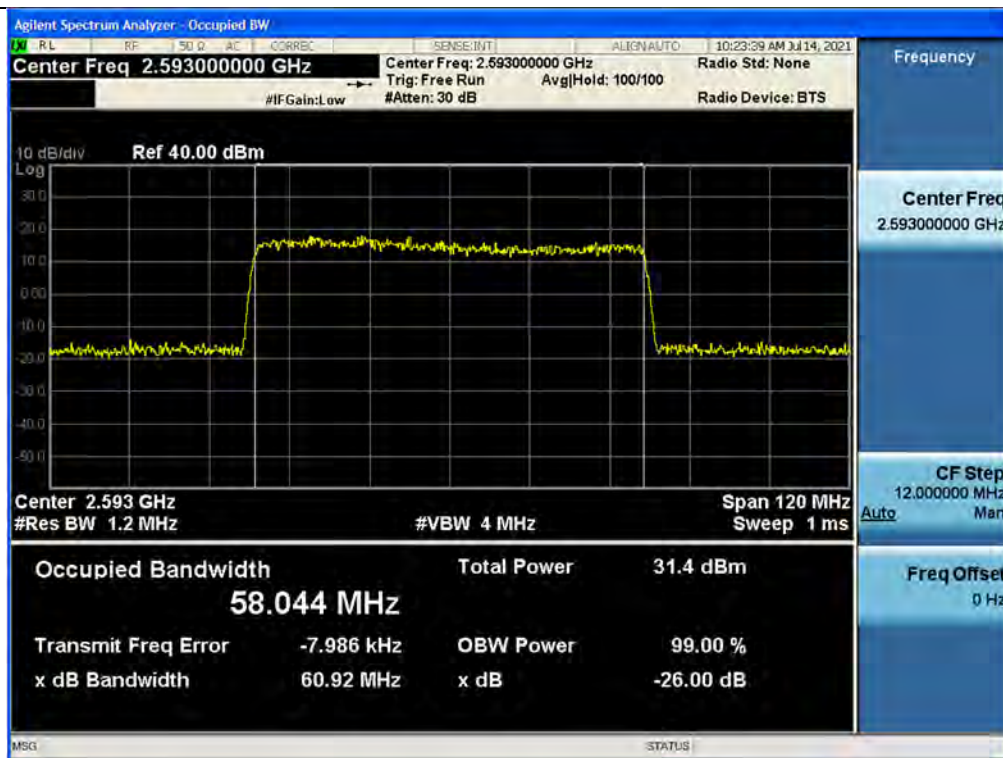


Input / BRS/EBS / Downlink / 5G NR_60 MHz

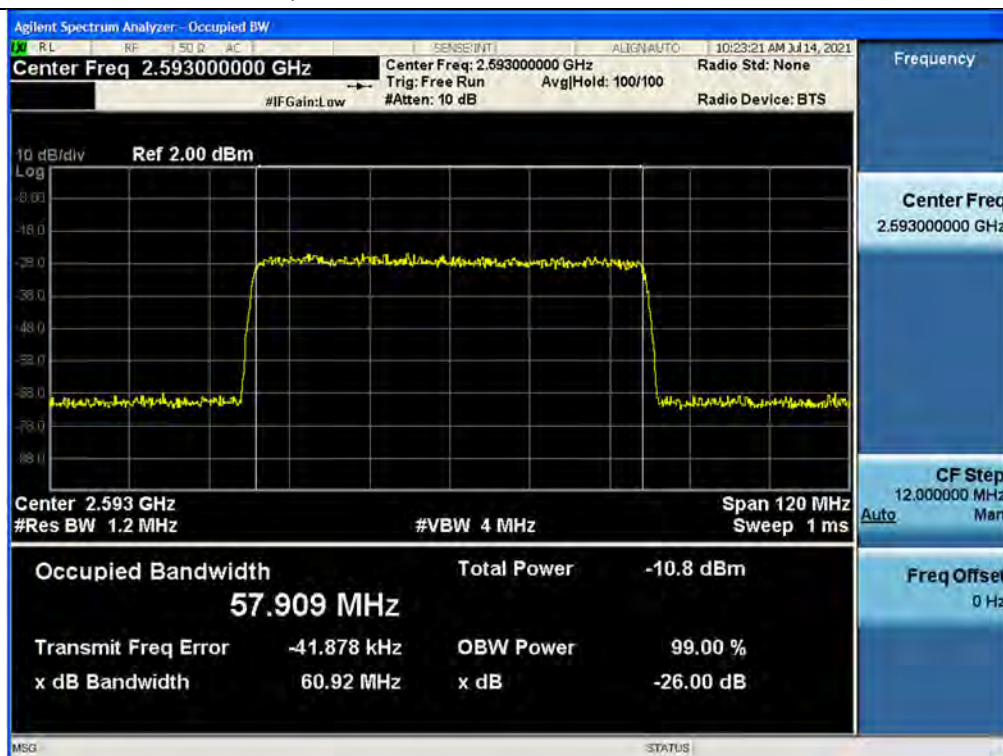


3 dB above the AGC threshold output / BRS/EBS / Downlink / 5G NR_60 MHz




3 dB above the AGC threshold Input / BRS/EBS / Downlink / 5G NR_60 MHz

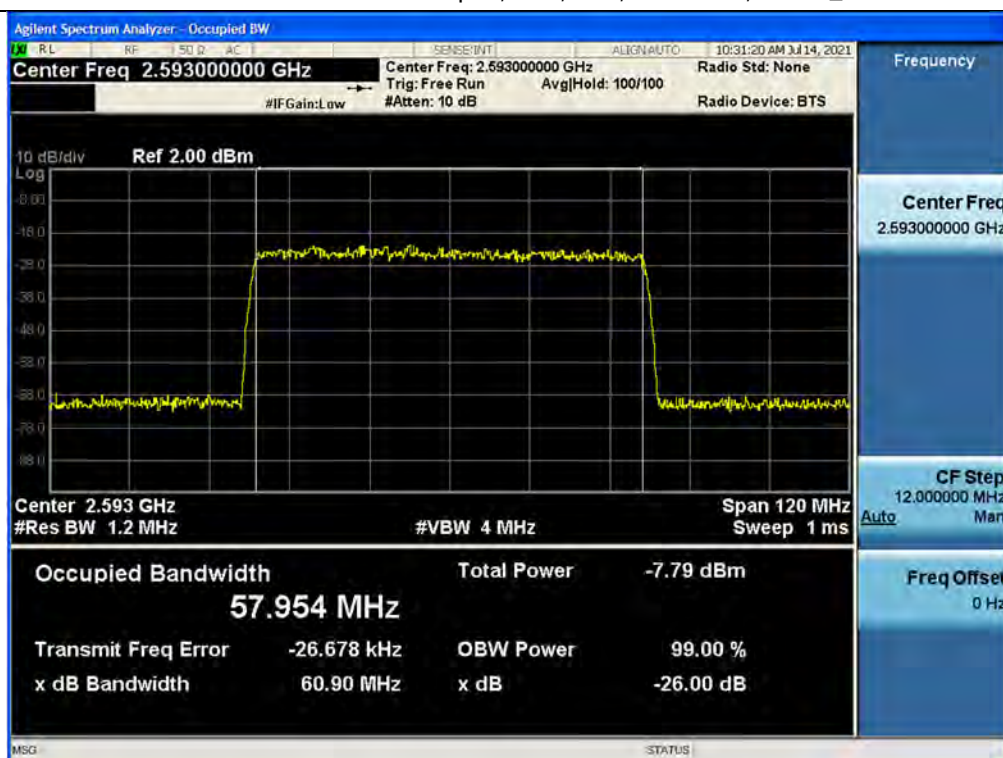

Output / BRS/EBS / Downlink / 5G NR_80 MHz

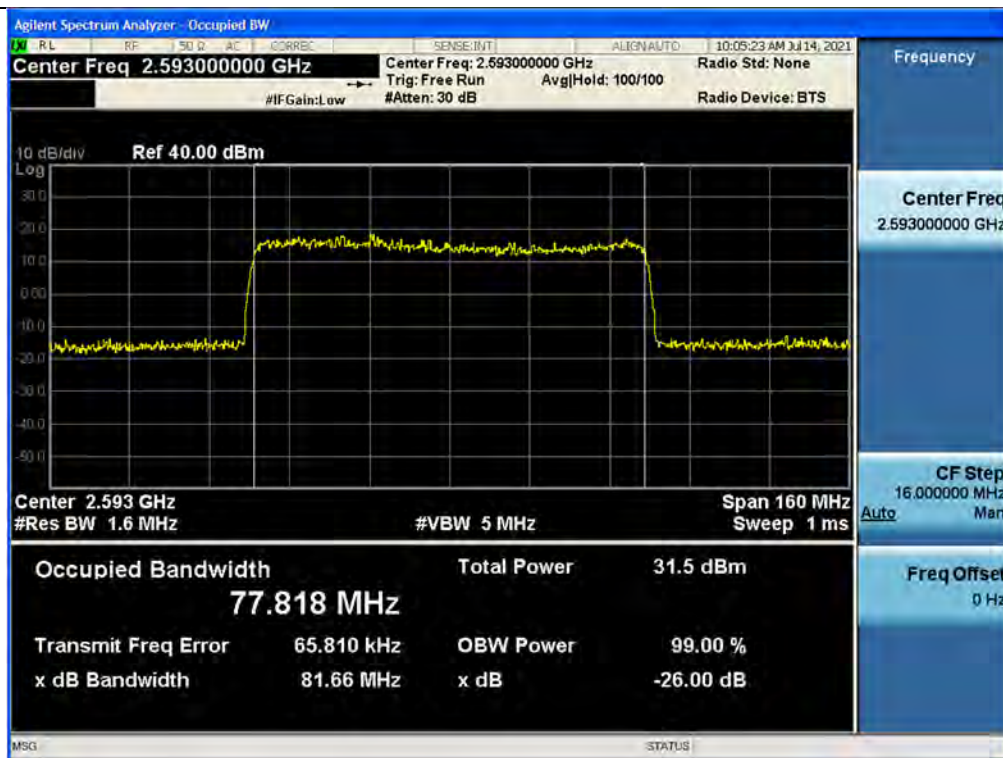


Input / BRS/EBS / Downlink / 5G NR_80 MHz

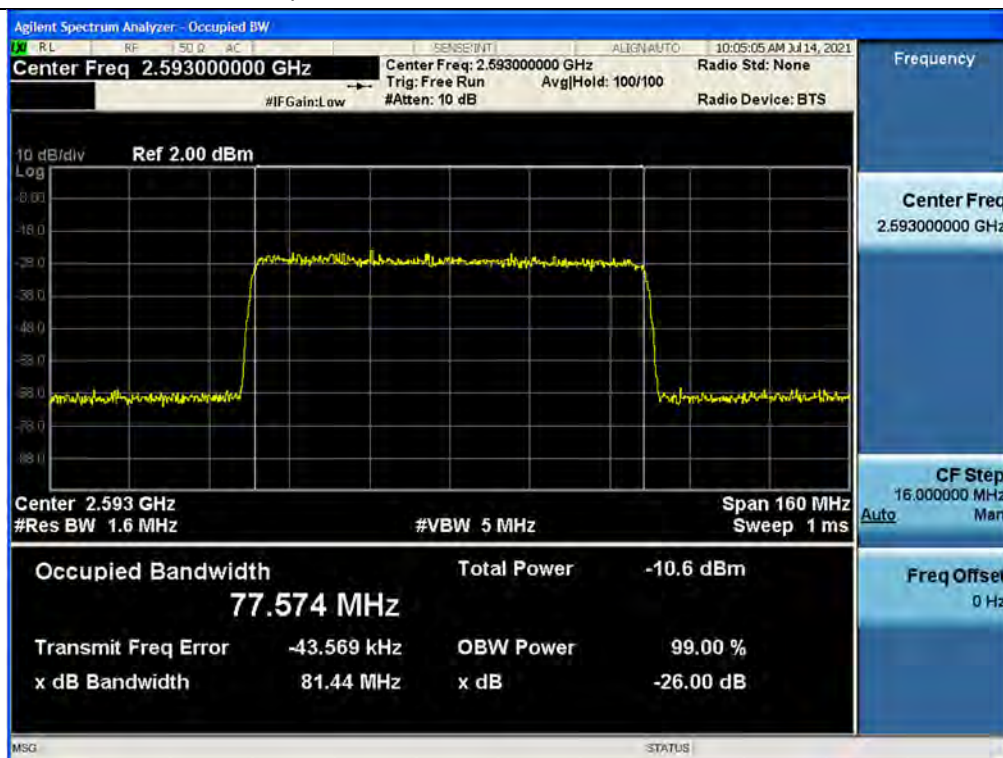

3 dB above the AGC threshold output / BRS/EBS / Downlink / 5G NR_80 MHz



3 dB above the AGC threshold Input / BRS/EBS / Downlink / 5G NR_80 MHz

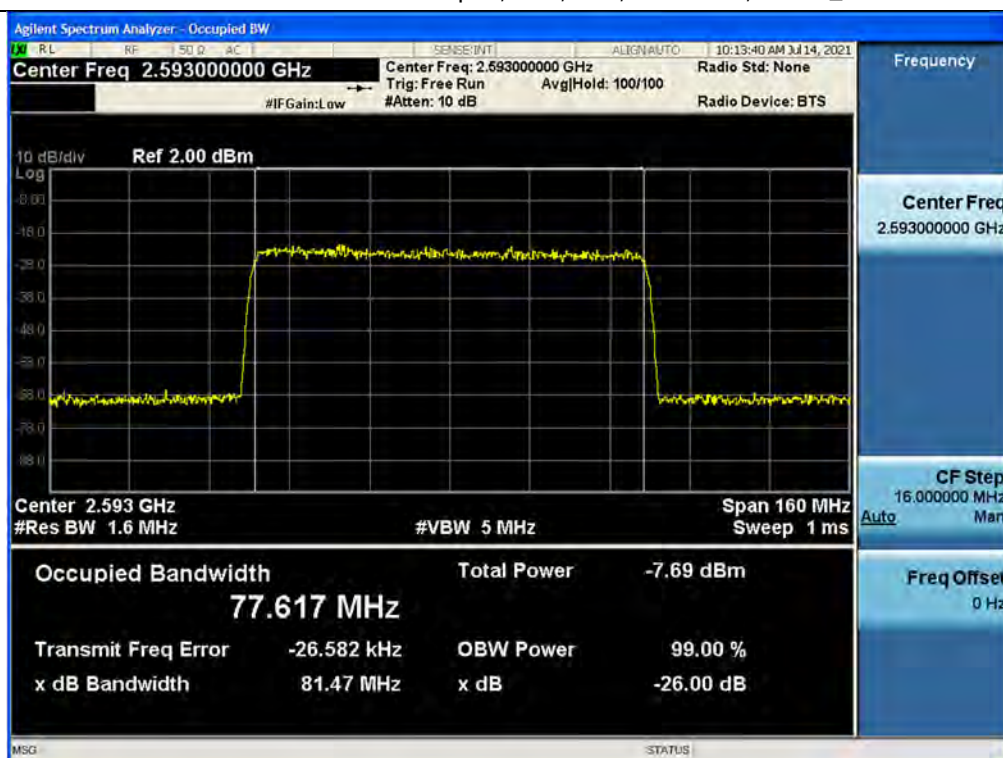


Output / BRS/EBS / Downlink / 5G NR_100 MHz




Input / BRS/EBS / Downlink / 5G NR_100 MHz



3 dB above the AGC threshold output / BRS/EBS / Downlink / 5G NR_100 MHz

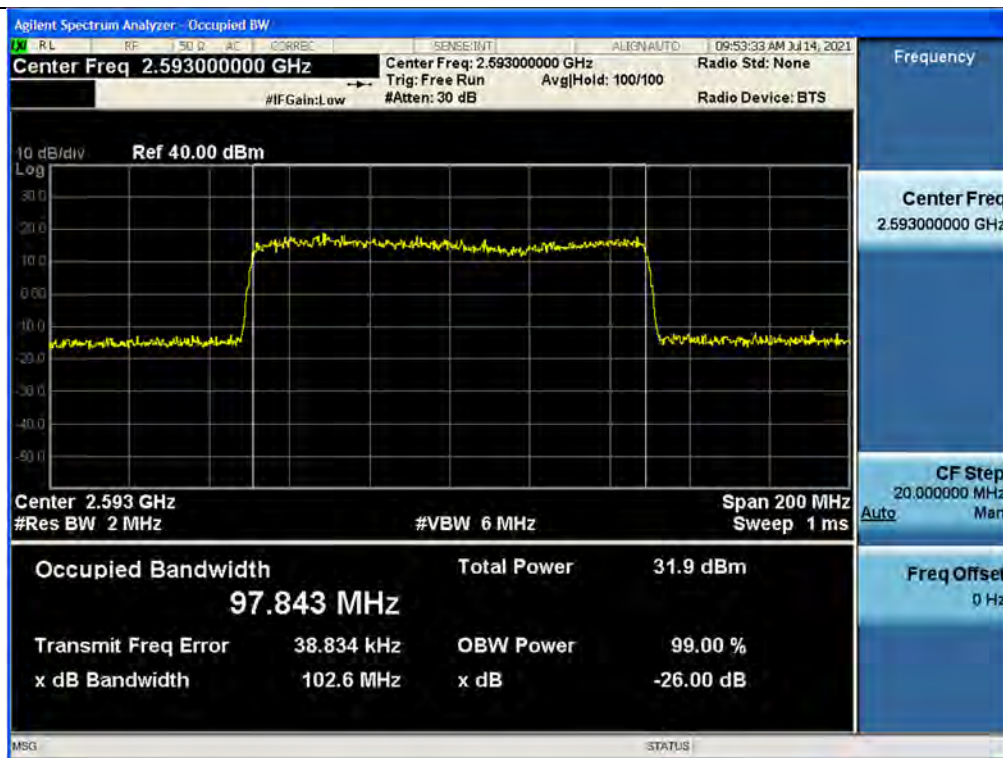

3 dB above the AGC threshold Input / BRS/EBS / Downlink / 5G NR_100 MHz

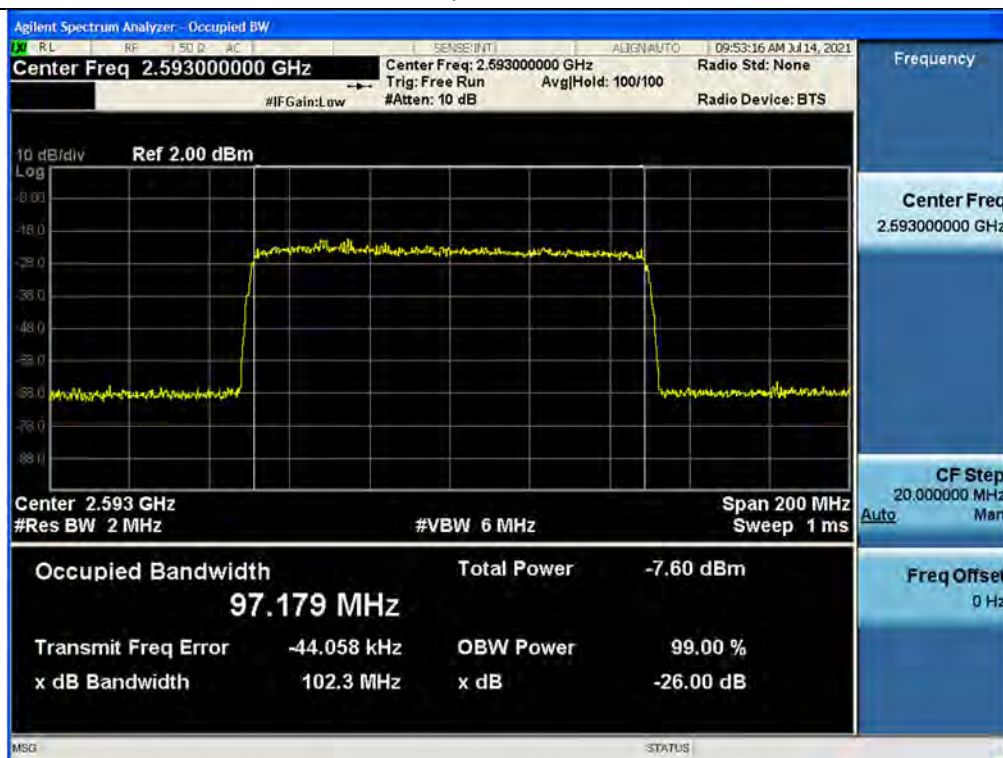

5.4. INPUT/OUTPUT POWER AND AMPLIFIER/BOOSTER GAIN

Test Requirement:

§ 2.1046 Measurements required: RF power output.

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.
- (b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.
- (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

§ 24.232 Power and antenna height limits.

- (a) (1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; *see* Tables 1 and 2 of this section.
- (4) The service area boundary limit and microwave protection criteria specified in § § 24.236 and 24.237 apply.

Table 1—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth of 1 MHz or Less

HAAT in meters	Maximum EIRP watts
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

Table 2—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth Greater Than 1 MHz

HAAT in meters	Maximum EIRP watts/MHz
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

- (b) (1) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth of 1 MHz or less are limited to 3280 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.
- (2) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth greater than 1 MHz are limited to 3280 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.
- (3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; *see* Tables 3 and 4 of this section.
- (4) The service area boundary limit and microwave protection criteria specified in § 24.236 and 24.237 apply.
- (5) Operation under this paragraph (b) at power limits greater than permitted under paragraph (a) of this section must be coordinated in advance with all broadband PCS licensees authorized to operate on adjacent frequency blocks within 120 kilometers (75 miles) of the base station and is limited to base stations located more than 120 kilometers (75 miles) from the Canadian border and more than 75 kilometers (45 miles) from the Mexican border.

Table 3—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth of 1 MHz or Less

HAAT in meters	Maximum EIRP watts
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320

Table 4—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth Greater Than 1 MHz

HAAT in meters	Maximum EIRP watts/MHz
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320

- (c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.
- (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
- (e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

§ 27.50 Power limits and duty cycle.

- (b) The following power and antenna height limits apply to transmitters operating in the 746-758 MHz, 775-788 MHz and 805-806 MHz bands:
- (1) Fixed and base stations transmitting a signal in the 757-758 and 775-776 MHz bands must not exceed an effective radiated power (ERP) of 1000 watts and an antenna height of 305 m height above average terrain (HAAT), except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section.
 - (4) Fixed and base stations transmitting a signal in the 746-757 MHz and 776-787 MHz bands with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section.
 - (5) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal in the 746-757 MHz and 776-787 MHz bands with an emission bandwidth greater than 1 MHz must not exceed an ERP of 2000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts/MHz ERP in accordance with Table 4 of this section.
- (c) The following power and antenna height requirements apply to stations transmitting in the 600 MHz band and the 698-746 MHz band:
- (3) Fixed and base stations transmitting a signal with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section;
 - (4) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal with an emission bandwidth greater than 1 MHz must not exceed an ERP of 2000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts/MHz ERP in accordance with Table 4 of this section;
 - (5) Licensees, except for licensees operating in the 600 MHz downlink band, seeking to operate a fixed or base station located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal at an ERP greater than 1000 watts must:
 - (i) Coordinate in advance with all licensees authorized to operate in the 698-758 MHz, 775-788, and 805-806 MHz bands within 120 kilometers (75 miles) of the base or fixed station;
 - (ii) coordinate in advance with all regional planning committees, as identified in § 90.527 of this chapter, with jurisdiction within 120 kilometers (75 miles) of the base or fixed station.

- (d) The following power and antenna height requirements apply to stations transmitting in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz and 2180-2200 MHz bands:
- (1) The power of each fixed or base station transmitting in the 1995-2000 MHz, 2110-2155 MHz, 2155-2180 MHz or 2180-2200 MHz band and located in any county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, is limited to:
 - (i) An equivalent isotropically radiated power (EIRP) of 3280 watts when transmitting with an emission bandwidth of 1 MHz or less;
 - (ii) An EIRP of 3280 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.
 - (2) The power of each fixed or base station transmitting in the 1995-2000 MHz, the 2110-2155 MHz 2155-2180 MHz band, or 2180-2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:
 - (i) An equivalent isotropically radiated power (EIRP) of 1640 watts when transmitting with an emission bandwidth of 1 MHz or less;
 - (ii) An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.
 - (3) A licensee operating a base or fixed station in the 2110-2155 MHz band utilizing a power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must coordinate such operations in advance with all Government and non-Government satellite entities in the 2025-2110 MHz band. A licensee operating a base or fixed station in the 2110-2180 MHz band utilizing power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must be coordinated in advance with the following licensees authorized to operate within 120 kilometers (75 miles) of the base or fixed station operating in this band: All Broadband Radio Service (BRS) licensees authorized under this part in the 2155-2160 MHz band and all advanced wireless services (AWS) licensees authorized to operate on adjacent frequency blocks in the 2110-2180 MHz band.
 - (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.
 - (5) Equipment employed must be authorized in accordance with the provisions of § 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
 - (6) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.
 - (7) Fixed, mobile, and portable (hand-held) stations operating in the 2000-2020 MHz band are limited to 2 watts EIRP, except that the total power of any portion of an emission that falls within the 2000-2005 MHz

band may not exceed 5 milliwatts. A licensee of AWS-4 authority may enter into private operator-to-operator agreements with all 1995-2000 MHz licensees to operate in 2000-2005 MHz at power levels above 5 milliwatts EIRP; except the total power of the AWS-4 mobile emissions may not exceed 2 watts EIRP.

- (8) A licensee operating a base or fixed station in the 2180-2200 MHz band utilizing a power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must be coordinated in advance with all AWS licensees authorized to operate on adjacent frequency blocks in the 2180-2200 MHz band.
 - (9) Fixed, mobile and portable (hand-held) stations operating in the 1915-1920 MHz band are limited to 300 milliwatts EIRP.
 - (10) A licensee operating a base or fixed station in the 1995-2000 MHz band utilizing a power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must be coordinated in advance with all PCS G Block licensees authorized to operate on adjacent frequency blocks in the 1990-1995 MHz band within 120 kilometers of the base or fixed station operating in this band.
- (h) The following power limits shall apply in the BRS and EBS:
- (1) Main, booster and base stations.
 - (i) The maximum EIRP of a main, booster or base station shall not exceed $33 \text{ dBW} + 10\log(X/Y) \text{ dBW}$, where X is the actual channel width in MHz and Y is either 6 MHz if prior to transition or the station is in the MBS following transition or 5.5 MHz if the station is in the LBS and UBS following transition, except as provided in paragraph (h)(1)(ii) of this section.
 - (ii) If a main or booster station sectorizes or otherwise uses one or more transmitting antennas with a non-omnidirectional horizontal plane radiation pattern, the maximum EIRP in dBW in a given direction shall be determined by the following formula: $\text{EIRP} = 33 \text{ dBW} + 10 \log(X/Y) \text{ dBW} + 10 \log(360/\text{beamwidth}) \text{ dBW}$, where X is the actual channel width in MHz, Y is either (i) 6 MHz if prior to transition or the station is in the MBS following transition or (ii) 5.5 MHz if the station is in the LBS and UBS following transition, and beamwidth is the total horizontal plane beamwidth of the individual transmitting antenna for the station or any sector measured at the half-power points.

§ 90.219 Use of signal boosters.

- (e) Device Specifications. In addition to the general rules for equipment certification in § 90.203(a)(2) and part 2, subpart J of this chapter, a signal booster must also meet the rules in this paragraph.
- (1) The output power capability of a signal booster must be designed for deployments providing a radiated power not exceeding 5 Watts ERP for each retransmitted channel.

§ 90.542 Broadband transmitting power limits.

- (f) The following power limits apply to the 758-768/788-798 MHz band:
- (1) Fixed and base stations transmitting a signal in the 758-768 MHz band with an emission bandwidth of 1 MHz or less must not exceed an ERP of 1000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section.
 - (2) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal in the 758-768 MHz band with an emission bandwidth of 1 MHz or less must not exceed an ERP of 2000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts ERP in accordance with Table 2 of this section.
 - (3) Fixed and base stations transmitting a signal in the 758-768 MHz band with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section.
 - (4) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal in the 758-768 MHz band with an emission bandwidth greater than 1 MHz must not exceed an ERP of 2000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts/MHz ERP in accordance with Table 4 of this section.
 - (5) Licensees of fixed or base stations transmitting a signal in the 758-768 MHz band at an ERP greater than 1000 watts must comply with the provisions set forth in paragraph (b) of this section.
 - (6) Control stations and mobile stations transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 30 watts ERP.
 - (7) Portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.
 - (8) For transmissions in the 758-768 MHz and 788-798 MHz bands, licensees may employ equipment operating in compliance with either of the following measurement techniques:
 - (i) The maximum composite transmit power shall be measured over any interval of continuous transmission using instrumentation calibrated in terms of RMS-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, etc., so as to

obtain a true maximum composite measurement for the emission in question over the full bandwidth of the channel.

- (ii) A Commission-approved average power technique.

Table 1 to § 90.542(a)—Permissible Power and Antenna Heights for Base and Fixed Stations in the 758-768 MHz Band Transmitting a Signal With an Emission Bandwidth of 1 MHz or Less

Antenna height (AAT) in meters (feet)	Effective radiated power (ERP) (watts)
Above 1372 (4500)	65
Above 1220 (4000) To 1372 (4500)	70
Above 1067 (3500) To 1220 (4000)	75
Above 915 (3000) To 1067 (3500)	100
Above 763 (2500) To 915 (3000)	140
Above 610 (2000) To 763 (2500)	200
Above 458 (1500) To 610 (2000)	350
Above 305 (1000) To 458 (1500)	600
Up to 305 (1000)	1000

Table 2 to § 90.542(a)—Permissible Power and Antenna Heights for Base and Fixed Stations in the 758-768 MHz Band Transmitting a Signal With an Emission Bandwidth of 1 MHz or Less

Antenna height (AAT) in meters (feet)	Effective radiated power (ERP) (watts)
Above 1372 (4500)	130
Above 1220 (4000) To 1372 (4500)	140
Above 1067 (3500) To 1220 (4000)	150
Above 915 (3000) To 1067 (3500)	200
Above 763 (2500) To 915 (3000)	280
Above 610 (2000) To 763 (2500)	400
Above 458 (1500) To 610 (2000)	700
Above 305 (1000) To 458 (1500)	1200
Up to 305 (1000)	2000

Table 3 to § 90.542(a)—Permissible Power and Antenna Heights for Base and Fixed Stations in the 758-768 MHz Band Transmitting a Signal With an Emission Bandwidth Greater Than 1 MHz

Antenna height (AAT) in meters (feet)	Effective radiated power (ERP) per MHz (watts/MHz)
Above 1372 (4500)	65
Above 1220 (4000) To 1372 (4500)	70
Above 1067 (3500) To 1220 (4000)	75
Above 915 (3000) To 1067 (3500)	100

Above 763 (2500) To 915 (3000)	140
Above 610 (2000) To 763 (2500)	200
Above 458 (1500) To 610 (2000)	350
Above 305 (1000) To 458 (1500)	600
Up to 305 (1000)	1000

Table 4 to § 90.542(a)—Permissible Power and Antenna Heights for Base and Fixed Stations in the 758-768 MHz Band Transmitting a Signal With an Emission Bandwidth Greater Than 1 MHz

Antenna height (AAT) in meters (feet)	Effective radiated power (ERP) per MHz (watts/MHz)
Above 1372 (4500)	130
Above 1220 (4000) To 1372 (4500)	140
Above 1067 (3500) To 1220 (4000)	150
Above 915 (3000) To 1067 (3500)	200
Above 763 (2500) To 915 (3000)	280
Above 610 (2000) To 763 (2500)	400
Above 458 (1500) To 610 (2000)	700
Above 305 (1000) To 458 (1500)	1200
Up to 305 (1000)	2000

- (g) For base and fixed stations operating in the 758-768 MHz band in accordance with the provisions of paragraph (a)(5) of this section, the power flux density that would be produced by such stations through a combination of antenna height and vertical gain pattern must not exceed 3000 microwatts per square meter on the ground over the area extending to 1 km from the base of the antenna mounting structure.

Test Procedures:

Measurements were in accordance with the test methods section 3.5 of KDB 935210 D05 v01r03.

Adjust the internal gain control of the EUT to the maximum gain for which the equipment certification is being sought. Any EUT attenuation settings shall be set to their minimum value.

Input power levels (uplink and downlink) should be set to maximum input ratings while confirming that the device is not capable of operating in saturation (non-linear mode) at the rated input levels, including during the performance of the input/output power measurements.

3.5.2 Measuring the EUT mean input and output power

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the test signal.
- c) The frequency of the signal generator shall be set to the frequency f_0 as determined from out-of-band rejection test.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold, but not more than 0.5 dB below.
- f) Measure and record the output power of the EUT; use ANSI C63.26-2015 subclause 5.2.4.4.1, for power measurement.
- g) Remove the EUT from the measurement setup. Using the same signal generator settings, repeat the power measurement at the signal generator port, which was used as the input signal to the EUT, and record as the input power. EUT gain may be calculated as described in 3.5.5.
- h) Repeat steps f) and g) with input signal amplitude set to 3 dB above the AGC threshold level.
- i) Repeat steps e) to h) with the narrowband test signal.
- j) Repeat steps e) to i) for all frequency bands authorized for use by the EUT.

3.5.5 Calculating amplifier, repeater, or industrial booster gain

After the input and output power levels have been measured as described in the preceding subclauses, the gain of the EUT can be determined from:

$$\text{Gain (dB)} = \text{output power (dBm)} - \text{input power (dBm)}.$$

Report the gain for each authorized operating frequency band, and each test signal stimulus.

Note. If f_0 that determined from out-of-band test is smaller or greater than difference of test signal's center frequency and operation band block, test is performed at the lowest or the highest frequency that test signals can be passed.

Test Results:

Tabular data of Input / Output Power and Gain [Internal Type]

Test Band	Signal	f ₀ Frequency	Input Power	Output Power	Gain	E.I.R.P.		
		(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(W/MHz)	(W)
Lower 700 MHz	LTE 5 MHz	732.20	-19.81	19.34	39.15	22.12	0.03	0.16
	LTE 10 MHz	733.00	-19.70	19.03	38.73	21.81	0.02	0.15
Upper 700 MHz	LTE 5 MHz	748.50	-19.75	19.09	38.84	21.87	0.03	0.15
	LTE 10 MHz	751.00	-19.74	19.02	38.76	21.80	0.02	0.15
FirstNet	LTE 5 MHz	765.36	-19.85	19.11	38.96	21.89	0.03	0.15
	LTE 10 MHz	763.00	-19.89	19.08	38.97	21.86	0.02	0.15
AWS	CDMA	2134.93	-20.01	23.31	43.32	26.61	0.37	0.46
	WCDMA	2134.93	-20.01	23.42	43.43	26.72	0.09	0.47
	LTE 5 MHz	2134.93	-19.91	23.39	43.30	26.69	0.09	0.47
	LTE 10 MHz	2134.93	-19.89	23.41	43.30	26.71	0.05	0.47
	LTE 20 MHz	2134.93	-19.94	23.40	43.34	26.70	0.02	0.47
Broadband PCS	GSM	1990.72	-20.13	24.38	44.51	28.07	3.21	0.64
	CDMA	1990.72	-20.02	24.30	44.32	27.99	0.50	0.63
	WCDMA	1990.72	-20.05	24.31	44.36	28.00	0.13	0.63
	LTE 5 MHz	1990.72	-19.96	24.34	44.30	28.03	0.13	0.64
	LTE 10 MHz	1990.00	-19.96	24.18	44.14	27.87	0.06	0.61
	LTE 20 MHz	1985.00	-19.97	23.70	43.67	27.39	0.03	0.55
BRS/EBS	LTE 20 MHz	2645.46	-19.65	24.29	43.94	30.96	0.06	1.25
	5G NR_20 MHz	2645.46	-19.66	24.24	43.90	30.91	0.06	1.23
	5G NR_40 MHz	2645.46	-19.82	24.18	44.00	30.85	0.03	1.22
	5G NR_60 MHz	2645.46	-19.77	23.64	43.41	30.31	0.02	1.07
	5G NR_80 MHz	2645.46	-19.74	23.12	42.86	29.79	0.01	0.95
	5G NR_100 MHz	2640.00	-19.73	23.31	43.04	29.98	0.01	1.00

*E.I.R.P.(dBm) = Output Power(dBm) + Ant. Gain

(*E.R.P(dBm) = E.I.R.P. - 2.15 dB)

Tabular data of Input / 3 dB above AGC threshold Output Power and Gain [Internal Type]

Test Band	Signal	f ₀ Frequency	Input Power	Output Power	Gain	E.I.R.P.		
		(MHz)	(dBm)		(dB)	(dBm)	(W/MHz)	(W)
Lower 700 MHz	LTE 5 MHz	732.20	-16.75	19.28	36.03	22.06	0.03	0.16
	LTE 10 MHz	733.00	-16.74	18.98	35.72	21.76	0.01	0.15
Upper 700 MHz	LTE 5 MHz	748.50	-16.76	19.06	35.82	21.84	0.03	0.15
	LTE 10 MHz	751.00	-16.75	19.01	35.76	21.79	0.02	0.15
FirstNet	LTE 5 MHz	765.36	-16.88	19.02	35.90	21.80	0.03	0.15
	LTE 10 MHz	763.00	-16.74	19.02	35.76	21.80	0.02	0.15
AWS	CDMA	2134.93	-17.03	23.26	40.29	26.56	0.36	0.45
	WCDMA	2134.93	-16.93	23.39	40.32	26.69	0.09	0.47
	LTE 5 MHz	2134.93	-16.94	23.37	40.31	26.67	0.09	0.46
	LTE 10 MHz	2134.93	-16.90	23.40	40.30	26.70	0.05	0.47
	LTE 20 MHz	2134.93	-16.91	23.40	40.31	26.70	0.02	0.47
Broadband PCS	GSM	1990.72	-17.17	24.39	41.56	28.08	3.21	0.64
	CDMA	1990.72	-17.05	24.15	41.20	27.84	0.49	0.61
	WCDMA	1990.72	-16.95	24.15	41.10	27.84	0.12	0.61
	LTE 5 MHz	1990.72	-16.94	24.17	41.11	27.86	0.12	0.61
	LTE 10 MHz	1990.00	-16.97	23.88	40.85	27.57	0.06	0.57
	LTE 20 MHz	1985.00	-16.93	23.80	40.73	27.49	0.03	0.56
BRS/EBS	LTE 20 MHz	2645.46	-16.64	24.16	40.80	30.83	0.06	1.21
	5G NR_20 MHz	2645.46	-16.65	24.03	40.68	30.70	0.06	1.17
	5G NR_40 MHz	2645.46	-16.83	23.99	40.82	30.66	0.03	1.16
	5G NR_60 MHz	2645.46	-16.76	23.55	40.31	30.22	0.02	1.05
	5G NR_80 MHz	2645.46	-16.73	23.10	39.83	29.77	0.01	0.95
	5G NR_100 MHz	2640.00	-16.76	23.00	39.76	29.67	0.01	0.93

*E.I.R.P.(dBm) = Output Power(dBm) + Ant. Gain

(*E.R.P(dBm) = E.I.R.P. - 2.15 dB)

Tabular data of Input / Output Power and Gain [External Type]

Test Band	Signal	f ₀ Frequency	Input Power	Output Power	Gain	E.I.R.P.		
		(MHz)	(dBm)		(dB)	(dBm)	(W/MHz)	(W)
Lower 700 MHz	LTE 5 MHz	732.20	-19.81	19.34	39.15	27.34	0.11	0.54
	LTE 10 MHz	733.00	-19.70	19.03	38.73	27.03	0.05	0.50
Upper 700 MHz	LTE 5 MHz	748.50	-19.75	19.09	38.84	27.09	0.10	0.51
	LTE 10 MHz	751.00	-19.74	19.02	38.76	27.02	0.05	0.50
FirstNet	LTE 5 MHz	765.36	-19.85	19.11	38.96	27.11	0.10	0.51
	LTE 10 MHz	763.00	-19.89	19.08	38.97	27.08	0.05	0.51
AWS	CDMA	2134.93	-20.01	23.31	43.32	31.31	1.08	1.35
	WCDMA	2134.93	-20.01	23.42	43.43	31.42	0.28	1.39
	LTE 5 MHz	2134.93	-19.91	23.39	43.30	31.39	0.28	1.38
	LTE 10 MHz	2134.93	-19.89	23.41	43.30	31.41	0.14	1.38
	LTE 20 MHz	2134.93	-19.94	23.40	43.34	31.40	0.07	1.38
Broadband PCS	GSM	1990.72	-20.13	24.38	44.51	32.38	8.65	1.73
	CDMA	1990.72	-20.02	24.30	44.32	32.30	1.36	1.70
	WCDMA	1990.72	-20.05	24.31	44.36	32.31	0.34	1.70
	LTE 5 MHz	1990.72	-19.96	24.34	44.30	32.34	0.34	1.71
	LTE 10 MHz	1990.00	-19.96	24.18	44.14	32.18	0.17	1.65
	LTE 20 MHz	1985.00	-19.97	23.70	43.67	31.70	0.07	1.48
BRS/EBS	LTE 20 MHz	2645.46	-19.65	24.29	43.94	32.29	0.08	1.69
	5G NR_20 MHz	2645.46	-19.66	24.24	43.90	32.24	0.08	1.67
	5G NR_40 MHz	2645.46	-19.82	24.18	44.00	32.18	0.04	1.65
	5G NR_60 MHz	2645.46	-19.77	23.64	43.41	31.64	0.02	1.46
	5G NR_80 MHz	2645.46	-19.74	23.12	42.86	31.12	0.02	1.29
	5G NR_100 MHz	2640.00	-19.73	23.31	43.04	31.31	0.01	1.35

*E.I.R.P.(dBm) = Output Power(dBm) + Ant. Gain

(*E.R.P(dBm) = E.I.R.P. - 2.15 dB)

Tabular data of Input / 3 dB above AGC threshold Output Power and Gain [External Type]

Test Band	Signal	f ₀ Frequency	Input Power	Output Power	Gain	E.I.R.P.		
		(MHz)	(dBm)		(dB)	(dBm)	(W/MHz)	(W)
Lower 700 MHz	LTE 5 MHz	732.20	-16.75	19.28	36.03	27.28	0.11	0.53
	LTE 10 MHz	733.00	-16.74	18.98	35.72	26.98	0.05	0.50
Upper 700 MHz	LTE 5 MHz	748.50	-16.76	19.06	35.82	27.06	0.10	0.51
	LTE 10 MHz	751.00	-16.75	19.01	35.76	27.01	0.05	0.50
FirstNet	LTE 5 MHz	765.36	-16.88	19.02	35.90	27.02	0.10	0.50
	LTE 10 MHz	763.00	-16.74	19.02	35.76	27.02	0.05	0.50
AWS	CDMA	2134.93	-17.03	23.26	40.29	31.26	1.07	1.34
	WCDMA	2134.93	-16.93	23.39	40.32	31.39	0.28	1.38
	LTE 5 MHz	2134.93	-16.94	23.37	40.31	31.37	0.27	1.37
	LTE 10 MHz	2134.93	-16.90	23.40	40.30	31.40	0.14	1.38
	LTE 20 MHz	2134.93	-16.91	23.40	40.31	31.40	0.07	1.38
Broadband PCS	GSM	1990.72	-17.17	24.39	41.56	32.39	8.67	1.73
	CDMA	1990.72	-17.05	24.15	41.20	32.15	1.31	1.64
	WCDMA	1990.72	-16.95	24.15	41.10	32.15	0.33	1.64
	LTE 5 MHz	1990.72	-16.94	24.17	41.11	32.17	0.33	1.65
	LTE 10 MHz	1990.00	-16.97	23.88	40.85	31.88	0.15	1.54
	LTE 20 MHz	1985.00	-16.93	23.80	40.73	31.80	0.08	1.51
BRS/EBS	LTE 20 MHz	2645.46	-16.64	24.16	40.80	32.16	0.08	1.64
	5G NR_20 MHz	2645.46	-16.65	24.03	40.68	32.03	0.08	1.60
	5G NR_40 MHz	2645.46	-16.83	23.99	40.82	31.99	0.04	1.58
	5G NR_60 MHz	2645.46	-16.76	23.55	40.31	31.55	0.02	1.43
	5G NR_80 MHz	2645.46	-16.73	23.10	39.83	31.10	0.02	1.29
	5G NR_100 MHz	2640.00	-16.76	23.00	39.76	31.00	0.01	1.26

*E.I.R.P.(dBm) = Output Power(dBm) + Ant. Gain


(*E.R.P(dBm) = E.I.R.P. - 2.15 dB)

Tabular data of PAPR


Test Band	Link	Signal	f ₀ Frequency (MHz)	0.1 % PAPR (dB)
Lower 700 MHz	Downlink	LTE 5 MHz	732.20	8.22
		LTE 10 MHz	733.00	8.21
Upper 700 MHz		LTE 5 MHz	748.50	8.28
		LTE 10 MHz	751.00	8.26
FirstNet		LTE 5 MHz	765.36	7.75
		LTE 10 MHz	763.00	7.98
AWS		CDMA	2134.93	7.59
		WCDMA	2134.93	4.40
		LTE 5 MHz	2134.93	8.03
		LTE 10 MHz	2134.93	8.06
		LTE 20 MHz	2134.93	8.18
Broadband PCS		GSM	1990.72	1.08
		CDMA	1990.72	7.17
		WCDMA	1990.72	4.34
		LTE 5 MHz	1990.72	7.35
		LTE 10 MHz	1990.00	7.46
		LTE 20 MHz	1985.00	7.77
BRS/EBS		LTE 20 MHz	2645.46	8.14
		5G NR_20 MHz	2645.46	8.26
		5G NR_40 MHz	2645.46	7.94
		5G NR_60 MHz	2645.46	8.10
		5G NR_80 MHz	2645.46	8.07
		5G NR_100 MHz	2640.00	8.18

Plot data of PAPR

PAPR / Lower 700 MHz / Downlink / LTE 5 MHz

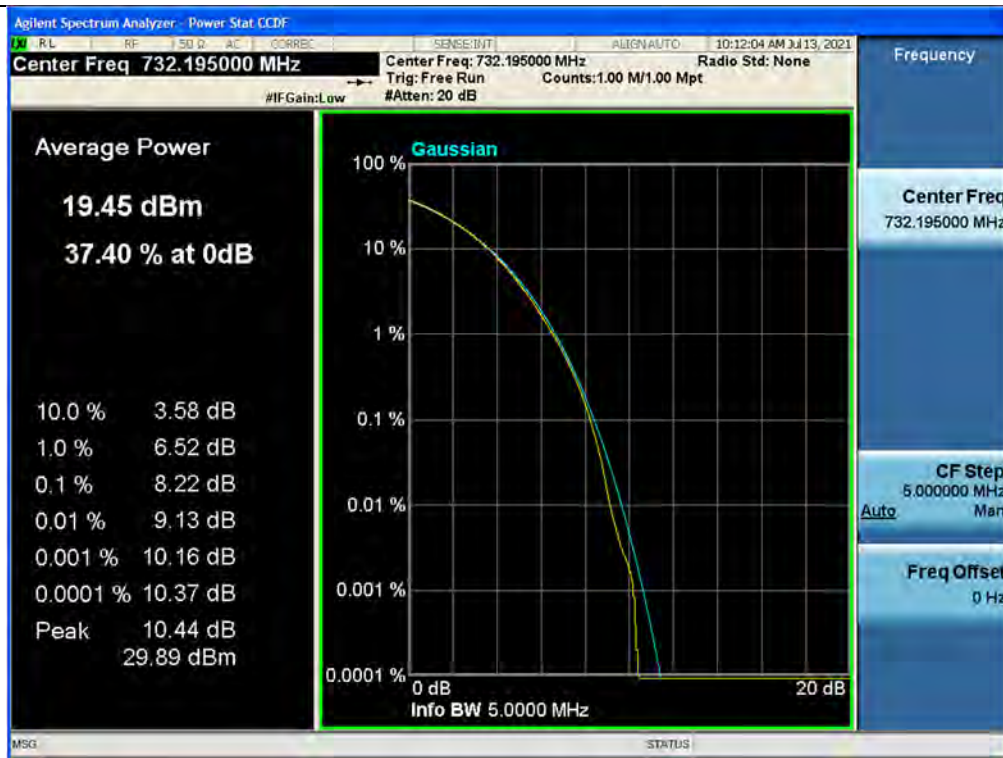

PAPR / Lower 700 MHz / Downlink / LTE 10 MHz

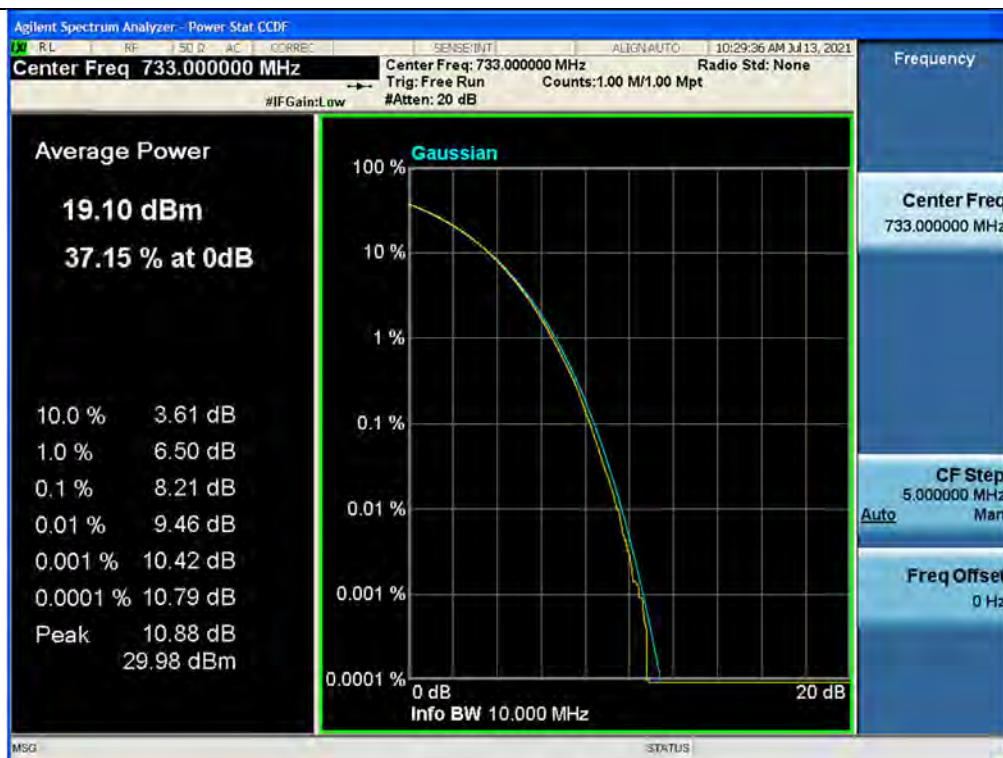


PAPR / Upper 700 MHz / Downlink / LTE 5 MHz



PAPR / Upper 700 MHz / Downlink / LTE 10 MHz




PAPR / FirstNet / Downlink / LTE 5 MHz

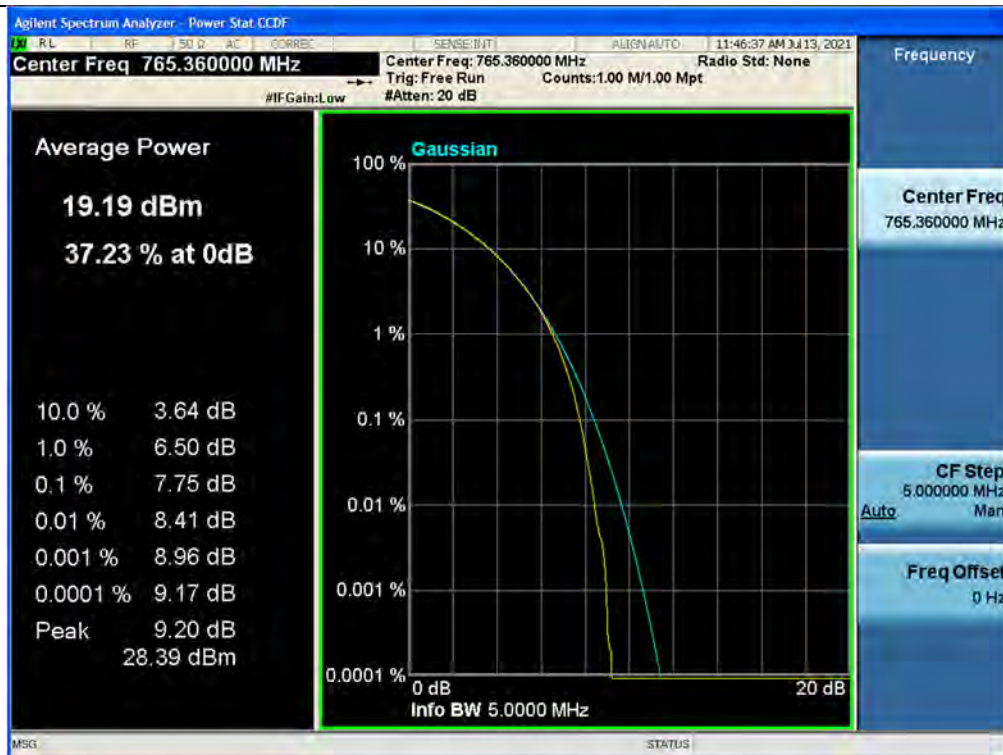


PAPR / FirstNet / Downlink / LTE 10 MHz




PAPR / AWS / Downlink / CDMA

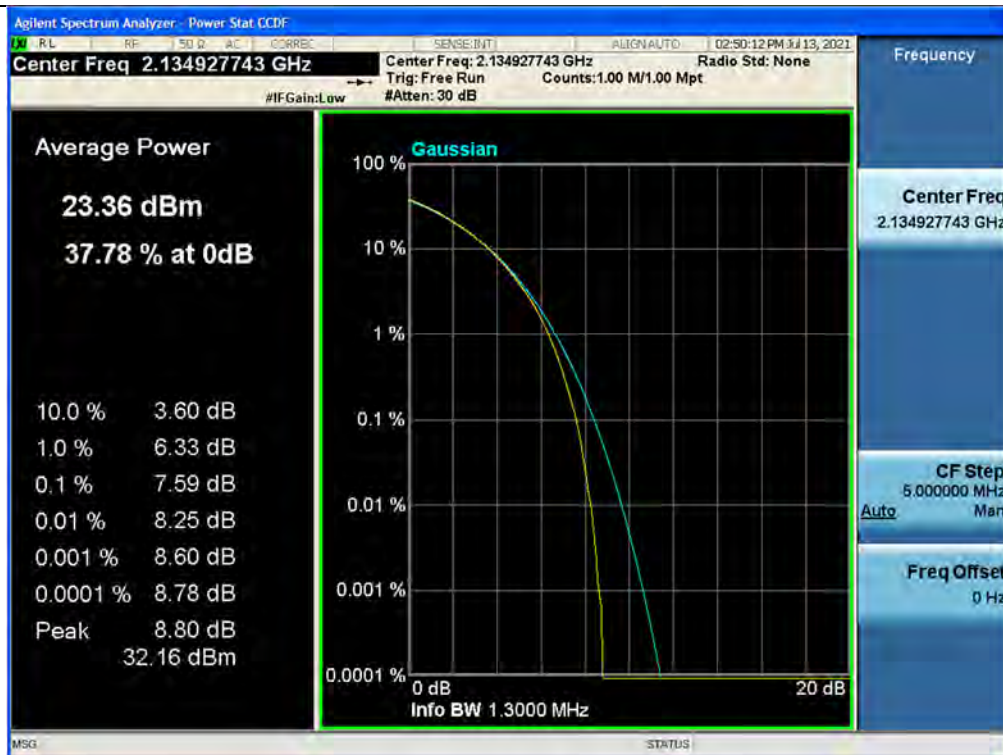


PAPR / AWS / Downlink / WCDMA

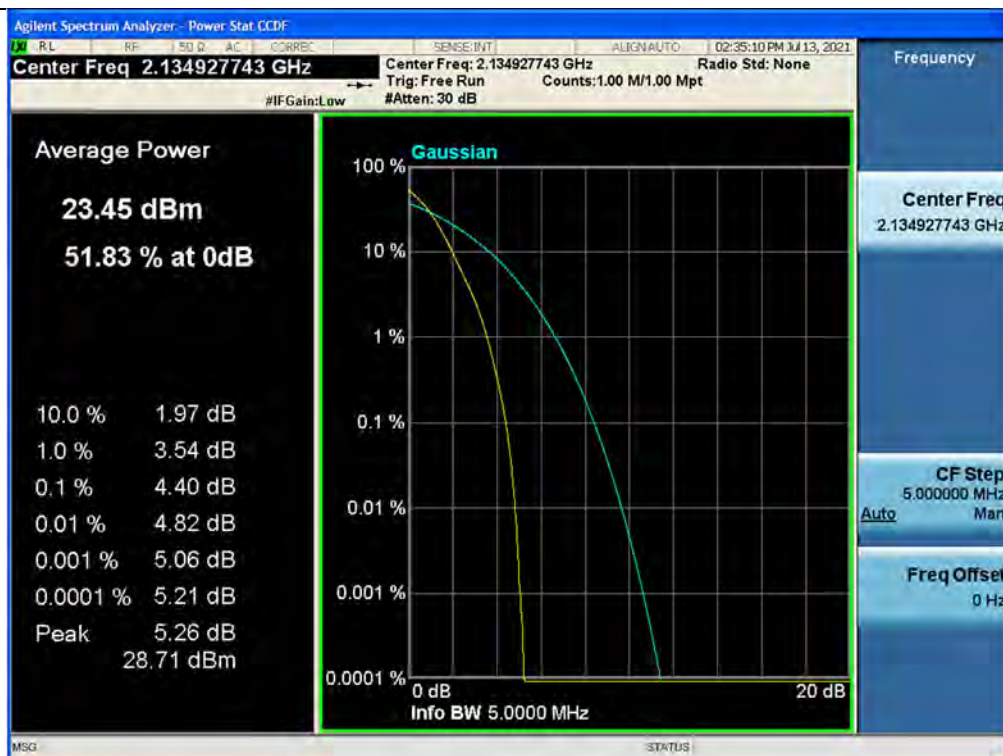


PAPR / AWS / Downlink / LTE 5 MHz

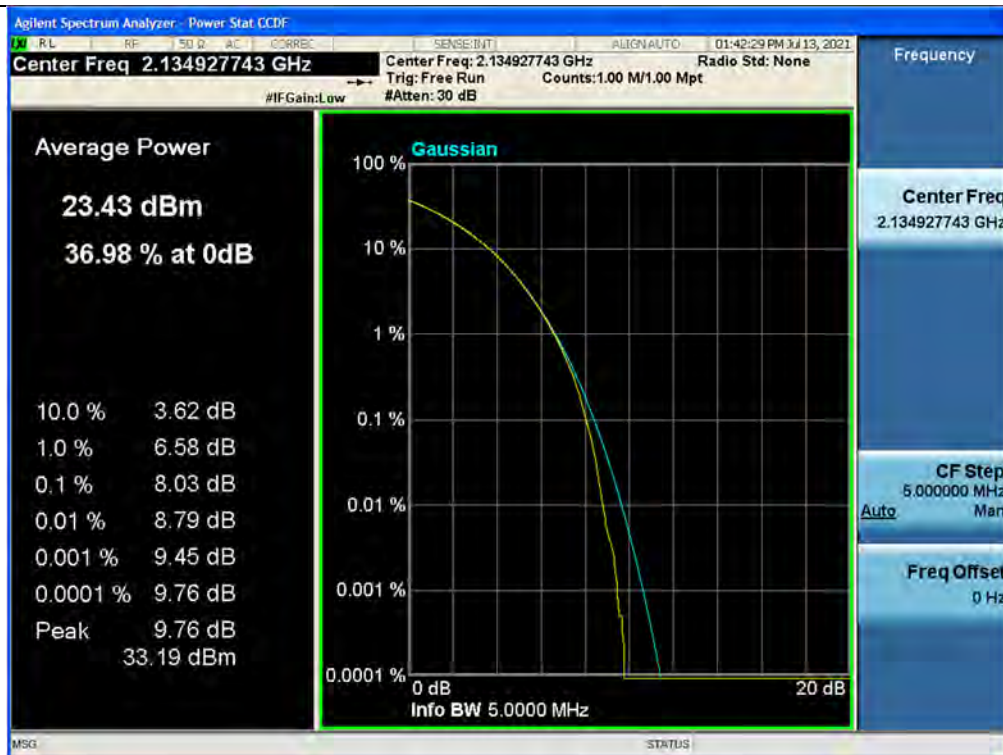


PAPR / AWS / Downlink / LTE 10 MHz

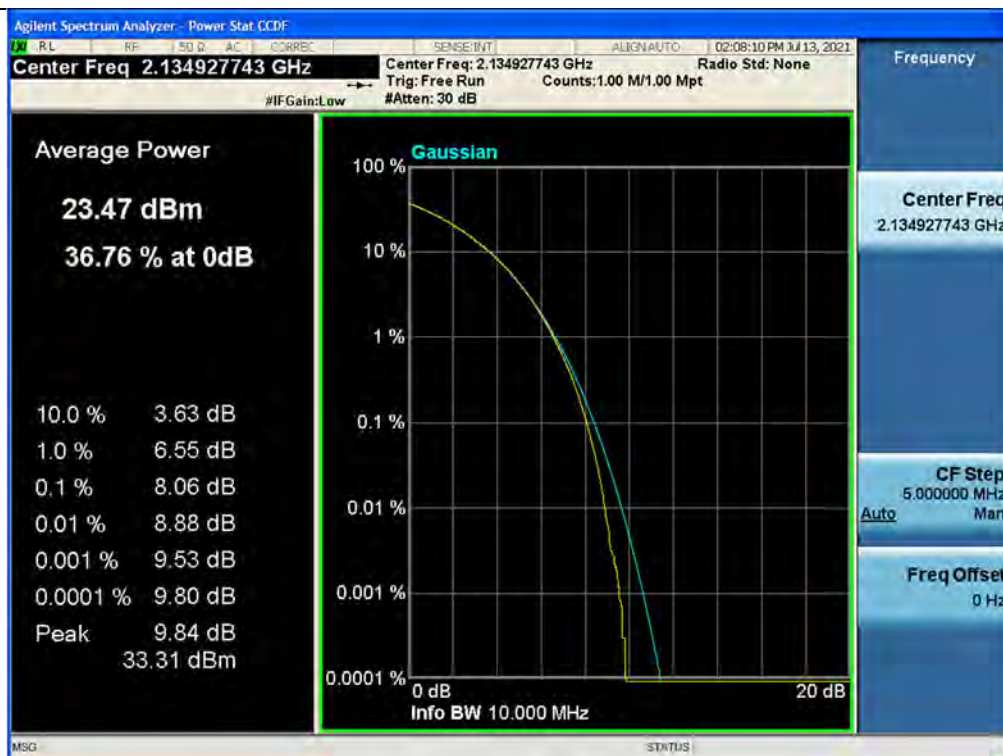

PAPR / AWS / Downlink / LTE 20 MHz

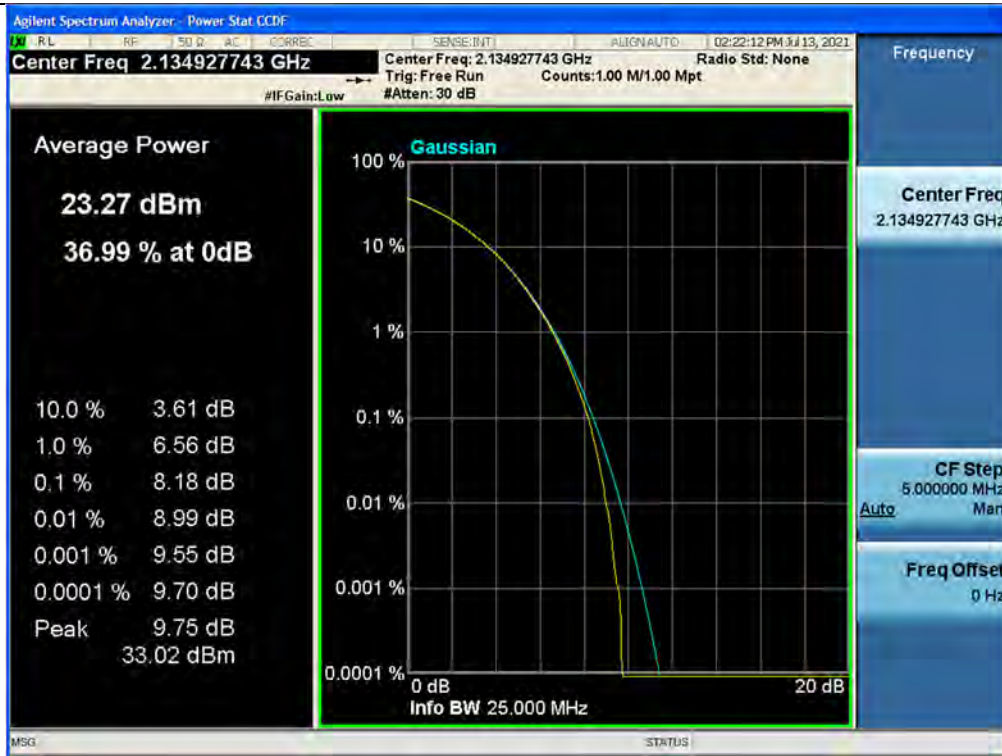


PAPR / Broadband PCS / Downlink / GSM

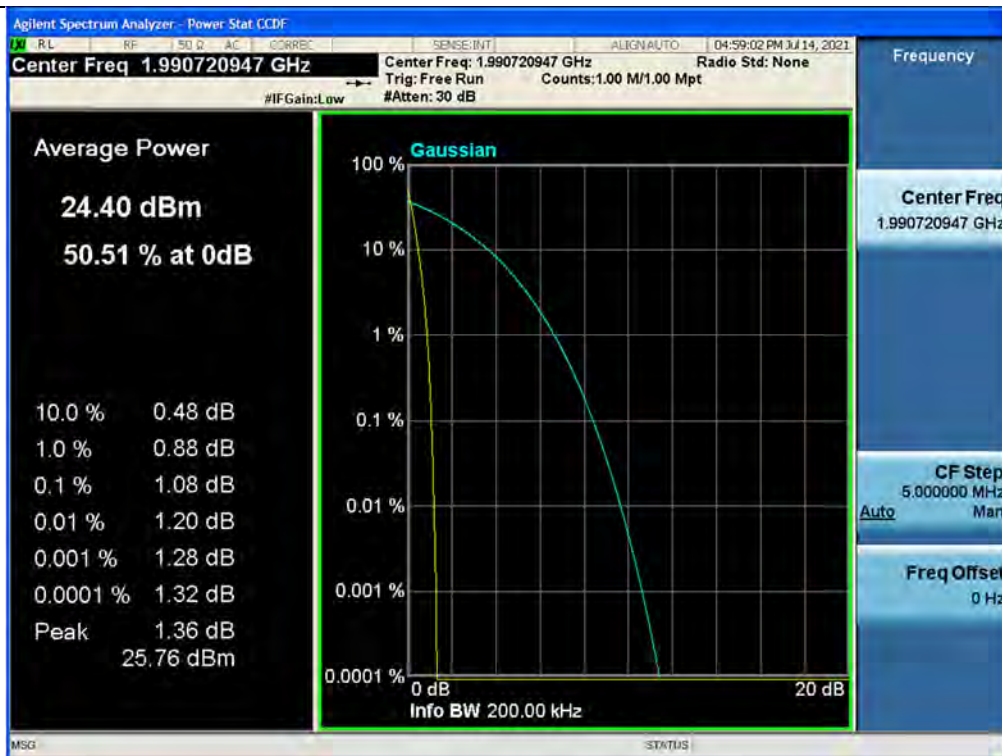


PAPR / Broadband PCS / Downlink / CDMA



PAPR / Broadband PCS / Downlink / WCDMA

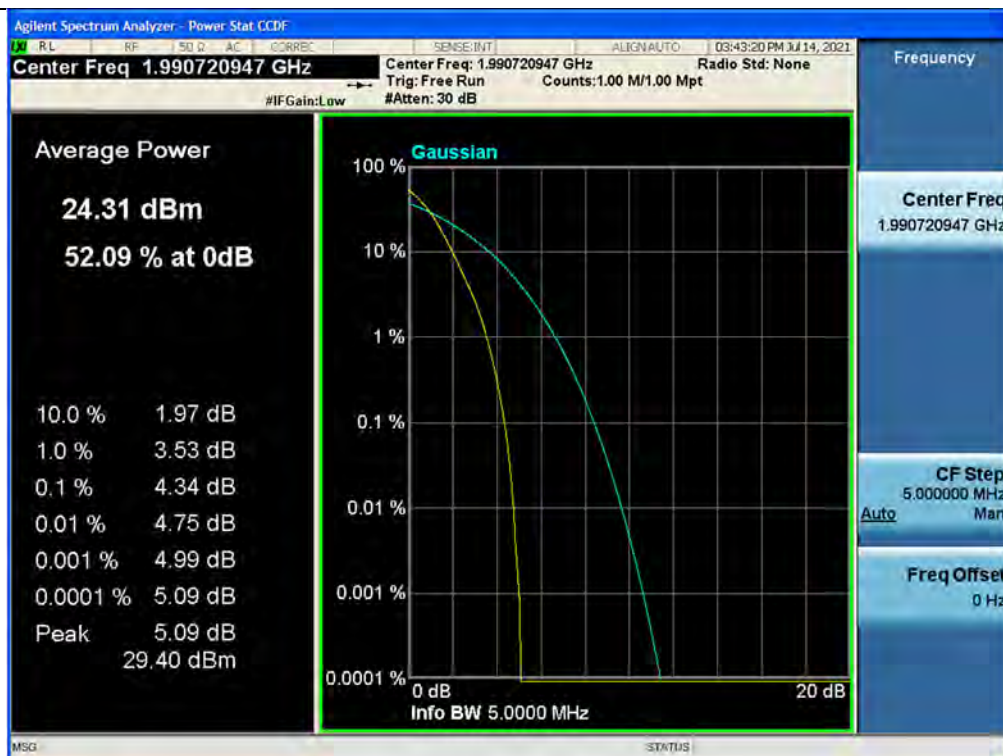

PAPR / Broadband PCS / Downlink / LTE 5 MHz

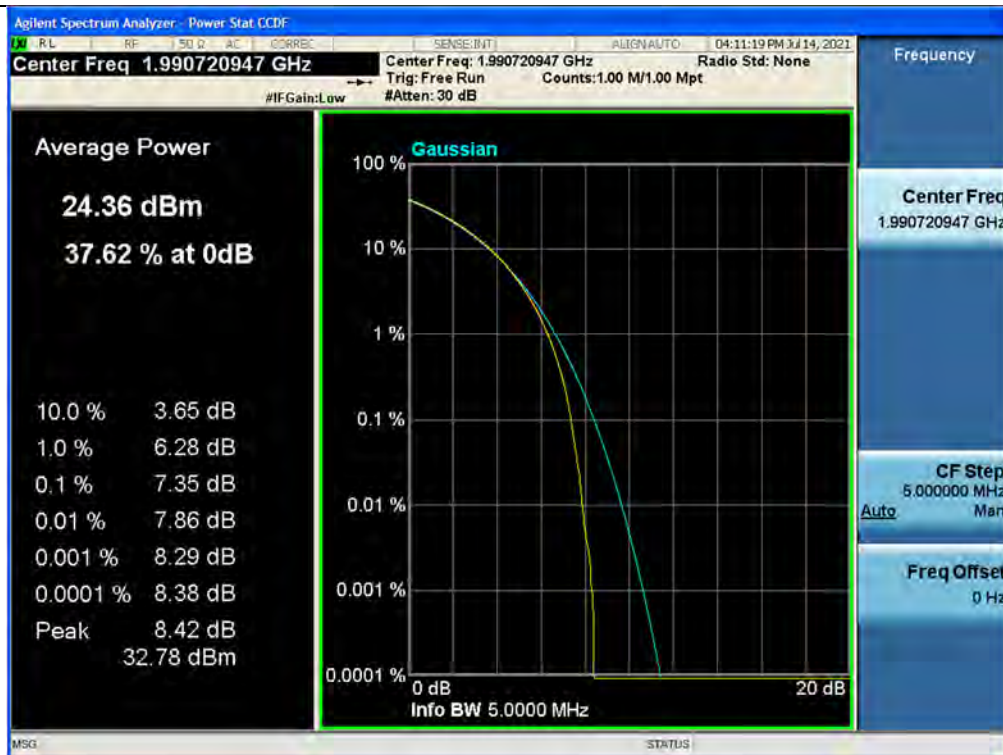

PAPR / Broadband PCS / Downlink / LTE 10 MHz




PAPR / Broadband PCS / Downlink / LTE 20 MHz




PAPR / BRS/EBS / Downlink / LTE 20 MHz




PAPR / BRS/EBS / Downlink / 5G NR 20 MHz

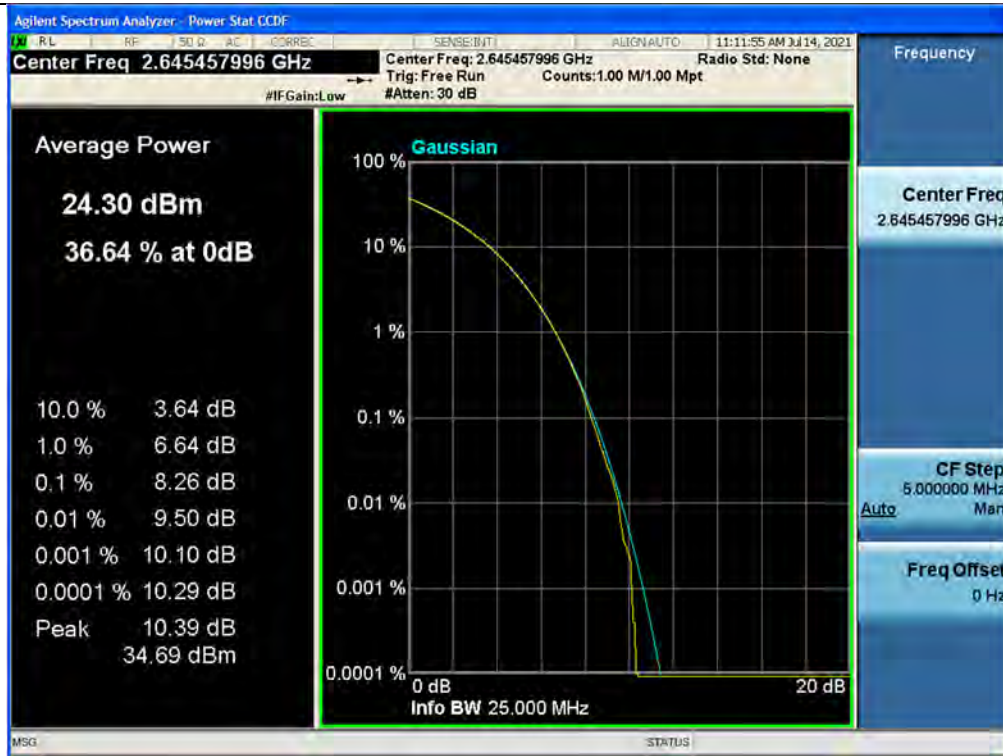


PAPR / BRS/EBS / Downlink / 5G NR 40 MHz

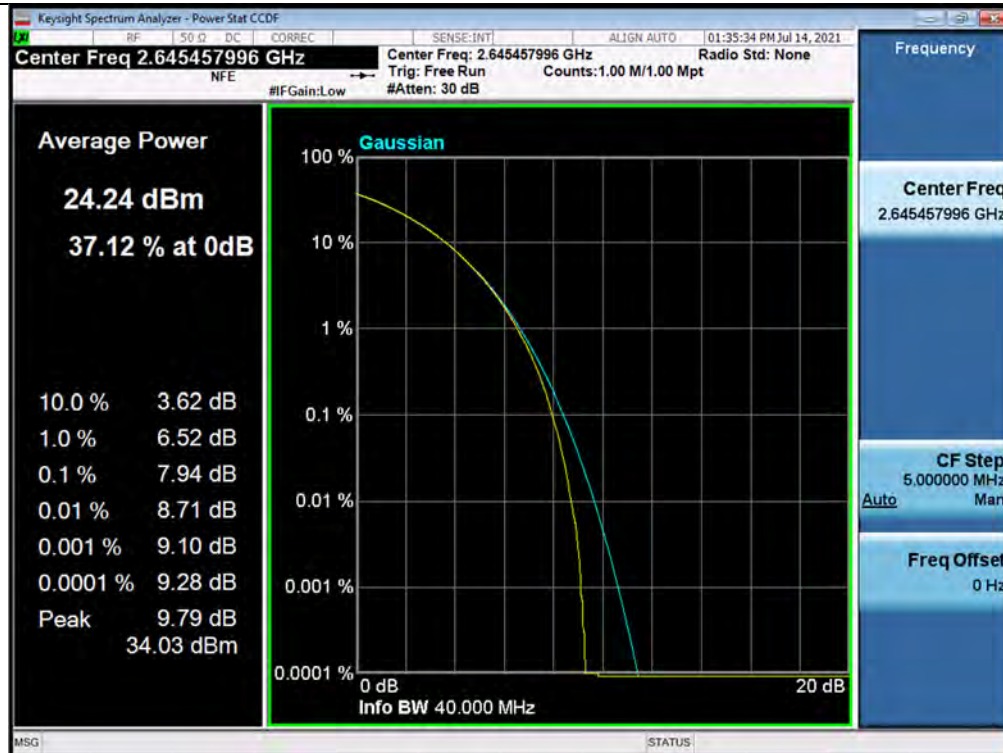


PAPR / BRS/EBS / Downlink / 5G NR 60 MHz

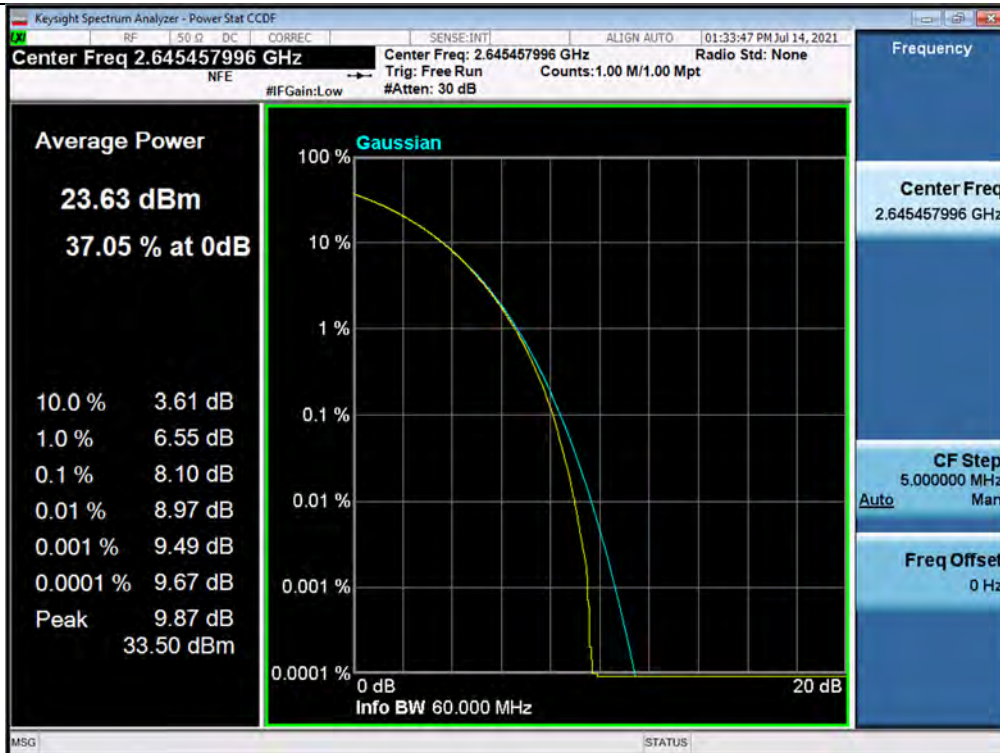

PAPR / BRS/EBS / Downlink / 5G NR 80 MHz

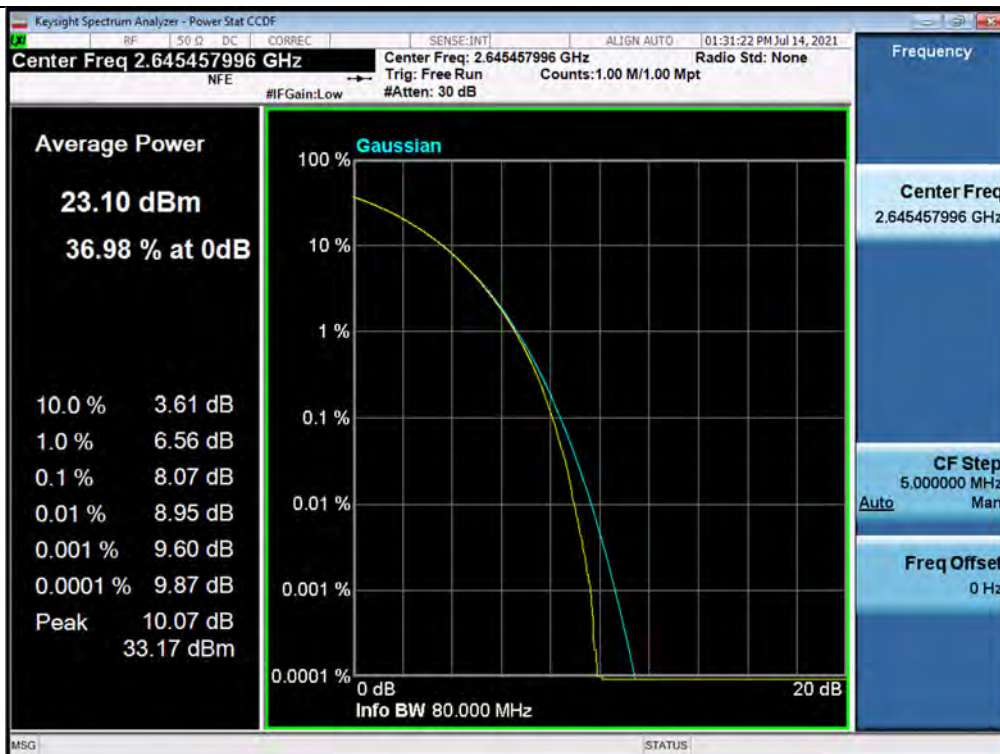

PAPR / BRS/EBS / Downlink / 5G NR 100 MHz

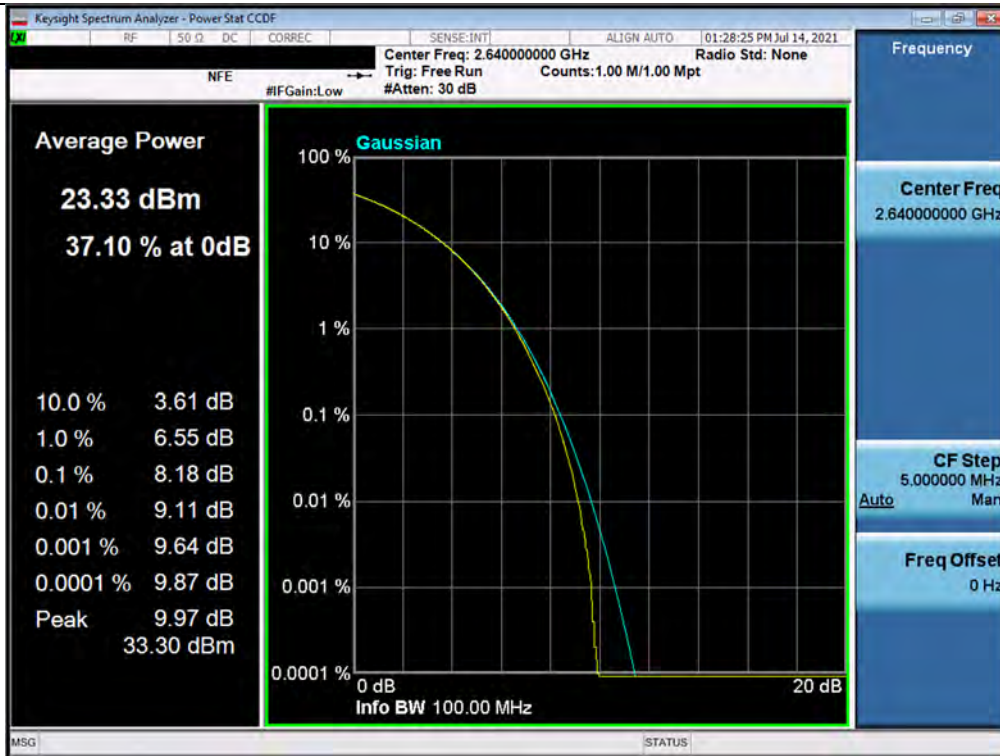

5.5. NOISE FIGURE

Test Requirements:

KDB 935210 D02 v04r02

V. PART 90 SIGNAL BOOSTER SPECIFIC REQUIREMENTS

- (j) Other provisions for Part 90 boosters in specific bands and/or for specific conditions.
 - (5) For the remote unit of a conventional fiber-connected host/remote DAS booster system, it is acceptable to submit compliance information and test data consistent with Section 90.219(d)(6)(ii) (i.e., ERP of noise ≤ -43 dBm in 10 kHz RBW) for the downlink path only, in place of Section 90.219(e)(2) noise figure test data (i.e., NF ≤ 9 dB for both UL and DL). Test reports must provide explicit details about the instrumentation and test procedure used for Section 90.219(d)(6)(ii) testing.

§ 90.219 Use of signal boosters.

- (d) *Deployment rules.* Deployment of signal boosters must be carried out in accordance with the rules in this paragraph.
 - (6) Good engineering practice must be used in regard to the radiation of intermodulation products and noise, such that interference to licensed communications systems is avoided. In the event of harmful interference caused by any given deployment, the FCC may require additional attenuation or filtering of the emissions and/or noise from signal boosters or signal booster systems, as necessary to eliminate the interference.
 - (ii) In general, the ERP of noise within the passband should not exceed -43 dBm in 10 kHz measurement bandwidth.

Test Results:

Test Band (MHz)	Measured Value (dBm/10kHz)	Ant. Peak Gain (dBi)	E.R.P. (dBm/10kHz)	Limit
758 ~ 768	-63.479	7.0	-58.629	-43 dBm in 10 kHz

Plot data of Noise Figure

Noise Figure / FirstNet(758 MHz ~ 768 MHz) / Downlink



5.6. OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS AND SPURIOUS EMISSIONS

Test Requirements:

§ 2.1051 Measurements required: Spurious emissions at antenna terminals:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (e) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (f) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (g) *Alternative out of band emission limit.* Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.
- (h) *Interference caused by out of band emissions.* If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

§ 27.53 Emission limits.

- (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:
 - (7) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
 - (8) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside

the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

- (9) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
- (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.
- (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.
- (h) AWS emission limits
 - (1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.
 - (2) Additional protection levels. Notwithstanding the foregoing paragraph (h)(1) of this section:
 - (iii) Operations in the 2180-2200 MHz band are subject to the out-of-band emission requirements set forth in § 27.1134 for the protection of federal government operations operating in the 2200-2290 MHz band.
 - (iv) For operations in the 2000-2020 MHz band, the power of any emissions below 2000 MHz shall be attenuated below the transmitter power (P) in watts by at least $70 + 10 \log_{10}(P)$ dB.
 - (v) For operations in the 1915-1920 MHz band, the power of any emission between 1930-1995 MHz shall be attenuated below the transmitter power (P) in watts by at least $70 + 10 \log_{10}(P)$ dB.
 - (vi) For operations in the 1995-2000 MHz band, the power of any emission between 2005-2020 MHz shall be attenuated below the transmitter power (P) in watts by at least $70 + 10 \log_{10}(P)$ dB.
 - (3) Measurement procedure.
 - (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately

outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

- (ii) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
 - (iii) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.
- (4) Private agreements.
 - (i) For AWS operations in the 2000-2020 MHz and 2180-2200 MHz bands, to the extent a licensee establishes unified operations across the AWS blocks, that licensee may choose not to observe the emission limit specified in paragraph (h)(1), above, strictly between its adjacent block licenses in a geographic area, so long as it complies with other Commission rules and is not adversely affecting the operations of other parties by virtue of exceeding the emission limit.
 - (ii) For AWS operations in the 2000-2020 MHz band, a licensee may enter into private agreements with all licensees operating between 1995 and 2000 MHz to allow the $70 + 10 \log_{10}(P)$ dB limit to be exceeded within the 1995-2000 MHz band.
 - (iii) An AWS licensee who is a party to a private agreement described in this section (4) must maintain a copy of the agreement in its station files and disclose it, upon request, to prospective AWS assignees, transferees, or spectrum lessees and to the Commission.
- (m) For BRS and EBS stations, the power of any emissions outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) measured in watts in accordance with the standards below. If a licensee has multiple contiguous channels, out-of-band emissions shall be measured from the upper and lower edges of the contiguous channels.
 - (2) For digital base stations, the attenuation shall be not less than $43 + 10 \log(P)$ dB, unless a documented interference complaint is received from an adjacent channel licensee with an overlapping Geographic Service Area. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS No. 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Provided that a documented interference complaint cannot be mutually resolved between the parties prior to the applicable deadline, then the following additional attenuation requirements shall apply:
 - (i) If a pre-existing base station suffers harmful interference from emissions caused by a new or modified base station located 1.5 km or more away, within 24 hours of the receipt of a documented interference complaint the licensee of the new or modified base station must attenuate its emissions by at least $67 + 10 \log(P)$ dB measured at 3 megahertz, above or below, from the channel edge of its frequency block and shall immediately notify the complaining licensee upon implementation of the additional attenuation. No later than 60 days after the implementation of such additional attenuation, the licensee of the complaining base station must attenuate its base station emissions by at least $67 + 10$

- log (P) dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the new or modified base station.
- (ii) If a pre-existing base station suffers harmful interference from emissions caused by a new or modified base station located less than 1.5 km away, within 24 hours of receipt of a documented interference complaint the licensee of the new or modified base station must attenuate its emissions by at least $67 + 10 \log (P) - 20 \log (D \text{ km} / 1.5)$ dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the complaining licensee, or if both base stations are co-located, limit its undesired signal level at the pre-existing base station receiver(s) to no more than -107 dBm measured in a 5.5 megahertz bandwidth and shall immediately notify the complaining licensee upon such reduction in the undesired signal level. No later than 60 days after such reduction in the undesired signal level, the complaining licensee must attenuate its base station emissions by at least $67 + 10 \log (P)$ dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the new or modified base station.
 - (iii) If a new or modified base station suffers harmful interference from emissions caused by a pre-existing base station located 1.5 km or more away, within 60 days of receipt of a documented interference complaint the licensee of each base station must attenuate its base station emissions by at least $67 + 10 \log (P)$ dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the other licensee.
 - (iv) If a new or modified base station suffers harmful interference from emissions caused by a pre-existing base station located less than 1.5 km away, within 60 days of receipt of a documented interference complaint: (a) The licensee of the new or modified base station must attenuate its OOB by at least $67 + 10 \log (P) - 20 \log (D \text{ km} / 1.5)$ measured 3 megahertz above or below, from the channel edge of its frequency block of the other licensee, or if the base stations are co-located, limit its undesired signal level at the other base station receiver(s) to no more than -107 dBm measured in a 5.5-megahertz bandwidth; and (b) the licensee causing the interference must attenuate its emissions by at least $67 + 10 \log (P)$ dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the new or modified base station.
 - (v) For all fixed digital user stations, the attenuation factor shall be not less than $43 + 10 \log (P)$ dB at the channel edge.
- (6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all

emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

§ 90.219 Use of signal boosters.

- (e) Device Specifications. In addition to the general rules for equipment certification in § 90.203(a)(2) and part 2, subpart J of this chapter, a signal booster must also meet the rules in this paragraph.
 - (3) Spurious emissions from a signal booster must not exceed -13 dBm within any 100 kHz measurement bandwidth.

§ 90.543 Emission limitations.

- (f) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:
 - (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
 - (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
 - (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.
 - (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
 - (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.
- (g) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Test Procedures:

Measurements were in accordance with the test methods section 3.6 of KDB 935210 D05 v01r04.

Spurious emissions shall be measured using a single test signal sequentially tuned to the low, middle, and high channels or frequencies within each authorized frequency band of operation.

Out-of-band/out-of-block emissions (including intermodulation products) shall be measured under each of the following two stimulus conditions:

- a) two adjacent test signals sequentially tuned to the lower and upper frequency band/block edges;
- b) a single test signal, sequentially tuned to the lowest and highest frequencies or channels within the frequency band/block under examination.

NOTE—Single-channel boosters that cannot accommodate two simultaneous signals within the passband may be excluded from the test stipulated in step a).

3.6.2 Out-of-band/out-of-block emissions conducted measurements

- a) Connect a signal generator to the input of the EUT.
If the signal generator is not capable of generating two modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support this two-signal test.
- b) Set the signal generator to produce two AWGN signals as previously described.
- c) Set the center frequencies such that the AWGN signals occupy adjacent channels, as defined by industry standards such as 3GPP or 3GPP2, at the upper edge of the frequency band or block under test.
- d) Set the composite power levels such that the input signal is just below the AGC threshold, but not more than 0.5 dB below. The composite power can be measured using the procedures provided in KDB Publication 971168, but it will be necessary to expand the power integration bandwidth so as to include both of the transmit channels.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band.
- g) Set the VBW = $3 \times \text{RBW}$.
- h) Set the detector to power averaging (rms) detector.
- i) Set the Sweep time = auto-couple.
- j) Set the spectrum analyzer start frequency to the upper block edge frequency, and the stop frequency to the upper block edge frequency plus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively.
- k) Trace average at least 100 traces in power averaging (rms) mode.
- l) Use the marker function to find the maximum power level.
- m) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- n) Repeat steps k) to m) with the composite input power level set to 3 dB above the AGC threshold.
- o) Reset the frequencies of the input signals to the lower edge of the frequency block or band under test.
- p) Reset the spectrum analyzer start frequency to the lower block edge frequency minus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively, and the stop frequency to the lower band or block edge frequency.
- q) Repeat steps k) to n).
- r) Repeat steps a) to q) with the signal generator configured for a single test signal tuned as close as possible to

the block edges.

- s) Repeat steps a) to r) with the narrowband test signal.
- t) Repeat steps a) to s) for all authorized frequency bands or blocks used by the EUT.

3.6.3 Spurious emissions conducted measurements

- a) Connect a signal generator to the input of the EUT.
- b) Set the signal generator to produce the broadband test signal as previously described.
- c) Set the center frequency of the test signal to the lowest available channel within the frequency band or block.
- d) Set the EUT input power to a level that is just below the AGC threshold, but not more than 0.5 dB below.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band of operation.
- g) Set the VBW $\geq 3 \times$ RBW.
- h) Set the Sweep time = auto-couple.
- i) Set the spectrum analyzer start frequency to the lowest RF signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 1 MHz.
The number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$, which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- j) Select the power averaging (rms) detector function.
- k) Trace average at least 10 traces in power averaging (rms) mode.
- l) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.
- m) Reset the spectrum analyzer start frequency to the upper band/block edge frequency plus 1 MHz, and the spectrum analyzer stop frequency to 10 times the highest frequency of the fundamental emission. The number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$, which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- n) Trace average at least 10 traces in power averaging (rms) mode.
- o) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report; also provide tabular data, if required.
- p) Repeat steps i) to o) with the input test signals firstly tuned to a middle band/block frequency/channel, and then tuned to a high band/block frequency/channel.
- q) Repeat steps b) to p) with the narrowband test signal.
- r) Repeat steps b) to q) for all authorized frequency bands/blocks used by the EUT.

Note:

1. In some bands, RBW was reduced to 0.1 %, 1 % and 10% of the reference bandwidth for measuring unwanted emission level (typically, 1 MHz if the authorized frequency band is above 1 GHz) and power was integrated according to section 5.7.2 of ANSI C63.26-2015.

Reduced RBW	0.1 %	1 %	10 %
Below 1 GHz (Ref.RBW: 100 kHz)	-	20 dB	10 dB
Above 1 GHz (Ref.RBW: 1 MHz)	30 dB	20 dB	10 dB

2. Intermodulation test is not performed for 5G NR 100 MHz signal, because the band cannot accommodate two signals. (Refer to Section 3.6.1 of KDB 935210 D05)
3. Among the data of simultaneous and single band emission conditions, the single emission condition is the worst.

Test Results: Plot data of Out-of-band/out-of-block emissions

Out-of-band (two adjacent test signals) / Lower 700 MHz / Downlink / LTE 5 MHz / Lower




Out-of-band (two adjacent test signals) / Lower 700 MHz / Downlink / LTE 5 MHz / Upper



+3 dB above Out-of-band (two adjacent test signals) / Lower 700 MHz / Downlink / LTE 5 MHz / Lower



+3 dB above Out-of-band (two adjacent test signals) / Lower 700 MHz / Downlink / LTE 5 MHz / Upper

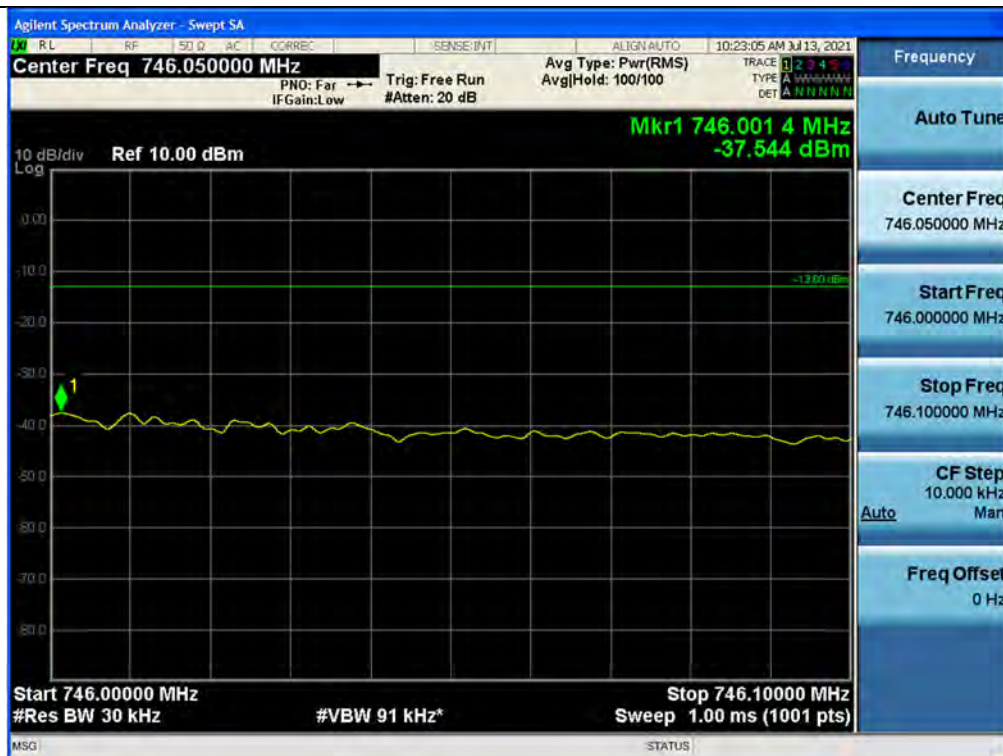

Out-of-band (two adjacent test signals) / Upper 700 MHz / Downlink / LTE 5 MHz / Lower



Out-of-band (two adjacent test signals) / Upper 700 MHz / Downlink / LTE 5 MHz / Upper




+3 dB above Out-of-band (two adjacent test signals) / Upper 700 MHz / Downlink / LTE 5 MHz / Lower




+3 dB above Out-of-band (two adjacent test signals) / Upper 700 MHz / Downlink / LTE 5 MHz / Upper




Out-of-band (two adjacent test signals) / FirstNet / Downlink / LTE 5 MHz / Lower

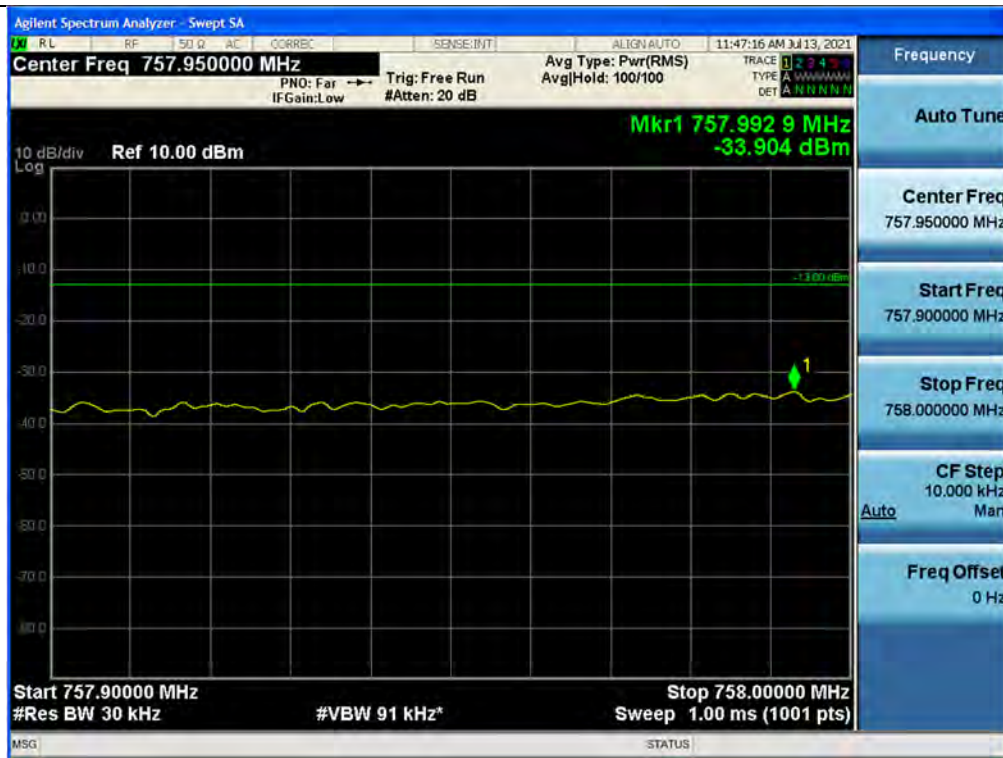

Out-of-band (two adjacent test signals) / FirstNet / Downlink / LTE 5 MHz / Upper

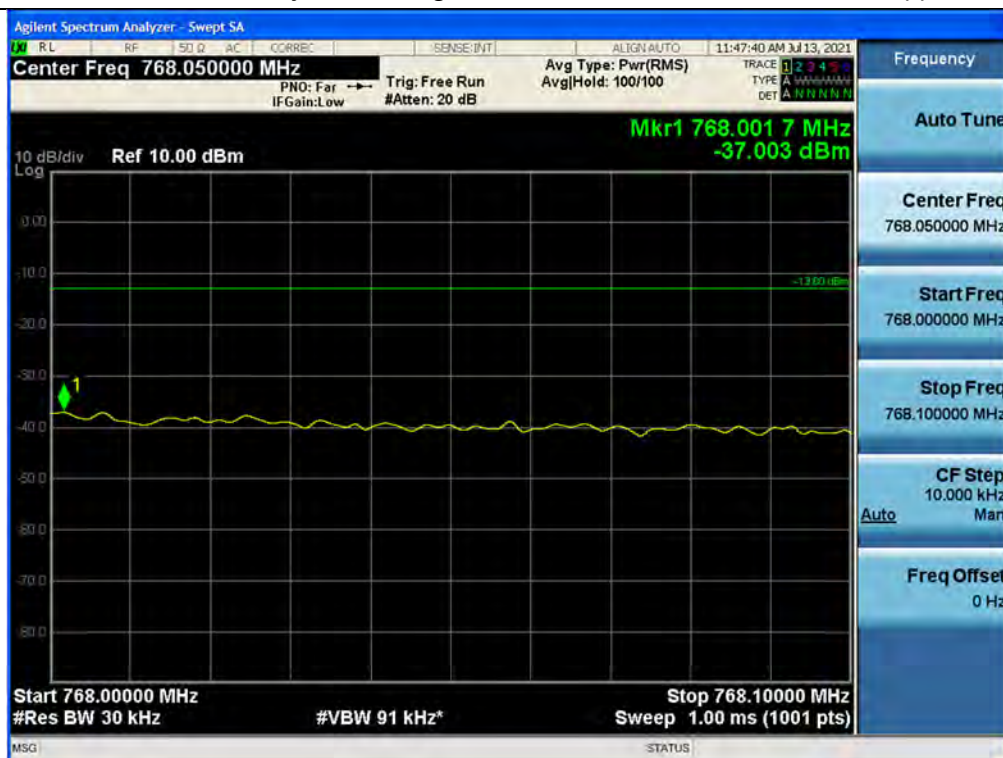


+3 dB above Out-of-band (two adjacent test signals) / FirstNet / Downlink / LTE 5 MHz / Lower

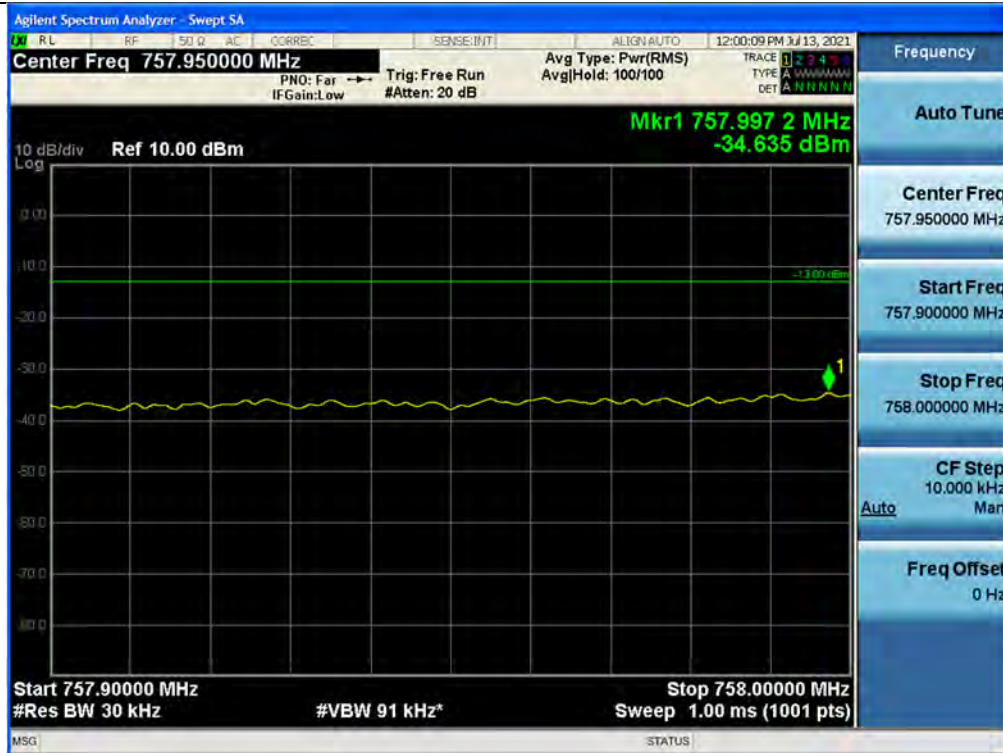


+3 dB above Out-of-band (two adjacent test signals) / FirstNet / Downlink / LTE 5 MHz / Upper




Out-of-band (two adjacent test signals) / AWS / Downlink / CDMA / Lower

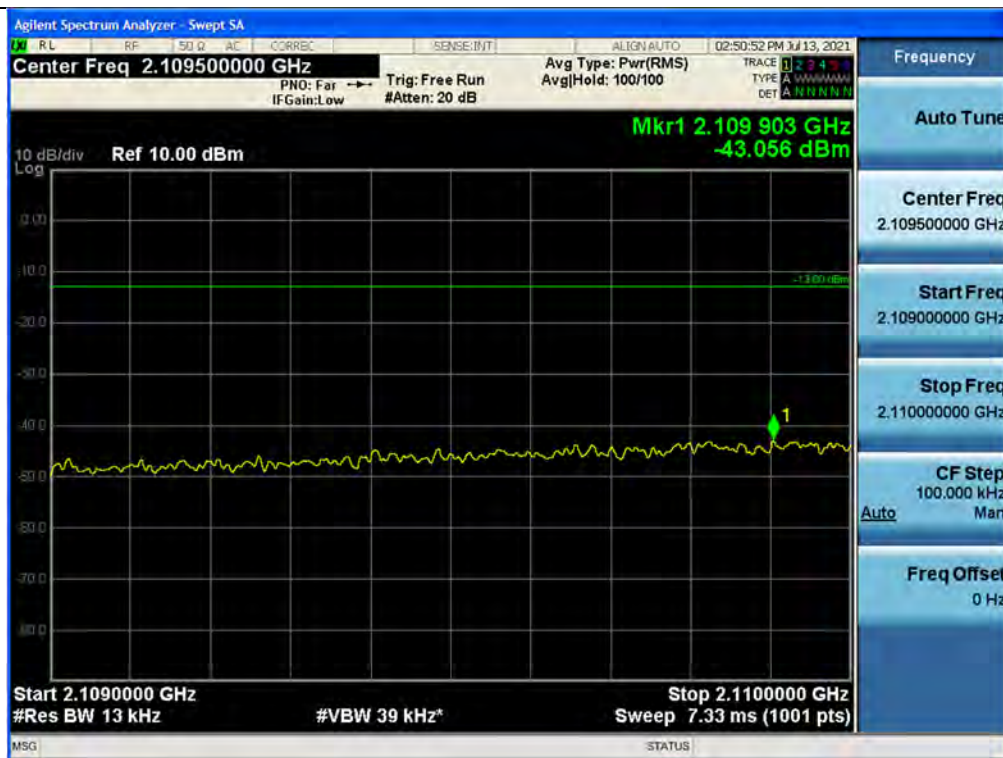


Out-of-band (two adjacent test signals) / AWS / Downlink / CDMA / Upper

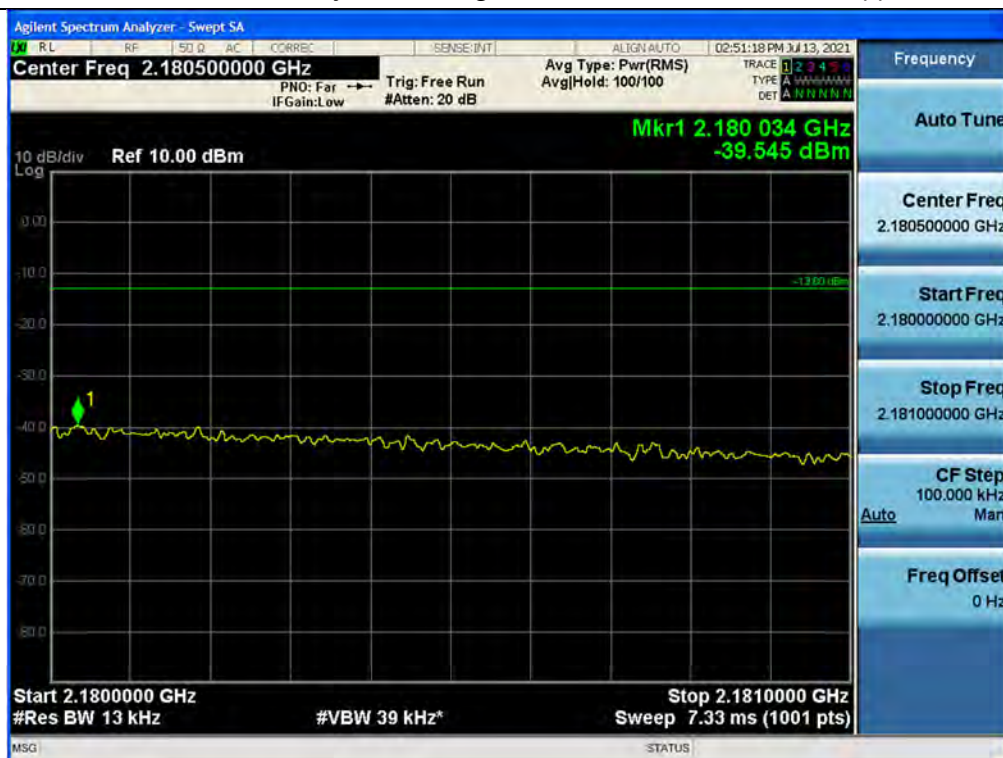

+3 dB above Out-of-band (two adjacent test signals) / AWS / Downlink / CDMA / Lower

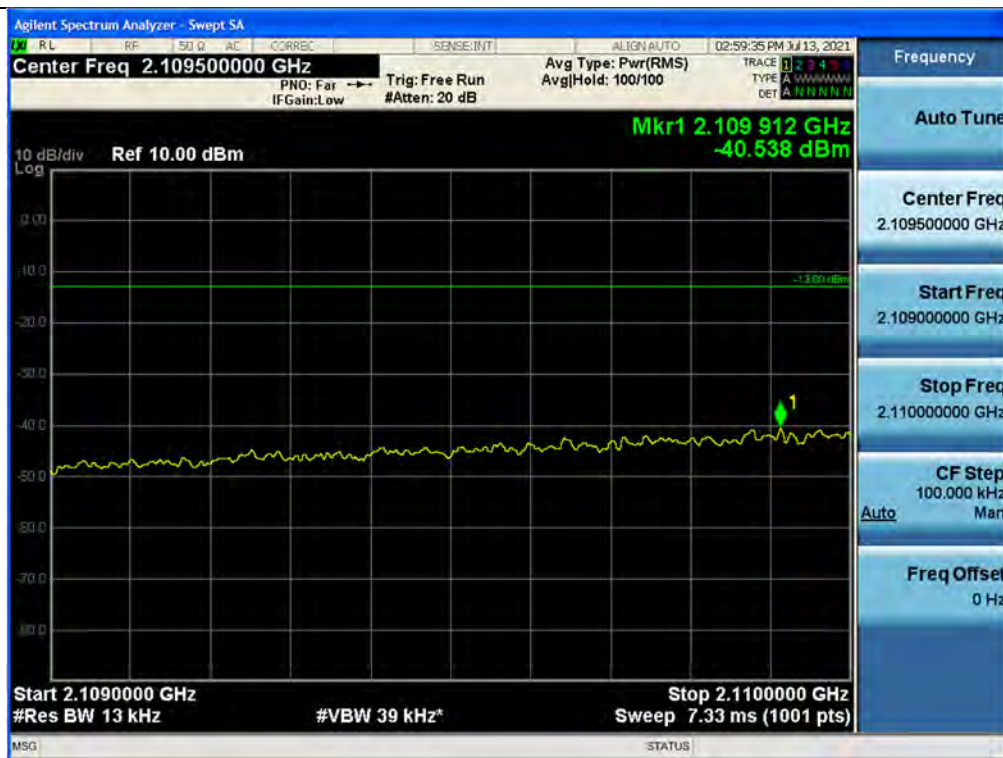

+3 dB above Out-of-band (two adjacent test signals) / AWS / Downlink / CDMA / Upper

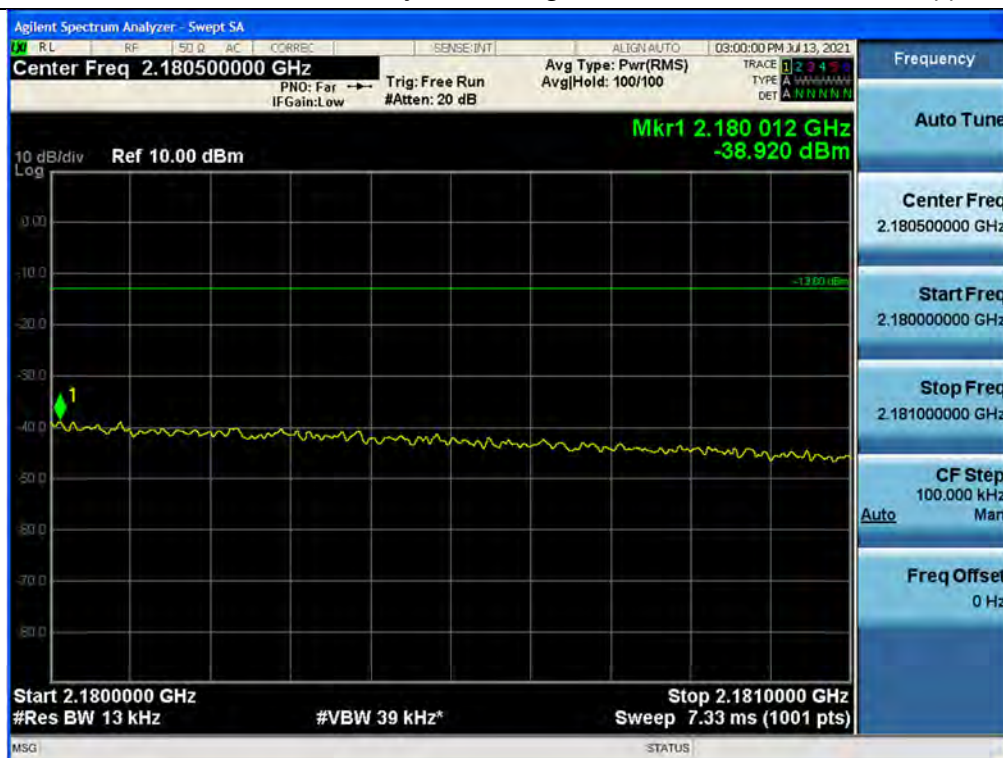

Out-of-band (two adjacent test signals) / AWS / Downlink / WCDMA / Lower




Out-of-band (two adjacent test signals) / AWS / Downlink / WCDMA / Upper



+3 dB above Out-of-band (two adjacent test signals) / AWS / Downlink / WCDMA / Lower



+3 dB above Out-of-band (two adjacent test signals) / AWS / Downlink / WCDMA / Upper

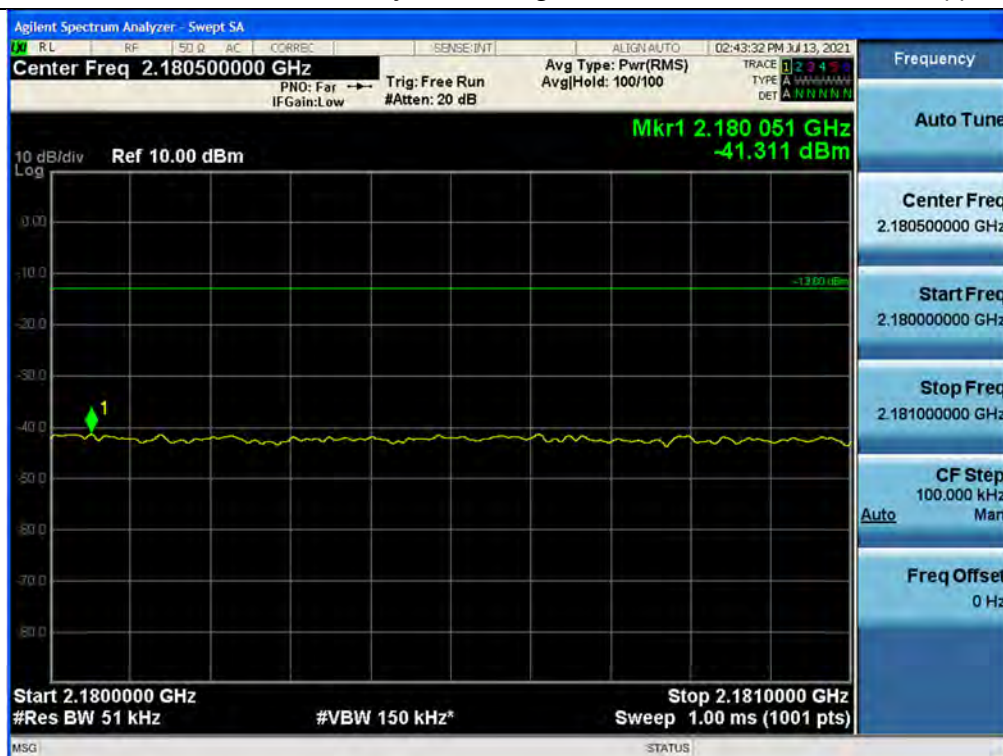


Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 5 MHz / Lower



Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 5 MHz / Upper




+3 dB above Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 5 MHz / Lower

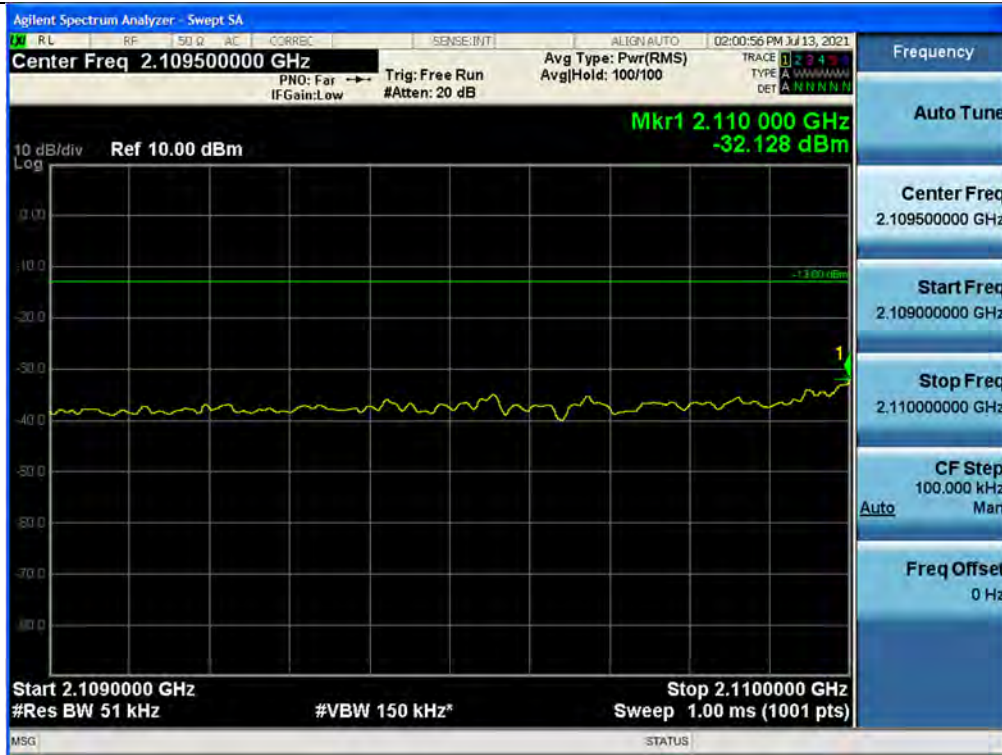


+3 dB above Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 5 MHz / Upper




Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 10 MHz / Lower

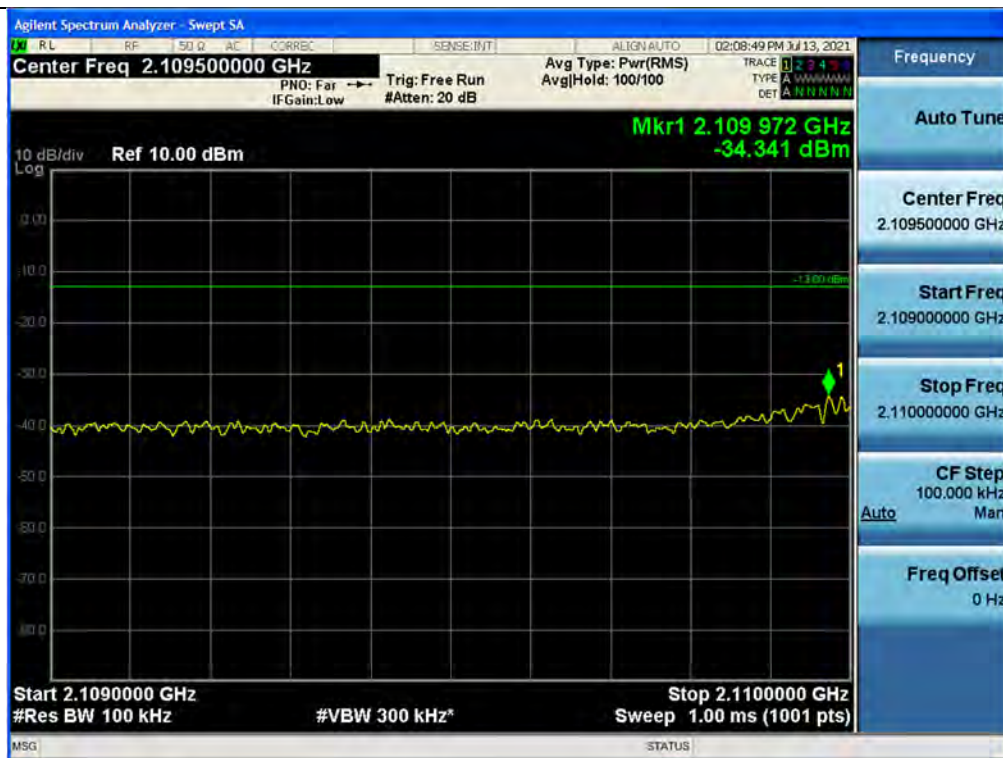


Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 10 MHz / Upper

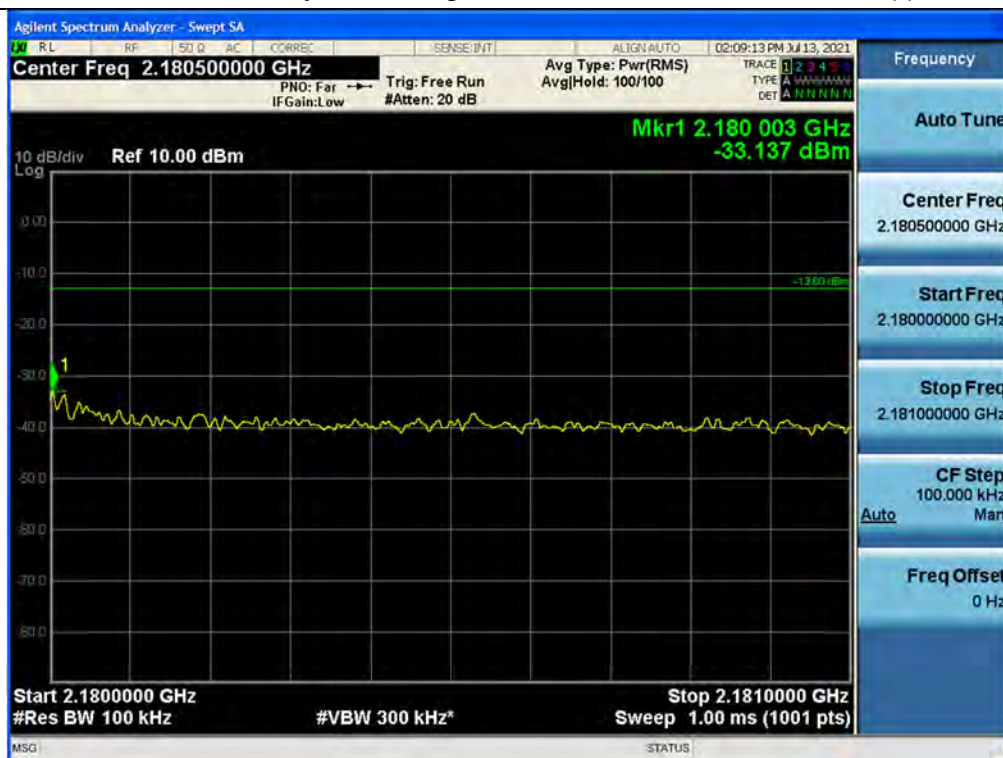

+3 dB above Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 10 MHz / Lower

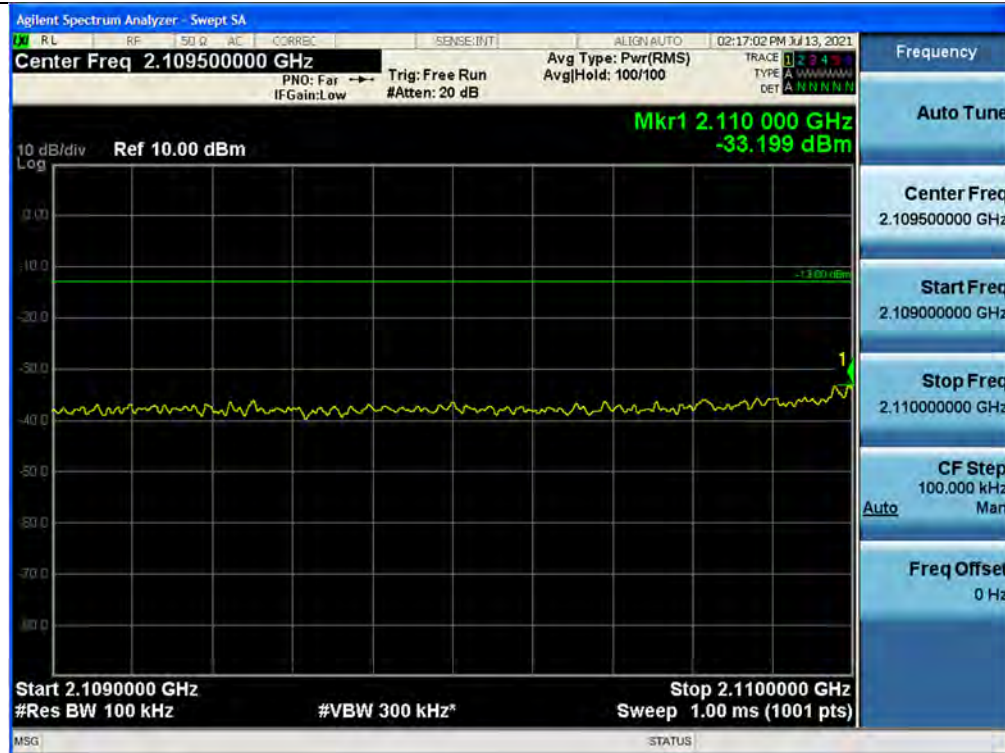


+3 dB above Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 10 MHz / Upper

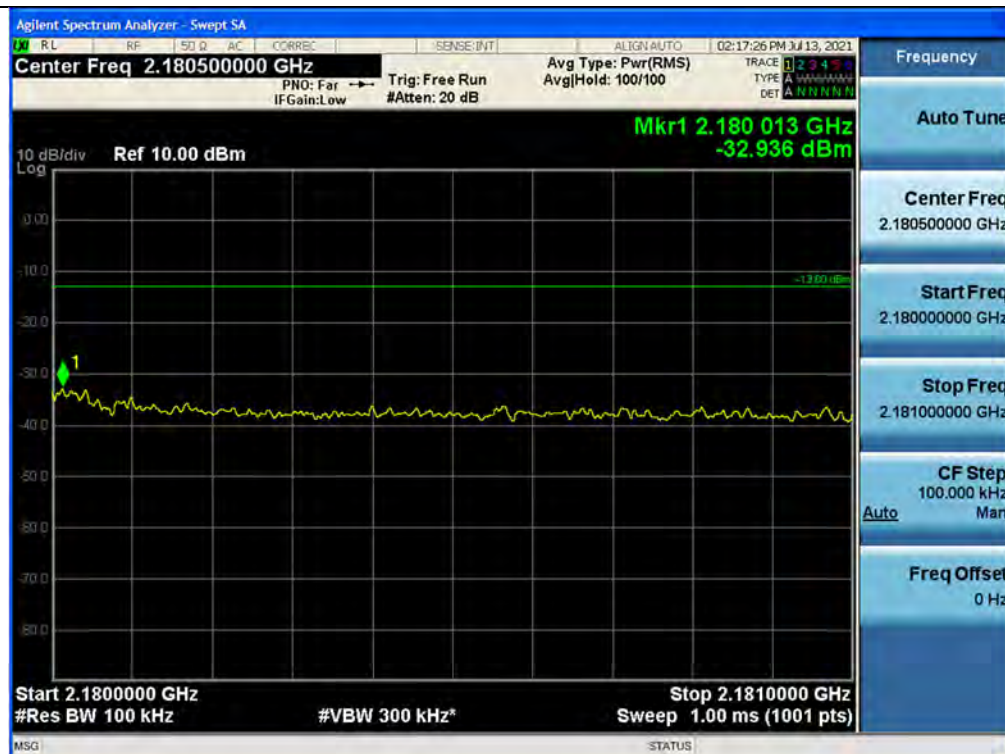


Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 20 MHz / Lower




Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 20 MHz / Upper

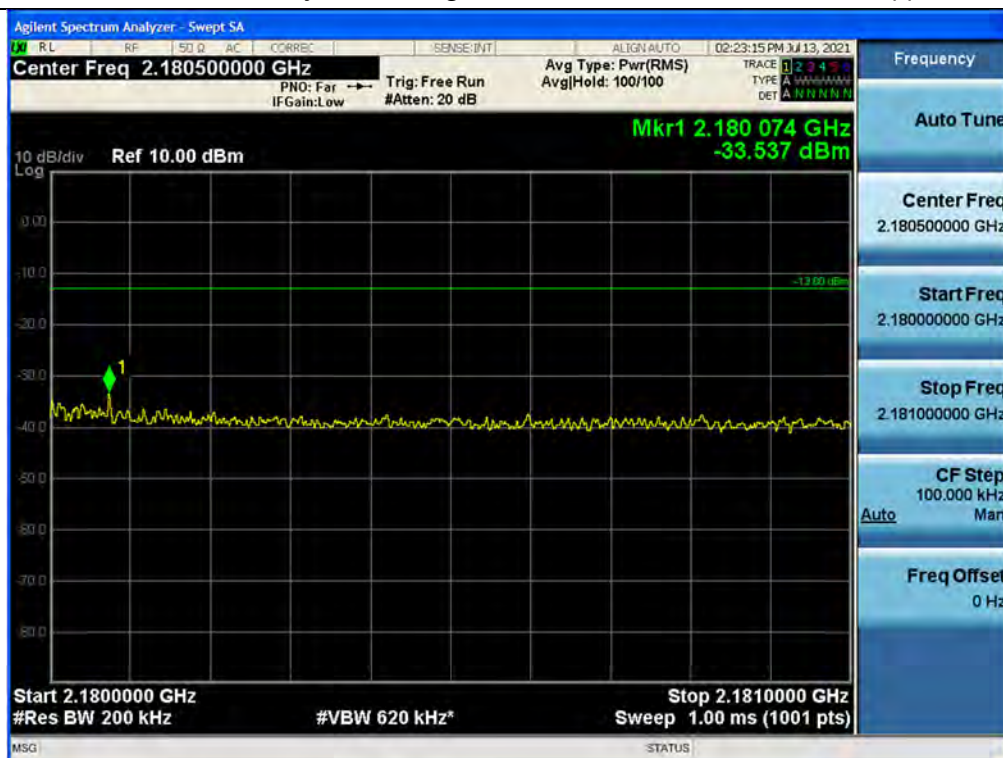

+3 dB above Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 20 MHz / Lower

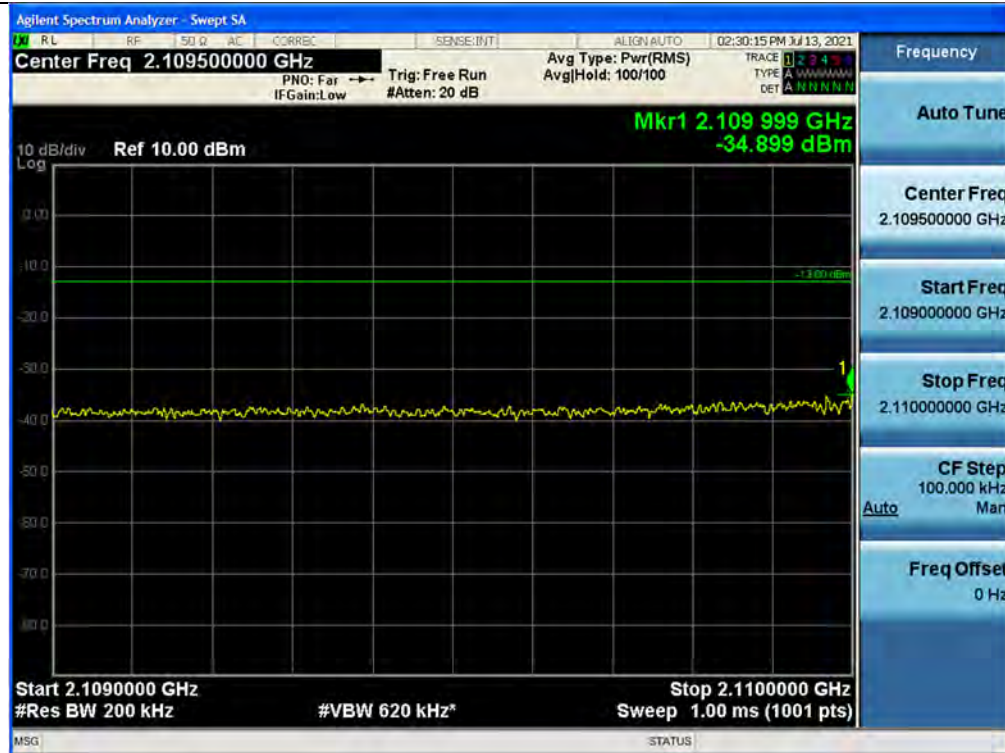

+3 dB above Out-of-band (two adjacent test signals) / AWS / Downlink / LTE 20 MHz / Upper

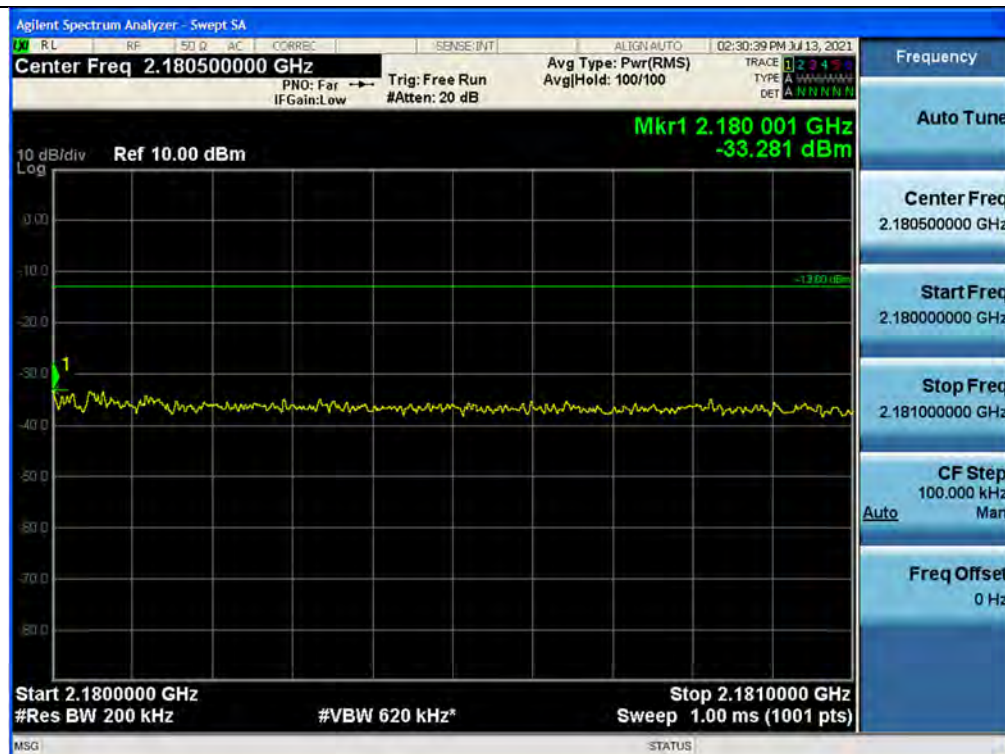

Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / GSM / Lower



Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / GSM / Upper



+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / GSM / Lower



+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / GSM / Upper

