



FCC RF Test Report

APPLICANT : Sony Mobile Communications Inc.
EQUIPMENT : GSM/WCDMA/LTE Phone+Bluetooth,
DTS/UNII a/b/g/n and NFC
BRAND NAME : Sony
FCC ID : PY7-10720X
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Dec. 30, 2016 and testing was completed on Jan. 21 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7-10720X

Page Number : 1 of 22

Report Issued Date : Mar. 20, 2017

Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 1.2



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Modification of EUT	5
1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	6
1.6 Testing Location	7
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels.....	10
3 CONDUCTED TEST RESULT.....	11
3.1 Measuring Instruments.....	11
3.2 Test Setup	11
3.3 Test Result of Conducted Test.....	11
3.4 Conducted Output Power and ERP/EIRP	12
3.5 Peak-to-Average Ratio	13
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	14
3.7 Conducted Band Edge	15
3.8 Conducted Spurious Emission	16
3.9 Frequency Stability	17
4 RADIATED TEST ITEMS	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	18
4.4 Field Strength of Spurious Radiation Measurement	19
5 LIST OF MEASURING EQUIPMENT	20
6 UNCERTAINTY OF EVALUATION	22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF ERP/EIRP AND RADIATED TEST	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG6D3001A	Rev. 01	Initial issue of report	Mar. 03, 2017
FG6D3001A	Rev. 02	Revising power list information in appendix a.	Mar. 20, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power	< 7 Watts		
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts		
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b) §27.53(g)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 19.76 dB at 1696.000 MHz

1 General Description

1.1 Applicant

Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

1.2 Manufacturer

Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII, a/b/g/n, GPS and NFC

Product Specification subjective to this standard			
Antenna Type		Coupling type (LDS) Antenna	
EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	1.21	WUJ01NNQK0	Conducted Measurement
		WUJ01NNQSQ	Radiated Spurious Emission ERP/EIRP Test
Accessory List			
AC Adapter	Model No. : EP800		
	S/N : 3015W42100643		
Earphone	Model No. : MH410c		
	S/N : N/A		
USB Cable	Model No. : UCB20		
	S/N : 1635A9100031498		

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	Frequency Range (MHz)	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	824.2 ~848.8	GSM850 GPRS class 8	GMSK	0.7638	0.0096 ppm	245KGXW
Part 22	824.2 ~848.8	GSM850 EDGE class 8	8PSK	0.1738	0.0036 ppm	250KG7W
Part 22	826.4 ~846.6	WCDMA Band V RMC 12.2Kbps	BPSK	0.0838	0.0048 ppm	4M25F9W
Part 24	1850.2 ~1909.8	GSM1900 GPRS class 8	GMSK	0.9772	0.0021 ppm	250KGXW
Part 24	1850.2 ~1909.8	GSM1900 EDGE class 8	8PSK	0.3565	0.0207 ppm	249KG7W
Part 24	1852.4 ~ 1907.6	WCDMA Band II RMC 12.2Kbps	BPSK	0.1897	0.0117 ppm	4M22F9W
Part 27	1712.4 ~ 1752.6	WCDMA Band IV RMC 12.2Kbps	BPSK	0.2624	0.0063 ppm	4M23F9W

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH07HY

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
GSM 1900	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

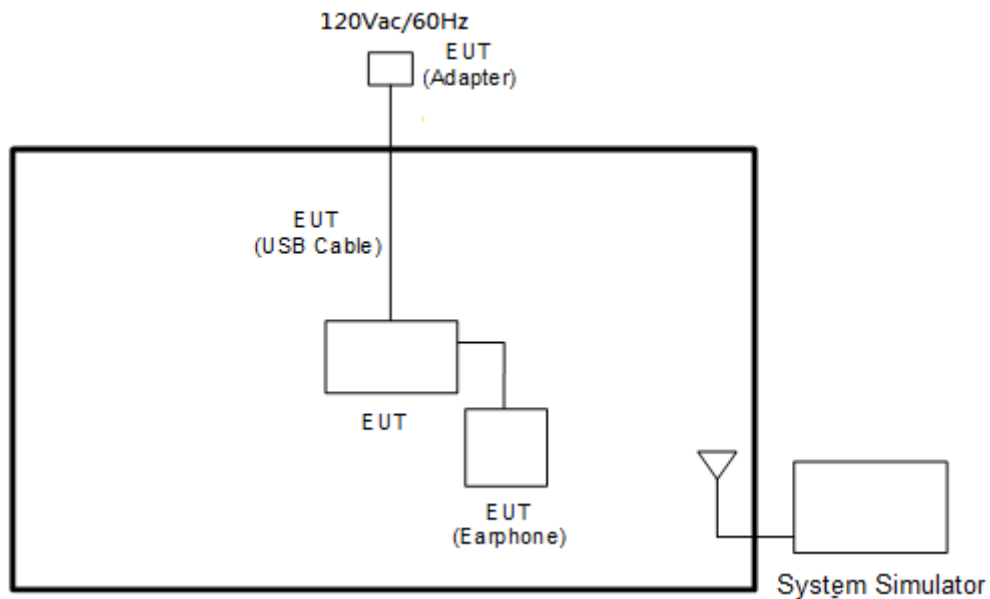

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

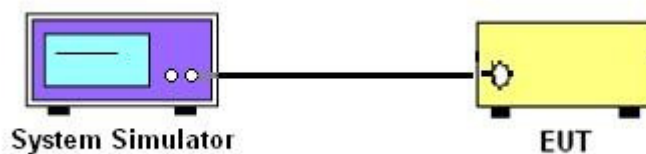

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

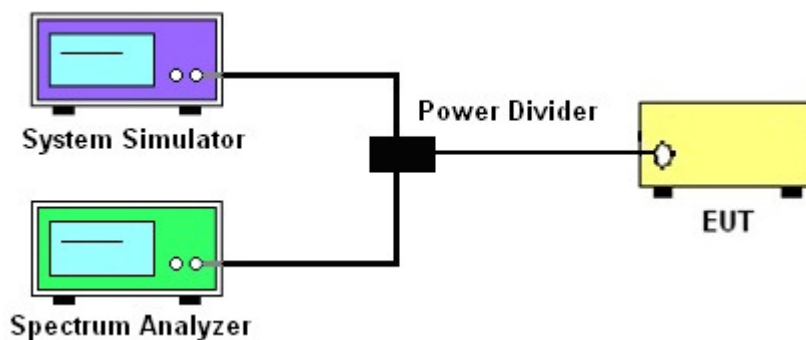

3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
Record the maximum PAPR level associated with a probability of 0.1%.

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $20 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

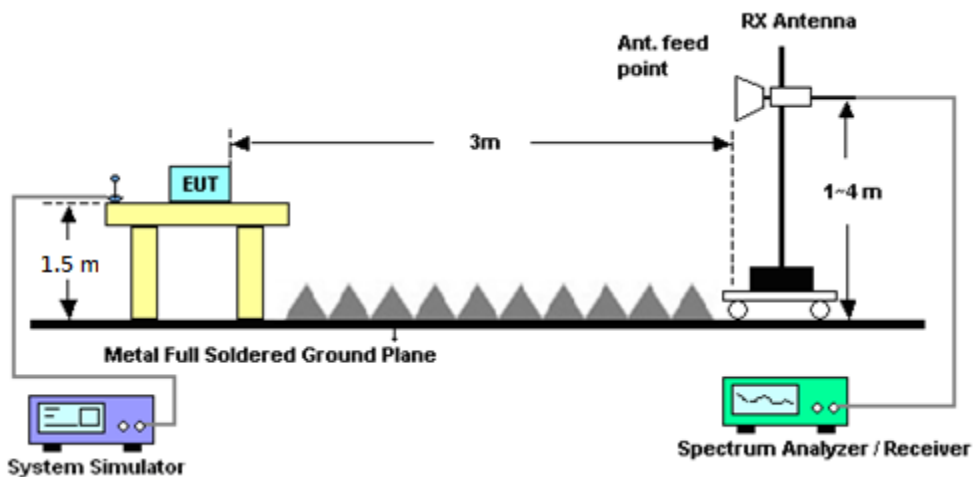

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	May 03, 2016	Jan. 18, 2017	May 02, 2017	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 27, 2016	Jan. 18, 2017	Jun. 26, 2017	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 16, 2016	Jan. 18, 2017	Nov. 15, 2017	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	Voltage:0~20V;Current:0~5A	Oct. 03, 2016	Jan. 18, 2017	Oct. 02, 2017	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 03, 2016	Jan. 18, 2017	Aug. 04, 2017	Conducted (TH03-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	1GHz~26GHz	Dec. 02, 2016	Jan. 18, 2017	Dec. 01, 2017	Conducted (TH03-HY)
Bilog Antenna	TESEQ	CBL 6111D&008	35419&03	30MHz to 1GHz	Jan. 07, 2017	Jan. 18, 2017 ~ Jan. 21, 2017	Jan. 06, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Aug. 18, 2017	Radiation (03CH07-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 25, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Oct. 24, 2017	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	Apr. 15, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Apr. 14, 2017	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 08, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Nov. 07, 2017	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 18, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Mar. 17, 2017	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00 101800-30-1	1590075	1GHz ~ 18GHz	Apr. 15, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Apr. 14, 2017	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-18004 000-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Jun. 13, 2017	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Feb. 27, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Feb. 26, 2017	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Jan. 18, 2017 ~ Jan. 21, 2017	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF780208368	Control Ant Mast	N/A	Jan. 18, 2017 ~ Jan. 21, 2017	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jan. 18, 2017 ~ Jan. 21, 2017	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jan. 18, 2017 ~ Jan. 21, 2017	N/A	Radiation (03CH07-HY)
Hygrometer	TECEPEL	DTM-303B	TP140320	N/A	Nov. 14, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Nov. 13, 2017	Radiation (03CH07-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 04, 2017	Jan. 18, 2017 ~ Jan. 21, 2017	Jan. 03, 2018	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	Y84209521+M Y84209521	9KHz~30MHz	Jan. 03, 2017	Jan. 18, 2017 ~ Jan. 21, 2017	Jan. 02, 2018	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	30MHz~1GHz	Jan. 03, 2017	Jan. 18, 2017 ~ Jan. 21, 2017	Jan. 02, 2018	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521+ MY84209521	1GHz~26GHz	Jan. 03, 2017	Jan. 18, 2017 ~ Jan. 21, 2017	Jan. 02, 2018	Radiation (03CH07-HY)
Filter	Wainwright	WLKS1200-8SS	SN3	1.2G Low Pass	Nov. 22, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Nov. 21, 2017	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Nov. 22, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Nov. 21, 2017	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1.0G High Pass	Dec. 08, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Dec. 07, 2017	Radiation (03CH07-HY)
Notch Filter	Wainwright	WRCG824/849-40/8SS	SN35	CDMA 850	Nov. 22, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Nov. 21, 2017	Radiation (03CH07-HY)
Notch Filter	Wainwright	WRCT1850/1910-40/8S	SN21	1900	Nov. 22, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Nov. 21, 2017	Radiation (03CH07-HY)
Notch Filter	Wainwright	WRCG1710/1755-1690/1	SN2	AWS Band	Nov. 22, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Nov. 21, 2017	Radiation (03CH07-HY)
Test Software	N/A	E3	6.2009-8-24	N/A	N/A	Jan. 18, 2017 ~ Jan. 21, 2017	N/A	Radiation (03CH07-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.05
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.95
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	33.81	33.85	33.96	30.99	30.78	30.90
GPRS class 8	33.83	33.86	33.98	31.00	30.80	30.92
GPRS class 10	30.91	30.89	30.91	27.79	27.55	27.85
GPRS class 11	27.75	27.74	27.73	24.86	24.59	24.94
GPRS class 12	26.96	26.94	26.94	23.93	23.69	24.00
EGPRS class 8	27.51	27.55	27.50	26.50	26.53	26.62
EGPRS class 10	24.98	25.00	24.93	23.85	23.96	24.00
EGPRS class 11	22.97	23.00	22.93	21.50	21.52	21.51
EGPRS class 12	21.63	21.63	21.50	20.62	20.84	20.89

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	24.34	24.38	24.28	23.88	23.87	23.88
HSDPA Subtest-1	23.47	23.46	23.50	22.96	22.98	22.94
HSDPA Subtest-2	23.45	23.40	23.46	22.89	22.92	22.94
HSDPA Subtest-3	22.98	22.95	22.96	22.48	22.42	22.47
HSDPA Subtest-4	22.91	22.94	22.92	22.46	22.40	22.41
HSUPA Subtest-1	21.52	21.55	21.50	21.00	21.04	21.02
HSUPA Subtest-2	21.26	21.34	21.20	20.89	20.93	20.96
HSUPA Subtest-3	22.47	22.44	22.41	21.96	21.93	21.90
HSUPA Subtest-4	20.90	20.83	20.81	20.46	20.34	20.37
HSUPA Subtest-5	23.33	23.38	23.35	22.87	22.85	22.89



Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	23.99	23.85	23.82
HSDPA Subtest-1	23.00	22.94	22.93
HSDPA Subtest-2	22.96	22.93	22.90
HSDPA Subtest-3	22.50	22.47	22.49
HSDPA Subtest-4	22.47	22.44	22.46
HSUPA Subtest-1	21.21	21.02	21.05
HSUPA Subtest-2	20.96	20.94	20.91
HSUPA Subtest-3	21.98	21.96	21.93
HSUPA Subtest-4	21.00	20.99	20.97
HSUPA Subtest-5	23.00	22.96	22.98

A2. GSM

Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.16	2.96	PASS
Middle CH	0.12	2.96	
Highest CH	0.12	3.04	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.12	3.36	PASS
Middle CH	0.16	3.08	
Highest CH	0.12	3.12	



GSM850 (GPRS class 8)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	





GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	
Ref: 35 dBm Offset: 16.1 dB Att: 30 dB AGT: 3.125 ms Power Spectral Density (dBm/Hz) 0.1 0.01 0.001 0.0001 0.00001 1.850 1.855 1.860 Center: 1.8502 GHz 2 dB/ Mean: Pwr = 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.03 dBm Peak 29.18 dBm Crest 0.15 dB 10 % 0.08 dB 1 % 0.08 dB .1 % 0.12 dB .01 % 0.16 dB Date: 18.JAN.2017 12:16:34		Ref: 35 dBm Offset: 16.1 dB Att: 30 dB AGT: 3.125 ms Power Spectral Density (dBm/Hz) 0.1 0.01 0.001 0.0001 0.00001 1.850 1.855 1.860 Center: 1.8502 GHz 2 dB/ Mean: Pwr = 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.33 dBm Peak 28.76 dBm Crest 3.43 dB 10 % 2.44 dB 1 % 3.24 dB .1 % 3.36 dB .01 % 3.40 dB Date: 18.JAN.2017 12:35:12	
Middle Channel		Middle Channel	
Ref: 35 dBm Offset: 16.1 dB Att: 30 dB AGT: 3.125 ms Power Spectral Density (dBm/Hz) 0.1 0.01 0.001 0.0001 0.00001 1.850 1.855 1.860 Center: 1.85 GHz 2 dB/ Mean: Pwr = 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 28.97 dBm Peak 29.11 dBm Crest 0.14 dB 10 % 0.08 dB 1 % 0.12 dB .1 % 0.16 dB .01 % 0.16 dB Date: 18.JAN.2017 12:17:05		Ref: 35 dBm Offset: 16.1 dB Att: 30 dB AGT: 3.125 ms Power Spectral Density (dBm/Hz) 0.1 0.01 0.001 0.0001 0.00001 1.850 1.855 1.860 Center: 1.85 GHz 2 dB/ Mean: Pwr = 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.56 dBm Peak 28.69 dBm Crest 3.13 dB 10 % 2.36 dB 1 % 2.96 dB .1 % 3.08 dB .01 % 3.12 dB Date: 18.JAN.2017 12:35:50	
Highest Channel		Highest Channel	
Ref: 35 dBm Offset: 16.1 dB Att: 30 dB AGT: 3.125 ms Power Spectral Density (dBm/Hz) 0.1 0.01 0.001 0.0001 0.00001 1.850 1.855 1.860 Center: 1.9098 GHz 2 dB/ Mean: Pwr = 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.02 dBm Peak 29.18 dBm Crest 0.17 dB 10 % 0.08 dB 1 % 0.12 dB .1 % 0.12 dB .01 % 0.12 dB Date: 18.JAN.2017 12:17:43		Ref: 35 dBm Offset: 16.1 dB Att: 30 dB AGT: 3.125 ms Power Spectral Density (dBm/Hz) 0.1 0.01 0.001 0.0001 0.00001 1.850 1.855 1.860 Center: 1.9098 GHz 2 dB/ Mean: Pwr = 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.36 dBm Peak 28.55 dBm Crest 3.18 dB 10 % 2.44 dB 1 % 3.00 dB .1 % 3.12 dB .01 % 3.20 dB Date: 18.JAN.2017 12:37:36	

**26dB Bandwidth**

Mode	GSM850 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.312	0.306
Middle CH	0.296	0.309
Highest CH	0.308	0.292

Mode	GSM1900 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.315	0.304
Middle CH	0.312	0.300
Highest CH	0.316	0.301

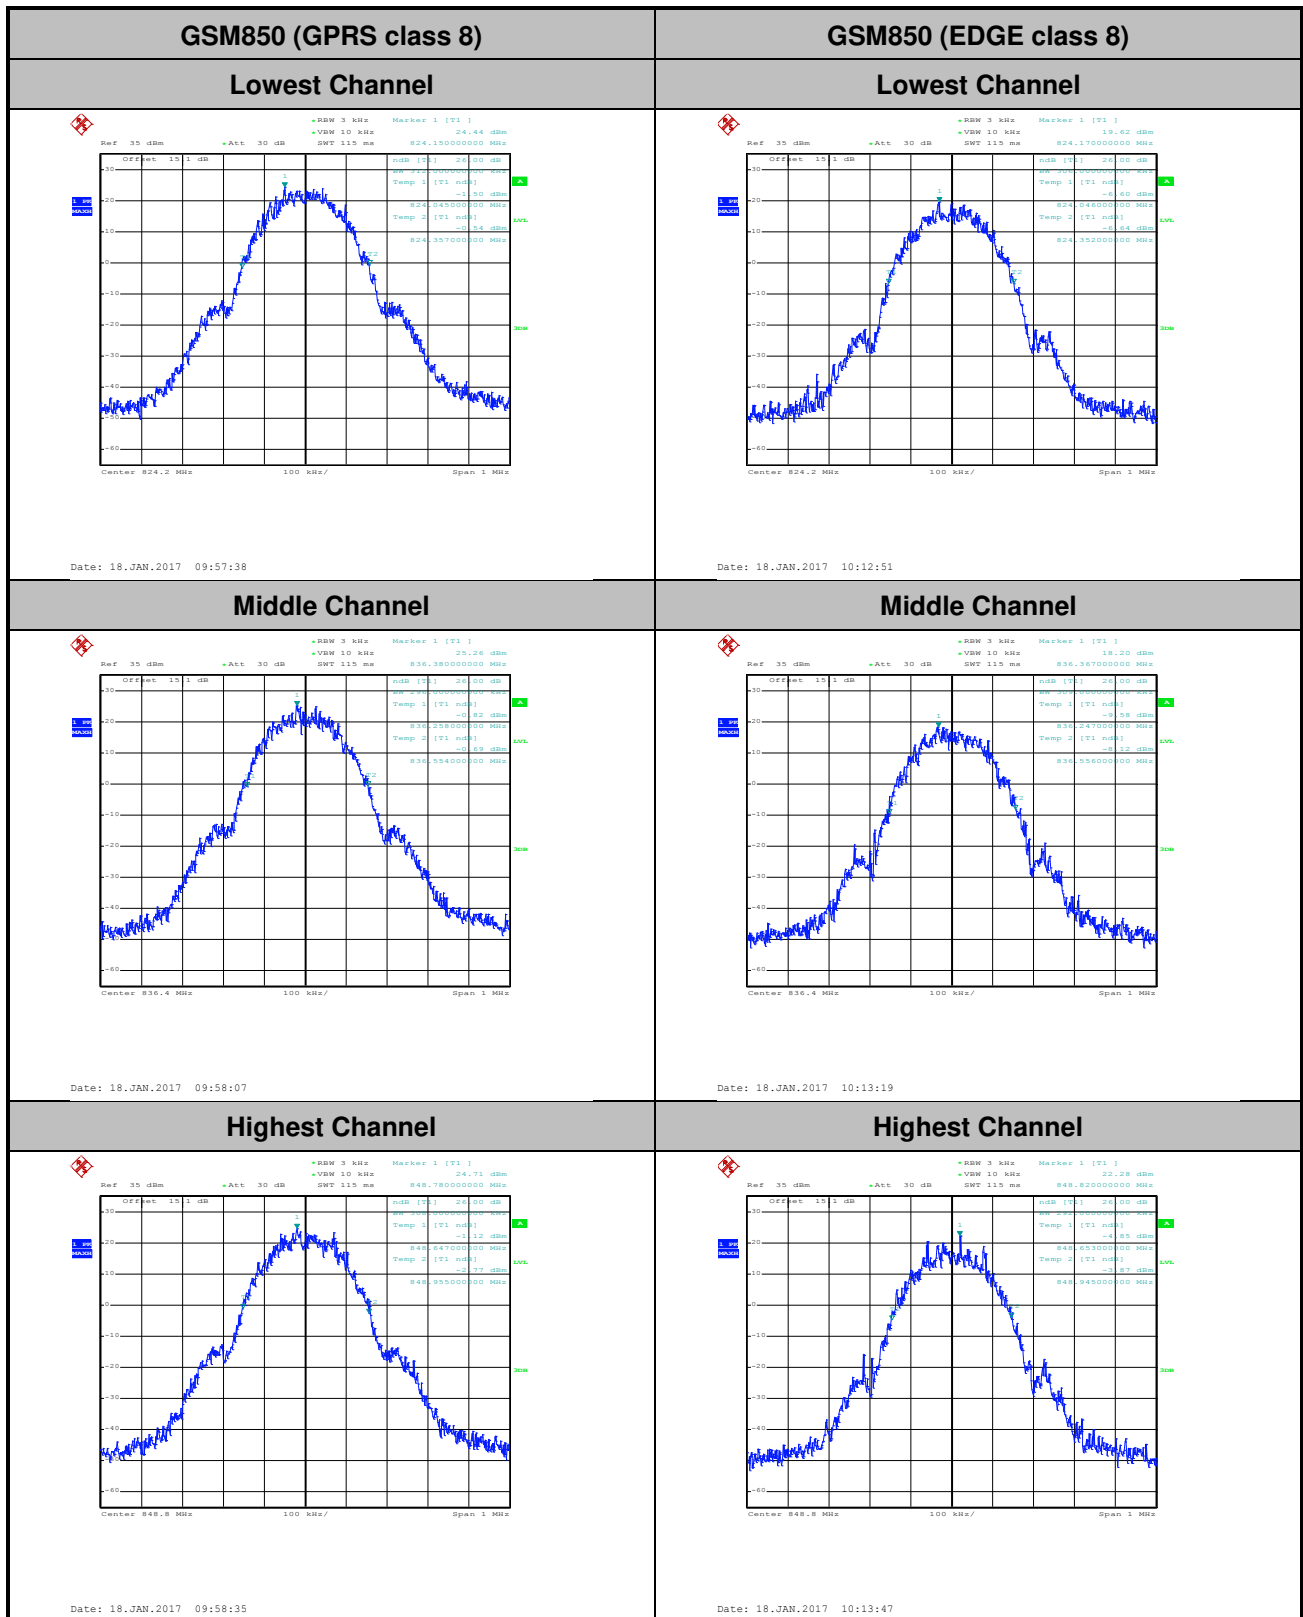


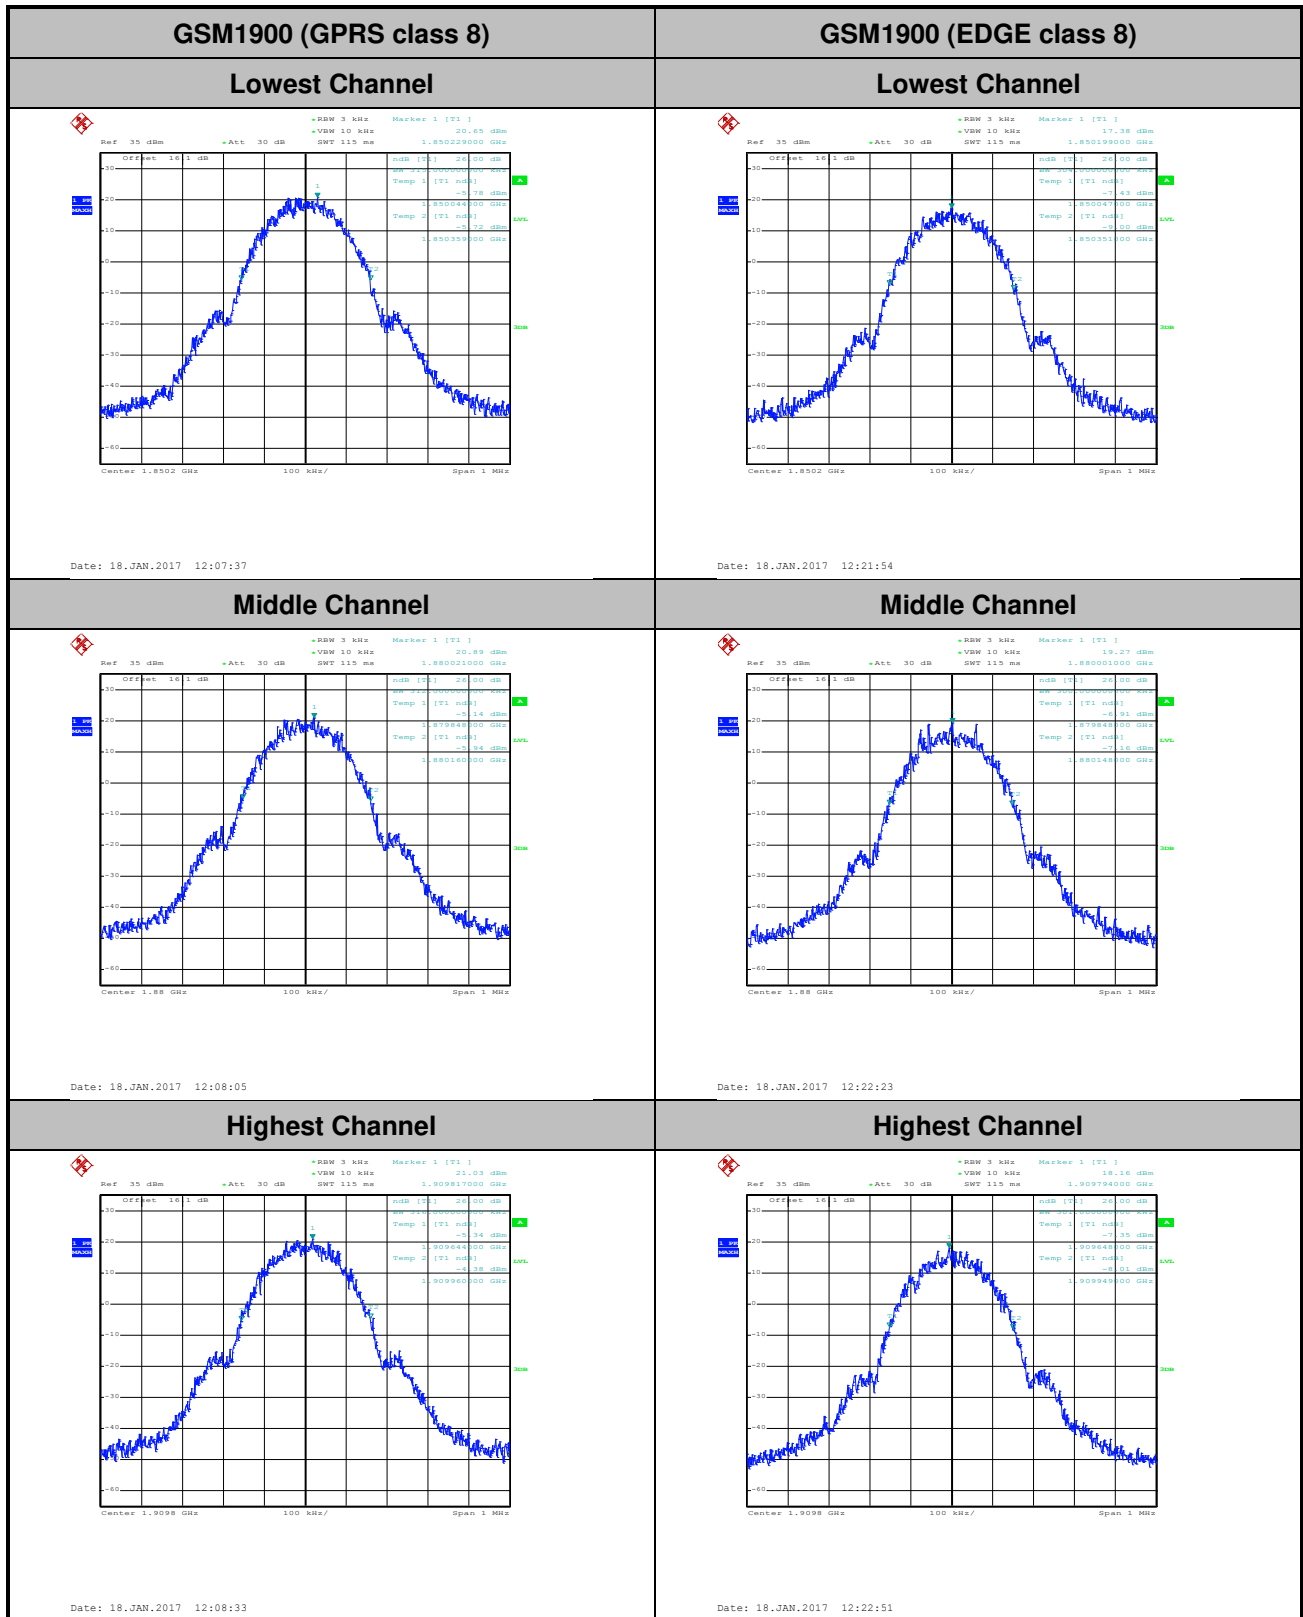


Occupied Bandwidth

Mode	GSM850 : 99%OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.245	0.247
Middle CH	0.245	0.250
Highest CH	0.243	0.249

Mode	GSM1900 : 99%OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.250	0.241
Middle CH	0.246	0.249
Highest CH	0.244	0.248

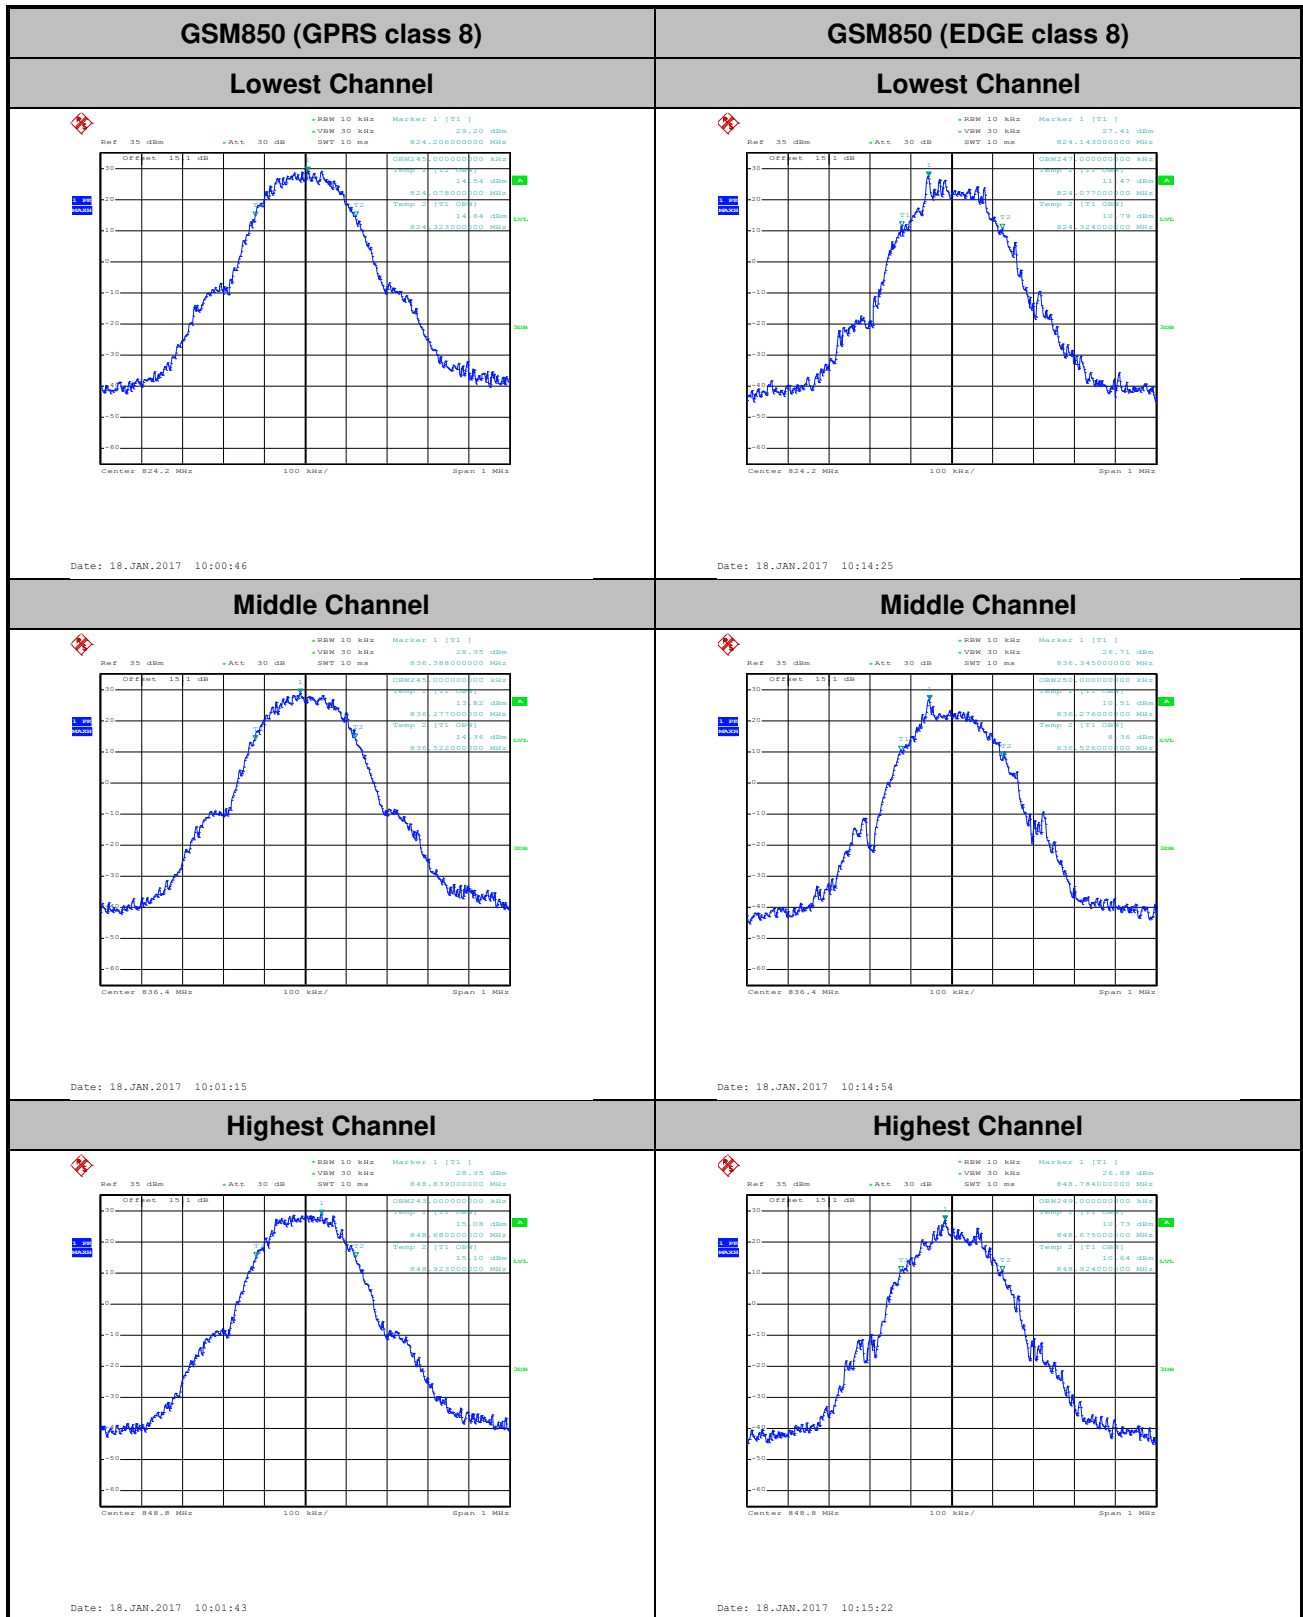

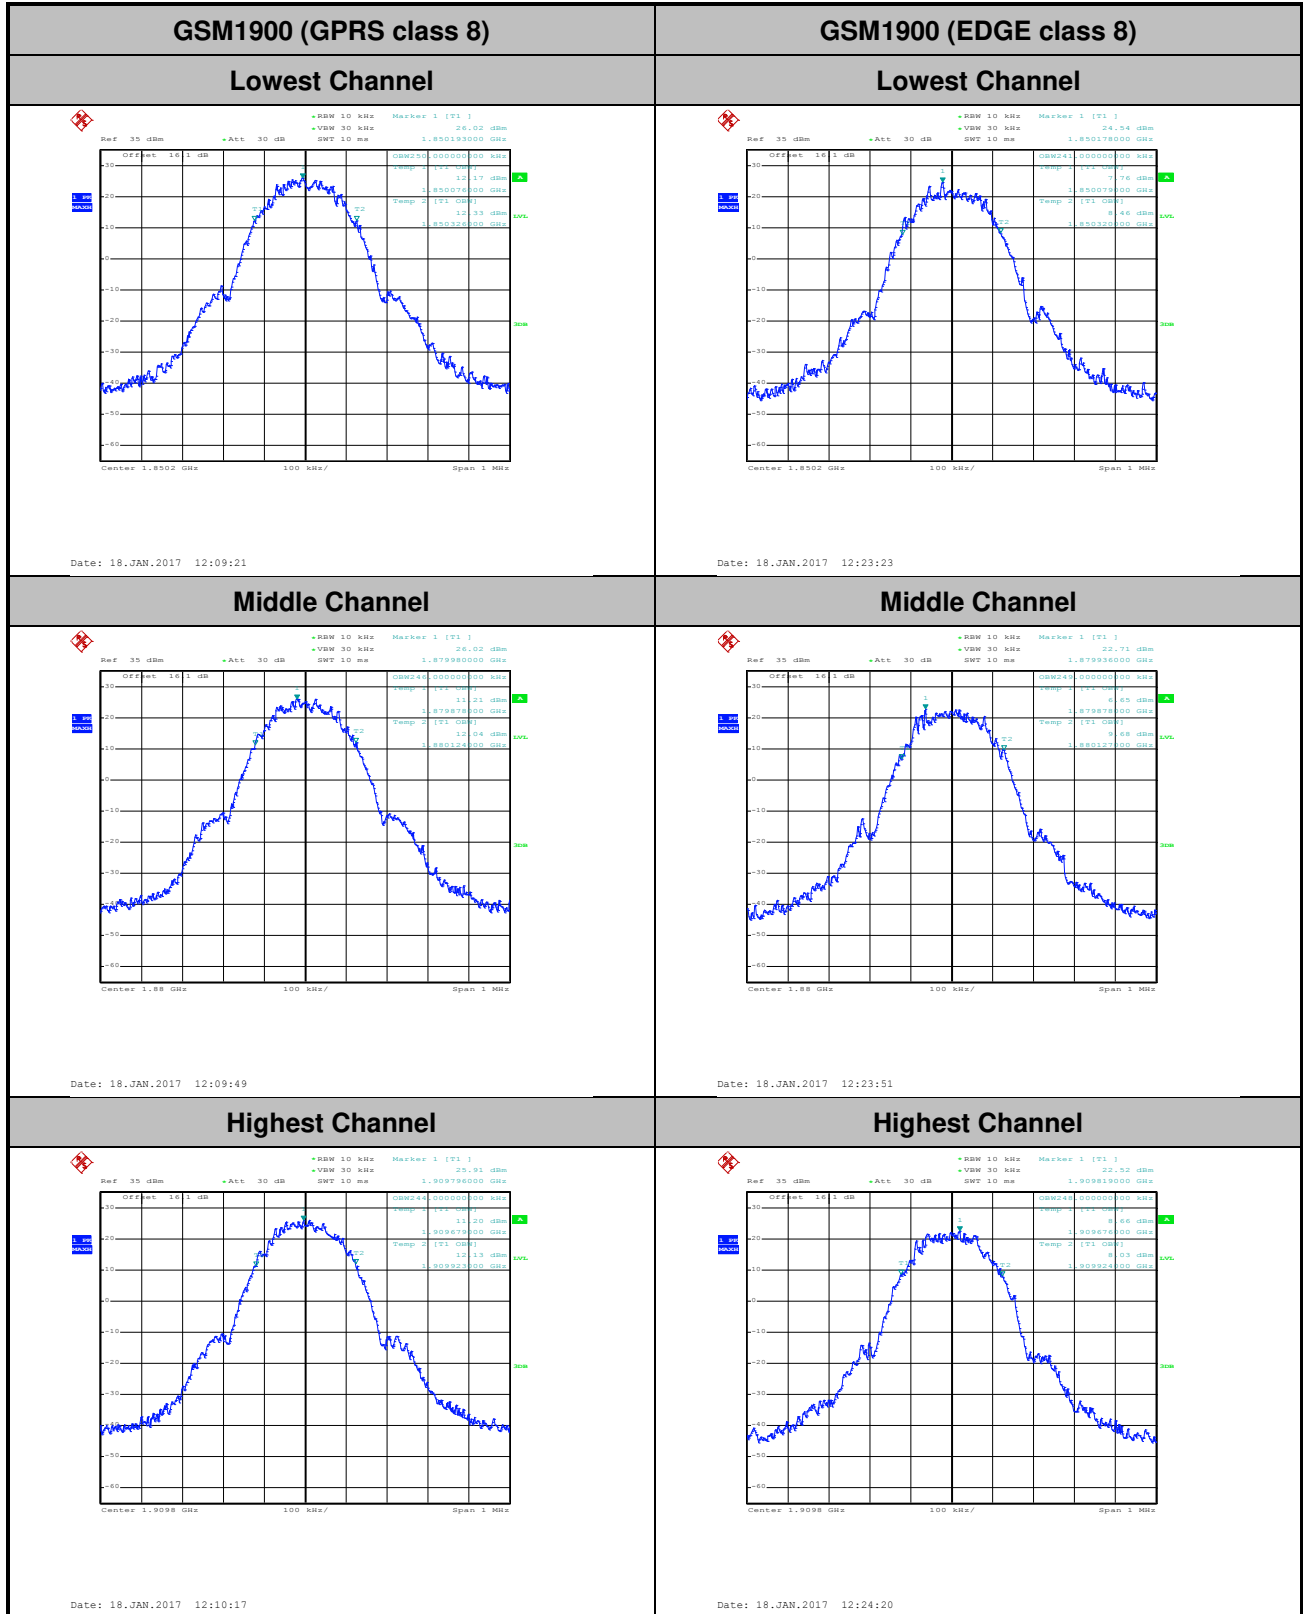




Conducted Band Edge


GSM850 (GPRS class 8)

Lowest Band Edge

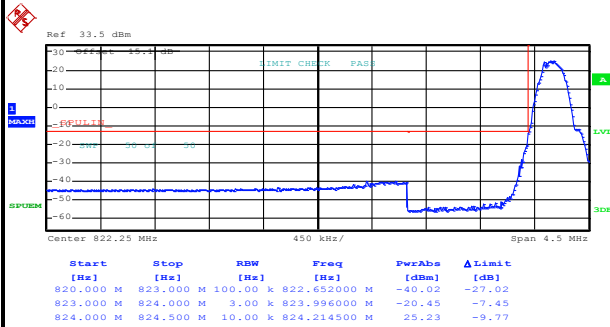

Date: 18.JAN.2017 10:03:24


Highest Band Edge

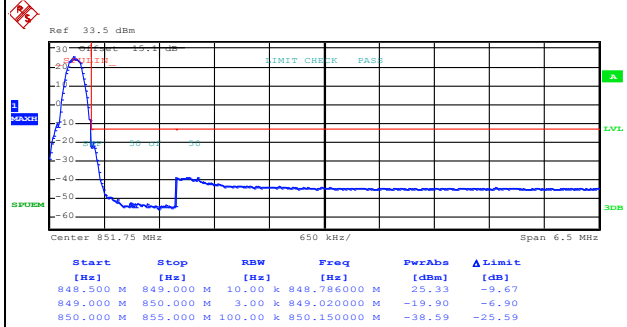

Date: 18.JAN.2017 10:04:51


GSM850 (EDGE class 8)

Lowest Band Edge

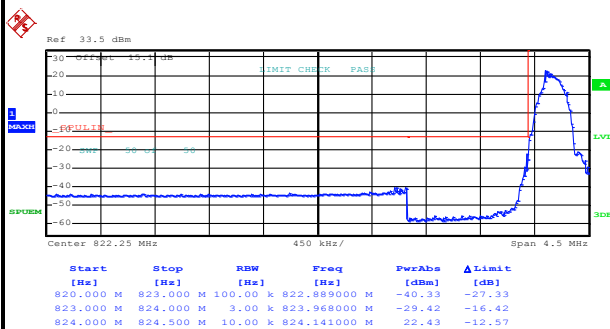

Date: 18.JAN.2017 10:16:53

Highest Band Edge

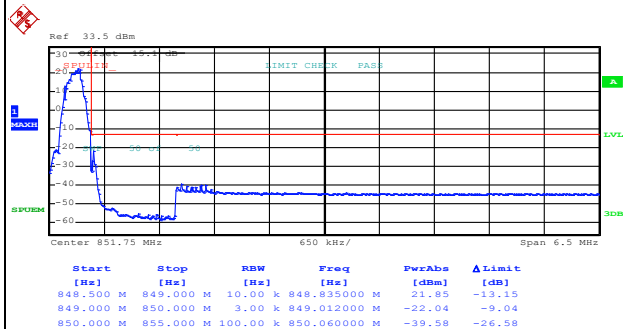


Date: 18.JAN.2017 10:18:20




GSM1900 (GPRS class 8)

Lowest Band Edge

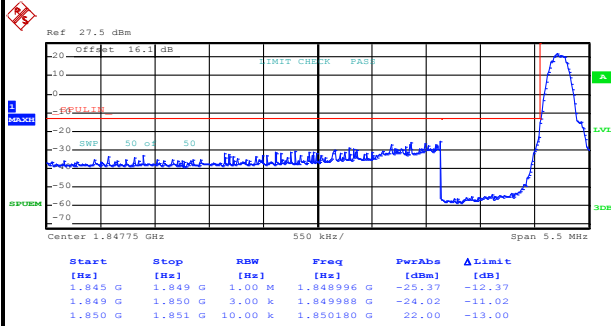

Date: 18.JAN.2017 12:11:49


Highest Band Edge

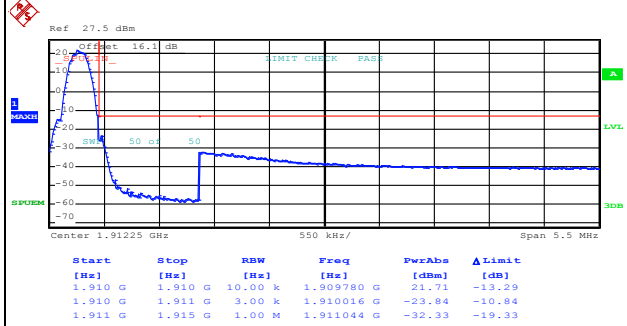

Date: 18.JAN.2017 12:13:16


GSM1900 (EDGE class 8)

Lowest Band Edge

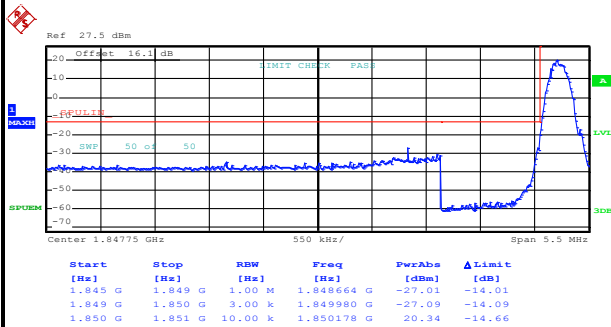

Date: 18.JAN.2017 12:26:01







Highest Band Edge

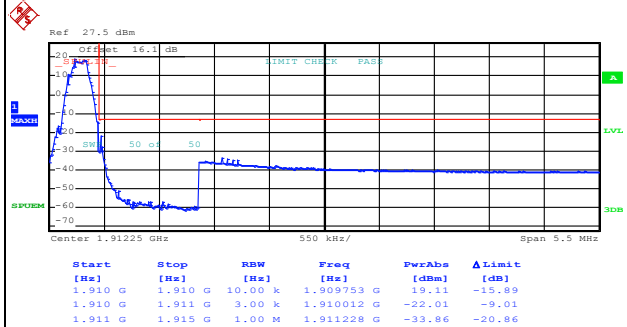


Date: 18.JAN.2017 12:27:29



Conducted Spurious Emission

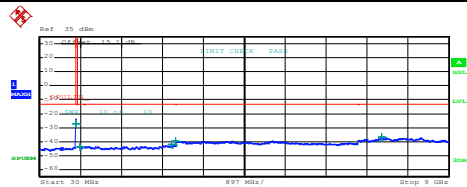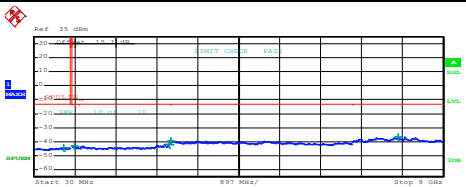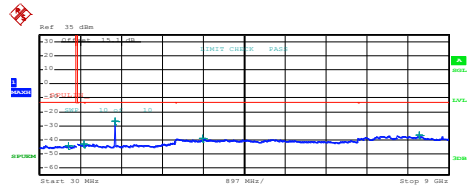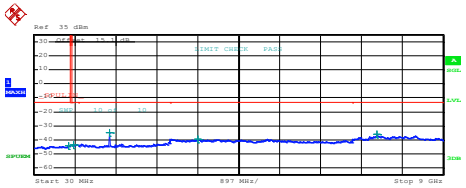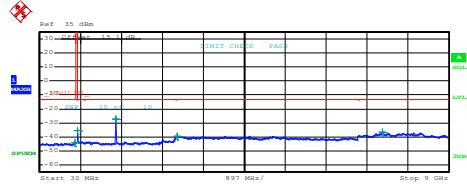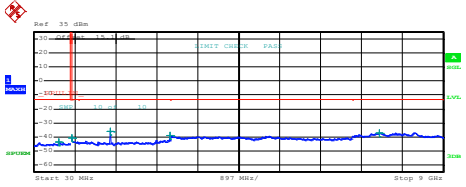GSM850 (GPRS class 8)		GSM850 (EDGE class 8)																																																																																					
Lowest Channel		Lowest Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1.00 M</td><td>819.802500 M</td><td>-27.17</td><td>-14.17</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1.00 M</td><td>908.831254 M</td><td>-43.49</td><td>-30.49</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1.00 M</td><td>2.918000 G</td><td>-42.08</td><td>-29.08</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1.00 M</td><td>3.008000 G</td><td>-39.52</td><td>-26.52</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1.00 M</td><td>7.530000 G</td><td>-36.81</td><td>-23.81</td></tr></table> Date: 18.JAN.2017 10:05:41		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1.00 M	819.802500 M	-27.17	-14.17	855,000 M	1,000 G	1.00 M	908.831254 M	-43.49	-30.49	1,000 G	3,000 G	1.00 M	2.918000 G	-42.08	-29.08	3,000 G	7,000 G	1.00 M	3.008000 G	-39.52	-26.52	7,000 G	9,000 G	1.00 M	7.530000 G	-36.81	-23.81	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1.00 M</td><td>819.802500 M</td><td>-27.17</td><td>-14.17</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1.00 M</td><td>914.341254 M</td><td>-43.05</td><td>-30.05</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1.00 M</td><td>2.988500 G</td><td>-41.91</td><td>-28.91</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1.00 M</td><td>3.029000 G</td><td>-39.56</td><td>-26.56</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1.00 M</td><td>8.016500 G</td><td>-36.54</td><td>-23.54</td></tr></table> Date: 18.JAN.2017 10:19:15		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1.00 M	819.802500 M	-27.17	-14.17	855,000 M	1,000 G	1.00 M	914.341254 M	-43.05	-30.05	1,000 G	3,000 G	1.00 M	2.988500 G	-41.91	-28.91	3,000 G	7,000 G	1.00 M	3.029000 G	-39.56	-26.56	7,000 G	9,000 G	1.00 M	8.016500 G	-36.54	-23.54
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1.00 M	819.802500 M	-27.17	-14.17																																																																																		
855,000 M	1,000 G	1.00 M	908.831254 M	-43.49	-30.49																																																																																		
1,000 G	3,000 G	1.00 M	2.918000 G	-42.08	-29.08																																																																																		
3,000 G	7,000 G	1.00 M	3.008000 G	-39.52	-26.52																																																																																		
7,000 G	9,000 G	1.00 M	7.530000 G	-36.81	-23.81																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1.00 M	819.802500 M	-27.17	-14.17																																																																																		
855,000 M	1,000 G	1.00 M	914.341254 M	-43.05	-30.05																																																																																		
1,000 G	3,000 G	1.00 M	2.988500 G	-41.91	-28.91																																																																																		
3,000 G	7,000 G	1.00 M	3.029000 G	-39.56	-26.56																																																																																		
7,000 G	9,000 G	1.00 M	8.016500 G	-36.54	-23.54																																																																																		
Middle Channel		Middle Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1.00 M</td><td>850.347500 M</td><td>-44.29</td><td>-31.29</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1.00 M</td><td>997.243500 M</td><td>-43.11</td><td>-30.11</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1.00 M</td><td>1.672500 G</td><td>-26.97</td><td>-13.97</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1.00 M</td><td>3.599000 G</td><td>-38.95</td><td>-25.95</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1.00 M</td><td>8.360500 G</td><td>-38.95</td><td>-23.95</td></tr></table> Date: 18.JAN.2017 10:06:27		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1.00 M	850.347500 M	-44.29	-31.29	855,000 M	1,000 G	1.00 M	997.243500 M	-43.11	-30.11	1,000 G	3,000 G	1.00 M	1.672500 G	-26.97	-13.97	3,000 G	7,000 G	1.00 M	3.599000 G	-38.95	-25.95	7,000 G	9,000 G	1.00 M	8.360500 G	-38.95	-23.95	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1.00 M</td><td>784.845000 M</td><td>-44.36</td><td>-31.36</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1.00 M</td><td>831.087500 M</td><td>-43.41</td><td>-30.41</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1.00 M</td><td>1.673000 G</td><td>-34.78</td><td>-21.78</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1.00 M</td><td>3.616000 G</td><td>-39.69</td><td>-26.69</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1.00 M</td><td>7.350000 G</td><td>-36.22</td><td>-23.22</td></tr></table> Date: 18.JAN.2017 10:20:01		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1.00 M	784.845000 M	-44.36	-31.36	855,000 M	1,000 G	1.00 M	831.087500 M	-43.41	-30.41	1,000 G	3,000 G	1.00 M	1.673000 G	-34.78	-21.78	3,000 G	7,000 G	1.00 M	3.616000 G	-39.69	-26.69	7,000 G	9,000 G	1.00 M	7.350000 G	-36.22	-23.22
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1.00 M	850.347500 M	-44.29	-31.29																																																																																		
855,000 M	1,000 G	1.00 M	997.243500 M	-43.11	-30.11																																																																																		
1,000 G	3,000 G	1.00 M	1.672500 G	-26.97	-13.97																																																																																		
3,000 G	7,000 G	1.00 M	3.599000 G	-38.95	-25.95																																																																																		
7,000 G	9,000 G	1.00 M	8.360500 G	-38.95	-23.95																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1.00 M	784.845000 M	-44.36	-31.36																																																																																		
855,000 M	1,000 G	1.00 M	831.087500 M	-43.41	-30.41																																																																																		
1,000 G	3,000 G	1.00 M	1.673000 G	-34.78	-21.78																																																																																		
3,000 G	7,000 G	1.00 M	3.616000 G	-39.69	-26.69																																																																																		
7,000 G	9,000 G	1.00 M	7.350000 G	-36.22	-23.22																																																																																		
Highest Channel		Highest Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1.00 M</td><td>805.582500 M</td><td>-44.19</td><td>-31.19</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1.00 M</td><td>855.036250 M</td><td>-35.73</td><td>-22.73</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1.00 M</td><td>1.697500 G</td><td>-27.23</td><td>-14.23</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1.00 M</td><td>3.036000 G</td><td>-39.50</td><td>-26.50</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1.00 M</td><td>7.542000 G</td><td>-36.38</td><td>-23.38</td></tr></table> Date: 18.JAN.2017 10:07:13		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1.00 M	805.582500 M	-44.19	-31.19	855,000 M	1,000 G	1.00 M	855.036250 M	-35.73	-22.73	1,000 G	3,000 G	1.00 M	1.697500 G	-27.23	-14.23	3,000 G	7,000 G	1.00 M	3.036000 G	-39.50	-26.50	7,000 G	9,000 G	1.00 M	7.542000 G	-36.38	-23.38	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1.00 M</td><td>871.742500 M</td><td>-43.91</td><td>-30.91</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1.00 M</td><td>855.108750 M</td><td>-40.46</td><td>-27.46</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1.00 M</td><td>1.697500 G</td><td>-35.85</td><td>-22.85</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1.00 M</td><td>3.000000 G</td><td>-39.05</td><td>-26.05</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1.00 M</td><td>7.595500 G</td><td>-37.03</td><td>-24.03</td></tr></table> Date: 18.JAN.2017 10:20:47		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1.00 M	871.742500 M	-43.91	-30.91	855,000 M	1,000 G	1.00 M	855.108750 M	-40.46	-27.46	1,000 G	3,000 G	1.00 M	1.697500 G	-35.85	-22.85	3,000 G	7,000 G	1.00 M	3.000000 G	-39.05	-26.05	7,000 G	9,000 G	1.00 M	7.595500 G	-37.03	-24.03
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1.00 M	805.582500 M	-44.19	-31.19																																																																																		
855,000 M	1,000 G	1.00 M	855.036250 M	-35.73	-22.73																																																																																		
1,000 G	3,000 G	1.00 M	1.697500 G	-27.23	-14.23																																																																																		
3,000 G	7,000 G	1.00 M	3.036000 G	-39.50	-26.50																																																																																		
7,000 G	9,000 G	1.00 M	7.542000 G	-36.38	-23.38																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1.00 M	871.742500 M	-43.91	-30.91																																																																																		
855,000 M	1,000 G	1.00 M	855.108750 M	-40.46	-27.46																																																																																		
1,000 G	3,000 G	1.00 M	1.697500 G	-35.85	-22.85																																																																																		
3,000 G	7,000 G	1.00 M	3.000000 G	-39.05	-26.05																																																																																		
7,000 G	9,000 G	1.00 M	7.595500 G	-37.03	-24.03																																																																																		

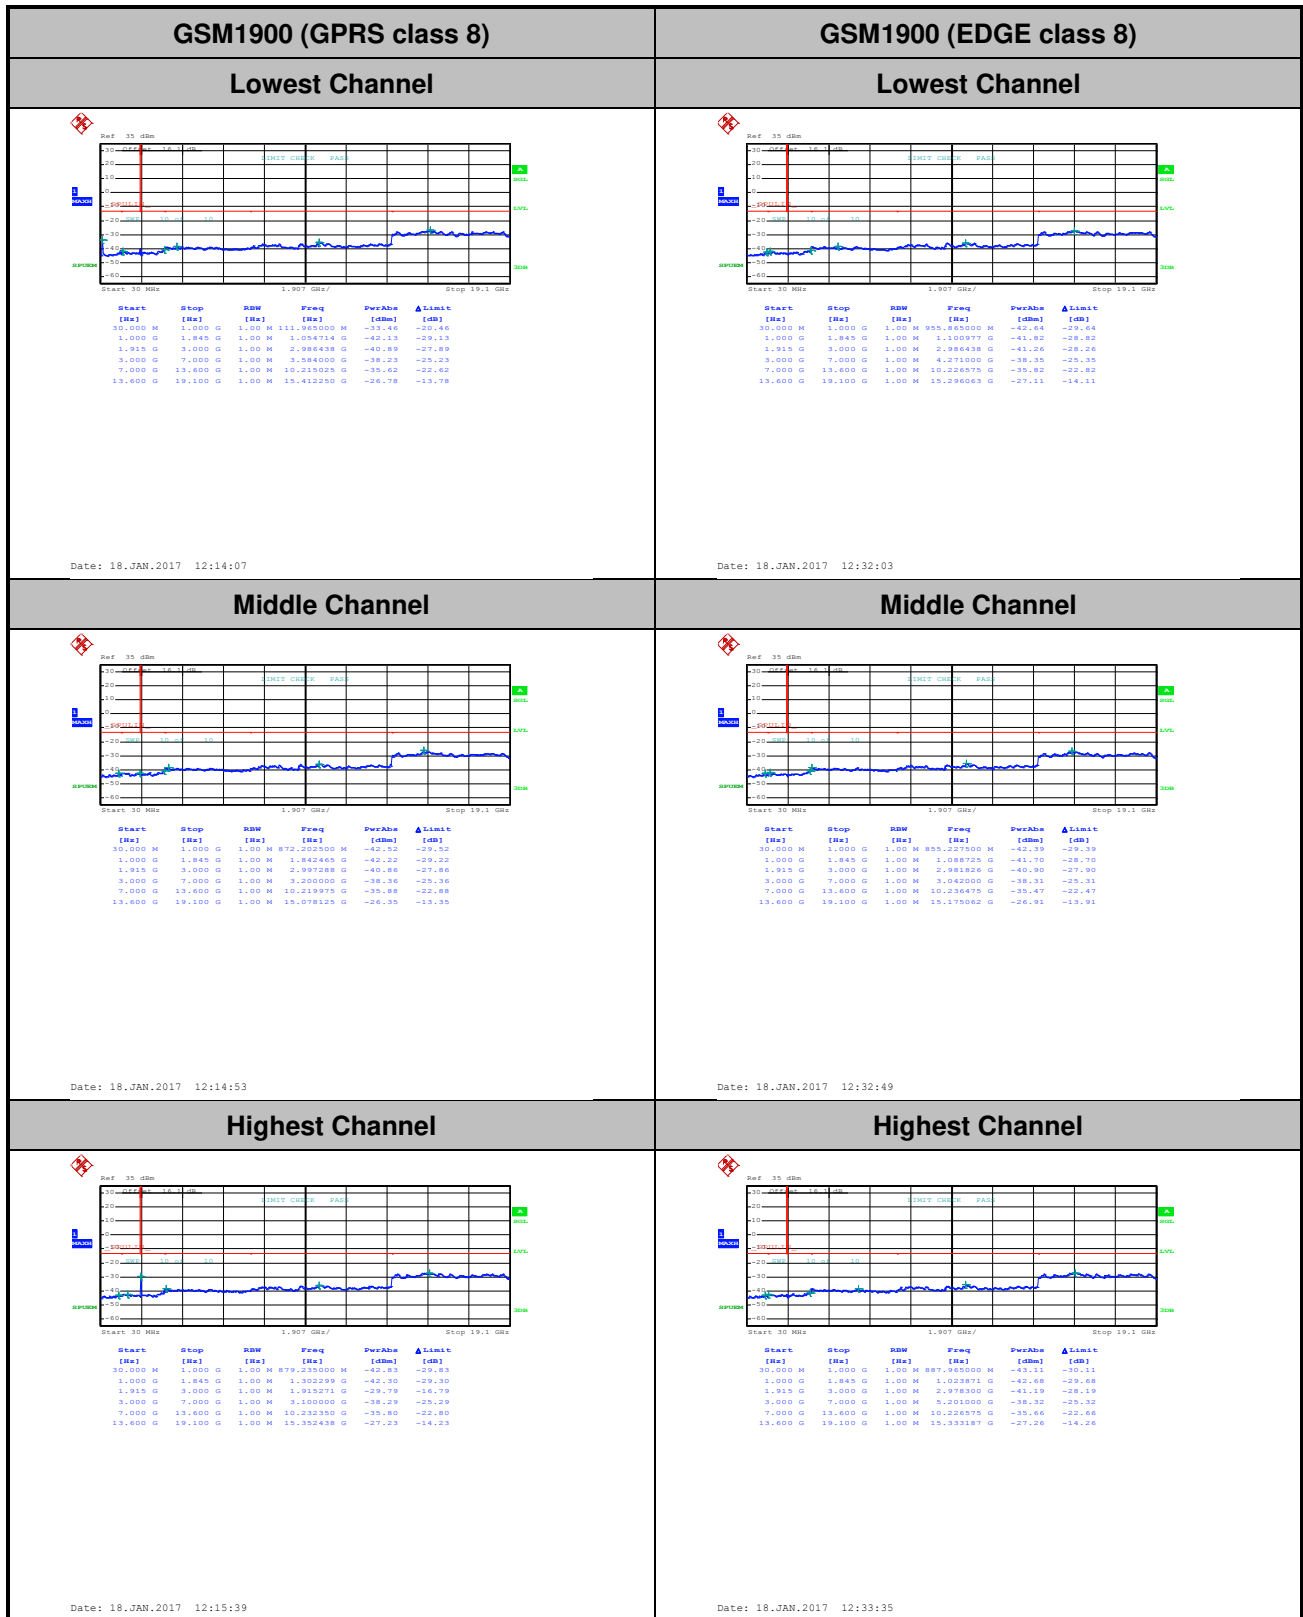

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0048	0.0024	PASS
40	Normal Voltage	0.0012	0.0012	
30	Normal Voltage	0.0036	0.0000	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0036	0.0024	
0	Normal Voltage	0.0012	0.0012	
-10	Normal Voltage	0.0072	0.0012	
-20	Normal Voltage	0.0096	0.0000	
-30	Normal Voltage	0.0072	0.0024	
20	Maximum Voltage	0.0048	0.0036	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0012	0.0000	

Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0021	0.0005	PASS
40	Normal Voltage	0.0000	0.0032	
30	Normal Voltage	0.0016	0.0021	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0021	0.0005	
0	Normal Voltage	0.0016	0.0170	
-10	Normal Voltage	0.0011	0.0207	
-20	Normal Voltage	0.0005	0.0202	
-30	Normal Voltage	0.0011	0.0181	
20	Maximum Voltage	0.0016	0.0016	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0011	0.0005	

Note:

1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.1 V
2. The frequency fundamental emissions stay within the authorized frequency block.









A3. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	2.00	2.84	2.36	PASS
Middle CH	2.28	2.76	2.08	
Highest CH	2.08	2.60	2.48	

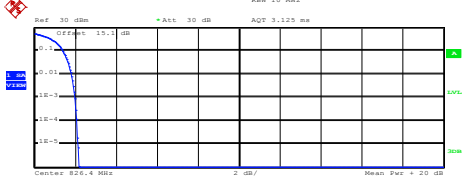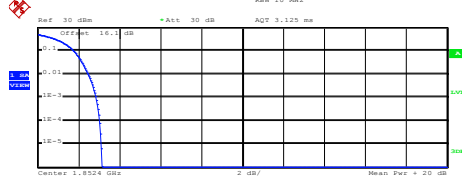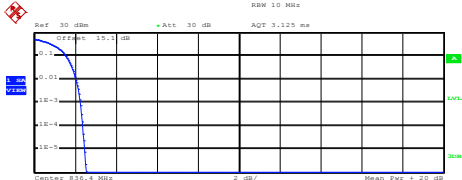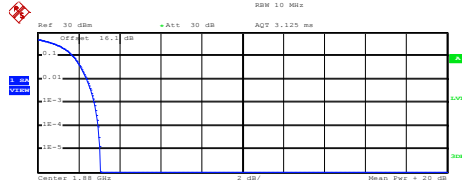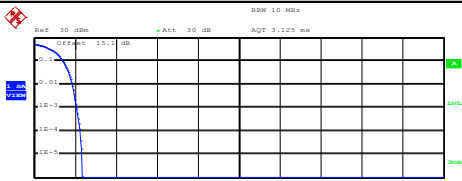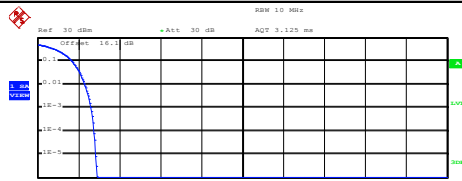


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																
Lowest Channel	Lowest Channel																
 Center 826.4 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.77 dBm Peak 25.95 dBm Crest 2.18 dB <table><tr><td>10 %</td><td>1.40 dB</td></tr><tr><td>1 %</td><td>1.80 dB</td></tr><tr><td>.1 %</td><td>2.00 dB</td></tr><tr><td>.01 %</td><td>2.08 dB</td></tr></table> Date: 18.JAN.2017 13:26:28	10 %	1.40 dB	1 %	1.80 dB	.1 %	2.00 dB	.01 %	2.08 dB	 Center 1.8524 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.93 dBm Peak 26.09 dBm Crest 3.16 dB <table><tr><td>10 %</td><td>1.76 dB</td></tr><tr><td>1 %</td><td>2.48 dB</td></tr><tr><td>.1 %</td><td>2.84 dB</td></tr><tr><td>.01 %</td><td>3.04 dB</td></tr></table> Date: 18.JAN.2017 12:51:48	10 %	1.76 dB	1 %	2.48 dB	.1 %	2.84 dB	.01 %	3.04 dB
10 %	1.40 dB																
1 %	1.80 dB																
.1 %	2.00 dB																
.01 %	2.08 dB																
10 %	1.76 dB																
1 %	2.48 dB																
.1 %	2.84 dB																
.01 %	3.04 dB																
Middle Channel	Middle Channel																
 Center 836.4 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.77 dBm Peak 26.30 dBm Crest 2.53 dB <table><tr><td>10 %</td><td>1.56 dB</td></tr><tr><td>1 %</td><td>2.04 dB</td></tr><tr><td>.1 %</td><td>2.28 dB</td></tr><tr><td>.01 %</td><td>2.40 dB</td></tr></table> Date: 18.JAN.2017 13:26:40	10 %	1.56 dB	1 %	2.04 dB	.1 %	2.28 dB	.01 %	2.40 dB	 Center 1.88 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.95 dBm Peak 26.02 dBm Crest 3.07 dB <table><tr><td>10 %</td><td>1.72 dB</td></tr><tr><td>1 %</td><td>2.40 dB</td></tr><tr><td>.1 %</td><td>2.76 dB</td></tr><tr><td>.01 %</td><td>2.96 dB</td></tr></table> Date: 18.JAN.2017 12:51:56	10 %	1.72 dB	1 %	2.40 dB	.1 %	2.76 dB	.01 %	2.96 dB
10 %	1.56 dB																
1 %	2.04 dB																
.1 %	2.28 dB																
.01 %	2.40 dB																
10 %	1.72 dB																
1 %	2.40 dB																
.1 %	2.76 dB																
.01 %	2.96 dB																
Highest Channel	Highest Channel																
 Center 846.6 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.67 dBm Peak 26.02 dBm Crest 2.35 dB <table><tr><td>10 %</td><td>1.40 dB</td></tr><tr><td>1 %</td><td>1.88 dB</td></tr><tr><td>.1 %</td><td>2.08 dB</td></tr><tr><td>.01 %</td><td>2.24 dB</td></tr></table> Date: 18.JAN.2017 13:27:00	10 %	1.40 dB	1 %	1.88 dB	.1 %	2.08 dB	.01 %	2.24 dB	 Center 1.9076 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.84 dBm Peak 25.73 dBm Crest 2.90 dB <table><tr><td>10 %</td><td>1.68 dB</td></tr><tr><td>1 %</td><td>2.32 dB</td></tr><tr><td>.1 %</td><td>2.60 dB</td></tr><tr><td>.01 %</td><td>2.76 dB</td></tr></table> Date: 18.JAN.2017 12:52:04	10 %	1.68 dB	1 %	2.32 dB	.1 %	2.60 dB	.01 %	2.76 dB
10 %	1.40 dB																
1 %	1.88 dB																
.1 %	2.08 dB																
.01 %	2.24 dB																
10 %	1.68 dB																
1 %	2.32 dB																
.1 %	2.60 dB																
.01 %	2.76 dB																




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

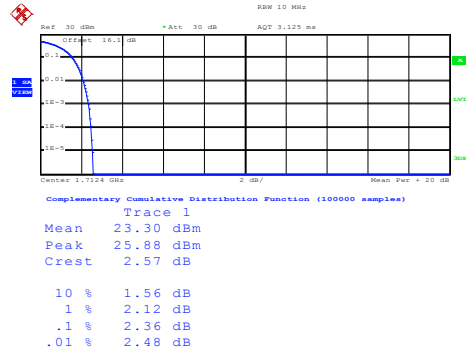


Date: 18.JAN.2017 13:05:04

Middle Channel

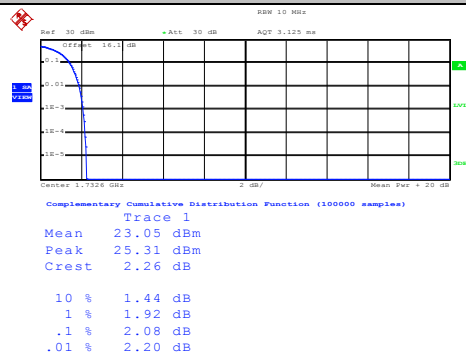

Date: 18.JAN.2017 13:05:14


Highest Channel

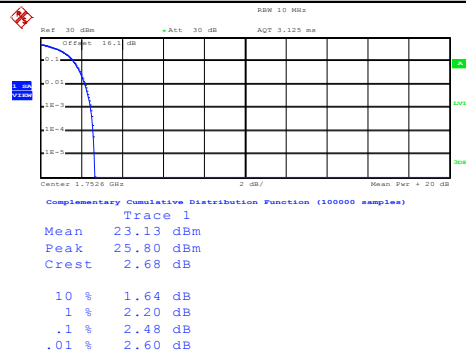


Date: 18.JAN.2017 13:05:22

**26dB Bandwidth**


Mode	WCDMA Band V 26dB BW(MHz)	WCDMA Band II 26dB BW(MHz)	WCDMA Band IV 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.94	4.84	4.88
Middle CH	4.92	4.88	4.95
Highest CH	4.93	4.85	4.88

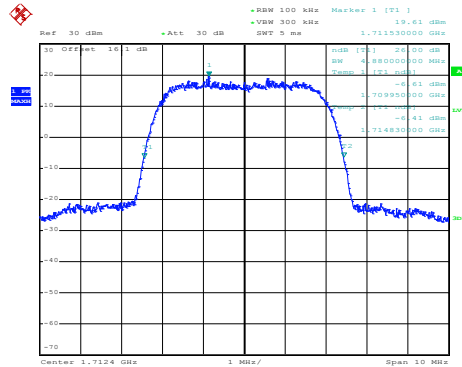WCDMA Band IV (RMC 12.2Kbps)
Lowest Channel


Date: 18.JAN.2017 12:52:48

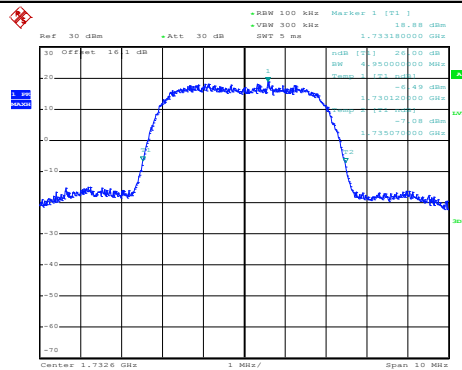Middle Channel


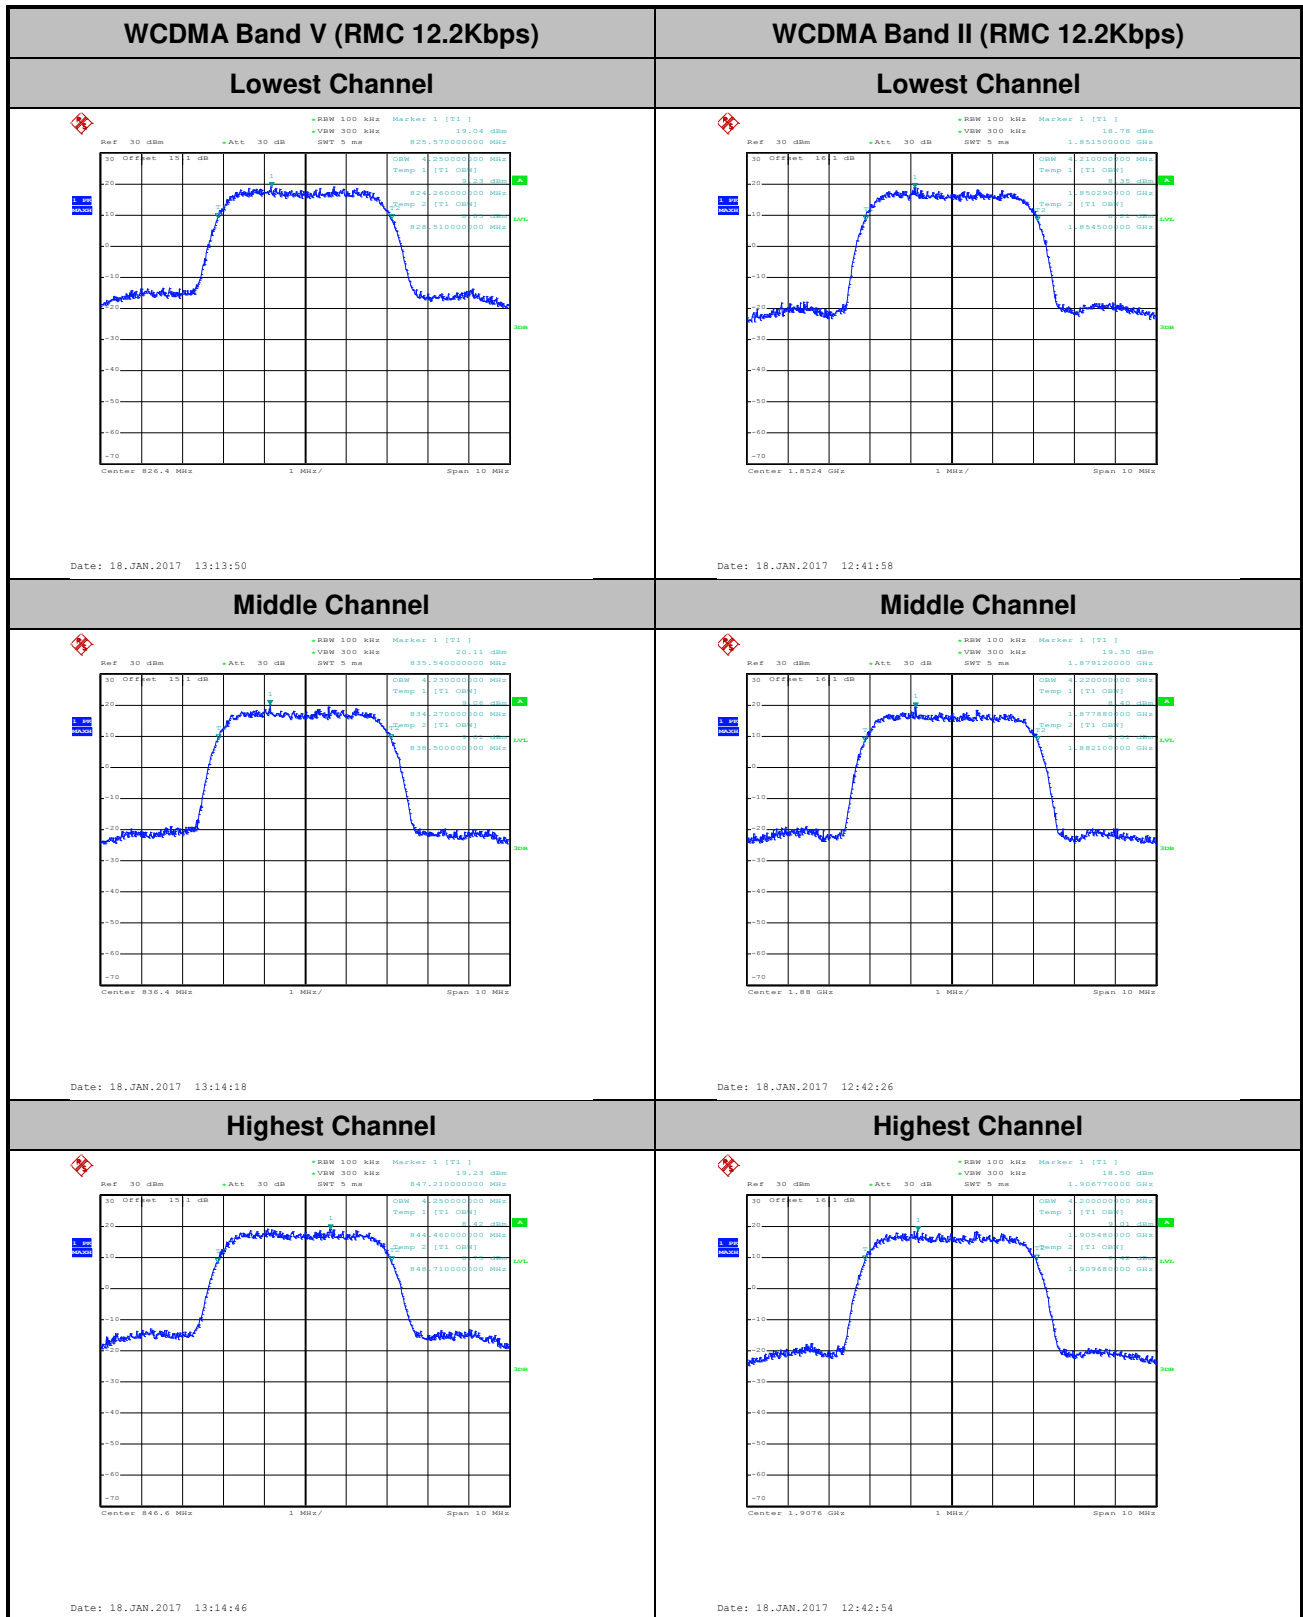
Date: 18.JAN.2017 12:53:16

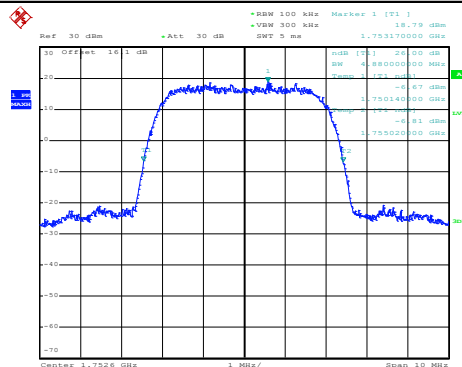
Highest Channel


Date: 18.JAN.2017 12:53:44


**Occupied Bandwidth**

Mode	WCDMA Band V 99%OBW(MHz)	WCDMA Band II 99%OBW(MHz)	WCDMA Band IV 99%OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.25	4.21	4.22
Middle CH	4.23	4.22	4.23
Highest CH	4.25	4.20	4.21

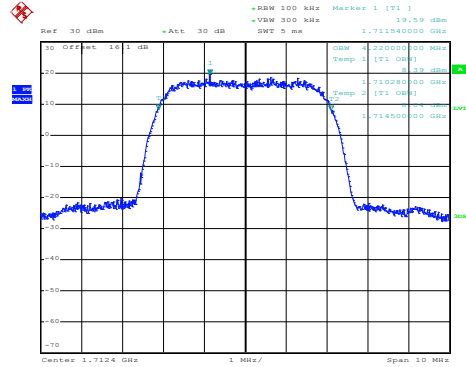


WCDMA Band IV (RMC 12.2Kbps)
Lowest Channel


Date: 18.JAN.2017 12:55:02

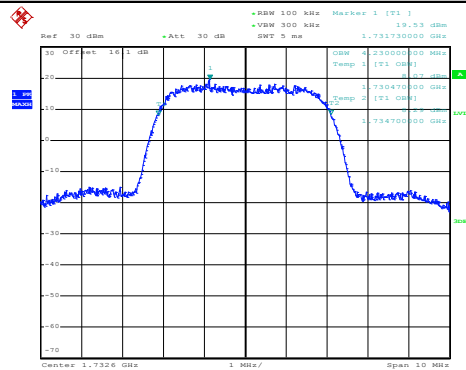Middle Channel


Date: 18.JAN.2017 12:55:30

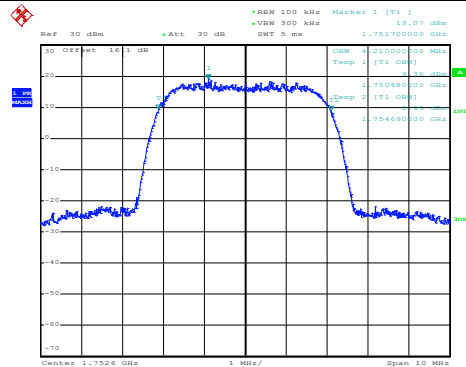Highest Channel


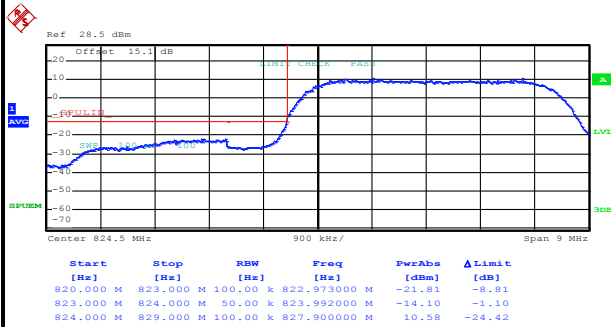
Date: 18.JAN.2017 12:55:58



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge



Date: 18.JAN.2017 13:17:29


Highest Band Edge

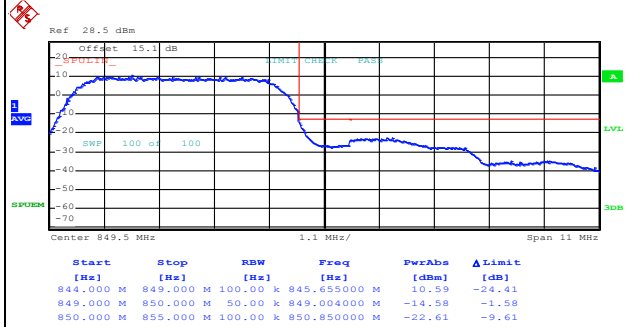

Date: 18.JAN.2017 13:20:11


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

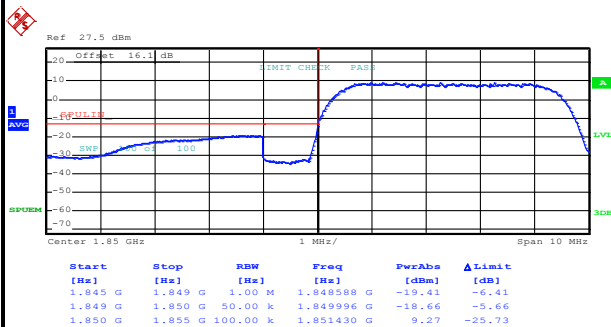

Date: 18.JAN.2017 12:45:38

Highest Band Edge

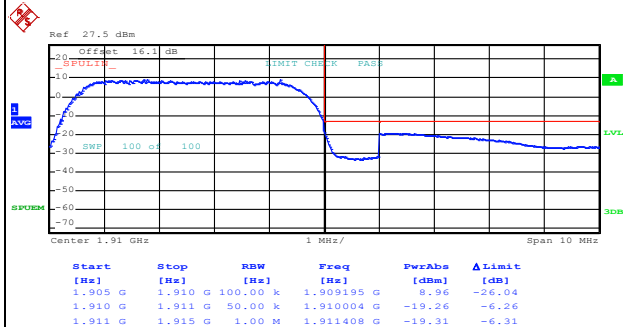


Date: 18.JAN.2017 12:48:20




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

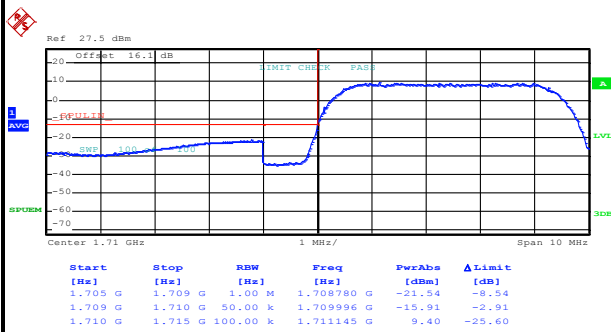

Date: 18.JAN.2017 12:58:50







Highest Band Edge

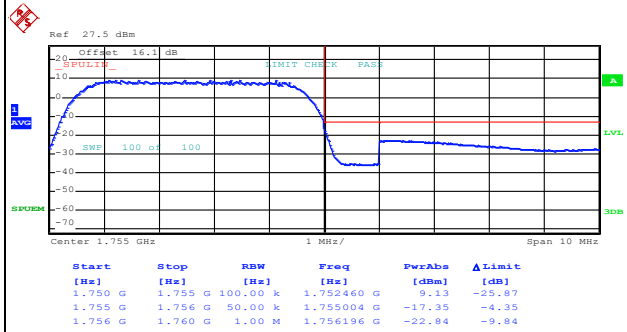

Date: 18.JAN.2017 13:01:33




Conducted Spurious Emission

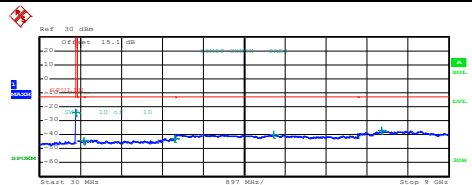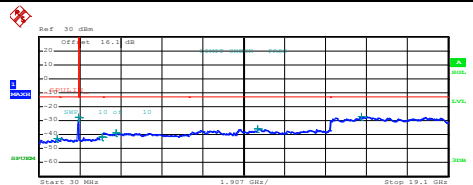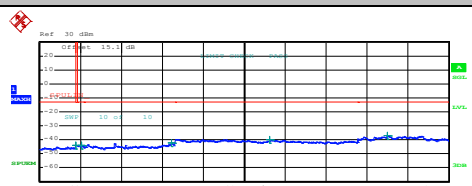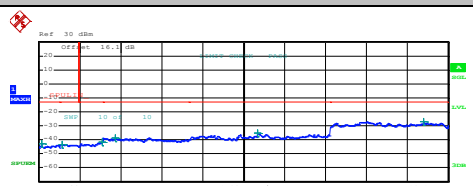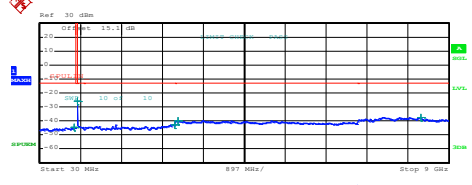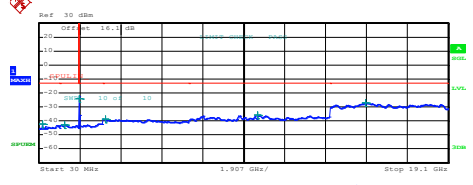WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																																																																																										
Lowest Channel	Lowest Channel																																																																																										
<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbs</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>820,000 M</td><td>1,000 M</td><td>819,407500 M</td><td>-44.00</td><td>-11.00</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,000 M</td><td>990,865000 M</td><td>-44.38</td><td>-31.38</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,000 M</td><td>2,985000 G</td><td>-42.63</td><td>-29.63</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>5,157000 G</td><td>-39.87</td><td>-26.87</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,000 M</td><td>7,536000 G</td><td>-37.02</td><td>-24.02</td></tr></tbody></table> Date: 18.JAN.2017 13:23:10	Start	Stop	RBW	Freq	PerAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	820,000 M	1,000 M	819,407500 M	-44.00	-11.00	855,000 M	1,000 G	1,000 M	990,865000 M	-44.38	-31.38	1,000 G	3,000 G	1,000 M	2,985000 G	-42.63	-29.63	3,000 G	7,000 G	1,000 M	5,157000 G	-39.87	-26.87	7,000 G	9,000 G	1,000 M	7,536000 G	-37.02	-24.02	<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbs</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>1,000 G</td><td>1,000 M</td><td>850,135000 M</td><td>-42.97</td><td>-29.97</td></tr><tr><td>1,000 G</td><td>1,845 G</td><td>1,000 M</td><td>1,844155 G</td><td>-27.46</td><td>-14.46</td></tr><tr><td>1,915 G</td><td>3,000 G</td><td>1,000 M</td><td>2,997956 G</td><td>-41.97</td><td>-28.97</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,606000 G</td><td>-38.63</td><td>-25.63</td></tr><tr><td>7,000 G</td><td>13,600 G</td><td>1,000 M</td><td>10,214200 G</td><td>-35.81</td><td>-22.81</td></tr><tr><td>13,600 G</td><td>19,100 G</td><td>1,000 M</td><td>15,043125 G</td><td>-27.07</td><td>-14.07</td></tr></tbody></table> Date: 18.JAN.2017 12:49:22	Start	Stop	RBW	Freq	PerAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	1,000 G	1,000 M	850,135000 M	-42.97	-29.97	1,000 G	1,845 G	1,000 M	1,844155 G	-27.46	-14.46	1,915 G	3,000 G	1,000 M	2,997956 G	-41.97	-28.97	3,000 G	7,000 G	1,000 M	3,606000 G	-38.63	-25.63	7,000 G	13,600 G	1,000 M	10,214200 G	-35.81	-22.81	13,600 G	19,100 G	1,000 M	15,043125 G	-27.07	-14.07
Start	Stop	RBW	Freq	PerAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
30,000 M	820,000 M	1,000 M	819,407500 M	-44.00	-11.00																																																																																						
855,000 M	1,000 G	1,000 M	990,865000 M	-44.38	-31.38																																																																																						
1,000 G	3,000 G	1,000 M	2,985000 G	-42.63	-29.63																																																																																						
3,000 G	7,000 G	1,000 M	5,157000 G	-39.87	-26.87																																																																																						
7,000 G	9,000 G	1,000 M	7,536000 G	-37.02	-24.02																																																																																						
Start	Stop	RBW	Freq	PerAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
30,000 M	1,000 G	1,000 M	850,135000 M	-42.97	-29.97																																																																																						
1,000 G	1,845 G	1,000 M	1,844155 G	-27.46	-14.46																																																																																						
1,915 G	3,000 G	1,000 M	2,997956 G	-41.97	-28.97																																																																																						
3,000 G	7,000 G	1,000 M	3,606000 G	-38.63	-25.63																																																																																						
7,000 G	13,600 G	1,000 M	10,214200 G	-35.81	-22.81																																																																																						
13,600 G	19,100 G	1,000 M	15,043125 G	-27.07	-14.07																																																																																						
Middle Channel	Middle Channel																																																																																										
<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbs</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>820,000 M</td><td>1,000 M</td><td>819,407500 M</td><td>-44.26</td><td>-31.26</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,000 M</td><td>949,503757 M</td><td>-44.09</td><td>-31.09</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,000 M</td><td>2,915000 G</td><td>-42.49</td><td>-29.49</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>5,080000 G</td><td>-39.70</td><td>-26.70</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,000 M</td><td>7,685000 G</td><td>-37.05</td><td>-24.05</td></tr></tbody></table> Date: 18.JAN.2017 13:23:56	Start	Stop	RBW	Freq	PerAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	820,000 M	1,000 M	819,407500 M	-44.26	-31.26	855,000 M	1,000 G	1,000 M	949,503757 M	-44.09	-31.09	1,000 G	3,000 G	1,000 M	2,915000 G	-42.49	-29.49	3,000 G	7,000 G	1,000 M	5,080000 G	-39.70	-26.70	7,000 G	9,000 G	1,000 M	7,685000 G	-37.05	-24.05	<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbs</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>1,000 G</td><td>1,000 M</td><td>142,762500 M</td><td>-42.69</td><td>-29.69</td></tr><tr><td>1,000 G</td><td>1,845 G</td><td>1,000 M</td><td>1,104358 G</td><td>-43.23</td><td>-30.23</td></tr><tr><td>1,915 G</td><td>3,000 G</td><td>1,000 M</td><td>2,975045 G</td><td>-41.70</td><td>-28.70</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,591000 G</td><td>-38.90</td><td>-25.90</td></tr><tr><td>7,000 G</td><td>13,600 G</td><td>1,000 M</td><td>10,220800 G</td><td>-35.35</td><td>-22.35</td></tr><tr><td>13,600 G</td><td>19,100 G</td><td>1,000 M</td><td>17,969750 G</td><td>-27.20</td><td>-14.20</td></tr></tbody></table> Date: 18.JAN.2017 12:50:08	Start	Stop	RBW	Freq	PerAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	1,000 G	1,000 M	142,762500 M	-42.69	-29.69	1,000 G	1,845 G	1,000 M	1,104358 G	-43.23	-30.23	1,915 G	3,000 G	1,000 M	2,975045 G	-41.70	-28.70	3,000 G	7,000 G	1,000 M	3,591000 G	-38.90	-25.90	7,000 G	13,600 G	1,000 M	10,220800 G	-35.35	-22.35	13,600 G	19,100 G	1,000 M	17,969750 G	-27.20	-14.20
Start	Stop	RBW	Freq	PerAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
30,000 M	820,000 M	1,000 M	819,407500 M	-44.26	-31.26																																																																																						
855,000 M	1,000 G	1,000 M	949,503757 M	-44.09	-31.09																																																																																						
1,000 G	3,000 G	1,000 M	2,915000 G	-42.49	-29.49																																																																																						
3,000 G	7,000 G	1,000 M	5,080000 G	-39.70	-26.70																																																																																						
7,000 G	9,000 G	1,000 M	7,685000 G	-37.05	-24.05																																																																																						
Start	Stop	RBW	Freq	PerAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
30,000 M	1,000 G	1,000 M	142,762500 M	-42.69	-29.69																																																																																						
1,000 G	1,845 G	1,000 M	1,104358 G	-43.23	-30.23																																																																																						
1,915 G	3,000 G	1,000 M	2,975045 G	-41.70	-28.70																																																																																						
3,000 G	7,000 G	1,000 M	3,591000 G	-38.90	-25.90																																																																																						
7,000 G	13,600 G	1,000 M	10,220800 G	-35.35	-22.35																																																																																						
13,600 G	19,100 G	1,000 M	17,969750 G	-27.20	-14.20																																																																																						
Highest Channel	Highest Channel																																																																																										
<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbs</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>820,000 M</td><td>1,000 M</td><td>789,585000 M</td><td>-44.57</td><td>-31.57</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,000 M</td><td>855,145000 M</td><td>-26.03</td><td>-13.03</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,000 M</td><td>2,997500 G</td><td>-42.73</td><td>-29.73</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,062000 G</td><td>-39.84</td><td>-26.84</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,000 M</td><td>8,384500 G</td><td>-37.30</td><td>-24.30</td></tr></tbody></table> Date: 18.JAN.2017 13:24:41	Start	Stop	RBW	Freq	PerAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	820,000 M	1,000 M	789,585000 M	-44.57	-31.57	855,000 M	1,000 G	1,000 M	855,145000 M	-26.03	-13.03	1,000 G	3,000 G	1,000 M	2,997500 G	-42.73	-29.73	3,000 G	7,000 G	1,000 M	3,062000 G	-39.84	-26.84	7,000 G	9,000 G	1,000 M	8,384500 G	-37.30	-24.30	<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbs</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30,000 M</td><td>1,000 G</td><td>1,000 M</td><td>168,225000 M</td><td>-42.36</td><td>-29.36</td></tr><tr><td>1,000 G</td><td>1,845 G</td><td>1,000 M</td><td>1,207448 G</td><td>-42.76</td><td>-29.76</td></tr><tr><td>1,915 G</td><td>3,000 G</td><td>1,000 M</td><td>1,915371 G</td><td>-24.31</td><td>-11.31</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,109000 G</td><td>-38.61</td><td>-25.61</td></tr><tr><td>7,000 G</td><td>13,600 G</td><td>1,000 M</td><td>10,218325 G</td><td>-35.60</td><td>-22.60</td></tr><tr><td>13,600 G</td><td>19,100 G</td><td>1,000 M</td><td>15,243125 G</td><td>-27.17</td><td>-14.17</td></tr></tbody></table> Date: 18.JAN.2017 12:50:54	Start	Stop	RBW	Freq	PerAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	1,000 G	1,000 M	168,225000 M	-42.36	-29.36	1,000 G	1,845 G	1,000 M	1,207448 G	-42.76	-29.76	1,915 G	3,000 G	1,000 M	1,915371 G	-24.31	-11.31	3,000 G	7,000 G	1,000 M	3,109000 G	-38.61	-25.61	7,000 G	13,600 G	1,000 M	10,218325 G	-35.60	-22.60	13,600 G	19,100 G	1,000 M	15,243125 G	-27.17	-14.17
Start	Stop	RBW	Freq	PerAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
30,000 M	820,000 M	1,000 M	789,585000 M	-44.57	-31.57																																																																																						
855,000 M	1,000 G	1,000 M	855,145000 M	-26.03	-13.03																																																																																						
1,000 G	3,000 G	1,000 M	2,997500 G	-42.73	-29.73																																																																																						
3,000 G	7,000 G	1,000 M	3,062000 G	-39.84	-26.84																																																																																						
7,000 G	9,000 G	1,000 M	8,384500 G	-37.30	-24.30																																																																																						
Start	Stop	RBW	Freq	PerAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
30,000 M	1,000 G	1,000 M	168,225000 M	-42.36	-29.36																																																																																						
1,000 G	1,845 G	1,000 M	1,207448 G	-42.76	-29.76																																																																																						
1,915 G	3,000 G	1,000 M	1,915371 G	-24.31	-11.31																																																																																						
3,000 G	7,000 G	1,000 M	3,109000 G	-38.61	-25.61																																																																																						
7,000 G	13,600 G	1,000 M	10,218325 G	-35.60	-22.60																																																																																						
13,600 G	19,100 G	1,000 M	15,243125 G	-27.17	-14.17																																																																																						




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

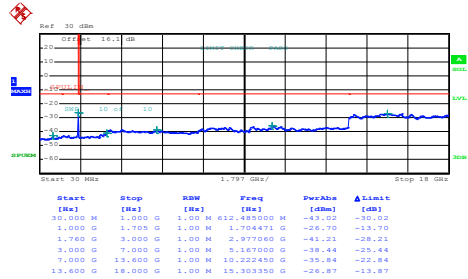


Date: 18.JAN.2017 13:03:23

Middle Channel

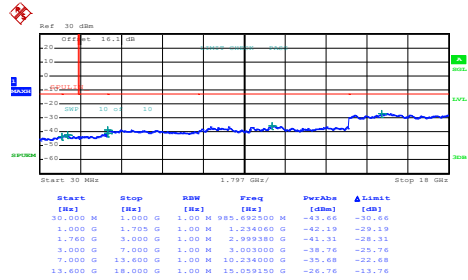

Date: 18.JAN.2017 13:04:09

Highest Channel

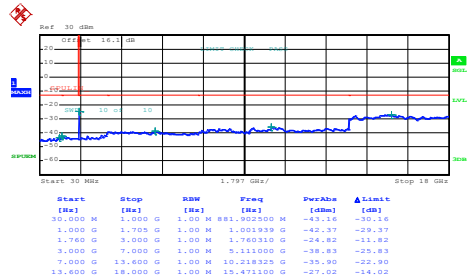

Date: 18.JAN.2017 13:04:55

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0024	PASS
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0048	
0	Normal Voltage	0.0024	
-10	Normal Voltage	0.0000	
-20	Normal Voltage	0.0036	
-30	Normal Voltage	0.0024	
20	Maximum Voltage	0.0000	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0036	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0011	PASS
40	Normal Voltage	0.0021	
30	Normal Voltage	0.0011	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0080	
0	Normal Voltage	0.0096	
-10	Normal Voltage	0.0101	
-20	Normal Voltage	0.0117	
-30	Normal Voltage	0.0112	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0021	

Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0023	PASS
40	Normal Voltage	0.0000	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0006	
0	Normal Voltage	0.0040	
-10	Normal Voltage	0.0017	
-20	Normal Voltage	0.0063	
-30	Normal Voltage	0.0023	
20	Maximum Voltage	0.0023	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0012	

Note:

1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.1 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of ERP/EIRP and Radiated Test

ERP/EIRP

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850 GPRS class 8 (GT - LC = -3 dB)	33.83	2.4155	28.68	0.7379
Middle		33.86	2.4322	28.71	0.7430
Highest		33.98	2.5003	28.83	0.7638
Lowest	GSM850 EDGE class 8 (GT - LC = -3 dB)	27.51	0.5636	22.36	0.1722
Middle		27.55	0.5689	22.40	0.1738
Highest		27.50	0.5623	22.35	0.1718
Lowest	WCDMA Band V AMR 12.2Kbps (GT - LC = -3 dB)	24.34	0.2716	19.19	0.0830
Middle		24.38	0.2742	19.23	0.0838
Highest		24.28	0.2679	19.13	0.0818
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GPRS class 8 (GT - LC = -1.1 dB)	31.00	1.2589	29.90	0.9772
Middle		30.80	1.2023	29.70	0.9333
Highest		30.92	1.2359	29.82	0.9594
Lowest	GSM1900 EDGE class 8 (GT - LC = -1.1 dB)	26.50	0.4467	25.40	0.3467
Middle		26.53	0.4498	25.43	0.3491
Highest		26.62	0.4592	25.52	0.3565
Lowest	WCDMA Band II AMR 12.2Kbps (GT - LC = -1.1 dB)	23.88	0.2443	22.78	0.1897
Middle		23.87	0.2438	22.77	0.1892
Highest		23.88	0.2443	22.78	0.1897
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV AMR 12.2Kbps (GT - LC = 0.2 dB)	23.99	0.2506	24.19	0.2624
Middle		23.85	0.2427	24.05	0.2541
Highest		23.82	0.2410	24.02	0.2523
Limit	EIRP < 1W	Result		PASS	

**Radiated Spurious Emission**

GSM850 (GPRS class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-47.18	-13	-34.18	-34.72	-48.94	0.98	4.89	H
	2472	-56.86	-13	-43.86	-49.92	-58.74	1.28	5.32	H
	4120	-64.81	-13	-51.81	-59.98	-69.45	1.83	8.62	H
	1648	-47.48	-13	-34.48	-35.55	-49.24	0.98	4.89	V
	2472	-55.26	-13	-42.26	-48.66	-57.14	1.28	5.32	V
	4120	-65.27	-13	-52.27	-60.6	-69.91	1.83	8.62	V
Middle	1672	-38.97	-13	-25.97	-26.88	-40.65	0.99	4.82	H
	2512	-56.82	-13	-43.82	-49.89	-58.79	1.29	5.41	H
	4184	-61.77	-13	-48.77	-57.58	-66.39	1.87	8.64	H
	1672	-40.62	-13	-27.62	-28.95	-42.3	0.99	4.82	H
	2512	-57.16	-13	-44.16	-50.76	-59.13	1.29	5.41	H
	4184	-62.66	-13	-49.66	-58.57	-67.28	1.87	8.64	H
Highest	1696	-36.34	-13	-23.34	-24.38	-37.94	1.00	4.75	H
	2544	-56.88	-13	-43.88	-50.06	-58.86	1.30	5.44	H
	3392	-62.94	-13	-49.94	-58.43	-66.74	1.57	7.52	H
	1696	-36.96	-13	-23.96	-25.43	-38.56	1.00	4.75	V
	2544	-56.08	-13	-43.08	-49.76	-58.06	1.30	5.44	V
	3392	-64.54	-13	-51.54	-60.11	-68.34	1.57	7.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM850 (EDGE class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-42.27	-13	-29.27	-29.89	-44.03	0.98	4.89	H
	2474	-66.37	-13	-53.37	-59.4	-68.26	1.28	5.32	H
	3298	-65.76	-13	-52.76	-60.8	-69.18	1.54	7.11	H
	1648	-42.55	-13	-29.55	-30.63	-44.31	0.98	4.89	V
	2474	-66.28	-13	-53.28	-59.69	-68.17	1.28	5.32	V
	3298	-65.34	-13	-52.34	-60.8	-68.76	1.54	7.11	V
Middle	1672	-34.96	-13	-21.96	-22.88	-36.64	0.99	4.82	H
	2512	-61.62	-13	-48.62	-54.76	-63.59	1.29	5.41	H
	3345	-65.53	-13	-52.53	-60.79	-69.14	1.56	7.32	H
	1672	-36.94	-13	-23.94	-25.3	-38.62	0.99	4.82	V
	2512	-62.16	-13	-49.16	-55.73	-64.13	1.29	5.41	V
	3345	-64.88	-13	-51.88	-60.36	-68.49	1.56	7.32	V
Highest	1696	-32.76	-13	-19.76	-20.76	-34.36	1.00	4.75	H
	2544	-57.84	-13	-44.84	-51	-59.82	1.30	5.44	H
	3393	-65.27	-13	-52.27	-60.71	-69.08	1.57	7.53	H
	1696	-34.46	-13	-21.46	-22.91	-36.06	1.00	4.75	V
	2544	-58.06	-13	-45.06	-51.73	-60.04	1.30	5.44	V
	3393	-64.71	-13	-51.71	-60.21	-68.52	1.57	7.53	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GPRS class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-43.84	-13	-30.84	-39.68	-50.41	1.67	8.24	H
	5550	-59.12	-13	-46.12	-61.81	-66.19	2.65	9.72	H
	9252	-55.93	-13	-42.93	-62.56	-65.99	2.54	12.60	H
	3702	-42.04	-13	-29.04	-37.87	-48.61	1.67	8.24	V
	5550	-59.15	-13	-46.15	-61.81	-66.22	2.65	9.72	V
	9252	-57.83	-13	-44.83	-64.88	-67.89	2.54	12.60	V
Middle	3762	-47.78	-13	-34.78	-43.54	-54.41	1.69	8.31	H
	5640	-58.55	-13	-45.55	-61.66	-65.6	2.71	9.76	H
	9399	-56.57	-13	-43.57	-63.4	-66.54	2.57	12.54	H
	3762	-46.08	-13	-33.08	-41.86	-52.71	1.69	8.31	V
	5640	-58.82	-13	-45.82	-61.91	-65.87	2.71	9.76	V
	9399	-59.27	-13	-46.27	-66.5	-69.24	2.57	12.54	V
Highest	3822	-47.78	-13	-34.78	-43.44	-54.46	1.71	8.39	H
	5730	-60.14	-13	-47.14	-63.67	-67.17	2.76	9.79	H
	9546	-58.24	-13	-45.24	-65.29	-68.11	2.60	12.47	H
	3822	-44.97	-13	-31.97	-40.7	-51.65	1.71	8.39	V
	5730	-61.12	-13	-48.12	-63.64	-68.15	2.76	9.79	V
	9546	-57.47	-13	-44.47	-64.86	-67.34	2.60	12.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (EDGE class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-42.03	-13	-29.03	-37.87	-48.6	1.67	8.24	H
	5550	-58.17	-13	-45.17	-60.86	-65.24	2.65	9.72	H
	7404	-63.17	-13	-50.17	-67.36	-72.32	2.46	11.61	H
	3702	-39.68	-13	-26.68	-35.51	-46.25	1.67	8.24	V
	5550	-58.91	-13	-45.91	-61.57	-65.98	2.65	9.72	V
	7404	-62.97	-13	-49.97	-67.37	-72.12	2.46	11.61	V
Middle	3762	-43.00	-13	-30.00	-38.76	-49.63	1.69	8.31	H
	5640	-61.43	-13	-48.43	-64.54	-68.48	2.71	9.76	H
	7518	-63.35	-13	-50.35	-67.54	-72.74	2.42	11.81	H
	3762	-42.26	-13	-29.26	-38.04	-48.89	1.69	8.31	V
	5640	-60.30	-13	-47.30	-63.39	-67.35	2.71	9.76	V
	7518	-61.29	-13	-48.29	-65.72	-70.68	2.42	11.81	V
Highest	3822	-43.51	-13	-30.51	-39.17	-50.19	1.71	8.39	H
	5736	-62.82	-13	-49.82	-66.43	-69.85	2.76	9.79	H
	7638	-62.30	-13	-49.30	-66.92	-71.8	2.38	11.88	H
	3822	-42.97	-13	-29.97	-38.7	-49.65	1.71	8.39	V
	5736	-62.75	-13	-49.75	-66.35	-69.78	2.76	9.79	V
	7638	-60.48	-13	-47.48	-65.36	-69.98	2.38	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V (RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-70.68	-13	-57.68	-58.31	-72.44	0.98	4.89	H
	2480	-67.96	-13	-54.96	-60.01	-69.87	1.28	5.34	H
	3296	-66.21	-13	-53.21	-61.28	-69.62	1.54	7.10	H
	1648	-70.22	-13	-57.22	-58.32	-71.98	0.98	4.89	V
	2480	-66.04	-13	-53.04	-59.57	-67.95	1.28	5.34	V
	3296	-65.32	-13	-52.32	-60.81	-68.73	1.54	7.10	V
Middle	1672	-70.64	-13	-57.64	-58.53	-72.32	0.99	4.82	H
	2512	-67.16	-13	-54.16	-60.33	-69.13	1.29	5.41	H
	3344	-65.37	-13	-52.37	-60.66	-68.98	1.56	7.31	H
	1672	-70.26	-13	-57.26	-58.62	-71.94	0.99	4.82	V
	2512	-66.17	-13	-53.17	-59.81	-68.14	1.29	5.41	V
	3344	-64.98	-13	-51.98	-60.53	-68.59	1.56	7.31	V
Highest	1696	-70.94	-13	-57.94	-58.66	-72.54	1.00	4.75	H
	2536	-66.84	-13	-53.84	-60.04	-68.82	1.30	5.43	H
	3392	-65.49	-13	-52.49	-61.06	-69.29	1.57	7.52	H
	1696	-70.12	-13	-57.12	-58.64	-71.72	1.00	4.75	V
	2536	-66.51	-13	-53.51	-60.18	-68.49	1.30	5.43	V
	3392	-64.98	-13	-51.98	-60.65	-68.78	1.57	7.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II (RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3708	-64.83	-13	-51.83	-60.67	-71.41	1.67	8.25	H
	5557	-62.91	-13	-49.91	-65.6	-69.97	2.66	9.72	H
	7410	-63.31	-13	-50.31	-67.5	-72.47	2.46	11.62	H
	3708	-64.61	-13	-51.61	-60.44	-71.19	1.67	8.25	V
	5557	-62.88	-13	-49.88	-65.54	-69.94	2.66	9.72	V
	7410	-62.13	-13	-49.13	-66.53	-71.29	2.46	11.62	V
Middle	3759	-65.07	-13	-52.07	-60.83	-71.7	1.69	8.31	H
	5640	-62.93	-13	-49.93	-66.04	-69.98	2.71	9.76	H
	7518	-62.76	-13	-49.76	-66.95	-72.15	2.42	11.81	H
	3759	-64.98	-13	-51.98	-60.76	-71.61	1.69	8.31	V
	5640	-62.58	-13	-49.58	-65.67	-69.63	2.71	9.76	V
	7518	-60.46	-13	-47.46	-64.89	-69.85	2.42	11.81	V
Highest	3816	-65.14	-13	-52.14	-60.8	-71.82	1.70	8.38	H
	5724	-62.77	-13	-49.77	-66.3	-69.81	2.75	9.79	H
	7632	-62.92	-13	-49.92	-67.54	-72.41	2.39	11.88	H
	3816	-65.35	-13	-52.35	-61.08	-72.03	1.70	8.38	V
	5724	-62.80	-13	-49.80	-66.32	-69.84	2.75	9.79	V
	7632	-59.91	-13	-46.91	-64.79	-69.4	2.39	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV (RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-65.76	-13	-52.76	-61.37	-71.85	1.58	7.67	H
	5137	-63.41	-13	-50.41	-63.7	-70.69	2.42	9.70	H
	6849	-62.84	-13	-49.84	-67.25	-70.82	2.64	10.62	H
	3424	-65.13	-13	-52.13	-60.74	-71.22	1.58	7.67	V
	5137	-63.38	-13	-50.38	-63.57	-70.66	2.42	9.70	V
	6849	-62.38	-13	-49.38	-66.73	-70.36	2.64	10.62	V
Middle	3465	-65.42	-13	-52.42	-61.18	-71.67	1.59	7.85	H
	5197	-63.28	-13	-50.28	-63.89	-70.53	2.45	9.70	H
	6930	-62.84	-13	-49.84	-67.26	-70.94	2.61	10.72	H
	3465	-65.48	-13	-52.48	-61.18	-71.73	1.59	7.85	V
	5197	-63.54	-13	-50.54	-64.08	-70.79	2.45	9.70	V
	6930	-62.98	-13	-49.98	-67.38	-71.08	2.61	10.72	V
Highest	3505	-64.83	-13	-51.83	-60.81	-71.23	1.61	8.01	H
	5257	-63.77	-13	-50.77	-64.66	-70.98	2.49	9.70	H
	7010	-62.56	-13	-49.56	-66.74	-70.79	2.59	10.82	H
	3505	-65.41	-13	-52.41	-61.18	-71.81	1.61	8.01	V
	5257	-63.76	-13	-50.76	-64.51	-70.97	2.49	9.70	V
	7010	-62.22	-13	-49.22	-66.52	-70.45	2.59	10.82	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.