

FCC

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
**8BitDo N30 2.4G wireless gamepad for NES
Classic**

ISSUED TO
SHENZHEN 8BITDO TECH CO., LTD.

Room 210, Building 1, Nanhai Ecool, No.6 Xinghua Road, Shekou,
Nanshan District, Shenzhen

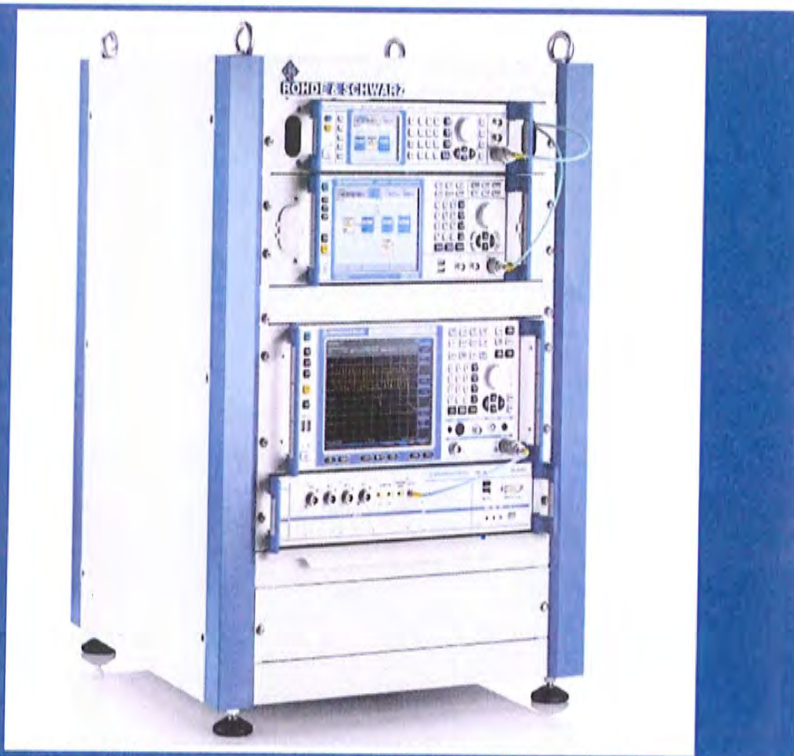

Tested by: Hu Chao
Hu Chao
(Engineer)
Date: Jul. 20, 2018

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)
Date: Jul. 20, 2018

Report No.: BL-SZ1870109-601
EUT Name: 8BitDo N30 2.4G wireless gamepad
for NES Classic

Model Name: 81BA (refer section 2.4)
Brand Name: 8BITDO
Test Standard: 47 CFR Part 15 Subpart C
FCC ID: 2AOWF-24GN30NC

Test Conclusion: Pass
Test Date: Jul. 17, 2018 ~ Jul. 20, 2018
Date of Issue: Jul. 30, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions</u>
<u>Rev. 01</u>	<u>Jul. 30, 2018</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 ADMINISTRATIVE DATA (GENERAL INFORMATION).....	5
1.1 Identification of the Testing Laboratory.....	5
1.2 Identification of the Responsible Testing Location.....	5
1.3 Laboratory Condition.....	5
1.4 Announce.....	5
2 PRODUCT INFORMATION.....	6
2.1 Applicant Information.....	6
2.2 Manufacturer Information.....	6
2.3 Factory Information.....	6
2.4 General Description for Equipment under Test (EUT).....	6
2.5 Ancillary Equipment.....	6
2.6 Technical Information.....	7
3 SUMMARY OF TEST RESULTS.....	9
3.1 Test Standards.....	9
3.2 Verdict.....	9
4 GENERAL TEST CONFIGURATIONS.....	10
4.1 Test Environments.....	10
4.2 Test Equipment List.....	10
4.3 Description of Test Setup.....	11
4.3.1 For Antenna Port Test.....	11
4.3.2 For AC Power Supply Port Test.....	12
4.3.3 For Radiated Test (Below 30 MHz).....	12
4.3.4 For Radiated Test (30 MHz-1 GHz).....	13
4.3.5 For Radiated Test (Above 1 GHz).....	13
4.4 Measurement Results Explanation Example.....	14
4.4.1 For conducted test items:.....	14

4.4.2 For radiated band edges and spurious emission test:	14
5 TEST ITEMS	15
5.1 Antenna Requirements	15
5.1.1 Relevant Standards	15
5.1.2 Antenna Anti-Replacement Construction	15
5.1.3 Antenna Gain	15
5.2 Number of Hopping Frequency	16
5.2.1 Limit	16
5.2.2 Test Setup	16
5.2.3 Test Procedure	16
5.2.4 Test Result	16
5.3 Peak Output Power	17
5.3.1 Test Limit	17
5.3.2 Test Setup	17
5.3.3 Test Procedure	17
5.3.4 Test Result	17
5.4 Occupied Bandwidth	18
5.4.1 Limit	18
5.4.2 Test Setup	18
5.4.3 Test Procedure	18
5.4.4 Test Result	18
5.5 Carrier Frequency Separation	19
5.5.1 Limit	19
5.5.2 Test Setup	19
5.5.3 Test Procedure	19
5.5.4 Test Result	19
5.6 Time of Occupancy (Dwell time)	20
5.6.1 Limit	20
5.6.2 Test Setup	20
5.6.3 Test Procedure	20
5.6.4 Test Result	20
5.7 Conducted Spurious Emission & Authorized-band band-edge	21

5.7.1 Limit.....	21
5.7.2 Test Setup.....	21
5.7.3 Test Procedure.....	21
5.7.4 Test Result.....	21
5.8 Conducted Emission.....	22
5.8.1 Limit.....	22
5.8.2 Test Setup.....	22
5.8.3 Test Procedure.....	22
5.8.4 Test Result.....	22
5.9 Radiated Spurious Emission.....	23
5.9.1 Limit.....	23
5.9.2 Test Setup.....	23
5.9.3 Test Procedure.....	23
5.9.4 Test Result.....	24
5.10 Band Edge (Restricted-band band-edge).....	25
5.10.1 Limit.....	25
5.10.2 Test Setup.....	25
5.10.3 Test Procedure.....	25
5.10.4 Test Result.....	25
ANNEX A TEST RESULT.....	26
A.1 Number of Hopping Frequency.....	26
A.2 Peak Output Power and E.I.R.P.....	27
A.3 20 dB and 99% bandwidth.....	28
A.4 Hopping Frequency Separation.....	30
A.5 Average Time of Occupancy.....	31
A.6 Conducted Spurious Emissions & Authorized-band band-edge.....	32
A.7 Conducted Emissions.....	36
A.8 Radiated Emission.....	38
A.9 Band Edge (Restricted-band band-edge).....	45
ANNEX B TEST SETUP PHOTOS.....	47
ANNEX C EUT EXTERNAL PHOTOS.....	47
ANNEX D EUT INTERNAL PHOTOS.....	47

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	SHENZHEN 8BITDO TECH CO., LTD.
Address	Room 210, Building 1, Nanhai Ecool, No.6 Xinghua Road, Shekou, Nanshan District, Shenzhen

2.2 Manufacturer Information

Manufacturer	Shenzhen Zhongxingda Electronic Co., Ltd.
Address	3-4/F, Bldg 10, Tongfuyu Industrial Zone, Lezhujiao Village, Xixiang, Baoan District, Shenzhen

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	8BitDo N30 2.4G wireless gamepad for NES Classic
Model Name Under Test	81BA
Series Model Name	81BA, 81B
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in market and customer.
Hardware Version	1.0
Software Version	1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	RYX
	Model No.	402030
	Serial No.	N/A
	Capacity	180 mAh
	Rated Voltage	3.7 V
	Limit Charge Voltage	N/A
Ancillary Equipment 2	Dongle	
Ancillary Equipment 3	USB Cable	
	Length (Approx.)	1.2 m

2.6 Technical Information

Network and Wireless connectivity	2.4G ISM Band(GFSK modulation)
-----------------------------------	--------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	0.25 Mbps
Frequency Range	The frequency range used is 2405.5 MHz – 2475 MHz; The frequency block is 2400 MHz to 2483.5 MHz.
Number of channel	140 (See note 1)
Tested Channel	Low channel (2405.5 MHz), Middle channel(2437.5 MHz), High channel (2475 MHz)
Antenna Type	PCB Antenna
Antenna Gain	2 dBi (In test items related to antenna gain, the final results reflect this figure.)
Adaptive or non-adaptive	non-adaptive
The Max RF Output power	-1.08 dBm

Channel List

Number	Frequency (MHz)	Number	Frequency (MHz)
1	2405.5(Low)	9	2445
2	2409	10	2450
3	2413	11	2453
4	2425	12	2457
5	2429	13	2461
6	2432	14	2465
7	2435	15	2469
8	2437.5(Middle)	16	2475(High)

Note: The modulation is GFSK with FHSS, there are total 140 channels (frequency range is 2405.5-2475MHz, channel step is 0.5MHz, totally 140 channels), when this part works, it will choose 16 channels, each channel band width is 1MHz, if one channel is chosen, adjacent two channels cannot be chosen to make sure step of working channels is more than 1MHz. there are two antennas in this part, they are same and work alternatively But in this report, the equipment select the lowest, middle and highest channel from 140 channels, Which are 2405.5 MHz, 2437.5 MHz and 2475 MHz. The more information please refer to the manufacturer's instructions.

Test Case	Test Conditions			
	Modulation Technology	Modulation Type	Date rate	Channel
Number of Hopping Frequency	FHSS	GFSK	0.25 Mbps	Hopping
Peak Output Power	FHSS	GFSK	0.25 Mbps	Low/Middle/High
Occupied Bandwidth	FHSS	GFSK	0.25 Mbps	Low/Middle/High
Carrier Frequency Separation	FHSS	GFSK	0.25 Mbps	Hopping
Time of Occupancy (Dwell time)	FHSS	GFSK	0.25 Mbps	Hopping
Conducted Spurious Emission	FHSS	GFSK	0.25 Mbps	Low/Middle/High
Conducted Emission	FHSS	GFSK	0.25 Mbps	Low/Middle/High
Radiated Emission	FHSS	GFSK	0.25 Mbps	Low/Middle/High
Band Edge	FHSS	GFSK	0.25 Mbps	Low/High

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-16 Edition)	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note 1}
2	Number of Hopping Frequency	15.247(a)	ANNEX A.1	Pass
3	Peak Output Power	15.247(b)	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	ANNEX A.3	Pass
5	Carrier Frequency Separation	15.247(a)	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	ANNEX A.5	Pass
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	ANNEX A.6	Pass
8	Conducted Emission	15.207	ANNEX A.7	Pass
9	Radiated Spurious Emission	15.209 15.247(d)	ANNEX A.8	Pass
10	Band Edge (Restricted-band band-edge)	15.209 15.247(d)	ANNEX A.9	Pass
11	Receiver Spurious Emissions	--	--	N/A ^{Note 2}

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	20°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	5 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2018.06.11	2019.06.10
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	260592	2018.06.11	2019.06.10
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.11	2019.06.10
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2018.06.11	2019.06.10
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2017.11.07	2018.11.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.21	2019.06.20
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.21	2019.06.20
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2018.06.11	2019.06.10
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2018.06.11	2019.06.10
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	18141664	2018.06.21	2019.06.20
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2018.06.26	2019.06.25
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.07	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2019.07.10
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2018.06.21	2019.06.20
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400 KF	J211060273	N/A	2019.01.06
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC TECHNOLOGY LTD	21.1m*11.6 m*7.35m	N/A	2016.08.09	2018.08.08
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.11	2019.06.10
Power Amplifier	OPHIR RF	5225F	1037	2018.02.16	2019.02.15

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Power Amplifier	OPHIR RF	5273F	1016	2018.02.16	2019.02.15
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX51129	2018.02.22	2019.02.21
Mouth Simulator	B&K	4227	2423931	2017.11.14	2018.11.13
Sound Calibrator	B&K	4231	2430337	2017.11.08	2018.11.07
Sound Level Meter	B&K	NL-20	00844023	2017.11.10	2018.11.09
Ear Simulator	B&K	4185	2409449	2017.11.14	2018.11.13
Ear Simulator	B&K	4195	2418189	2017.11.14	2018.11.13
Audio analyzer	B&K	UPL 16	100129	2017.11.07	2018.11.06

4.3 Description of Test Setup

4.3.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm




(Diagram 1)

4.3.2 For AC Power Supply Port Test

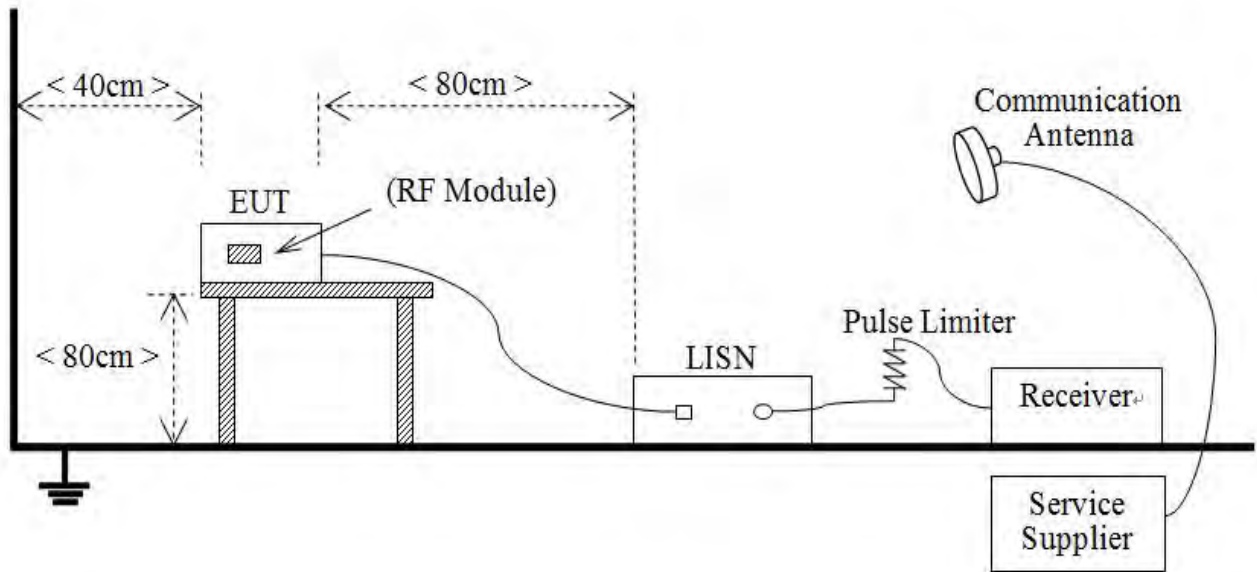


(Diagram 2)

4.3.3 For Radiated Test (Below 30 MHz)

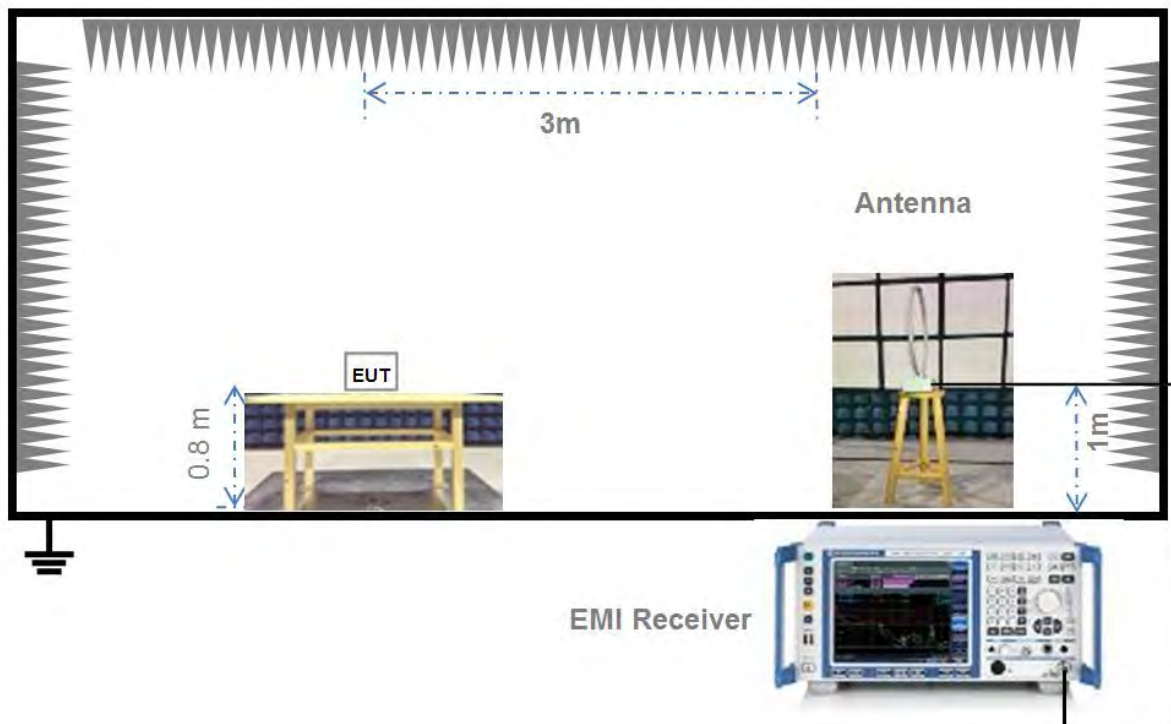


(Diagram 3)

4.3.4 For Radiated Test (30 MHz-1 GHz)

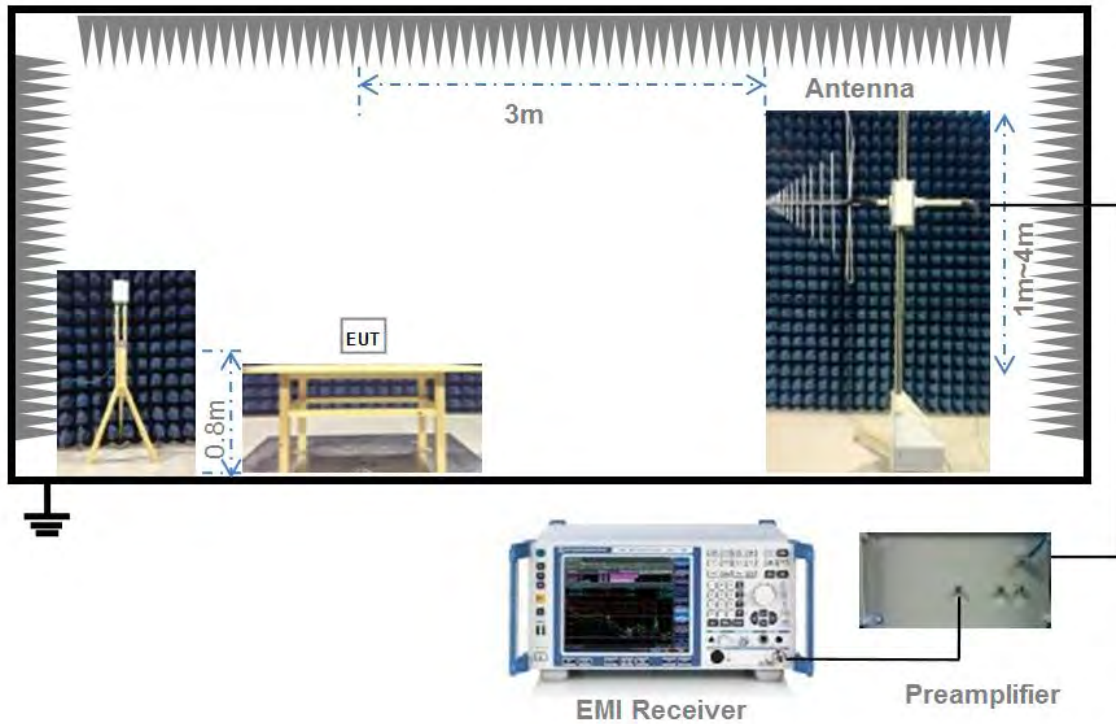

(Diagram 4)

4.3.5 For Radiated Test (Above 1 GHz)

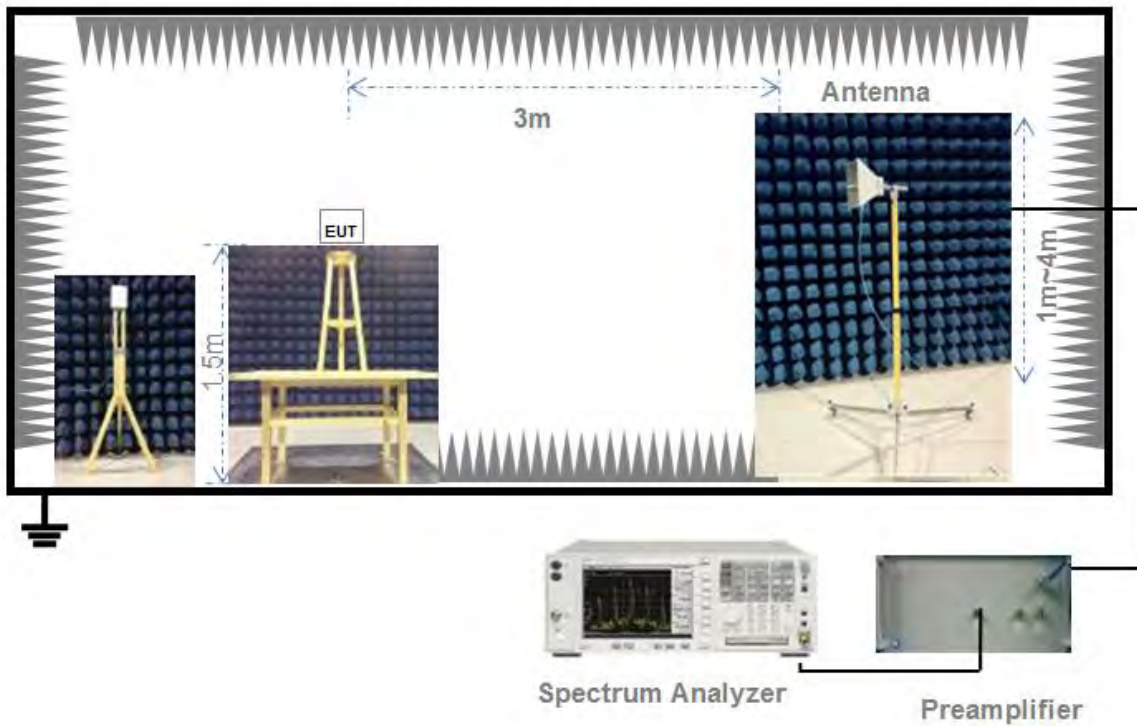

(Diagram 5)

4.4 Measurement Results Explanation Example

4.4.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.4.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log (\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log ((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)
= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

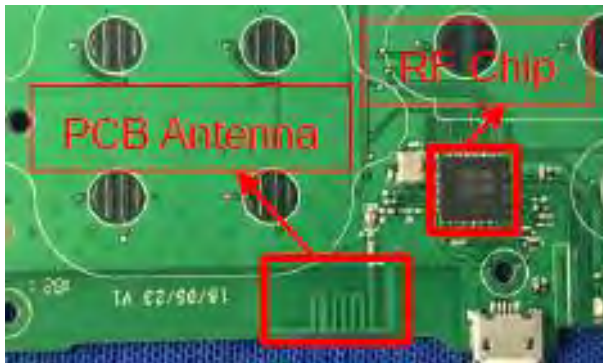Reference Documents	Item
Photo	

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequency

5.2.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	16	15	Pass


Test plots

GFSK 2.4 GHz ~ 2.4415 GHz

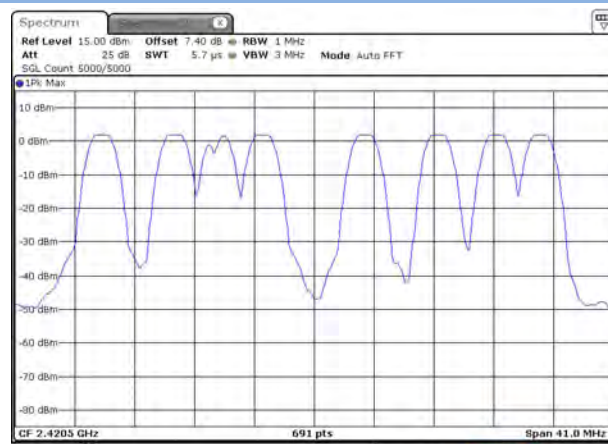

Date: 16 JUL 2018 21:11:01

GFSK 2.4415 GHz ~ 2.4835 GHz

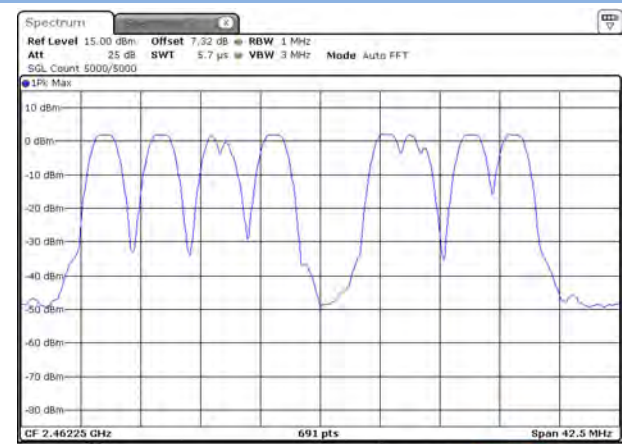

Date: 16 JUL 2018 21:11:30


A.2 Peak Output Power and E.I.R.P

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	-1.08	0.78	30	1000	Pass
Middle	-1.39	0.73			Pass
High	-1.84	0.65			Pass


Test plots

GFSK LOW CHANNEL

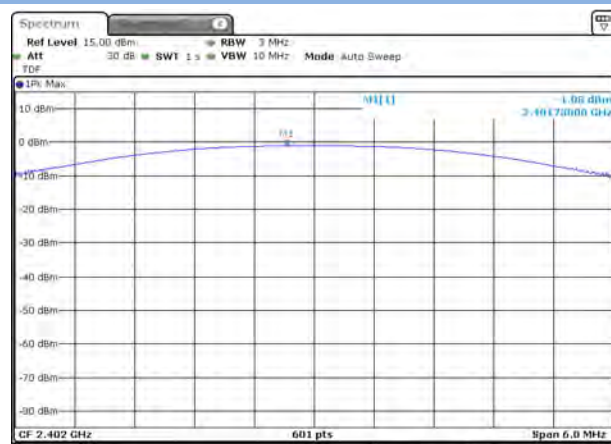


Date: 16 JUL 2018 19:00:48

GFSK MIDDLE CHANNEL

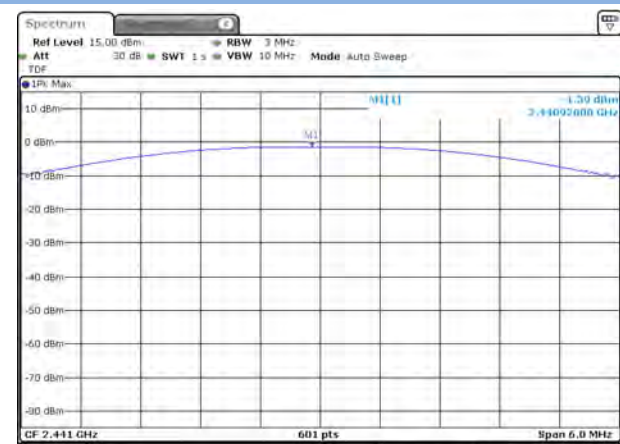

Date: 16 JUL 2018 19:18:29

GFSK HIGH CHANNEL

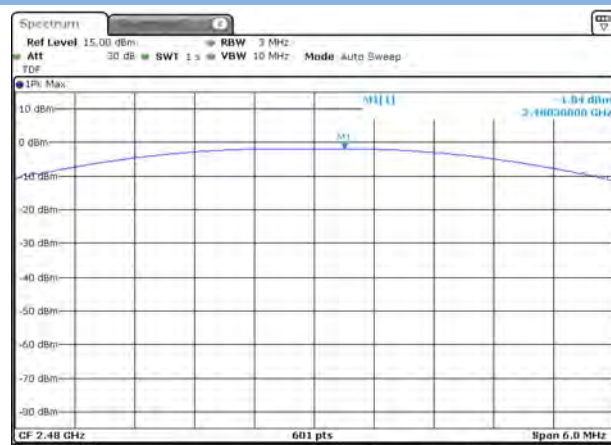

Date: 16 JUL 2018 19:22:54

A.3 20 dB and 99% bandwidth

Test Data


GFSK Mode:

Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.839111	0.790159
Middle	0.843506	0.790159
High	0.843506	0.798842

Test plots


20 dB Bandwidth

GFSK LOW CHANNEL

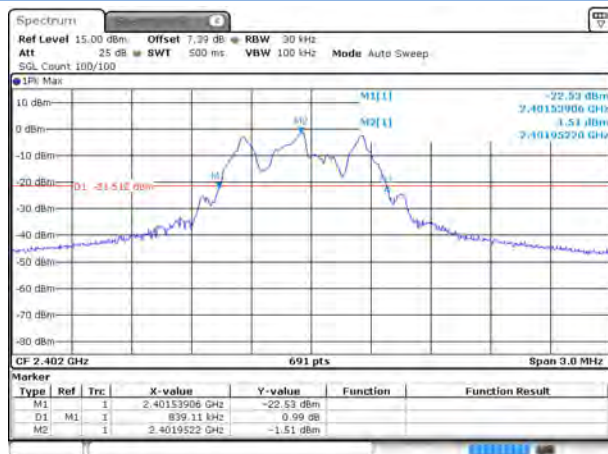

Date: 16 JUL 2018 19:01:44

GFSK MIDDLE CHANNEL

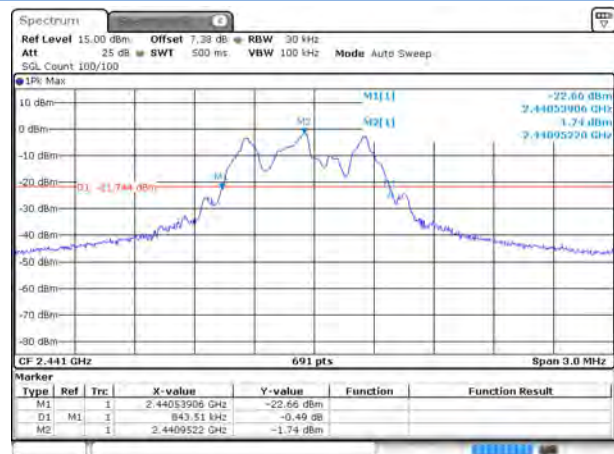

Date: 16 JUL 2018 19:19:25

GFSK HIGH CHANNEL



Date: 16 JUL 2018 19:23:50

99% Bandwidth

GFSK LOW CHANNEL




Date 16 JUL 2018 19:02:41

GFSK MIDDLE CHANNEL



Date 16 JUL 2018 19:20:21

GFSK HIGH CHANNEL

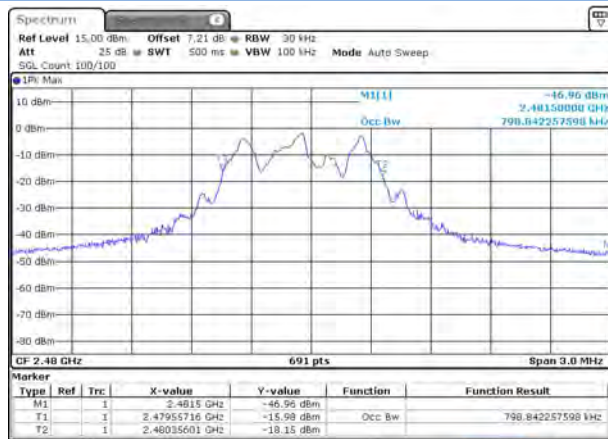

Date 16 JUL 2018 19:24:48


A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Verdict
GFSK	4.003	0.844	0.562	Pass

Test Plots

GFSK

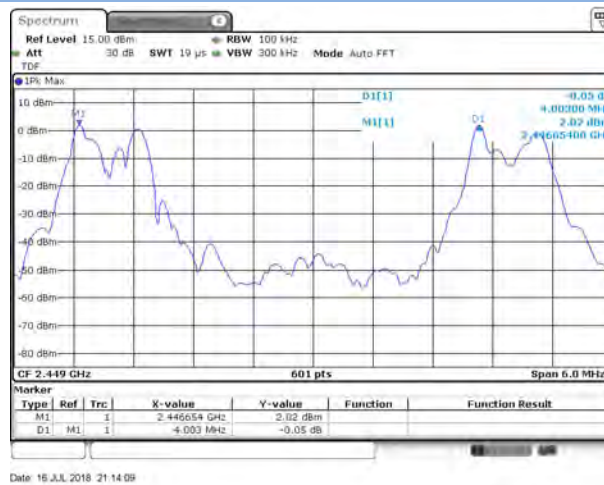

A.5 Average Time of Occupancy


Test Data

GFSK Mode:


Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
0.7912	160.000	0.4	Pass

Test Plots

GFSK 1

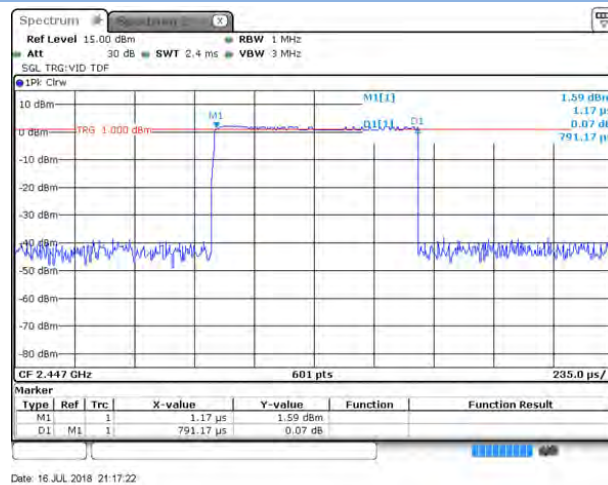

GFSK 2

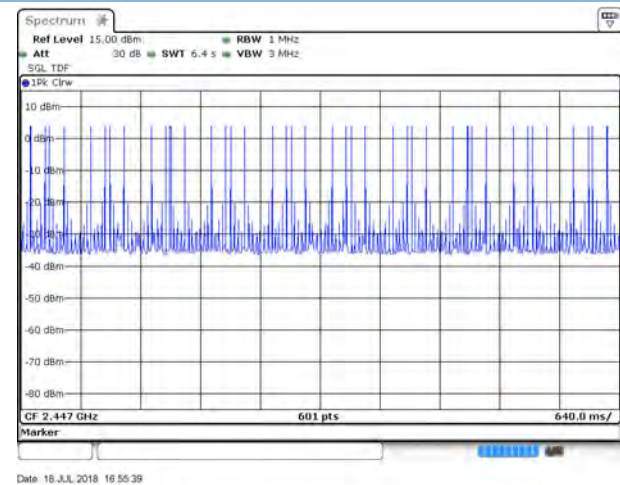

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

GFSK Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-38.57	-1.16	-21.16	Pass
Middle	-41.64	-1.52	-21.52	Pass
High	-41.45	-1.97	-21.97	Pass

Hopping Mode:


Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-40.48	2.12	-17.88	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL




GFSK LOW CHANNEL, BAND EDGE

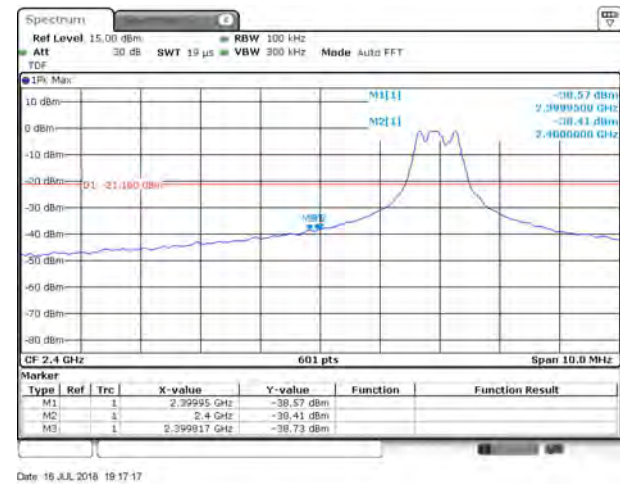


GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

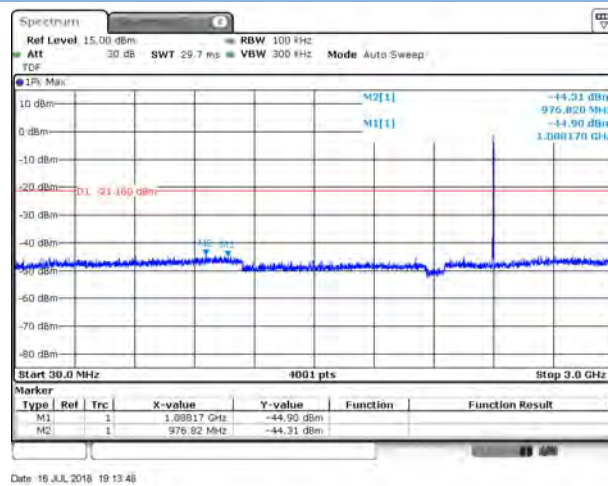


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

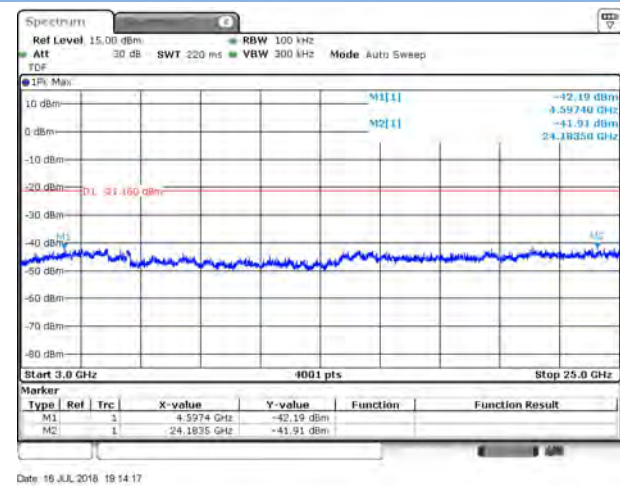

GFSK MIDDLE CHANNEL, CARRIER LEVEL

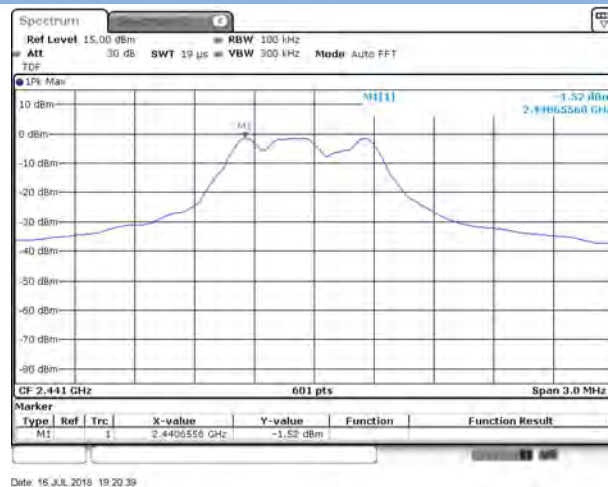


GFSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

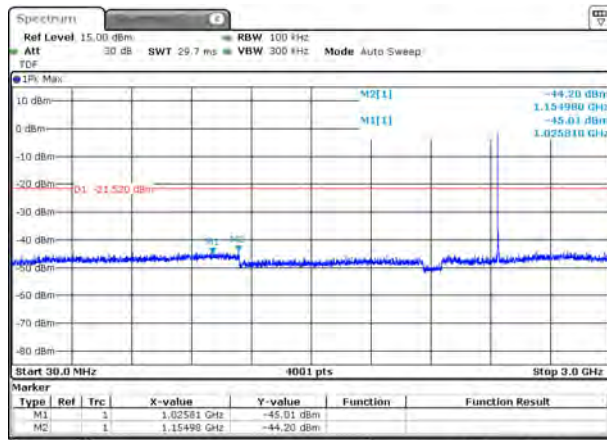


Date: 16 JUL 2018 19:21:50

GFSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

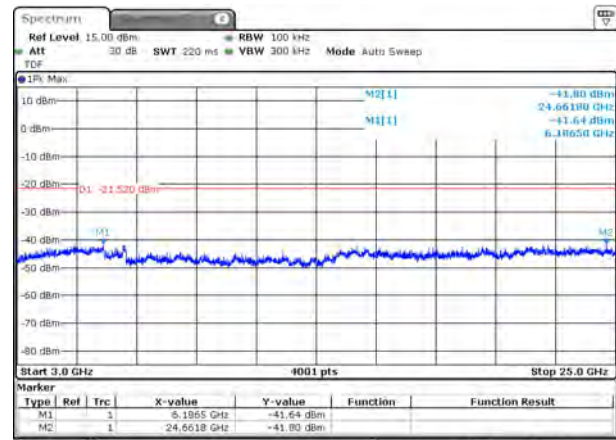


Date: 16 JUL 2018 19:22:17

GFSK HIGH CHANNEL, CARRIER LEVEL

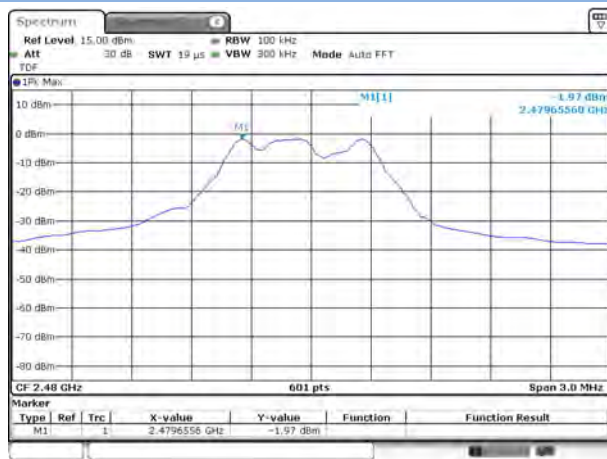


Date: 16 JUL 2018 19:24:58

GFSK HIGH CHANNEL , BAND EDGE

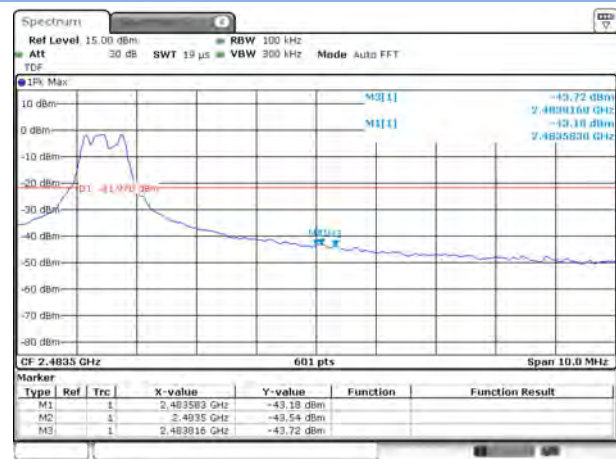


Date: 16 JUL 2018 19:27:25

GFSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

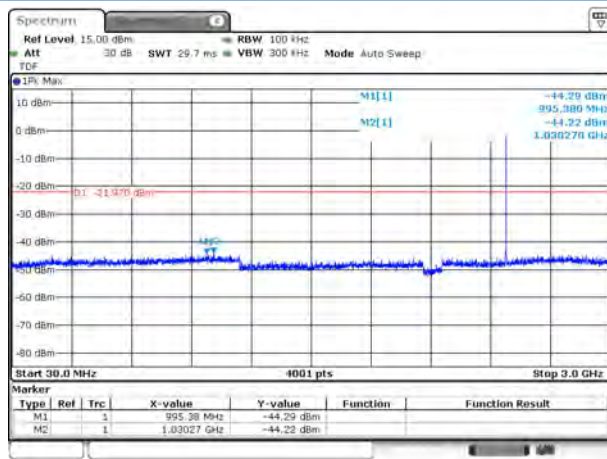


Date: 16 JUL 2018 19:25:52

GFSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

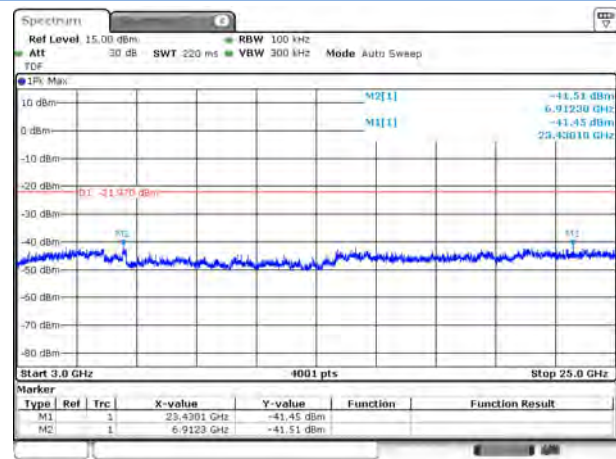


Date: 16 JUL 2018 19:26:08


GFSK HOPPING, CARRIER LEVEL

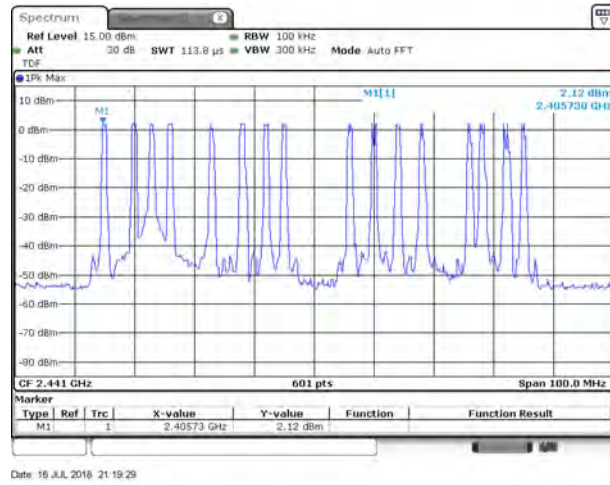


GFSK HOPPING BAND EDGE

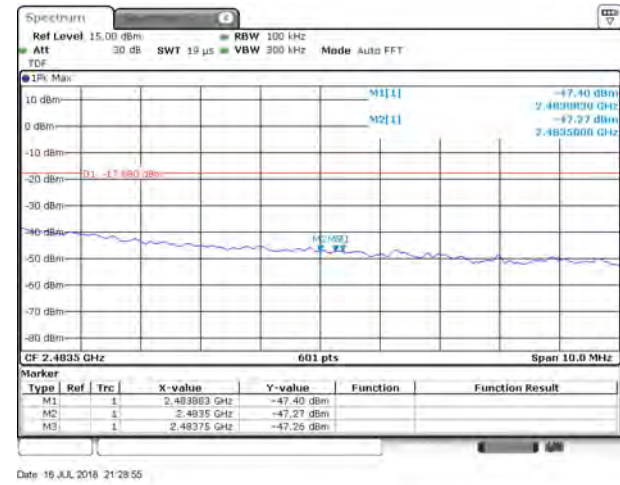

GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

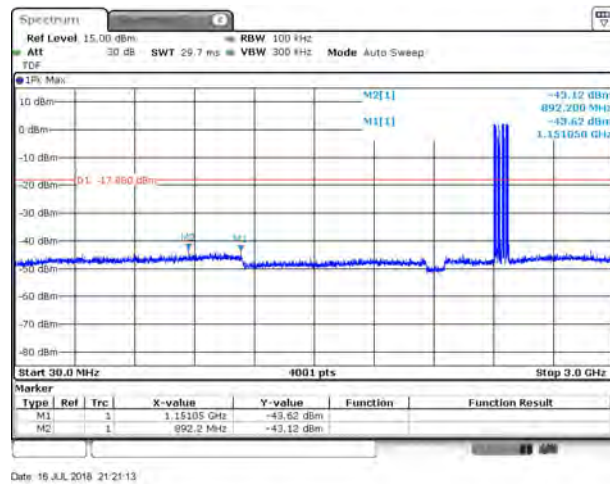

GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

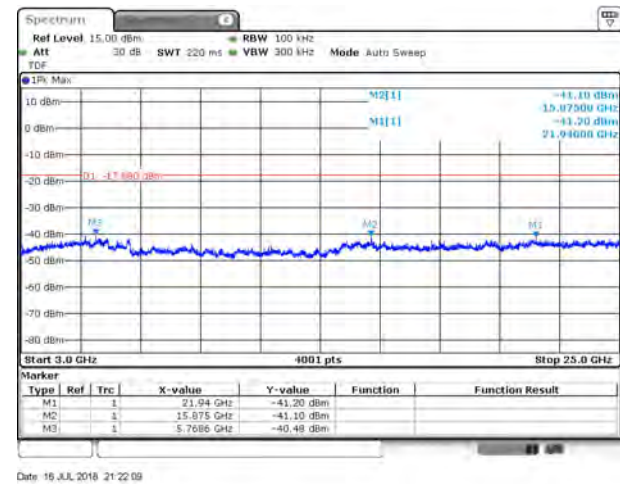

A.7 Conducted Emissions


Note ¹: The EUT is working in the Normal link mode.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)


Test Data and Plots

PHASE L

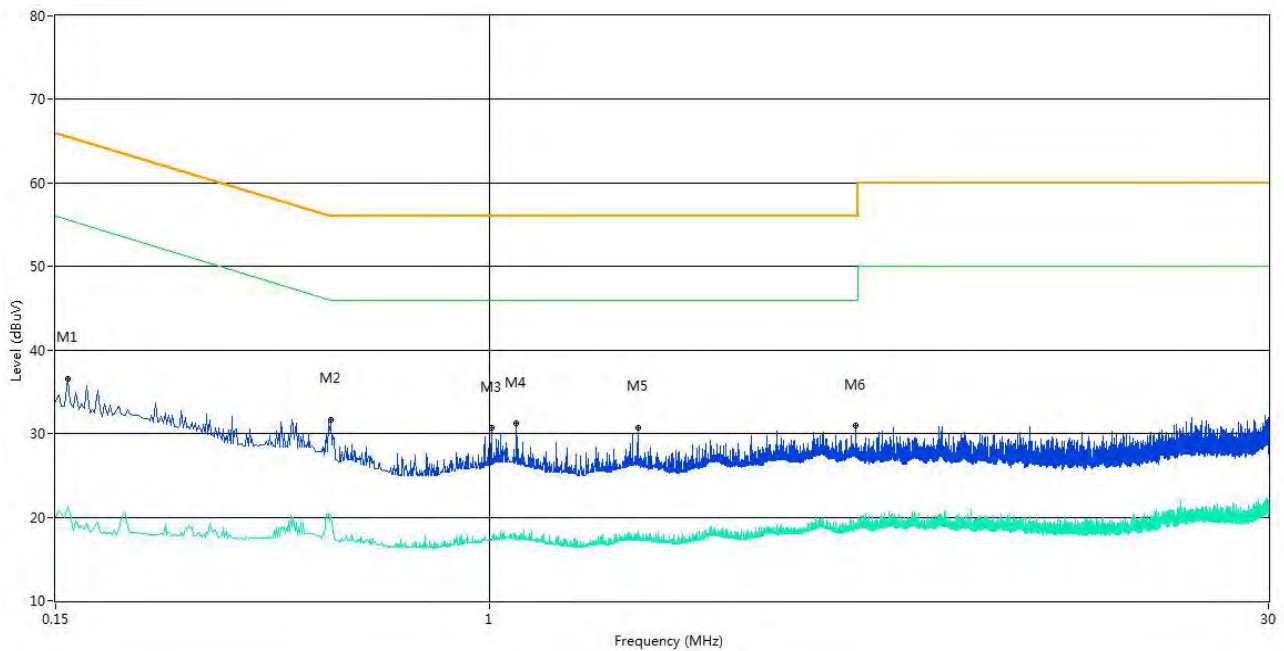

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.158	36.5	10.04	65.6	29.10	Peak	L Line	Pass
1**	0.158	21.2	10.04	55.6	34.40	AV	L Line	Pass
2	0.500	31.6	10.05	56.0	24.40	Peak	L Line	Pass
2**	0.500	20.3	10.05	46.0	25.70	AV	L Line	Pass
3	1.006	30.7	10.06	56.0	25.30	Peak	L Line	Pass
3**	1.006	17.3	10.06	46.0	28.70	AV	L Line	Pass
4	1.124	31.2	10.06	56.0	24.80	Peak	L Line	Pass
4**	1.124	17.8	10.06	46.0	28.20	AV	L Line	Pass
5	1.908	30.6	10.09	56.0	25.40	Peak	L Line	Pass
5**	1.908	18.4	10.09	46.0	27.60	AV	L Line	Pass
6	4.952	30.9	10.17	56.0	25.10	Peak	L Line	Pass
6**	4.952	19.1	10.17	46.0	26.90	AV	L Line	Pass

PHASE N

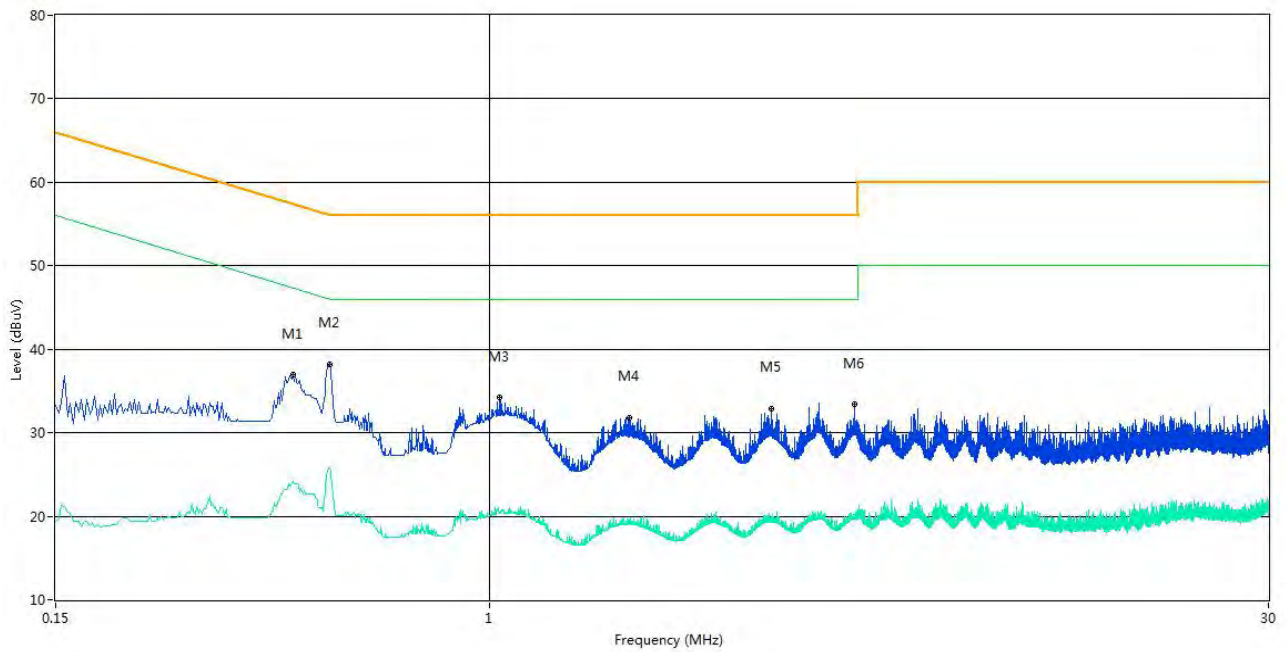

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.424	36.9	10.04	57.4	20.50	Peak	N Line	Pass
1**	0.424	24.2	10.04	47.4	23.20	AV	N Line	Pass
2	0.496	38.2	10.05	56.1	17.90	Peak	N Line	Pass
2**	0.496	25.7	10.05	46.1	20.40	AV	N Line	Pass
3	1.044	34.2	10.06	56.0	21.80	Peak	N Line	Pass
3**	1.044	20.2	10.06	46.0	25.80	AV	N Line	Pass
4	1.840	31.7	10.08	56.0	24.30	Peak	N Line	Pass
4**	1.840	19.5	10.08	46.0	26.50	AV	N Line	Pass
5	3.414	32.8	10.13	56.0	23.20	Peak	N Line	Pass
5**	3.414	19.9	10.13	46.0	26.10	AV	N Line	Pass
6	4.928	33.4	10.17	56.0	22.60	Peak	N Line	Pass
6**	4.928	20.2	10.17	46.0	25.80	AV	N Line	Pass

A.8 Radiated Emission


Duty cycle correction factor for average measurement.

Note:


1. Duty cycle = on time/100 milliseconds = $2 * 0.79117 / 100 = 1.58 \%$
2. Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -36.01 \text{ dB}$
3. GFSK has the highest duty cycle and is reported.

Test Plots

GFSK on time/100 ms (One Pulse) Plot on Channel 78

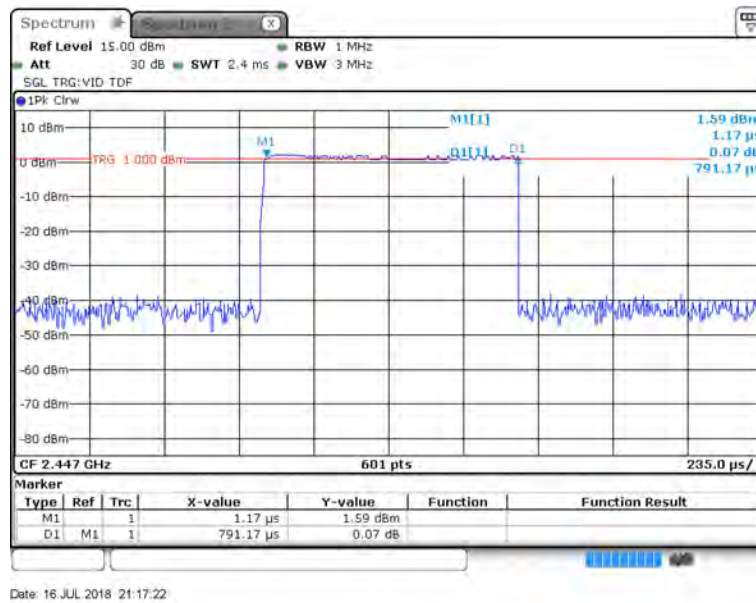

GFSK on time/100 ms (Count Pulses) Plot on Channel 78

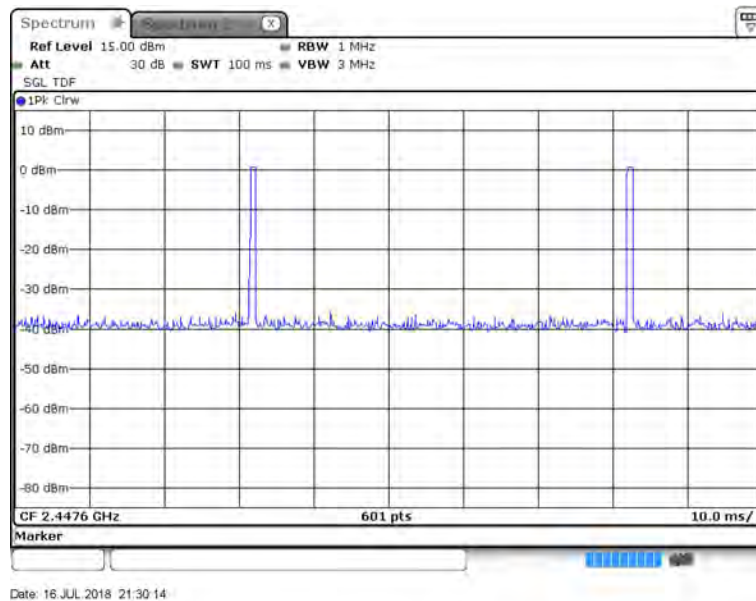

Note¹: The symbol of "--" in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note³: The EUT is working in the Normal link mode below 1 GHz.

Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

Test Data and Plots


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT V

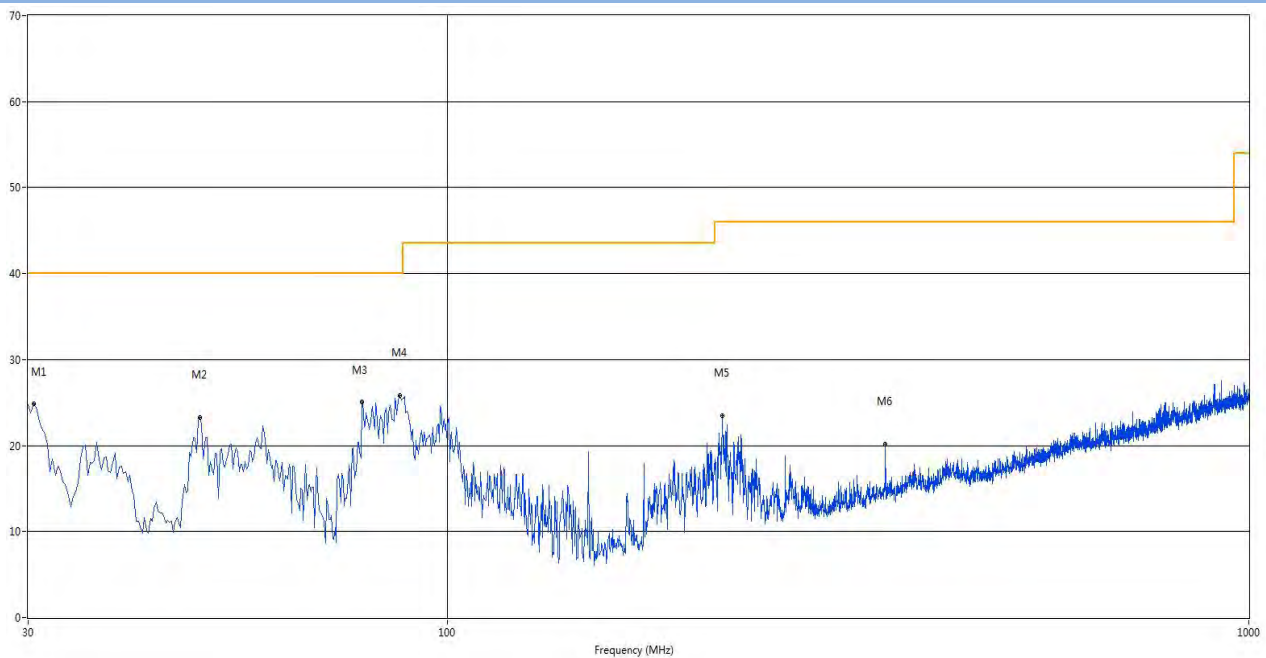

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	30.485	24.83	-26.54	40.0	15.17	Peak	226.00	100	Vertical	Pass
2	49.157	23.25	-23.18	40.0	16.75	Peak	0.00	200	Vertical	Pass
3	78.257	25.11	-28.89	40.0	14.89	Peak	95.90	100	Vertical	Pass
4	87.230	25.87	-27.12	40.0	14.13	Peak	118.40	100	Vertical	Pass
5	220.605	23.46	-24.08	46.0	22.54	Peak	172.20	100	Vertical	Pass
6	352.040	20.16	-19.60	46.0	25.84	Peak	292.50	100	Vertical	Pass

30 MHz to 1 GHz, ANT H

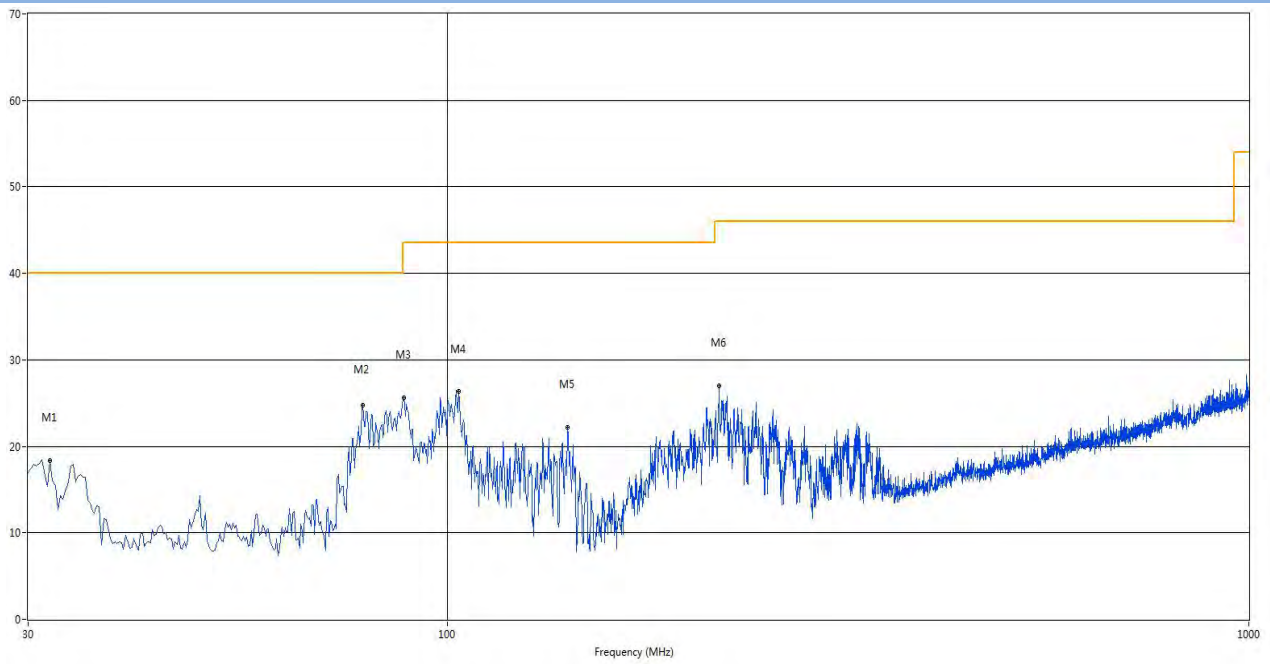

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	31.940	18.31	-26.78	40.0	21.69	Peak	107.50	200	Horizontal	Pass
2	78.500	24.75	-28.88	40.0	15.25	Peak	58.80	200	Horizontal	Pass
3	88.200	25.62	-26.93	43.5	17.88	Peak	45.30	300	Horizontal	Pass
4	103.235	26.31	-24.35	43.5	17.19	Peak	58.80	200	Horizontal	Pass
5	141.307	22.21	-27.88	43.5	21.29	Peak	68.00	200	Horizontal	Pass
6	218.422	26.98	-23.99	46.0	19.02	Peak	98.50	100	Horizontal	Pass

Test Data and Plots (1 GHz ~ 10th Harmonic)

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 12.75G-25G is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1587.500	25.40	-15.28	54.0	-28.60	AV	114.00	150	Vertical	Pass
1	1587.500	36.39	-15.28	74.0	-37.61	Peak	114.00	150	Vertical	Pass
2**	2402.000	72.05	-10.49	54.0	18.05	AV	114.00	150	Vertical	N/A
2	2402.000	75.41	-10.49	74.0	1.41	Peak	114.00	150	Vertical	N/A
3**	3650.000	34.25	-4.75	54.0	-19.75	AV	0.00	150	Vertical	Pass
3	3650.000	44.51	-4.75	74.0	-29.49	Peak	0.00	150	Vertical	Pass
4**	6412.000	38.69	2.76	54.0	-15.31	AV	27.00	150	Vertical	Pass
4	6412.000	49.61	2.76	74.0	-24.39	Peak	27.00	150	Vertical	Pass
5**	9265.500	34.07	18.17	54.0	-19.93	AV	288.00	150	Vertical	Pass
5	9265.500	49.38	18.17	74.0	-24.62	Peak	288.00	150	Vertical	Pass
6**	11743.750	36.35	20.10	54.0	-17.65	AV	47.00	150	Vertical	Pass
6	11743.750	51.49	20.10	74.0	-22.51	Peak	47.00	150	Vertical	Pass

GFSK LOW CHANNEL 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1549.000	24.19	-15.10	54.0	-29.81	AV	113.00	150	Horizontal	Pass
1	1549.000	36.17	-15.10	74.0	-37.83	Peak	113.00	150	Horizontal	Pass
2**	2402.000	88.50	-10.49	54.0	34.50	AV	74.00	150	Horizontal	N/A
2	2402.000	92.05	-10.49	74.0	18.05	Peak	74.00	150	Horizontal	N/A
3**	3642.000	33.45	-5.07	54.0	-20.55	AV	0.00	150	Horizontal	Pass
3	3642.000	44.03	-5.07	74.0	-29.97	Peak	0.00	150	Horizontal	Pass
4**	5037.000	35.65	-1.11	54.0	-18.35	AV	280.00	150	Horizontal	Pass
4	5037.000	47.70	-1.11	74.0	-26.30	Peak	280.00	150	Horizontal	Pass
5**	7603.750	34.23	17.58	54.0	-19.77	AV	222.00	150	Horizontal	Pass
5	7603.750	49.70	17.58	74.0	-24.30	Peak	222.00	150	Horizontal	Pass
6**	11781.125	36.80	20.30	54.0	-17.20	AV	1.00	150	Horizontal	Pass
6	11781.125	52.10	20.30	74.0	-21.90	Peak	1.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1603.000	25.20	-15.39	54.0	-28.80	AV	188.00	150	Vertical	Pass
1	1603.000	36.76	-15.39	74.0	-37.24	Peak	188.00	150	Vertical	Pass
2**	2441.000	76.76	-10.93	54.0	22.76	AV	153.00	150	Vertical	N/A
2	2441.000	80.25	-10.93	74.0	6.25	Peak	153.00	150	Vertical	N/A
3**	3126.000	31.71	-6.89	54.0	-22.29	AV	341.00	150	Vertical	Pass
3	3126.000	42.52	-6.89	74.0	-31.48	Peak	341.00	150	Vertical	Pass
4**	5856.000	37.38	0.56	54.0	-16.62	AV	299.00	150	Vertical	Pass
4	5856.000	49.23	0.56	74.0	-24.77	Peak	299.00	150	Vertical	Pass
5**	9404.937	34.05	18.43	54.0	-19.95	AV	152.00	150	Vertical	Pass
5	9404.937	50.87	18.43	74.0	-23.13	Peak	152.00	150	Vertical	Pass
6**	11730.813	36.52	20.19	54.0	-17.48	AV	288.00	150	Vertical	Pass
6	11730.813	52.95	20.19	74.0	-21.05	Peak	288.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1456.500	25.26	-15.09	54.0	-28.74	AV	195.00	150	Horizontal	Pass
1	1456.500	36.31	-15.09	74.0	-37.69	Peak	195.00	150	Horizontal	Pass
2**	2441.500	91.72	-10.91	54.0	37.72	AV	75.00	150	Horizontal	N/A
2	2441.500	93.61	-10.91	74.0	19.61	Peak	75.00	150	Horizontal	N/A
3**	3647.000	33.93	-4.89	54.0	-20.07	AV	193.00	150	Horizontal	Pass
3	3647.000	44.44	-4.89	74.0	-29.56	Peak	193.00	150	Horizontal	Pass
4**	6323.000	37.99	2.19	54.0	-16.01	AV	198.00	150	Horizontal	Pass
4	6323.000	49.18	2.19	74.0	-24.82	Peak	198.00	150	Horizontal	Pass
5**	8131.313	33.07	17.31	54.0	-20.93	AV	127.00	150	Horizontal	Pass
5	8131.313	49.82	17.31	74.0	-24.18	Peak	127.00	150	Horizontal	Pass
6**	11523.812	35.50	19.81	54.0	-18.50	AV	159.00	150	Horizontal	Pass
6	11523.812	51.99	19.81	74.0	-22.01	Peak	159.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1557.500	24.83	-15.34	54.0	-29.17	AV	30.00	150	Vertical	Pass
1	1557.500	36.21	-15.34	74.0	-37.79	Peak	30.00	150	Vertical	Pass
2**	2480.500	77.21	-9.97	54.0	23.21	AV	157.00	150	Vertical	N/A
2	2480.500	79.59	-9.97	74.0	5.59	Peak	157.00	150	Vertical	N/A
3**	3552.000	31.60	-6.39	54.0	-22.40	AV	68.00	150	Vertical	Pass
3	3552.000	43.69	-6.39	74.0	-30.31	Peak	68.00	150	Vertical	Pass
4**	6412.000	38.40	2.76	54.0	-15.60	AV	281.00	150	Vertical	Pass
4	6412.000	50.09	2.76	74.0	-23.91	Peak	281.00	150	Vertical	Pass
5**	8083.875	33.76	17.68	54.0	-20.24	AV	298.00	150	Vertical	Pass
5	8083.875	50.14	17.68	74.0	-23.86	Peak	298.00	150	Vertical	Pass
6**	11719.312	36.92	20.34	54.0	-17.08	AV	340.00	150	Vertical	Pass
6	11719.312	51.52	20.34	74.0	-22.48	Peak	340.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1243.500	24.15	-14.81	54.0	-29.85	AV	360.00	150	Horizontal	Pass
1	1243.500	35.39	-14.81	74.0	-38.61	Peak	360.00	150	Horizontal	Pass
2**	2480.500	93.57	-9.97	54.0	39.57	AV	69.00	150	Horizontal	N/A
2	2480.500	95.38	-9.97	74.0	21.38	Peak	69.00	150	Horizontal	N/A
3**	3727.000	33.20	-4.70	54.0	-20.80	AV	357.00	150	Horizontal	Pass
3	3727.000	44.37	-4.70	74.0	-29.63	Peak	357.00	150	Horizontal	Pass
4**	6398.000	38.52	2.41	54.0	-15.48	AV	242.00	150	Horizontal	Pass
4	6398.000	49.54	2.41	74.0	-24.46	Peak	242.00	150	Horizontal	Pass
5**	8608.562	32.68	17.27	54.0	-21.32	AV	48.00	150	Horizontal	Pass
5	8608.562	49.86	17.27	74.0	-24.14	Peak	48.00	150	Horizontal	Pass
6**	11633.063	35.90	20.38	54.0	-18.10	AV	82.00	150	Horizontal	Pass
6	11633.063	52.42	20.38	74.0	-21.58	Peak	82.00	150	Horizontal	Pass

Hopping Mode:

GFSK MODE 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2171.000	29.24	-10.24	54.0	-24.76	AV	360.00	150	Vertical	Pass
1	2171.000	39.77	-10.24	74.0	-34.23	Peak	360.00	150	Vertical	Pass
2**	2451.000	81.59	-10.90	54.0	27.59	AV	33.00	150	Vertical	N/A
2	2451.000	86.52	-10.90	74.0	12.52	Peak	33.00	150	Vertical	N/A
3**	2734.500	29.42	-9.59	54.0	-24.58	AV	102.00	150	Vertical	Pass
3	2734.500	50.38	-9.59	74.0	-23.62	Peak	102.00	150	Vertical	Pass
4**	4788.000	36.08	-2.02	54.0	-17.92	AV	85.00	150	Vertical	Pass
4	4788.000	47.55	-2.02	74.0	-26.45	Peak	85.00	150	Vertical	Pass
5**	7241.500	36.84	16.33	54.0	-17.16	AV	311.00	150	Vertical	Pass
5	7241.500	54.23	16.33	74.0	-19.77	Peak	311.00	150	Vertical	Pass
6**	11434.687	35.02	19.03	54.0	-18.98	AV	115.00	150	Vertical	Pass
6	11434.687	51.47	19.03	74.0	-22.53	Peak	115.00	150	Vertical	Pass

GFSK MODE 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2175.500	34.43	-10.20	54.0	-19.57	AV	83.00	150	Horizontal	Pass
1	2175.500	43.34	-10.20	74.0	-30.66	Peak	83.00	150	Horizontal	Pass
2**	2473.000	97.52	-10.46	54.0	43.52	AV	61.00	150	Horizontal	N/A
2	2473.000	98.75	-10.46	74.0	24.75	Peak	61.00	150	Horizontal	N/A
3**	2734.500	30.60	-9.59	54.0	-23.40	AV	204.00	150	Horizontal	Pass
3	2734.500	59.33	-9.59	74.0	-14.67	Peak	204.00	150	Horizontal	Pass
4**	4834.000	46.91	-1.63	54.0	-7.09	AV	251.00	150	Horizontal	Pass
4	4834.000	53.85	-1.63	74.0	-20.15	Peak	251.00	150	Horizontal	Pass
5**	7352.187	33.36	16.74	54.0	-20.64	AV	88.00	150	Horizontal	Pass
5	7352.187	52.91	16.74	74.0	-21.09	Peak	88.00	150	Horizontal	Pass
6**	11368.563	34.85	18.68	54.0	-19.15	AV	200.00	150	Horizontal	Pass
6	11368.563	52.15	18.68	74.0	-21.85	Peak	200.00	150	Horizontal	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	54.43	74	19.57	PEAK	Pass
		2390.00	28.27	54	25.73	AVERAGE	Pass
GFSK	HIGH	2483.50	73.02	74	0.98	PEAK	Pass
		2483.50	37.69	54	16.31	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	53.14	74	20.86	PEAK	Pass
		2390.00	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	61.51	74	12.49	PEAK	Pass
		2483.50	27.76	54	26.24	AVERAGE	Pass

Test Plots


GFSK LOW CHANNEL , PEAK

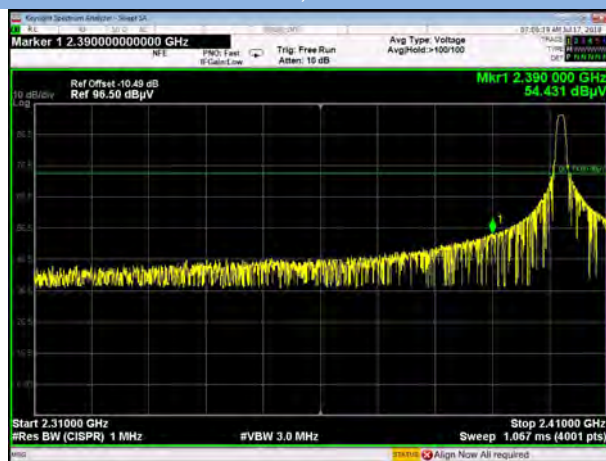


GFSK LOW CHANNEL , AVERAGE



GFSK HIGH CHANNEL , PEAK

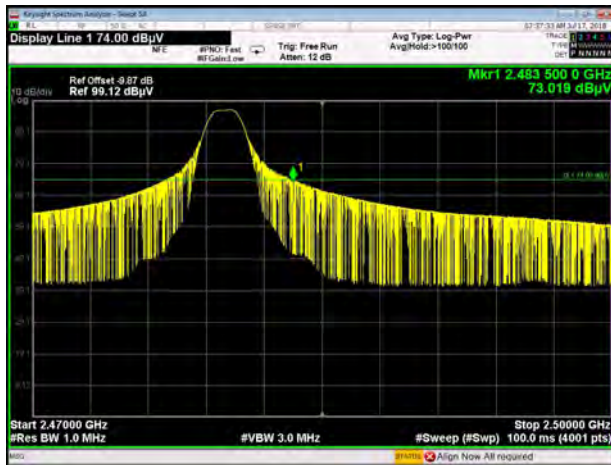


GFSK HIGH CHANNEL , AVERAGE

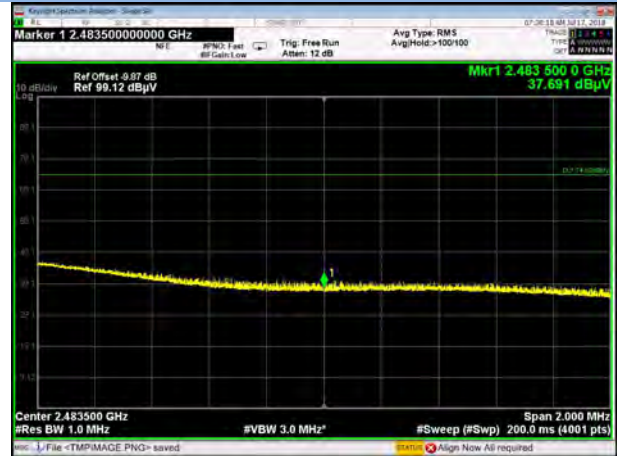

Hopping Mode:

GFSK LOW FREQUENCY BAND, PEAK

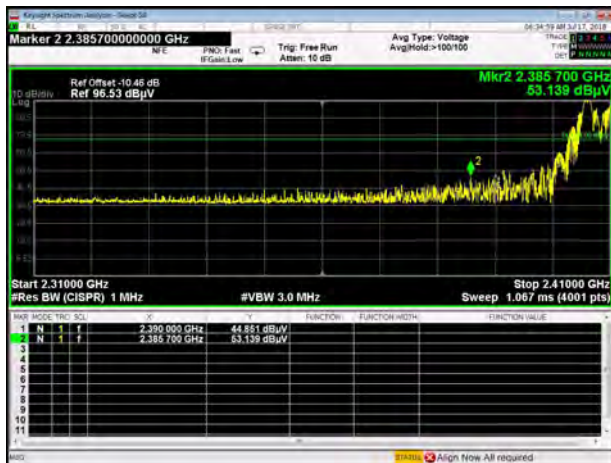

GFSK HIGH FREQUENCY BAND, PEAK



GFSK HIGH FREQUENCY BAND, AVERAGE



ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ1870109-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ1870109-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ1870109-AI.PDF”.

--END OF REPORT--