


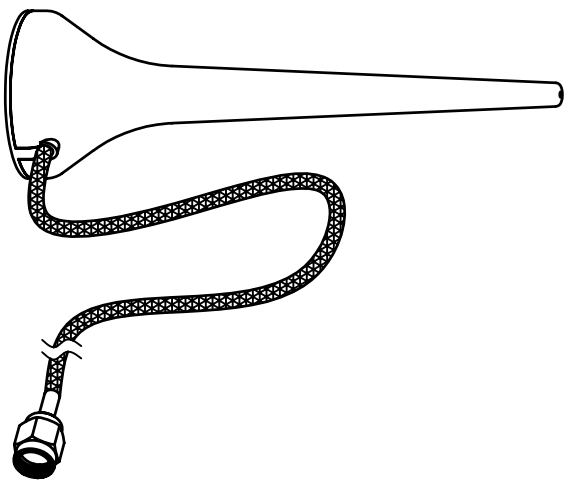

MECHANICAL

Antenna Cover : ABS

Antenna Base : ABS


Color : Black

ELECTRICAL


Frequency : 2.4GHz

Connector : SMA Male RP

Cable : Coaxial Cable RG-178

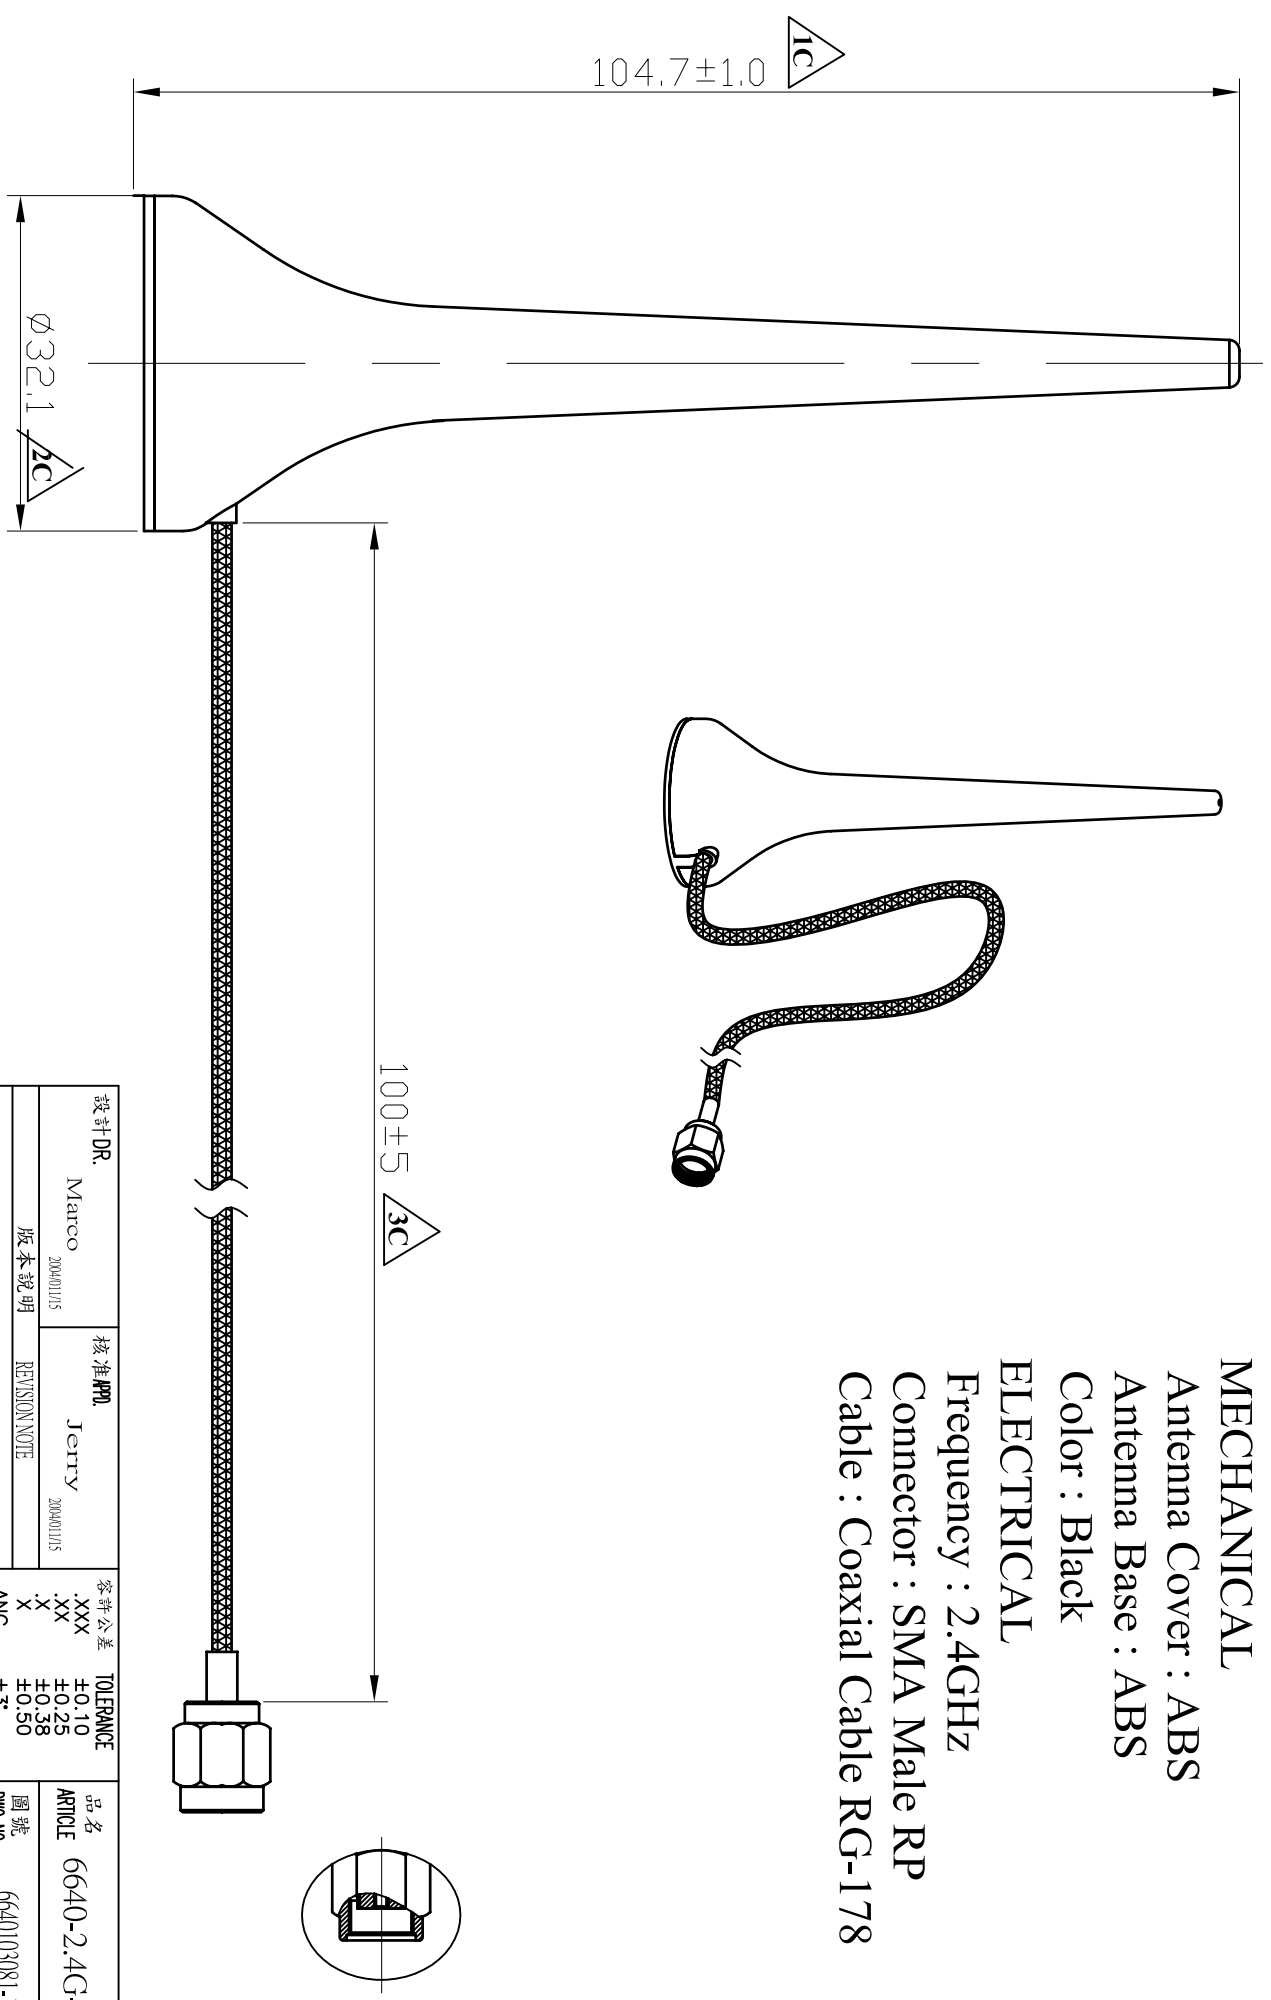

※凡標註C記號者,為品管檢驗之尺寸

設計DR. Marco 20040115		核准APPL Jerry 20040115		容許公差 TOLERANCE		品名 ARTICLE 6640-2.4G-SMA	圖號 DWG NO. 6640103081-10M	單位 UNIT mm	比例SCALE 2/1	張數SHEET 1/1	版本REV. A
版本說明 REVISION NOTE				.XXX ±0.10							
				.XX ±0.25							
				.X ±0.38							
				ANG ±0.50							
				±3°							
 KINSUN 慶陞											

附件一

Brand / Model : 6640103081-10M

Remark : 2495MHz

Tested by : Wind-Kuo



-- : Max. deg

Frequency(MHz) : **2495**

Pattern Field : **E plane**

Average Gain(dB) : **-3.24dB**

Maximum Gain(dB) : **2.32dB**

Maximum Gain(degree) : **57.14**

Minimum Gain(dB) : **-22.96dB**

Minimum Gain(degree) : **157.14**

附件二

Brand / Model : 6640103081-10M

Remark : 2495MHz

Tested by : Wind-Kuo



-- : Max. deg

Frequency(MHz) : **2495**

Pattern Field : **H plane**

Average Gain(dB) : **0.14dB**

Maximum Gain(dB) : **2.39dB**


Maximum Gain(degree) : **167.42**

Minimum Gain(dB) : **-1.45dB**

Minimum Gain(degree) : **279.04**

S11-Return Loss

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

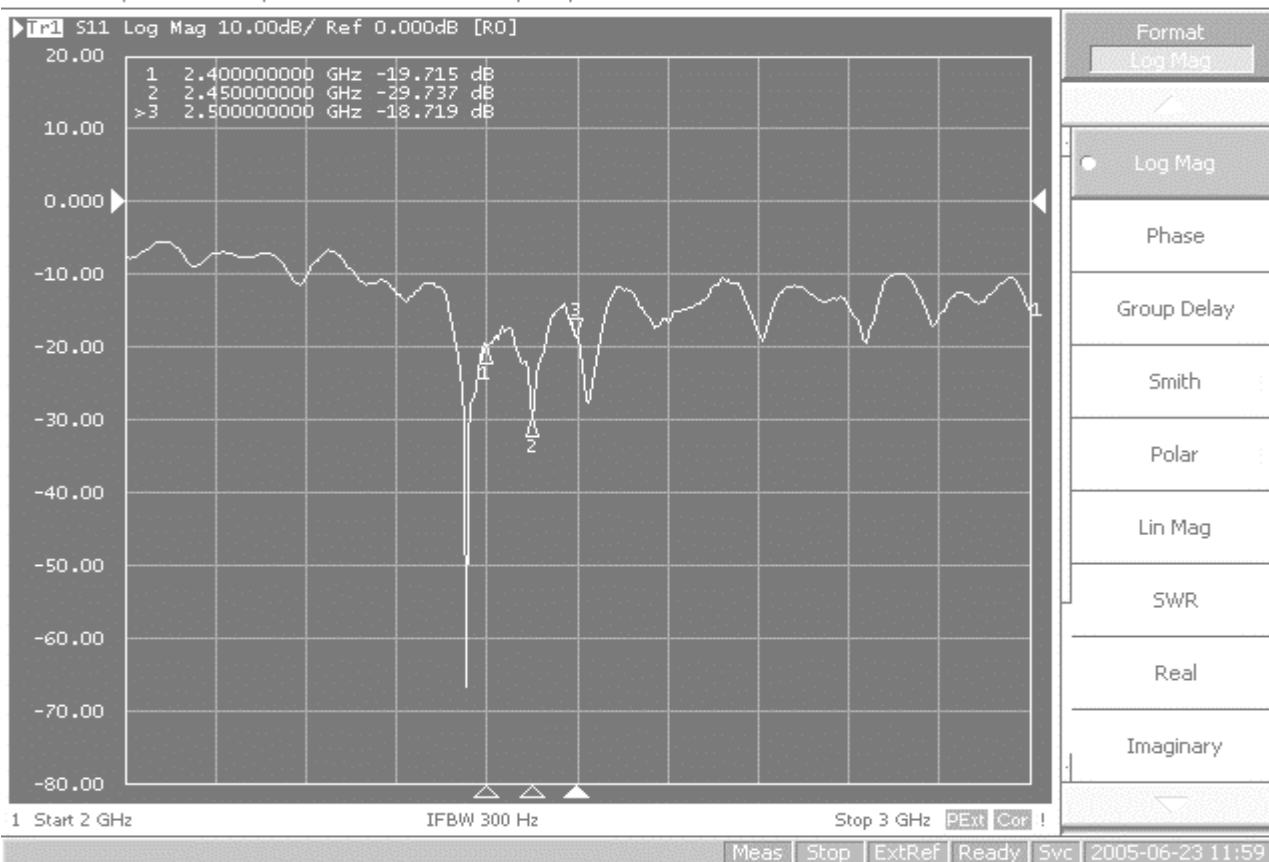

VSWR

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

