

FCC Test Report

Report No.: RF171006C01A-1

FCC ID: CFS8DLRCHS5200W

Test Model: RCHS5200W

Received Date: Dec. 29, 2017

Test Date: Jan. 05 ~ Jan. 10, 2018

Issued Date: Jan. 17, 2018

Applicant: Honeywell International Inc.

Address: 2 Corporate Center Drive Melville NY 11747 United States Of America

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

FCC Registration: 788550

Designation Number: TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information.....	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Description of Support Units	11
3.3.1 Configuration of System under Test	11
3.4 General Description of Applied Standards	11
4 Test Types and Results	12
4.1 Radiated Emission and Bandedge Measurement.....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement	12
4.1.2 Test Instruments	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard	14
4.1.5 Test Set Up	15
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results	17
4.2 Conducted Emission Measurement	37
4.2.1 Limits of Conducted Emission Measurement	37
4.2.2 Test Instruments	37
4.2.3 Test Procedures.....	37
4.2.4 Deviation from Test Standard	38
4.2.5 Test Setup.....	38
4.2.6 EUT Operating Conditions.....	38
4.2.7 Test Results	39
5 Pictures of Test Arrangements.....	43
Appendix – Information on the Testing Laboratories	44

Release Control Record

Issue No.	Description	Date Issued
RF171006C01A-1	Original release.	Jan. 17, 2018

1 Certificate of Conformity

Product: Smart Home Security Base Station

Brand: Honeywell

Test Model: RCHS5200W

Sample Status: Engineering sample


Applicant: Honeywell International Inc.

Test Date: Jan. 05 ~ Jan. 10, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Jan. 17, 2018
Pettie Chen / Senior Specialist

Approved by :  , **Date:** Jan. 17, 2018
Bruce Chen / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -9.67dB at 0.33768MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -4.6dB at 2483.50MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Smart Home Security Base Station
Brand	Honeywell
Test Model	RCHS5200W
Status of EUT	Engineering sample
Power Supply Rating	12Vdc (adapter)
Transfer Rate	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 72.2Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20)
Output Power	92.045mW
Antenna Type	Ant. 0: PIFA antenna with 1.3dBi gain Ant. 1: Loop antenna with 2.1dBi gain
Antenna Connector	NA
Accessory Device	Adapter
Data Cable Supplied	NA

Note:

1. This report is prepared for FCC class II permissive change. The difference compared with the original report (BV CPS report no.: RF171006C01-1) is Layout & software change (Listed as below). Therefore, test items for conducted emission and radiated emission test had been re-tested in this report.

DAS MB Schematic Design Change List - DVT1 to PVT

No.	Catalog	Function	Change Description
1	BB	Reset	■ Change the reset control from MOSFET to a diode, and the pull up source change to VPH_PWR.
2	BB	Audio Power Path	■ Add R2514 & C2513 to well control the Q2503 turn off when the AC adaptor remove.
3	MB	HW ID	Mount R1022, R1026, R1027 Non-mount R1023, R1024, R1025
4	MB	RS Test	Change R2914 from 22K to 10K.
5	Touch Board	Camera Desense issue	Change TP_RST_N_C signal D231 from ESD diode to 33pF
6	Touch Board	Mute Key Power on issue	Change TP R233 from 1K to 10K to ensure the voltage of PM8953_RESIN pin is higher than 1.12V.
7	Halo LED	LED power	Add a load switch on the LED board. The power off current can reduce from 5mA to 0.5mA.

DAS MB Layout Design Change List - DVT1 to PVT

No.	Catalog	Function	Change Description
1	BB	DDR	■ Reduce the DDR trace length to meet Qualcomm new layout guide from 20mm to 13.2mm.
2	BB	Reset	■ Change the reset control from MOSFET to a diode, and the pull up source change to VPH_PWR. ■ Add R1622 & R1623 at the up of bottom layer. ■ Add D1601 next to Q1602.
3	BB	Audio Power Path	■ Add R2514 & C2513 to well control the Q2503 turn off when the AC adaptor remove.
4	BB	DDR	Reduce trace length of EBI0_CA6 ~ EBI0_CA9
5	BB	DDR	Add trace length of EBI0_DQ17, EBI0_DQ21, EBI0_DQ29
6	BB	DDR	Modify some DQ trace length to target Qualcomm request
7	BB	Audio codec	Modify some trace routing and trace width of WCD9326
8	BB	PMIC Xtal	1. Delete GND under Xtal in layer2 2. Move layer2 trace to layer3
9	BB	Audio AMP	Modify some trace routing and trace width of WSA8815
10	BB	Camera	Follow new request of Camera MIPI match to modify some trace length
11	RF	WIFI	Follow new request of WLAN_BB_I/Q match to modify some trace length, the change of the control signals circuit between CPU and WiFi chip does not have an impact on the RF function.
12	RFI	Desense	Add 2 beads on the LED control signals to prevent LTE B12 desense issue.
13	MB	USB OTG	Remove MB U2903.
14	IO board	USB	Remove IO board CN104
15	MB	Debug Conn	Remove MB CN2101
16	Touch Board	Camera Desense issue	Add extra 33pF capacitor in parallel with the D231 on the Touch board.

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitter and 2 receivers.

Modulation Mode	TX Function
802.11b	1TX (Diversity)
802.11g	1TX (Diversity)
802.11n (HT20)	1TX (Diversity)

*For Antenna Port Conducted Measurement, Ant. 1 with maximum gain was chosen for the final test.

3. The EUT consumes power from the following adapter.

Adapter	
Brand	Asian Power Devices Inc.
Model	WA-30J12FU
Input Power	100-240Vac~50-60Hz, 0.9A Max
Output Power	12Vdc/ 2.5A
Power Line	1.5m non-shielded cable with one core

4. The WiFi and Bluetooth cannot transmit simultaneously.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO			DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	
A	√	√	√	Ant. 0
B	√	√	√	Ant. 1

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A, B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A, B	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11b	1 to 11	1	DSSS	DBPSK	1.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11b	1 to 11	1	DSSS	DBPSK	1.0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 66%RH	120Vac, 60Hz	Greg Lin James Yang
RE<1G	25deg. C, 66%RH	120Vac, 60Hz	Greg Lin
PLC	25deg. C, 75%RH	120Vac, 60Hz	Matthew Yang

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	ASUS	P2420L	FCNXC16385351D	FCC DoC Approved	-


Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Type C to USB cable	1	1.0	-	0	-

Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test

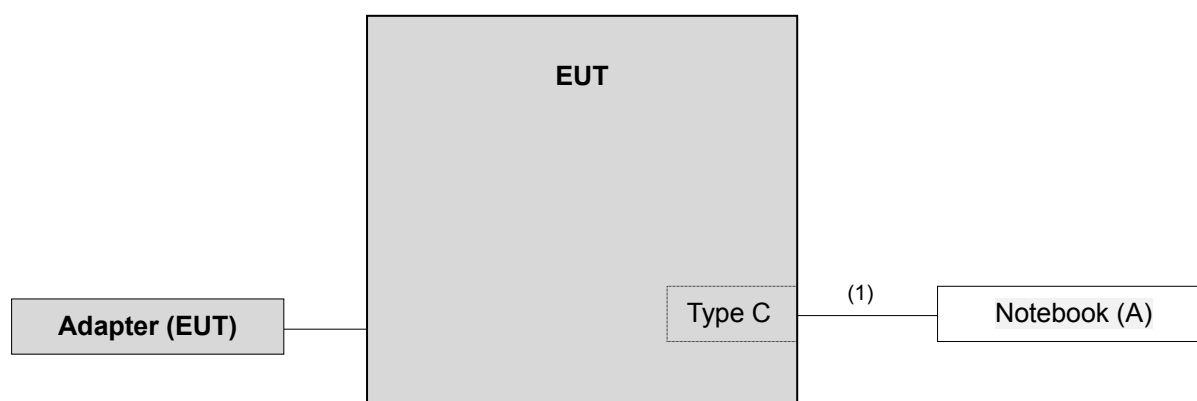

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v04
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Mar. 27, 2017	Mar. 26, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	May 11, 2017	May 10, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-148	Dec. 11, 2017	Dec. 10, 2018
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Dec. 12, 2017	Dec. 11, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 01, 2017	Nov. 30, 2018
Loop Antenna EMCI	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Aug. 08, 2017	Aug. 07, 2018
Preamplifier Agilent (Above 1GHz)	8449B	3008A01638	Feb. 22, 2017	Feb. 21, 2018
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104	MY 13380+295012/04	Aug. 08, 2017	Aug. 07, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Aug. 08, 2017	Aug. 07, 2018
RF signal cable Woken	8D-FB	Cable-CH9-01	Aug. 01, 2017	Jul. 31, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC 7450F-9.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


For Radiated emission below 30MHz

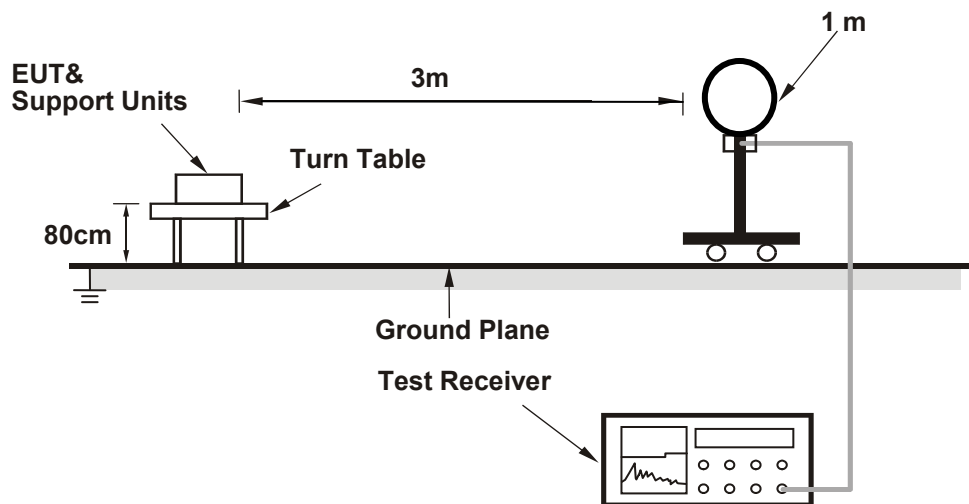

For Radiated emission 30MHz to 1GHz

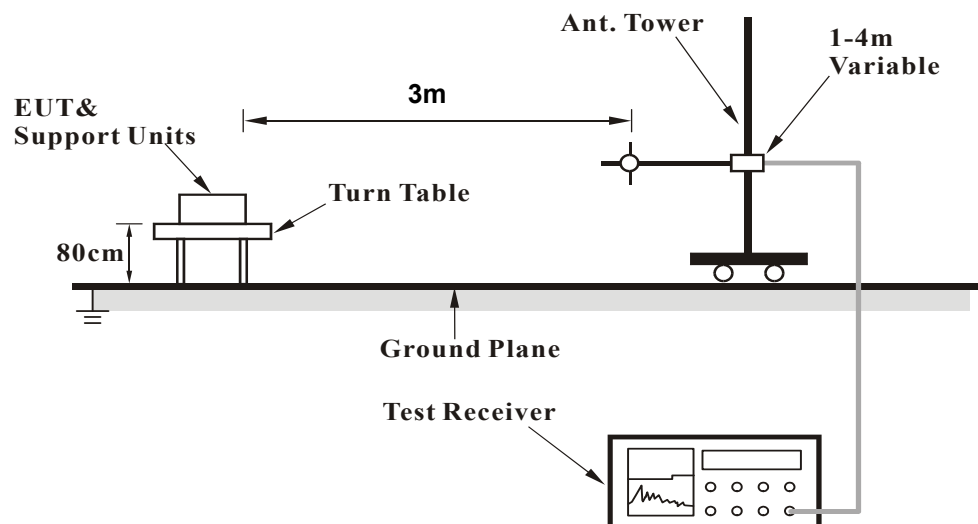

For Radiated emission above 1GHz

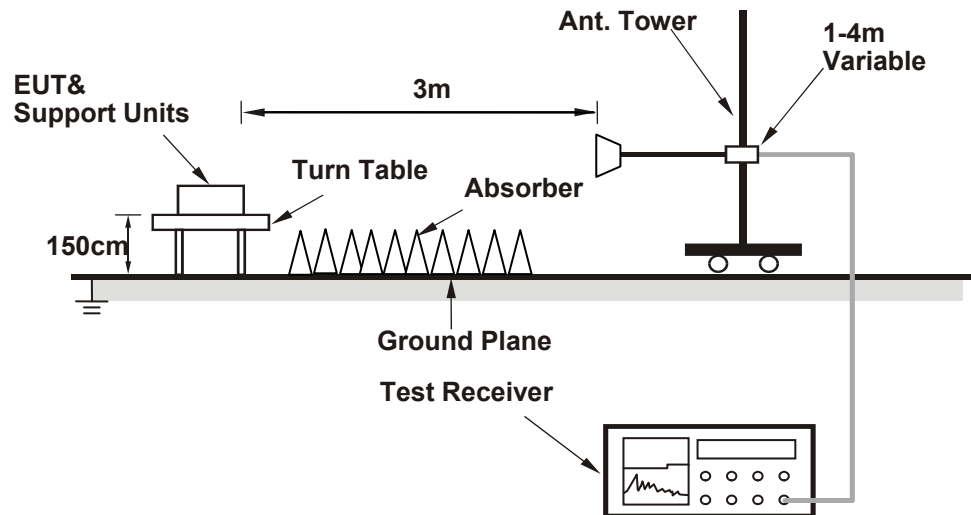

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT and a notebook via a type C to USB cable and placed them on the testing table.
- The notebook ran a test program to enable EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

Test Mode A

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.8 PK	74.0	-16.2	3.61 H	59	24.2	33.6
2	2390.00	45.9 AV	54.0	-8.1	3.61 H	59	12.3	33.6
3	*2412.00	104.6 PK			3.70 H	45	71.1	33.5
4	*2412.00	100.8 AV			3.70 H	45	67.3	33.5
5	4824.00	51.0 PK	74.0	-23.0	2.49 H	295	47.3	3.7
6	4824.00	44.3 AV	54.0	-9.7	2.49 H	295	40.6	3.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	3.61 V	175	23.9	33.6
2	2390.00	46.0 AV	54.0	-8.0	3.61 V	175	12.4	33.6
3	*2412.00	101.3 PK			3.72 V	182	67.8	33.5
4	*2412.00	97.5 AV			3.72 V	182	64.0	33.5
5	4824.00	48.5 PK	74.0	-25.5	3.95 V	61	44.8	3.7
6	4824.00	42.0 AV	54.0	-12.0	3.95 V	61	38.3	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.4 PK			3.60 H	70	71.0	33.4
2	*2437.00	100.6 AV			3.60 H	70	67.2	33.4
3	4874.00	48.8 PK	74.0	-25.2	1.47 H	149	44.9	3.9
4	4874.00	42.5 AV	54.0	-11.5	1.47 H	149	38.6	3.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.5 PK			3.84 V	176	68.1	33.4
2	*2437.00	97.8 AV			3.84 V	176	64.4	33.4
3	4874.00	47.1 PK	74.0	-26.9	3.47 V	243	43.2	3.9
4	4874.00	40.7 AV	54.0	-13.3	3.47 V	243	36.8	3.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.4 PK			3.29 H	32	70.9	33.5
2	*2462.00	100.9 AV			3.29 H	32	67.4	33.5
3	2483.50	58.1 PK	74.0	-15.9	3.42 H	44	24.6	33.5
4	2483.50	46.0 AV	54.0	-8.0	3.42 H	44	12.5	33.5
5	4924.00	50.7 PK	74.0	-23.3	3.30 H	104	46.5	4.2
6	4924.00	44.2 AV	54.0	-9.8	3.30 H	104	40.0	4.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.1 PK			3.99 V	174	68.6	33.5
2	*2462.00	98.5 AV			3.99 V	174	65.0	33.5
3	2483.50	57.6 PK	74.0	-16.4	3.87 V	184	24.1	33.5
4	2483.50	45.7 AV	54.0	-8.3	3.87 V	184	12.2	33.5
5	4924.00	49.5 PK	74.0	-24.5	3.54 V	260	45.3	4.2
6	4924.00	42.2 AV	54.0	-11.8	3.54 V	260	38.0	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	3.62 H	57	25.6	33.6
2	2390.00	47.0 AV	54.0	-7.0	3.62 H	57	13.4	33.6
3	*2412.00	105.8 PK			3.71 H	49	72.3	33.5
4	*2412.00	95.6 AV			3.71 H	49	62.1	33.5
5	4824.00	47.0 PK	74.0	-27.0	2.47 H	154	43.3	3.7
6	4824.00	34.0 AV	54.0	-20.0	2.47 H	154	30.3	3.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	3.87 V	177	24.8	33.6
2	2390.00	46.4 AV	54.0	-7.6	3.87 V	177	12.8	33.6
3	*2412.00	103.0 PK			3.76 V	183	69.5	33.5
4	*2412.00	92.8 AV			3.76 V	183	59.3	33.5
5	4824.00	45.6 PK	74.0	-28.4	3.01 V	249	41.9	3.7
6	4824.00	33.3 AV	54.0	-20.7	3.01 V	249	29.6	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.0 PK			3.55 H	67	72.6	33.4
2	*2437.00	95.6 AV			3.55 H	67	62.2	33.4
3	4874.00	46.7 PK	74.0	-27.3	2.13 H	307	42.8	3.9
4	4874.00	34.2 AV	54.0	-19.8	2.13 H	307	30.3	3.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.8 PK			3.62 V	208	69.4	33.4
2	*2437.00	92.7 AV			3.62 V	208	59.3	33.4
3	4874.00	46.0 PK	74.0	-28.0	2.74 V	108	42.1	3.9
4	4874.00	33.6 AV	54.0	-20.4	2.74 V	108	29.7	3.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.3 PK			3.59 H	54	72.8	33.5
2	*2462.00	96.0 AV			3.59 H	54	62.5	33.5
3	2483.50	64.2 PK	74.0	-9.8	3.34 H	16	30.7	33.5
4	2483.50	47.6 AV	54.0	-6.4	3.34 H	16	14.1	33.5
5	4924.00	47.3 PK	74.0	-26.7	1.84 H	265	43.1	4.2
6	4924.00	34.6 AV	54.0	-19.4	1.84 H	265	30.4	4.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.8 PK			3.95 V	184	70.3	33.5
2	*2462.00	93.3 AV			3.95 V	184	59.8	33.5
3	2483.50	63.2 PK	74.0	-10.8	3.87 V	196	29.7	33.5
4	2483.50	47.4 AV	54.0	-6.6	3.87 V	196	13.9	33.5
5	4924.00	46.0 PK	74.0	-28.0	1.94 V	233	41.8	4.2
6	4924.00	33.8 AV	54.0	-20.2	1.94 V	233	29.6	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.2 PK	74.0	-10.8	3.71 H	79	29.6	33.6
2	2390.00	48.0 AV	54.0	-6.0	3.71 H	79	14.4	33.6
3	*2412.00	106.3 PK			3.73 H	51	72.8	33.5
4	*2412.00	96.0 AV			3.73 H	51	62.5	33.5
5	4824.00	47.1 PK	74.0	-26.9	2.91 H	162	43.4	3.7
6	4824.00	34.1 AV	54.0	-19.9	2.91 H	162	30.4	3.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.2 PK	74.0	-11.8	3.87 V	164	28.6	33.6
2	2390.00	47.5 AV	54.0	-6.5	3.87 V	164	13.9	33.6
3	*2412.00	103.7 PK			3.73 V	187	70.2	33.5
4	*2412.00	93.4 AV			3.73 V	187	59.9	33.5
5	4824.00	45.8 PK	74.0	-28.2	3.16 V	274	42.1	3.7
6	4824.00	33.2 AV	54.0	-20.8	3.16 V	274	29.5	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.5 PK			3.56 H	66	72.1	33.4
2	*2437.00	95.3 AV			3.56 H	66	61.9	33.4
3	4874.00	46.8 PK	74.0	-27.2	2.61 H	158	42.9	3.9
4	4874.00	34.2 AV	54.0	-19.8	2.61 H	158	30.3	3.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.9 PK			3.62 V	209	69.5	33.4
2	*2437.00	92.7 AV			3.62 V	209	59.3	33.4
3	4874.00	45.6 PK	74.0	-28.4	1.17 V	203	41.7	3.9
4	4874.00	33.5 AV	54.0	-20.5	1.17 V	203	29.6	3.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.8 PK			3.57 H	54	72.3	33.5
2	*2462.00	95.6 AV			3.57 H	54	62.1	33.5
3	2483.50	61.0 PK	74.0	-13.0	3.62 H	26	27.5	33.5
4	2483.50	47.1 AV	54.0	-6.9	3.62 H	26	13.6	33.5
5	4924.00	46.9 PK	74.0	-27.1	1.61 H	205	42.7	4.2
6	4924.00	34.6 AV	54.0	-19.4	1.61 H	205	30.4	4.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.4 PK			3.94 V	183	69.9	33.5
2	*2462.00	93.2 AV			3.94 V	183	59.7	33.5
3	2483.50	60.7 PK	74.0	-13.3	3.82 V	166	27.2	33.5
4	2483.50	46.9 AV	54.0	-7.1	3.82 V	166	13.4	33.5
5	4924.00	45.9 PK	74.0	-28.1	1.07 V	217	41.7	4.2
6	4924.00	33.6 AV	54.0	-20.4	1.07 V	217	29.4	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.

Test Mode B

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	2.41 H	110	24.0	33.6
2	2390.00	45.5 AV	54.0	-8.5	2.41 H	110	11.9	33.6
3	*2412.00	104.0 PK			2.46 H	114	70.5	33.5
4	*2412.00	100.2 AV			2.46 H	114	66.7	33.5
5	4824.00	49.1 PK	74.0	-24.9	1.92 H	205	45.4	3.7
6	4824.00	41.3 AV	54.0	-12.7	1.92 H	205	37.6	3.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	3.42 V	172	23.9	33.6
2	2390.00	45.6 AV	54.0	-8.4	3.42 V	172	12.0	33.6
3	*2412.00	102.0 PK			3.38 V	180	68.5	33.5
4	*2412.00	98.2 AV			3.38 V	180	64.7	33.5
5	4824.00	49.6 PK	74.0	-24.4	3.94 V	63	45.9	3.7
6	4824.00	42.1 AV	54.0	-11.9	3.94 V	63	38.4	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.3 PK			2.45 H	123	71.9	33.4
2	*2437.00	101.5 AV			2.45 H	123	68.1	33.4
3	4874.00	50.3 PK	74.0	-23.7	2.43 H	285	46.4	3.9
4	4874.00	44.8 AV	54.0	-9.2	2.43 H	285	40.9	3.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.3 PK			3.32 V	180	67.9	33.4
2	*2437.00	97.6 AV			3.32 V	180	64.2	33.4
3	4874.00	48.3 PK	74.0	-25.7	3.74 V	14	44.4	3.9
4	4874.00	39.8 AV	54.0	-14.2	3.74 V	14	35.9	3.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.3 PK			2.50 H	120	72.8	33.5
2	*2462.00	102.7 AV			2.50 H	120	69.2	33.5
3	2483.50	57.8 PK	74.0	-16.2	2.51 H	124	24.3	33.5
4	2483.50	46.1 AV	54.0	-7.9	2.51 H	124	12.6	33.5
5	4924.00	50.4 PK	74.0	-23.6	2.48 H	280	46.2	4.2
6	4924.00	43.8 AV	54.0	-10.2	2.48 H	280	39.6	4.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.3 PK			4.00 V	76	68.8	33.5
2	*2462.00	98.8 AV			4.00 V	76	65.3	33.5
3	2483.50	57.6 PK	74.0	-16.4	3.95 V	71	24.1	33.5
4	2483.50	45.7 AV	54.0	-8.3	3.95 V	71	12.2	33.5
5	4924.00	49.6 PK	74.0	-24.4	3.76 V	169	45.4	4.2
6	4924.00	41.9 AV	54.0	-12.1	3.76 V	169	37.7	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	1.00 H	158	27.9	33.6
2	2390.00	47.1 AV	54.0	-6.9	1.00 H	158	13.5	33.6
3	*2412.00	104.5 PK			1.00 H	160	71.0	33.5
4	*2412.00	93.4 AV			1.00 H	160	59.9	33.5
5	4824.00	45.9 PK	74.0	-28.1	1.97 H	61	42.2	3.7
6	4824.00	33.2 AV	54.0	-20.8	1.97 H	61	29.5	3.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	3.69 V	68	25.7	33.6
2	2390.00	46.6 AV	54.0	-7.4	3.69 V	68	13.0	33.6
3	*2412.00	101.6 PK			3.67 V	71	68.1	33.5
4	*2412.00	91.0 AV			3.67 V	71	57.5	33.5
5	4824.00	46.3 PK	74.0	-27.7	2.54 V	118	42.6	3.7
6	4824.00	33.3 AV	54.0	-20.7	2.54 V	118	29.6	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.7 PK			1.00 H	158	70.3	33.4
2	*2437.00	93.6 AV			1.00 H	158	60.2	33.4
3	4874.00	46.5 PK	74.0	-27.5	1.18 H	325	42.6	3.9
4	4874.00	33.3 AV	54.0	-20.7	1.18 H	325	29.4	3.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.6 PK			3.59 V	69	71.2	33.4
2	*2437.00	94.1 AV			3.59 V	69	60.7	33.4
3	4874.00	45.9 PK	74.0	-28.1	1.75 V	103	42.0	3.9
4	4874.00	33.5 AV	54.0	-20.5	1.75 V	103	29.6	3.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.7 PK			1.00 H	157	71.2	33.5
2	*2462.00	93.8 AV			1.00 H	157	60.3	33.5
3	2483.50	65.6 PK	74.0	-8.4	1.00 H	166	32.1	33.5
4	2483.50	49.0 AV	54.0	-5.0	1.00 H	166	15.5	33.5
5	4924.00	46.7 PK	74.0	-27.3	2.55 H	162	42.5	4.2
6	4924.00	34.1 AV	54.0	-19.9	2.55 H	162	29.9	4.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.3 PK			3.53 V	69	68.8	33.5
2	*2462.00	91.9 AV			3.53 V	69	58.4	33.5
3	2483.50	66.6 PK	74.0	-7.4	3.44 V	73	33.1	33.5
4	2483.50	49.4 AV	54.0	-4.6	3.44 V	73	15.9	33.5
5	4924.00	46.5 PK	74.0	-27.5	2.84 V	320	42.3	4.2
6	4924.00	33.8 AV	54.0	-20.2	2.84 V	320	29.6	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.8 PK	74.0	-10.2	1.00 H	166	30.2	33.6
2	2390.00	48.1 AV	54.0	-5.9	1.00 H	166	14.5	33.6
3	*2412.00	103.9 PK			1.00 H	160	70.4	33.5
4	*2412.00	94.0 AV			1.00 H	160	60.5	33.5
5	4824.00	45.8 PK	74.0	-28.2	2.18 H	54	42.1	3.7
6	4824.00	33.2 AV	54.0	-20.8	2.18 H	54	29.5	3.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.5 PK	74.0	-14.5	3.48 V	53	25.9	33.6
2	2390.00	47.2 AV	54.0	-6.8	3.48 V	53	13.6	33.6
3	*2412.00	100.1 PK			3.44 V	50	66.6	33.5
4	*2412.00	89.5 AV			3.44 V	50	56.0	33.5
5	4824.00	46.8 PK	74.0	-27.2	1.72 V	345	43.1	3.7
6	4824.00	33.5 AV	54.0	-20.5	1.72 V	345	29.8	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.5 PK			1.00 H	160	68.1	33.4
2	*2437.00	91.6 AV			1.00 H	160	58.2	33.4
3	4874.00	46.1 PK	74.0	-27.9	1.57 H	199	42.2	3.9
4	4874.00	33.4 AV	54.0	-20.6	1.57 H	199	29.5	3.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.5 PK			3.25 V	73	71.1	33.4
2	*2437.00	94.3 AV			3.25 V	73	60.9	33.4
3	4874.00	45.7 PK	74.0	-28.3	2.94 V	112	41.8	3.9
4	4874.00	33.3 AV	54.0	-20.7	2.94 V	112	29.4	3.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.2 PK			1.00 H	161	67.7	33.5
2	*2462.00	90.1 AV			1.00 H	161	56.6	33.5
3	2483.50	61.8 PK	74.0	-12.2	1.00 H	163	28.3	33.5
4	2483.50	47.5 AV	54.0	-6.5	1.00 H	163	14.0	33.5
5	4924.00	46.3 PK	74.0	-27.7	2.84 H	218	42.1	4.2
6	4924.00	34.4 AV	54.0	-19.6	2.84 H	218	30.2	4.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.3 PK			3.24 V	60	66.8	33.5
2	*2462.00	90.0 AV			3.24 V	60	56.5	33.5
3	2483.50	68.1 PK	74.0	-5.9	3.18 V	61	34.6	33.5
4	2483.50	48.3 AV	54.0	-5.7	3.18 V	61	14.8	33.5
5	4924.00	47.1 PK	74.0	-26.9	2.17 V	164	42.9	4.2
6	4924.00	34.7 AV	54.0	-19.3	2.17 V	164	30.5	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

Test Mode A

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	93.05	28.7 QP	43.5	-14.8	1.50 H	179	47.6	-18.9
2	149.31	27.1 QP	43.5	-16.4	1.00 H	68	40.7	-13.6
3	231.76	36.7 QP	46.0	-9.3	1.25 H	119	52.5	-15.8
4	499.48	25.6 QP	46.0	-20.4	1.00 H	159	35.0	-9.4
5	713.85	35.3 QP	46.0	-10.7	1.25 H	336	41.2	-5.9
6	935.01	29.0 QP	46.0	-17.0	2.00 H	267	31.3	-2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	89.17	33.1 QP	43.5	-10.4	1.00 V	148	52.2	-19.1
2	251.16	32.3 QP	46.0	-13.7	1.25 V	156	46.5	-14.2
3	447.10	24.2 QP	46.0	-21.8	1.50 V	178	34.2	-10.0
4	597.45	23.7 QP	46.0	-22.3	2.00 V	234	31.3	-7.6
5	768.17	31.8 QP	46.0	-14.2	1.50 V	293	36.3	-4.5
6	934.04	28.9 QP	46.0	-17.1	1.25 V	245	31.2	-2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Test Mode B

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.10	34.3 QP	40.0	-5.7	1.50 H	80	48.3	-14.0
2	152.22	26.0 QP	43.5	-17.5	2.00 H	189	39.4	-13.4
3	251.16	32.7 QP	46.0	-13.3	1.00 H	178	46.9	-14.2
4	483.96	23.6 QP	46.0	-22.4	1.50 H	11	33.2	-9.6
5	745.86	24.6 QP	46.0	-21.4	1.25 H	18	29.7	-5.1
6	962.17	26.9 QP	54.0	-27.1	1.00 H	40	28.6	-1.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	88.20	33.0 QP	43.5	-10.5	1.00 V	176	52.2	-19.2
2	251.16	32.7 QP	46.0	-13.3	1.50 V	178	46.9	-14.2
3	447.10	23.1 QP	46.0	-22.9	1.25 V	116	33.1	-10.0
4	595.51	23.6 QP	46.0	-22.4	2.00 V	178	31.2	-7.6
5	745.86	24.6 QP	46.0	-21.4	1.50 V	18	29.7	-5.1
6	962.17	26.9 QP	54.0	-27.1	1.25 V	40	28.6	-1.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 23, 2017	Nov. 22, 2018
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Sep. 05, 2017	Sep. 04, 2018
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 10, 2017	Mar. 09, 2018
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 15, 2017	Aug. 14, 2018
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

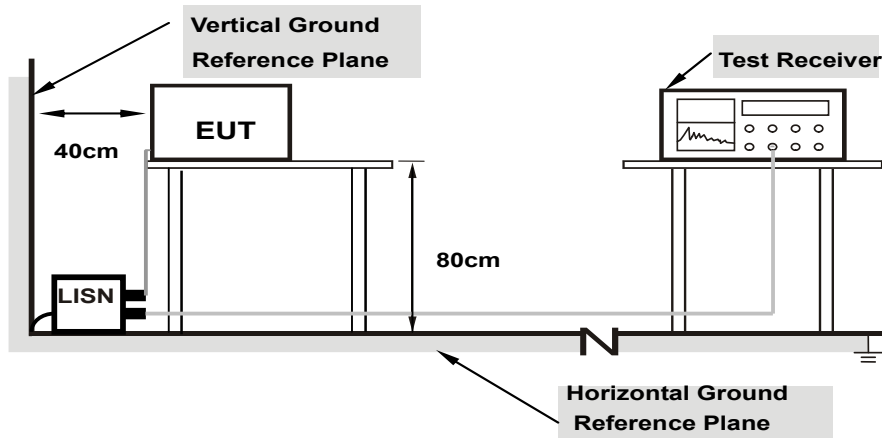

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16096	10.16	36.22	22.48	46.38	32.64	65.41	55.41	-19.03	-22.77
2	0.25557	10.17	27.59	19.34	37.76	29.51	61.57	51.57	-23.81	-22.06
3	0.34108	10.19	35.89	28.79	46.08	38.98	59.18	49.18	-13.10	-10.20
4	7.86834	10.54	12.80	7.57	23.34	18.11	60.00	50.00	-36.66	-31.89
5	12.25927	10.79	12.95	7.69	23.74	18.48	60.00	50.00	-36.26	-31.52
6	20.63840	11.26	13.08	5.46	24.34	16.72	60.00	50.00	-35.66	-33.28

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

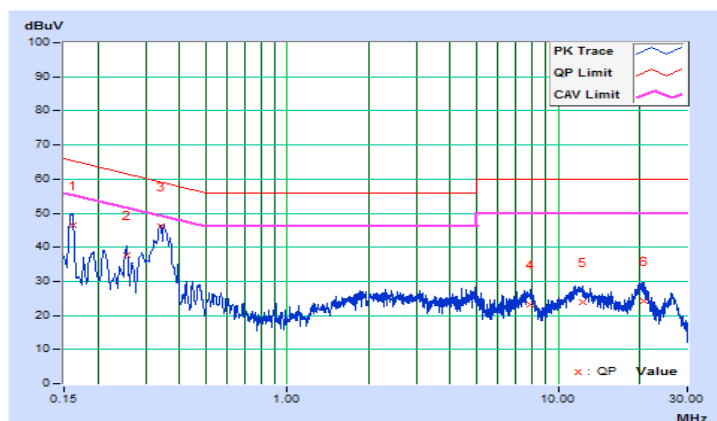


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	10.15	35.76	22.54	45.91	32.69	65.37	55.37	-19.46	-22.68
2	0.33750	10.19	32.39	26.54	42.58	36.73	59.26	49.26	-16.68	-12.53
3	1.02584	10.20	13.34	8.13	23.54	18.33	56.00	46.00	-32.46	-27.67
4	5.14307	10.39	14.78	7.01	25.17	17.40	60.00	50.00	-34.83	-32.60
5	11.59848	10.64	11.52	5.56	22.16	16.20	60.00	50.00	-37.84	-33.80
6	19.78602	11.01	14.37	7.76	25.38	18.77	60.00	50.00	-34.62	-31.23

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

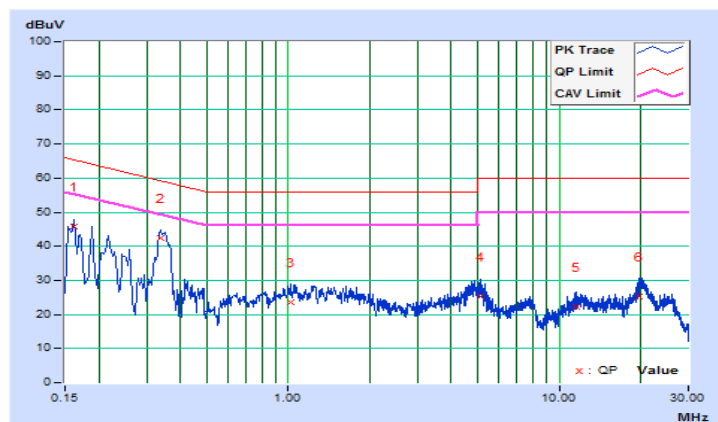


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
	[MHz]	(dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15782	10.16	36.65	22.53	46.81	32.69	65.58	55.58	-18.77	-22.89
2	0.22024	10.16	30.14	19.89	40.30	30.05	62.81	52.81	-22.51	-22.76
3	0.33768	10.19	35.47	29.40	45.66	39.59	59.26	49.26	-13.60	-9.67
4	2.07372	10.25	13.17	8.01	23.42	18.26	56.00	46.00	-32.58	-27.74
5	4.82636	10.39	13.90	6.84	24.29	17.23	56.00	46.00	-31.71	-28.77
6	20.21612	11.26	14.04	6.66	25.30	17.92	60.00	50.00	-34.70	-32.08

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

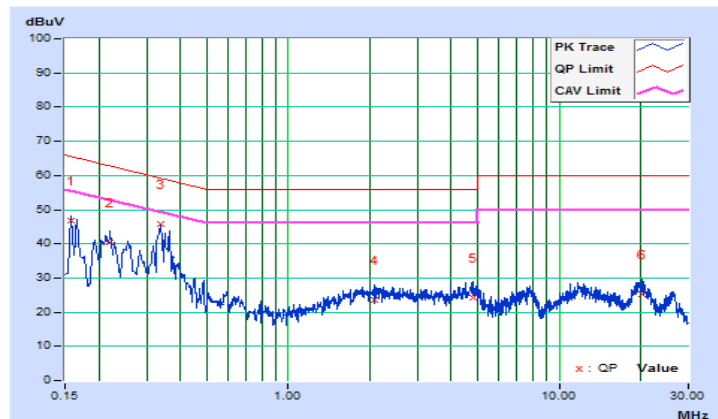


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18122	10.16	34.10	21.20	44.26	31.36	64.43	54.43	-20.17	-23.07
2	0.34018	10.19	34.53	28.22	44.72	38.41	59.20	49.20	-14.48	-10.79
3	1.40511	10.21	13.36	9.48	23.57	19.69	56.00	46.00	-32.43	-26.31
4	4.63868	10.37	15.31	8.15	25.68	18.52	56.00	46.00	-30.32	-27.48
5	11.20357	10.62	12.27	6.54	22.89	17.16	60.00	50.00	-37.11	-32.84
6	19.80166	11.01	13.38	7.02	24.39	18.03	60.00	50.00	-35.61	-31.97

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

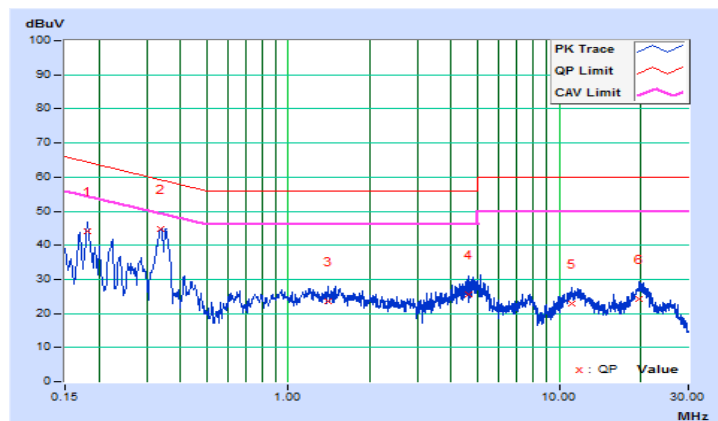

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---