



一、Plane structure drawing: unit:MM

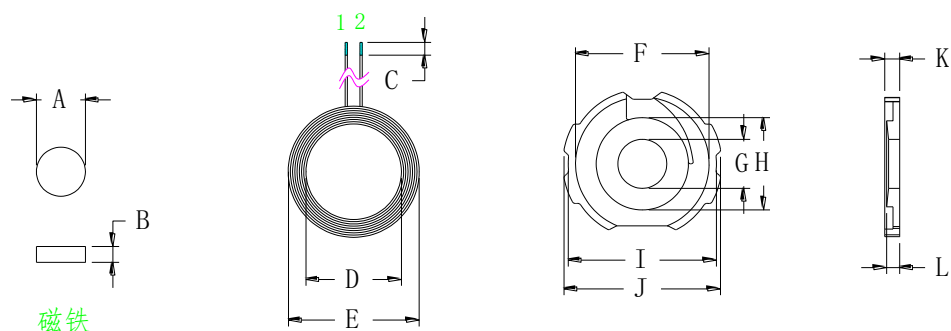

A	7.65 ± 0.05
B	2.0 ± 0.05
C	2 ± 1
D	15 ± 0.2
E	20.7 ± 0.3
F	21 ± 0.2
G	7.7 ± 0.05
H	14.5 ± 0.1
I	23.5 ± 0.3
J	25 ± 0.2
K	2.5 ± 0.15
L	2.4 ± 0.1 中柱高度
M	8 ± 1

二、Product parameters:

Foot position	Diameter of wire	Number	Remarks
1 - 2	0.08*24P	13	Hot air stranded wire

4、Electrical property parameter:

1. Inductance value, Q value:

PIN 1 — 2 = 7.6uH $\pm$ 0.3UH

Q value $\geq$ 25

The above inductance values are based on Changhua 1062A instrument with 10KHZ/0.3Vrms as the standard or equivalent instrument.

Q value is based on Changhua 1062A instrument with 100KHZ/0.3Vrms as the standard or equivalent instrument

5、Bill of materials:

	Name	Material	Supplier	Remarks
1	Hot air stranded	wire 0.08X24P	Uygur and Han or equivalent	
2	Magnetic disc	G25 Die casting piece	Tian tong or equivalent	
3	Tin	High temperature environmental protection	Thousand Islands or equivalent	
4	White glue	BY882	Bao Yue or equivalent	
5	High intensity magnetic field	7.65*2(Strength greater than 3200GS)	United wins or equivalent	
6	Double sided adhesive	513-13*13mm	Honghui or d	square