

FCC REPORT

Applicant: C&A Marketing Inc.

Address of Applicant: 114 Tived Lane East, Edison, New Jersey, United States

Manufacturer/Factory: ZHEJIANG TONOUCH ELECTORNICS CO., LTD

Address of Manufacturer/Factory: No.1111, Jinhai Road, East Cixi Coastal Economic Development District, Ningbo(315000), China

Equipment Under Test (EUT)

Product Name: Speaker

Model No.: LYXSPATR

Trade Mark: LYXPRO

FCC ID: 2AD2WLYXSPATR

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: April 23, 2019

Date of Test: April 23- April 29, 2019

Date of report issued: April 29, 2019

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A handwritten signature in black ink is written over a circular blue stamp. The stamp contains the text "GLOBAL UNITED TECHNOLOGY SERVICES CO., LTD." around the perimeter and "GLOBAL TESTING" in the center. The signature appears to be "Robinson Lo".

Robinson Lo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	April 29, 2019	Original

Prepared By:




Date:

April 29, 2019

Project Engineer

Check By:



Date:

April 29, 2019

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY	7
5.5 TEST LOCATION	7
5.6 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 RADIATED EMISSION METHOD	14
7.3.1 Field Strength of The Fundamental Signal	16
7.3.2 Spurious emissions.....	19
7.3.3 Bandedge emissions.....	30
7.4 20dB OCCUPY BANDWIDTH	33
8 TEST SETUP PHOTO	37
9 EUT CONSTRUCTIONAL DETAILS	39

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of $k=2$ and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Speaker
Model No.:	LYXSPATR
Serial No.:	DCH5025
Test sample(s) ID:	GTS201904000181
Sample(s) Status	Engineered sample
Hardware Version:	HV1.0
Software Version:	SV1.0
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	PCB antenna
Antenna gain:	0dBi(declare by applicant)
Power supply:	AC 100-120V / 220-240V, 50/60Hz
Test Voltage :	AC 120V / 60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Pre-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	95.11	96.96	96.42

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup":
Y axis (see the test setup photo)

5.3 Description of Support Units

None.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.6 Additional instructions

Software (Used for test) from client

Mode	Special test SW was built-in by manufacturer.
Power set	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 27 2018	June. 26 2019
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 27 2018	June. 26 2019
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 27 2018	June. 26 2019
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 27 2018	June. 26 2019
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 27 2018	June. 26 2019
9	Coaxial Cable	GTS	N/A	GTS211	June. 27 2018	June. 26 2019
10	Coaxial cable	GTS	N/A	GTS210	June. 27 2018	June. 26 2019
11	Coaxial Cable	GTS	N/A	GTS212	June. 27 2018	June. 26 2019
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 27 2018	June. 26 2019
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 27 2018	June. 26 2019
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 27 2018	June. 26 2019
15	Band filter	Amindeon	82346	GTS219	June. 27 2018	June. 26 2019
16	Power Meter	Anritsu	ML2495A	GTS540	June. 27 2018	June. 26 2019
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 27 2018	June. 26 2019
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 27 2018	June. 26 2019
19	Splitter	Agilent	11636B	GTS237	June. 27 2018	June. 26 2019
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 27 2018	June. 26 2019
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 20 2018	Oct. 19 2019
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 20 2018	Oct. 19 2019
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 20 2018	Oct. 19 2019
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 27 2018	June. 26 2019


Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 27 2018	June. 26 2019
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 27 2018	June. 26 2019
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 27 2018	June. 26 2019
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 27 2018	June. 26 2019

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 27 2018	June. 26 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 27 2018	June. 26 2019
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 27 2018	June. 26 2019
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 27 2018	June. 26 2019
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 27 2018	June. 26 2019
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 27 2018	June. 26 2019
8	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 27 2018	June. 26 2019

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 27 2018	June. 26 2019
2	Barometer	ChangChun	DYM3	GTS255	June. 27 2018	June. 26 2019

7 Test results and Measurement Data

7.1 Antenna requirement

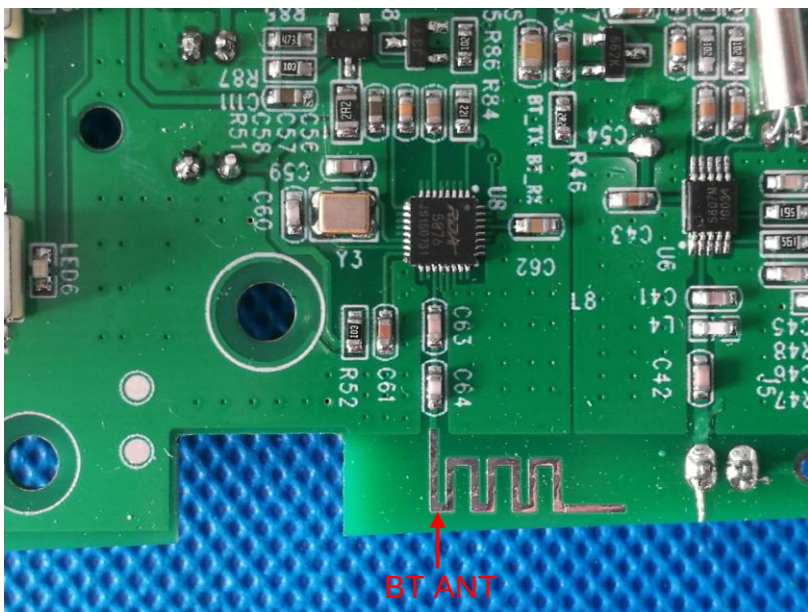Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna: <i>The antenna is PCB antenna, the best case gain of the antenna is 0dBi.</i>	
	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	Reference Plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test procedure:	1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	N/A, Because the EUT employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Measurements to demonstrate compliance with the conducted limits are not required for devices.		

Measurement data


The EUT was tested in GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation is the worst case.

EUT :	Speaker	Model Name. :	LYXSPATR
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode :	Worst mode-GFSK

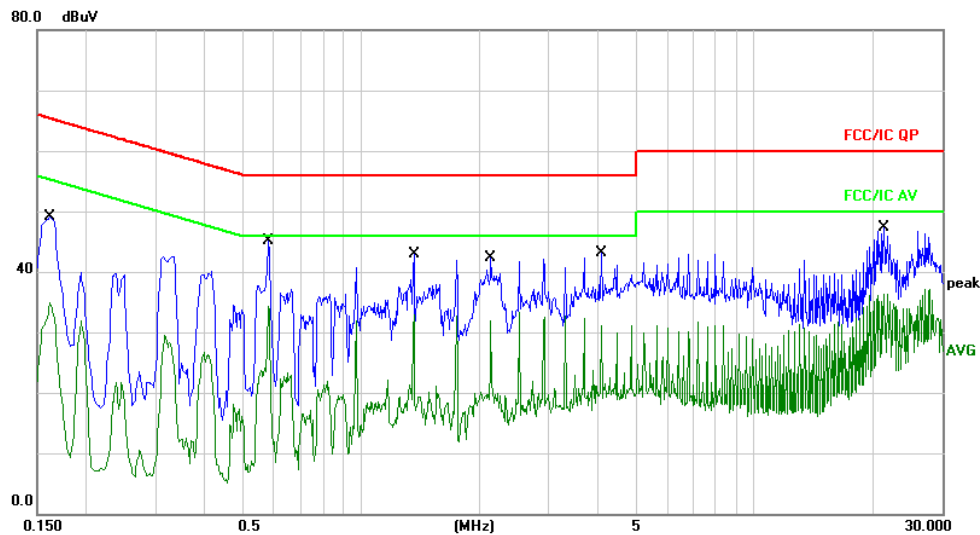

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	39.37	9.67	49.04	65.36	-16.32	QP	
2		0.1620	25.16	9.67	34.83	55.36	-20.53	AVG	
3	*	0.5820	35.43	9.68	45.11	56.00	-10.89	QP	
4		0.5820	24.56	9.68	34.24	46.00	-11.76	AVG	
5		1.3619	33.11	9.70	42.81	56.00	-13.19	QP	
6		1.3619	23.12	9.70	32.82	46.00	-13.18	AVG	
7		2.1380	32.48	9.72	42.20	56.00	-13.80	QP	
8		2.1380	22.26	9.72	31.98	46.00	-14.02	AVG	
9		4.0780	33.46	9.73	43.19	56.00	-12.81	QP	
10		4.0780	22.59	9.73	32.32	46.00	-13.68	AVG	
11		21.3660	37.52	9.84	47.36	60.00	-12.64	QP	
12		21.3660	26.54	9.84	36.38	50.00	-13.62	AVG	

EUT :	Speaker	Model Name. :	LYXSPATR
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode :	Worst mode-GFSK

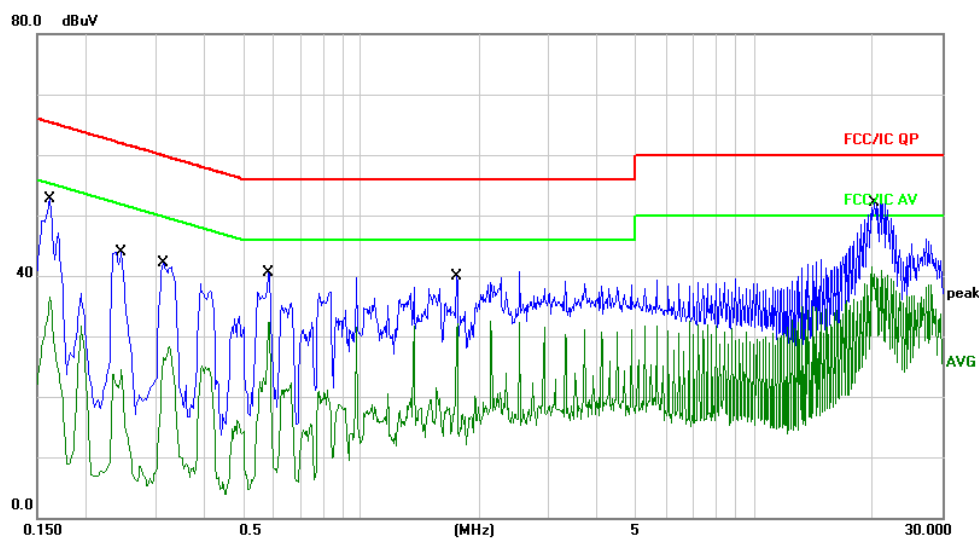



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	43.05	9.67	52.72	65.36	-12.64	QP	
2		0.1620	26.75	9.67	36.42	55.36	-18.94	AVG	
3		0.2460	34.21	9.65	43.86	61.89	-18.03	QP	
4		0.2460	14.92	9.65	24.57	51.89	-27.32	AVG	
5		0.3140	32.44	9.66	42.10	59.86	-17.76	QP	
6		0.3140	18.72	9.66	28.38	49.86	-21.48	AVG	
7		0.5820	30.84	9.68	40.52	56.00	-15.48	QP	
8		0.5820	22.68	9.68	32.36	46.00	-13.64	AVG	
9		1.7500	30.11	9.71	39.82	56.00	-16.18	QP	
10		1.7500	22.33	9.71	32.04	46.00	-13.96	AVG	
11	*	20.0740	42.19	9.84	52.03	60.00	-7.97	QP	
12		20.0740	31.66	9.84	41.50	50.00	-8.50	AVG	

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

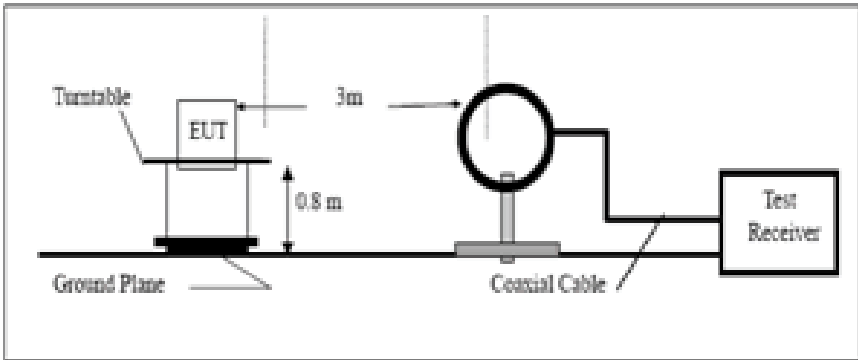Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)		Remark
	0.009MHz-0.490MHz		2400/F(kHz) @300m		Quasi-peak Value
	0.490MHz-1.705MHz		24000/F(kHz) @30m		Quasi-peak Value
	1.705MHz-30.0MHz		30 @30m		Quasi-peak Value
	30MHz-88MHz		100 @3m		Quasi-peak Value
	88MHz-216MHz		150 @3m		Quasi-peak Value
	216MHz-960MHz		200 @3m		Quasi-peak Value
	960MHz-1GHz		500 @3m		Quasi-peak Value
	Above 1GHz		500 @3m		Average Value
			5000 @3m		Peak Value
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz				
					

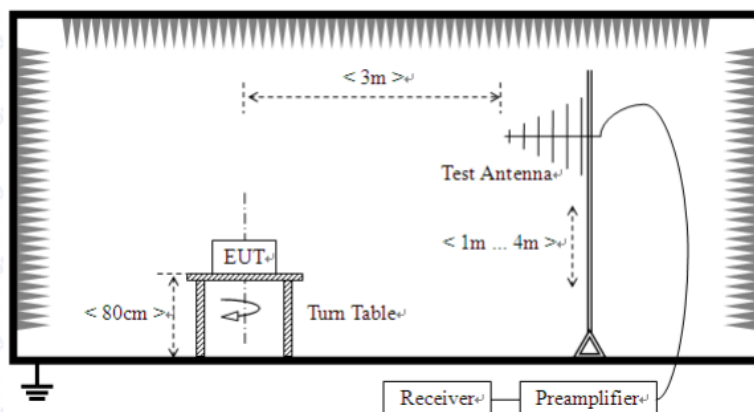

Above 1GHz

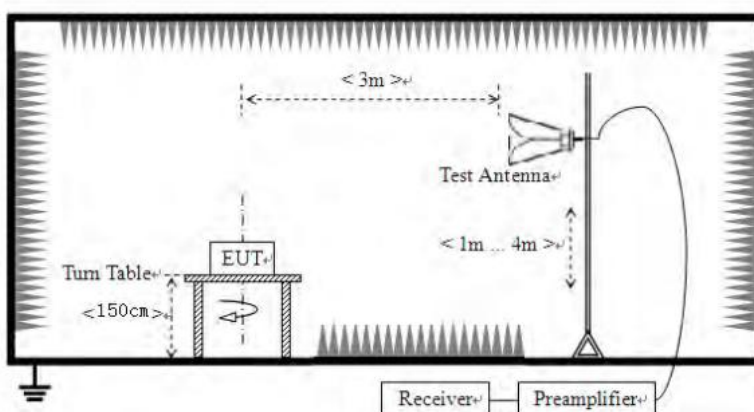

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

GFSK

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	94.26	27.58	5.39	30.18	97.05	114.00	-16.95	Vertical
2402.00	93.91	27.58	5.39	30.18	96.70	114.00	-17.30	Horizontal
2441.00	92.38	27.55	5.43	30.06	95.30	114.00	-18.70	Vertical
2441.00	87.02	27.55	5.43	30.06	89.94	114.00	-24.06	Horizontal
2480.00	93.57	27.52	5.47	29.93	96.63	114.00	-17.37	Vertical
2480.00	90.95	27.52	5.47	29.93	94.01	114.00	-19.99	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	82.69	27.58	5.39	30.18	85.48	94.00	-8.52	Vertical
2402.00	80.91	27.58	5.39	30.18	83.70	94.00	-10.30	Horizontal
2441.00	79.67	27.55	5.43	30.06	82.59	94.00	-11.41	Vertical
2441.00	75.90	27.55	5.43	30.06	78.82	94.00	-15.18	Horizontal
2480.00	82.94	27.52	5.47	29.93	86.00	94.00	-8.00	Vertical
2480.00	80.23	27.52	5.47	29.93	83.29	94.00	-10.71	Horizontal

$\pi/4$ -DQPSK

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	91.83	27.58	5.39	30.18	94.62	114.00	-19.38	Vertical
2402.00	91.51	27.58	5.39	30.18	94.30	114.00	-19.70	Horizontal
2441.00	91.93	27.55	5.43	30.06	94.85	114.00	-19.15	Vertical
2441.00	88.34	27.55	5.43	30.06	91.26	114.00	-22.74	Horizontal
2480.00	91.70	27.52	5.47	29.93	94.76	114.00	-19.24	Vertical
2480.00	90.83	27.52	5.47	29.93	93.89	114.00	-20.11	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	81.92	27.58	5.39	30.18	84.71	94.00	-9.29	Vertical
2402.00	77.64	27.58	5.39	30.18	80.43	94.00	-13.57	Horizontal
2441.00	80.78	27.55	5.43	30.06	83.70	94.00	-10.30	Vertical
2441.00	74.46	27.55	5.43	30.06	77.38	94.00	-16.62	Horizontal
2480.00	81.93	27.52	5.47	29.93	84.99	94.00	-9.01	Vertical
2480.00	80.28	27.52	5.47	29.93	83.34	94.00	-10.66	Horizontal

8-DPSK

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	92.24	27.58	5.39	30.18	95.03	114.00	-18.97	Vertical
2402.00	88.56	27.58	5.39	30.18	91.35	114.00	-22.65	Horizontal
2441.00	87.85	27.55	5.43	30.06	90.77	114.00	-23.23	Vertical
2441.00	88.80	27.55	5.43	30.06	91.72	114.00	-22.28	Horizontal
2480.00	92.33	27.52	5.47	29.93	95.39	114.00	-18.61	Vertical
2480.00	90.17	27.52	5.47	29.93	93.23	114.00	-20.77	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	78.01	27.58	5.39	30.18	80.80	94.00	-13.20	Vertical
2402.00	77.64	27.58	5.39	30.18	80.43	94.00	-13.57	Horizontal
2441.00	77.29	27.55	5.43	30.06	80.21	94.00	-13.79	Vertical
2441.00	76.40	27.55	5.43	30.06	79.32	94.00	-14.68	Horizontal
2480.00	79.18	27.52	5.47	29.93	82.24	94.00	-11.76	Vertical
2480.00	78.23	27.52	5.47	29.93	81.29	94.00	-12.71	Horizontal

7.3.2 Spurious emissions


Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

Below 1GHz


The EUT was tested in GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation is the worst case.

EUT :	Speaker	Model Name. :	LYXSPATR
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC120V/60Hz	Test Mode :	Worst mode-GFSK

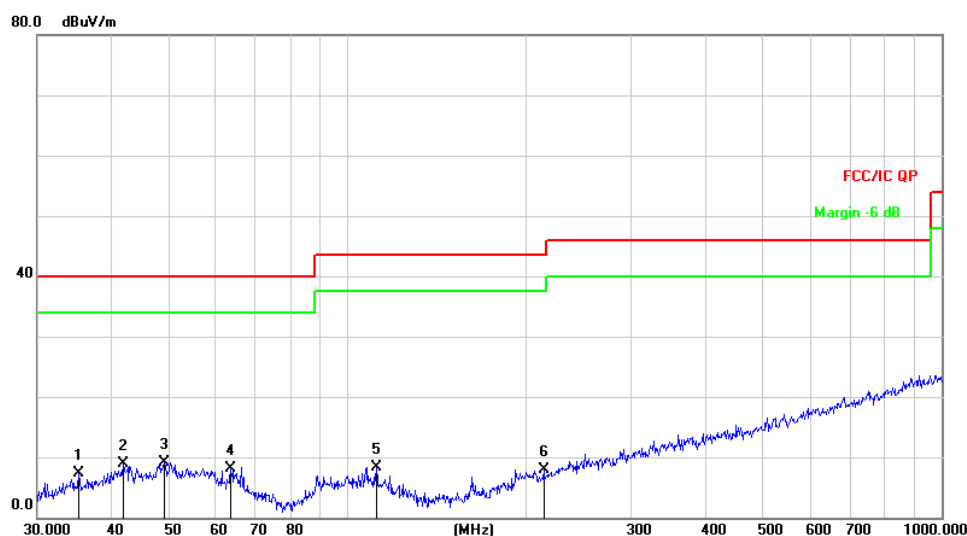

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		35.2512	24.64	-17.36	7.28	40.00	-32.72	QP
2		41.8596	24.03	-15.14	8.89	40.00	-31.11	QP
3	*	49.0145	23.80	-14.65	9.15	40.00	-30.85	QP
4		63.5356	24.69	-16.59	8.10	40.00	-31.90	QP
5		111.7380	25.02	-16.73	8.29	43.50	-35.21	QP
6		213.7634	23.61	-15.73	7.88	43.50	-35.62	QP

EUT :	Speaker	Model Name. :	LYXSPATR
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	AC120V/60Hz	Test Mode :	Worst mode-GFSK

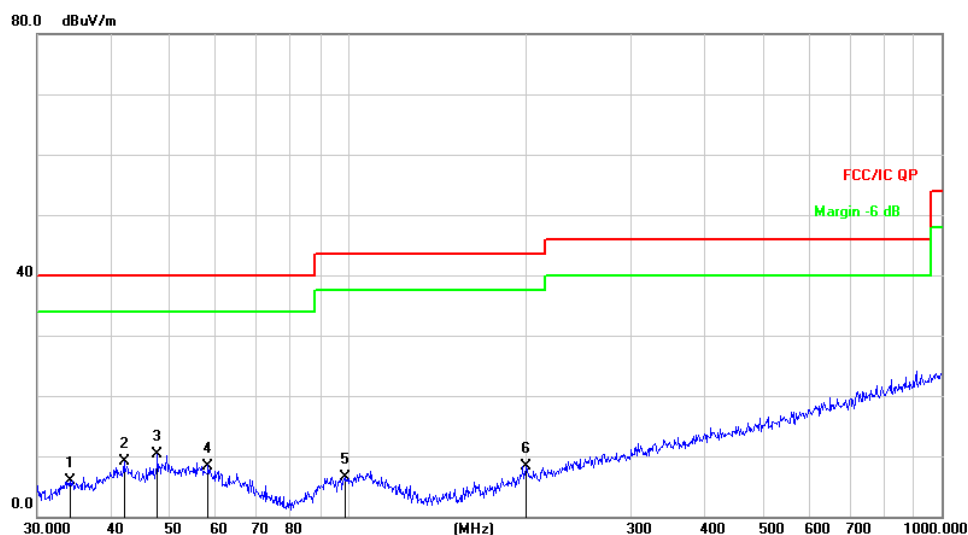

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		34.0365	23.54	-17.69	5.85	40.00	-34.15	QP
2		42.0066	24.11	-15.09	9.02	40.00	-30.98	QP
3	*	47.8260	25.00	-14.73	10.27	40.00	-29.73	QP
4		58.2030	24.39	-15.99	8.40	40.00	-31.60	QP
5		99.1797	23.25	-16.72	6.53	43.50	-36.97	QP
6		199.9856	24.01	-15.63	8.38	43.50	-35.12	QP

■ Above 1GHz

Test channel:	Lowest channel-GFSK
---------------	---------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	41.12	31.78	8.60	32.09	49.41	74.00	-24.59	Vertical
7206.00	33.05	36.15	11.65	32.00	48.85	74.00	-25.15	Vertical
9608.00	31.81	37.95	14.14	31.62	52.28	74.00	-21.72	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	45.94	31.78	8.60	32.09	54.23	74.00	-19.77	Horizontal
7206.00	38.83	36.15	11.65	32.00	54.63	74.00	-19.37	Horizontal
9608.00	36.06	37.95	14.14	31.62	56.53	74.00	-17.47	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	29.67	31.78	8.60	32.09	37.96	54.00	-16.04	Vertical
7206.00	24.34	36.15	11.65	32.00	40.14	54.00	-13.86	Vertical
9608.00	24.49	37.95	14.14	31.62	44.96	54.00	-9.04	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	32.66	31.78	8.60	32.09	40.95	54.00	-13.05	Horizontal
7206.00	24.08	36.15	11.65	32.00	39.88	54.00	-14.12	Horizontal
9608.00	23.24	37.95	14.14	31.62	43.71	54.00	-10.29	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel -GFSK
---------------	----------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	39.31	31.85	8.67	32.12	47.71	74.00	-26.29	Vertical
7323.00	31.94	36.37	11.72	31.89	48.14	74.00	-25.86	Vertical
9764.00	30.88	38.35	14.25	31.62	51.86	74.00	-22.14	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	41.47	31.85	8.67	32.12	49.87	74.00	-24.13	Horizontal
7323.00	32.52	36.37	11.72	31.89	48.72	74.00	-25.28	Horizontal
9764.00	30.49	38.35	14.25	31.62	51.47	74.00	-22.53	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	27.90	31.85	8.67	32.12	36.30	54.00	-17.70	Vertical
7323.00	23.78	36.37	11.72	31.89	39.98	54.00	-14.02	Vertical
9764.00	21.26	38.35	14.25	31.62	42.24	54.00	-11.76	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	35.59	31.85	8.67	32.12	43.99	54.00	-10.01	Horizontal
7323.00	26.28	36.37	11.72	31.89	42.48	54.00	-11.52	Horizontal
9764.00	24.63	38.35	14.25	31.62	45.61	54.00	-8.39	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel -GFSK
---------------	-----------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	38.56	31.93	8.73	32.16	47.06	74.00	-26.94	Vertical
7440.00	33.89	36.59	11.79	31.78	50.49	74.00	-23.51	Vertical
9920.00	31.25	38.81	14.38	31.88	52.56	74.00	-21.44	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	41.37	31.93	8.73	32.16	49.87	74.00	-24.13	Horizontal
7440.00	33.68	36.59	11.79	31.78	50.28	74.00	-23.72	Horizontal
9920.00	33.33	38.81	14.38	31.88	54.64	74.00	-19.36	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	29.47	31.93	8.73	32.16	37.97	54.00	-16.03	Vertical
7440.00	25.34	36.59	11.79	31.78	41.94	54.00	-12.06	Vertical
9920.00	22.75	38.81	14.38	31.88	44.06	54.00	-9.94	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	33.16	31.93	8.73	32.16	41.66	54.00	-12.34	Horizontal
7440.00	25.40	36.59	11.79	31.78	42.00	54.00	-12.00	Horizontal
9920.00	24.51	38.81	14.38	31.88	45.82	54.00	-8.18	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Lowest channel- π /4-DQPSK
---------------	--------------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	38.87	31.78	8.60	32.09	47.16	74.00	-26.84	Vertical
7206.00	32.39	36.15	11.65	32.00	48.19	74.00	-25.81	Vertical
9608.00	30.08	37.95	14.14	31.62	50.55	74.00	-23.45	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	42.21	31.78	8.60	32.09	50.50	74.00	-23.50	Horizontal
7206.00	33.15	36.15	11.65	32.00	48.95	74.00	-25.05	Horizontal
9608.00	30.74	37.95	14.14	31.62	51.21	74.00	-22.79	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	29.52	31.78	8.60	32.09	37.81	54.00	-16.19	Vertical
7206.00	24.84	36.15	11.65	32.00	40.64	54.00	-13.36	Vertical
9608.00	23.65	37.95	14.14	31.62	44.12	54.00	-9.88	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	32.75	31.78	8.60	32.09	41.04	54.00	-12.96	Horizontal
7206.00	26.43	36.15	11.65	32.00	42.23	54.00	-11.77	Horizontal
9608.00	25.61	37.95	14.14	31.62	46.08	54.00	-7.92	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

4. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
5. The emission levels of other frequencies are very lower than the limit and not show in test report.
6. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel - π /4-DQPSK
---------------	---------------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	38.81	31.85	8.67	32.12	47.21	74.00	-26.79	Vertical
7323.00	35.79	36.37	11.72	31.89	51.99	74.00	-22.01	Vertical
9764.00	34.35	38.35	14.25	31.62	55.33	74.00	-18.67	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	43.56	31.85	8.67	32.12	51.96	74.00	-22.04	Horizontal
7323.00	36.95	36.37	11.72	31.89	53.15	74.00	-20.85	Horizontal
9764.00	32.40	38.35	14.25	31.62	53.38	74.00	-20.62	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	28.07	31.85	8.67	32.12	36.47	54.00	-17.53	Vertical
7323.00	23.28	36.37	11.72	31.89	39.48	54.00	-14.52	Vertical
9764.00	22.34	38.35	14.25	31.62	43.32	54.00	-10.68	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	32.72	31.85	8.67	32.12	41.12	54.00	-12.88	Horizontal
7323.00	25.84	36.37	11.72	31.89	42.04	54.00	-11.96	Horizontal
9764.00	23.29	38.35	14.25	31.62	44.27	54.00	-9.73	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel - π /4-DQPSK
---------------	----------------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	40.54	31.93	8.73	32.16	49.04	74.00	-24.96	Vertical
7440.00	35.50	36.59	11.79	31.78	52.10	74.00	-21.90	Vertical
9920.00	32.18	38.81	14.38	31.88	53.49	74.00	-20.51	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	44.08	31.93	8.73	32.16	52.58	74.00	-21.42	Horizontal
7440.00	33.74	36.59	11.79	31.78	50.34	74.00	-23.66	Horizontal
9920.00	33.65	38.81	14.38	31.88	54.96	74.00	-19.04	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	28.48	31.93	8.73	32.16	36.98	54.00	-17.02	Vertical
7440.00	24.72	36.59	11.79	31.78	41.32	54.00	-12.68	Vertical
9920.00	22.14	38.81	14.38	31.88	43.45	54.00	-10.55	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	35.11	31.93	8.73	32.16	43.61	54.00	-10.39	Horizontal
7440.00	28.16	36.59	11.79	31.78	44.76	54.00	-9.24	Horizontal
9920.00	22.90	38.81	14.38	31.88	44.21	54.00	-9.79	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

4. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
5. The emission levels of other frequencies are very lower than the limit and not show in test report.
6. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Lowest channel-8-DPSK
---------------	-----------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	40.83	31.78	8.60	32.09	49.12	74.00	-24.88	Vertical
7206.00	32.41	36.15	11.65	32.00	48.21	74.00	-25.79	Vertical
9608.00	30.24	37.95	14.14	31.62	50.71	74.00	-23.29	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	37.50	31.78	8.60	32.09	45.79	74.00	-28.21	Horizontal
7206.00	34.71	36.15	11.65	32.00	50.51	74.00	-23.49	Horizontal
9608.00	34.46	37.95	14.14	31.62	54.93	74.00	-19.07	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	29.65	31.78	8.60	32.09	37.94	54.00	-16.06	Vertical
7206.00	23.81	36.15	11.65	32.00	39.61	54.00	-14.39	Vertical
9608.00	21.79	37.95	14.14	31.62	42.26	54.00	-11.74	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	33.87	31.78	8.60	32.09	42.16	54.00	-11.84	Horizontal
7206.00	25.60	36.15	11.65	32.00	41.40	54.00	-12.60	Horizontal
9608.00	23.44	37.95	14.14	31.62	43.91	54.00	-10.09	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

7. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
8. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
9. *“*” , means this data is the too weak instrument of signal is unable to test.*

Test channel:	Middle channel -8-DPSK
---------------	------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	40.13	31.85	8.67	32.12	48.53	74.00	-25.47	Vertical
7323.00	34.97	36.37	11.72	31.89	51.17	74.00	-22.83	Vertical
9764.00	32.75	38.35	14.25	31.62	53.73	74.00	-20.27	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	37.96	31.85	8.67	32.12	46.36	74.00	-27.64	Horizontal
7323.00	30.42	36.37	11.72	31.89	46.62	74.00	-27.38	Horizontal
9764.00	30.38	38.35	14.25	31.62	51.36	74.00	-22.64	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	29.21	31.85	8.67	32.12	37.61	54.00	-16.39	Vertical
7323.00	23.75	36.37	11.72	31.89	39.95	54.00	-14.05	Vertical
9764.00	21.18	38.35	14.25	31.62	42.16	54.00	-11.84	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	35.05	31.85	8.67	32.12	43.45	54.00	-10.55	Horizontal
7323.00	26.71	36.37	11.72	31.89	42.91	54.00	-11.09	Horizontal
9764.00	24.36	38.35	14.25	31.62	45.34	54.00	-8.66	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

7. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
8. The emission levels of other frequencies are very lower than the limit and not show in test report.
9. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel -8DPSK
---------------	------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	38.20	31.93	8.73	32.16	46.70	74.00	-27.30	Vertical
7440.00	34.24	36.59	11.79	31.78	50.84	74.00	-23.16	Vertical
9920.00	30.78	38.81	14.38	31.88	52.09	74.00	-21.91	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	41.66	31.93	8.73	32.16	50.16	74.00	-23.84	Horizontal
7440.00	36.95	36.59	11.79	31.78	53.55	74.00	-20.45	Horizontal
9920.00	35.12	38.81	14.38	31.88	56.43	74.00	-17.57	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	30.73	31.93	8.73	32.16	39.23	54.00	-14.77	Vertical
7440.00	26.71	36.59	11.79	31.78	43.31	54.00	-10.69	Vertical
9920.00	25.06	38.81	14.38	31.88	46.37	54.00	-7.63	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	35.54	31.93	8.73	32.16	44.04	54.00	-9.96	Horizontal
7440.00	27.68	36.59	11.79	31.78	44.28	54.00	-9.72	Horizontal
9920.00	23.75	38.81	14.38	31.88	45.06	54.00	-8.94	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- “*”, means this data is the too weak instrument of signal is unable to test.

7.3.3 Bandedge emissions

Test channel:	Lowest channel -GFSK
---------------	----------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	42.58	27.59	5.38	30.18	45.37	74.00	-28.63	Horizontal
2400.00	54.67	27.58	5.39	30.18	57.46	74.00	-16.54	Horizontal
2390.00	44.28	27.59	5.38	30.18	47.07	74.00	-26.93	Vertical
2400.00	43.74	27.58	5.39	30.18	46.53	74.00	-27.47	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	32.53	27.59	5.38	30.18	35.32	54.00	-18.68	Horizontal
2400.00	32.14	27.58	5.39	30.18	34.93	54.00	-19.07	Horizontal
2390.00	32.52	27.59	5.38	30.18	35.31	54.00	-18.69	Vertical
2400.00	35.60	27.58	5.39	30.18	38.39	54.00	-15.61	Vertical

Test channel:	Highest channel -GFSK
---------------	-----------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	45.18	27.53	5.47	29.93	48.25	74.00	-25.75	Horizontal
2500.00	43.23	27.55	5.49	29.93	46.34	74.00	-27.66	Horizontal
2483.50	44.55	27.53	5.47	29.93	47.62	74.00	-26.38	Vertical
2500.00	45.92	27.55	5.49	29.93	49.03	74.00	-24.97	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.03	27.53	5.47	29.93	37.10	54.00	-16.90	Horizontal
2500.00	34.49	27.55	5.49	29.93	37.60	54.00	-16.40	Horizontal
2483.50	34.37	27.53	5.47	29.93	37.44	54.00	-16.56	Vertical
2500.00	34.68	27.55	5.49	29.93	37.79	54.00	-16.21	Vertical

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Test channel:	Lowest channel - π /4-DQPSK
---------------	---------------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	41.52	27.59	5.38	30.18	44.31	74.00	-29.69	Horizontal
2400.00	57.38	27.58	5.39	30.18	60.17	74.00	-13.83	Horizontal
2390.00	42.02	27.59	5.38	30.18	44.81	74.00	-29.19	Vertical
2400.00	57.87	27.58	5.39	30.18	60.66	74.00	-13.34	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	31.39	27.59	5.38	30.18	34.18	54.00	-19.82	Horizontal
2400.00	41.96	27.58	5.39	30.18	44.75	54.00	-9.25	Horizontal
2390.00	30.38	27.59	5.38	30.18	33.17	54.00	-20.83	Vertical
2400.00	43.12	27.58	5.39	30.18	45.91	54.00	-8.09	Vertical

Test channel:	Highest channel - π /4-DQPSK
---------------	----------------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	41.78	27.53	5.47	29.93	44.85	74.00	-29.15	Horizontal
2500.00	41.22	27.55	5.49	29.93	44.33	74.00	-29.67	Horizontal
2483.50	42.19	27.53	5.47	29.93	45.26	74.00	-28.74	Vertical
2500.00	42.03	27.55	5.49	29.93	45.14	74.00	-28.86	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.81	27.53	5.47	29.93	36.88	54.00	-17.12	Horizontal
2500.00	36.72	27.55	5.49	29.93	39.83	54.00	-14.17	Horizontal
2483.50	33.58	27.53	5.47	29.93	36.65	54.00	-17.35	Vertical
2500.00	32.04	27.55	5.49	29.93	35.15	54.00	-18.85	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Test channel:	Lowest channel -8-DPSK
---------------	------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	38.82	27.59	5.38	30.18	41.61	74.00	-32.39	Horizontal
2400.00	53.98	27.58	5.39	30.18	56.77	74.00	-17.23	Horizontal
2390.00	40.63	27.59	5.38	30.18	43.42	74.00	-30.58	Vertical
2400.00	53.14	27.58	5.39	30.18	55.93	74.00	-18.07	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	33.07	27.59	5.38	30.18	35.86	54.00	-18.14	Horizontal
2400.00	41.56	27.58	5.39	30.18	44.35	54.00	-9.65	Horizontal
2390.00	32.51	27.59	5.38	30.18	35.30	54.00	-18.70	Vertical
2400.00	43.89	27.58	5.39	30.18	46.68	54.00	-7.32	Vertical

Test channel:	Highest channel -8-DPSK
---------------	-------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	44.13	27.53	5.47	29.93	47.20	74.00	-26.80	Horizontal
2500.00	46.61	27.55	5.49	29.93	49.72	74.00	-24.28	Horizontal
2483.50	43.58	27.53	5.47	29.93	46.65	74.00	-27.35	Vertical
2500.00	41.76	27.55	5.49	29.93	44.87	74.00	-29.13	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.21	27.53	5.47	29.93	36.28	54.00	-17.72	Horizontal
2500.00	32.74	27.55	5.49	29.93	35.85	54.00	-18.15	Horizontal
2483.50	34.69	27.53	5.47	29.93	37.76	54.00	-16.24	Vertical
2500.00	35.58	27.55	5.49	29.93	38.69	54.00	-15.31	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

7.4 20dB Occupy Bandwidth

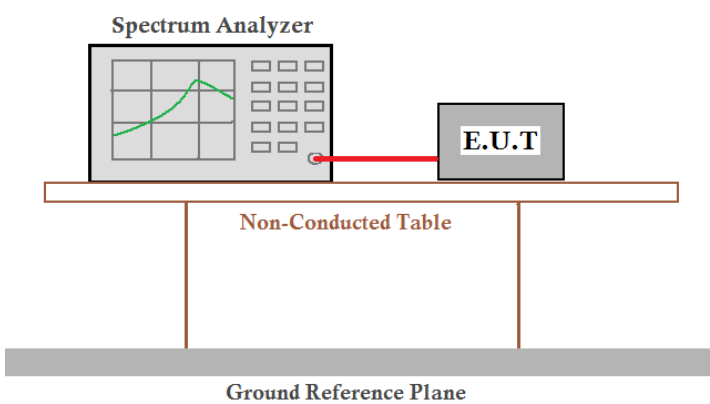Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

EUT :	Speaker	Model Name. :	LYXSPATR
Temperature :	26 °C	Relative Humidity :	54%
Test Voltage :	DC 12V	Pressure :	1010hPa
Test Mode :	Transmitting mode(GFSK, π /4-DQPSK, 8-DPSK)		


	Test channel	20dB bandwidth(MHz)	Result
GFSK	Lowest	0.970	Pass
	Middle	0.943	Pass
	Highest	0.942	Pass

	Test channel	20dB bandwidth(MHz)	Result
π /4-DQPSK	Lowest	1.352	Pass
	Middle	1.349	Pass
	Highest	1.352	Pass


	Test channel	20dB bandwidth(MHz)	Result
8-DPSK	Lowest	1.331	Pass
	Middle	1.336	Pass
	Highest	1.322	Pass

Test plot as follows:


GFSK

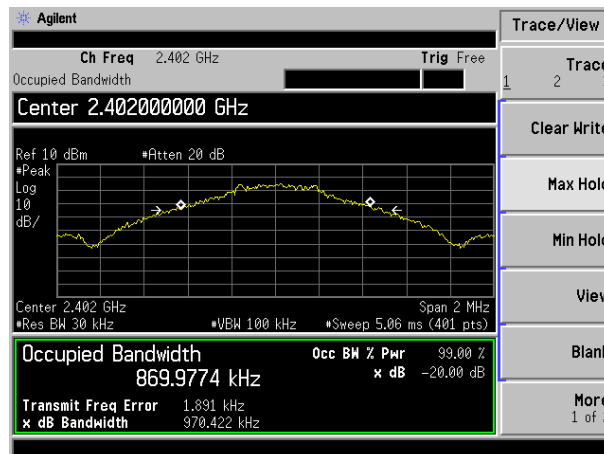

Lowest channel

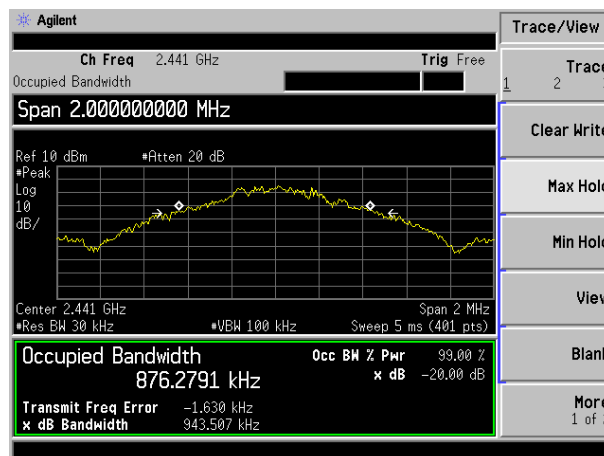


Middle channel

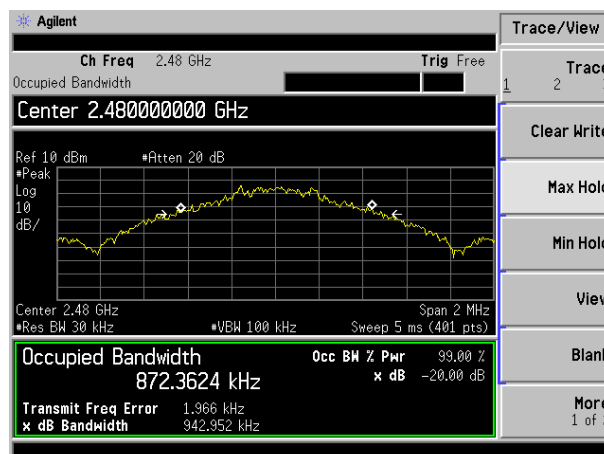


Highest channel


π /4-DQPSK

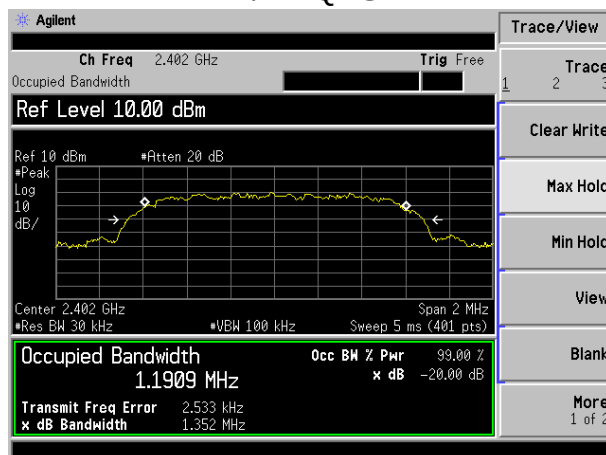

Lowest channel

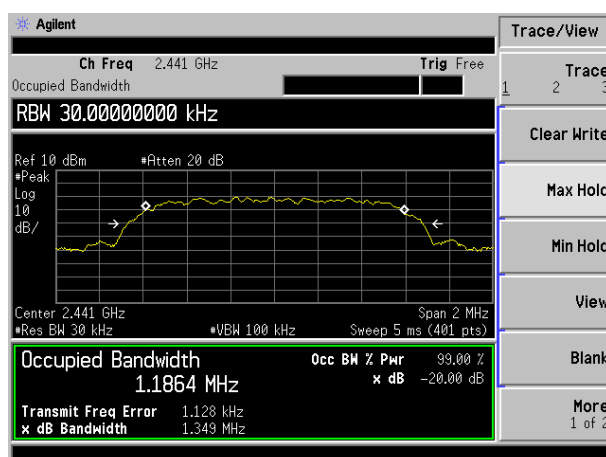


Middle channel

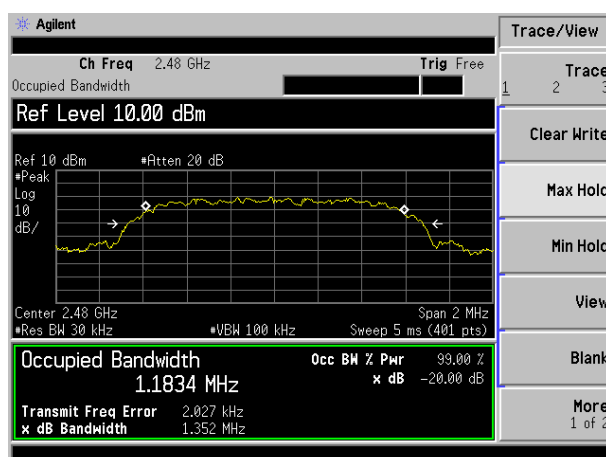


Highest channel


8-DPSK

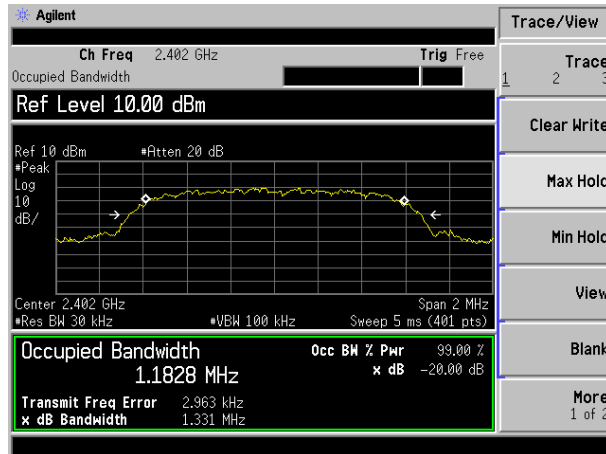

Lowest channel

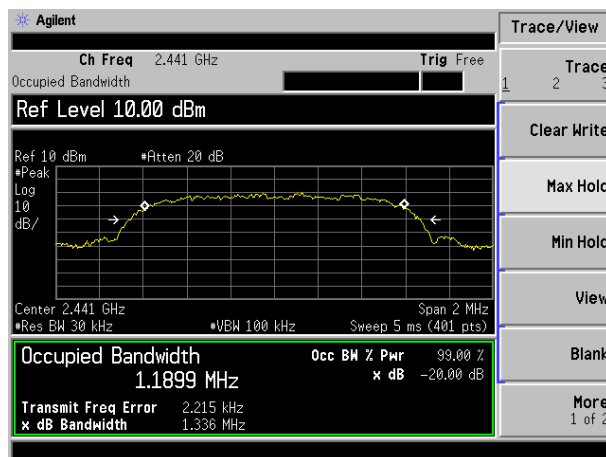


Middle channel

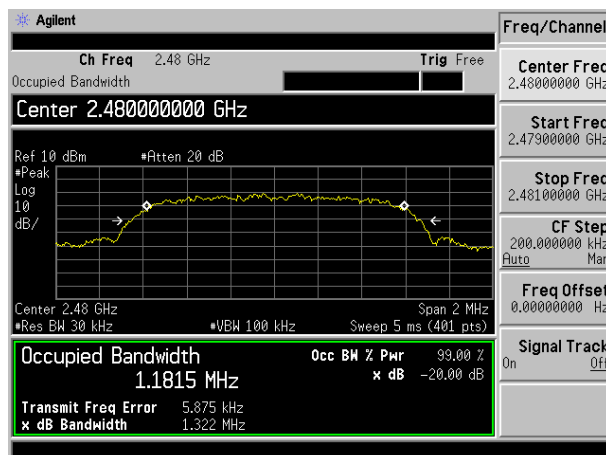

Highest channel

8 Test Setup Photo

Radiated Emission

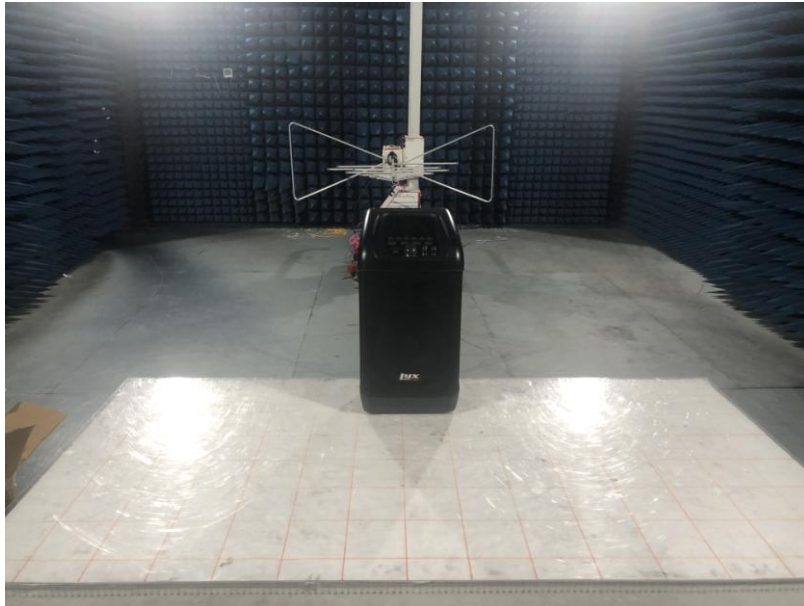

Conducted Emission






9 EUT Constructional Details













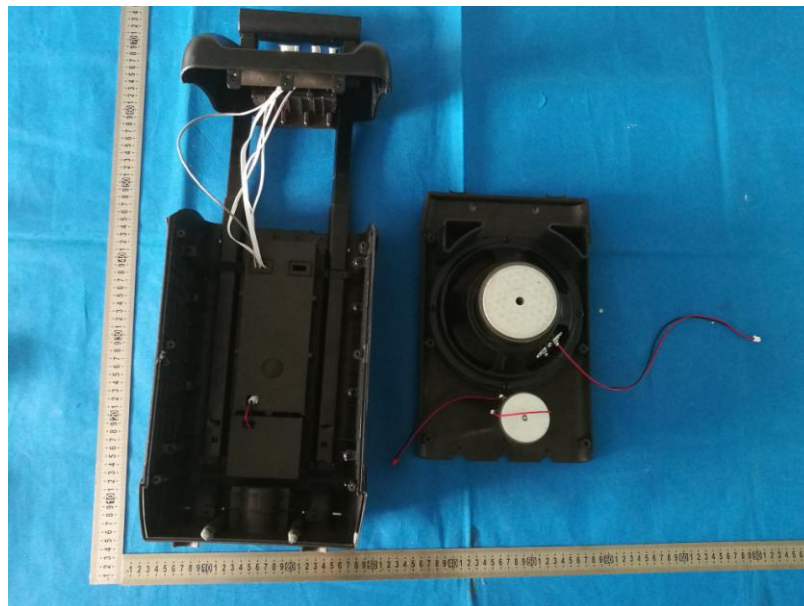


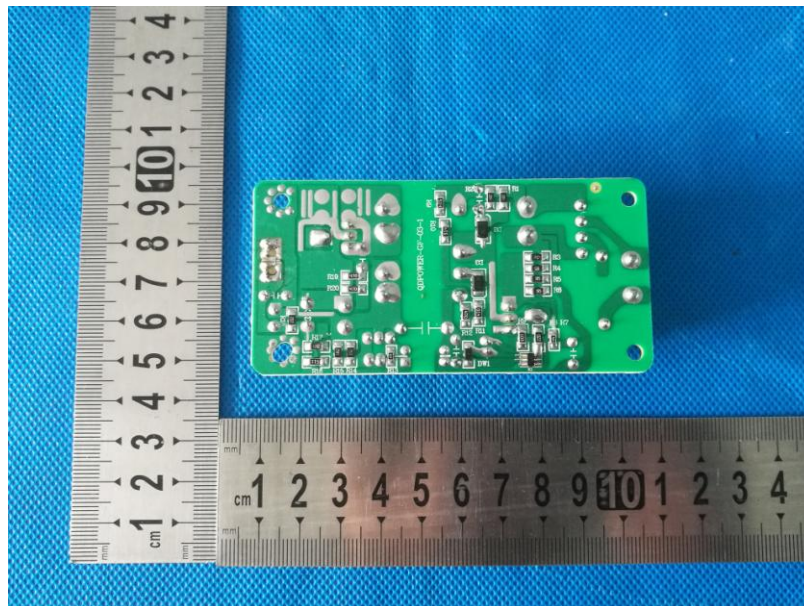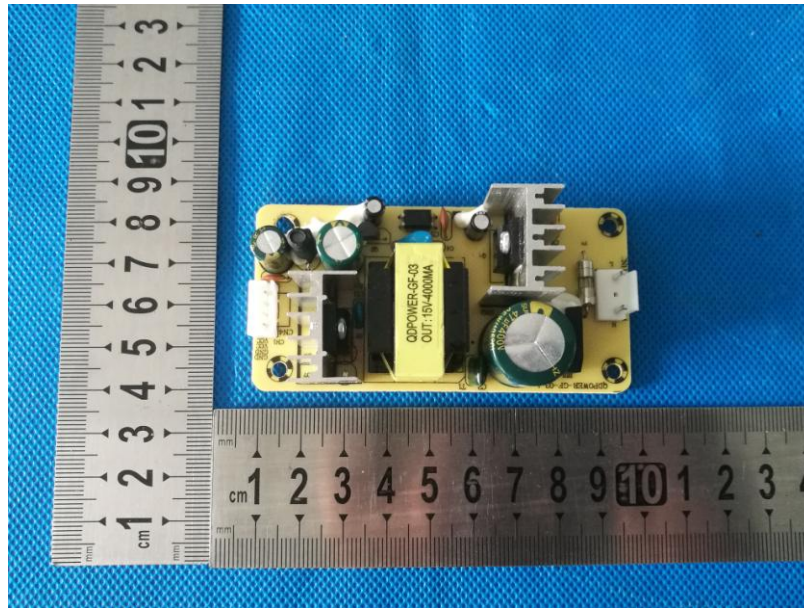

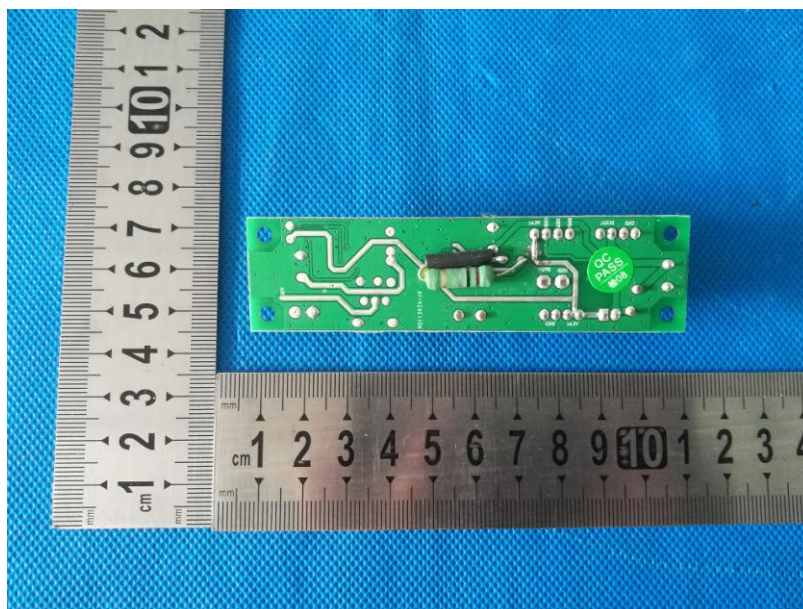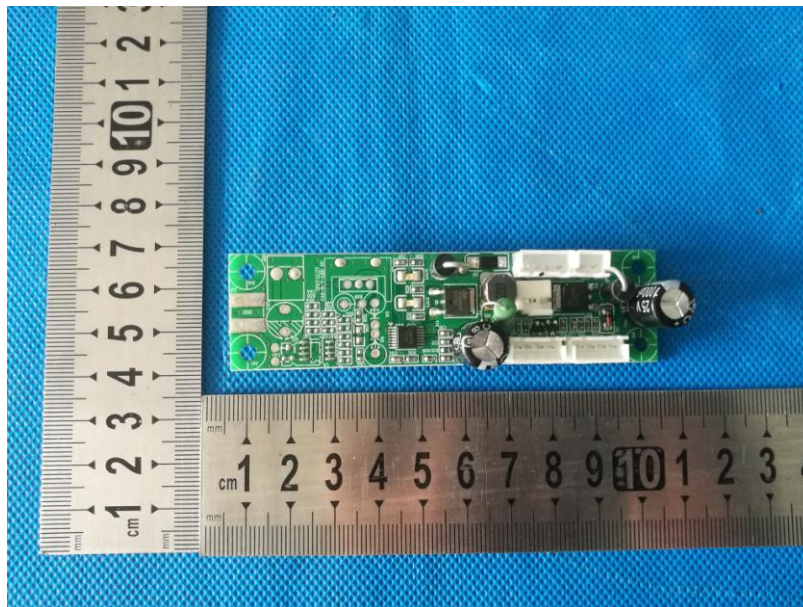


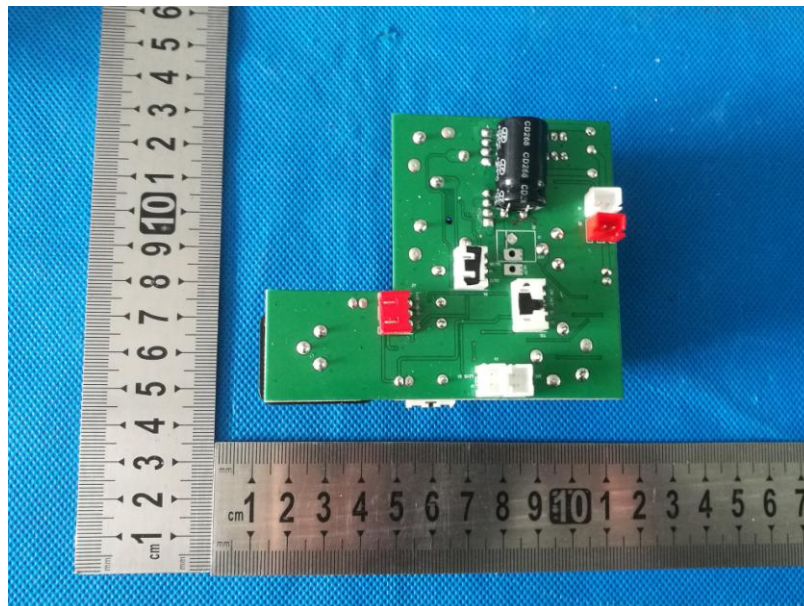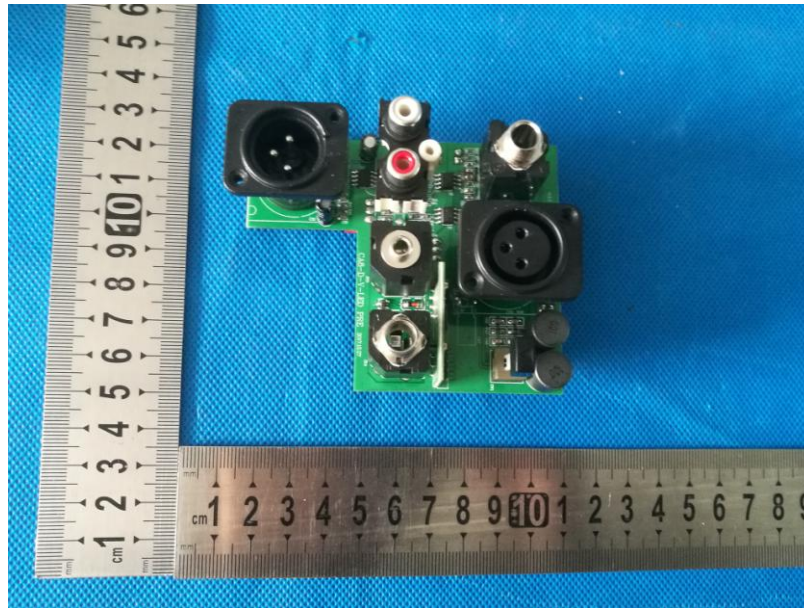

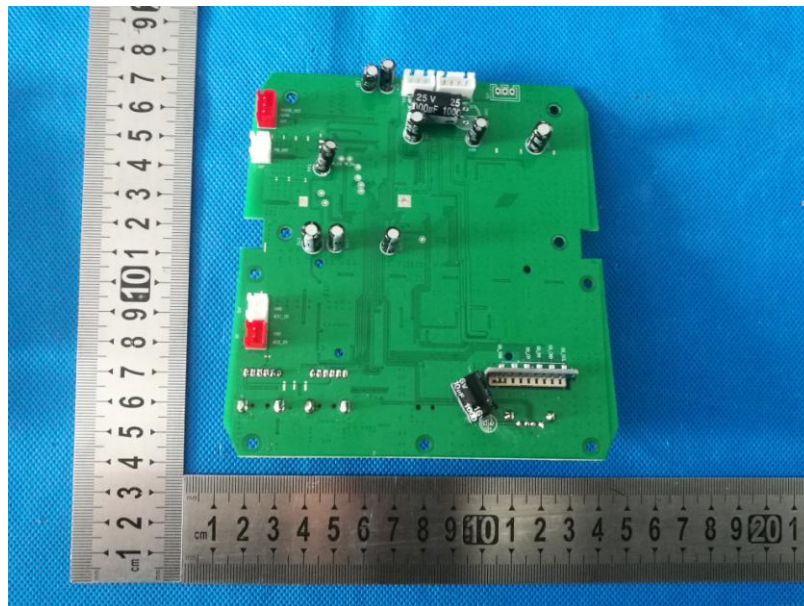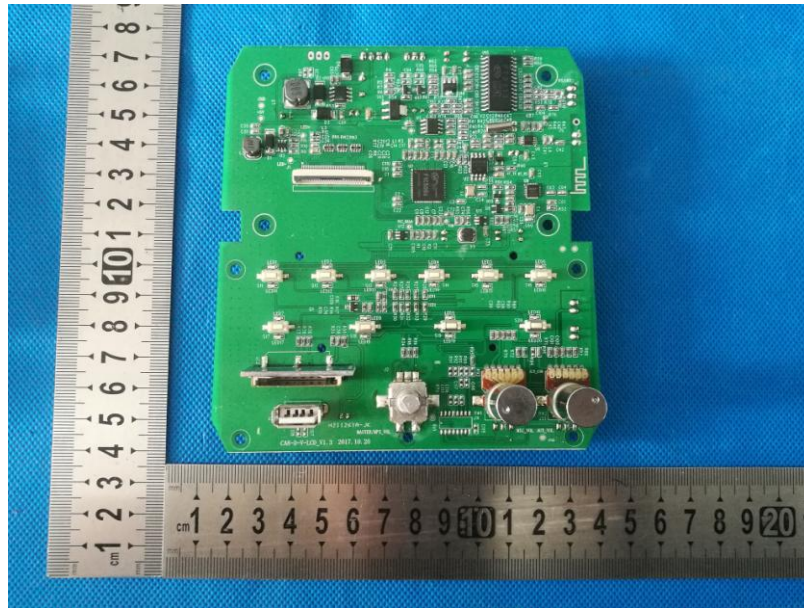

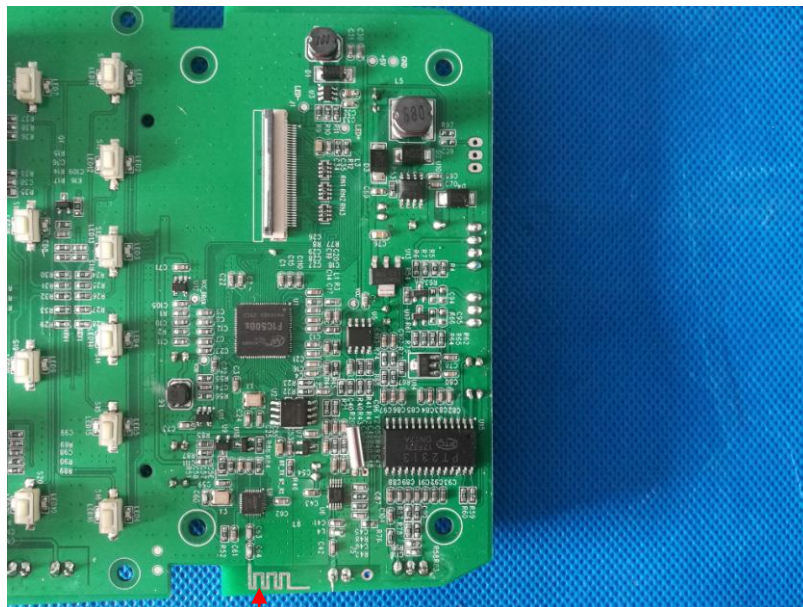

BT ANT

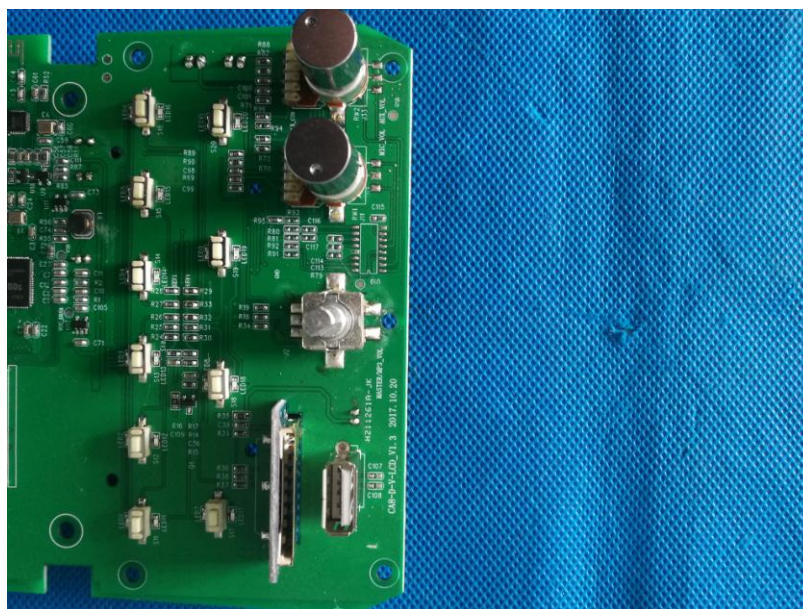

-----End-----