

FCC Test Report

Report No.: AGC11758240403FR01A

FCC ID	:	2A482-BOWIE35MAX
APPLICATION PURPOSE	:	Class II Permissive Change
PRODUCT DESIGNATION	:	Baseus Wireless Headphones
BRAND NAME	:	baseus
MODEL NAME	:	Baseus Bowie 30 Max
APPLICANT	:	Shenzhen Baseus Technology Co., Ltd.
DATE OF ISSUE	:	Dec. 05, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time Issued Date Valid Version		Notes	
V1.0	/	Dec. 05, 2024	Valid	Initial Release

Note: The original test report AGC11758240403FR01 (dated Apr. 24, 2024 and tested from Apr. 10, 2024 to

Apr. 24, 2024) was modified on Dec. 05, 2024, including the following changes and additions:

-Changed the test model name;

-Changed the hardware version;

-Changed the charging port and charging IC;

-Changed photos of test model.

For the above described change the following tests was considered to be necessary:

Clause	Testing
§15.209	Radiated Spurious Emission



Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Test Frequency List	
2.3 Related Submittal(S) / Grant (S)	6
2.4 Test Methodology	6
2.5 Receiver Input Bandwidth	6
2.6 Equally Average Use of Frequencies And Behaviour	6
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	
2.9 Equipment Modifications	
2.10 Antenna Requirement	
3. Test Environment	9
3.1 Address of The Test Laboratory	9
3.2 Test Facility	
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	11
4. System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	14
6. Radiated Spurious Emission	15
6.1 Measurement Limit	15
6.2 Measurement Procedure	15
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
Appendix I: Photographs of Test Setup	24
Appendix II: Photographs of Test EUT	24



1. General Information

Applicant	Shenzhen Baseus Technology Co., Ltd.				
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China				
Manufacturer	Shenzhen Baseus Technology Co., Ltd.				
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China				
Factory	N/A				
Address	N/A				
Product Designation	Baseus Wireless Headphones				
Brand Name	baseus				
Test Model	Baseus Bowie 30 Max				
Series Model(s)	N/A				
Difference Description	N/A				
Date of receipt of test item	Nov. 18, 2024				
Date of Test	Nov. 18, 2024 to Dec. 05, 2024				
Deviation from Standard	No any deviation from the test method				
Condition of Test Sample	Normal				
Test Result	Pass				
Test Report Form No	AGCER-FCC-BR_EDR-V1				

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

TCI-li

Cici Li (Project Engineer)

Dec. 05, 2024

Reviewed By

Calvin Liu (Reviewer)

Dec. 05, 2024

Approved By

Angela Li

(Authorized Officer)

Dec. 05, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.3
Modulation Type	BR 🖾 GFSK, EDR 🖾 π /4-DQPSK, 🗌 8DPSK
Number of channels	79 Channels
Channel Separation	1 MHz
Maximum Transmitter Power	5.080dBm
Hardware Version	V2.4
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	1.78dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency			
	0	2402 MHz			
	1	2403 MHz			
	:	:			
2400~2483.5MHz	39	2441MHz			
	:	:			
	77	2479 MHz			
	78	2480 MHz			
Note: f = 2402 + 1k MHz, k = 0,, 78 ; "f "is the operating frequency (MHz); "k" is the operating channel.					



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A482-BOWIE35MAX**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Identity Document Title				
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations				
2	FCC 47 CFR Part 15	Radio Frequency Devices				
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices				
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules				

2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.6 Equally Average Use of Frequencies And Behaviour

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

44	35	78	03	20) 76	02	19		 21	64	75
				·					 		
			Ιi						1		
			¦			1			i.		
				L		<u>'i</u>		1	 		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



2.8 Special Accessories

Not available for this EUT intended for grant.

2.9 Equipment Modifications

Not available for this EUT intended for grant.

2.10 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 1.78dBi.



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V by battery

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF Power, Conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of Spurious Emissions, Conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %
Uncertainty of Dwell Time	$U_c = \pm 2 \%$



3.5 List of Equipment Used

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31		
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23		
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27		
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04		
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30		
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23		
\square	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23		
\boxtimes	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22		
\square	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		

• Tes	st Software				
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A
\square	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0



4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.


4.2 EUT Exercise

1

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement: Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box	RISYM	USB-TTL		
	Test Accessories	Come From The	Manufacturer		
No.	Equipment	Manufacturer	Model No.	Specification Information	Cable



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.209	Radiated Spurious Emission	Pass



5. Description of Test Modes

Data Rate / ModulationTest ItemBluetooth – BR_EDR (GFSK/π /4-DQPSK)Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered)Mode 1: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered)Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered)Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered)Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered)Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered)Mode 6: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered)Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered)Mode 7: Bluetooth Tx Hopping-1Mbps (Battery powered)		Summary table of Test Cases
Bluetooth – BR_EDR (GFSK/π /4-DQPSK) Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered) Mode 6: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered)	Toot Itom	Data Rate / Modulation
Radiated & Conducted Test CasesMode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered)	rest item	Bluetooth – BR_EDR (GFSK/π /4-DQPSK)
Mode 8: Bluetooth Tx Hopping-2Mbps (Battery powered)		Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered) Mode 7: Bluetooth Tx Hopping-1Mbps (Battery powered)

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Software Setting Diagram

OMx Baudra	te					
Classic B	E					
Test Mode						
FCC Test		T addres	35		1	
	5	5555555	5555	Run		
DUT Test	o E					
RF Control						
	([
RF Mode	TX TEST	•	Packet Type	DH5	•	
Hopping	OFF	•	TX Frequency	2480	-	
mopping	[in riequency			
TX Power	7	-	RX Frequency	2402	Ŧ	
	<u> </u>			·	-	
Scenario	PRBS Pat	ttern			•	
LOG: Test						*
LOG: BR/ED						
LOG: Test						
LOG: BR/ED						
LOG: Test						
LOG: BR/ED						H
LOG: Test	ina					-
M6 is ope	_		500000bps			



6. Radiated Spurious Emission

6.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

6.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection"

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle \ge 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW \geq 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize




6.3 Measurement Setup (Block Diagram of Configuration)

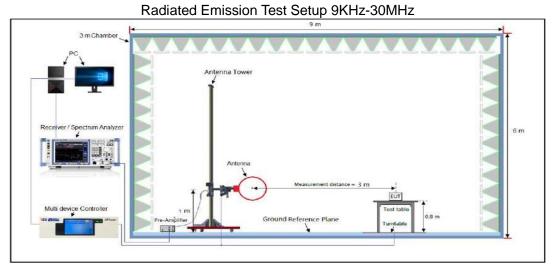

Radiated Emission Test Setup 30MHz-1000MHz

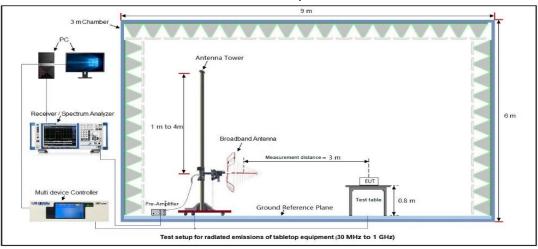

Radiated Emission Test Setup Above 1000MHz

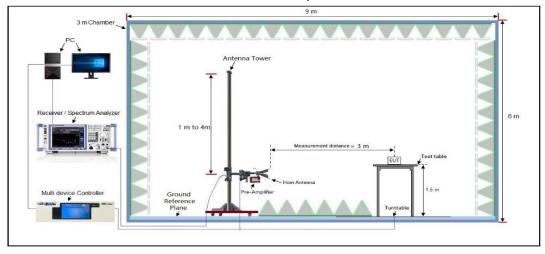

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



6.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Radia	ated Emiss	ion Test Res	ults at 30MH	z-1GHz		
EUT N	lame	Bas	eus Wireless H	Headphone	S	Model Na	ame	Baseus B	owie 30 Max
Tempe	erature	22.	5℃			Relative	Humidity	55.4%	
Press	ure	960	hPa			Test Volta	age	Normal Vo	oltage
Test N	lode	Мо	de 5			Antenna	Polarity	Horizontal	
	72.0	dBuV/n	D						
	12.0	dbutti						Limit: — Margin: —	
	_								
								r	
						۰ ۱			
	32						3 4 5	werther	
							Martin	winter	
	-8 30.00		40 50 60 70		(MHz)		400 500 60	0 700 1000.0	00
					(
Final [Data List								
NO.	Freq. [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	50.056	-	18.69	13.20	40.00	21.31	100	81	Horizontal
2	114.91	68	21.72	16.35	43.50	21.78	100	145	Horizontal
3	459.11	43	29.88	24.43	46.00	16.12	100	135	Horizontal
4	519.06	48	29.62	25.05	46.00	16.38	100	217	Horizontal
5	616.37	18	30.99	25.18	46.00	15.01	100	210	Horizontal
	896.99			1	i		1	i -	1



			Radia	ted Emiss	ion Test Res	ults at 30MH	z-1GHz		
EUT N	lame	Bas	eus Wireless H	leadphones	6	Model Na	ame	Baseus Bo	owie 30 Max
Tempe	erature	22.5	j°C			Relative	Humidity	55.4%	
Press	ure	960	hPa			Test Volt	age	Normal Vo	ltage
Test M	lode	Мос	le 5			Antenna	Polarity	Vertical	
	72.0	dBu∀/m							
								Limit: — Margin: —	
	-8					s			
	30.00)0 4	0 50 60 70	80	(MHz)	300	400 500 60	0 700 1000.00	
Final D	Data List			1	[
NO.	Freq. [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	52.575	53	22.57	17.03	40.00	17.43	100	126	Vertical
2	74.656	69	22.28	16.95	40.00	17.72	100	223	Vertical
3	119.85	56	25.67	17.67	43.50	17.83	100	185	Vertical
4	455.90	58	30.53	25.38	46.00	15.47	100	147	Vertical
5	716.68	20	33.55	28.68	46.00	12.45	100	114	Vertical
6	952.09	37	35.88	30.52	46.00	10.12	100	125	Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Level.

2. All test modes had been pre-tested. The mode 5 is the worst case and recorded in the report.



EUT Name	Baseus Wire	less Headph	iones Mo	lel Name	Baseus	s Bowie 30 Ma		
Temperature	22.5 ℃		Rela	ative Humidity	55.4%			
Pressure	960hPa		Tes	t Voltage	Norma	Normal Voltage		
Test Mode	Mode 4	Mode 4			Horizo	ntal		
Frequency	Meter Reading	Factor	Emission Leve	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
4804.000	46.25	0.08	46.33	74	-27.67	peak		
4804.000	37.41	0.08	37.49	54	-16.51	AVG		
7206.000	40.65	2.21	42.86	74	-31.14	peak		
7206.000	31.74	2.21	33.95	54	-20.05	AVG		
	nna Factor + Cable Baseus Wire			del Name	Baseus	s Bowie 30 Ma		
Factor = Anter	nna Factor + Cable Baseus Wire 22.5°C		iones Mo o	lel Name ative Humidity	Baseus 55.4%	s Bowie 30 Ma		
Factor = Anter EUT Name Temperature	Baseus Wire		iones Moo Rela		55.4%	s Bowie 30 Ma: I Voltage		
Factor = Anter EUT Name Temperature Pressure	Baseus Wire 22.5℃		nones Moo Rela Tes	ative Humidity	55.4%	I Voltage		
Factor = Anter EUT Name Temperature Pressure	Baseus Wire 22.5℃ 960hPa		nones Moo Rela Tes	ative Humidity t Voltage enna Polarity	55.4%	I Voltage		
Factor = Anter EUT Name Temperature Pressure Test Mode	Baseus Wire 22.5℃ 960hPa Mode 4	less Headph	iones Moo Rela Tes Ant	ative Humidity t Voltage enna Polarity	55.4% Norma Vertica	I Voltage		
Factor = Anter	Baseus Wire 22.5℃ 960hPa Mode 4 Meter Reading	less Headph	Iones Moo Rela Tes Ant Emission Leve	ative Humidity t Voltage enna Polarity	55.4% Norma Vertica Margin	I Voltage		
Factor = Anter	Baseus Wire 22.5℃ 960hPa Mode 4 Meter Reading (dBµV)	less Headph Factor (dB)	Iones Moo Rela Tes Ant Emission Leve (dBµV/m)	ative Humidity t Voltage enna Polarity Limits (dBµV/m)	55.4% Norma Vertica Margin (dB)	I Voltage I Value Type		
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000	Baseus Wire 22.5℃ 960hPa Mode 4 Meter Reading (dBµV) 45.97	less Headph Factor (dB) 0.08	Iones Moo Rela Tes Ant Emission Leve (dBµV/m) 46.05	t Voltage enna Polarity Limits (dBµV/m) 74	55.4% Norma Vertica Margin (dB) -27.95	I Voltage I Value Type peak		
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	Baseus Wire 22.5 °C 960hPa Mode 4 Meter Reading (dBµV) 45.97 36.41	less Headph Factor (dB) 0.08 0.08	Iones Moo Relation Tes Ant Emission Level (dBµV/m) 46.05 36.49	Limits (dBµV/m) 74 54	55.4% Norma Vertica Margin (dB) -27.95 -17.51	I Voltage I Value Type peak AVG		

Radiated Emissions Test Results Above 1GHz

RESULT: Pass



EUT Name		Baseus Wi	reless Head	phones	Model	Name		Baseu	s Bowie 30 Max
F emperature		22.5 ℃			Relativ	/e Humio	dity	55.4%	
Pressure		960hPa			Test V	oltage		Norma	al Voltage
Test Mode		Mode 5			Antenna Polarity			Horizo	ntal
Frequen	су	Meter Reading	Factor	Emission	Level	Limits		Margin	
(MHz)		(dBµV)	(dB)	(dBµV/	/m)	(dBµV/m))	(dB)	Value Type
4882.00	0	45.08	0.14	45.2	2	74		-28.78	peak
4882.00	0	37.49	0.14	37.6	3	54		-16.37	AVG
7323.00	0	41.22	2.36	43.5	8	74		-30.42	peak
7323.00	0	32.85	2.36	35.2	1	54		-18.79	AVG
							1		
Remark:									
	ntenn	a Factor + Cal	ole Loss – Pi	re-amplifier.					
Factor = A	ntenn				Medal	Nomo		Deceu	a Dawia 20 May
	ntenn		ble Loss – Pi reless Head		Model	Name		Baseu	s Bowie 30 Max
Factor = A	ntenn					Name /e Humid	lity	Baseu 55.4%	
Factor = A	ntenn	Baseus Wi				/e Humio	lity	55.4%	
Factor = A EUT Name Femperature	ntenn	Baseus Wi 22.5℃			Relativ Test Ve	/e Humio		55.4%	al Voltage
Factor = A EUT Name Femperature Pressure Fest Mode		Baseus Wi 22.5℃ 960hPa Mode 5	reless Head	phones	Relativ Test Vo Antenn	ve Humio oltage na Polar	ity	55.4% Norma Vertica	al Voltage
Factor = A EUT Name Femperature Pressure Fest Mode	Mete	Baseus Wi 22.5℃ 960hPa Mode 5 er Reading	reless Head	phones Emission Leve	Relativ Test Ve Anteni	ve Humic oltage na Polar	i ty Margi	55.4% Norma Vertica	al Voltage
Factor = A EUT Name Femperature Pressure Fest Mode Frequency (MHz)	Mete	Baseus Wi 22.5°C 960hPa Mode 5 er Reading (dBµV)	reless Head Factor (dB)	phones Emission Leve (dBµV/m)	Relativ Test Vo Anteni el Li (dB	ve Humi oltage na Polar mits μV/m)	i ty Margi (dB)	55.4% Norma Vertica	al Voltage al Value Type
Factor = A EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4882.000	Mete	Baseus Wi 22.5℃ 960hPa Mode 5 er Reading (dBµV) 45.14	reless Head Factor (dB) 0.14	Emission Leve (dBµV/m) 45.28	Relativ Test Vo Anteni el Li (dB	ve Humic oltage na Polar mits uµV/m) 74	i ty Margi (dB) -28.7	55.4% Norma Vertica	al Voltage al Value Type peak
Factor = A EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4882.000 4882.000	Mete	Baseus Wi 22.5℃ 960hPa Mode 5 er Reading (dBµV) 45.14 37.26	Factor (dB) 0.14 0.14	Emission Leve (dBµV/m) 45.28 37.4	Relativ Test Vo Antennel Li (dB	/e Humic oltage na Polar mits μV/m) 74 54	Margi (dB) -28.7 -16.6	55.4% Norma Vertica	al Voltage al Value Type peak AVG
Factor = A EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4882.000 4882.000 7323.000	Mete	Baseus Wi 22.5 °C 960hPa Mode 5 er Reading (dBµV) 45.14 37.26 41.38	Factor (dB) 0.14 0.14 2.36	phones Emission Leve (dBµV/m) 45.28 37.4 43.74	Relativ Test Vo Anteni el Li (dB	/e Humic oltage na Polar mits μV/m) 74 54 74	Margi (dB) -28.7 -16.6 -30.2	55.4% Norma Vertica n 2 6	al Voltage al Value Type peak
Factor = A EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4882.000 4882.000	Mete	Baseus Wi 22.5℃ 960hPa Mode 5 er Reading (dBµV) 45.14 37.26	Factor (dB) 0.14 0.14	Emission Leve (dBµV/m) 45.28 37.4	Relativ Test Vo Anteni el Li (dB	/e Humic oltage na Polar mits μV/m) 74 54	Margi (dB) -28.7 -16.6	55.4% Norma Vertica n 2 6	al Voltage al Value Type peak AVG peak
Factor = A EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4882.000 4882.000 7323.000	Mete	Baseus Wi 22.5 °C 960hPa Mode 5 er Reading (dBµV) 45.14 37.26 41.38	Factor (dB) 0.14 0.14 2.36	phones Emission Leve (dBµV/m) 45.28 37.4 43.74	Relativ Test Vo Anteni el Li (dB	/e Humic oltage na Polar mits μV/m) 74 54 74	Margi (dB) -28.7 -16.6 -30.2	55.4% Norma Vertica n 2 6	al Voltage al Value Type peak AVG peak

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass



EUT Name	Baseus Wire	Baseus Wireless Headphones22.5℃960hPaMode 6			Model Name Relative Humidity Test Voltage Antenna Polarity		 Baseus Bowie 30 Max 55.4% Normal Voltage Horizontal 	
Temperature	22.5 ℃							
Pressure	960hPa							
Test Mode	Mode 6							
Frequency	Meter Reading	Factor	Emissio	on Level	Limits	Margin		
(MHz)	(dBµV)	(dB)	(dBµ\	V/m)	(dBµV/m)	(dB)	Value Type	
4960.000	46.48	0.22	46.	.7	74	-27.3	peak	
4960.000	37.25	0.22	37.4	47	54	-16.53	AVG	
7440.000	41.74	2.64	44.3	38	74	-29.62	peak	
	00.00	2.64	35.33		54	-18.67	AVG	
7440.000	32.69	2.04						
7440.000 Remark:	32.69	2.04						
Remark:	nna Factor + Cable							
Remark:		e Loss – Pre-	amplifier.	Model	Name	Baseus	Bowie 30 Max	
Remark: Factor = Ante	nna Factor + Cable	e Loss – Pre-	amplifier.		Name ve Humidity	Baseus	Bowie 30 Max	
Remark: Factor = Ante	nna Factor + Cable Baseus Wire	e Loss – Pre-	amplifier.	Relati				
Remark: Factor = Ante EUT Name Temperature	nna Factor + Cable Baseus Wire 22.5°C	e Loss – Pre-	amplifier.	Relati Test V	ve Humidity	55.4%		
Remark: Factor = Ante EUT Name Temperature Pressure Test Mode	nna Factor + Cable Baseus Wire 22.5°C 960hPa Mode 6	e Loss – Pre- less Headph	amplifier.	Relati Test V Anten	ve Humidity oltage na Polarity	55.4% Normal Vertical		
Remark: Factor = Ante	nna Factor + Cable Baseus Wire 22.5°C 960hPa Mode 6 Meter Reading	e Loss – Pre- less Headph Factor	amplifier. ones Emissio	Relation Test V Anten	ve Humidity oltage na Polarity Limits	55.4% Normal V Vertical		
Remark: Factor = Ante	nna Factor + Cable Baseus Wire 22.5 °C 960hPa Mode 6 Meter Reading (dBµV)	e Loss – Pre- less Headph Factor (dB)	amplifier. ones Emissio	Relation Test V Anten on Level	ve Humidity oltage na Polarity Limits (dBµV/m)	55.4% Normal Vertical Margin (dB)	Voltage Value Type	
Remark: Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	nna Factor + Cable Baseus Wire 22.5℃ 960hPa Mode 6 Meter Reading (dBµV) 46.21	e Loss – Pre- less Headph Factor (dB) 0.22	amplifier. ones Emissio (dBµ\ 46.4	Relation Test V Anten on Level V/m) 43	ve Humidity foltage na Polarity Limits (dBµV/m) 74	55.4% Normal Vertical Margin (dB) -27.57	Voltage Value Type peak	
Remark: Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	nna Factor + Cable Baseus Wire 22.5 °C 960hPa Mode 6 Meter Reading (dBµV) 46.21 37.42	e Loss – Pre- less Headph Factor (dB) 0.22 0.22	amplifier. ones Emissio (dBµ\ 46.4 37.6	Relativ Test V Anten on Level V/m) 43 64	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	55.4% Normal Vertical Margin (dB) -27.57 -16.36	Voltage Value Type peak AVG	
Remark: Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	nna Factor + Cable Baseus Wire 22.5℃ 960hPa Mode 6 Meter Reading (dBµV) 46.21	e Loss – Pre- less Headph Factor (dB) 0.22	amplifier. ones Emissio (dBµ\ 46.4	Relation Test V Anten on Level V/m) 43 64 59	ve Humidity foltage na Polarity Limits (dBµV/m) 74	55.4% Normal Vertical Margin (dB) -27.57	Voltage Value Type peak	

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All mode rates are tested and evaluated, π /4-DQPSK modulated 2DH5 mode is the worst case and documented in the report.



Report No.: AGC11758240403FR01A Page 24 of 24

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC11758240403AP02A

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC11758240403AP03A

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.