

BT FPC Antenna (i59-L)

1. Explanation of Product Number

S	2	B	4	B	B	1	F	1	B	0	5	5	0	0
				(1)	(2)	(3)	(4)	(5)						



Product Description:

(1) Product Categories:

B:BT Antenna

(2) Dimensions:

B1: 20.82*15.55 *0.15 (mm)

(3) Material:

F: FPC

(4) Working Frequencies:

1B: 2.4G-2.5G

(5) Antenna Series:

01: Serial number

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$

Hole Dia. : $\pm$



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Scale : Unit : mm

Drawn By : Andy Checked By : Simon

Designed By : Simon Approved By : Simon

No. 185, 501, Pingshan Village, No. 2, Lishan Road, Taoyuan Street, Nanshan District, Shenzhen

TITLE : BT FPC Antenna(i59-L)

PART
NO.

S2B4BB1F1B05500

REV.

A

2. Features

- *Stable and reliable in performances
- *RoHS compliance
- *Low cost

3. Applications

*BT

4. Description

* YINGFENMG FPC antenna series are specially designed for 2.4G-2.5G band application. Based on YINGFENG proprietary designs and processes, this FPC antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Antenna Electrical Specifications :

Characteristics	Specifications			Unit
Outline Dimensions	20.82*15.55 *0.15			mm
Frequency	2400~2500			MHz
Impedance	50			Ω
Polarization	Linear Polarization			
Return Loss Table	Return Loss			
Freq.Band	2.4G Hz	2.45G Hz	2.5G Hz	
dB	-11.49	-21.81	-13.63	
VSWR Table	VSWR			
Freq.Band	2.4G Hz	2.45G Hz	2.5G Hz	
	1.72	1.17	1.52	
GAIN Table	Total Gain = Xpol + Ppol			
Freq.Band	2400MHz	2450MHz	2480MHz	2500MHz
Peak Gain(dBi)	1.36	0.93	1.38	1.15

Tolerances (Unless otherwise specified)
X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$ Hole Dia. : $\pm$



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Scale : Unit : mm

Drawn By : Andy Checked By : Simon

Designed By : Simon Approved By : Simon

No. 185, 501, Pingshan Village, No. 2, Lishan Road, Taoyuan Street, Nanshan District, Shenzhen

TITLE : BT FPC Antenna(i59-L)


PART
NO.

S2B4BB1F1B05500

REV.
A


6. Dimensions (unit: mm)

blic errand : ±0.2mm

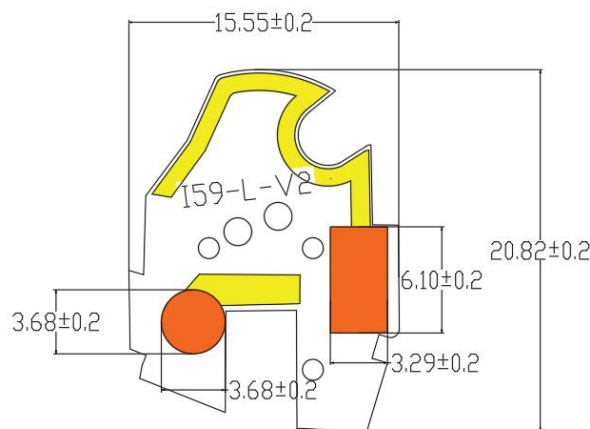

7. Measurement Characteristics:

(1) Return Loss

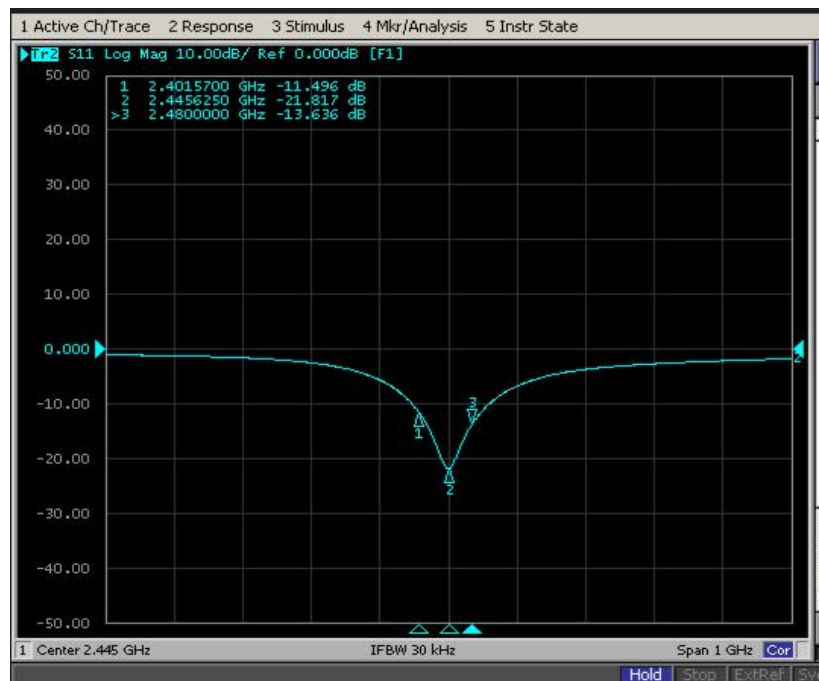

(2) VSWR

Tolerances (Unless otherwise specified)
X : ± 1 X.X : ± 0.1 X.XX : ± 0.01
Angle : ± Hole Dia. : ±




深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD


Scale : Unit : mm
Drawn By : Andy Checked By : Simon
Designed By : Simon Approved By : Simon

No. 185, 501, Pingshan Village, No. 2, Lishan Road, Taoyuan Street, Nanshan District, Shenzhen

TITLE : BT FPC Antenna(i59-L)	PART NO.	S2B4BB1F1B05500	REV.
			A

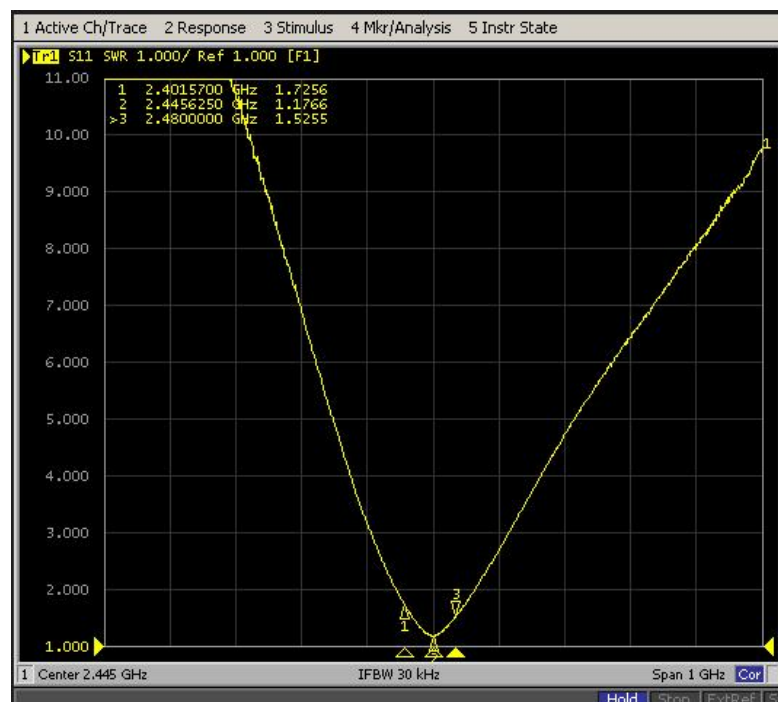

8. Three D Radiation Pattern measurements

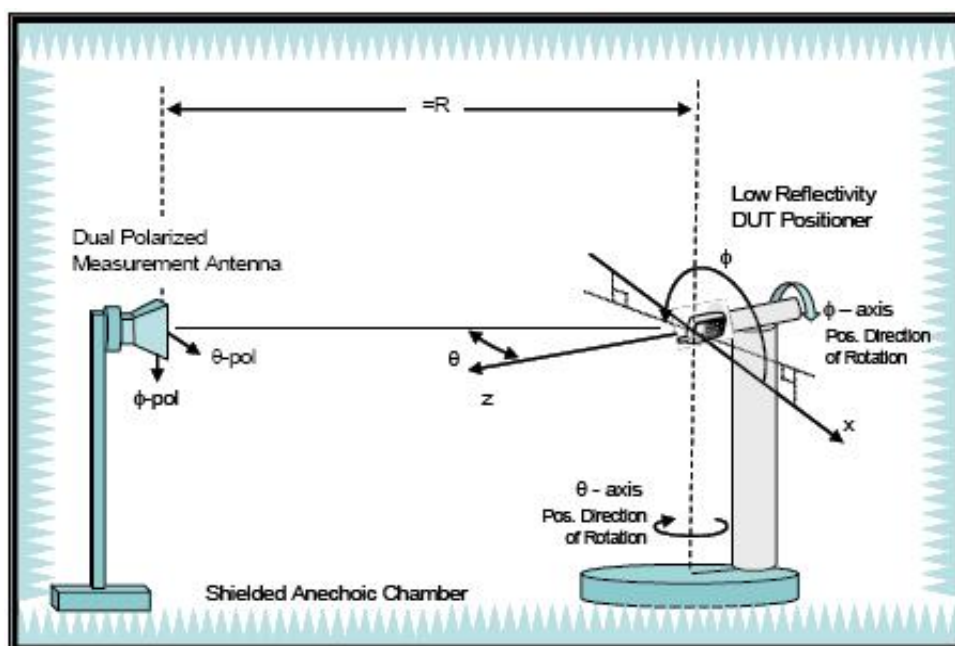

9. Radiation Pattern

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$

Hole Dia. : $\pm$



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

No. 185, 501, Pingshan Village, No. 2, Lishan Road, Taoyuan Street, Nanshan District, Shenzhen

Scale :

Unit : mm

Drawn By : Andy

Checked By : Simon

Designed By : Simon

Approved By : Simon

TITLE : BT FPC Antenna(i59-L)

PART
NO.

S2B4BB1F1B05500



REV.

A

9-3.complete machine Efficiency Table

Frequency(MHz)	2400	2420	2450	2460	2480	2500
Efficiency (%)	31.30	31.49	31.39	31.54	31.80	31.61
Gain (dBi)	1.36	1.73	1.30	1.13	1.38	1.15

10-1 产品包装 Product packaging

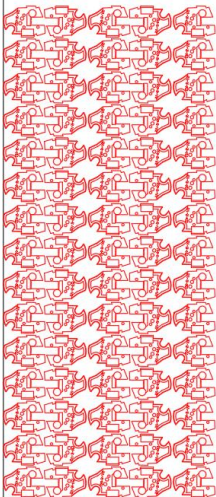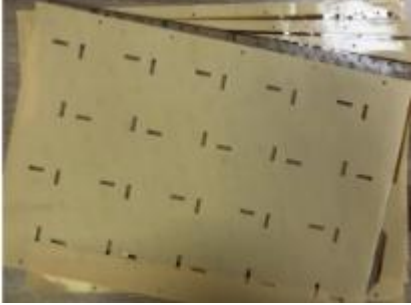版本 edition:: V2.0	页码 Page: 1/1
1.产品排版: 15*5=75PCS	2.离型纸隔层摆放保护天线 Barrier paper protection products
	
3.密封袋封装效果 Sealing bag packaging effect	4.纸箱封箱效果(贴出货标签和 ROHS 标签 Carton sealing effect
	

10-2.Revision Control:

Revision	Date	Content	Remark
A	2024-08-27	New Issued.	N/A

Tolerances (Unless otherwise specified)
X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : ± Hole Dia. : ±

Scale :	Unit : mm
Drawn By : Andy	Checked By : Simon
Designed By :Simon	Approved By :Simon



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

No. 185, 501, Pingshan Village, No. 2, Lishan Road, Taoyuan Street, Nanshan District, Shenzhen

TITLE : BT FPC Antenna(i59-L)	PART NO.	S2B4BB1F1B05500	REV.
			A