


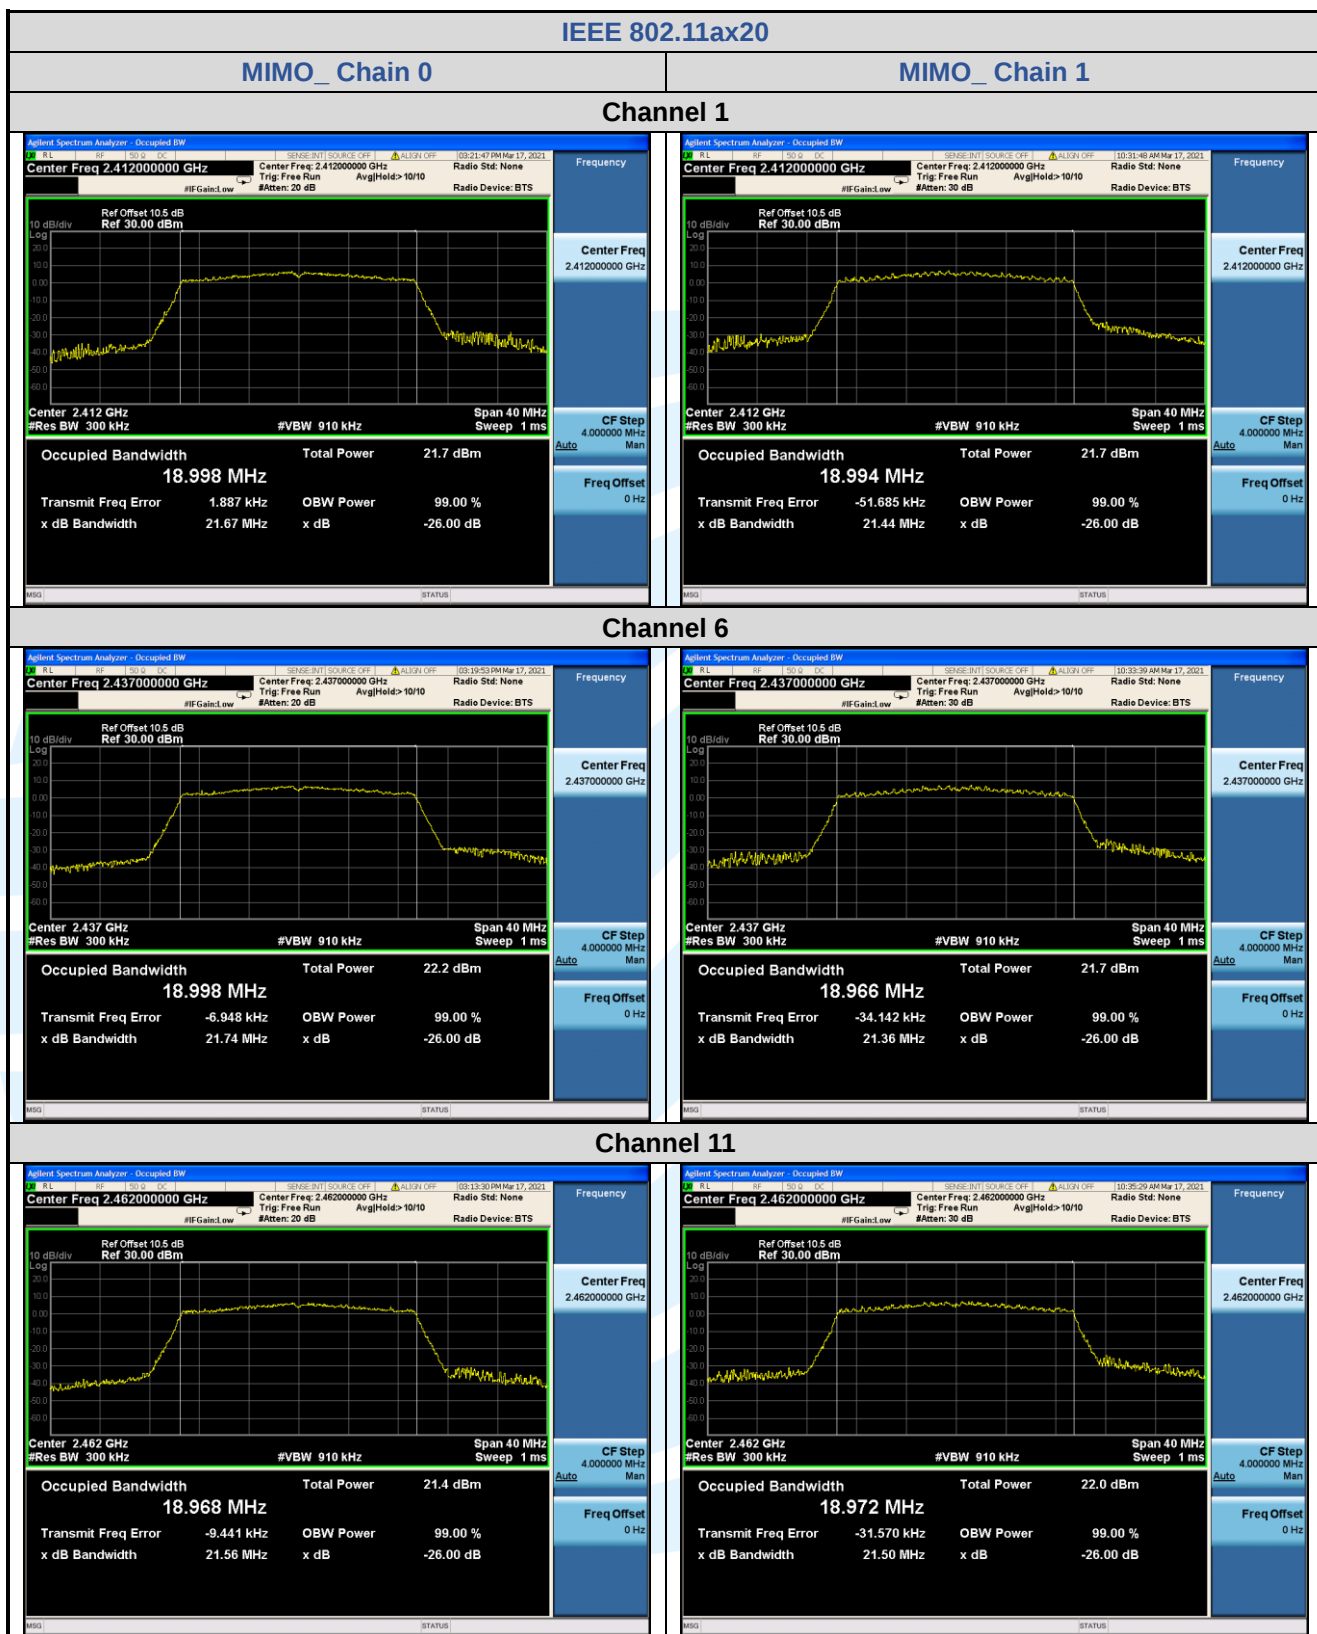

5.5 POWER SPECTRAL DENSITY

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (e)
RSS-247 Issue 2, Section 5.2(b)
- Test Method:** ANSI C63.10-2013 Clause 11.10.2
- Limit:** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:
a) Set analyzer center frequency to DTS channel center frequency.
b) Set the span to 1.5 times the DTS bandwidth.
c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
d) Set the VBW $\geq 3 \times \text{RBW}$.
e) Detector = peak.
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum amplitude level within the RBW.
j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Results:**

Mode	Channel/ Frequency (MHz)	Power spectral density (dBm/3kHz)				Pass / Fail
		SISO_ Chain 0	SISO_ Chain 1	Total Power MIMO_ Chain 0+1	Limit @3kHz (dBm)	
IEEE 802.11b	1(2412)	4.340	-5.094	---	8	Pass
	6(2437)	4.264	-4.544	---	8	Pass
	11(2462)	2.839	-4.826	---	8	Pass
IEEE 802.11g	1(2412)	-1.081	-9.061	---	8	Pass
	6(2437)	-1.020	-8.862	---	8	Pass
	11(2462)	-1.409	-8.574	---	8	Pass
IEEE 802.11n-HT20	1(2412)	-3.940	-11.582	-3.25	8	Pass
	6(2437)	-4.265	-11.375	-3.49	8	Pass
	11(2462)	-3.702	-10.956	-2.95	8	Pass
IEEE 802.11ax20	1(2412)	-6.533	-12.689	-5.59	8	Pass
	6(2437)	-6.402	-12.088	-5.36	8	Pass
	11(2462)	-6.245	-11.797	-5.18	8	Pass

Remark:

- Power with Duty Factor = Measured Power + Duty Cycle Factor
- Total (Chain 0+1) = $10 \cdot \log[(10^{\text{Chain 0/10}}) + (10^{\text{Chain 1/10}})]$
- Directional gain and the maximum conducted power spectral density limit see table below:

Frequency Band	Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Peak Power Limit (dBm)
2400 MHz to 2483.5 MHz	2.06	2.06	5.07	8.00
Basic methodology with N_{ANT} transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by N_{ANT} transmitter outputs of equal power. Directional gain is to be computed as follows:				
If <i>any</i> transmit signals are <i>correlated</i> with each other,				
Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi				

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com


<http://www.uttlab.com>


UTTR-RF-RSS247-V1.1

The test plots as follows:

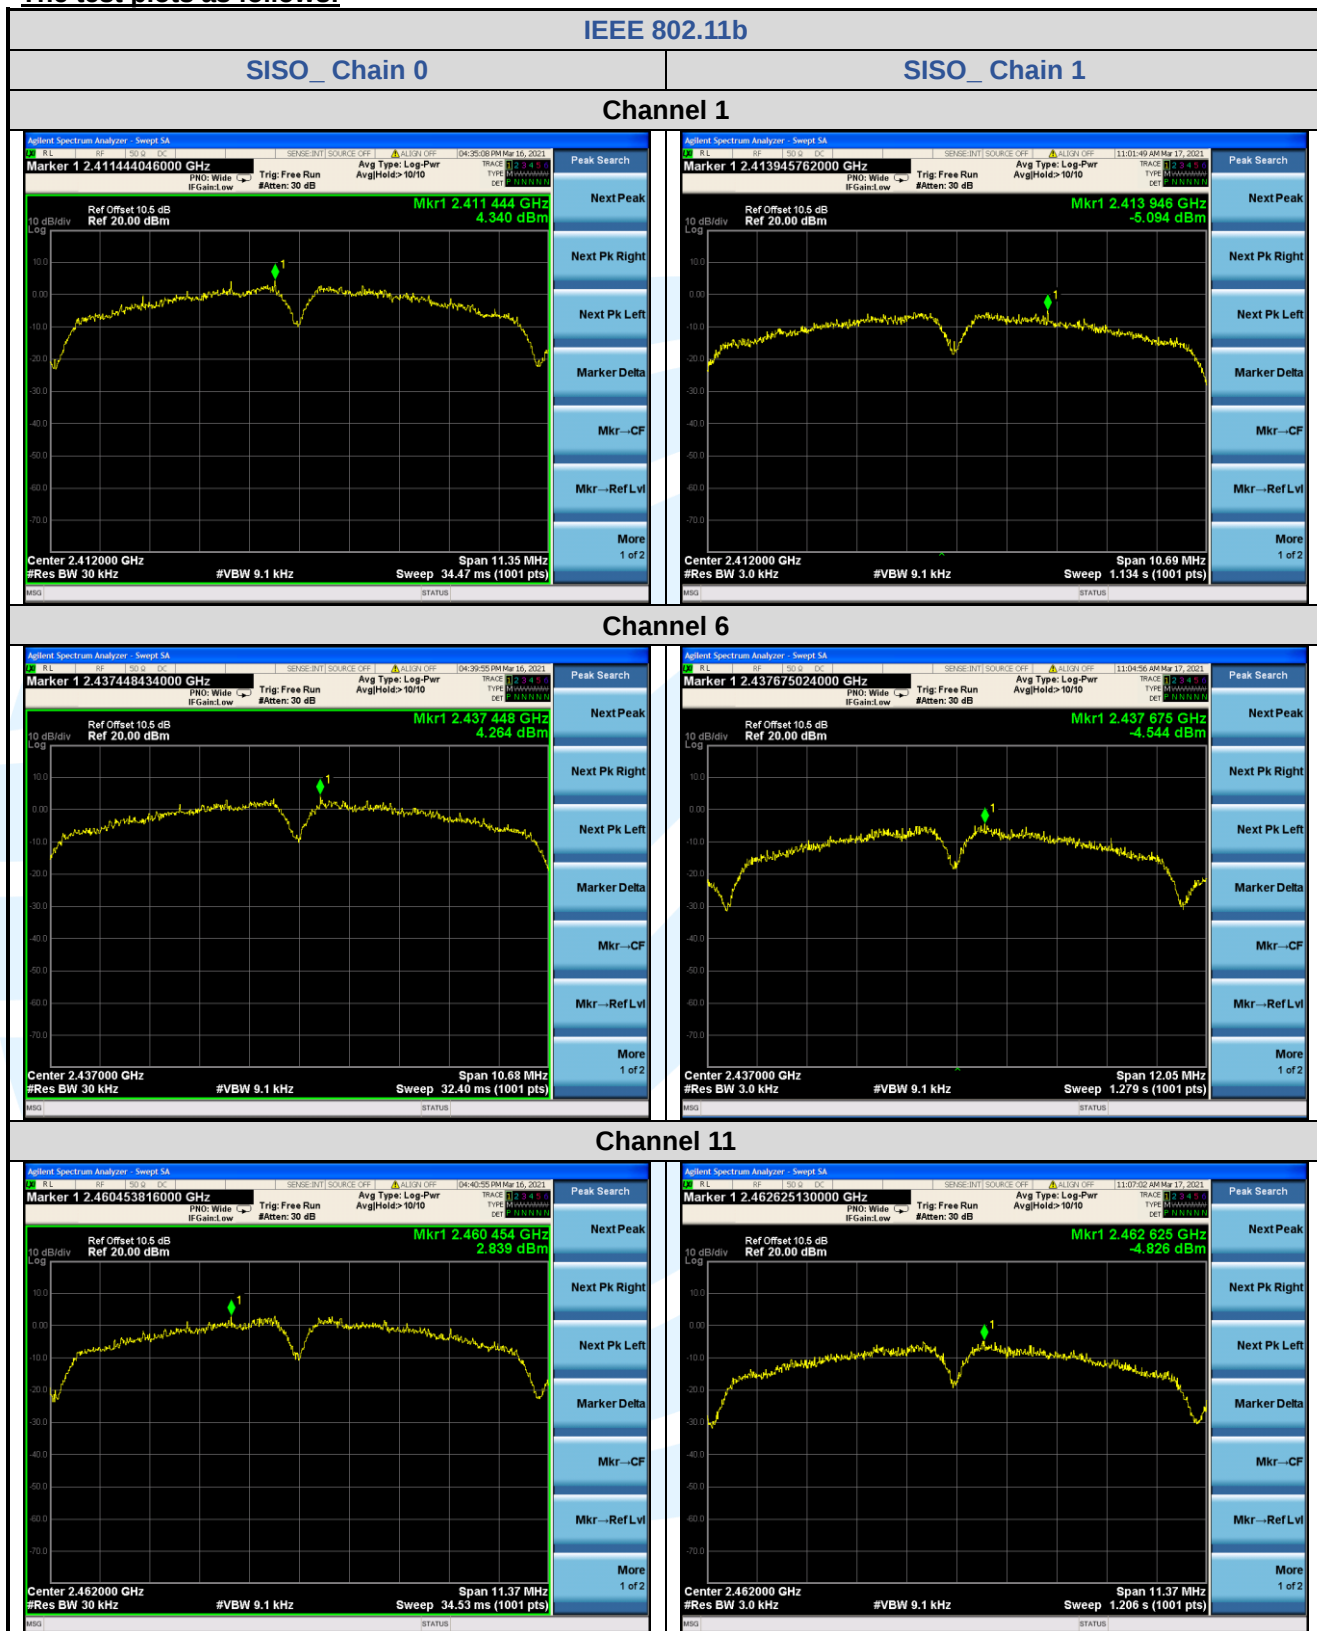

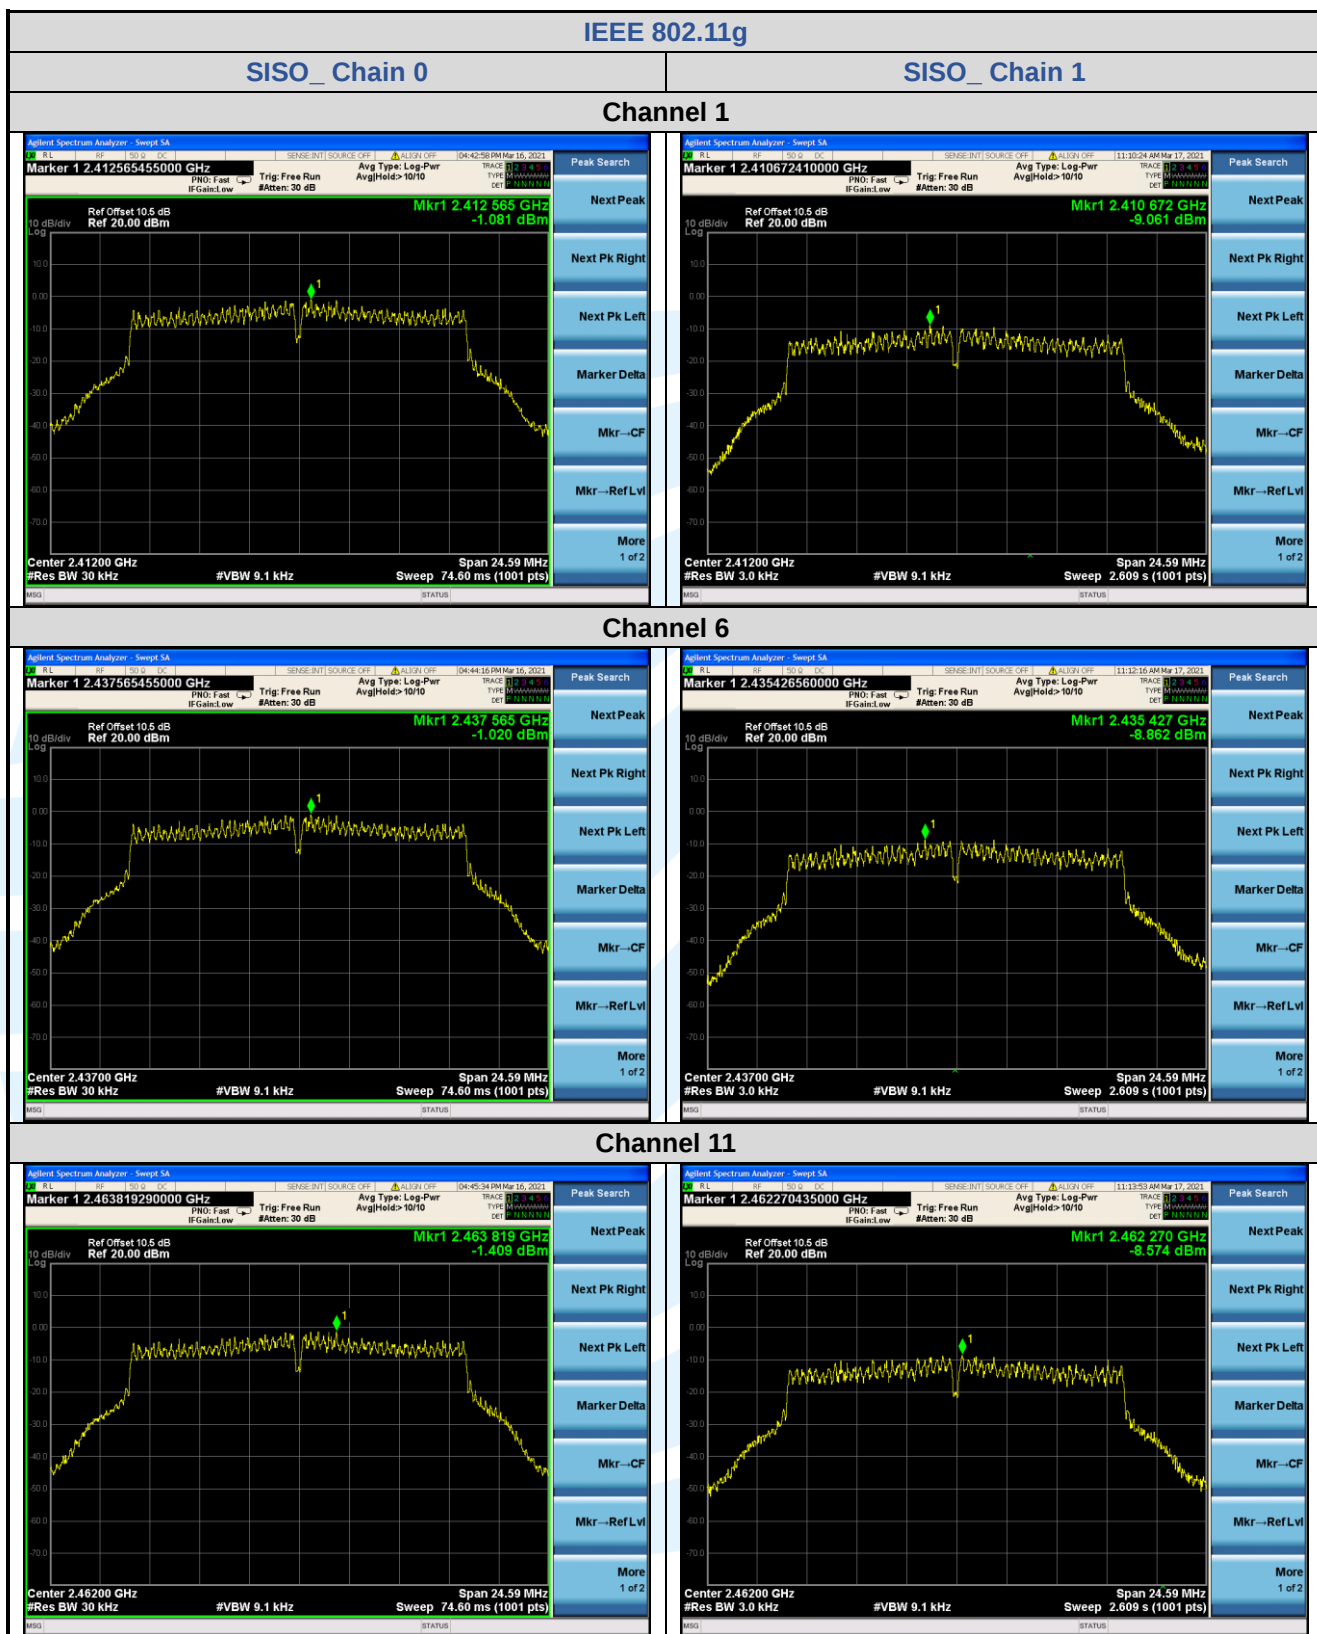

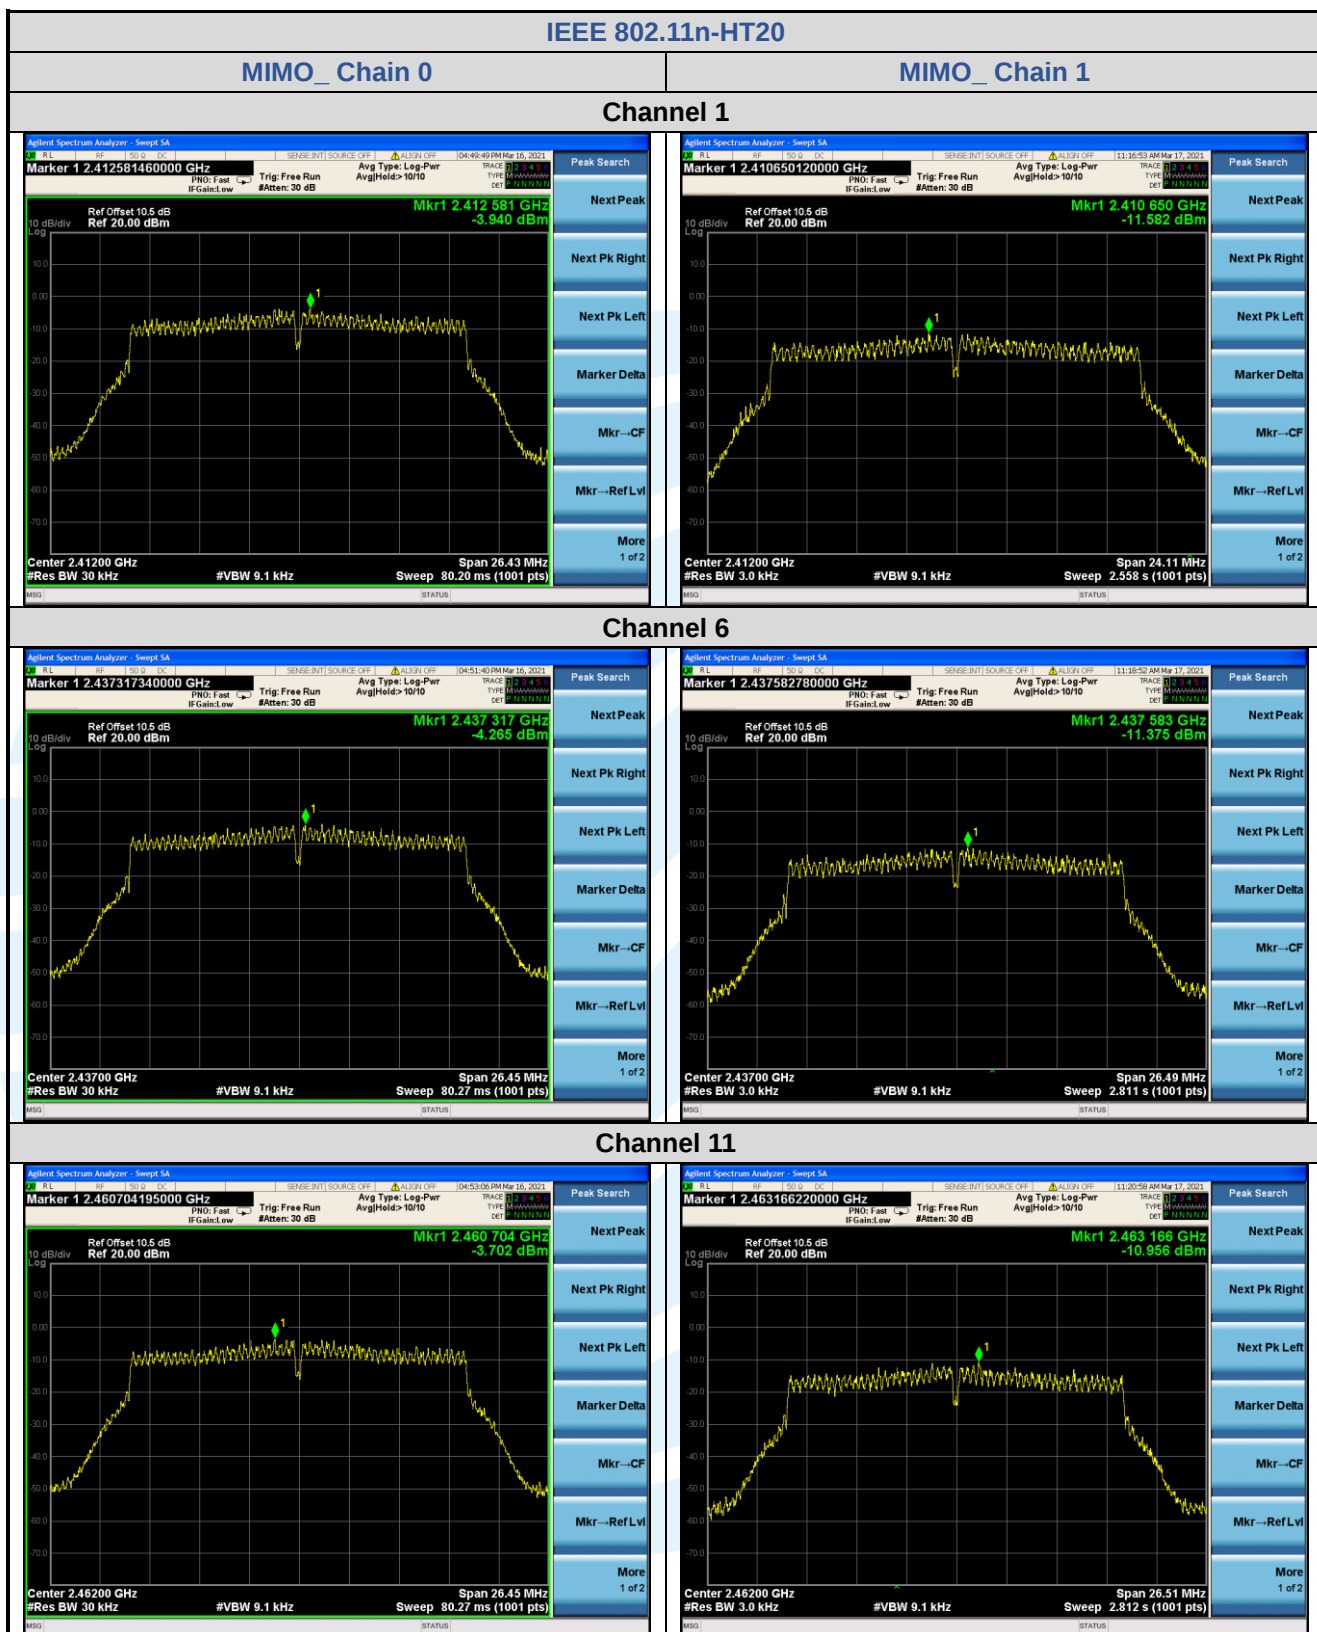


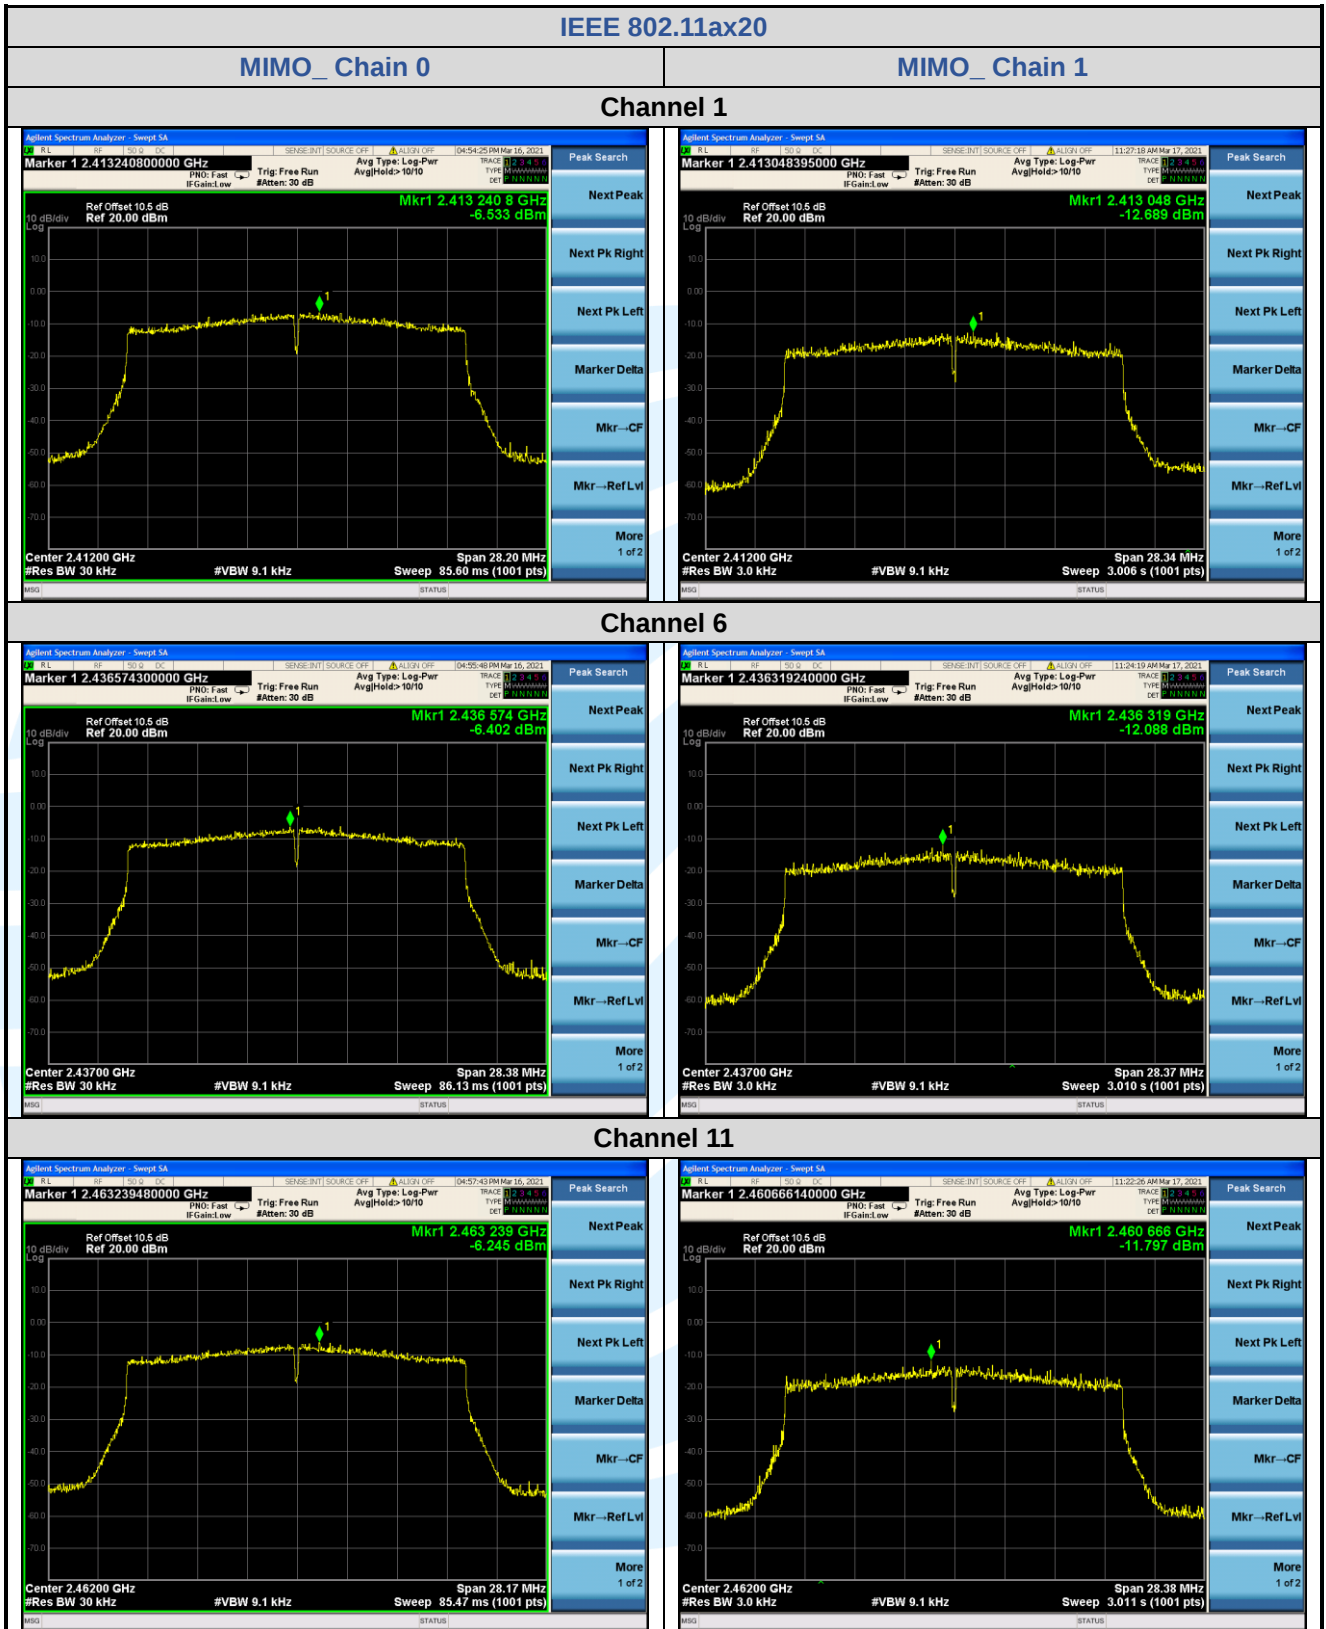

5.6 CONDUCTED OUT OF BAND EMISSION

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5
Test Method:	ANSI C63.10-2013 Clause 11.11
Limit:	In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: Step 1: Measurement Procedure REF a) Set instrument center frequency to DTS channel center frequency. b) Set the span to ≥ 1.5 times the DTS bandwidth. c) Set the RBW = 100 kHz. d) Set the VBW $\geq 3 \times$ RBW. e) Detector = peak. f) Sweep time = auto couple. g) Trace mode = max hold. h) Allow trace to fully stabilize. i) Use the peak marker function to determine the maximum PSD level. j) Note that the channel found to contain the maximum PSD level can be used to establish the reference level. Step 2: Measurement Procedure OOB a) Set RBW = 100 kHz. b) Set VBW ≥ 300 kHz. c) Detector = peak. d) Sweep = auto couple. e) Trace Mode = max hold. f) Allow trace to fully stabilize. g) Use the peak marker function to determine the maximum amplitude level. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass

The test plots as follows:

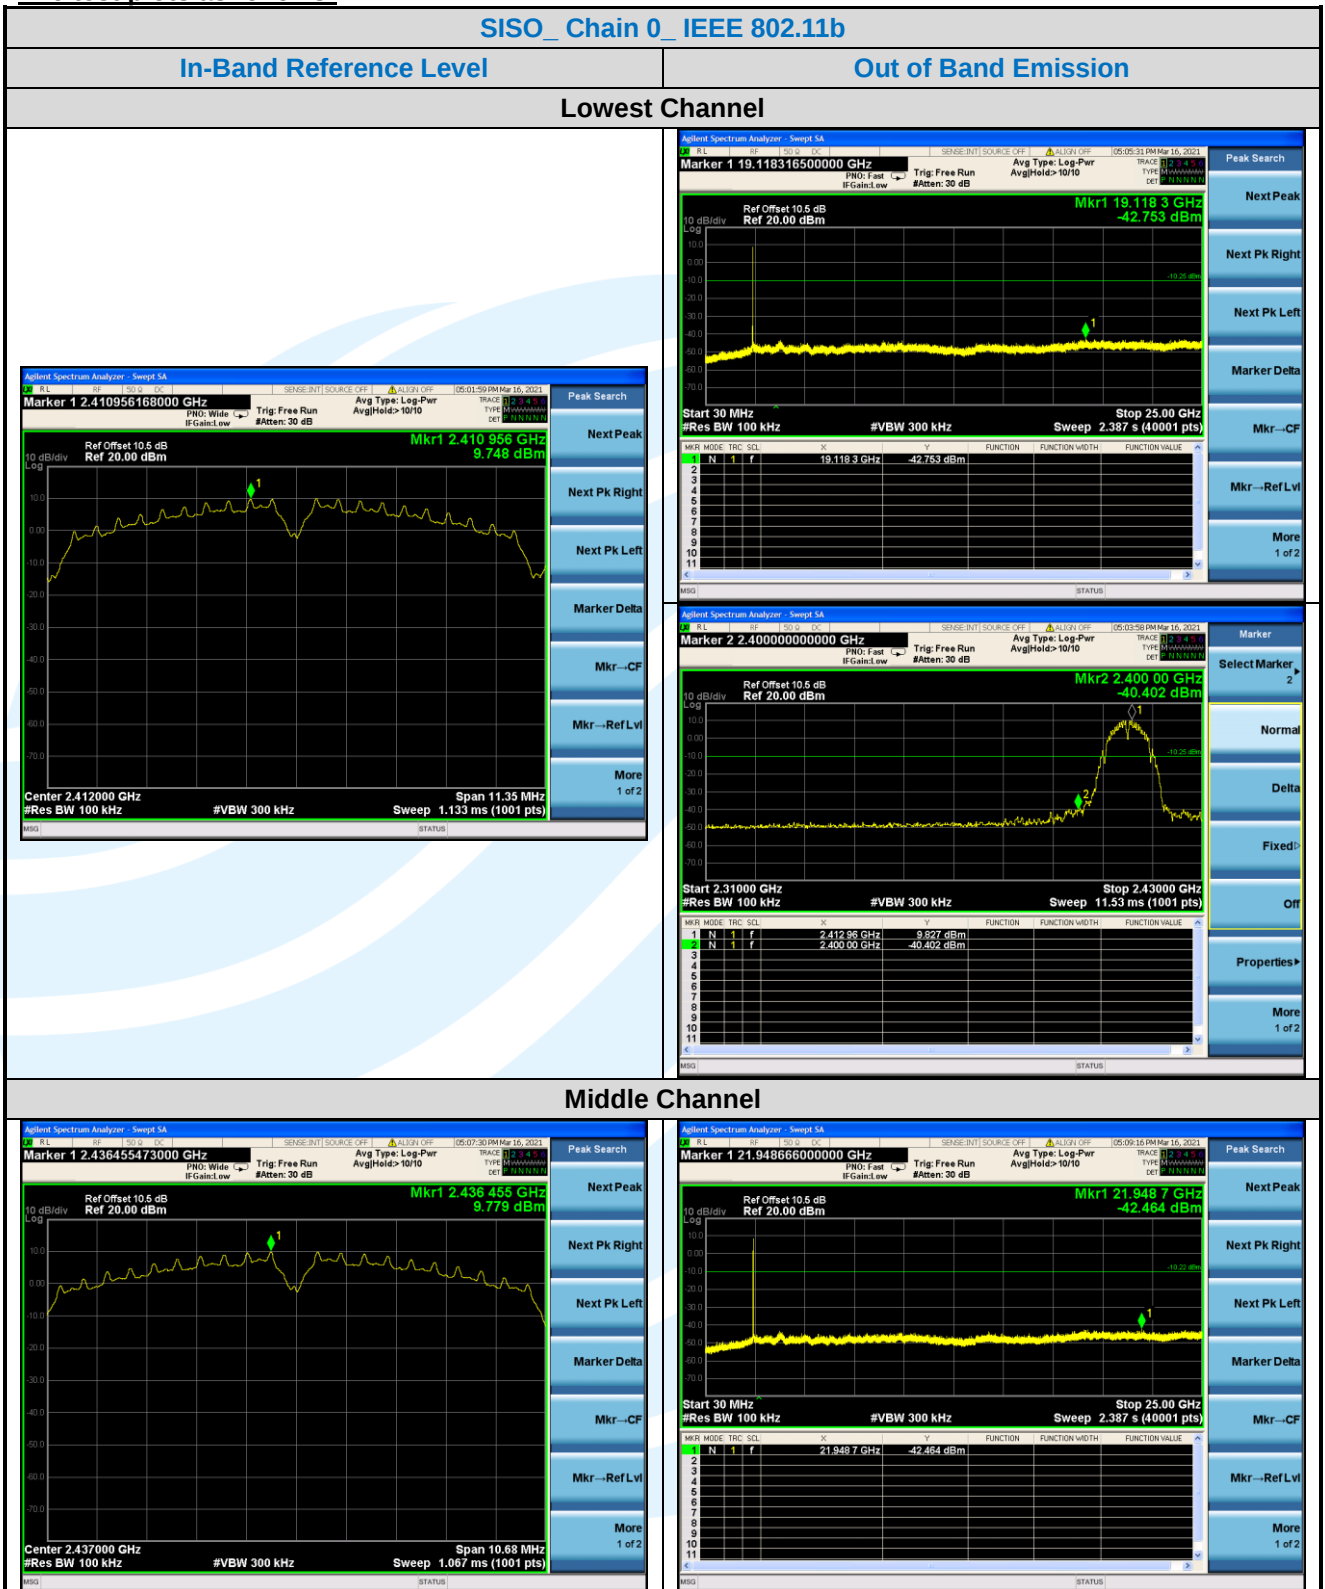

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

